

### 01\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch23095



Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240320 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.878$  S/m;  $\epsilon_r = 40.535$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.71, 9.71, 9.71); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23095/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.11 W/kg

**Ch23095/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 34.10 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.472 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

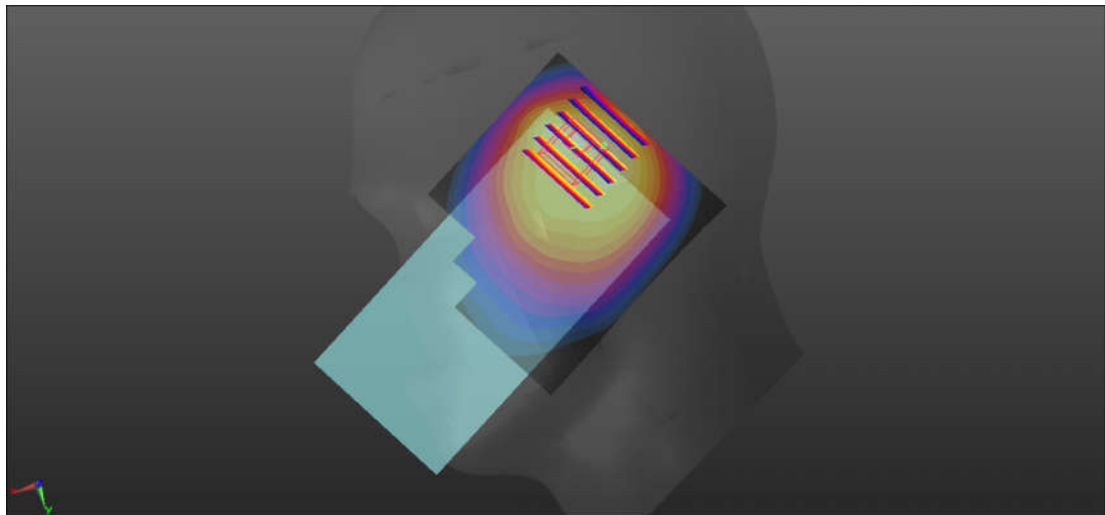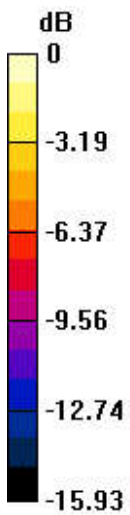

0 dB = 1.27 W/kg

## 02\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch23230

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240320 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 40.406$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.71, 9.71, 9.71); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.46 W/kg



**Ch23230/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 38.64 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.564 W/kg**

Maximum value of SAR (measured) = 1.57 W/kg

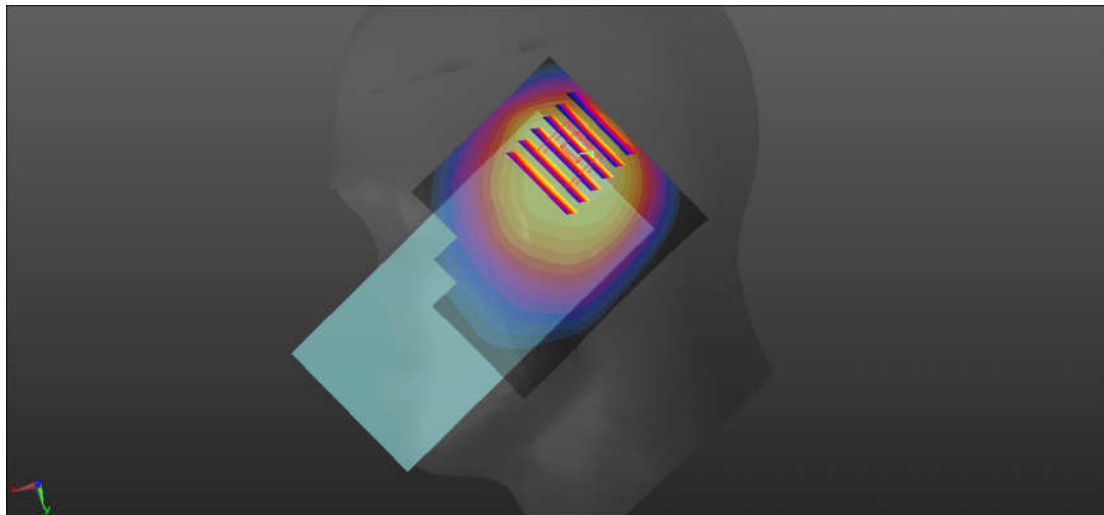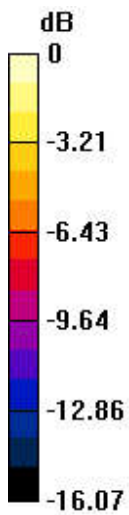

0 dB = 1.57 W/kg

### 03\_GSM850\_GPRS(3 Tx slots)\_Right Cheek\_Ch128

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 41.487$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch128/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg



**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.742 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.444 W/kg**

Maximum value of SAR (measured) = 1.35 W/kg

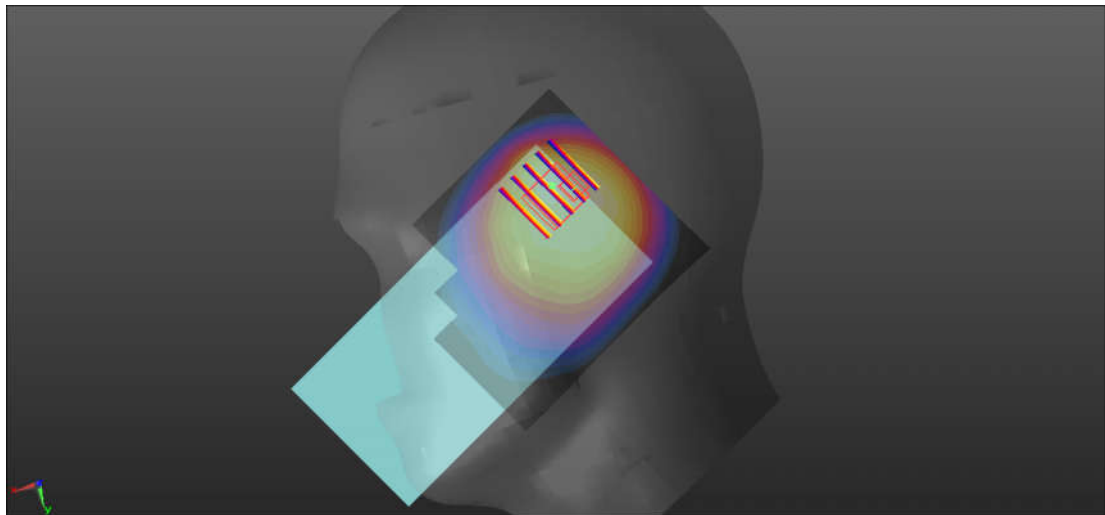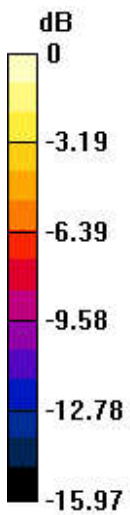

0 dB = 1.13 W/kg

## 04\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 41.48$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C


### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4132/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.50 W/kg

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 42.93 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 2.58 W/kg  
**SAR(1 g) = 0.98 W/kg; SAR(10 g) = 0.609 W/kg**  
Maximum value of SAR (measured) = 1.96 W/kg

**Ch4132/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 42.93 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 2.71 W/kg  
**SAR(1 g) = 0.94 W/kg; SAR(10 g) = 0.565 W/kg**  
Maximum value of SAR (measured) = 2.01 W/kg

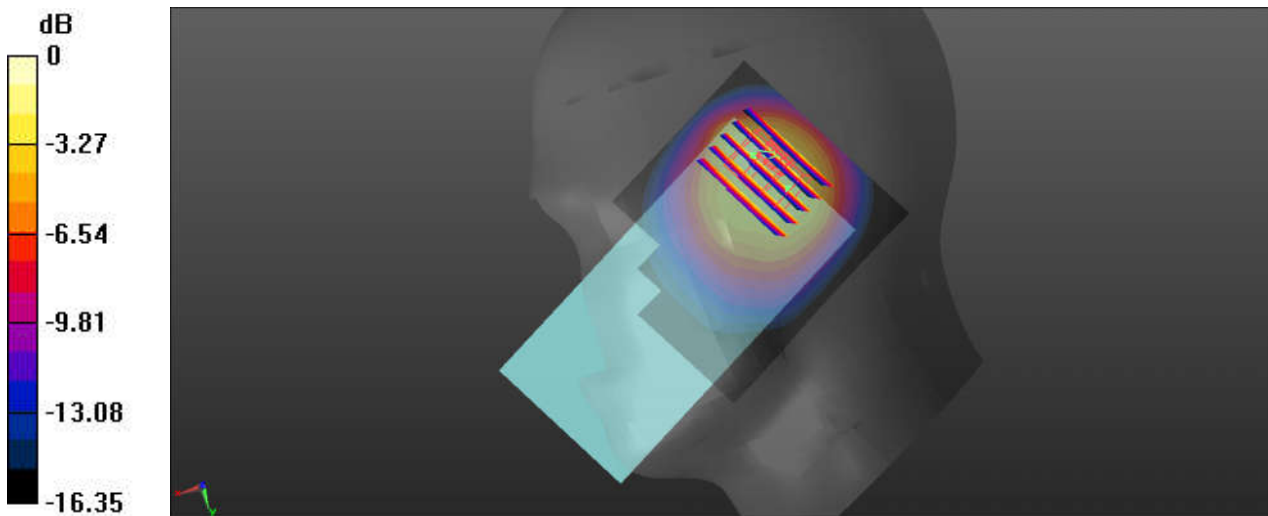

0 dB = 2.01 W/kg

## 05\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch20525


Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20525/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.674 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 30.79 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.230 W/kg**  
 Maximum value of SAR (measured) = 0.61 W/kg

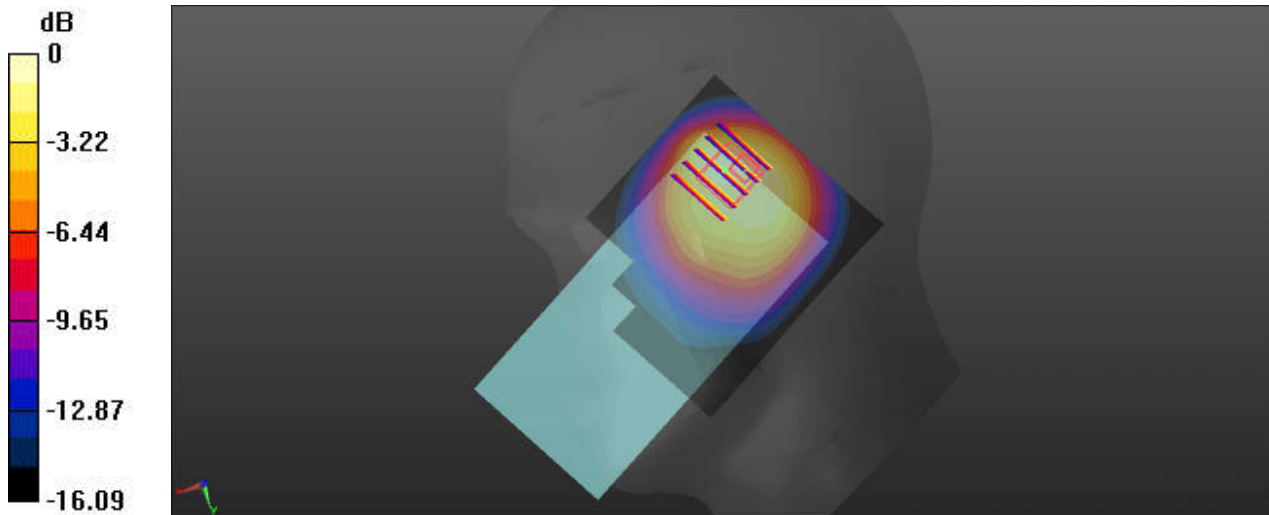

0 dB = 0.674 W/kg

## 06\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch26865



Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835\_240321 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 41.464$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26865/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.29 W/kg

**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 42.14 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 2.14 W/kg  
**SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.546 W/kg**  
 Maximum value of SAR (measured) = 1.55 W/kg

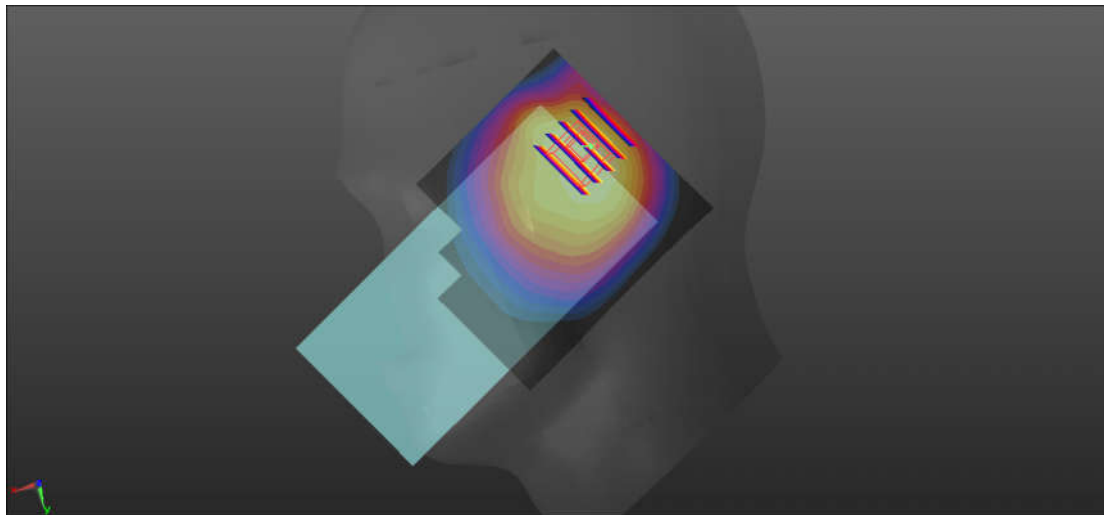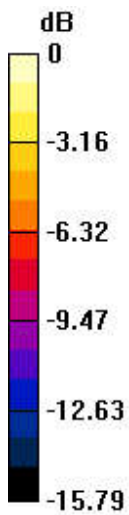

0 dB = 1.55 W/kg

### 07\_RF1 n5\_25M\_QPSK\_64RB\_32Offset\_DFT-15\_Right Cheek\_Ch167300



Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch167300/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.893 W/kg

**Ch167300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 32.24 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.48 W/kg  
**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.361 W/kg**  
Maximum value of SAR (measured) = 1.13 W/kg

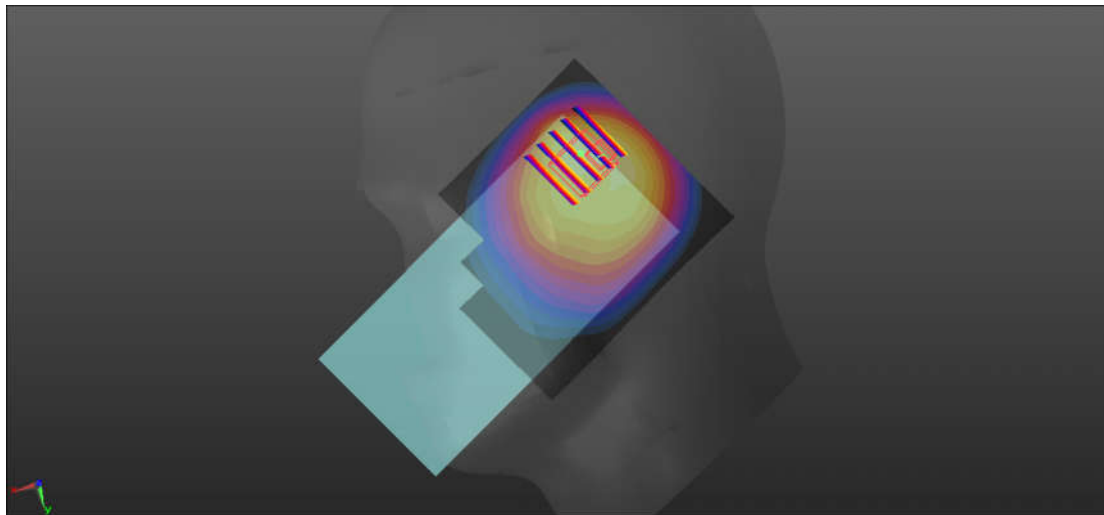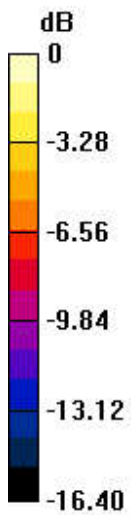

0 dB = 1.13 W/kg

## 08\_WCDMA IV\_RMC 12.2Kbps\_Left Cheek\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.373 \text{ S/m}$ ;  $\epsilon_r = 38.883$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1513/Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.27 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.86 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 1.31 W/kg  
**SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.365 W/kg**  
 Maximum value of SAR (measured) = 1.03 W/kg

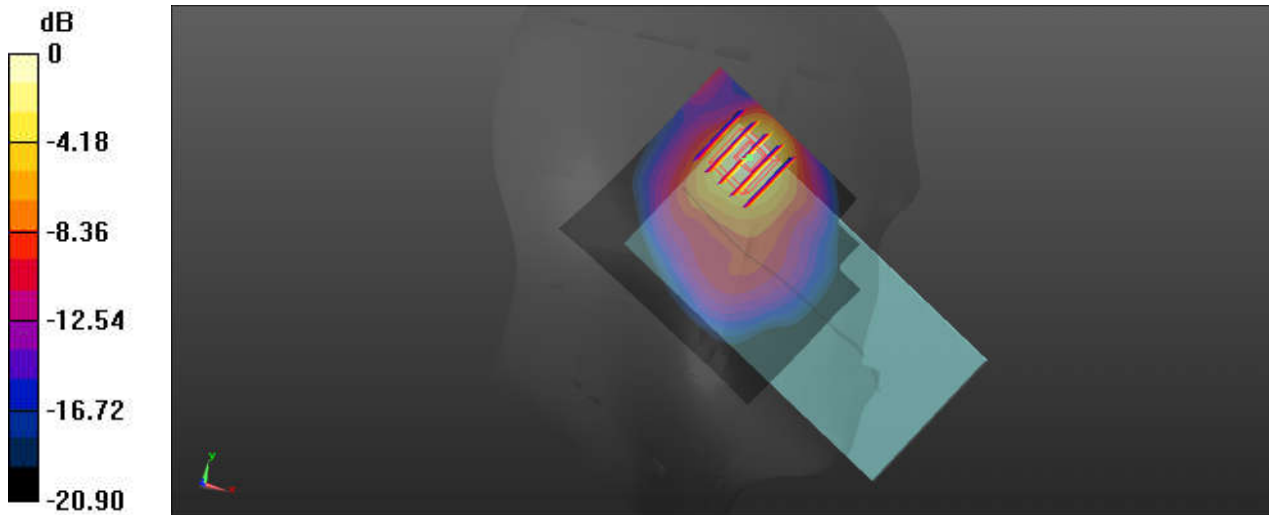

0 dB = 1.03 W/kg



**09\_LTE Band 4\_20M\_QPSK\_50RB\_0Offset\_Left Cheek\_Ch20175**


Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.361$  S/m;  $\epsilon_r = 38.928$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

## DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20175/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.547 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.428 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 0.686 W/kg  
**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.188 W/kg**  
Maximum value of SAR (measured) = 0.532 W/kg

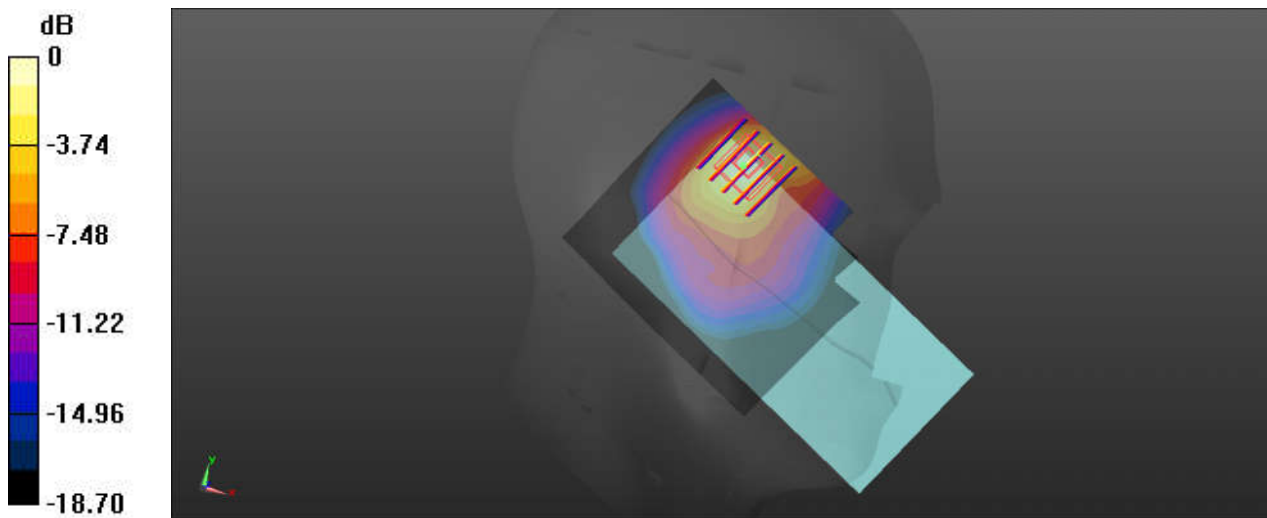

0 dB = 0.547 W/kg

## 10\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch132572



Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 38.841$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132572/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.10 W/kg

**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 12.50 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.384 W/kg**  
Maximum value of SAR (measured) = 1.07 W/kg

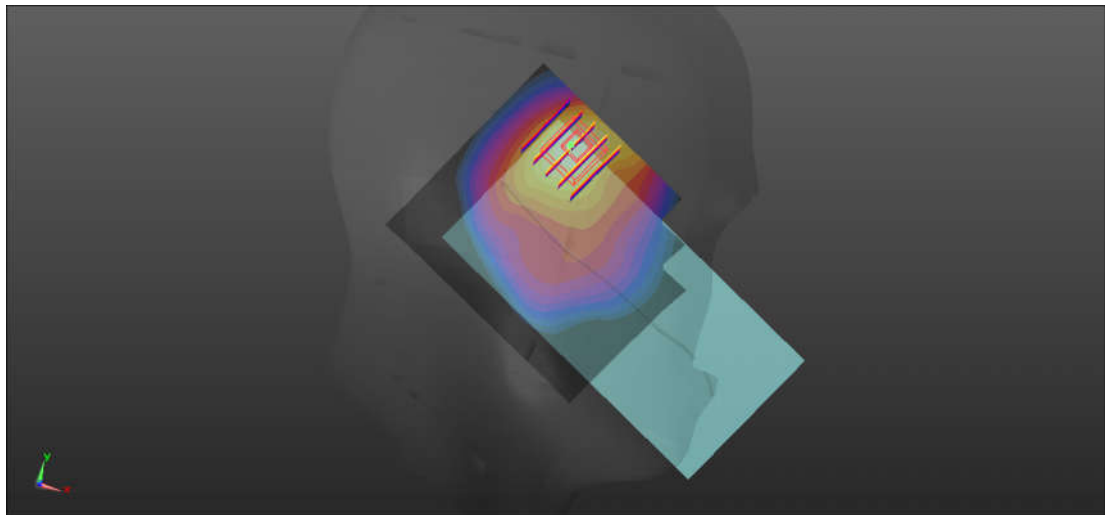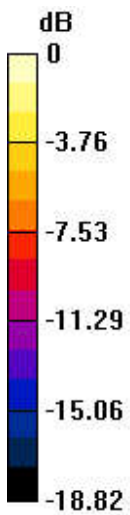

0 dB = 1.07 W/kg

## 11\_FR1 n66\_45M\_QPSK\_120RB\_60Offset\_Left Cheek\_Ch349000


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 38.902$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch349000/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.12 W/kg

**Ch349000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 10.37 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.361 W/kg**  
 Maximum value of SAR (measured) = 1.05 W/kg

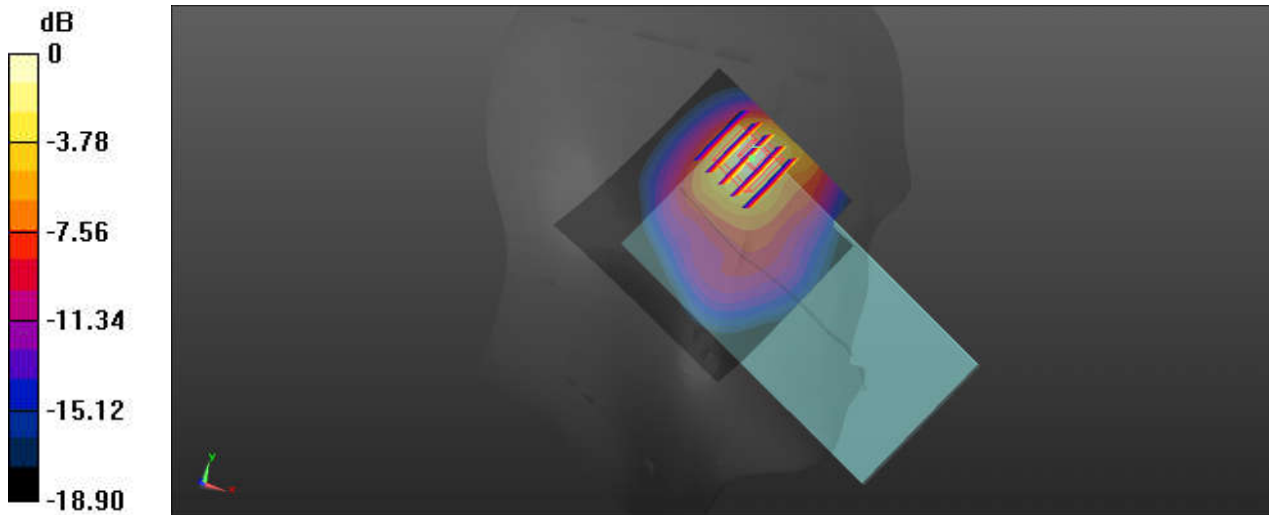

0 dB = 1.05 W/kg

## 12\_GSM1900\_GPRS(2 Tx slots)\_Left Cheek\_Ch661


Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15  
 Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch661/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.08 W/kg

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 23.02 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.363 W/kg**  
 Maximum value of SAR (measured) = 1.07 W/kg

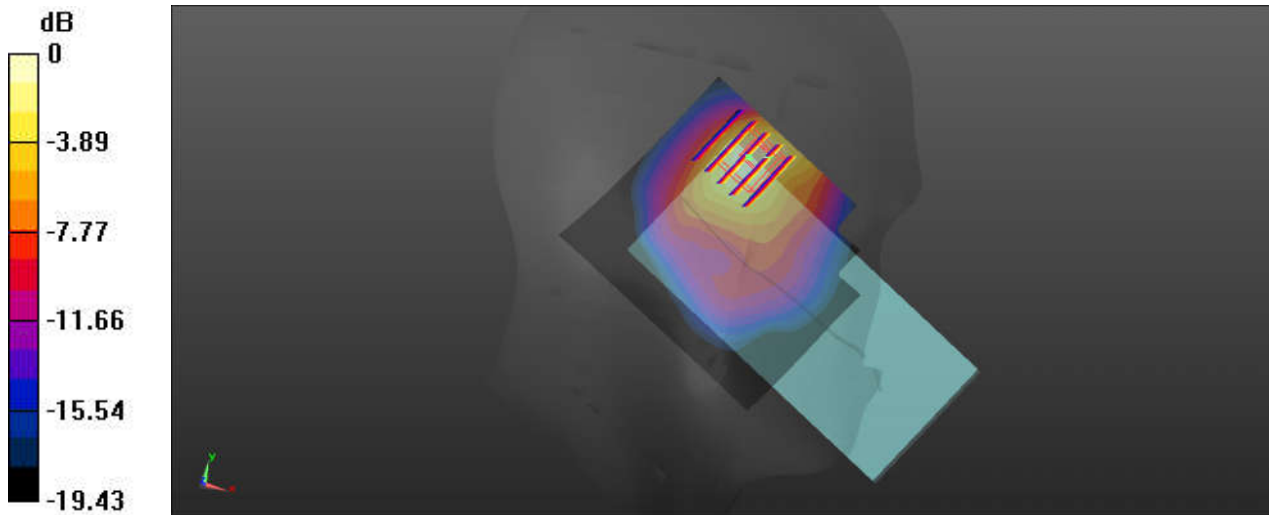

0 dB = 1.07 W/kg

### 13\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.409$  S/m;  $\epsilon_r = 41.026$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9262/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.25 W/kg

**Ch9262/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 10.70 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 1.89 W/kg  
**SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.441 W/kg**  
 Maximum value of SAR (measured) = 1.45 W/kg

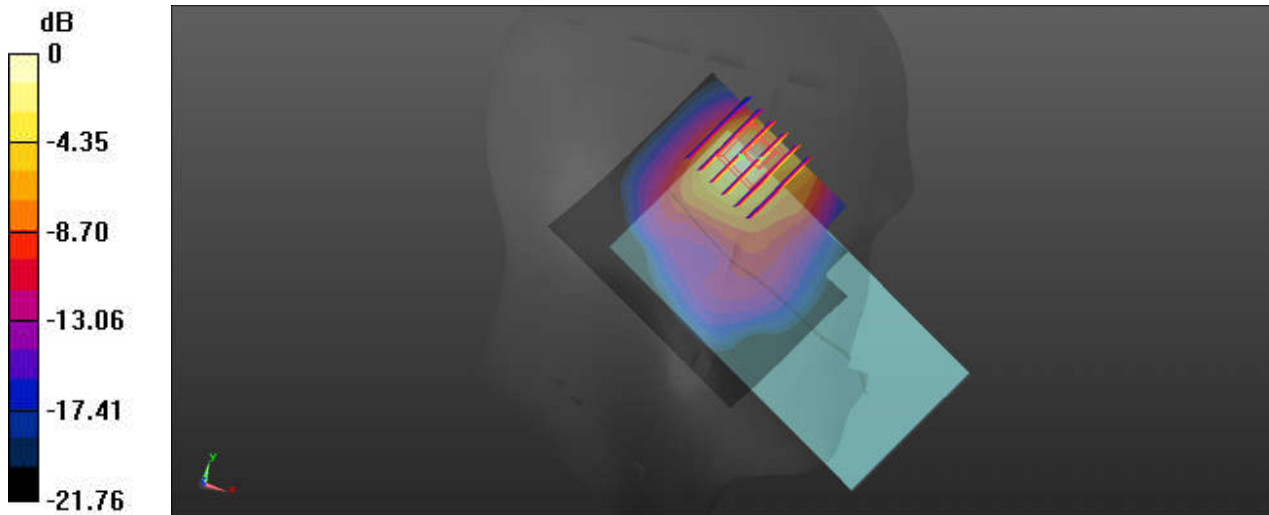

0 dB = 1.45 W/kg

### 14\_LTE Band 2\_20M\_QPSK\_50RB\_0Offset\_Left Cheek\_Ch18900



Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch18900/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.720 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.670 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.01 W/kg  
**SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.245 W/kg**  
Maximum value of SAR (measured) = 0.773 W/kg

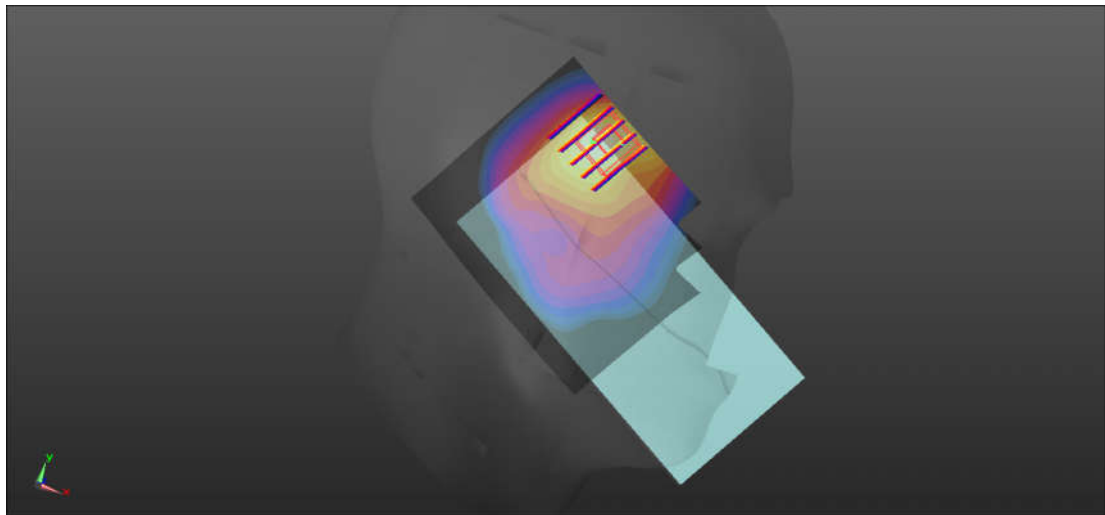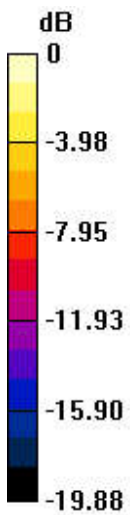

0 dB = 0.773 W/kg

### 15\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch26140


Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.414$  S/m;  $\epsilon_r = 41.016$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26140/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.15 W/kg

**Ch26140/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.00 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.60 W/kg  
**SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.368 W/kg**  
Maximum value of SAR (measured) = 1.19 W/kg

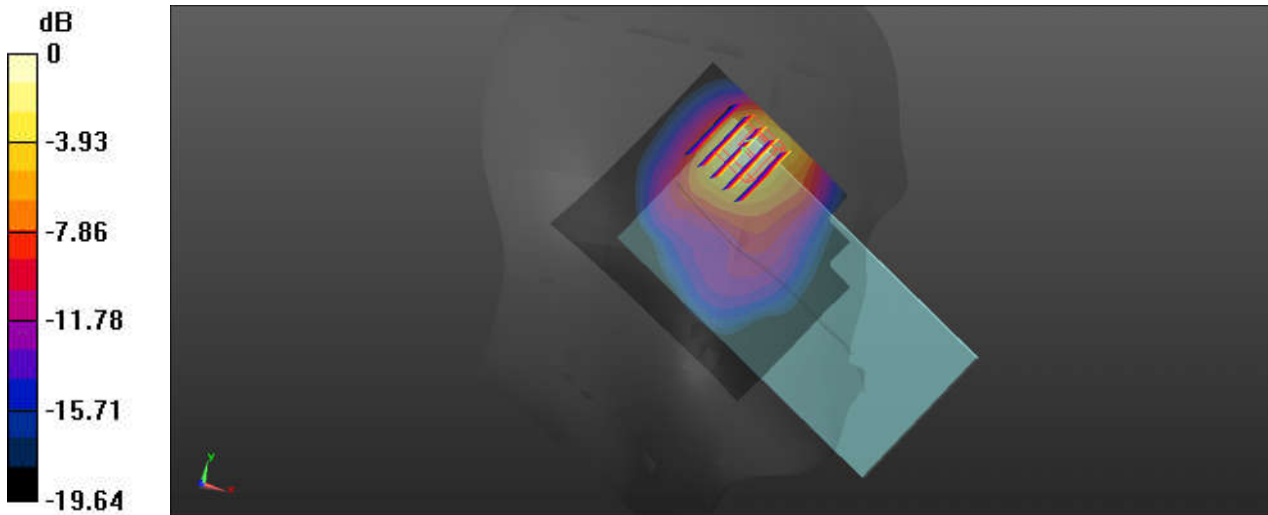

0 dB = 1.19 W/kg

## 16\_FR1 n2\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Left Cheek\_Ch376000



Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376000/Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.20 W/kg

**Ch376000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 12.86 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 1.66 W/kg  
**SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.406 W/kg**  
Maximum value of SAR (measured) = 1.29 W/kg

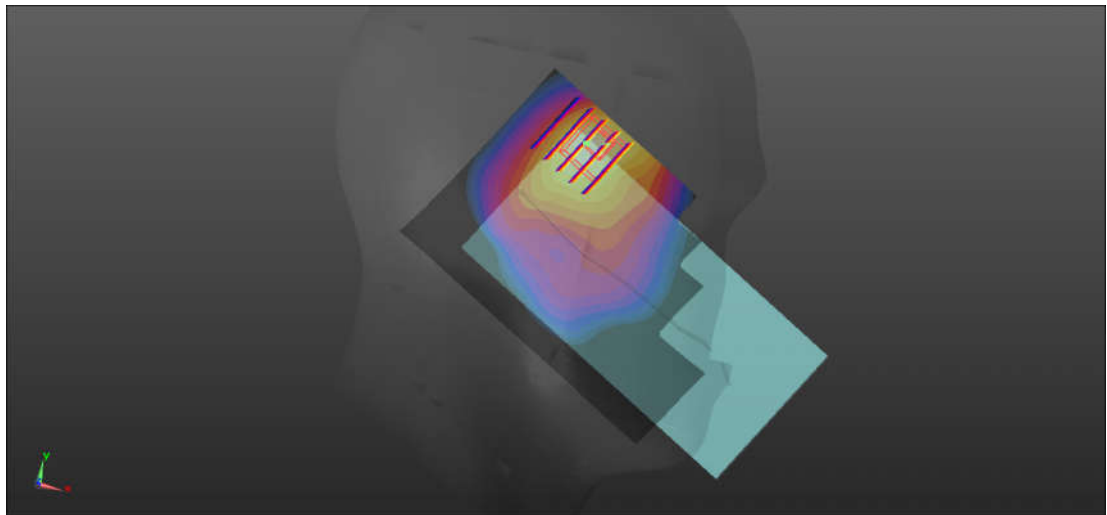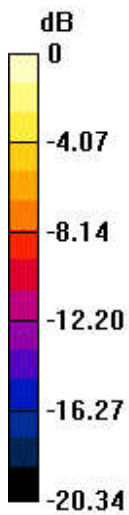

0 dB = 1.29 W/kg



## 17\_LTE Band 7\_20M\_QPSK\_1RB\_99Offset\_Right Cheek\_Ch21100



Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.875$  S/m;  $\epsilon_r = 39.179$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch21100/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.51 W/kg

**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 11.19 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 2.30 W/kg  
**SAR(1 g) = 0.926 W/kg; SAR(10 g) = 0.448 W/kg**  
Maximum value of SAR (measured) = 1.67 W/kg

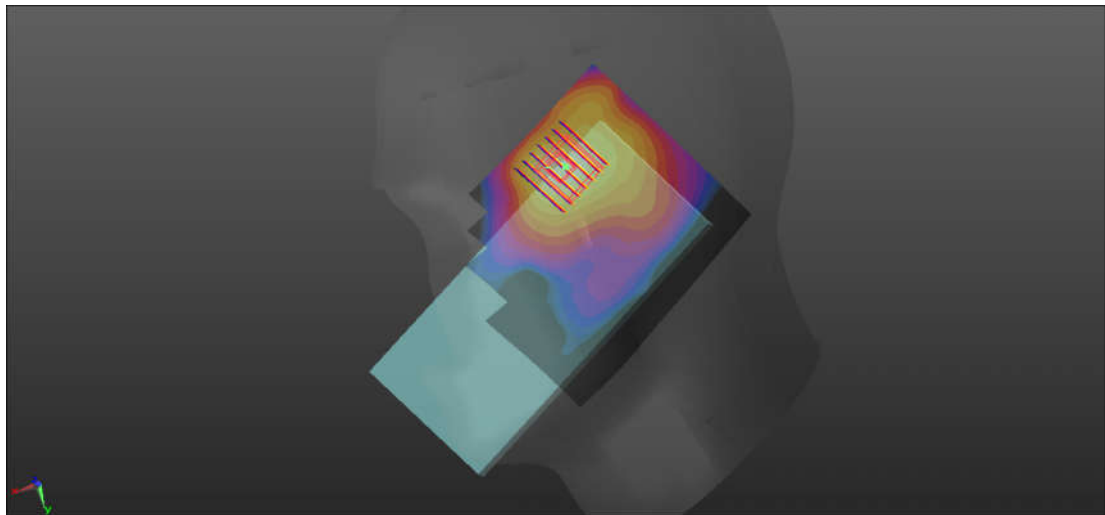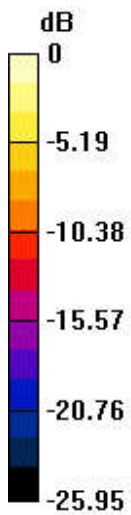

0 dB = 1.67 W/kg

### 18\_LTE Band 38\_20M\_QPSK\_50RB\_0Offset\_Right Cheek\_Ch38000


Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.102$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch38000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.130 W/kg

**Ch38000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.104 W/kg  
**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.024 W/kg**  
Maximum value of SAR (measured) = 0.0801 W/kg

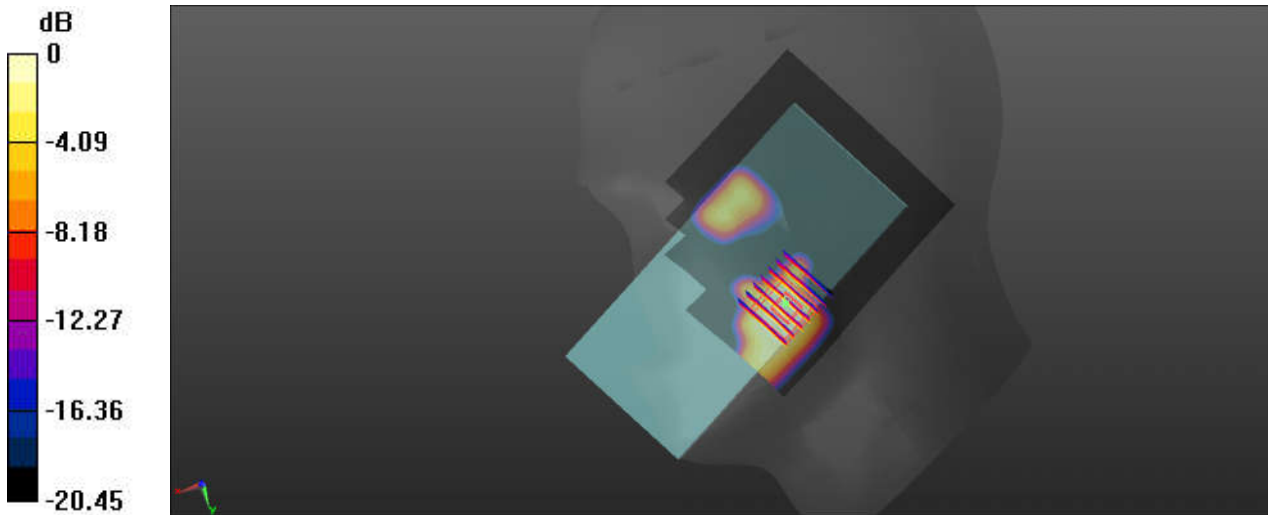

0 dB = 0.0801 W/kg

### 19\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch39750


Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.59  
 Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.851$  S/m;  $\epsilon_r = 39.222$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch39750/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.12 W/kg

**Ch39750/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.277 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 1.67 W/kg  
**SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.309 W/kg**  
 Maximum value of SAR (measured) = 1.20 W/kg

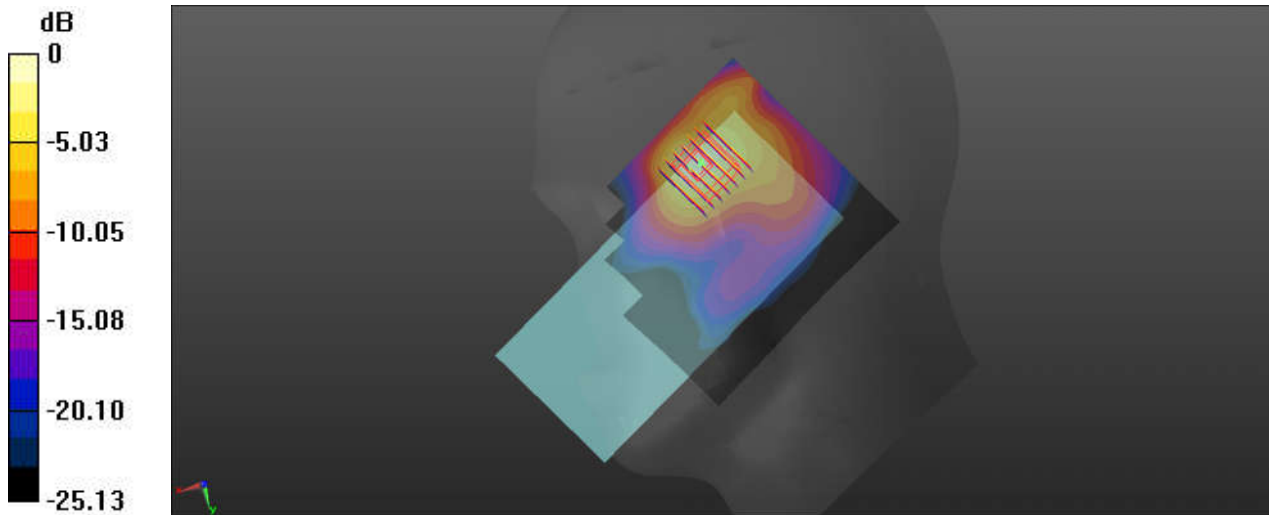

0 dB = 1.20 W/kg

## 20\_FR1 n7\_50M\_QPSK\_135RB\_68Offset\_DFT-15\_Right Cheek\_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.875$  S/m;  $\epsilon_r = 39.179$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.33 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.055 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.079 W/kg**  
Maximum value of SAR (measured) = 0.38 W/kg

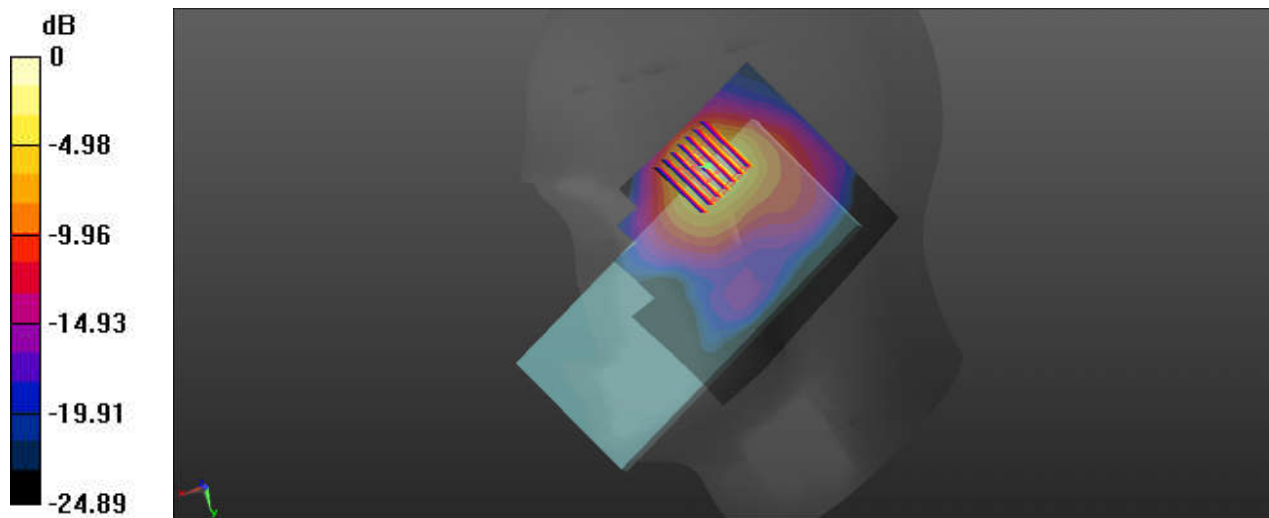

0 dB = 0.38 W/kg

## 92\_LTE Band 42\_20M\_QPSK\_50RB\_0Offset\_Left Cheek\_Ch42590


Communication System: UID 0, LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_3500\_240323 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.847$  S/m;  $\epsilon_r = 37.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.78, 6.78, 6.78); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch42590/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.814 W/kg

**Ch42590/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 2.894 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 1.25 W/kg  
**SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.172 W/kg**  
Maximum value of SAR (measured) = 0.863 W/kg

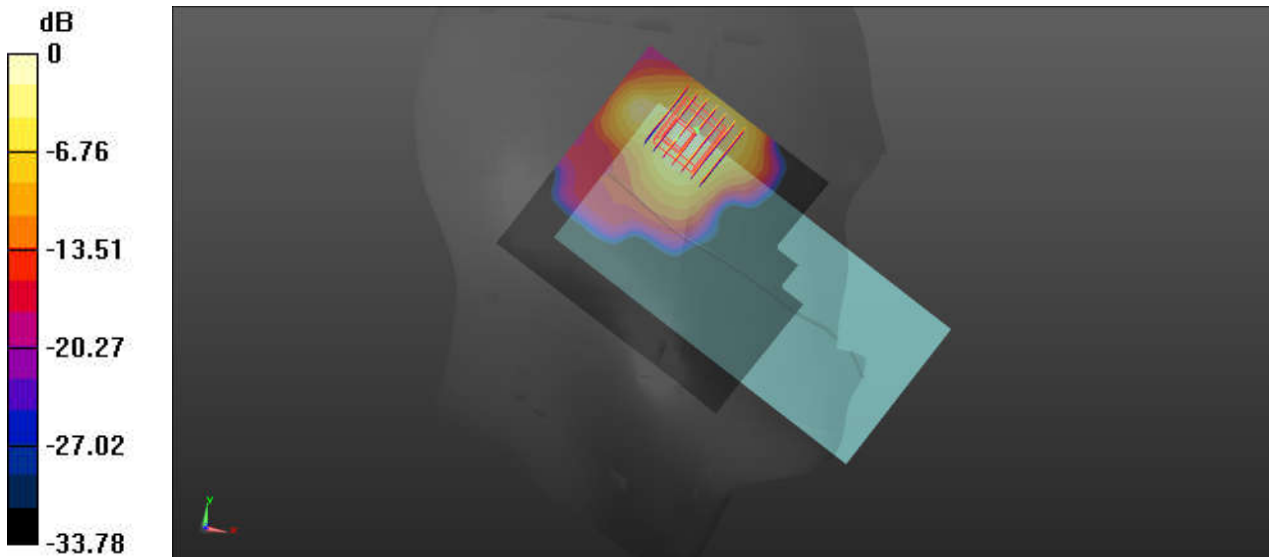

0 dB = 0.863 W/kg

## 21\_LTE Band 48\_20M\_QPSK\_50RB\_0Offset\_Left Cheek\_Ch55340

Communication System: UID 0, LTE (0); Frequency: 3560 MHz; Duty Cycle: 1:1.59  
 Medium: HSL\_3500\_240323 Medium parameters used:  $f = 3560$  MHz;  $\sigma = 2.89$  S/m;  $\epsilon_r = 37.077$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.78, 6.78, 6.78); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch55340/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.843 W/kg


**Ch55340/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 2.923 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.893 W/kg

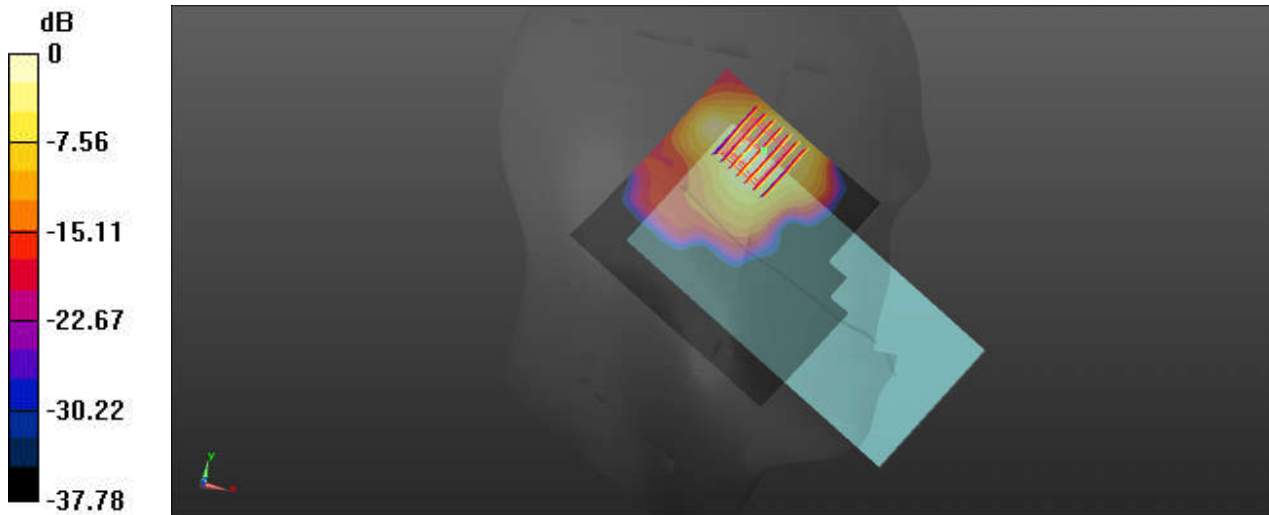

0 dB = 0.893 W/kg

## 22\_FR1 n77\_100M\_QPSK\_1RB\_1Offset\_Left Cheek\_Ch633332

Communication System: UID 0, 5G NR (0); Frequency: 3499.98 MHz; Duty Cycle: 1:1  
Medium: HSL\_3500\_240323 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.847$  S/m;  $\epsilon_r = 37.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.78, 6.78, 6.78); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch633332/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.18 W/kg



**Ch633332/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 4.418 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.67 W/kg

**SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 1.67 W/kg

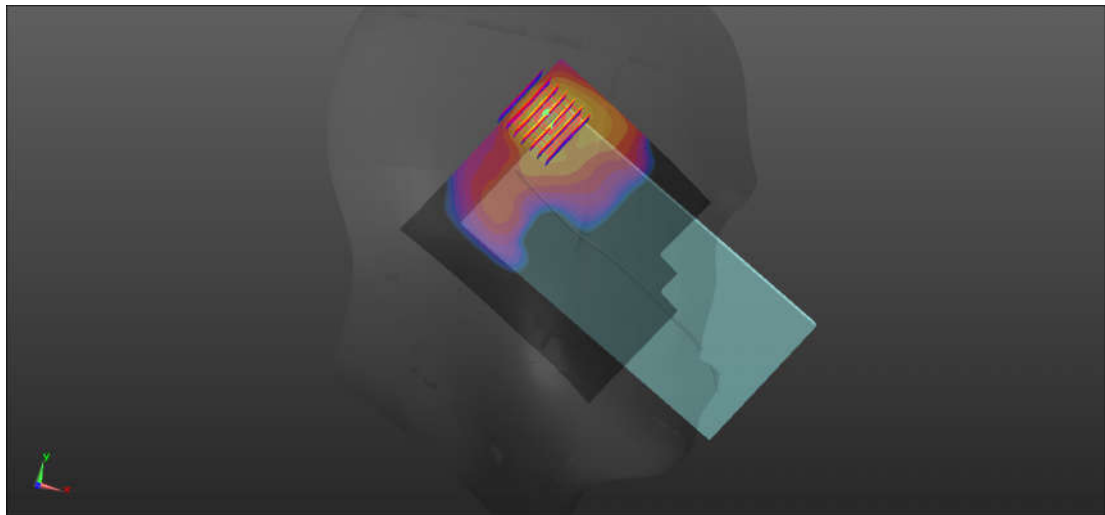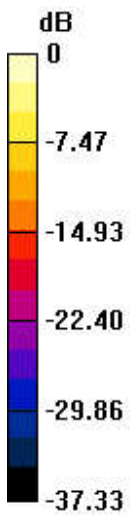

0 dB = 1.67 W/kg

## 23\_FR1 n78\_100M\_QPSK\_1RB\_1Offset\_Left Cheek\_Ch633332

Communication System: UID 0, 5G NR (0); Frequency: 3499.98 MHz; Duty Cycle: 1:1  
Medium: HSL\_3500\_240323 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.847$  S/m;  $\epsilon_r = 37.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.78, 6.78, 6.78); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch633332/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.722 W/kg


**Ch633332/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 3.779 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.768 W/kg

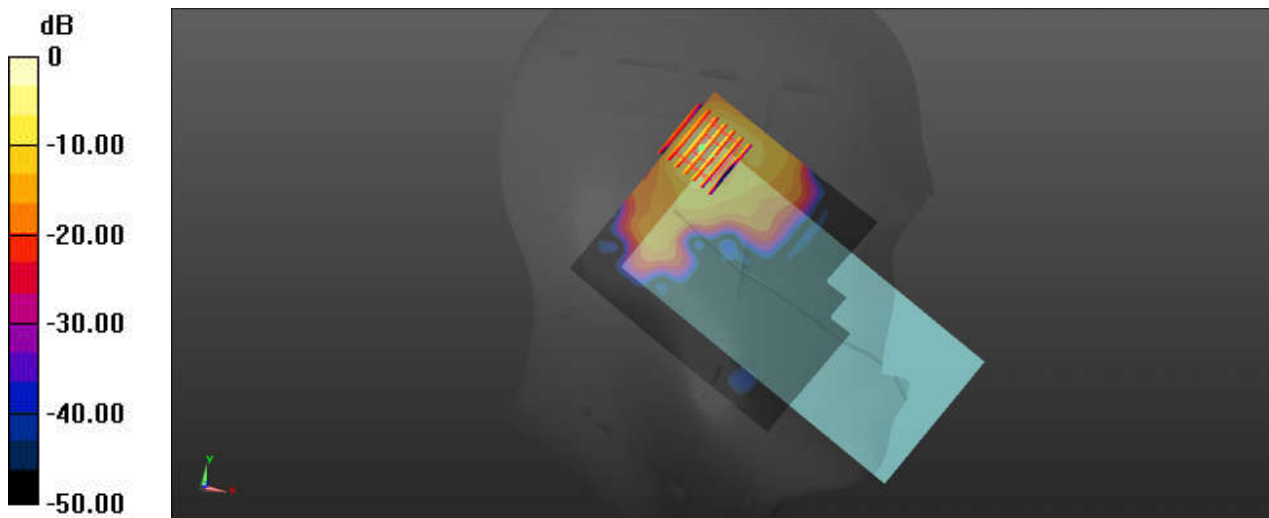

0 dB = 0.768 W/kg



## 24\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch6



Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.054  
Medium: HSL\_2450\_240324 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.815$  S/m;  $\epsilon_r = 39.448$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.64, 7.64, 7.64); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch6/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.56 W/kg

**Ch6/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.085 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.74 W/kg  
**SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.375 W/kg**  
Maximum value of SAR (measured) = 1.33 W/kg

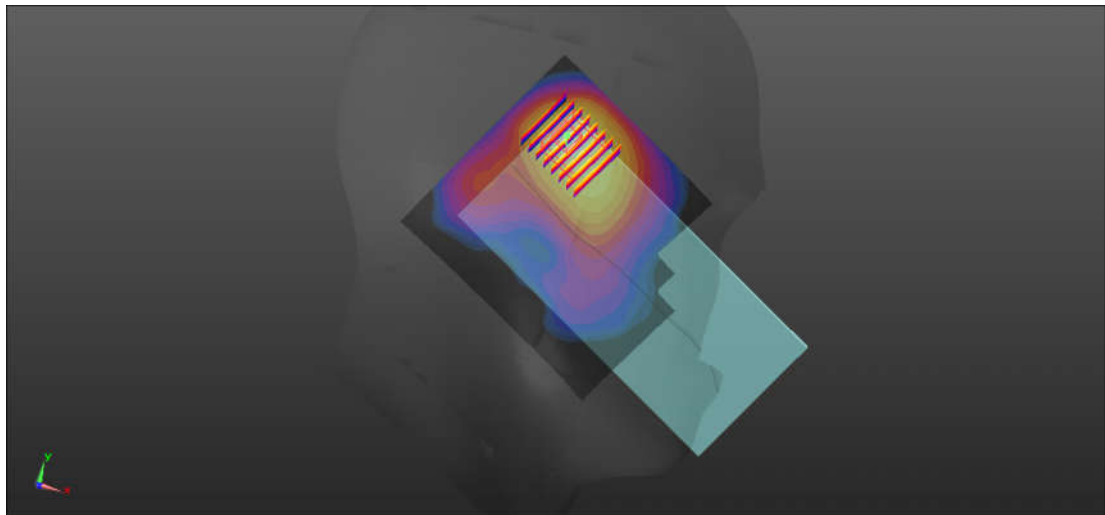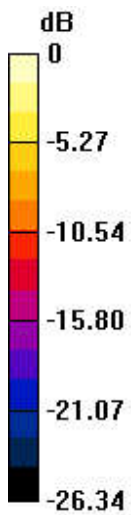

0 dB = 1.33 W/kg

## 25\_ Bluetooth\_DH5 1Mbps\_Left Cheek\_Ch78


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.307  
Medium: HSL\_2450\_240324 Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.848$  S/m;  $\epsilon_r = 39.393$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.64, 7.64, 7.64); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch78/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.473 W/kg

**Ch78/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.305 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.528 W/kg  
**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.054 W/kg**  
Maximum value of SAR (measured) = 0.402 W/kg

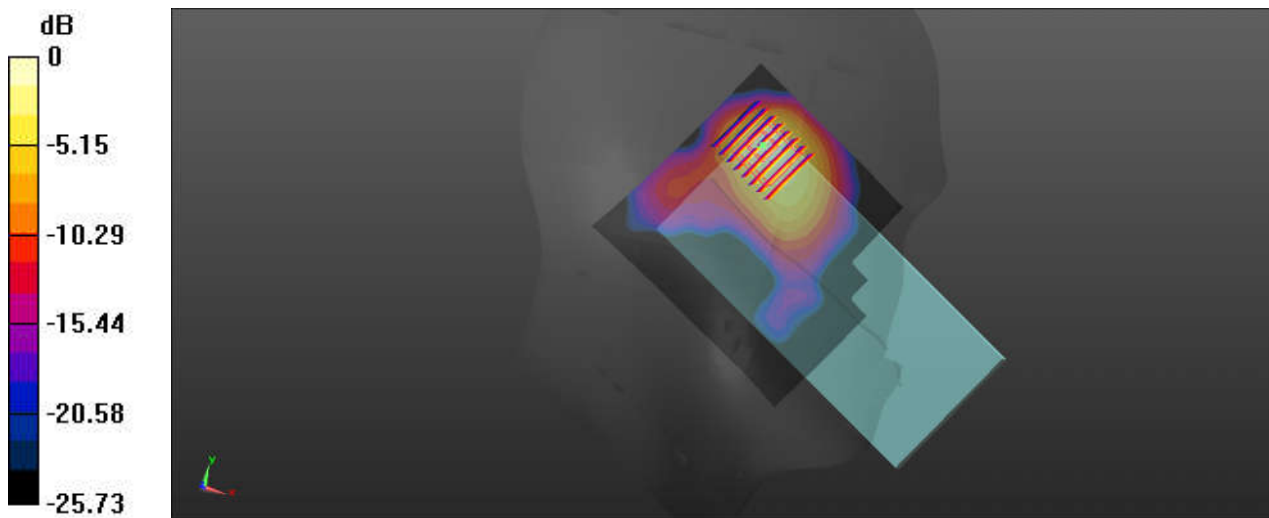

0 dB = 0.402 W/kg

## 26\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch60


Communication System: UID 0, WIFI (0); Frequency: 5300 MHz; Duty Cycle: 1:1.025  
Medium: HSL\_5250\_240325 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.593$  S/m;  $\epsilon_r = 37.184$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch60/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.50 W/kg

**Ch60/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.164 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 3.07 W/kg  
**SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.194 W/kg**  
Maximum value of SAR (measured) = 1.70 W/kg

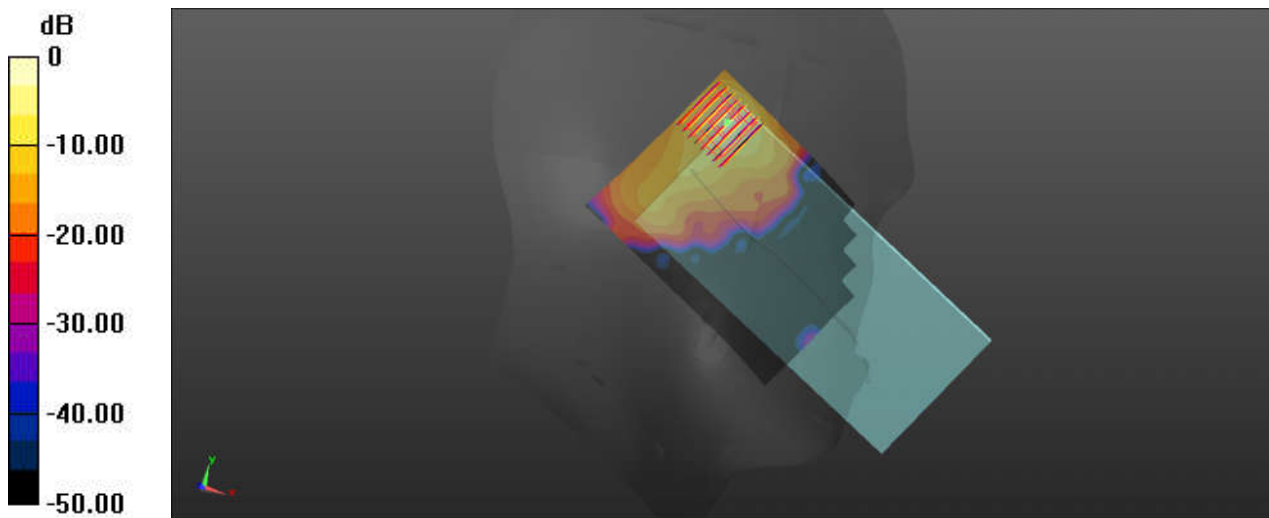

## 27\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch132


Communication System: UID 0, WIFI (0); Frequency: 5660 MHz; Duty Cycle: 1:1.025  
Medium: HSL\_5600\_240325 Medium parameters used:  $f = 5660$  MHz;  $\sigma = 4.968$  S/m;  $\epsilon_r = 36.707$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.54, 4.54, 4.54); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.75 W/kg

**Ch132/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.080 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 3.62 W/kg  
**SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.218 W/kg**  
Maximum value of SAR (measured) = 1.99 W/kg

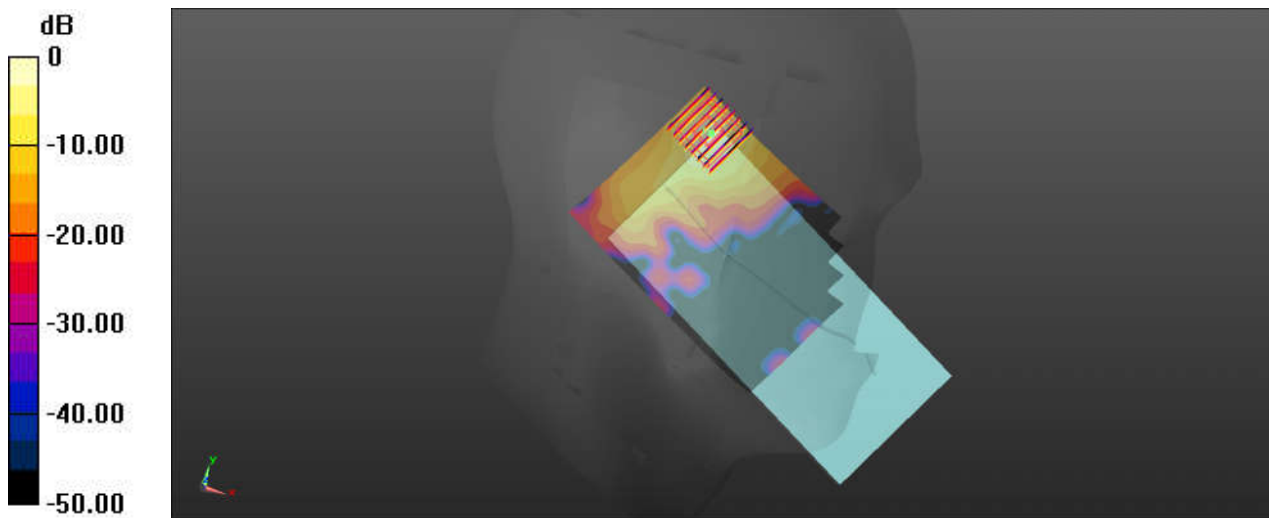

## 28\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch149


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.025  
Medium: HSL\_5750\_240325 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.06$  S/m;  $\epsilon_r = 36.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.65, 4.65, 4.65); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch149/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.80 W/kg

**Ch149/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 7.737 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 3.78 W/kg  
**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.235 W/kg**  
Maximum value of SAR (measured) = 2.17 W/kg

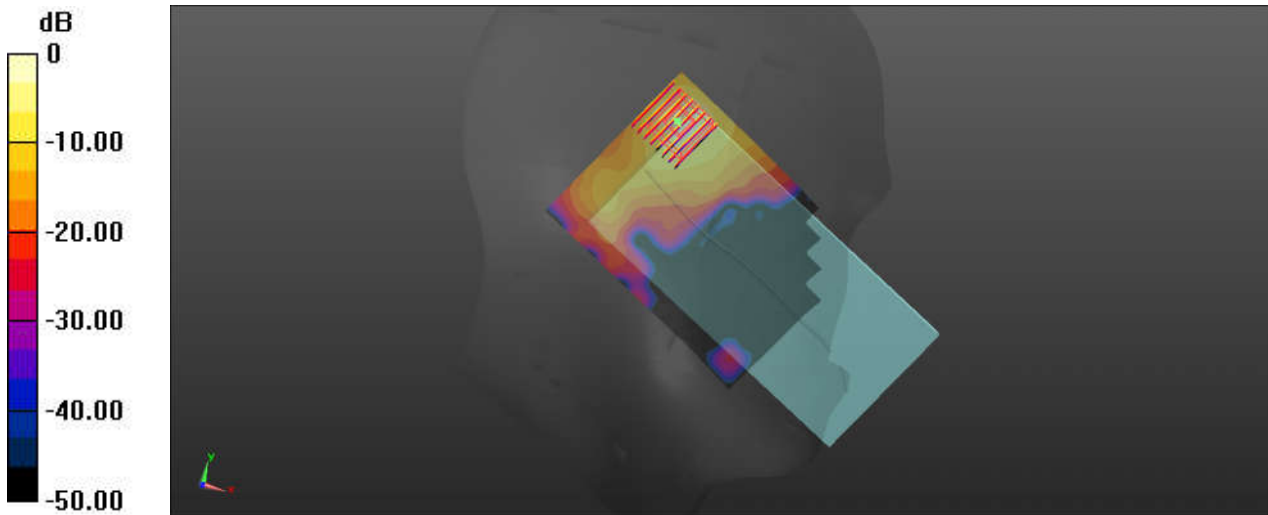

0 dB = 2.17 W/kg

## 29\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch23095


Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_750\_240320 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.878$  S/m;  $\epsilon_r = 40.535$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.71, 9.71, 9.71); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23095/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.566 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 18.53 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.764 W/kg  
**SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.225 W/kg**  
 Maximum value of SAR (measured) = 0.617 W/kg

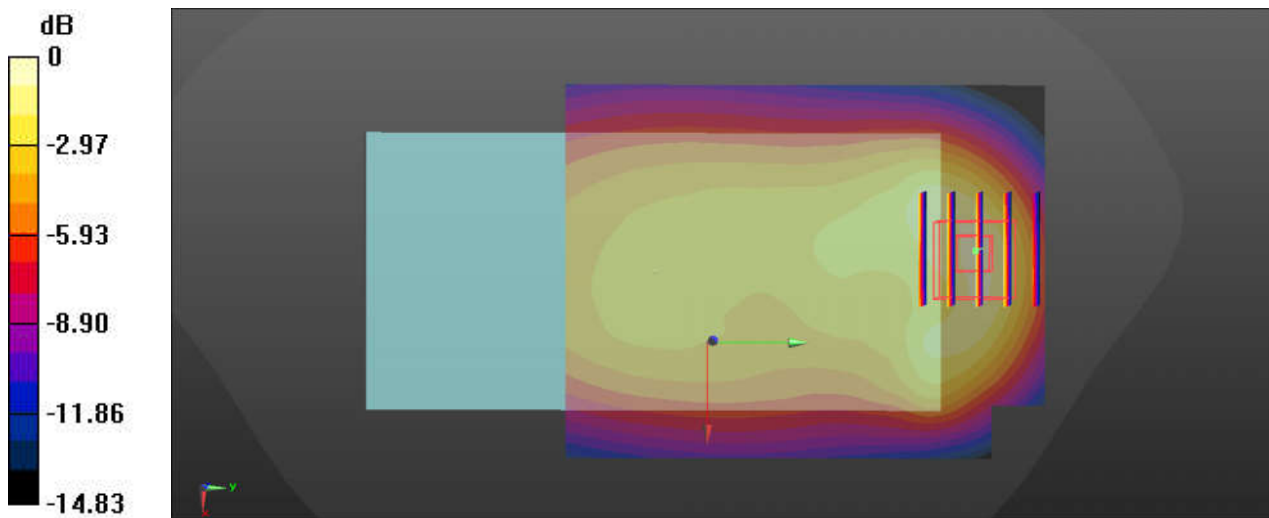

0 dB = 0.617 W/kg

### 30\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch23230


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium: HSL\_750\_240320 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 40.406$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(9.71, 9.71, 9.71); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.605 W/kg

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.73 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.773 W/kg  
**SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.243 W/kg**  
 Maximum value of SAR (measured) = 0.634 W/kg

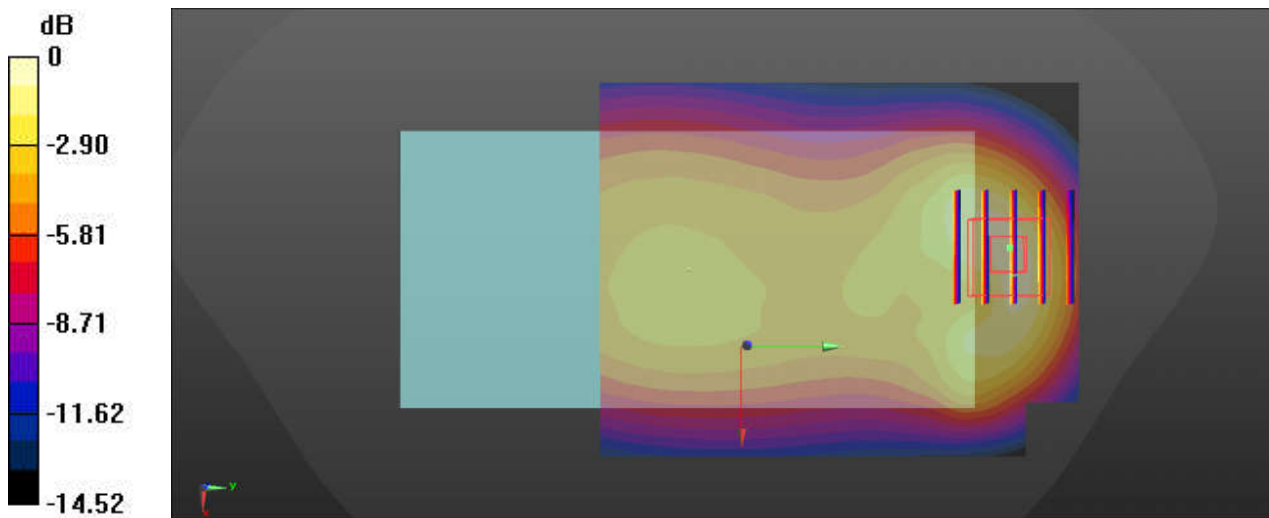

0 dB = 0.634 W/kg

### 31\_GSM850\_GPRS(3 Tx slots)\_Back\_10mm\_Ch189


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch189/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.16 W/kg

**Ch189/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 20.56 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.47 W/kg  
**SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.450 W/kg**  
Maximum value of SAR (measured) = 1.16 W/kg

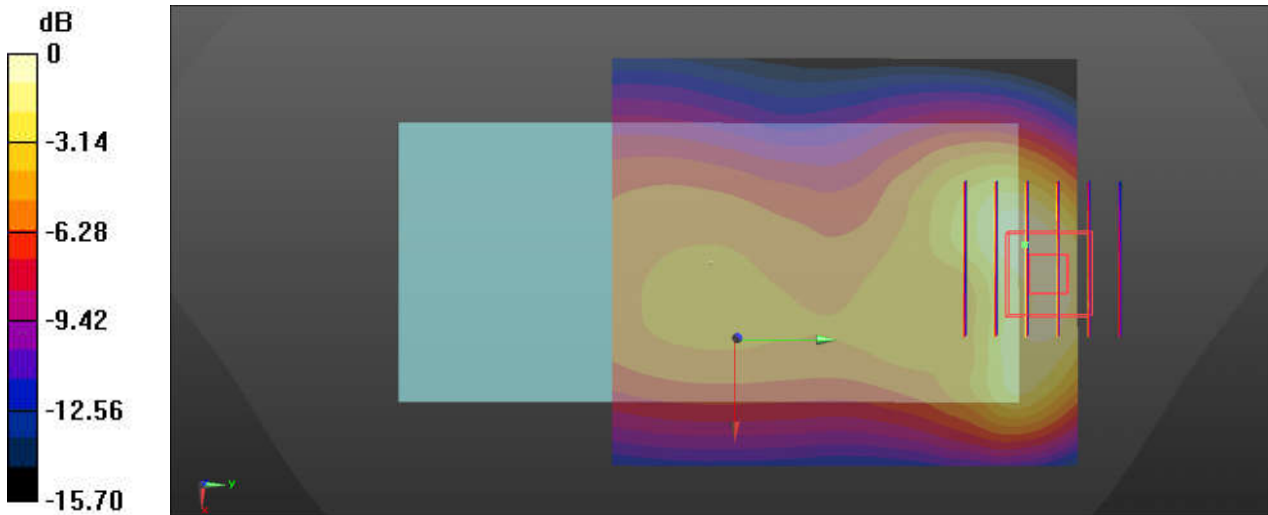

0 dB = 1.16 W/kg



### 32\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4182


Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4182/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.746 W/kg

**Ch4182/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.30 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.310 W/kg**  
Maximum value of SAR (measured) = 0.808 W/kg

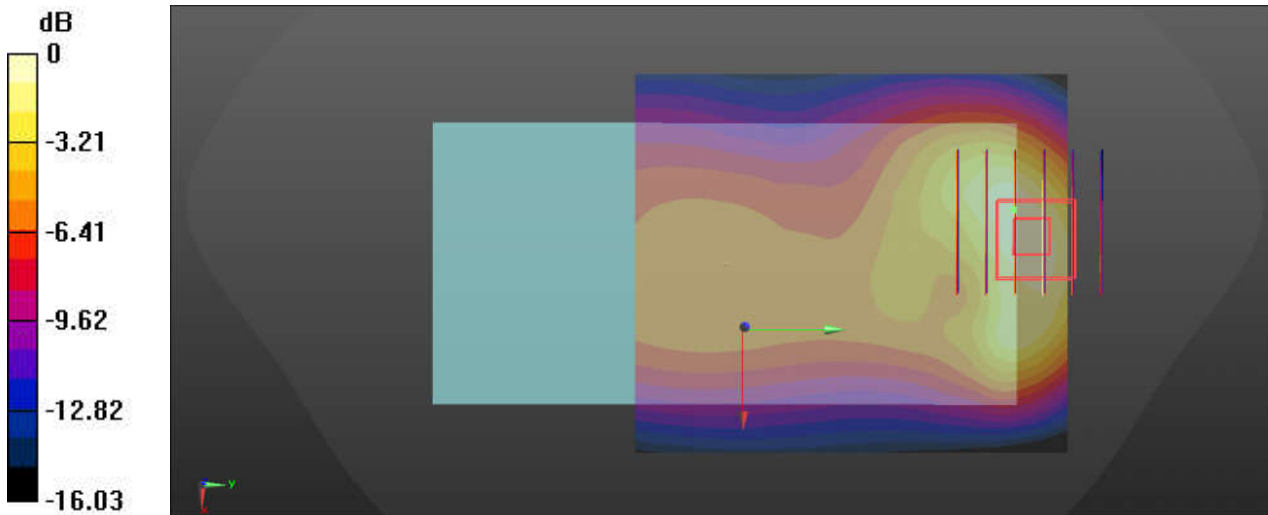

0 dB = 0.808 W/kg

### 33\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch20525


Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20525/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.581 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.94 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.766 W/kg  
**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.234 W/kg**  
Maximum value of SAR (measured) = 0.629 W/kg

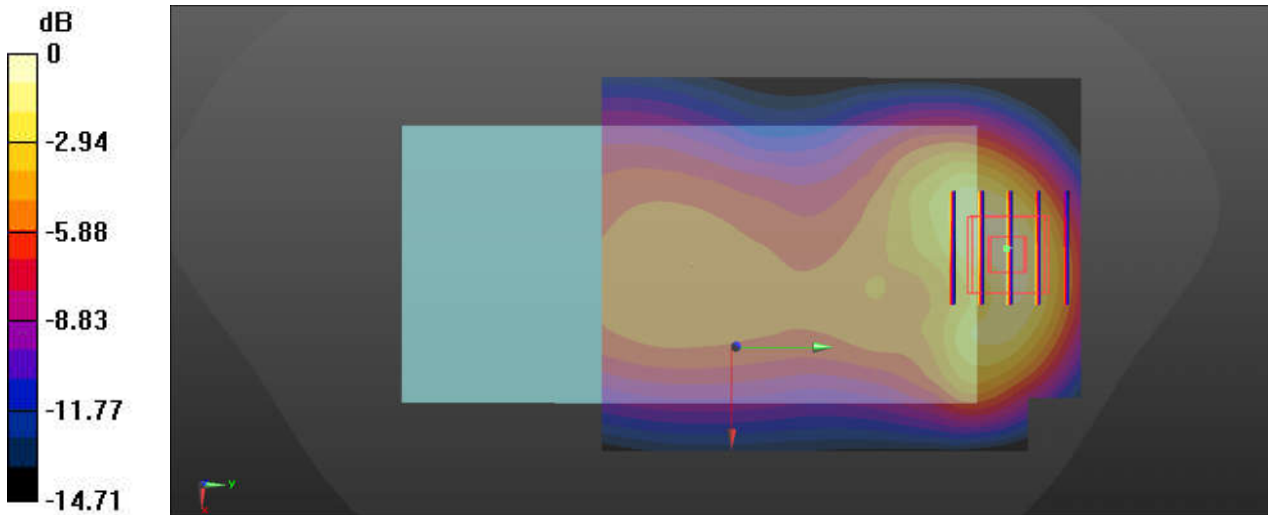

0 dB = 0.629 W/kg

### 34\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch26865


Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240321 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 41.464$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26865/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.754 W/kg

**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.27 V/m; Power Drift = 0.15 dB  
Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.312 W/kg**  
Maximum value of SAR (measured) = 0.819 W/kg

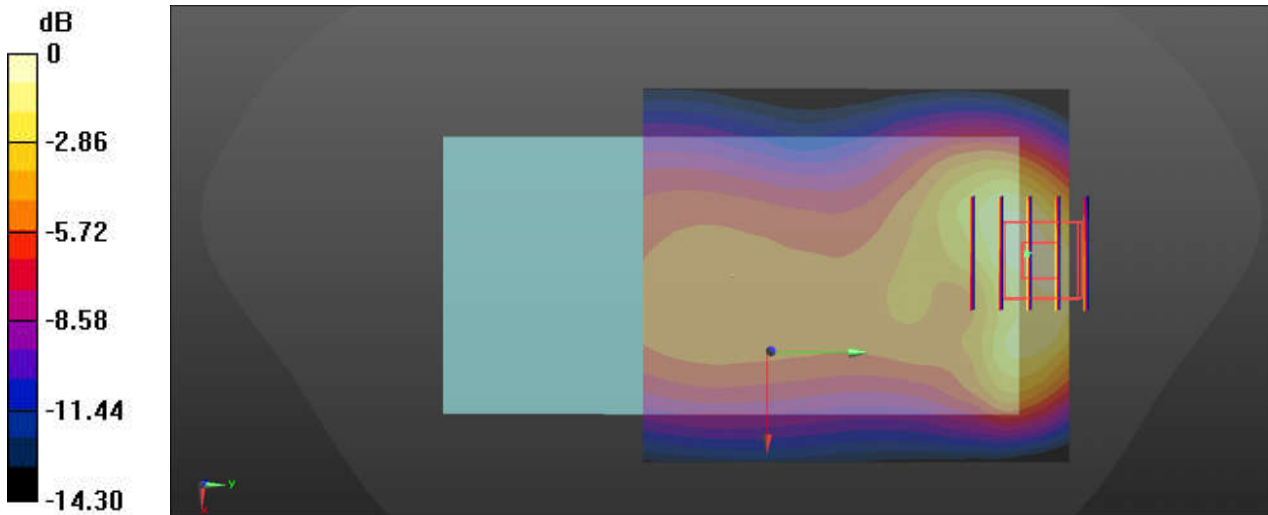

0 dB = 0.819 W/kg

### 35\_RF1 n5\_25M\_QPSK\_64RB\_32Offset\_DFT-15\_Back\_10mm\_Ch167300


Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835\_240321 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.447$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch167300/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.839 W/kg

**Ch167300/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 17.79 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 1.11 W/kg  
**SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.338 W/kg**  
 Maximum value of SAR (measured) = 0.915 W/kg

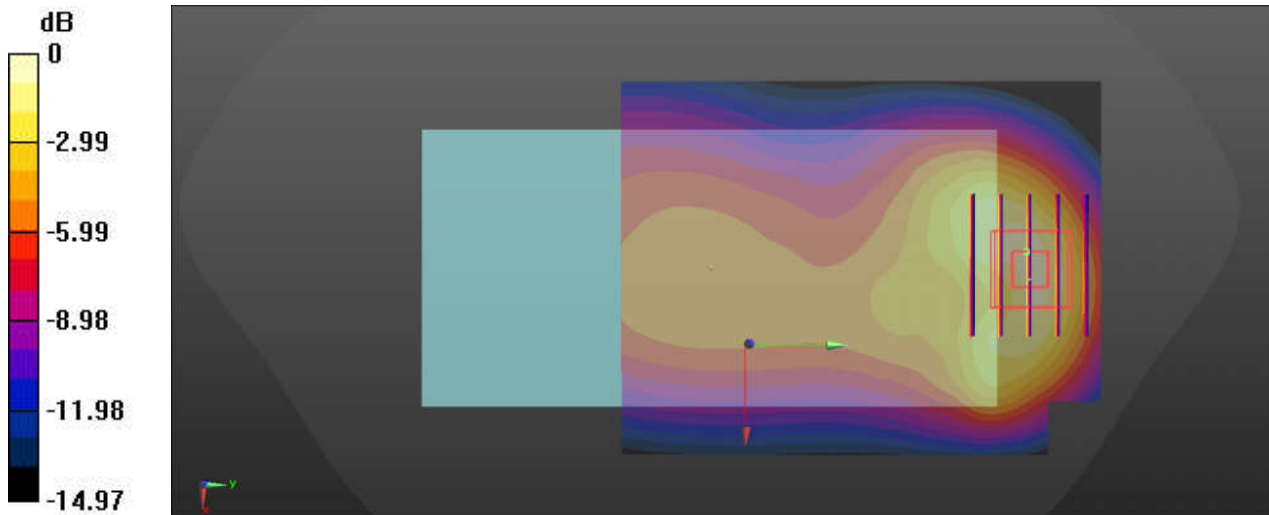

0 dB = 0.915 W/kg

### 36\_WCDMA IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1413


Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.361$  S/m;  $\epsilon_r = 38.928$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1413/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.670 W/kg

**Ch1413/Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.693 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.837 W/kg  
**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.274 W/kg**  
Maximum value of SAR (measured) = 0.679 W/kg

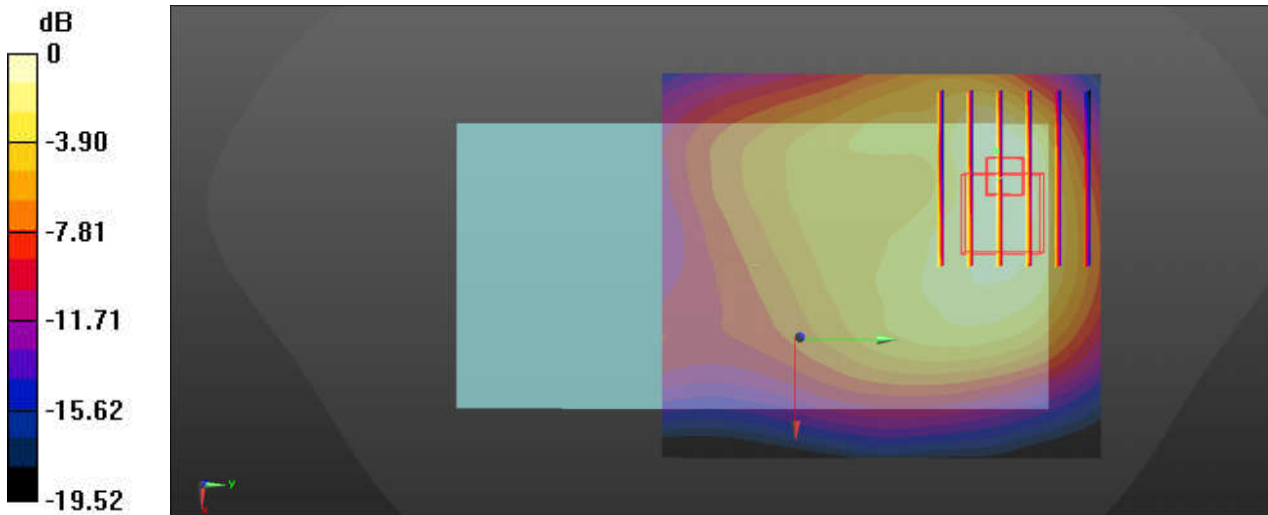

0 dB = 0.679 W/kg

### 37\_LTE Band 4\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch20175


Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.361$  S/m;  $\epsilon_r = 38.928$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20175/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.398 W/kg

**Ch20175/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.048 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 0.471 W/kg  
**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.161 W/kg**  
Maximum value of SAR (measured) = 0.383 W/kg

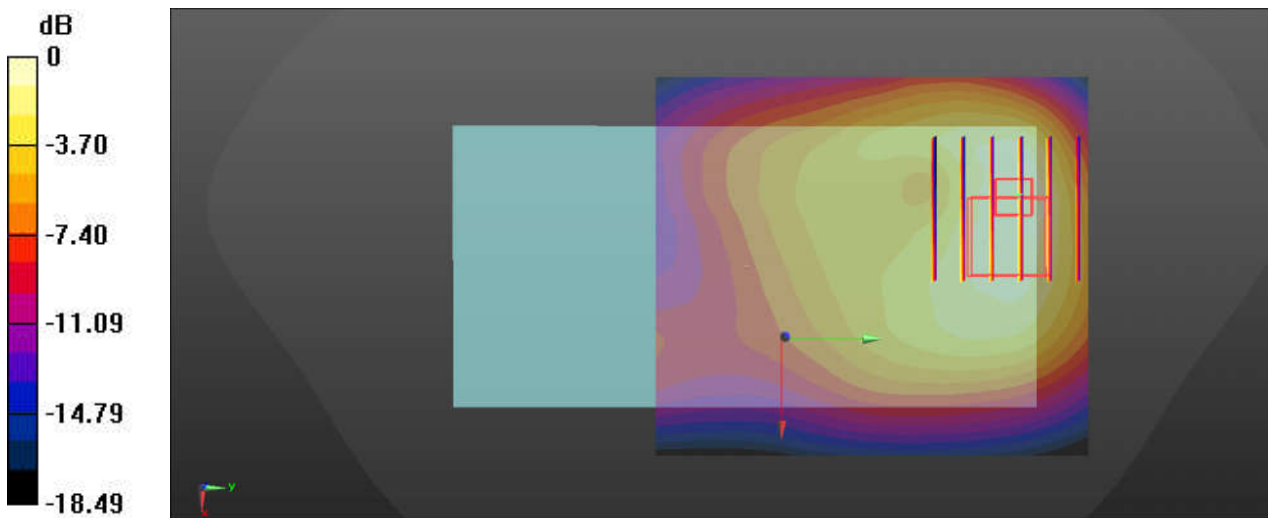

0 dB = 0.383 W/kg

### 38\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch132322


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 38.902$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132322/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.614 W/kg

**Ch132322/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.329 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.774 W/kg  
**SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.252 W/kg**  
Maximum value of SAR (measured) = 0.622 W/kg

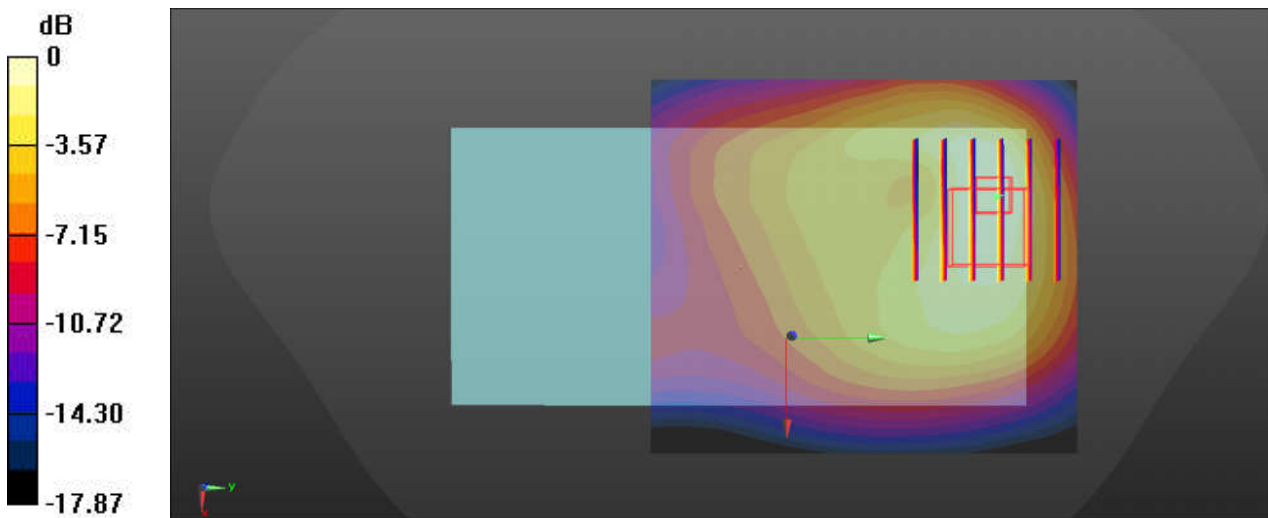

0 dB = 0.622 W/kg

### 39\_FR1 n66\_45M\_QPSK\_1RB\_1Offset\_DFT-15\_Back\_10mm\_Ch349000


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240321 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 38.902$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch349000/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.465 W/kg

**Ch349000/Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.377 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 0.542 W/kg  
**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.187 W/kg**  
Maximum value of SAR (measured) = 0.446 W/kg

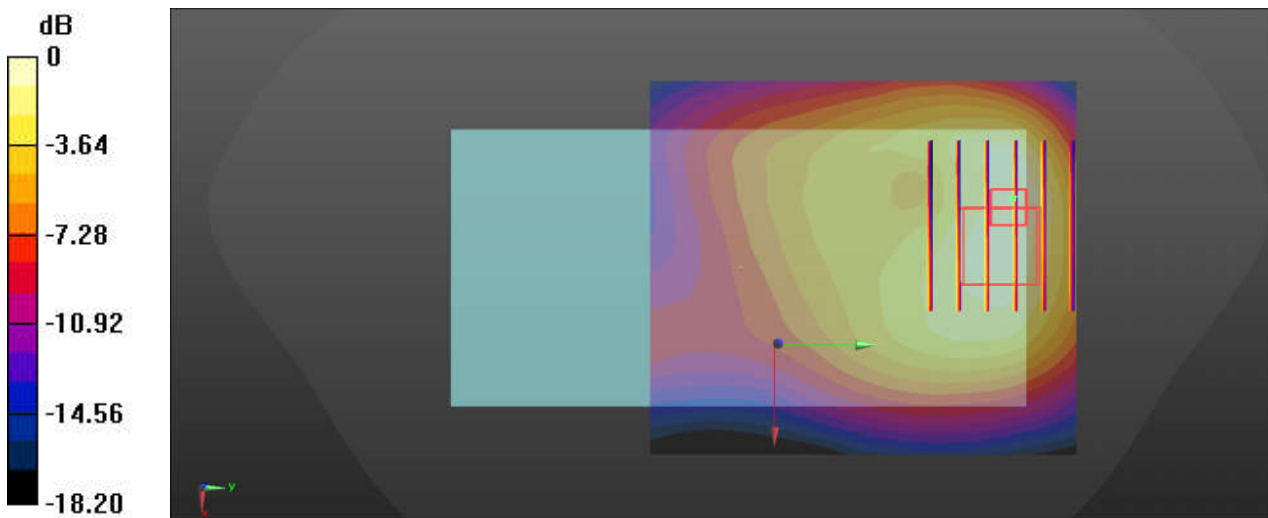

0 dB = 0.446 W/kg



### 40\_GSM1900\_GPRS(4 Tx slots)\_Back\_10mm\_Ch512


Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.408$  S/m;  $\epsilon_r = 41.027$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch512/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.10 W/kg

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.48 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 1.36 W/kg  
**SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.363 W/kg**  
Maximum value of SAR (measured) = 1.07 W/kg

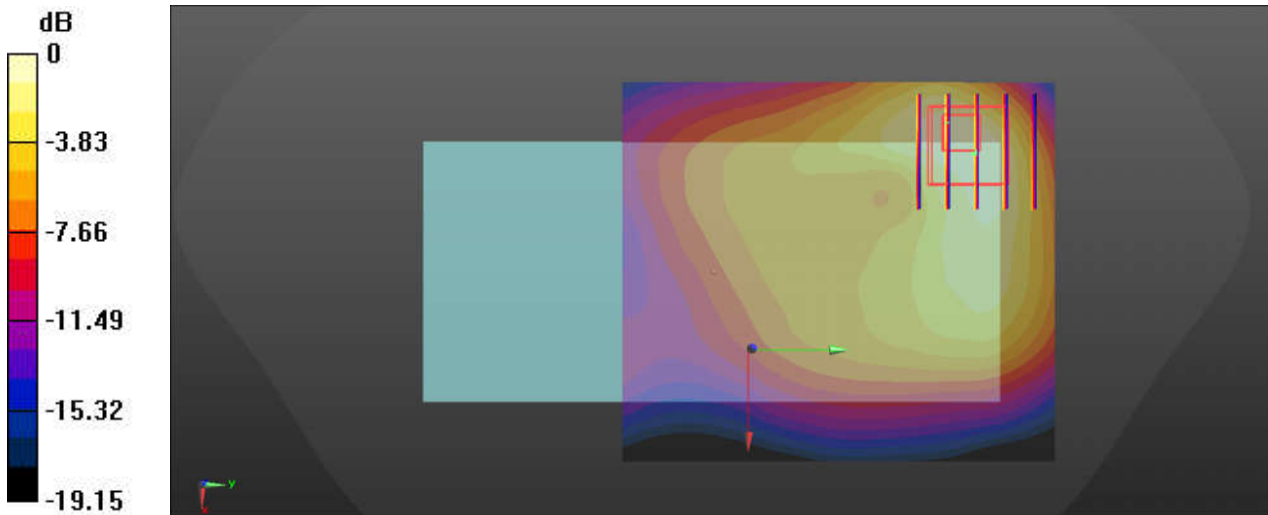

0 dB = 1.07 W/kg

## 41\_WCDMA II\_RMC 12.2Kbps\_Back\_10mm\_Ch9400


Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9400/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.30 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 21.36 V/m; Power Drift = 0.10 dB  
 Peak SAR (extrapolated) = 1.47 W/kg  
**SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.387 W/kg**  
 Maximum value of SAR (measured) = 1.12 W/kg

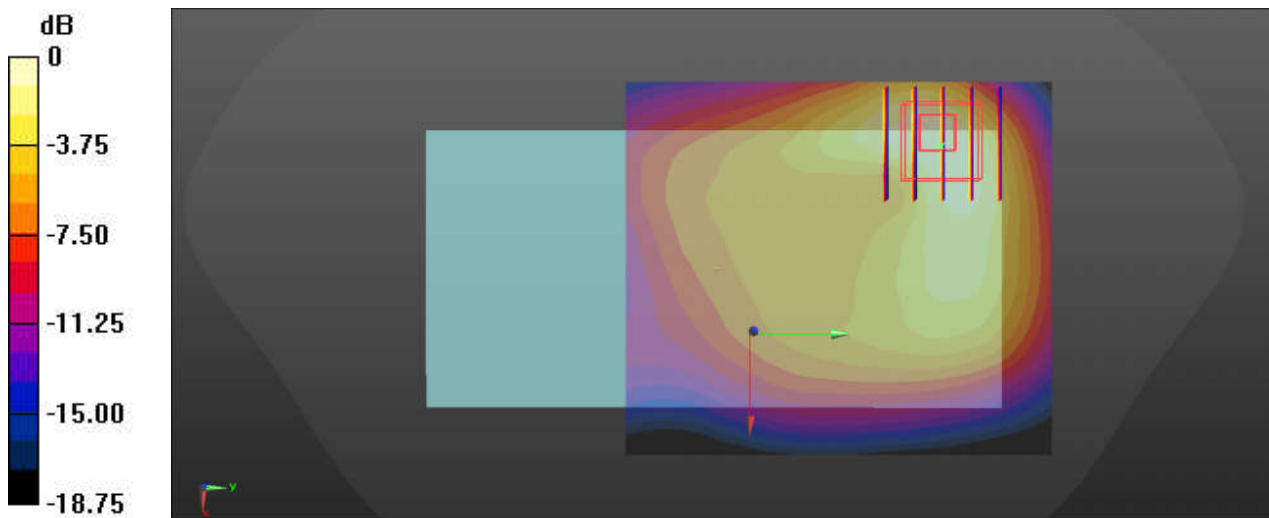

0 dB = 1.12 W/kg

## 42\_LTE Band 2\_20M\_QPSK\_50RB\_0Offset\_Back\_10mm\_Ch18900


Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch18900/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.685 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.789 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 0.817 W/kg  
**SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.220 W/kg**  
Maximum value of SAR (measured) = 0.626 W/kg

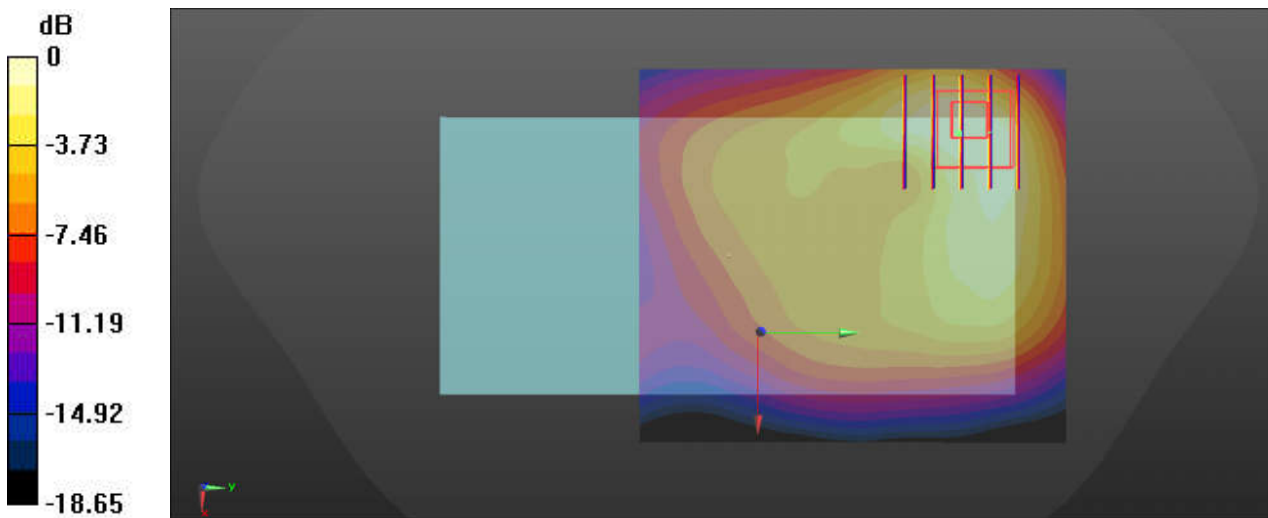

0 dB = 0.626 W/kg

### 43\_LTE Band 25\_20M\_QPSK\_50RB\_0Offset\_Back\_10mm\_Ch26340


Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26340/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.18 W/kg

**Ch26340/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 12.54 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.363 W/kg**  
Maximum value of SAR (measured) = 1.07 W/kg

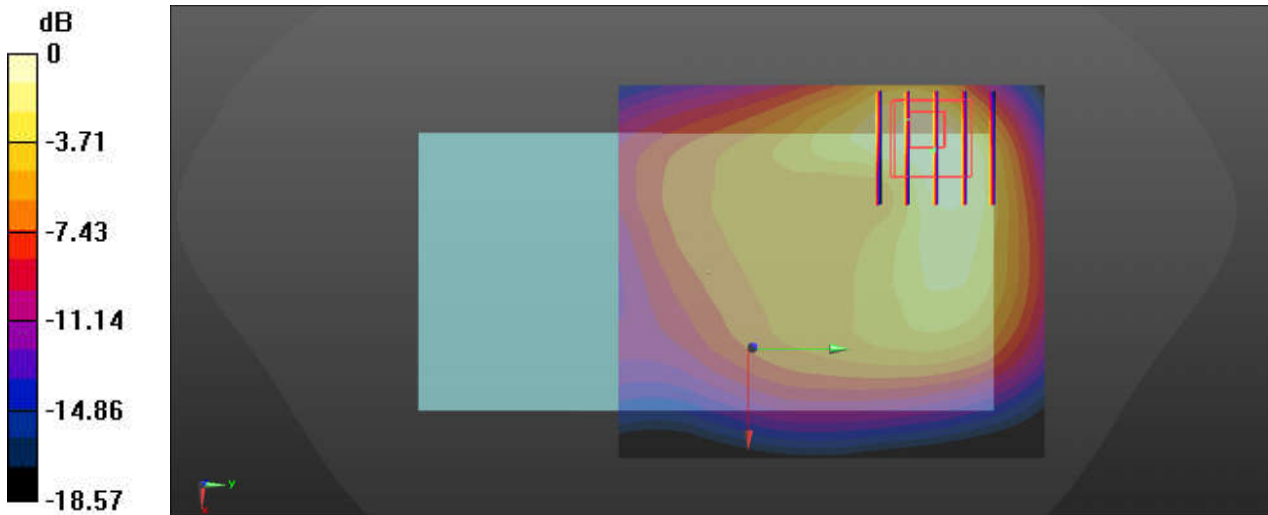

0 dB = 1.07 W/kg

### 44\_FR1 n2\_40M\_QPSK\_108RB\_54Offset\_DFT-15\_Back\_10mm\_Ch376000


Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240321 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376000/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.793 W/kg

**Ch376000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.14 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 0.978 W/kg  
**SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.260 W/kg**  
Maximum value of SAR (measured) = 0.766 W/kg

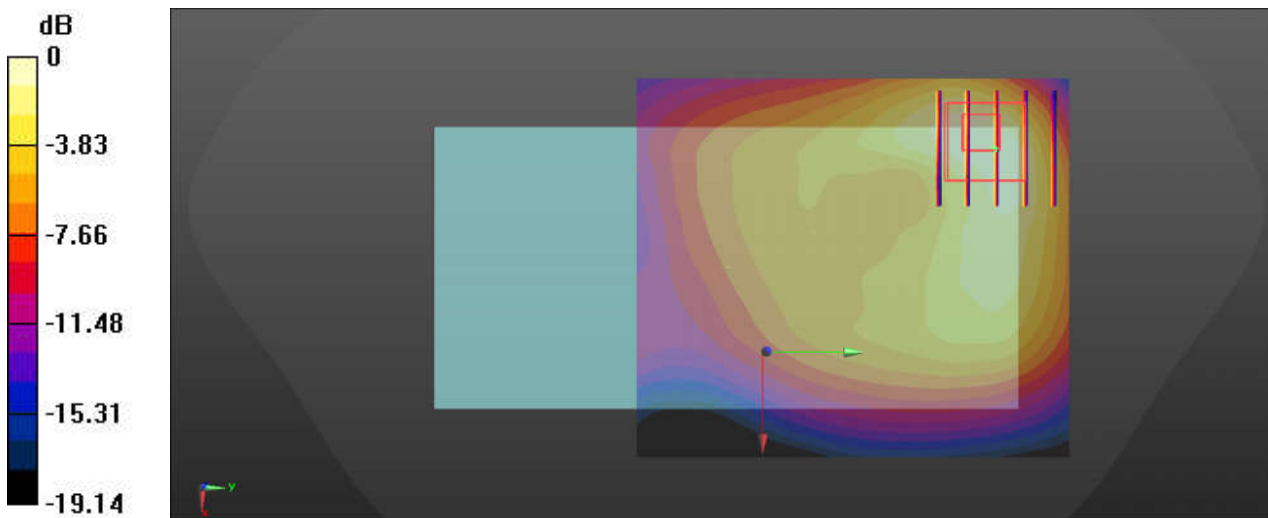

0 dB = 0.766 W/kg

### 45\_LTE Band 7\_20M\_QPSK\_1RB\_99Offset\_Back\_10mm\_Ch21350


Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.140$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch21350/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.18 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.693 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 1.58 W/kg  
**SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.304 W/kg**  
 Maximum value of SAR (measured) = 1.17 W/kg

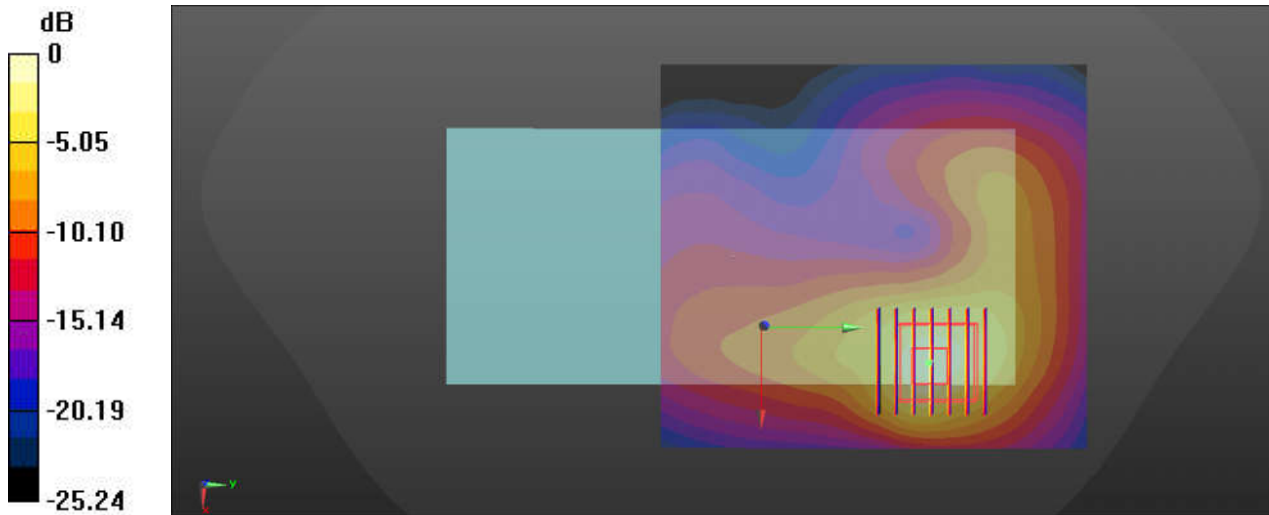

0 dB = 1.17 W/kg

### 46\_LTE Band 38\_20M\_QPSK\_50RB\_0Offset\_Back\_10mm\_Ch38000


Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.102$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch38000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.423 W/kg

**Ch38000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.291 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 0.620 W/kg  
**SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.145 W/kg.**  
Maximum value of SAR (measured) = 0.475 W/kg

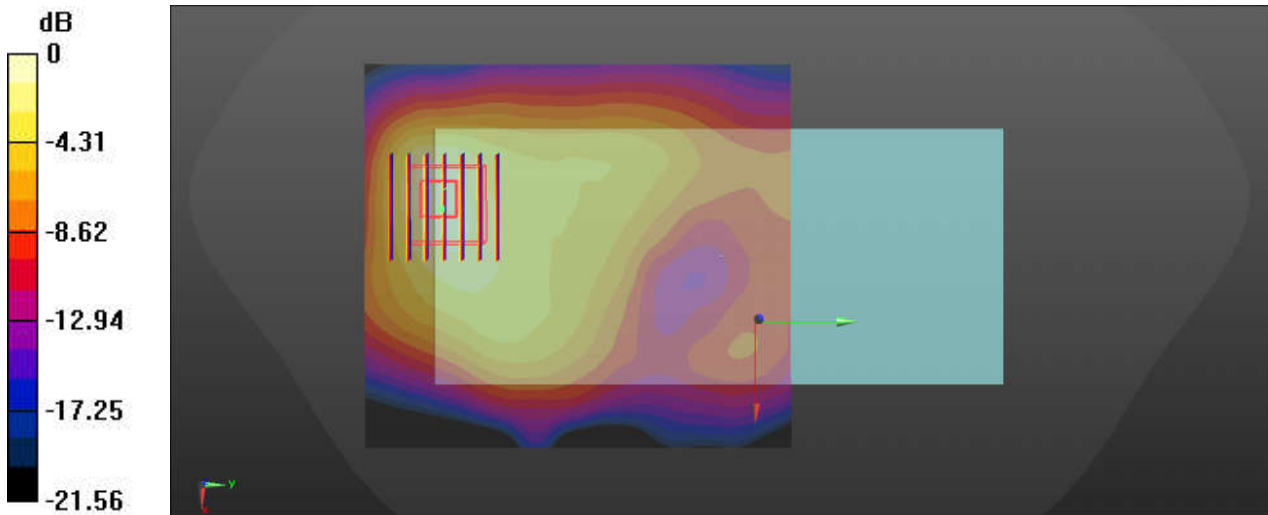

0 dB = 0.475 W/kg

### 47\_LTE Band 41\_20M\_QPSK\_50RB\_0Offset\_Back\_10mm\_Ch39750


Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.851$  S/m;  $\epsilon_r = 39.222$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch39750/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.11 W/kg

**Ch39750/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.951 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 1.42 W/kg  
**SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.274 W/kg**  
Maximum value of SAR (measured) = 1.07 W/kg

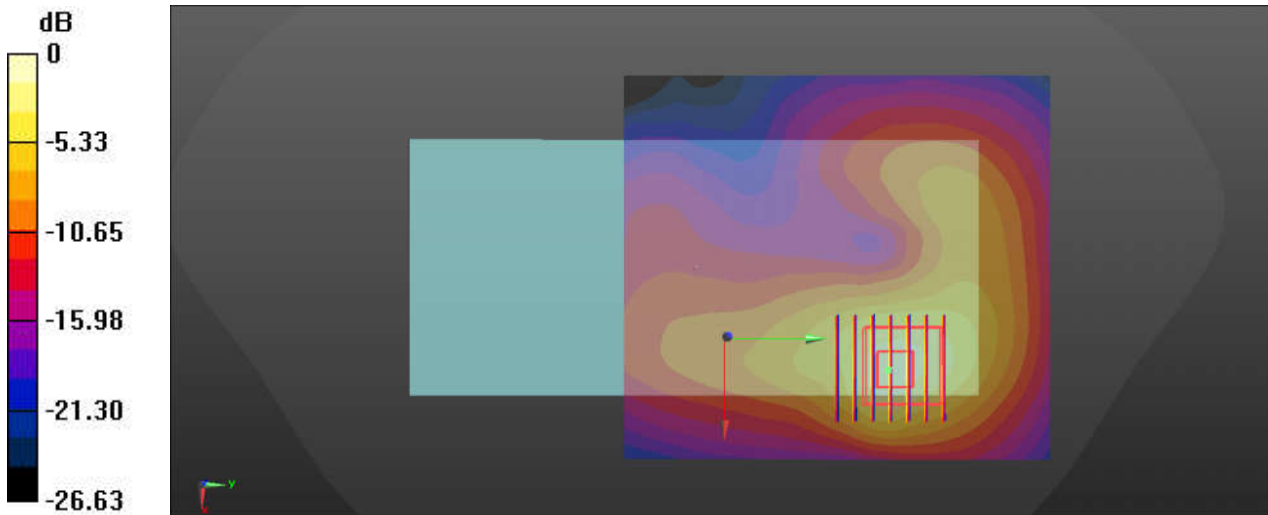

0 dB = 1.07 W/kg



### 48\_FR1 n7\_50M\_QPSK\_135RB\_68Offset\_DFT-15\_Back\_10mm\_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240321 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.875$  S/m;  $\epsilon_r = 39.179$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2024/1/25
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.367 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.949 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.24 W/kg  
**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.069 W/kg**  
Maximum value of SAR (measured) = 0.333 W/kg

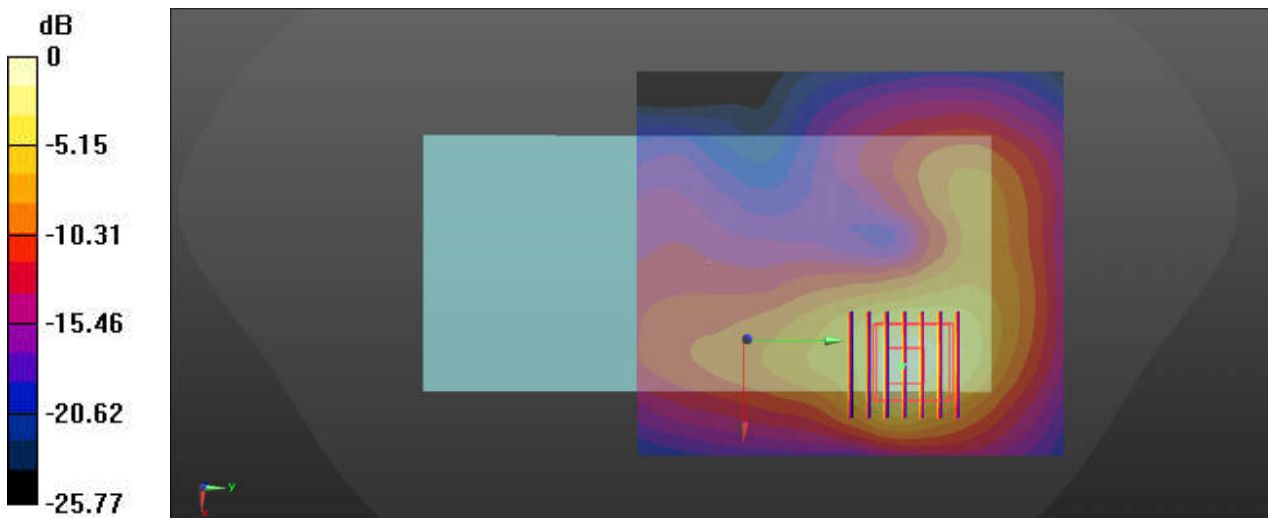

0 dB = 0.333 W/kg