



**FCC PART 15
TEST REPORT
No.I17Z60970-IOT01**

for

TCL Communication Ltd.

GSM Quad-band/HSPA-UMTS Six-band/LTE 19-band mobile phone

BBD100-2

With

FCC ID: 2ACCJN020

Hardware Version: 04

Software Version: AAN966

Issued Date: 2017-09-11



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z60970-IOT01	Rev.0	1st edition	2017-08-30
I17Z60970-IOT01	Rev.1	Delete ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP	2017-09-11

CONTENTS

CONTENTS	3
1. TEST LATORATORY	7
1.1. TESTING LOCATION	7
1.2. TESTING ENVIRONMENT	7
1.3. PROJECT DATA	7
1.4. SIGNATURE	7
2. CLIENT INFORMATION	8
2.1. APPLICANT INFORMATION	8
2.2. MANUFACTURER INFORMATION	8
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
3.1. ABOUT EUT	9
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
3.4. GENERAL DESCRIPTION	10
3.5. INTERPRETATION OF THE TEST ENVIRONMENT	10
4. REFERENCE DOCUMENTS	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT	10
4.2. REFERENCE DOCUMENTS FOR TESTING	10
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
6.1. SUMMARY OF TEST RESULTS	11
6.2. STATEMENTS	11
6.3. TEST CONDITIONS	11
7. TEST EQUIPMENTS UTILIZED	12
8. MEASUREMENT UNCERTAINTY	13
8.1. TRANSMITTER OUTPUT POWER	13
8.2. PEAK POWER SPECTRAL DENSITY	13
8.3. OCCUPIED CHANNEL BANDWIDTH	13
8.4. BAND EDGES COMPLIANCE	13
8.5. SPURIOUS EMISSIONS	13
ANNEX A: MEASUREMENT RESULTS	14
A.1. MEASUREMENT METHOD	14

A.2. MAXIMUM OUTPUT POWER	15
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	18
A.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED).....	20
FIG. 1 OCCUPIED 26dB BANDWIDTH (802.11A, 5180MHZ)	21
FIG. 2 OCCUPIED 26dB BANDWIDTH (802.11A, 5200MHZ)	22
FIG. 3 OCCUPIED 26dB BANDWIDTH (802.11A, 5240MHZ)	22
FIG. 4 OCCUPIED 26dB BANDWIDTH (802.11A, 5260MHZ)	23
FIG. 5 OCCUPIED 26dB BANDWIDTH (802.11A, 5280MHZ)	23
FIG. 6 OCCUPIED 26dB BANDWIDTH (802.11A, 5320MHZ)	24
FIG. 7 OCCUPIED 26dB BANDWIDTH (802.11A, 5500MHZ)	24
FIG. 8 OCCUPIED 26dB BANDWIDTH (802.11A, 5580MHZ)	25
FIG. 9 OCCUPIED 26dB BANDWIDTH (802.11A, 5700MHZ)	25
FIG. 10 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5180MHZ).....	26
FIG. 11 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5200MHZ).....	26
FIG. 12 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5240MHZ).....	27
FIG. 13 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5260MHZ).....	27
FIG. 14 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5280MHZ).....	28
FIG. 15 OCCUPIED 26dB BANDWIDTH (802.11N-HT20, 5320MHZ).....	28
FIG. 16 OCCUPIED 26dB BANDWIDTH (802. 11N-HT20, 5500MHZ).....	29
FIG. 17 OCCUPIED 26dB BANDWIDTH (802. 11N-HT20, 5580MHZ).....	29
FIG. 18 OCCUPIED 26dB BANDWIDTH (802. 11N-HT20, 5700MHZ).....	30
FIG. 19 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5180MHZ)	30
FIG. 20 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5200MHZ)	31
FIG. 21 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5240MHZ)	31
FIG. 22 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5260MHZ)	32
FIG. 23 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5280MHZ)	32
FIG. 24 OCCUPIED 26dB BANDWIDTH (802.11AC-HT20, 5320MHZ)	33
FIG. 25 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT20, 5500MHZ).....	33
FIG. 26 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT20, 5580MHZ).....	34
FIG. 27 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT20, 5700MHZ).....	34
FIG. 28 OCCUPIED 26dB BANDWIDTH (802.11N-HT40, 5190MHZ).....	35
FIG. 29 OCCUPIED 26dB BANDWIDTH (802.11N-HT40, 5230MHZ).....	35
FIG. 30 OCCUPIED 26dB BANDWIDTH (802.11N-HT40, 5270MHZ).....	36
FIG. 31 OCCUPIED 26dB BANDWIDTH (802.11N-HT40, 5310MHZ).....	36
FIG. 32 OCCUPIED 26dB BANDWIDTH (802. 11N-HT40, 5510MHZ).....	37
FIG. 33 OCCUPIED 26dB BANDWIDTH (802. 11N-HT40, 5550MHZ).....	37
FIG. 34 OCCUPIED 26dB BANDWIDTH (802. 11N-HT40, 5670MHZ).....	38
FIG. 35 OCCUPIED 26dB BANDWIDTH (802.11AC-HT40, 5190MHZ)	38
FIG. 36 OCCUPIED 26dB BANDWIDTH (802.11AC-HT40, 5230MHZ)	39
FIG. 37 OCCUPIED 26dB BANDWIDTH (802.11AC-HT40, 5270MHZ)	39
FIG. 38 OCCUPIED 26dB BANDWIDTH (802.11AC-HT40, 5310MHZ)	40
FIG. 39 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT40, 5510MHZ).....	40
FIG. 40 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT40, 5550MHZ).....	41
FIG. 41 OCCUPIED 26dB BANDWIDTH (802. 11AC-HT40, 5670MHZ).....	41

FIG. 42	OCCUPIED 26dB BANDWIDTH (802. 11AC-HT80, 5210MHZ).....	42
FIG. 43	OCCUPIED 26dB BANDWIDTH (802. 11AC-HT80, 5290MHZ).....	42
FIG. 44	OCCUPIED 26dB BANDWIDTH (802. 11AC-HT80, 5530MHZ).....	43
FIG. 45	OCCUPIED 26dB BANDWIDTH (802. 11AC-HT80, 5610MHZ).....	43
A.5.	BAND EDGES COMPLIANCE	44
A5.1	BAND EDGES - RADIATED.....	44
FIG. 46	BAND EDGES (802.11A, 5180MHZ)	45
FIG. 47	BAND EDGES (802.11A, 5320MHZ)	45
FIG. 48	BAND EDGES (802.11A, 5500MHZ)	46
FIG. 49	BAND EDGES (802.11A, 5700MHZ)	46
FIG. 50	BAND EDGES (802.11N-HT20, 5180MHZ)	47
FIG. 51	BAND EDGES (802.11N-HT20, 5320MHZ)	47
FIG. 52	BAND EDGES (802.11N-HT20, 5500MHZ)	48
FIG. 53	BAND EDGES (802.11N-HT20, 5700MHZ)	48
FIG. 54	BAND EDGES (802.11N-HT40, 5190MHZ)	49
FIG. 55	BAND EDGES (802.11N-HT40, 5310MHZ)	49
FIG. 56	BAND EDGES (802.11N-HT40, 5510MHZ)	50
FIG. 57	BAND EDGES (802.11N-HT40, 5670MHZ)	50
FIG. 58	BAND EDGES (802.11AC-HT20, 5180MHZ).....	51
FIG. 59	BAND EDGES (802.11AC-HT20, 5320MHZ).....	51
FIG. 60	BAND EDGES (802.11AC-HT20, 5500MHZ).....	52
FIG. 61	BAND EDGES (802.11AC-HT20, 5700MHZ).....	52
FIG. 62	BAND EDGES (802.11AC-HT40, 5190MHZ).....	53
FIG. 63	BAND EDGES (802.11AC-HT40, 5310MHZ).....	53
FIG. 64	BAND EDGES (802.11AC-HT40, 5510MHZ).....	54
FIG. 65	BAND EDGES (802.11AC-HT40, 5670MHZ).....	54
FIG. 66	BAND EDGES (802.11AC-HT80, 5210MHZ).....	55
FIG. 67	BAND EDGES (802.11AC-HT80, 5290MHZ).....	55
FIG. 68	BAND EDGES (802.11AC-HT80, 5530MHZ).....	56
A.6.	TRANSMITTER SPURIOUS EMISSION	57
A.7.	CONDUCTED EMISSION (150kHz- 30MHz).....	88
FIG. 69	CONDUCTED EMISSION(802.11A, CH40, TX)	89
FIG. 70	CONDUCTED EMISSION(802.11A, IDLE)	90
A.8.	99% OCCUPIED BANDWIDTH	91
FIG. 71	99% OCCUPIED BANDWIDTH (802.11A, 5180MHZ)	92
FIG. 72	99% OCCUPIED BANDWIDTH (802.11A, 5200MHZ)	92
FIG. 73	99% OCCUPIED BANDWIDTH (802.11A, 5240MHZ)	93
FIG. 74	99% OCCUPIED BANDWIDTH (802.11N-HT20, 5180MHZ).....	93
FIG. 75	99% OCCUPIED BANDWIDTH (802.11N-HT20, 5200MHZ).....	94
FIG. 76	99% OCCUPIED BANDWIDTH (802.11N-HT20, 5240MHZ).....	94
FIG. 77	99% OCCUPIED BANDWIDTH (802.11AC-HT20, 5180MHZ).....	95
FIG. 78	99% OCCUPIED BANDWIDTH (802.11AC-HT20, 5200MHZ).....	95
FIG. 79	99% OCCUPIED BANDWIDTH (802.11AC-HT20, 5240MHZ).....	96
FIG. 80	99% OCCUPIED BANDWIDTH (802.11N-HT40, 5190MHZ).....	96



FIG. 81	99% OCCUPIED BANDWIDTH (802.11N-HT40, 5230MHZ).....	97
FIG. 82	99% OCCUPIED BANDWIDTH (802.11AC-HT40, 5190MHZ).....	97
FIG. 83	99% OCCUPIED BANDWIDTH (802.11AC-HT40, 5230MHZ).....	98
FIG. 84	99% OCCUPIED BANDWIDTH (802.11AC-HT80, 5210MHZ).....	98
A.9.	FREQUENCY STABILITY	99
A.10.	POWER CONTROL	99
ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP		2
ANNEX C: ACCREDITATION CERTIFICATE		100

1. TEST LATORATORY

1.1. TestingLocation

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.2. TestingEnvironment

Normal Temperature: 15-35℃
Extreme Temperature: -10/+55℃
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: 2017-06-29
Testing End Date: 2017-08-24

1.4. Signature




Jiang Xue

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Lv Songdong

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. EQUIPMENT UNDER TEST (EUT) AND

ANCILLARY EQUIPMENT(AE)

3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 19-band mobile phone
Model name	BBD100-2
FCC ID	2ACCJN020
IC ID	/
WLAN Frequency Range	ISM Bands: -5150MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Voltage	3.8VDC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014989000001030	04	AAN966
EUT2	014989000006575	04	AAN966

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Charger	17TCT-CH-0976
AE4	USB Cable	17TCT-DC-0133
AE1		
Model	TLp038B1	
Manufacturer	BYD	
Capacitance	4000 mAh	
Nominal voltage	3.85V	
AE2		
Model	QC10US	
Manufacturer	BYD	
Length of cable	/	
AE4		
Model	CDA0000113CF	



Manufacturer LUXSHARE
Length of cable 60cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of GSM Quad-band/HSPA-UMTS Six-band/LTE 19-band mobile phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable and Phone.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor k=2.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2016
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2014-06

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Band edge compliance	15.209	/	P
Transmitter spurious emissions radiated	15.407	/	P
Spurious emissions radiated < 30 MHz	15.407	/	P
Spurious emissions conducted < 30 MHz	15.407	/	P
Frequency Stability	15.407	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2017-06-02	2018-06-01
2	LISN	ENV216	101200	Rohde & Schwarz	2017-08-04	2018-08-03
3	Test Receiver	ESCI	100344	Rohde & Schwarz	2017-03-16	2018-03-15
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESCI 7	100948	Rohde & Schwarz	2017-07-26	2018-07-25
3	BiLog Antenna	VULB9163	235	Schwarzbeck	2016-05-09	2019-05-10
4	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2014-12-16	2017-12-15
5	Vector Signal Analyzer	FSV	101047	Rohde & Schwarz	2017-07-23	2018-07-22

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.339dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dBm/MHz,k=1.96

8.3. Occupied Channel Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dBm,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dBm)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)


Frequency Range	Uncertainty(dBm)
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.86
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.26
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

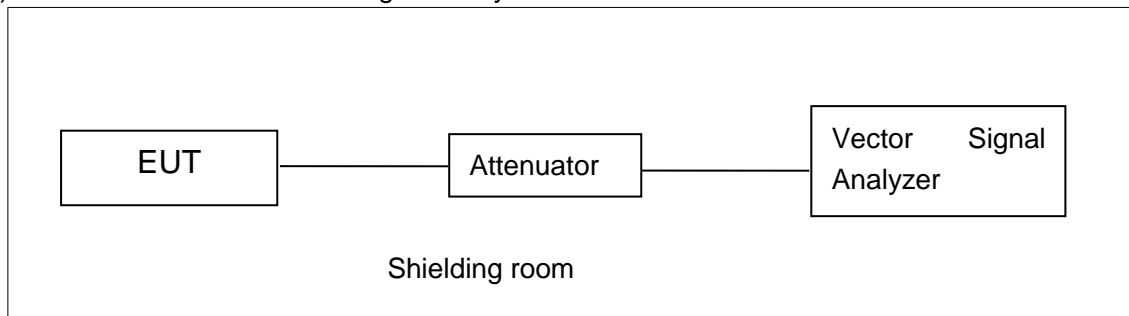


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

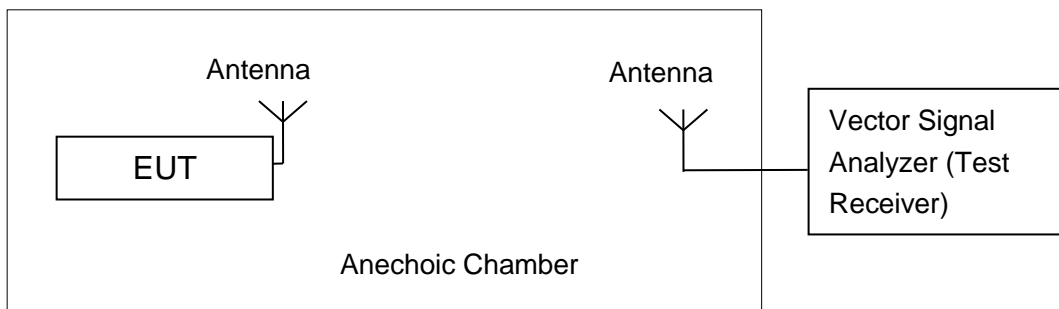

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurementmethod SA-1 is made according to KDB 789033

Measurement Results:

802.11a mode

Mode	Channel	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz (Ch36)	13.85	13.82	13.75	13.60	13.43	13.21	12.94	12.81
	5200MHz (Ch40)	13.58	/	/	/	/	/	/	/
	5240MHz(Ch48)	13.78	/	/	/	/	/	/	/
	5260MHz(Ch52)	13.56	/	/	/	/	/	/	/
	5280MHz(Ch56)	13.48	/	/	/	/	/	/	/
	5320MHz(Ch64)	13.58	/	/	/	/	/	/	/
	5500MHz(Ch100)	13.15	/	/	/	/	/	/	/
	5580MHz(Ch116)	12.98	/	/	/	/	/	/	/
	5700MHz(Ch140)	11.78	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz (Ch36)	12.89	12.74	12.63	12.41	12.17	11.91	11.82	11.68
	5200MHz (Ch40)	12.73	/	/	/	/	/	/	/
	5240MHz(Ch48)	12.86	/	/	/	/	/	/	/
	5260MHz(Ch52)	12.75	/	/	/	/	/	/	/
	5280MHz(Ch56)	12.65	/	/	/	/	/	/	/
	5320MHz(Ch64)	12.76	/	/	/	/	/	/	/
	5500MHz(Ch100)	12.32	/	/	/	/	/	/	/
	5580MHz(Ch116)	12.21	/	/	/	/	/	/	/
	5700MHz(Ch140)	10.87	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11ac (HT20)	5180MHz (Ch36)	11.39	10.78	10.33	9.88	8.24	7.89	7.62	6.49
	5200MHz (Ch40)	11.27	/	/	/	/	/	/	/
	5240MHz(Ch48)	11.38	/	/	/	/	/	/	/
	5260MHz(Ch52)	11.26	/	/	/	/	/	/	/
	5280MHz(Ch56)	11.16	/	/	/	/	/	/	/
	5320MHz(Ch64)	11.29	/	/	/	/	/	/	/
	5500MHz(Ch100)	10.79	/	/	/	/	/	/	/
	5580MHz(Ch116)	10.68	/	/	/	/	/	/	/
	5700MHz(Ch140)	9.39	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz (Ch38)	10.98	11.69	11.42	11.16	10.72	10.37	10.21	10.05
	5230MHz(Ch46)	/	11.31	/	/	/	/	/	/
	5270MHz(Ch54)	/	11.22	/	/	/	/	/	/
	5310MHz(Ch62)	/	10.56	/	/	/	/	/	/
	5510MHz(Ch102)	/	11.21	/	/	/	/	/	/
	5550MHz(Ch110)	/	11.39	/	/	/	/	/	/
	5670MHz(Ch134)	/	10.75	/	/	/	/	/	/

The data rate MCS1 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11ac (HT40)	5190MHz (Ch38)	8.96	8.13	8.49	7.92	7.29	6.87	5.72	4.62
	5230MHz(Ch46)	8.57	/	/	/	/	/	/	/
	5270MHz(Ch54)	8.49	/	/	/	/	/	/	/
	5310MHz(Ch62)	7.87	/	/	/	/	/	/	/
	5510MHz(Ch102)	8.52	/	/	/	/	/	/	/
	5550MHz(Ch110)	8.68	/	/	/	/	/	/	/
	5670MHz(Ch134)	8.11	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with



this condition.

802.11ac-HT80 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11ac (HT80)	5210MHz(Ch42)	7.73	6.56	6.92	6.37	5.75	5.53	4.32	3.39
	5290MHz(Ch58)	7.20	/	/	/	/	/	/	/
	5530MHz(Ch106)	7.39	/	/	/	/	/	/	/
	5610MHz(Ch122)	7.39	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method SA-1 is made according to KDB 789033

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	3.69	P
	5200 MHz	3.62	P
	5240 MHz	4.03	P
	5260 MHz	4.01	P
	5280 MHz	3.73	P
	5320 MHz	3.84	P
	5500 MHz	3.60	P
	5580 MHz	3.38	P
	5700 MHz	2.68	P
802.11n HT20	5180 MHz	2.71	P
	5200 MHz	2.72	P
	5240 MHz	2.76	P
	5260 MHz	2.67	P
	5280 MHz	2.69	P
	5320 MHz	2.66	P
	5500 MHz	2.40	P
	5580 MHz	2.49	P
	5700 MHz	1.65	P
802.11ac HT20	5180 MHz	1.72	P
	5200 MHz	1.74	P
	5240 MHz	1.97	P
	5260 MHz	1.75	P
	5280 MHz	1.75	P
	5320 MHz	1.71	P
	5500 MHz	1.75	P
	5580 MHz	1.57	P
	5700 MHz	0.65	P
802.11n HT40	5190 MHz	-0.48	P
	5230 MHz	-0.54	P
	5270 MHz	-0.8	P
	5310 MHz	-1.7	P



	5510 MHz	-0.14	P
	5550 MHz	-0.63	P
	5670 MHz	-0.74	P
802.11ac HT40	5190 MHz	-2.55	P
	5230 MHz	-2.96	P
	5270 MHz	-2.93	P
	5310 MHz	-3.54	P
	5510 MHz	-2.13	P
	5550 MHz	-2.57	P
	5670 MHz	-2.44	P
802.11ac HT80	5210MHz	-5.37	P
	5290MHz	-5.73	P
	5530MHz	-4.72	P
	5610MHz	-5.57	P

Conclusion: PASS

A.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 26dB Bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.1	34.25	P
	5200 MHz	Fig.2	34.80	P
	5240 MHz	Fig.3	32.70	P
	5260 MHz	Fig.4	32.00	P
	5280 MHz	Fig.5	31.15	P
	5320 MHz	Fig.6	36.15	P
	5500 MHz	Fig.7	30.30	P
	5580 MHz	Fig.8	28.10	P
	5700 MHz	Fig.9	24.10	P
802.11n HT20	5180 MHz	Fig.10	29.45	P
	5200 MHz	Fig.11	26.35	P
	5240 MHz	Fig.12	25.90	P
	5260 MHz	Fig.13	27.60	P
	5280 MHz	Fig.14	26.40	P
	5320 MHz	Fig.15	31.00	P
	5500 MHz	Fig.16	24.10	P
	5580 MHz	Fig.17	24.85	P
	5700 MHz	Fig.18	24.05	P
802.11ac HT20	5180 MHz	Fig.19	24.45	P
	5200 MHz	Fig.20	24.25	P
	5240 MHz	Fig.21	24.00	P
	5260 MHz	Fig.22	24.20	P
	5280 MHz	Fig.23	23.95	P
	5320 MHz	Fig.24	28.95	P
	5500 MHz	Fig.25	23.95	P
	5580 MHz	Fig.26	23.75	P
	5700 MHz	Fig.27	23.55	P

802.11n	5190 MHz	Fig.28	44.56	P
---------	----------	--------	-------	---

HT40	5230 MHz	Fig.29	43.36	P
	5270 MHz	Fig.30	43.52	P
	5310 MHz	Fig.31	43.92	P
	5510 MHz	Fig.32	43.92	P
	5550 MHz	Fig.33	44.08	P
	5670 MHz	Fig.34	43.60	P

802.11ac HT40	5190 MHz	Fig.35	44.64	P
	5230 MHz	Fig.36	44.24	P
	5270 MHz	Fig.37	44.48	P
	5310 MHz	Fig.38	44.24	P
	5510 MHz	Fig.39	44.48	P
	5550 MHz	Fig.40	44.48	P
	5670 MHz	Fig.41	44.24	P

802.11ac HT80	5210MHz	Fig.42	86.40	P
	5290MHz	Fig.43	85.92	P
	5530MHz	Fig.44	86.24	P
	5610MHz	Fig.45	86.08	P

Conclusion: PASS

Test graphs as below:

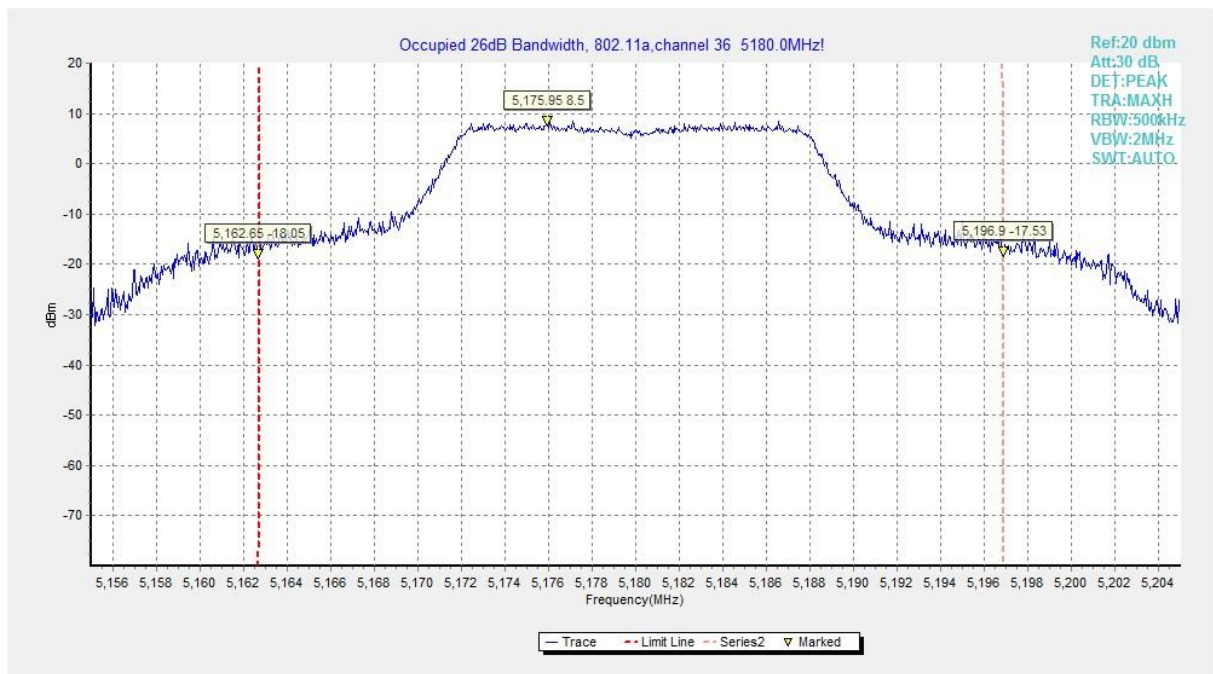


Fig. 1 Occupied 26dB Bandwidth (802.11a, 5180MHz)

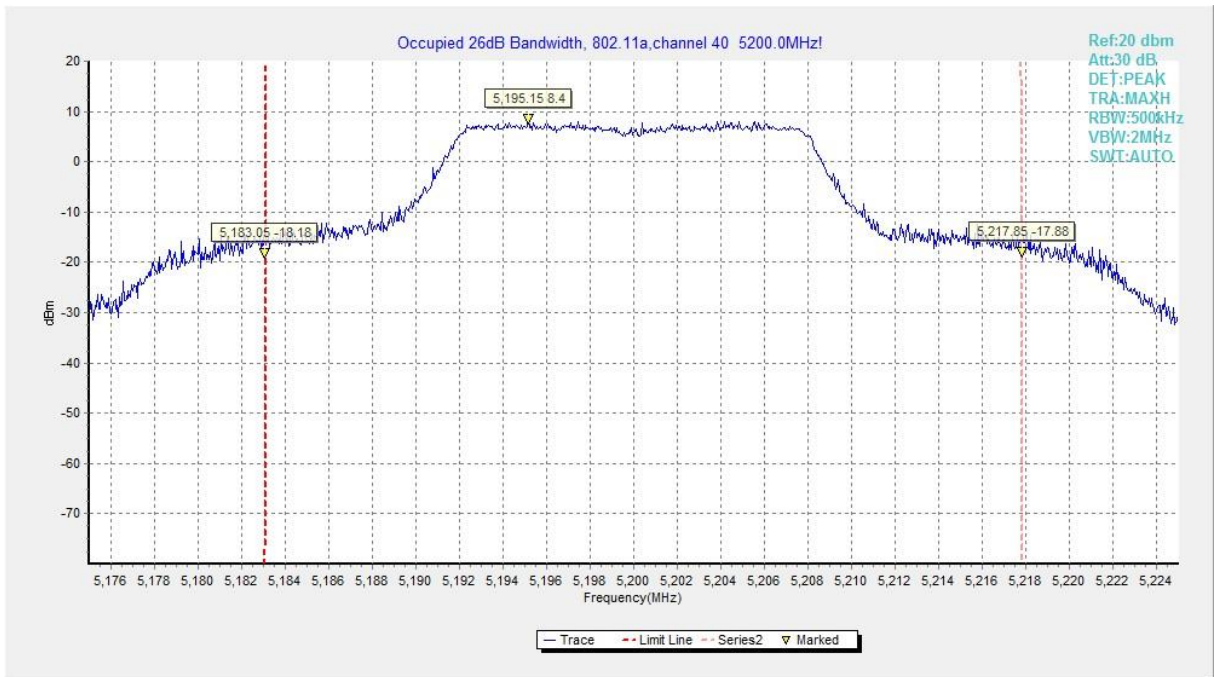


Fig. 2 Occupied 26dB Bandwidth (802.11a, 5200MHz)

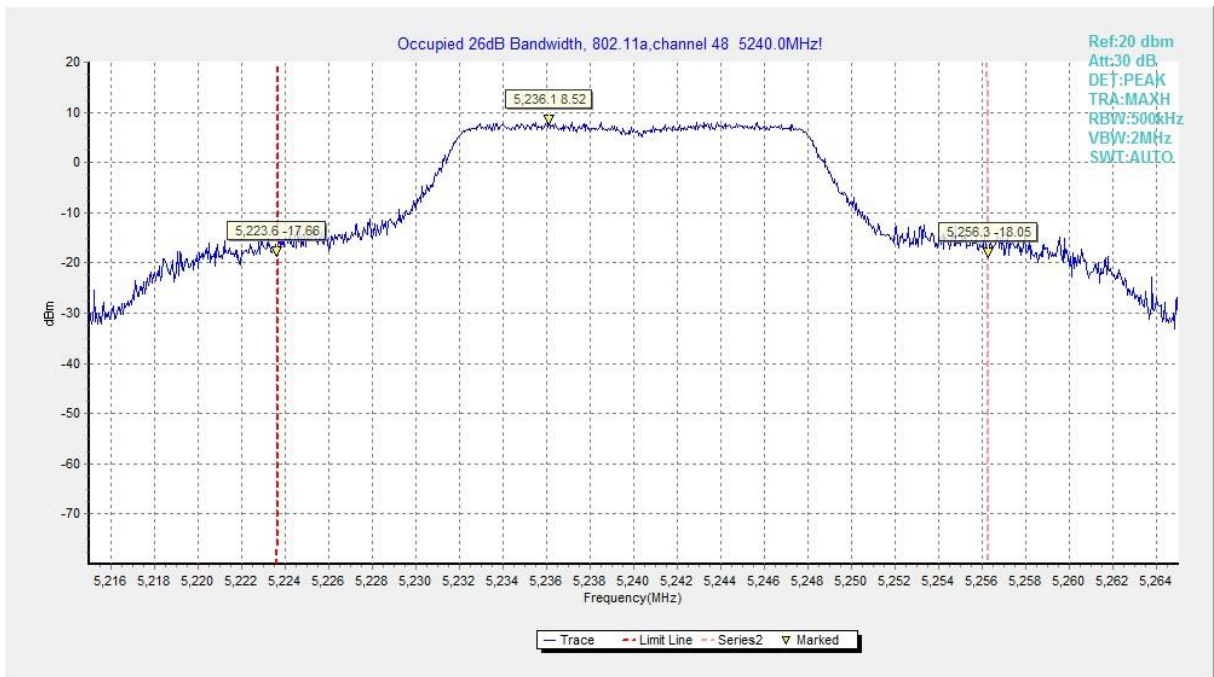


Fig. 3 Occupied 26dB Bandwidth (802.11a, 5240MHz)

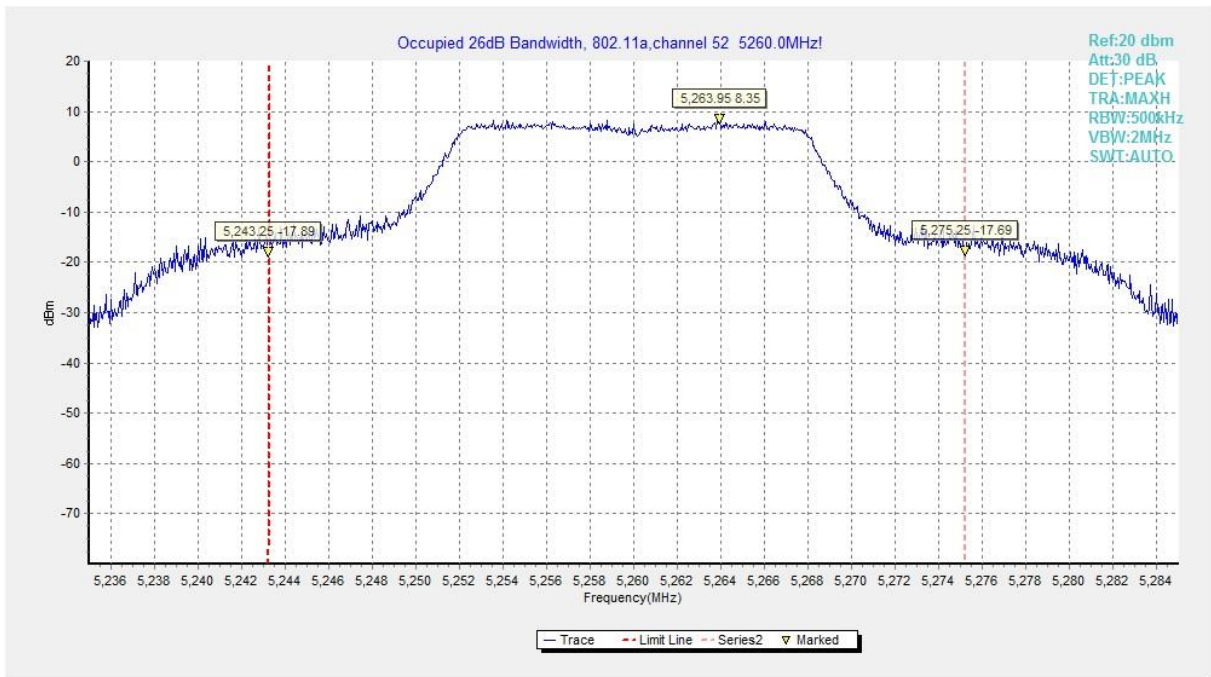


Fig. 4 Occupied 26dB Bandwidth (802.11a, 5260MHz)

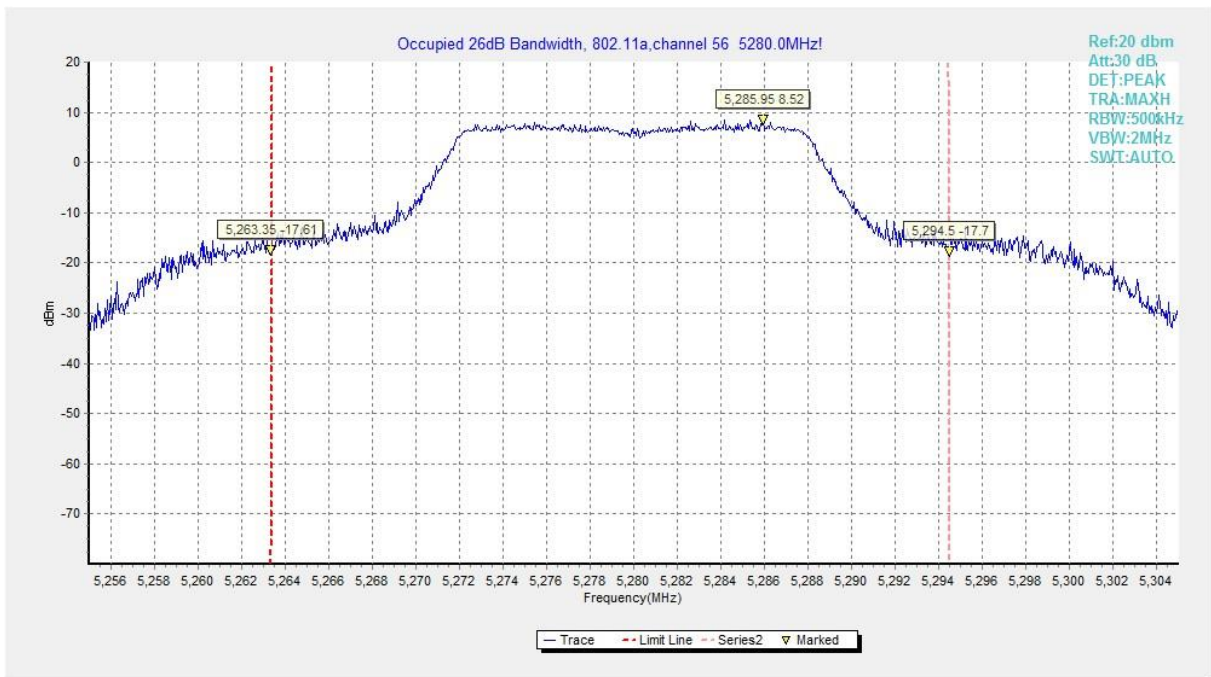


Fig. 5 Occupied 26dB Bandwidth (802.11a, 5280MHz)

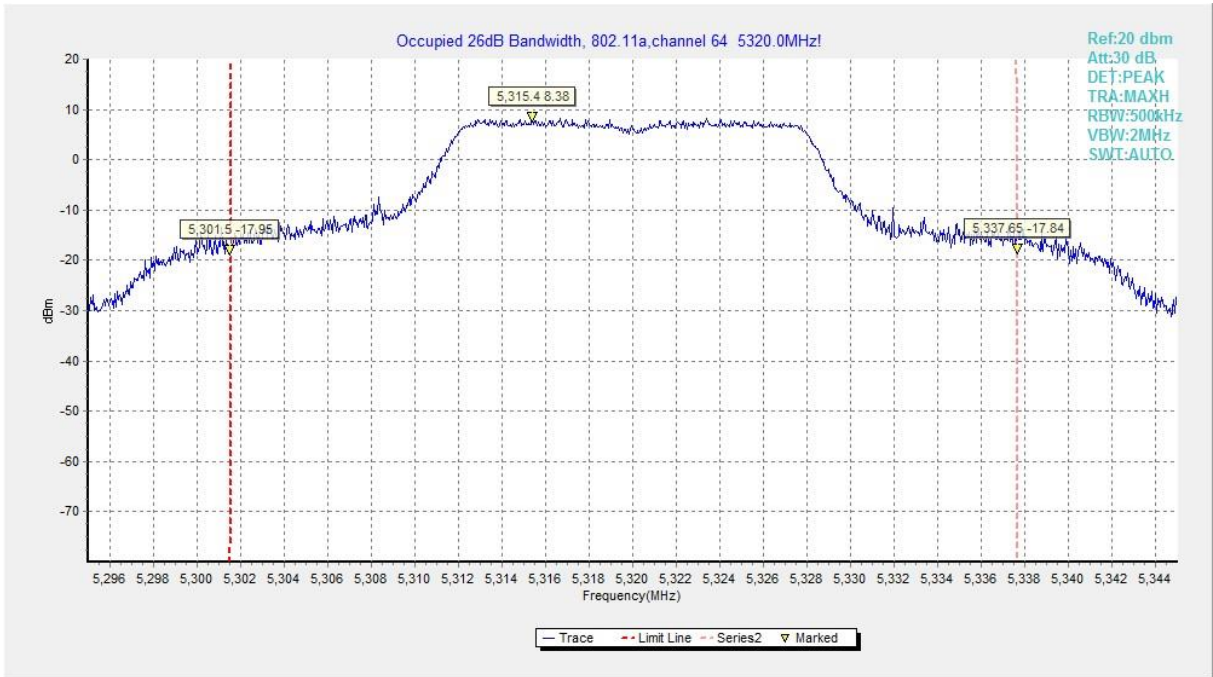


Fig. 6 Occupied 26dB Bandwidth (802.11a, 5320MHz)

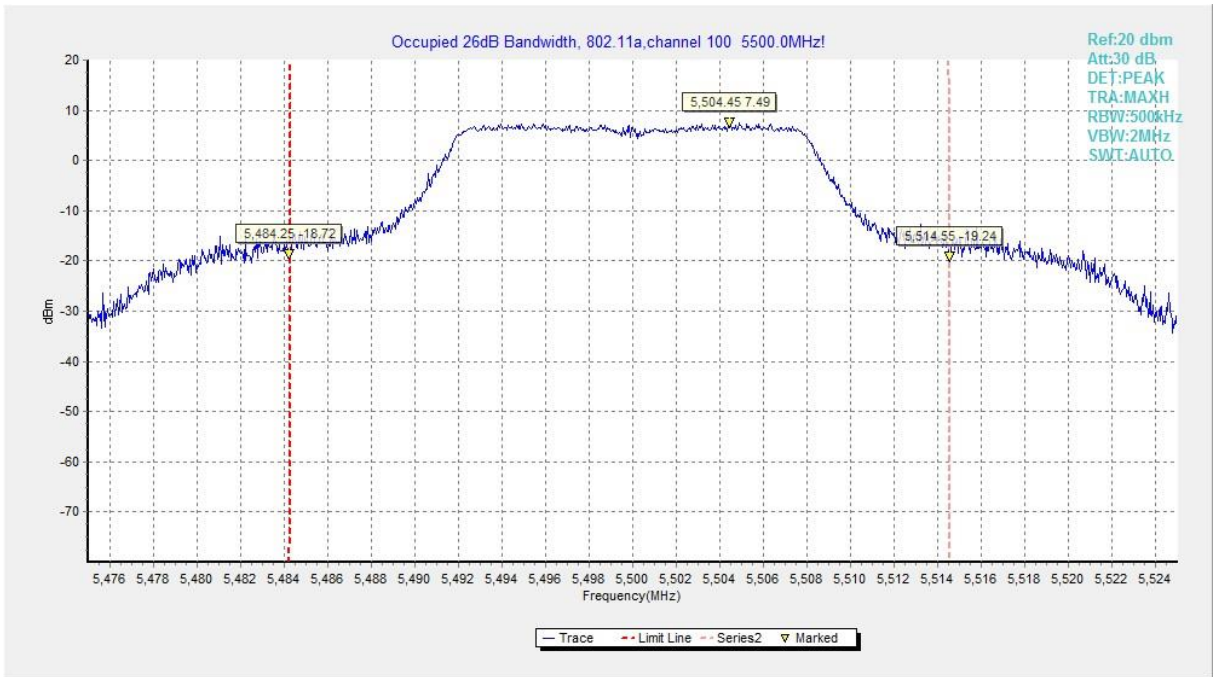


Fig. 7 Occupied 26dB Bandwidth (802.11a, 5500MHz)

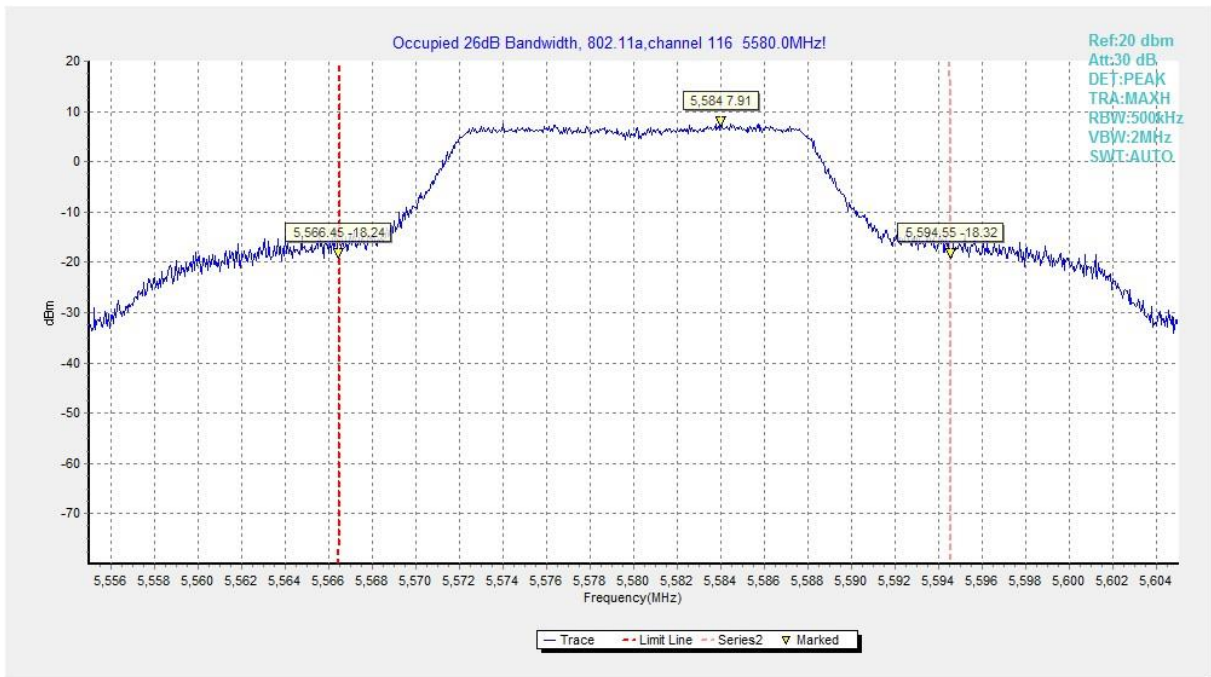


Fig. 8 Occupied 26dB Bandwidth (802.11a, 5580MHz)

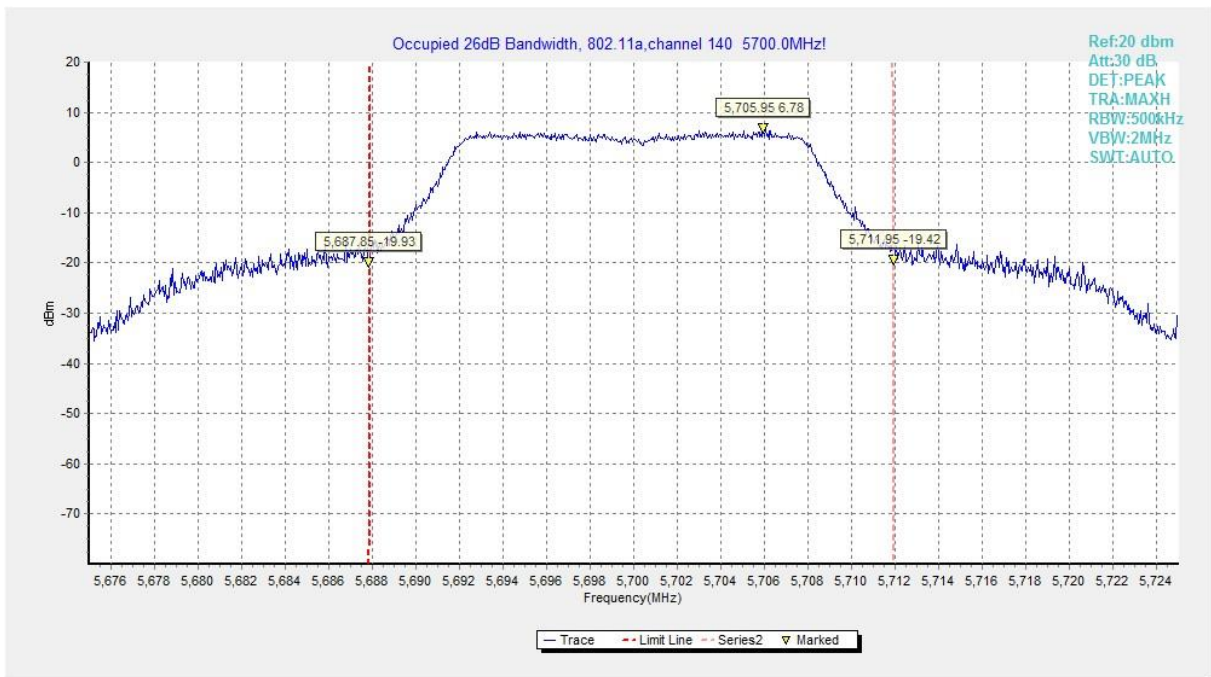


Fig. 9 Occupied 26dB Bandwidth (802.11a, 5700MHz)

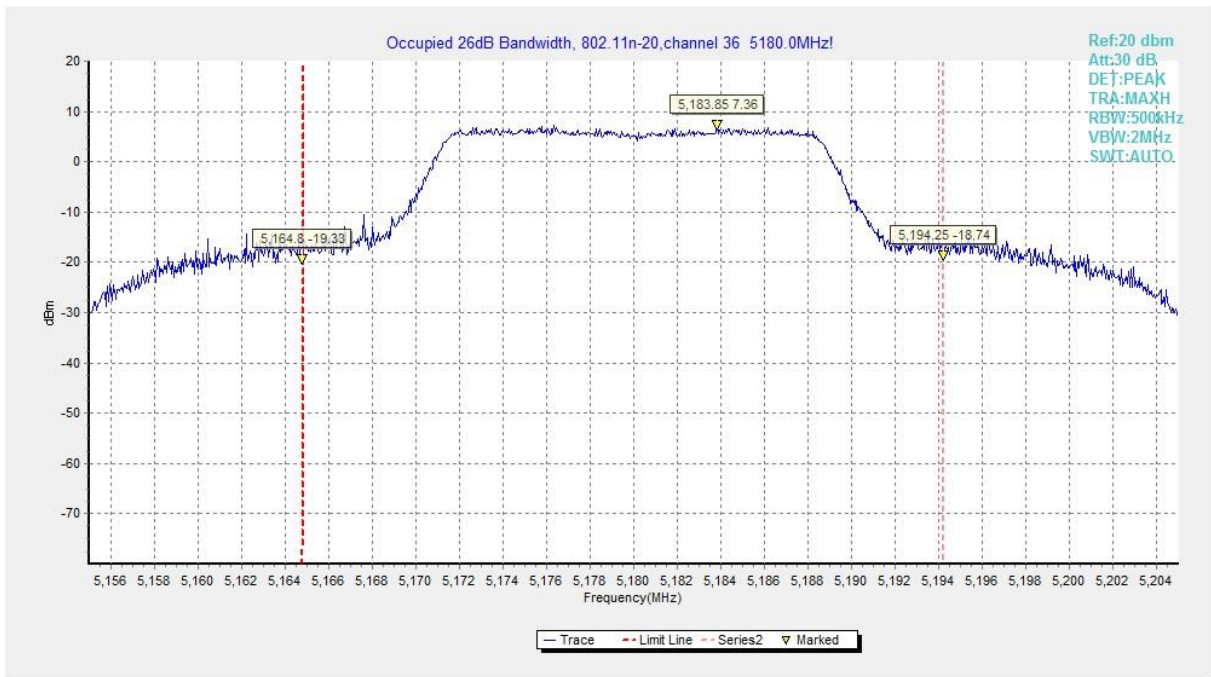


Fig. 10 Occupied 26dB Bandwidth (802.11n-HT20, 5180MHz)

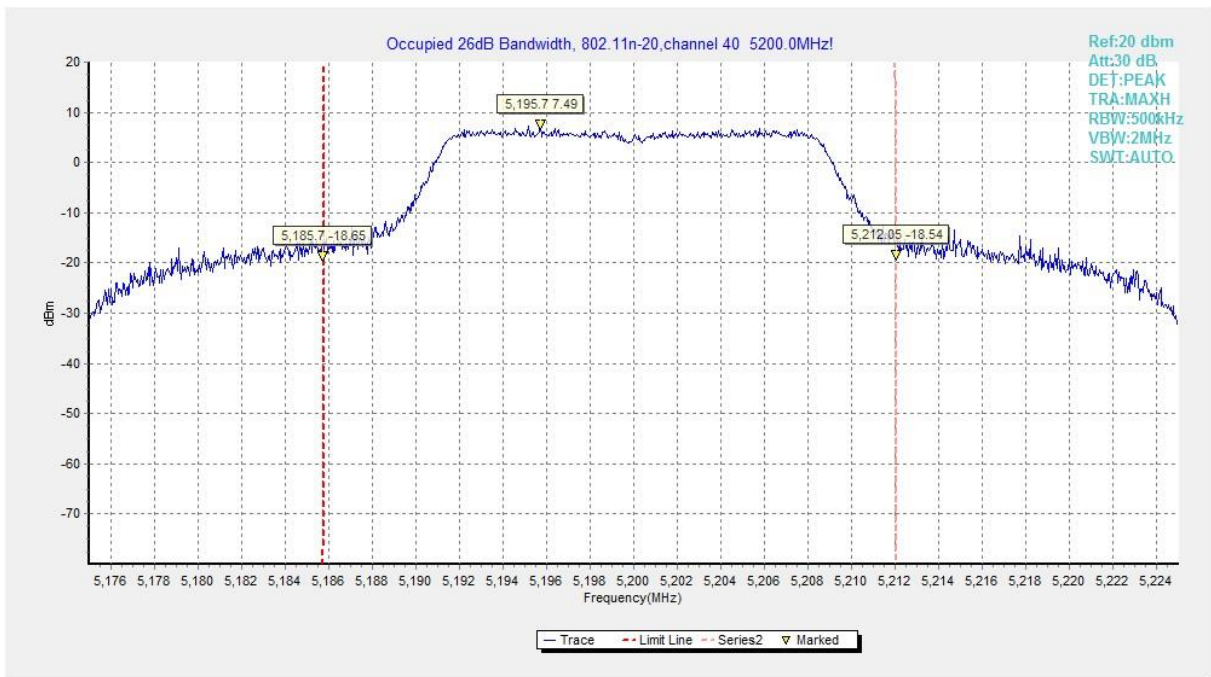


Fig. 11 Occupied 26dB Bandwidth (802.11n-HT20, 5200MHz)

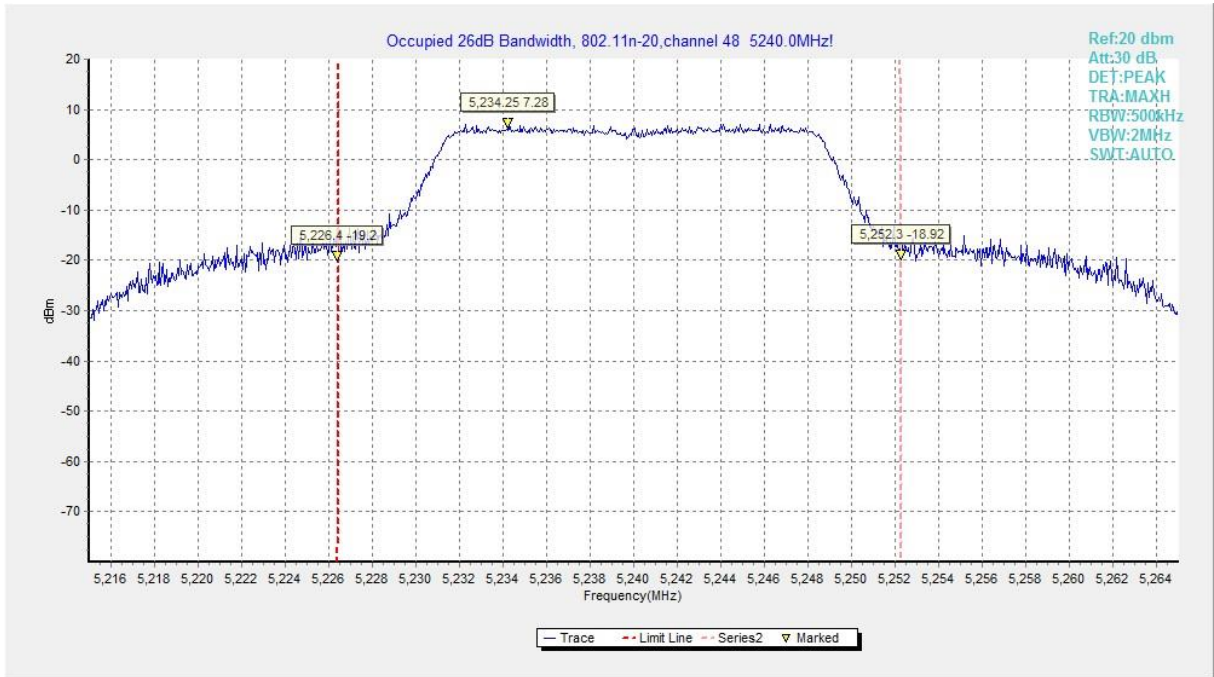


Fig. 12 Occupied 26dB Bandwidth (802.11n-HT20, 5240MHz)

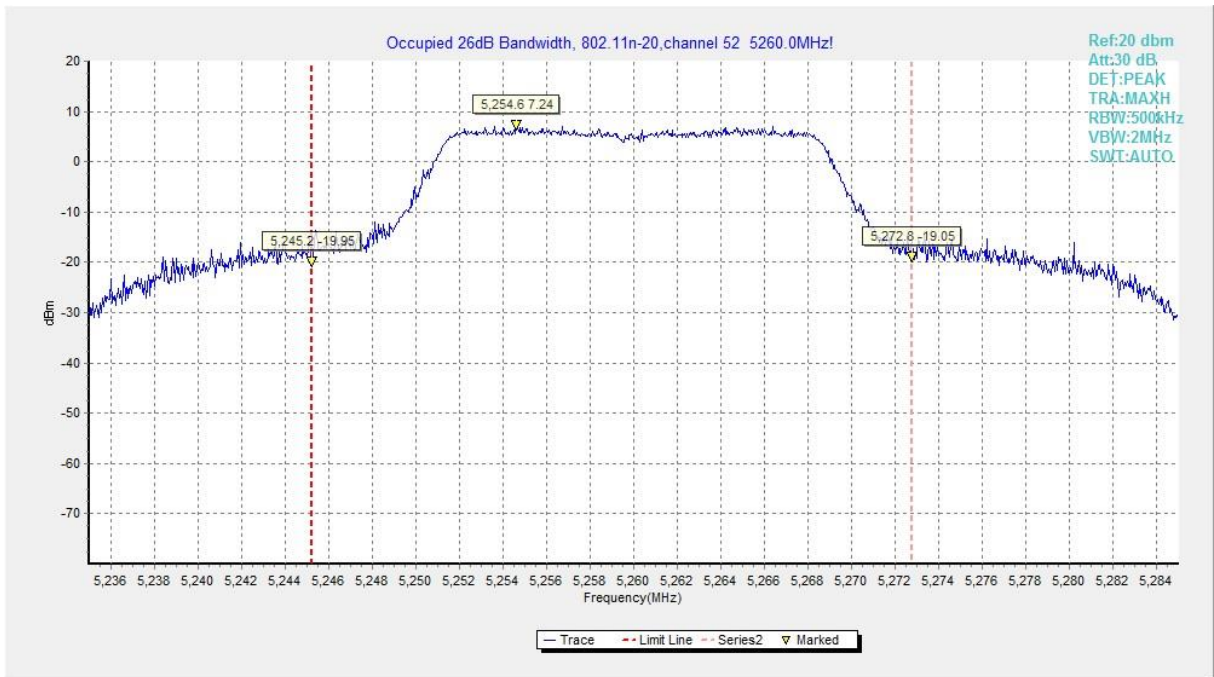


Fig. 13 Occupied 26dB Bandwidth (802.11n-HT20, 5260MHz)

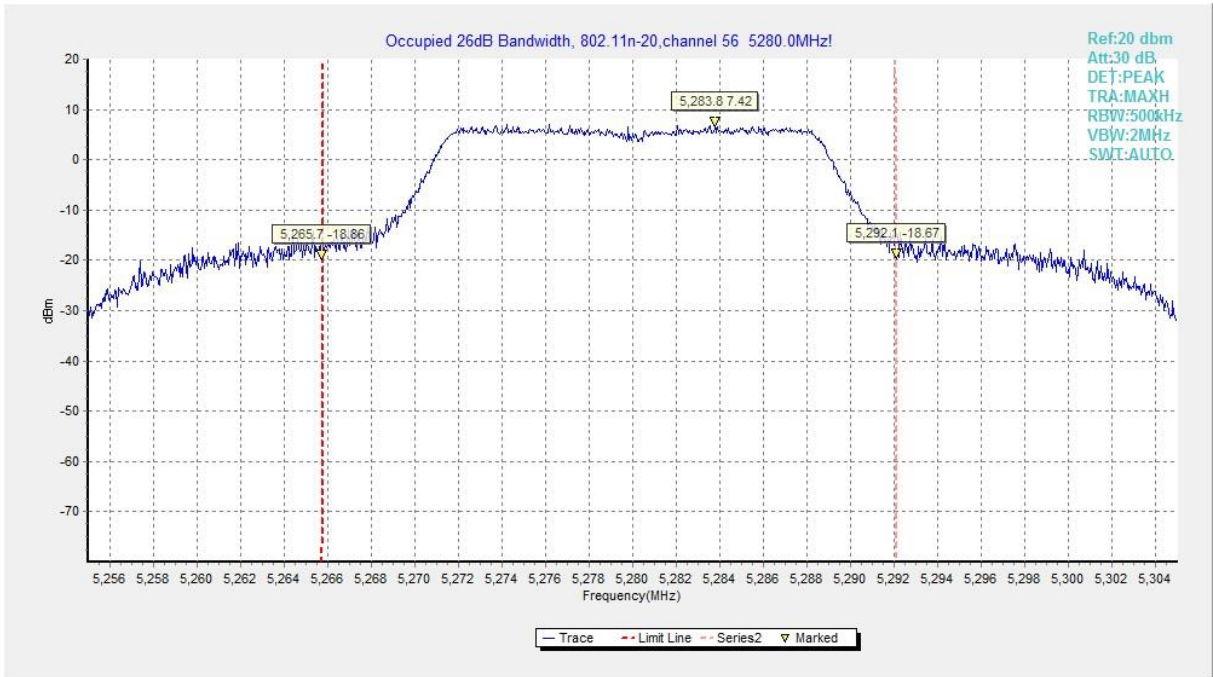


Fig. 14 Occupied 26dB Bandwidth (802.11n-HT20, 5280MHz)

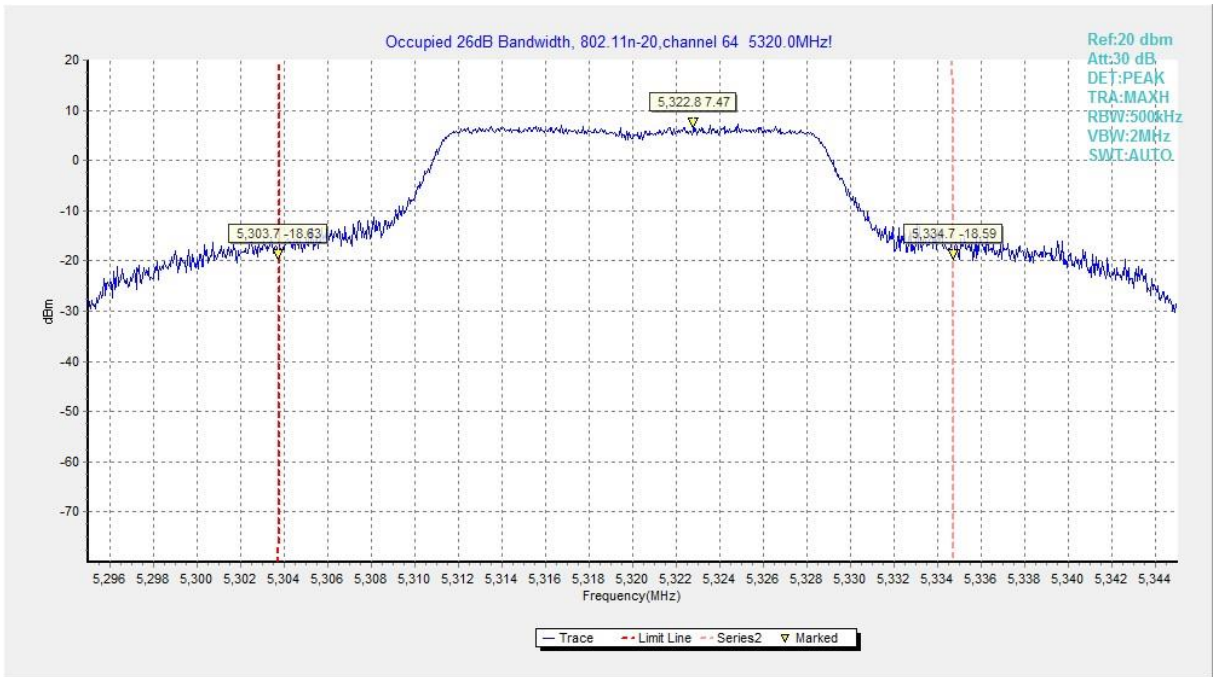


Fig. 15 Occupied 26dB Bandwidth (802.11n-HT20, 5320MHz)

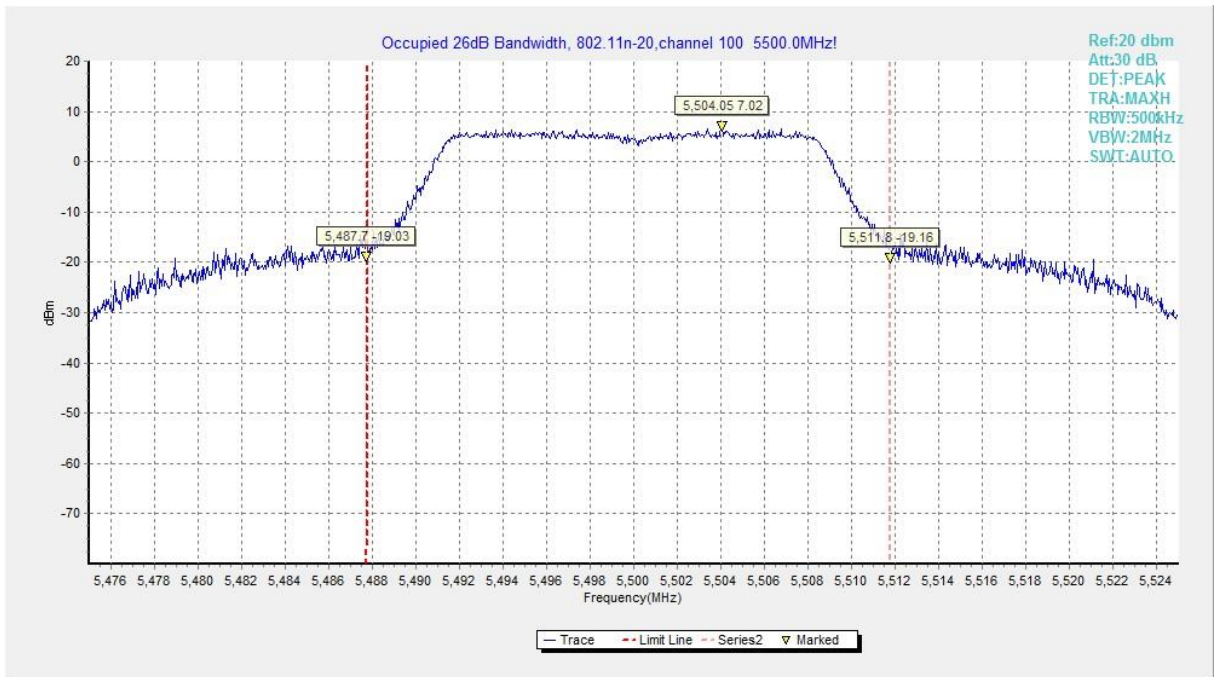


Fig. 16 Occupied 26dB Bandwidth (802. 11n-HT20, 5500MHz)

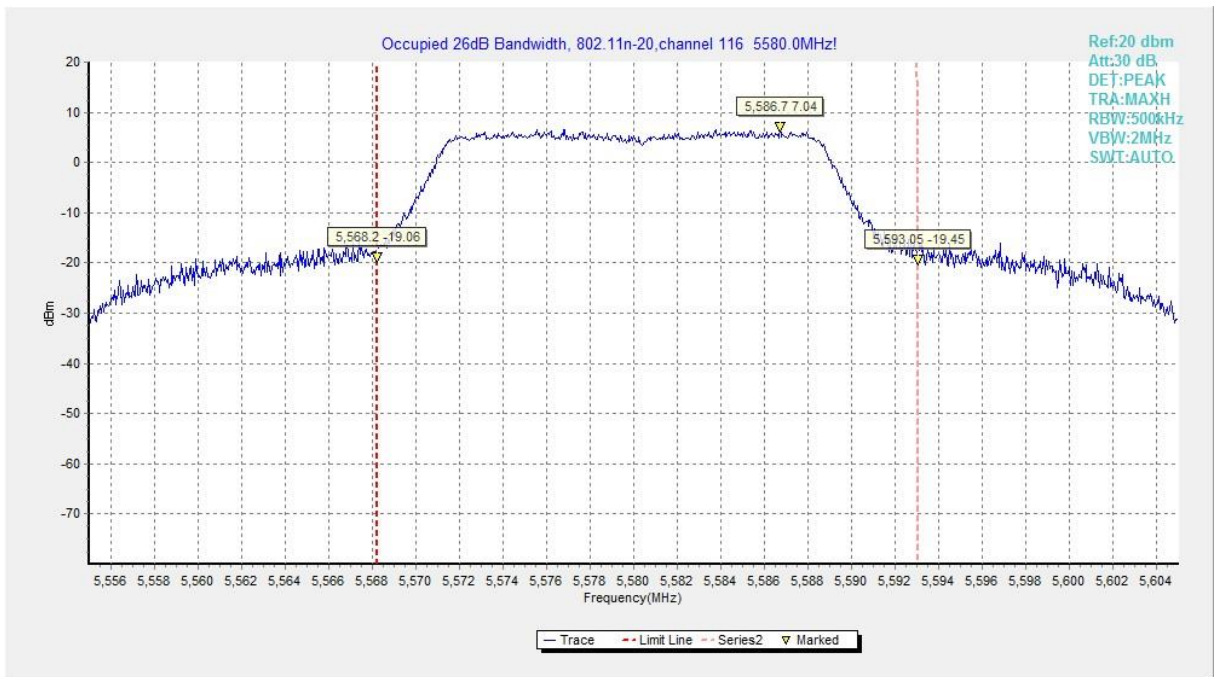


Fig. 17 Occupied 26dB Bandwidth (802. 11n-HT20, 5580MHz)

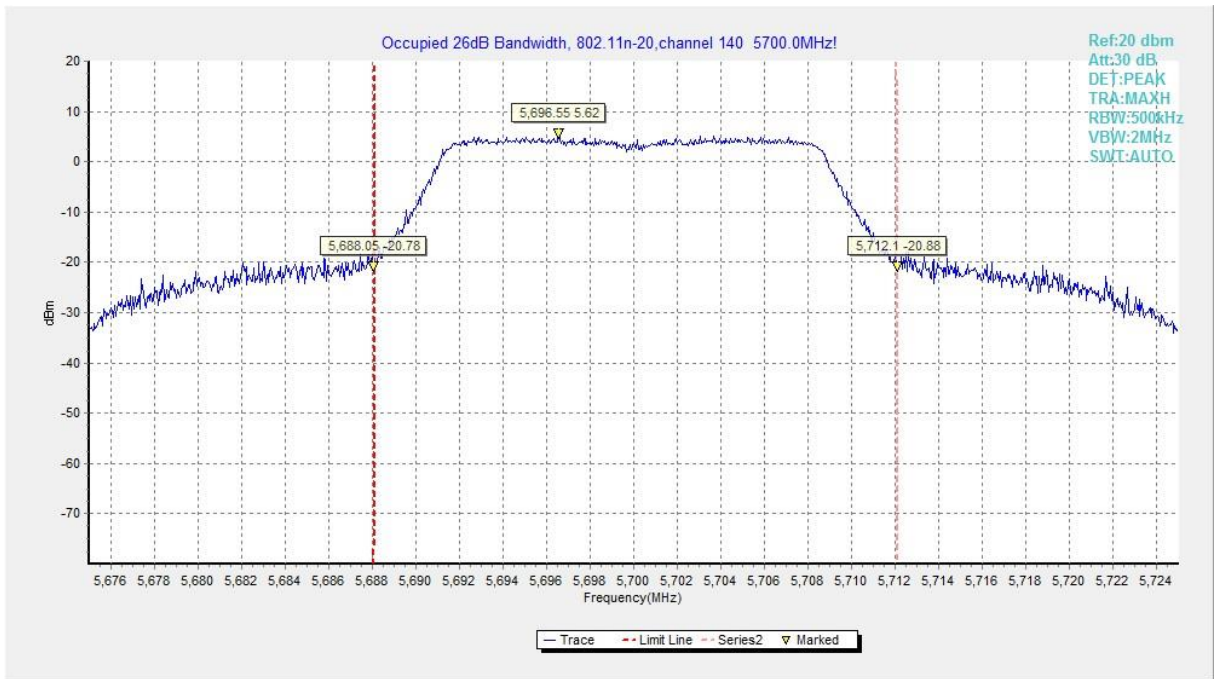


Fig. 18 Occupied 26dB Bandwidth (802. 11n-HT20, 5700MHz)



Fig. 19 Occupied 26dB Bandwidth (802.11ac-HT20, 5180MHz)

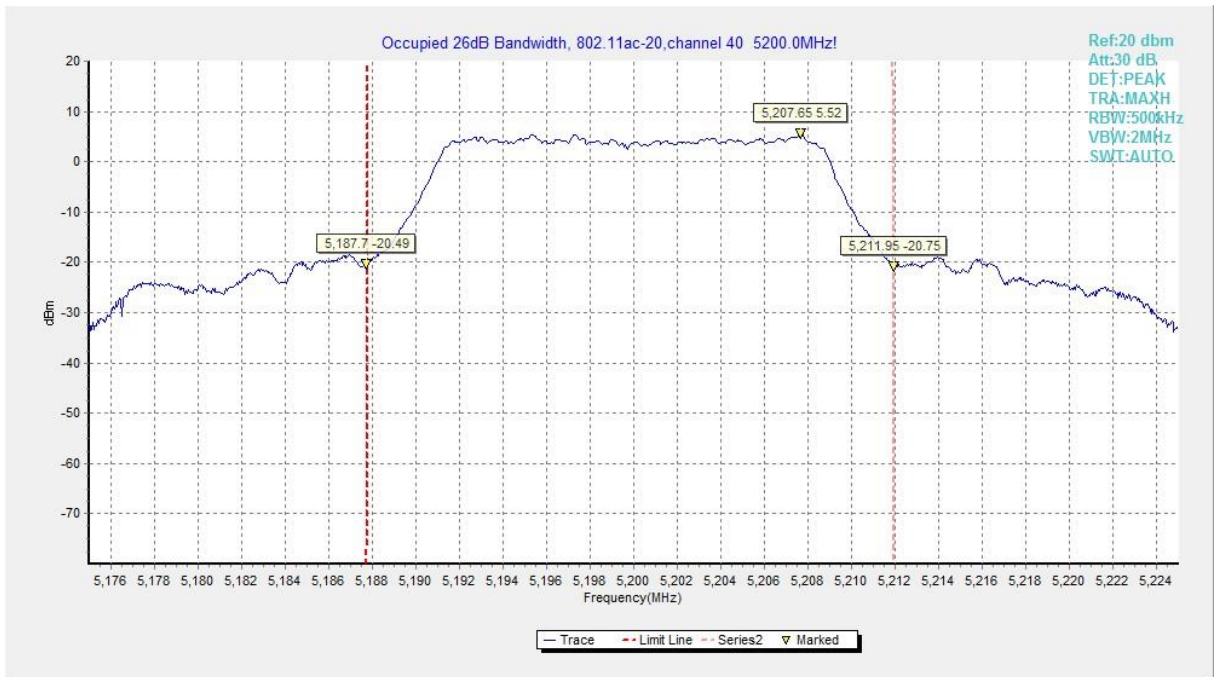


Fig. 20 Occupied 26dB Bandwidth (802.11ac-HT20, 5200MHz)

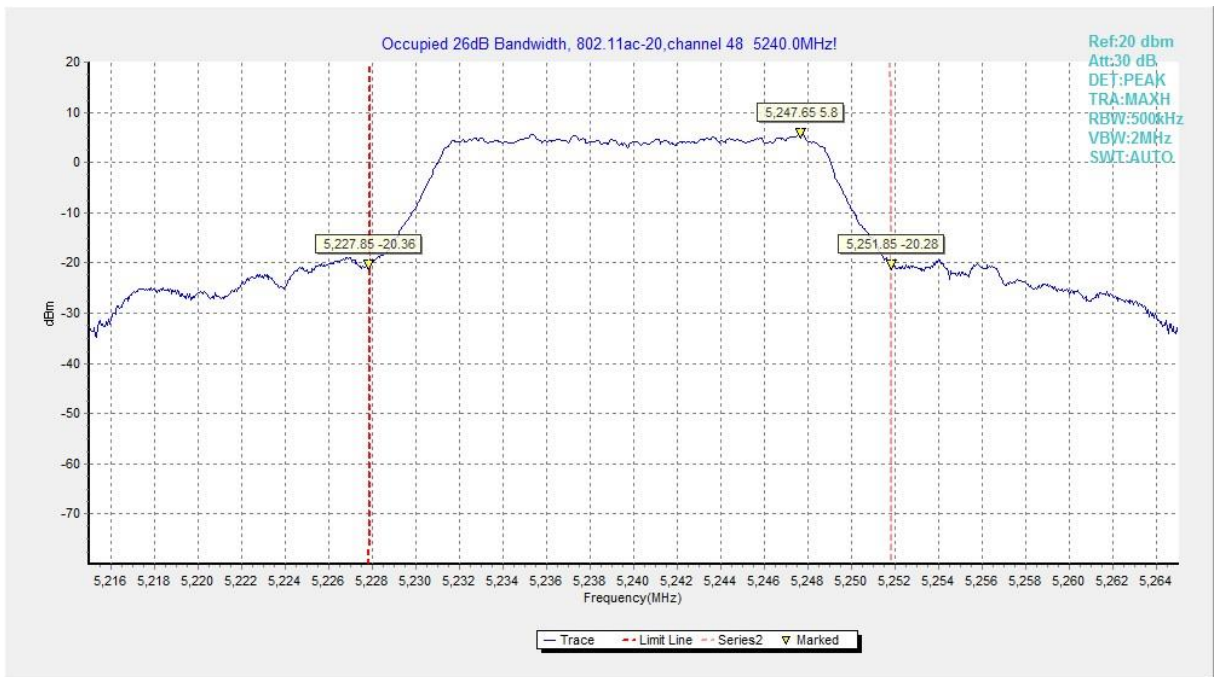


Fig. 21 Occupied 26dB Bandwidth (802.11ac-HT20, 5240MHz)

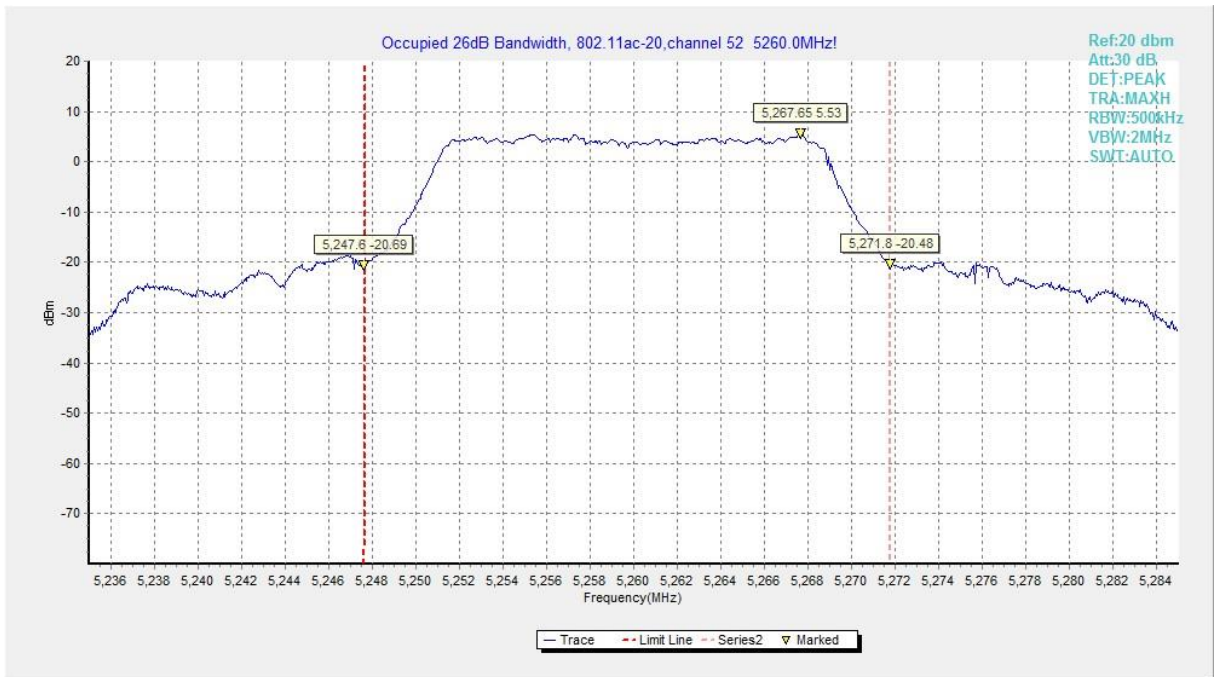


Fig. 22 Occupied 26dB Bandwidth (802.11ac-HT20, 5260MHz)

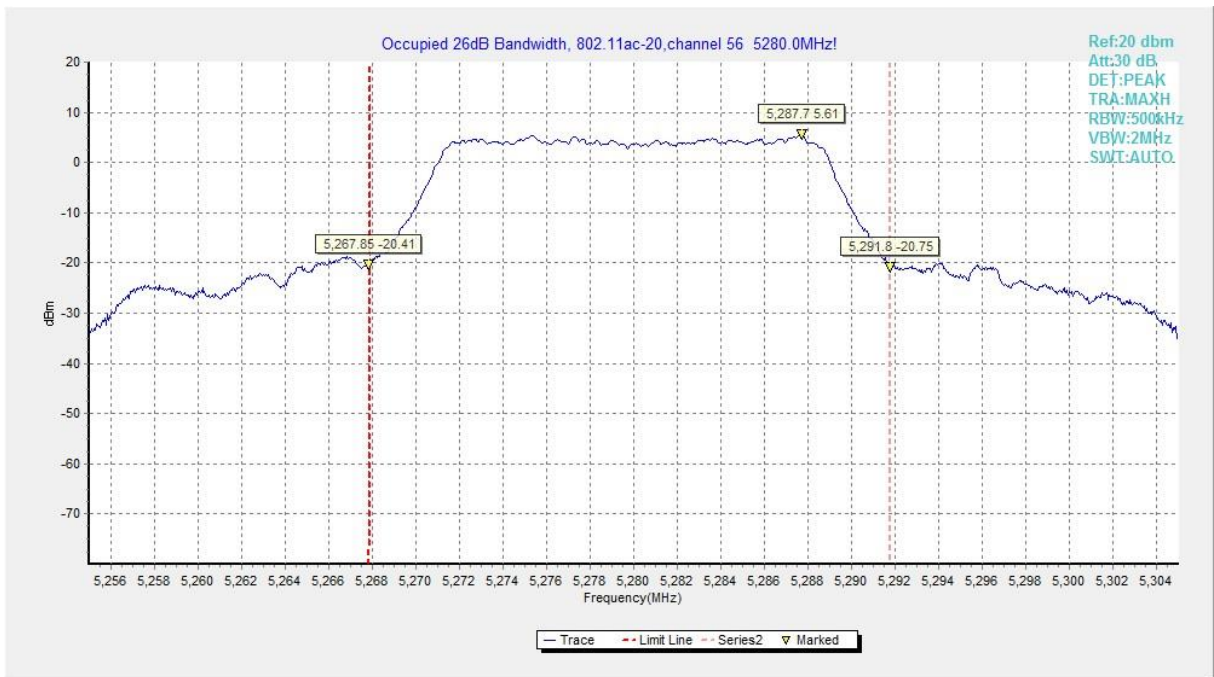


Fig. 23 Occupied 26dB Bandwidth (802.11ac-HT20, 5280MHz)

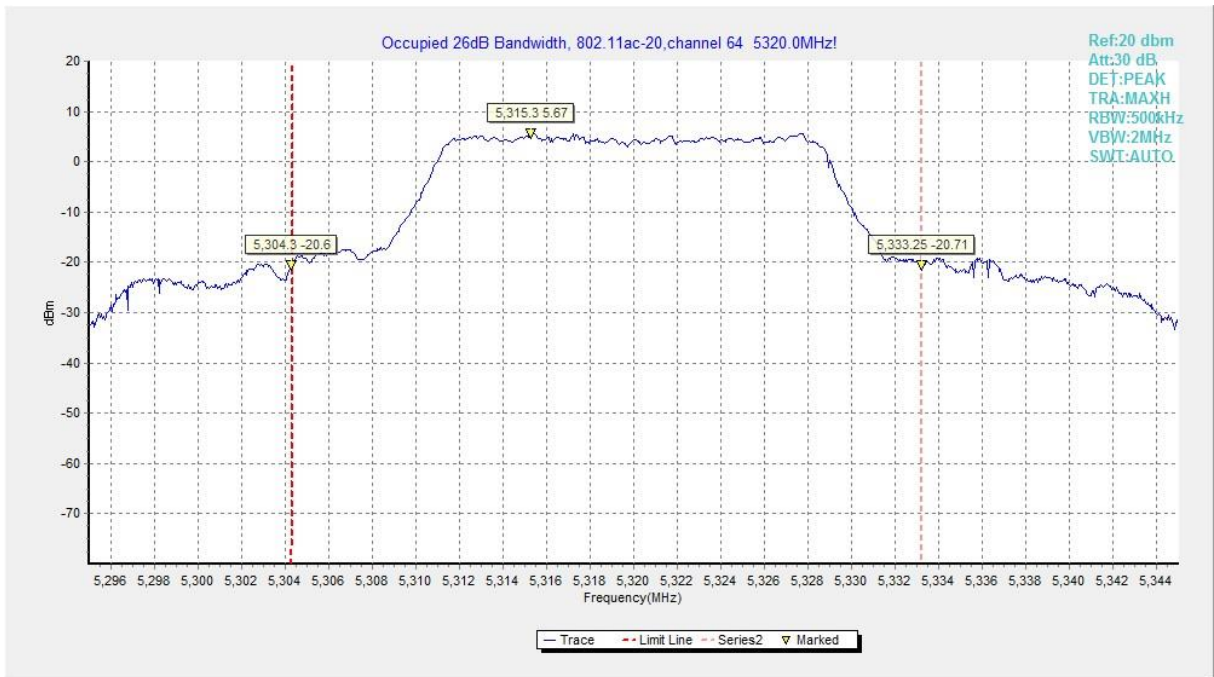


Fig. 24 Occupied 26dB Bandwidth (802.11ac-HT20, 5320MHz)

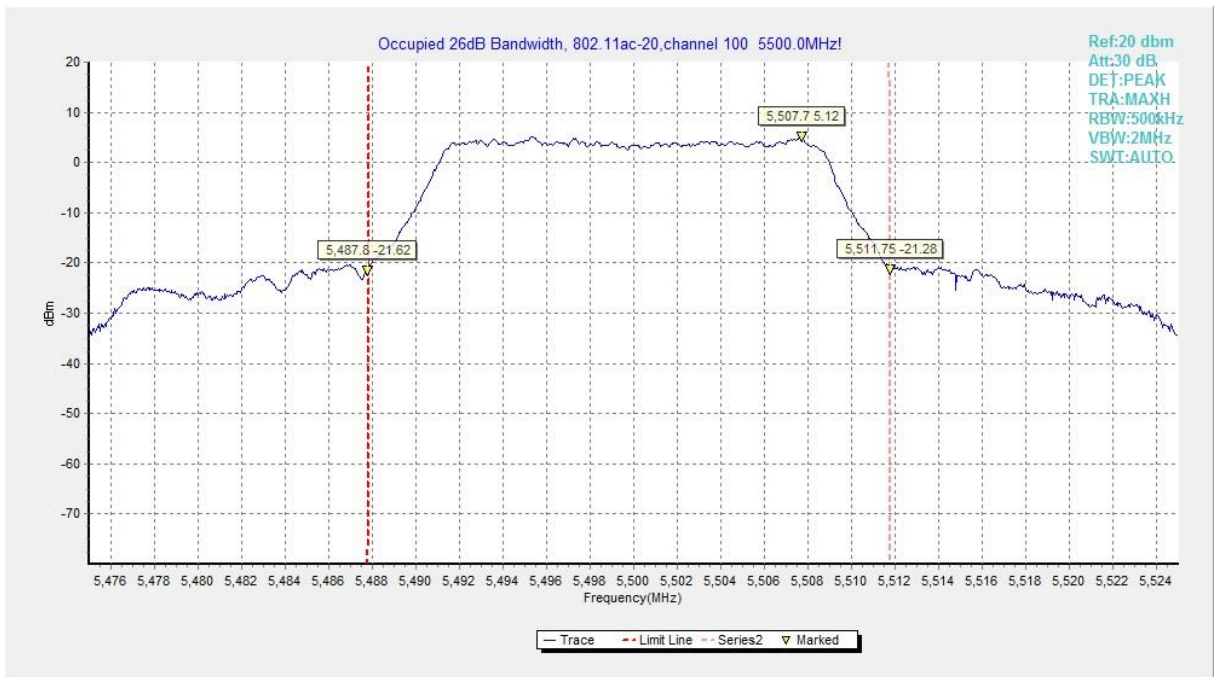


Fig. 25 Occupied 26dB Bandwidth (802.11ac-HT20, 5500MHz)

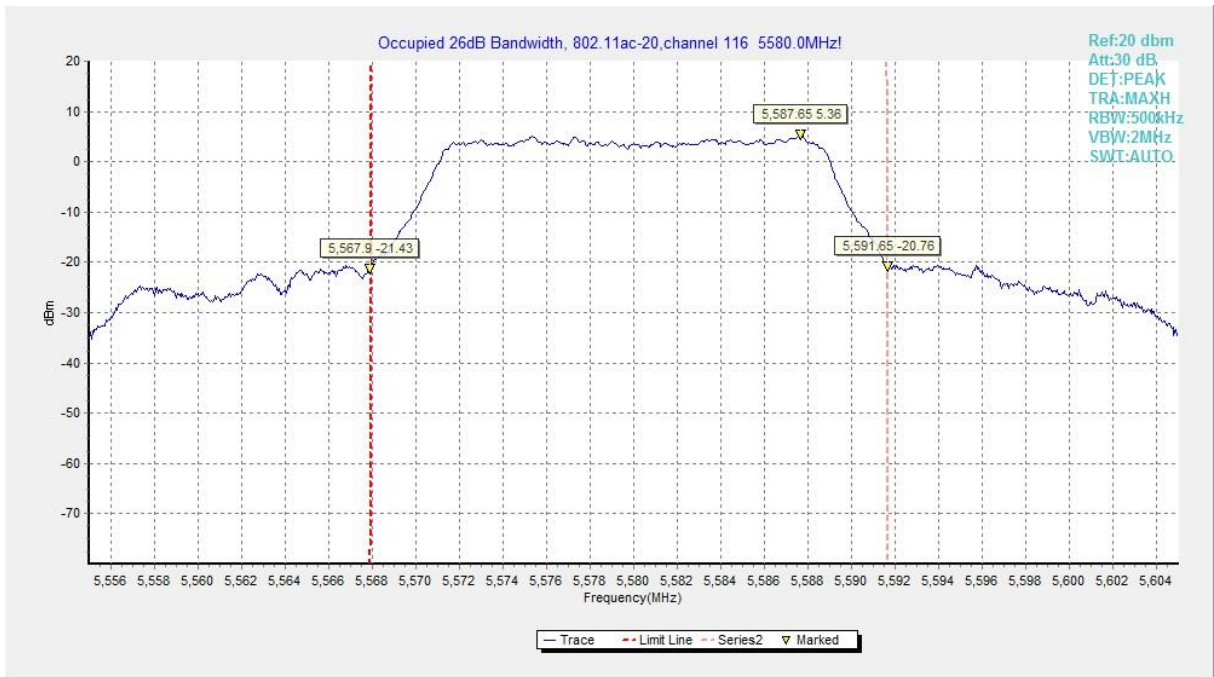


Fig. 26 Occupied 26dB Bandwidth (802. 11ac-HT20, 5580MHz)

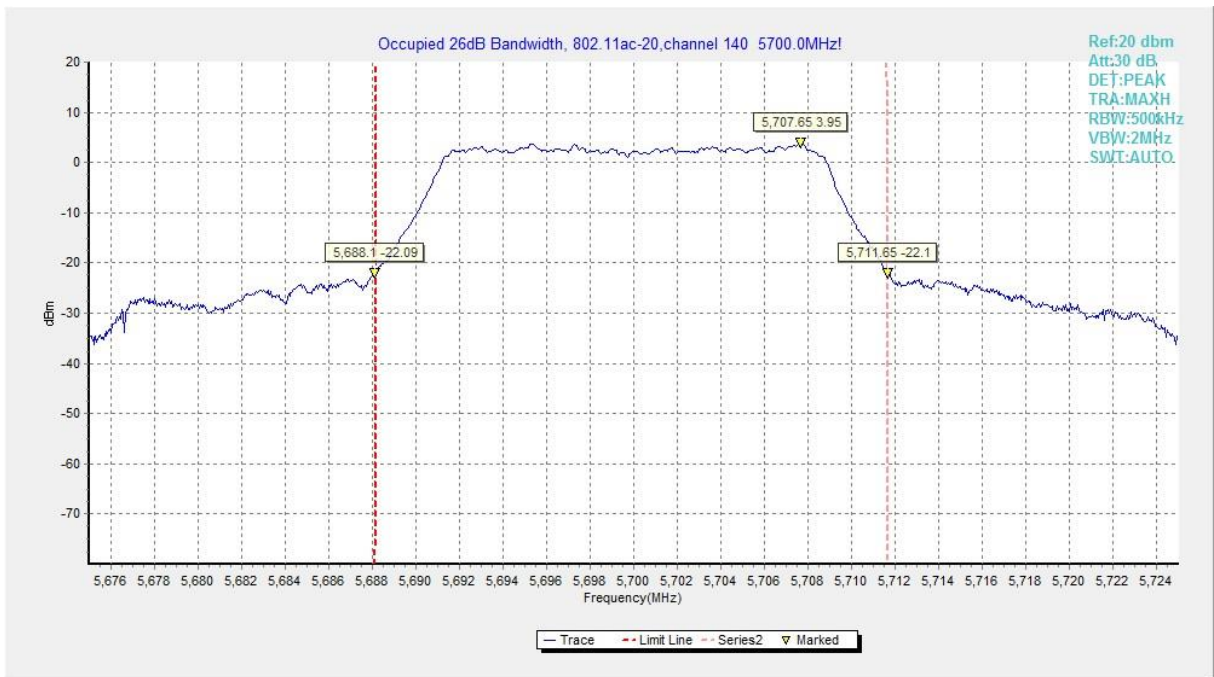


Fig. 27 Occupied 26dB Bandwidth (802. 11ac-HT20, 5700MHz)

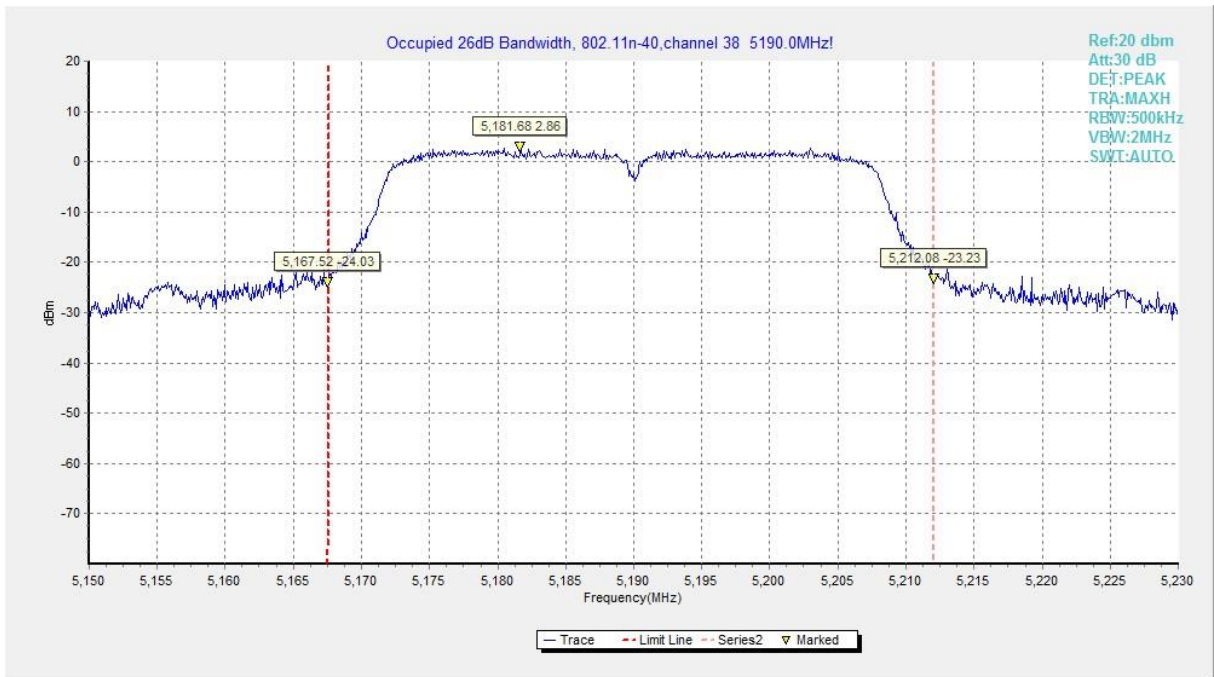


Fig. 28 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)

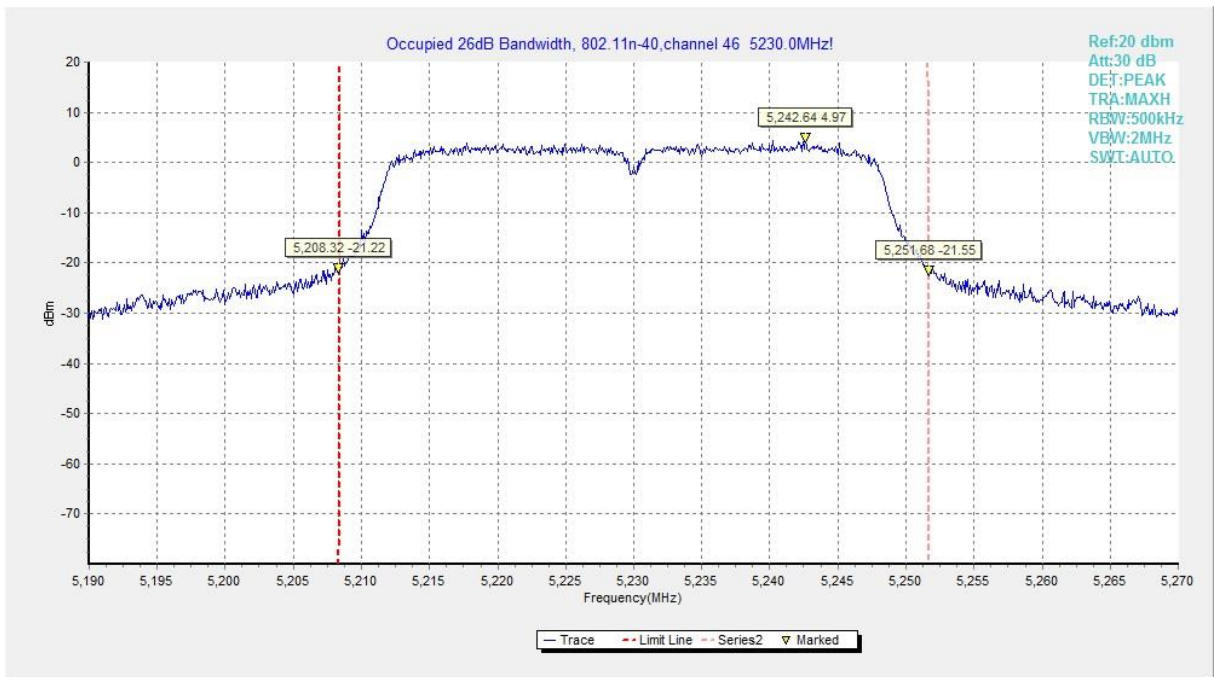


Fig. 29 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)

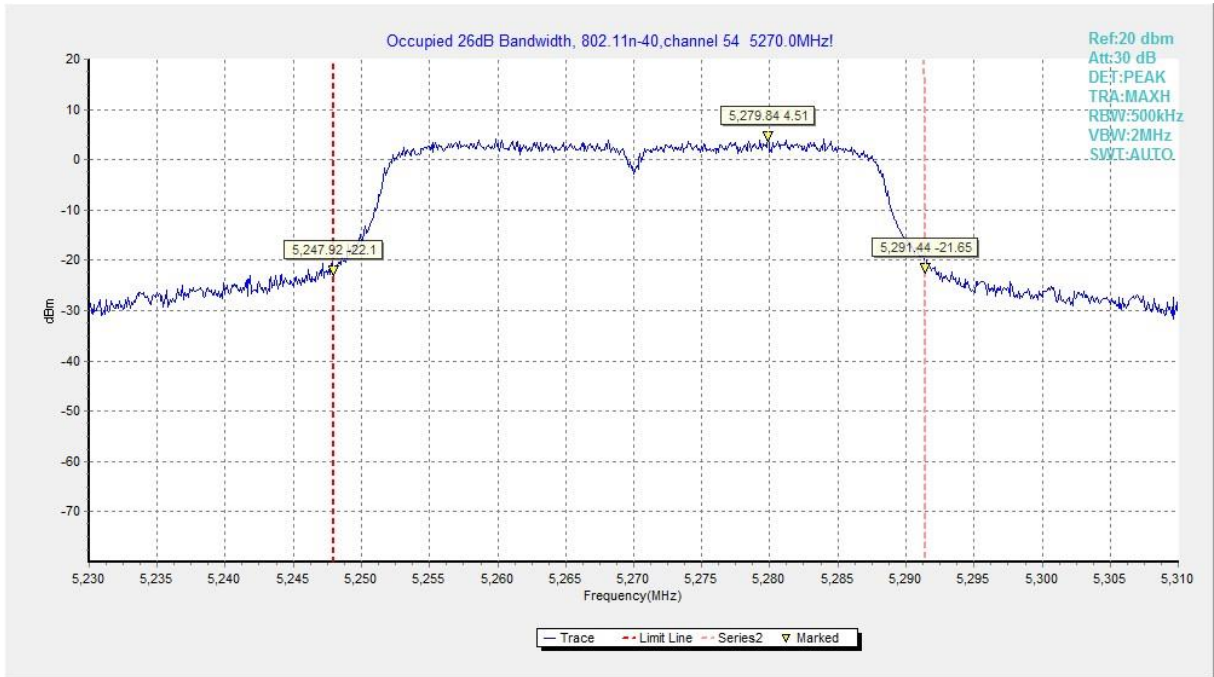


Fig. 30 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)

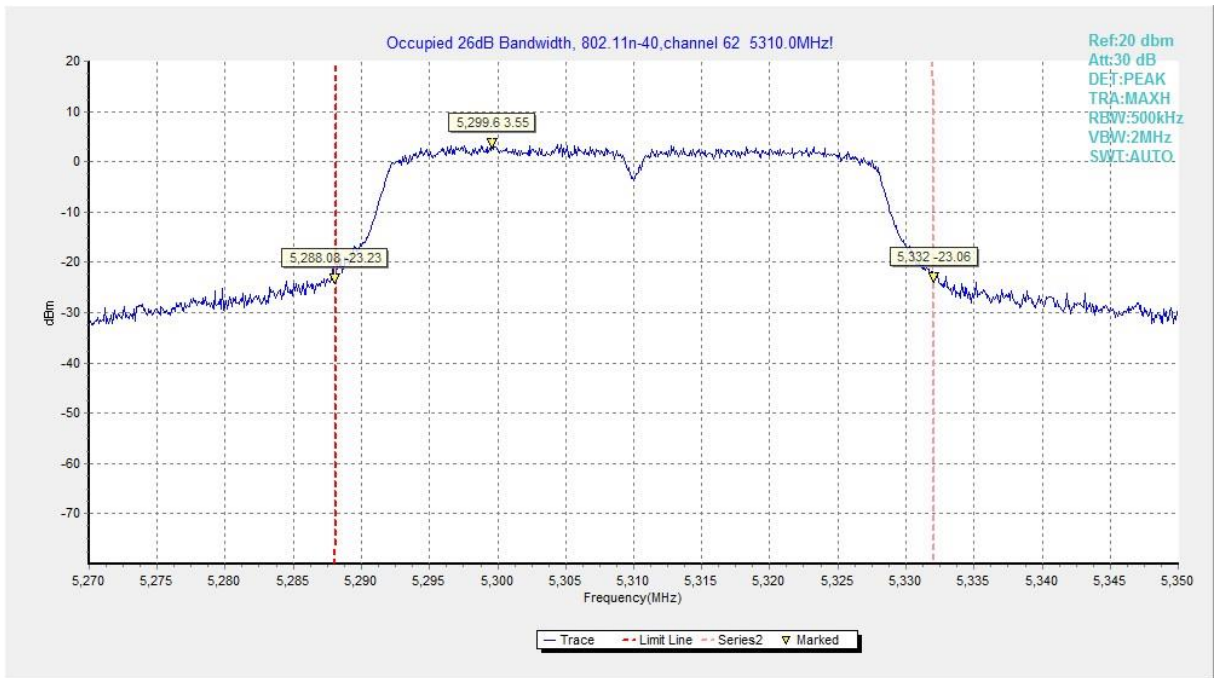


Fig. 31 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)

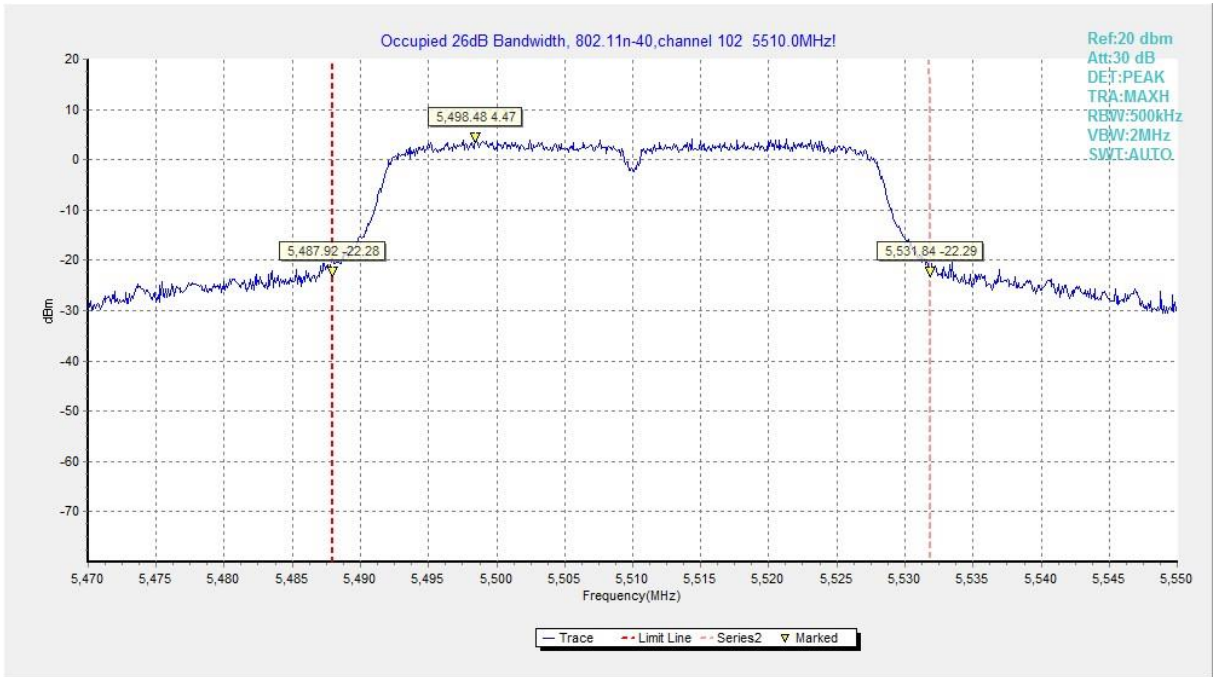


Fig. 32 Occupied 26dB Bandwidth (802. 11n-HT40, 5510MHz)

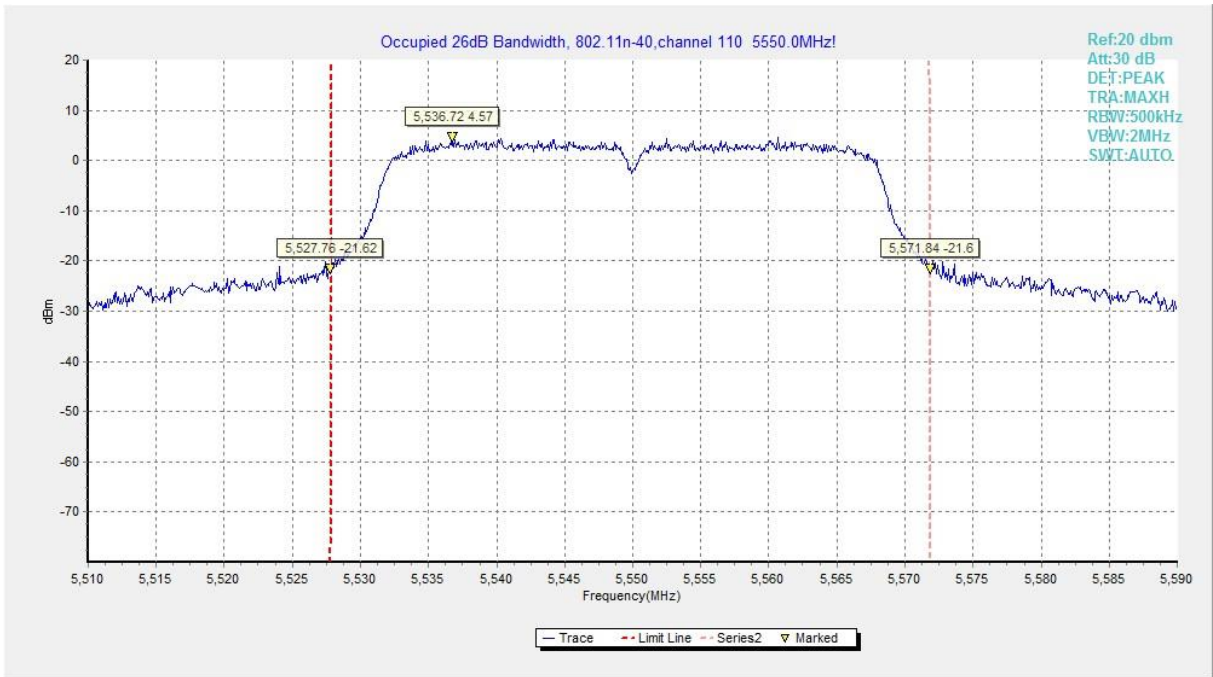


Fig. 33 Occupied 26dB Bandwidth (802. 11n-HT40, 5550MHz)

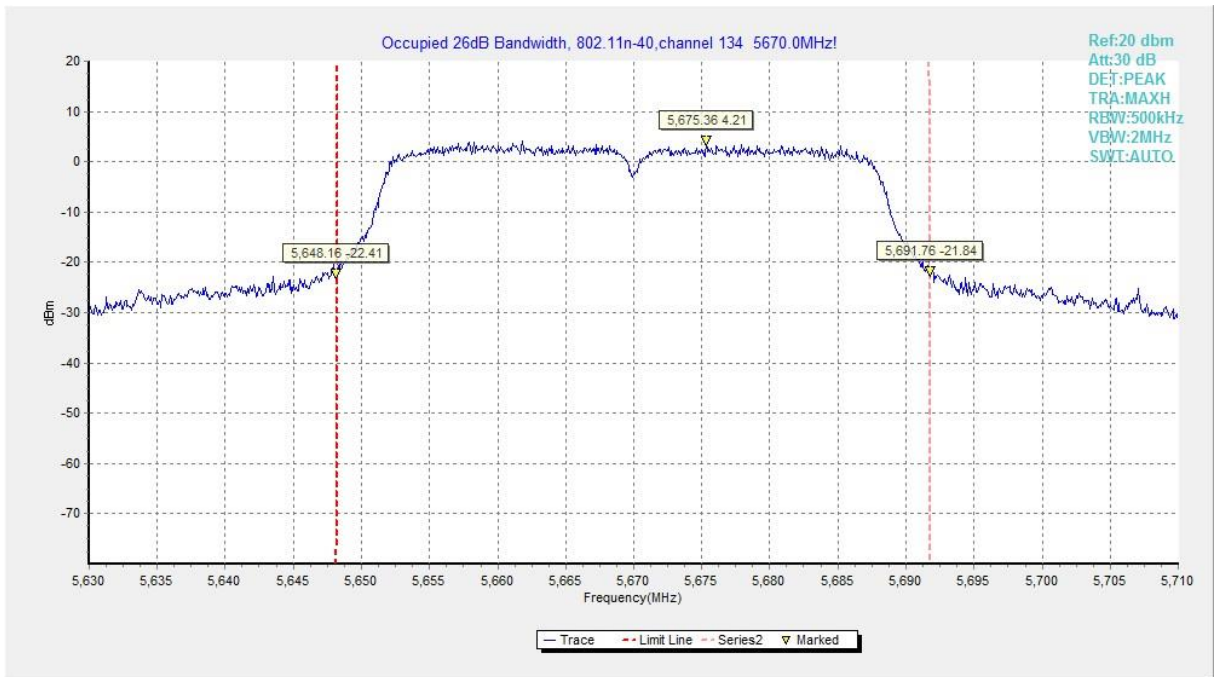


Fig. 34 Occupied 26dB Bandwidth (802. 11n-HT40, 5670MHz)

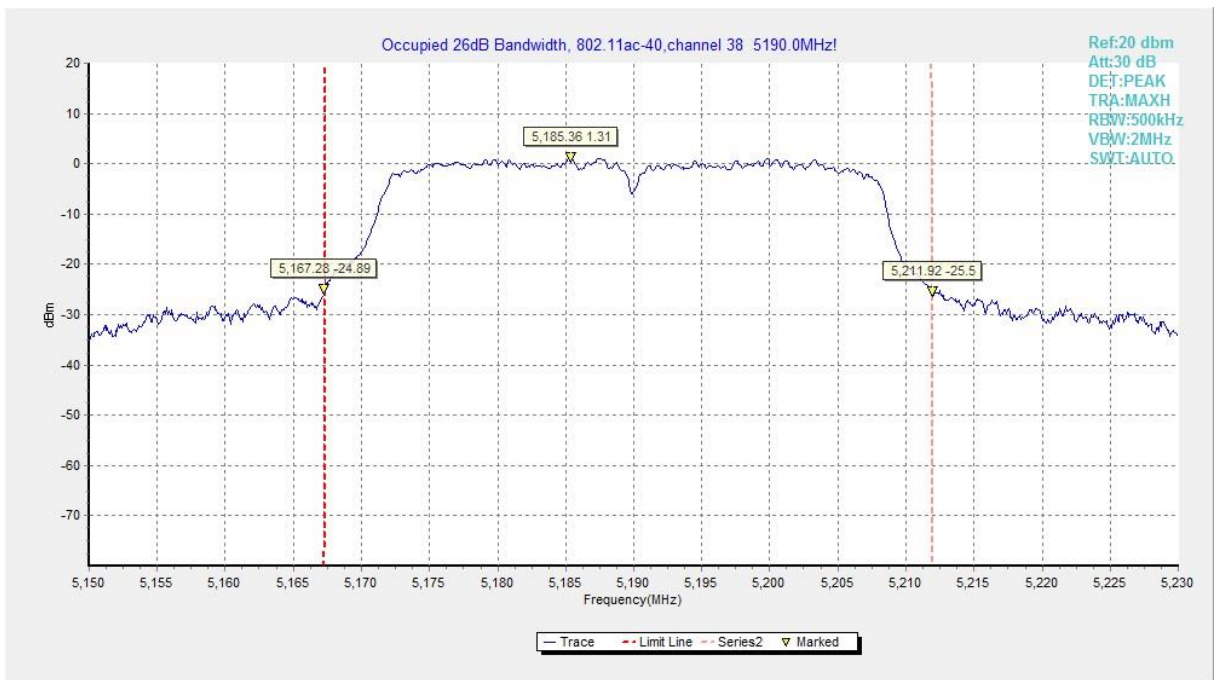


Fig. 35 Occupied 26dB Bandwidth (802.11ac-HT40, 5190MHz)

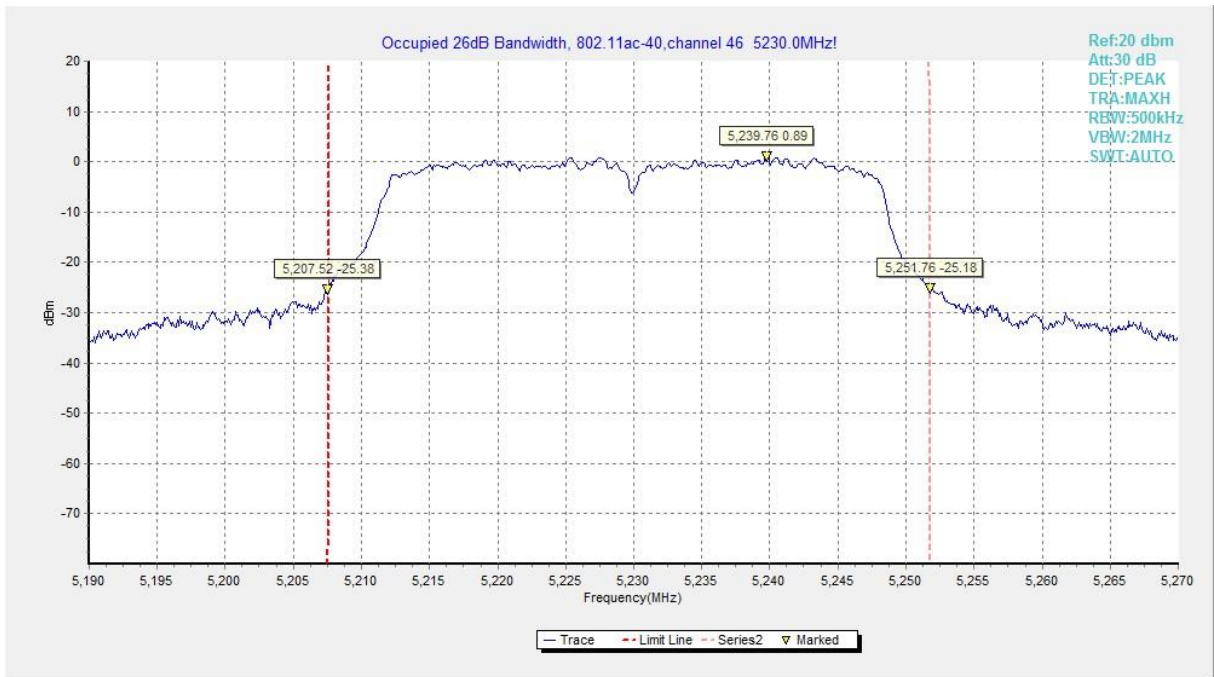


Fig. 36 Occupied 26dB Bandwidth (802.11ac-HT40, 5230MHz)

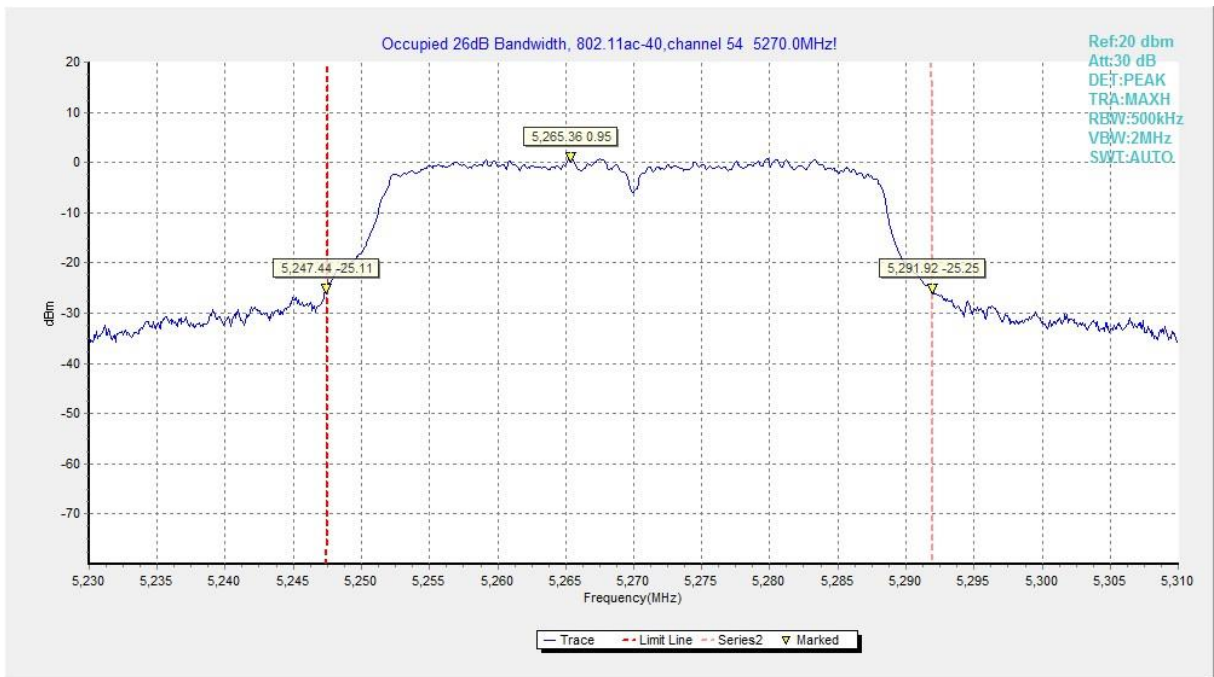


Fig. 37 Occupied 26dB Bandwidth (802.11ac-HT40, 5270MHz)

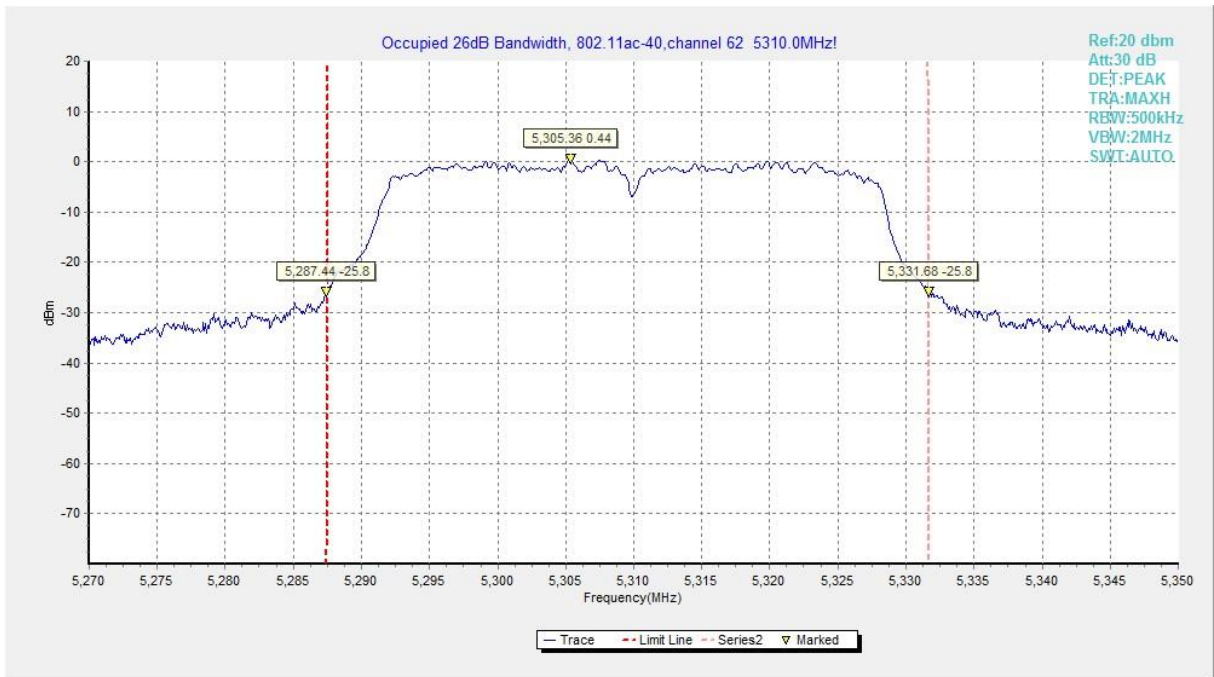


Fig. 38 Occupied 26dB Bandwidth (802.11ac-HT40, 5310MHz)

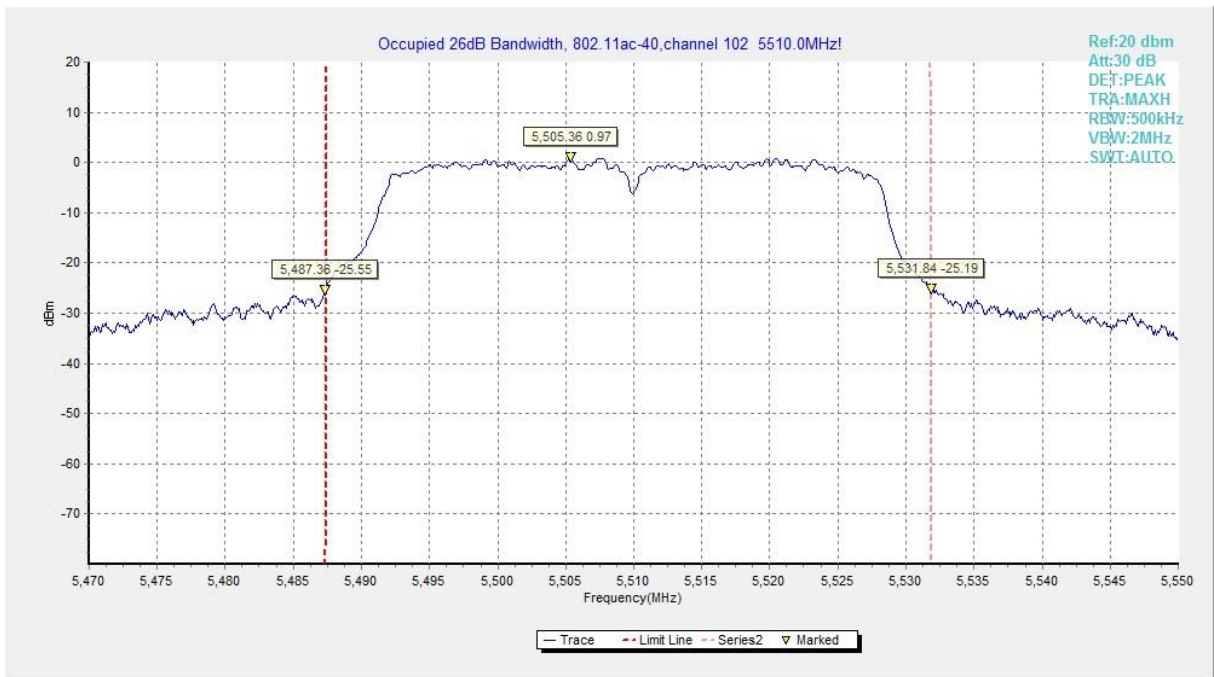


Fig. 39 Occupied 26dB Bandwidth (802.11ac-HT40, 5510MHz)

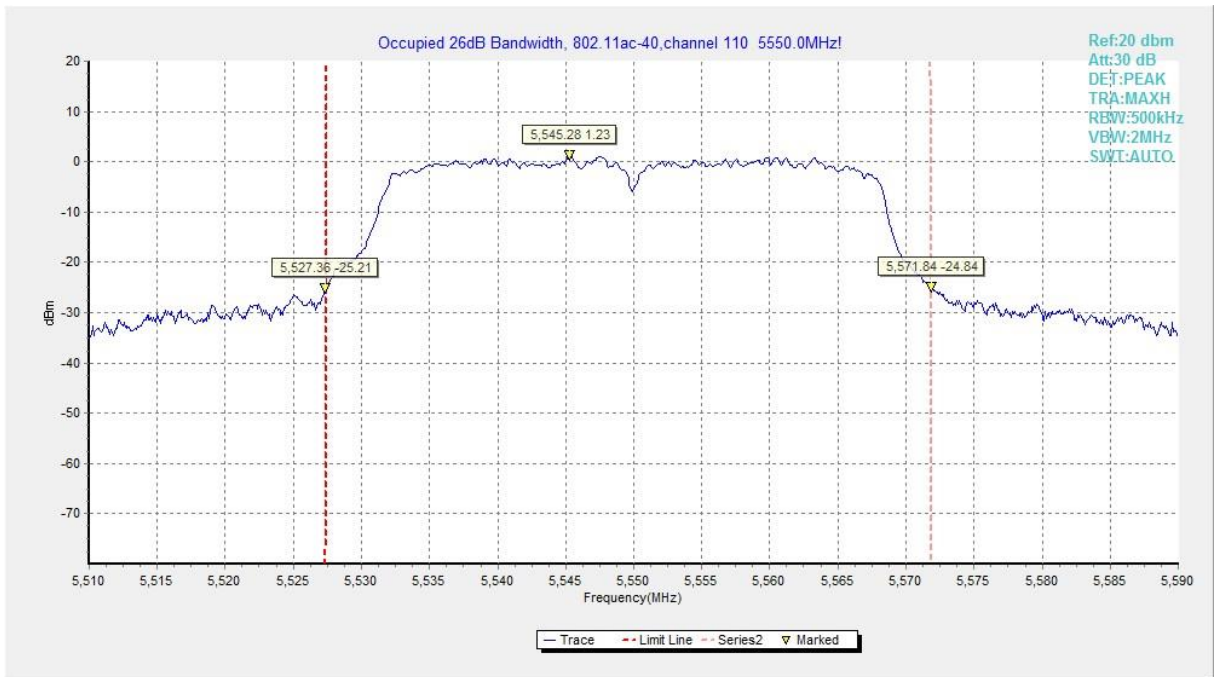


Fig. 40 Occupied 26dB Bandwidth (802.11ac-HT40, 5550MHz)

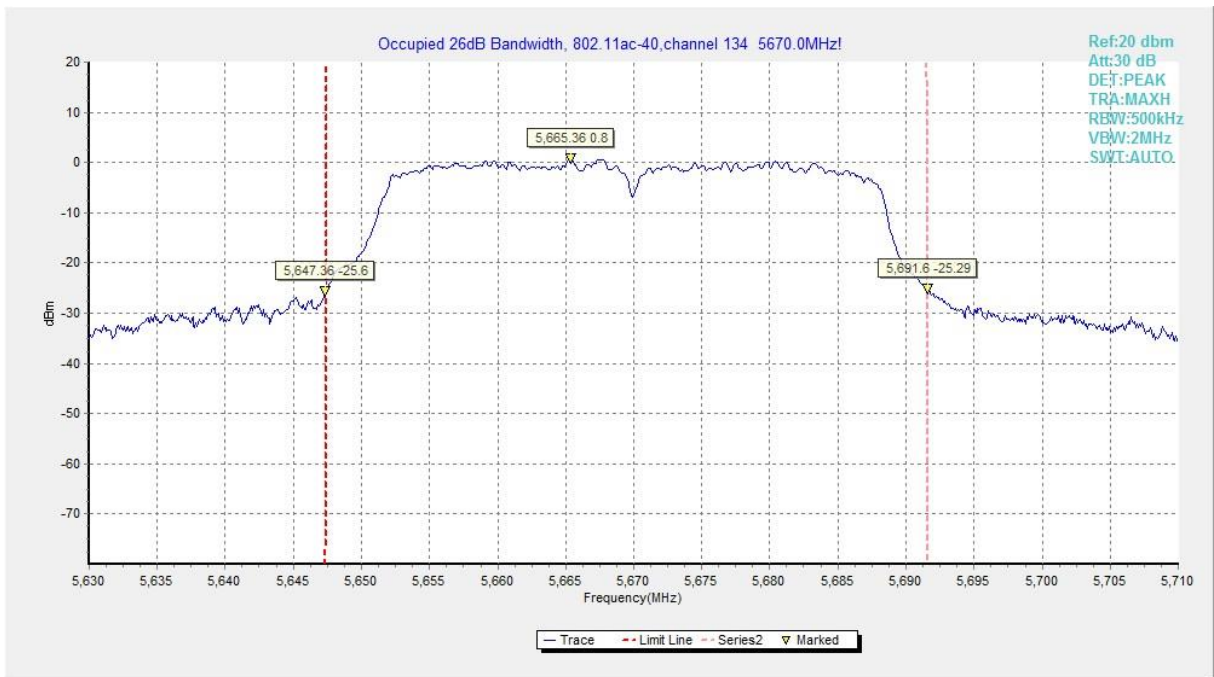


Fig. 41 Occupied 26dB Bandwidth (802.11ac-HT40, 5670MHz)

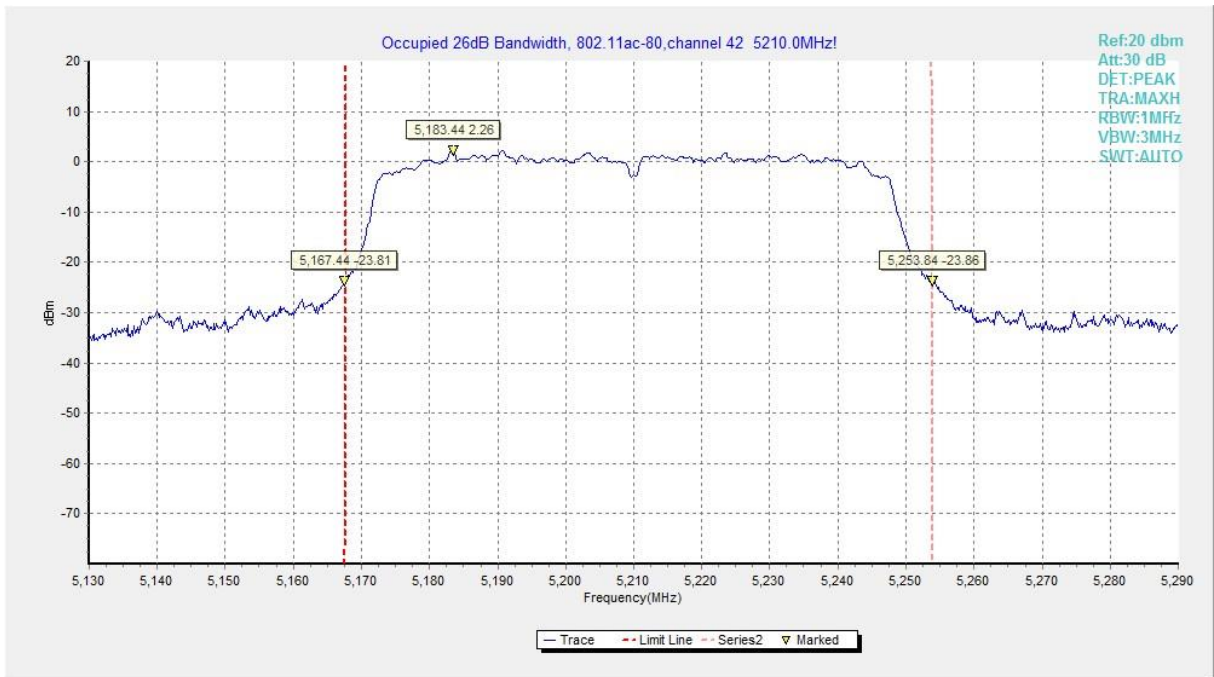


Fig. 42 Occupied 26dB Bandwidth (802. 11ac-HT80, 5210MHz)

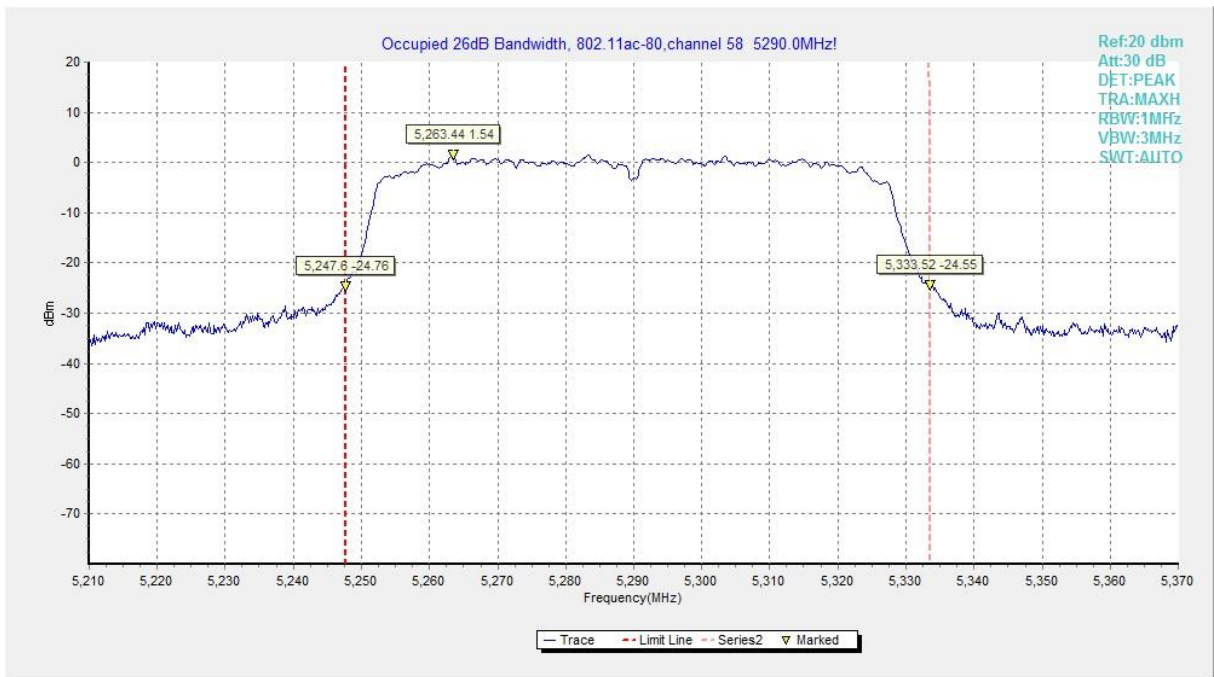


Fig. 43 Occupied 26dB Bandwidth (802. 11ac-HT80, 5290MHz)

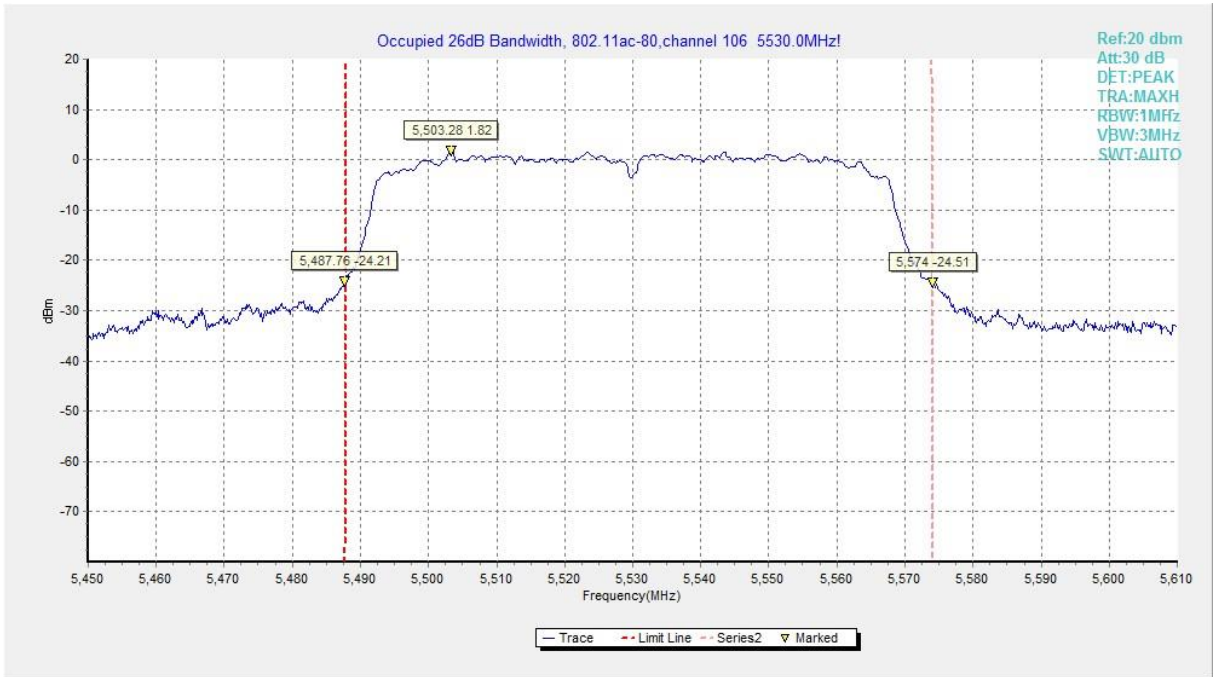


Fig. 44 Occupied 26dB Bandwidth (802.11ac-HT80, 5530MHz)

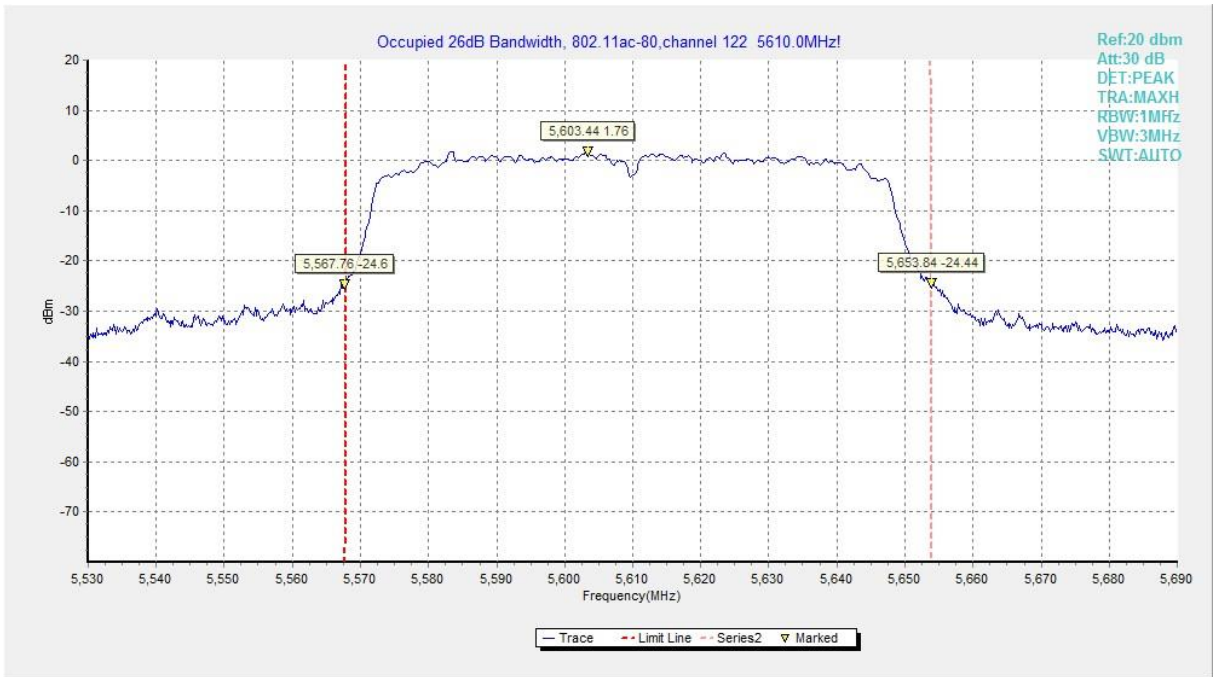


Fig. 45 Occupied 26dB Bandwidth (802.11ac-HT80, 5610MHz)

A.5. Band Edges Compliance

A5.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dB μ V/m)	
FCC 47 CFR Part 15.209	Peak	74
	Average	54

The measurement is made according to KDB 789033

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.46	P
	5320 MHz	Fig.47	P
	5500 MHz	Fig.48	P
	5700 MHz	Fig.49	P
802.11n HT20	5180 MHz	Fig.50	P
	5320 MHz	Fig.51	P
	5500 MHz	Fig.52	P
	5700 MHz	Fig.53	P
802.11n HT40	5190 MHz	Fig.54	P
	5310 MHz	Fig.55	P
	5510 MHz	Fig.56	P
	5670 MHz	Fig.57	P
802.11ac HT20	5180 MHz	Fig.58	P
	5320 MHz	Fig.59	P
	5500 MHz	Fig.60	P
	5700 MHz	Fig.61	P
802.11ac HT40	5190 MHz	Fig.62	P
	5310 MHz	Fig.63	P
	5510 MHz	Fig.64	P
	5670 MHz	Fig.65	P
802.11ac HT80	5210 MHz	Fig.66	P
	5290 MHz	Fig.67	P
	5530 MHz	Fig.68	P

Conclusion: PASS

Test graphs as below:

RE - Power-5.125GHz-5.175GHz

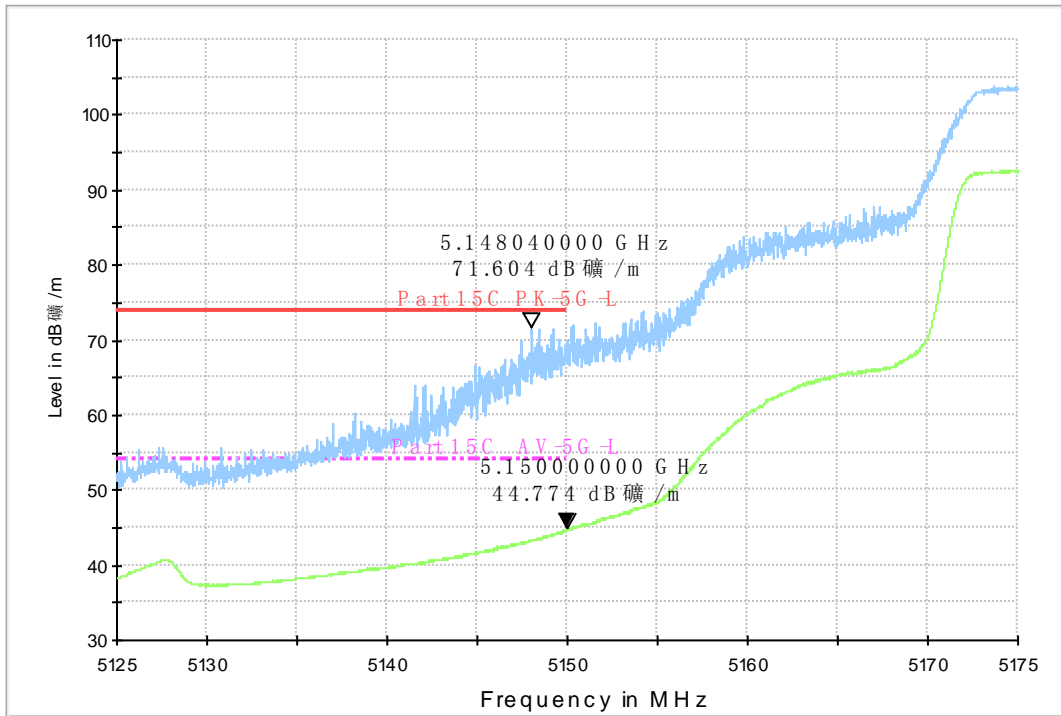


Fig. 46 Band Edges (802.11a, 5180MHz)

RE - Power-5.325GHz-5.375GHz

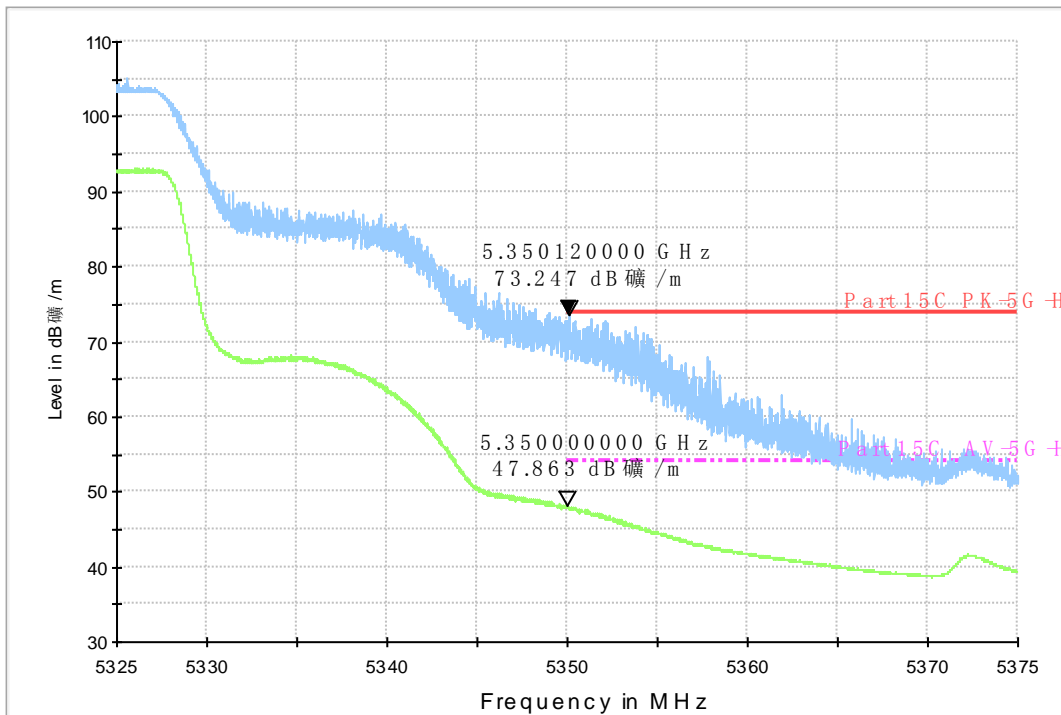


Fig. 47 Band Edges (802.11a, 5320MHz)

RE - Power-5.45GHz-5.50GHz

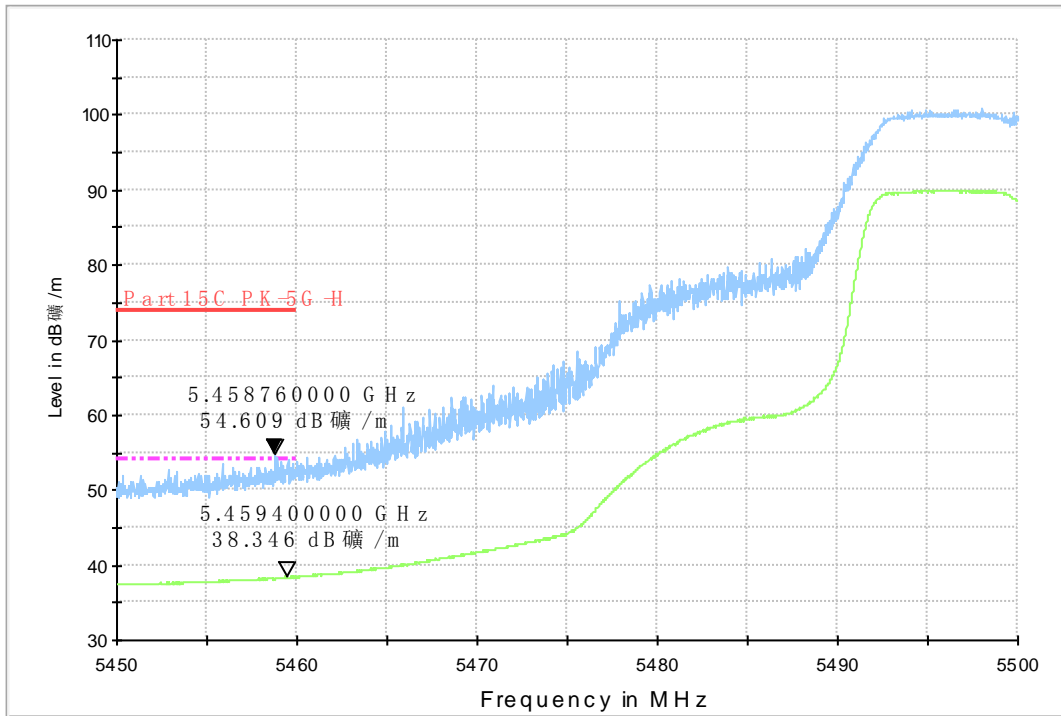


Fig. 48 Band Edges (802.11a, 5500MHz)

RE - Power-5.70GHz-5.75GHz

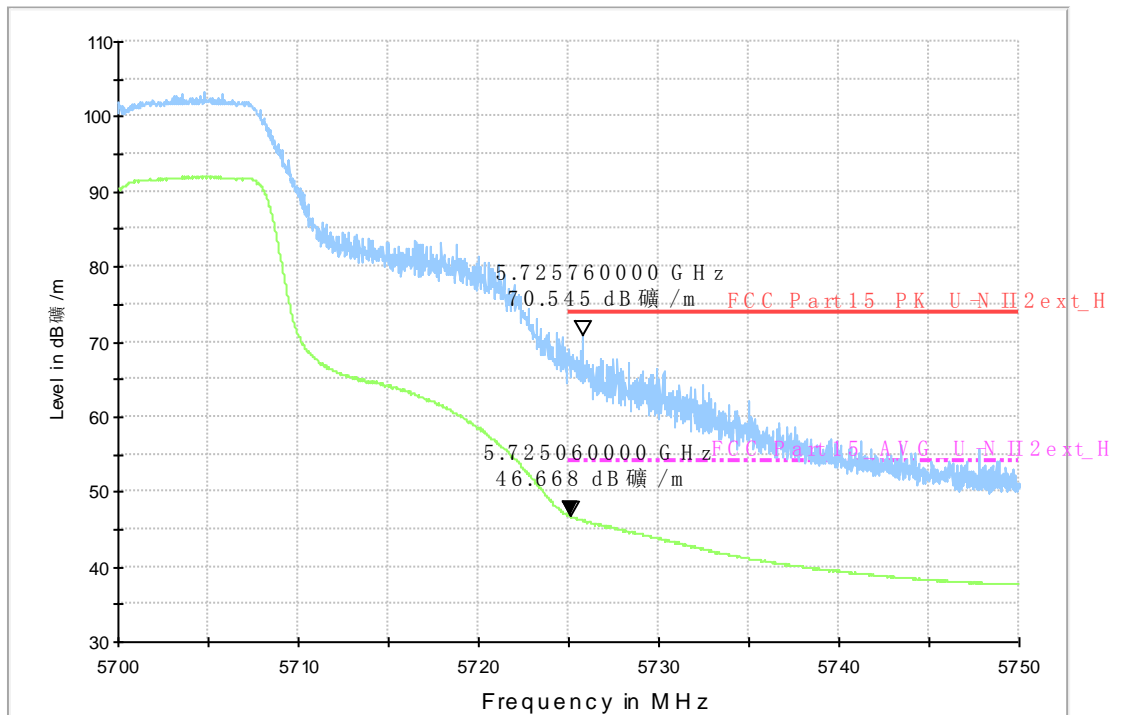


Fig. 49 Band Edges (802.11a, 5700MHz)

RE - Power-5.125GHz-5.175GHz

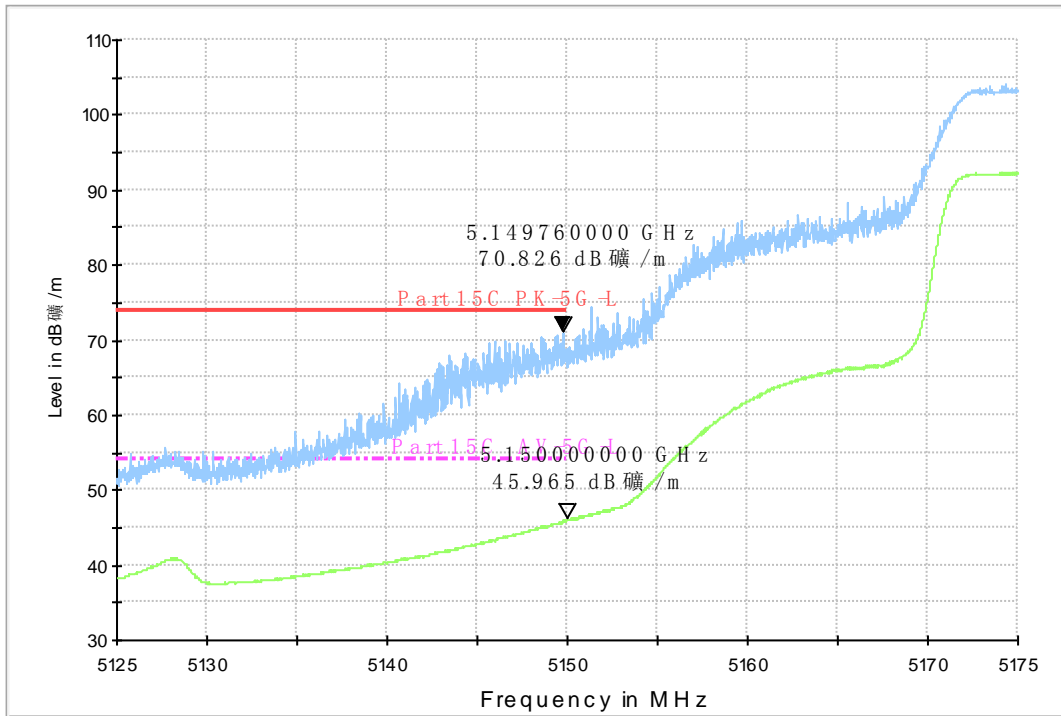


Fig. 50 Band Edges (802.11n-HT20, 5180MHz)

RE - Power-5.325GHz-5.375GHz

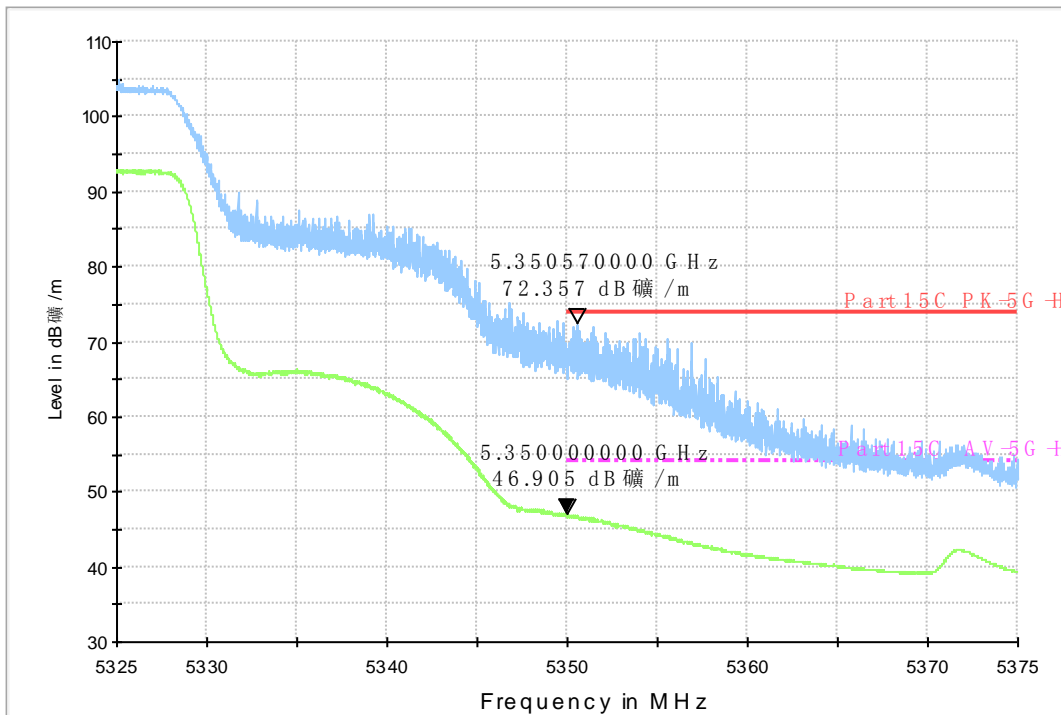


Fig. 51 Band Edges (802.11n-HT20, 5320MHz)

RE - Power-5.45GHz-5.50GHz

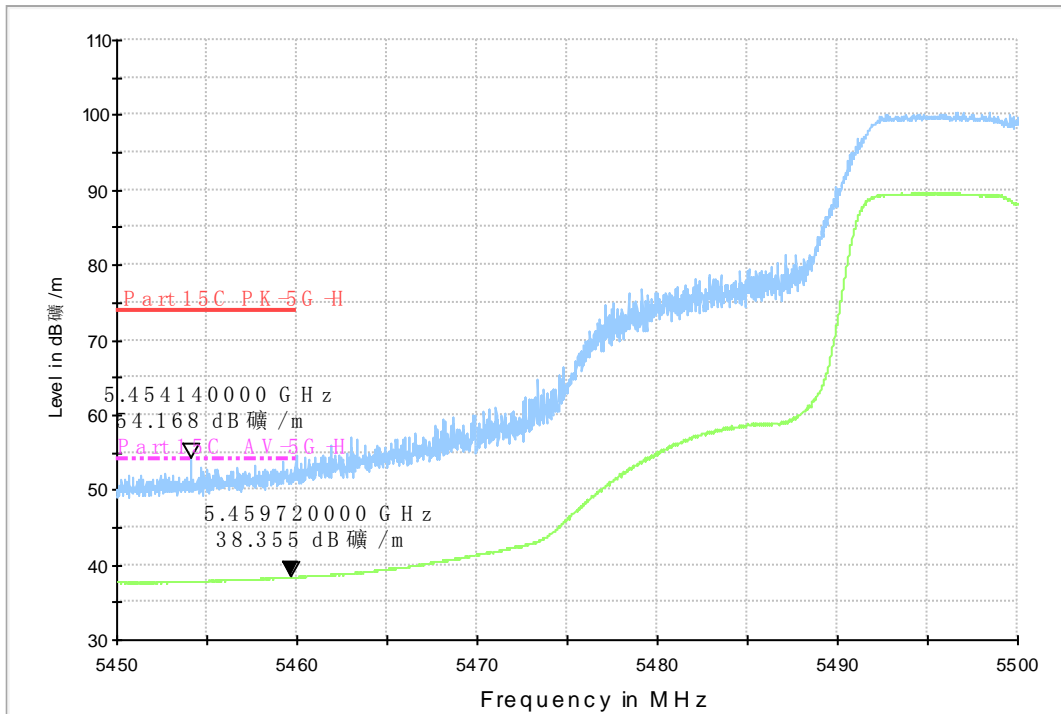


Fig. 52 Band Edges (802.11n-HT20, 5500MHz)

RE - Power-5.70GHz-5.75GHz

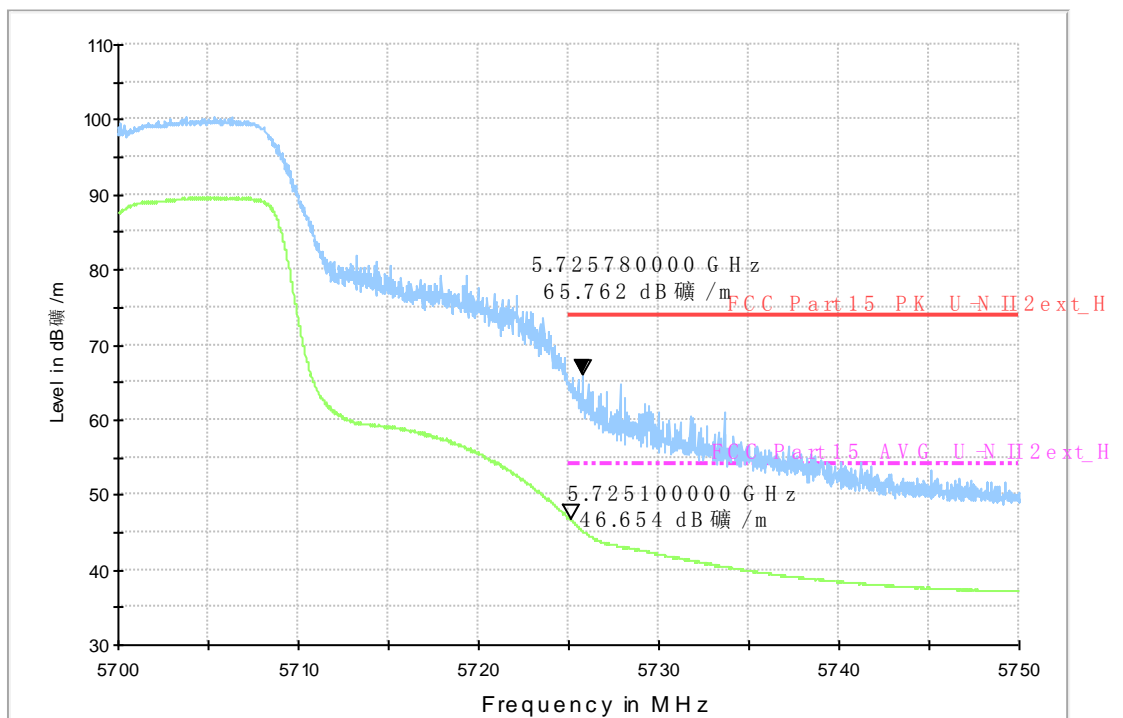


Fig. 53 Band Edges (802.11n-HT20, 5700MHz)

RE - Power-5.125GHz-5.175GHz

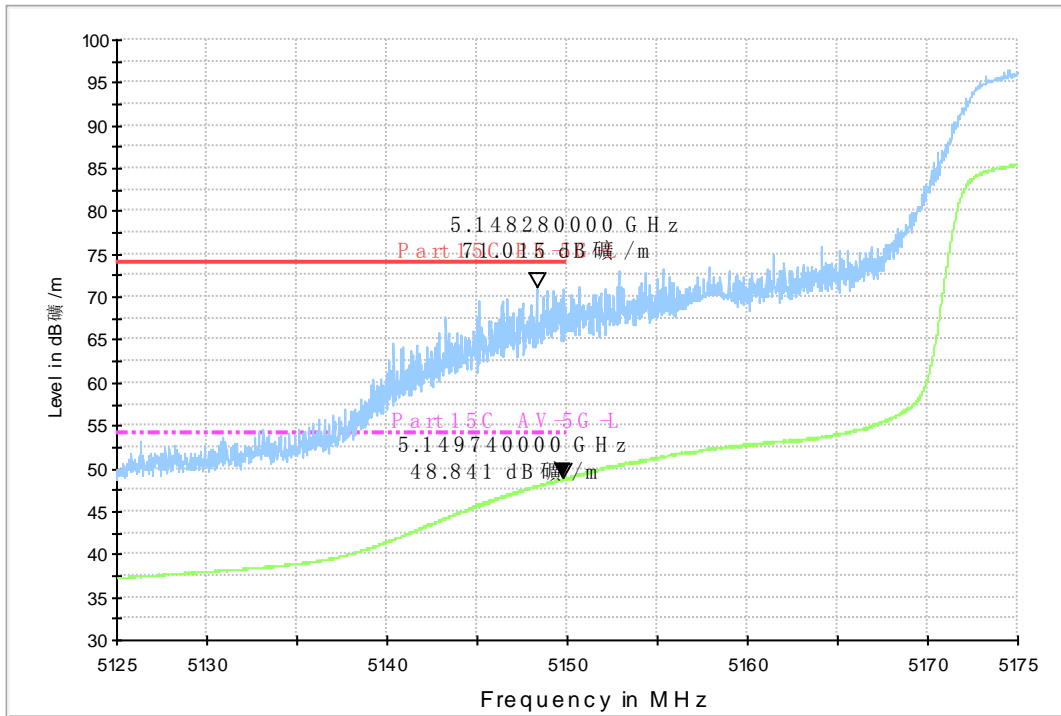


Fig. 54 Band Edges (802.11n-HT40, 5190MHz)

RE - Power-5.325GHz-5.375GHz

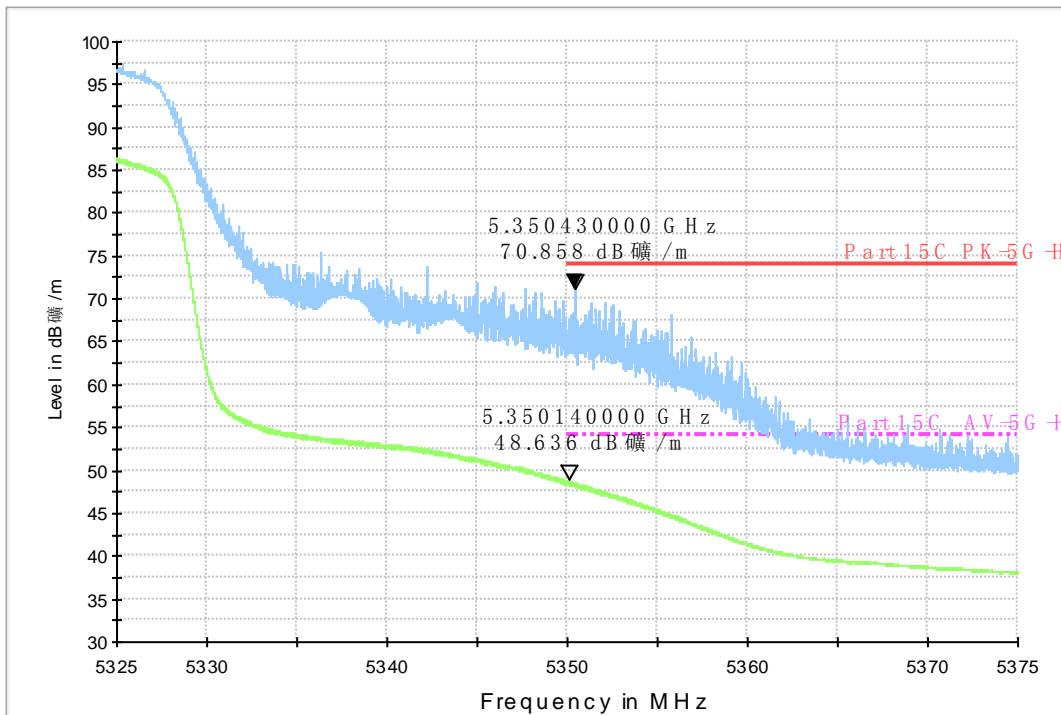


Fig. 55 Band Edges (802.11n-HT40, 5310MHz)

RE - Power-5.45GHz-5.50GHz

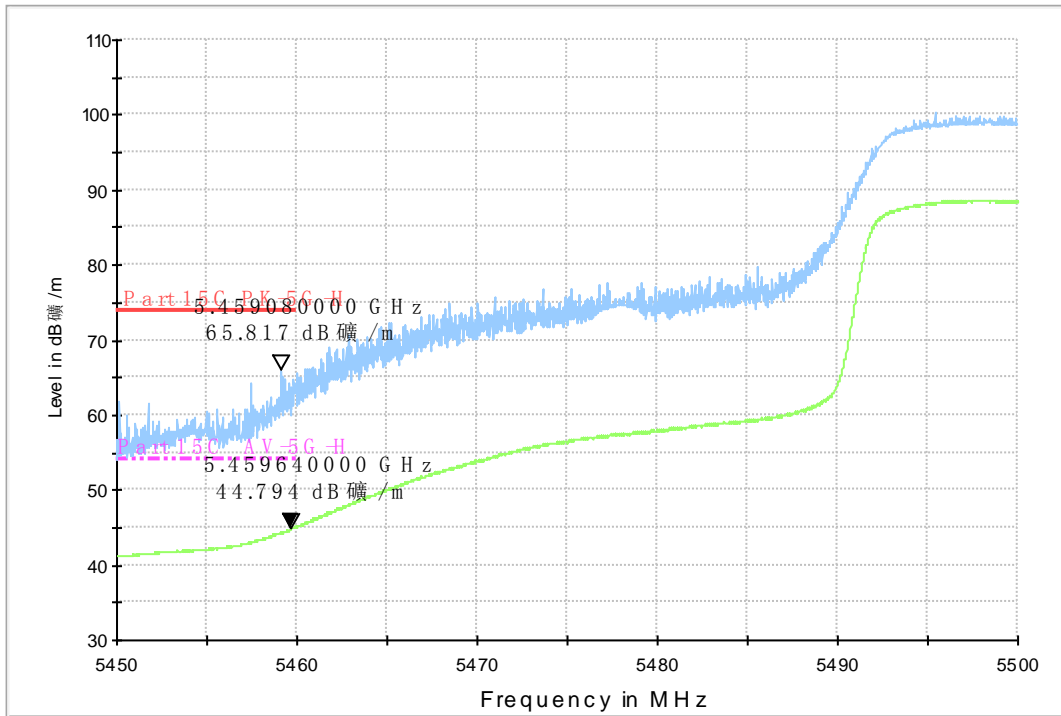


Fig. 56 Band Edges (802.11n-HT40, 5510MHz)

RE - Power-5.70GHz-5.75GHz

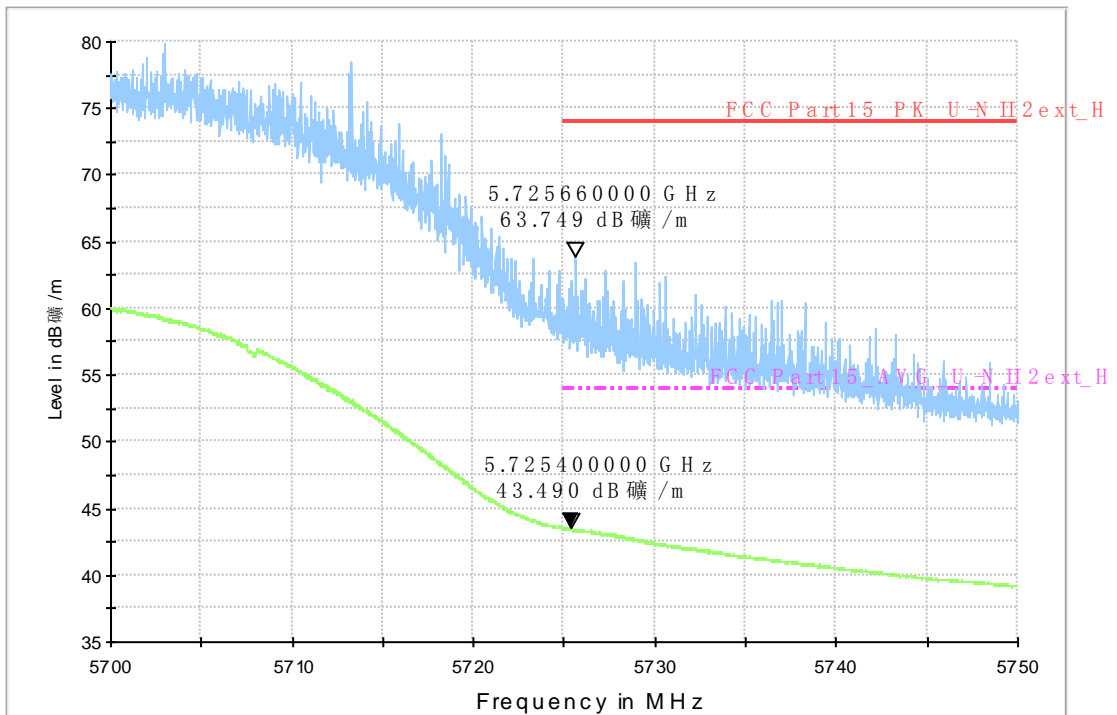


Fig. 57 Band Edges (802.11n-HT40, 5670MHz)