



**FCC PART 15C  
TEST REPORT  
No. I18Z60272-IOT05**

**for**

**TCL Communication Ltd.**

**GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile phone**

**BBE100-2**

**with**

**FCC ID: 2ACCJN024**

**Hardware Version: 04**

**Software Version: V6R13-6**

**Issued Date: 2018-06-12**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18Z60272-IOT05	Rev.0	1st edition	2018-06-12

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY .....</b>	<b>7</b>
1.1. TESTING LOCATION .....	7
<b>1.2. TESTINGENVIRONMENT .....</b>	<b>7</b>
1.3. PROJECT DATA .....	7
1.4. SIGNATURE .....	7
<b>2. CLIENT INFORMATION .....</b>	<b>8</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>8</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>8</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) .....</b>	<b>9</b>
3.1. ABOUT EUT .....	9
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	9
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	9
3.4. GENERAL DESCRIPTION .....	10
3.5. EUT SET-UPS .....	10
<b>4. EFERENCE DOCUMENTS .....</b>	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	10
4.2. REFERENCE DOCUMENTS FOR TESTING .....	10
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>10</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
6.1. SUMMARY OF TEST RESULTS .....	11
6.2. STATEMENTS .....	11
6.3. TEST CONDITIONS .....	11
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>12</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
<b>8.1. TRANSMITTER OUTPUT POWER .....</b>	<b>13</b>
<b>8.2. PEAK POWER SPECTRAL DENSITY .....</b>	<b>13</b>
<b>8.3. OCCUPIED 6DB BANDWIDTH .....</b>	<b>13</b>
<b>8.4. BAND EDGES COMPLIANCE .....</b>	<b>13</b>
<b>8.5. SPURIOUS EMISSIONS .....</b>	<b>13</b>
<b>8.6. AC POWER-LINE CONDUCTED EMISSION .....</b>	<b>13</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>14</b>
A.1. MEASUREMENT METHOD .....	14

A.2. MAXIMUM PEAK OUTPUT POWER .....	15
A.2.1 ANTENNA GAIN .....	15
A.2.2. MAXIMUM PEAK OUTPUT POWER-CONDUCTED .....	15
A.2.3. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	17
A.3. PEAK POWER SPECTRAL DENSITY .....	19
A.4. OCCUPIED 6dB BANDWIDTH .....	20
FIG. 1 OCCUPIED 6dB BANDWIDTH (802.11A, CH 149).....	21
FIG. 2 OCCUPIED 6dB BANDWIDTH (802.11A, CH 157).....	21
FIG. 3 OCCUPIED 6dB BANDWIDTH (802.11A, CH 165).....	22
FIG. 4 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 149) .....	22
FIG. 5 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 157) .....	23
FIG. 6 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 165) .....	23
FIG. 7 OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 149) .....	24
FIG. 8 OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 157).....	24
FIG. 9 OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 165).....	25
FIG. 10 OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 151).....	25
FIG. 11 OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 159).....	26
FIG. 12 OCCUPIED 6dB BANDWIDTH (802.11AC-HT40, CH 151).....	26
FIG. 13 OCCUPIED 6dB BANDWIDTH (802.11AC-HT40, CH 159).....	27
FIG. 14 OCCUPIED 6dB BANDWIDTH (802.11AC-HT80, CH 155).....	27
A.5. TRANSMITTER SPURIOUS EMISSION .....	28
A.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	28
FIG. 15 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 30 MHz-1 GHz).....	30
FIG. 16 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 1 GHz -12 GHz).....	31
FIG. 17 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 12 GHz-25 GHz) .....	31
FIG. 18 CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 25 GHz-40 GHz) .....	32
FIG. 19 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 30 MHz-1 GHz).....	32
FIG. 20 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 1 GHz -12 GHz).....	33
FIG. 21 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 12 GHz-25 GHz) .....	33
FIG. 22 CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 25 GHz-40 GHz) .....	34
FIG. 23 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 30 MHz-1 GHz).....	34
FIG. 24 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 1 GHz -12 GHz).....	35
FIG. 25 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 12 GHz-25 GHz) .....	35
FIG. 26 CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 25 GHz-40 GHz) .....	36
FIG. 27 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 30 MHz-1 GHz) .....	36
FIG. 28 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 1 GHz -12 GHz) .....	37
FIG. 29 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 12 GHz-25 GHz).....	37
FIG. 30 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 25 GHz-40 GHz).....	38
FIG. 31 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 30 MHz-1 GHz) .....	38
FIG. 32 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 1 GHz -12 GHz) .....	39
FIG. 33 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 12 GHz-25 GHz).....	39
FIG. 34 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 25 GHz-40 GHz).....	40
FIG. 35 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 30 MHz-1 GHz) .....	40
FIG. 36 CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 1 GHz -12 GHz).....	41

FIG. 37	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 12 GHz-25 GHz).....	41
FIG. 38	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 25 GHz-40 GHz).....	42
FIG. 39	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 30 MHz-1 GHz).....	42
FIG. 40	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 1 GHz -12 GHz).....	43
FIG. 41	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 12 GHz-25 GHz).....	43
FIG. 42	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 25 GHz-40 GHz).....	44
FIG. 43	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 30 MHz-1 GHz).....	44
FIG. 44	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 1 GHz -12 GHz).....	45
FIG. 45	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 12 GHz-25 GHz).....	45
FIG. 46	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 25 GHz-40 GHz).....	46
FIG. 47	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 30 MHz-1 GHz).....	46
FIG. 48	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 1 GHz -12 GHz).....	47
FIG. 49	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 12 GHz-25 GHz).....	47
FIG. 50	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 25 GHz-40 GHz).....	48
FIG. 51	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 30 MHz-1 GHz).....	48
FIG. 52	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 1 GHz -12 GHz).....	49
FIG. 53	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 12 GHz-25 GHz).....	49
FIG. 54	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 25 GHz-40 GHz).....	50
FIG. 55	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 30 MHz-1 GHz).....	50
FIG. 56	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 1 GHz -12 GHz).....	51
FIG. 57	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 12 GHz-25 GHz).....	51
FIG. 58	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 25 GHz-40 GHz).....	52
FIG. 59	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 30 MHz-1 GHz).....	52
FIG. 60	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 1 GHz -12 GHz).....	53
FIG. 61	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 12 GHz-25 GHz).....	53
FIG. 62	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 25 GHz-40 GHz).....	54
FIG. 63	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 30 MHz-1 GHz).....	54
FIG. 64	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 1 GHz -12 GHz).....	55
FIG. 65	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 12 GHz-25 GHz).....	55
FIG. 66	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 25 GHz-40 GHz).....	56
FIG. 67	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 30 MHz-1 GHz).....	56
FIG. 68	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 1 GHz -12 GHz).....	57
FIG. 69	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 12 GHz-25 GHz).....	57
FIG. 70	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 25 GHz-40 GHz).....	58
A.5.2	TRANSMITTER SPURIOUS EMISSION - RADIATED.....	59
A.6.	BAND EDGES COMPLIANCE.....	69
A6.1	BAND EDGES - CONDUCTED.....	69
FIG. 71	BAND EDGES (802.11A, 5745MHz).....	70
FIG. 72	BAND EDGES (802.11A, 5825MHz).....	70
FIG. 73	BAND EDGES (802.11N-HT20, 5745MHz).....	71
FIG. 74	BAND EDGES (802.11N-HT20, 5825MHz).....	71
FIG. 75	BAND EDGES (802.11AC-HT20, 5745MHz).....	72
FIG. 76	BAND EDGES (802.11AC-HT20, 5825MHz).....	72
FIG. 77	BAND EDGES (802.11N-HT40, 5755MHz).....	73

FIG. 78	BAND EDGES (802.11N-HT40, 5795MHZ).....	73
FIG. 79	BAND EDGES (802.11AC-HT40, 5755MHZ).....	74
FIG. 80	BAND EDGES (802.11AC-HT40, 5795MHZ).....	74
FIG. 81	BAND EDGES (802.11AC-HT80, 5775MHZ).....	75
FIG. 82	BAND EDGES (802.11AC-HT80, 5775MHZ).....	75
A6.2	BAND EDGES - RADIATED.....	76
FIG. 83	BAND EDGES (802.11A, 5745MHZ) .....	77
FIG. 84	BAND EDGES (802.11A, 5825MHZ) .....	77
FIG. 85	BAND EDGES (802.11N-HT20, 5745MHZ).....	78
FIG. 86	BAND EDGES (802.11N-HT20, 5825MHZ).....	78
FIG. 87	BAND EDGES (802.11N-HT40, 5755MHZ).....	79
FIG. 88	BAND EDGES (802.11N-HT40, 5795MHZ).....	79
FIG. 89	BAND EDGES (802.11AC-HT20, 5745MHZ).....	80
FIG. 90	BAND EDGES (802.11AC-HT20, 5825MHZ).....	80
FIG. 91	BAND EDGES (802.11AC-HT40, 5755MHZ).....	81
FIG. 92	BAND EDGES (802.11AC-HT40, 5795MHZ).....	81
FIG. 93	BAND EDGES (802.11AC-HT80, 5775MHZ).....	82
A.7.	AC POWERLINE CONDUCTED EMISSION.....	83
FIG. 94	AC POWERLINE CONDUCTED EMISSION-802.11A .....	84
FIG. 95	AC POWERLINE CONDUCTED EMISSION-IDLE.....	85
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>		<b>86</b>

## 1. TEST LATORATORY

### 1.1. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### 1.2. TestingEnvironment

Normal Temperature: 15-35°C

Extreme Temperature: -20/+55°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2018-05-04

Testing End Date: 2018-06-12


### 1.4. Signature



---

Jiang Xue


( Prepared this test report )



---

Zheng Wei

(Reviewed this test report)



---

Lv Songdong

(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,  
Address: Nanshan District, Shenzhen, Guangdong, P.R. China 518052  
Shenzhen, Guangdong  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Telephone: 0086-755-36611722  
Fax: 0086-75536612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,  
Address: Nanshan District, Shenzhen, Guangdong, P.R. China 518052  
Shenzhen, Guangdong  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Telephone: 0086-755-36611722  
Fax: 0086-75536612000-81722



### 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)

#### 3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile phone
Model name	BBE100-2
FCC ID	2ACCJN024
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	015138000009416	04	V6R13-6
EUT2	015138000010372	04	V6R13-6

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	USB Cable	/	/
AE5	Charger	/	NO TEST

##### AE1

Model	TLp029C1
Manufacturer	BYD
Capacitance	2900mAh
Nominal voltage	3.85V

##### AE2

Model	CBA0064AGBC1
Manufacturer	BYD
Length of cable	/

##### AE3

Model	CDA0000119CF
Manufacturer	LUXSHARE
Length of cable	/



AE4

Model CDA0000119C1  
 Manufacturer Juwei  
 Length of cable /

AE5

Model CBA0064AHBC1  
 Manufacturer BYD  
 Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

**3.4. General Description**

Equipment Under Test (EUT) is a GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile phone with integrated antenna. It consists of normal options: Battery and Charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

**3.5. EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.11	EUT5+ AE1+ AE2+ AE3	WIFI

**4. REFERENCE DOCUMENTS**

**4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

**4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2016
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

**5. LABORATORY ENVIRONMENT**

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
Transmitter Spurious Emission - Radiated < 30MHz	15.407, 15.209	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

## **7. TEST EQUIPMENTS UTILIZED**

### **Conducted test system**

<b>No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration date</b>	<b>Calibration Due date</b>
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2019-05-17
2	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2019-02-28
3	LISN	ENY216	101200	Rohde & Schwarz	1 year	2019-04-15
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### **Radiated emission test system**

<b>No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration Period</b>	<b>Calibration Due date</b>
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2018-12-30
2	BiLog Antenna	VULB9163	514	Schwarzbeck	3 years	2021-01-03
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2020-05-31
6	EMI Antenna	3117	00139065	ETS-Lindgren	3 Years	2020-11-15
7	Spectrum Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2018-07-22

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dBm/MHz,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dBm,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dBm)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dBm)
9kHz-30MHz	
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.86
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.26
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

### 8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.38dBm,k=2

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

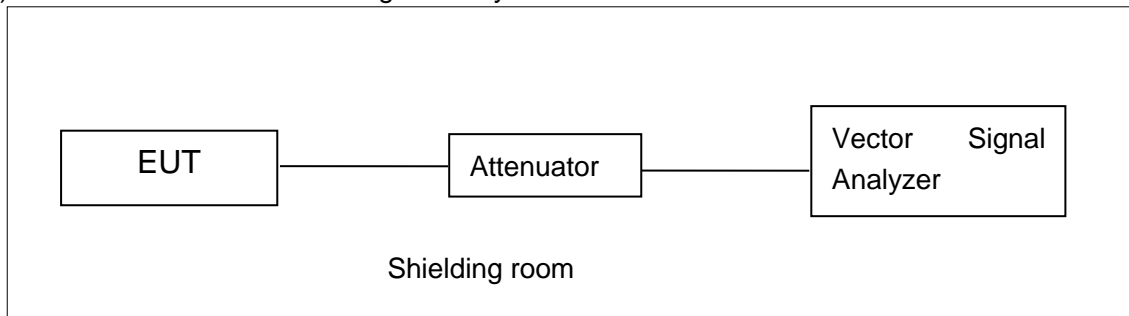


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

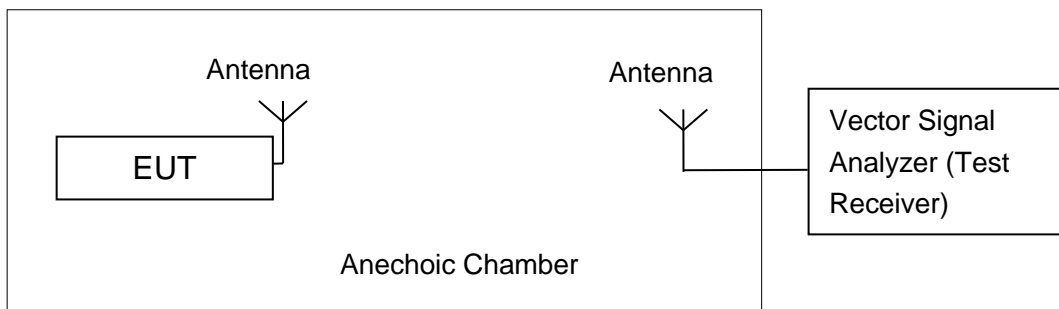

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## A.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

### A.2.1 Antenna Gain

Antenna gain is -0.15 dBi and the value is supplied by the applicant or manufacturer.

### A.2.2. Maximum Peak Output Power-conducted

#### Measurement Results:

#### 802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	23.07	/	/
	9	23.15	/	/
	12	22.96	/	/
	18	23.45	/	/
	24	23.97	/	/
	36	23.84	/	/
	48	23.92	/	/
	54	24.06	23.99	24.53

The data rate 54Mbps is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	21.79	/	/
	MCS1	21.61	/	/
	MCS2	22.40	/	/
	MCS3	22.60	/	/
	MCS4	22.48	/	/
	MCS5	22.63	/	/
	MCS6	22.69	22.75	23.45
	MCS7	22.53	/	/

The data rate MCS6 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	18.78	/	/
	MCS1	18.40	/	/
	MCS2	19.31	/	/
	MCS3	19.46	/	/
	MCS4	19.47	/	/
	MCS5	19.64	/	/
	MCS6	19.81	19.87	20.31
	MCS7	19.50	/	/
	MCS8	19.74	/	/

The data rate MCS6 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	22.35	/
	MCS1	21.87	/
	MCS2	21.93	/
	MCS3	22.34	/
	MCS4	23.24	/
	MCS5	23.50	23.63
	MCS6	23.38	/
	MCS7	23.13	/

The data rate MCS5 is selected as worse condition, and the following cases are performed with this condition.

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	19.27	/
	MCS1	18.85	/
	MCS2	18.83	/
	MCS3	19.20	/
	MCS4	20.05	/
	MCS5	20.28	20.52
	MCS6	20.14	/
	MCS7	19.98	/
	MCS8	20.10	/



	MCS9	20.08	/
--	------	-------	---

The data rate MCS5 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT80 mode**

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	19.45
	MCS1	18.78
	MCS2	19.10
	MCS3	19.59
	MCS4	19.41
	MCS5	19.76
	MCS6	19.56
	MCS7	19.95
	MCS8	19.70
	MCS9	19.63

The data rate MCS7 is selected as worse condition, and the following cases are performed with this condition.

**Conclusion: PASS**

**A.2.3. Maximum Average Output Power-Conducted**

**Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1**

**802.11a mode**

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	15.39	16.23	17.37

**802.11n-HT20 mode**

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	13.71	13.79	14.36

**802.11ac-HT20 mode**

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11ac(20MHz)	10.64	10.71	11.35

**802.11n-HT40 mode**

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)



802.11n(40MHz)	13.38	13.66
----------------	-------	-------

**802.11ac-HT40 mode**

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11ac(40MHz)	10.24	10.55

**802.11ac-HT80 mode**

Mode	Test Result (dBm)
	5775MHz (Ch155)
802.11ac(80MHz)	9.88

**Conclusion: PASS**

### A.3. Peak Power Spectral Density

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

**Measurement Uncertainty:**

Measurement Uncertainty	0.75dB
-------------------------	--------

**Measurement Results:**

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	4.60	P
	157	4.76	P
	165	4.95	P
802.11n HT20	149	3.21	P
	157	3.29	P
	165	3.66	P
802.11ac HT20	149	-0.72	P
	157	0.23	P
	165	0.91	P
802.11n HT40	151	-0.17	P
	159	0.15	P
802.11ac HT40	151	-3.30	P
	159	-3.28	P
802.11ac HT80	155	-5.74	P

**Conclusion: PASS**

#### A.4. Occupied 6dB Bandwidth

##### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

##### Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------

##### Measurement Result:


Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11a	149	Fig.1	16.25	P
	157	Fig.2	16.35	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	16.00	P
	157	Fig.5	16.15	P
	165	Fig.6	17.70	P
802.11ac HT20	149	Fig.7	17.70	P
	157	Fig.8	17.70	P
	165	Fig.9	15.70	P
802.11n HT40	151	Fig.10	36.48	P
	159	Fig.11	35.76	P
802.11ac HT40	151	Fig.12	35.92	P
	159	Fig.13	35.76	P
802.11ac HT80	155	Fig.14	75.20	P

**Conclusion: PASS**


Test graphs as below:

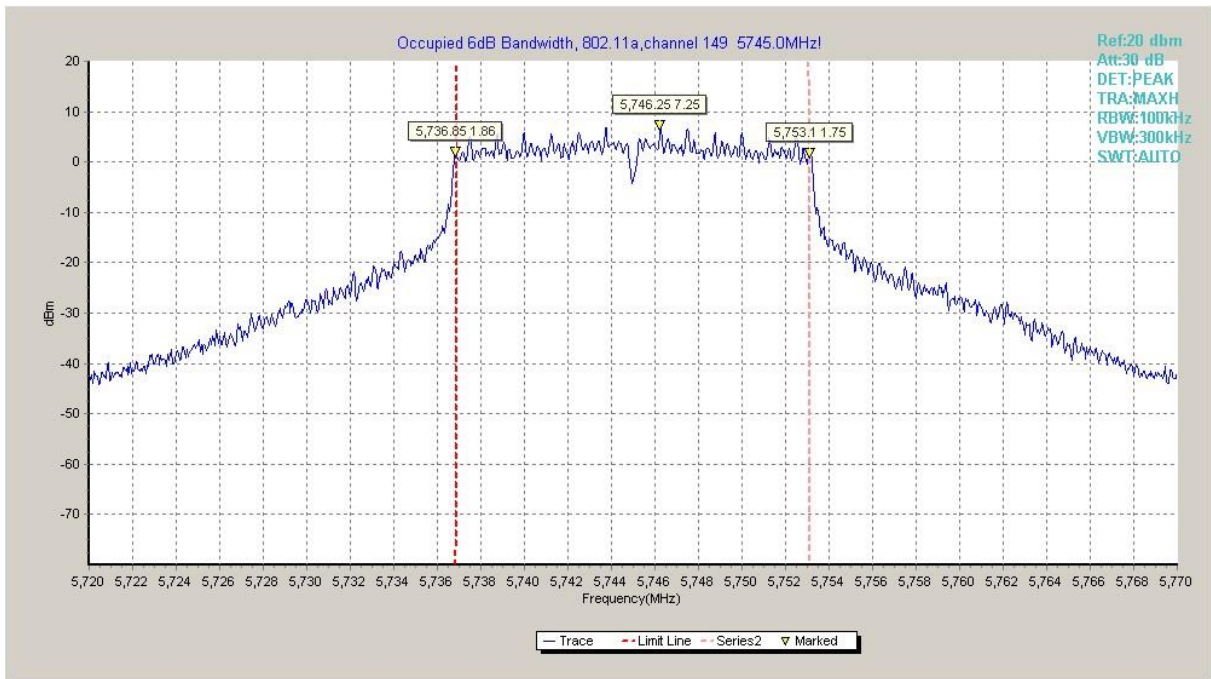


**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

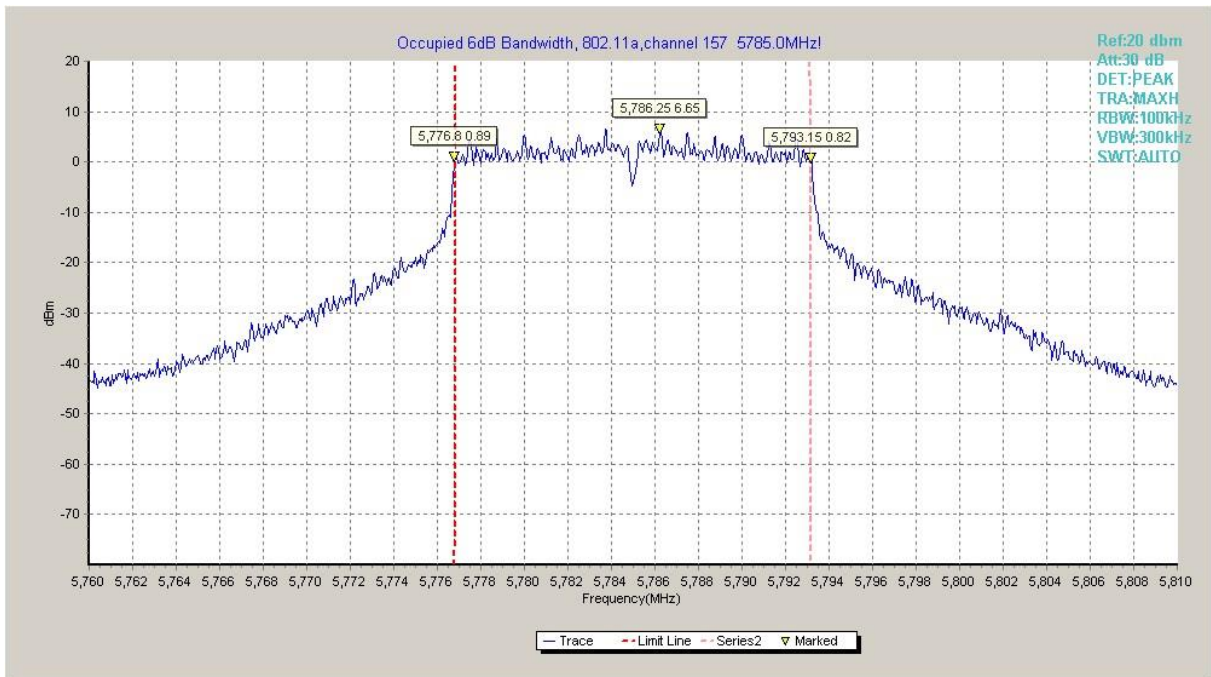

**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

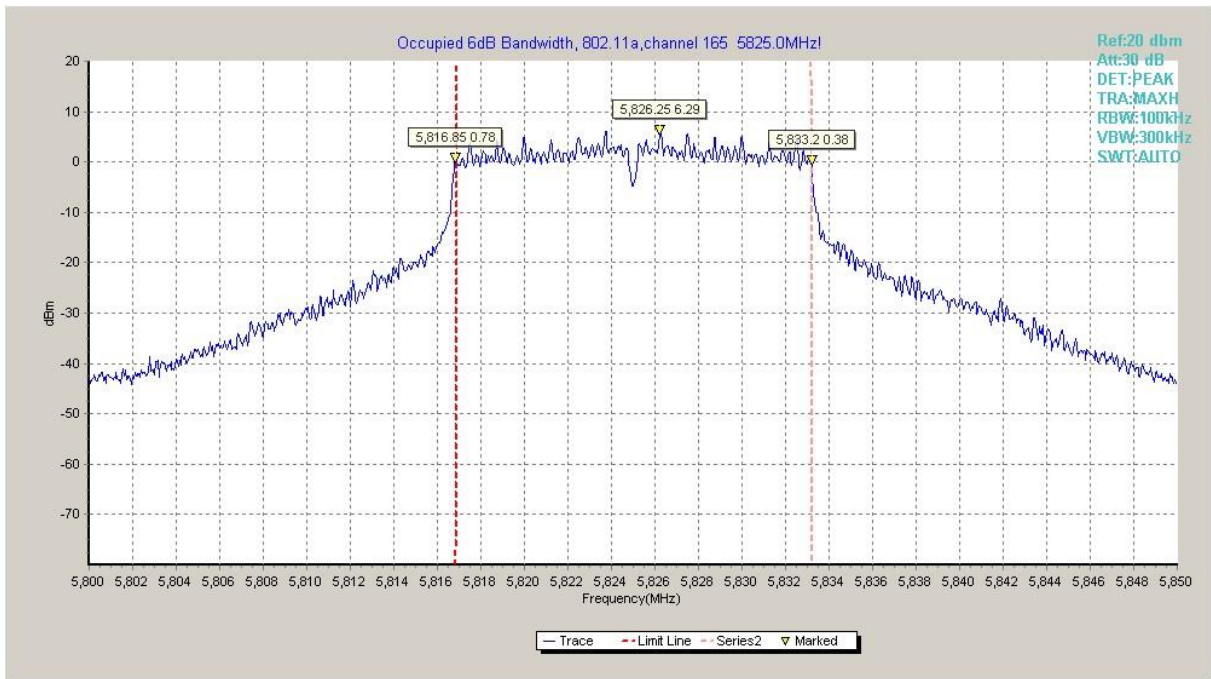

**Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)**

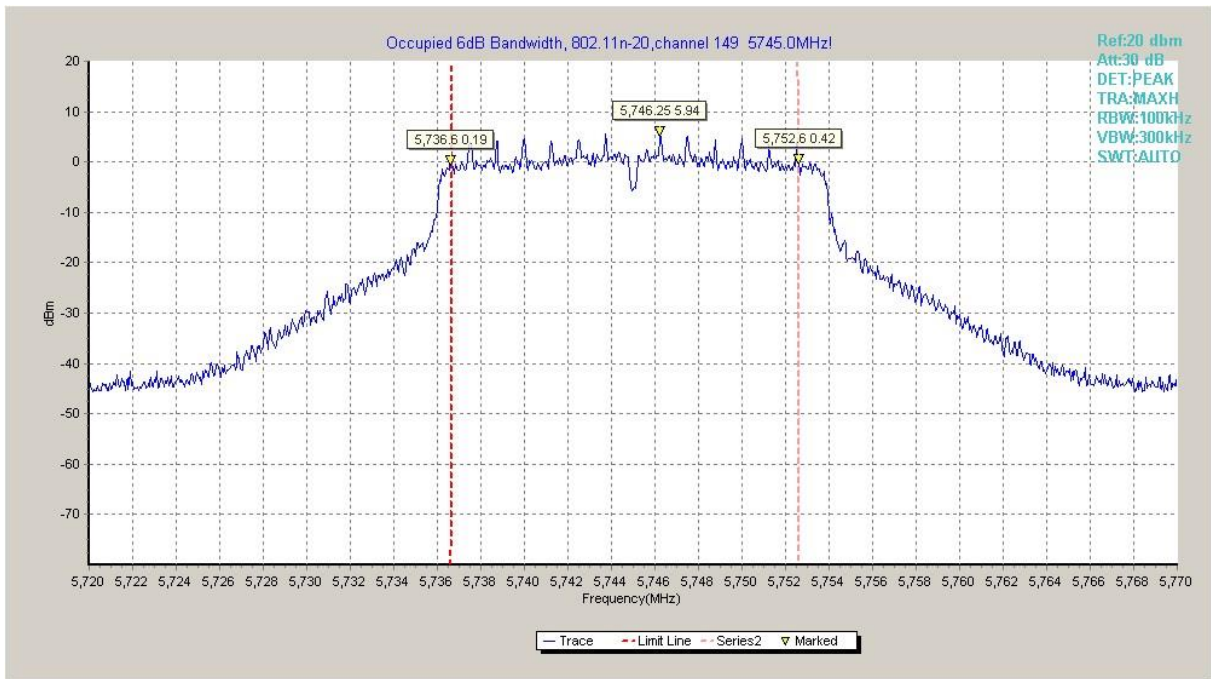

**Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)**

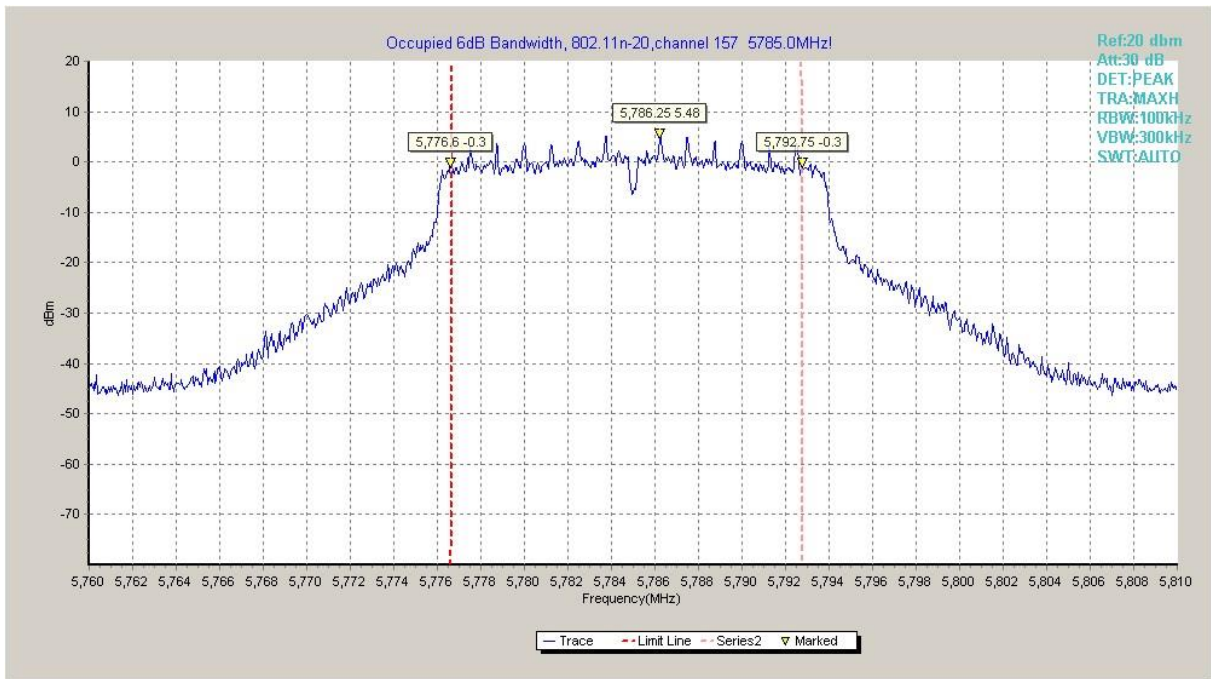


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)



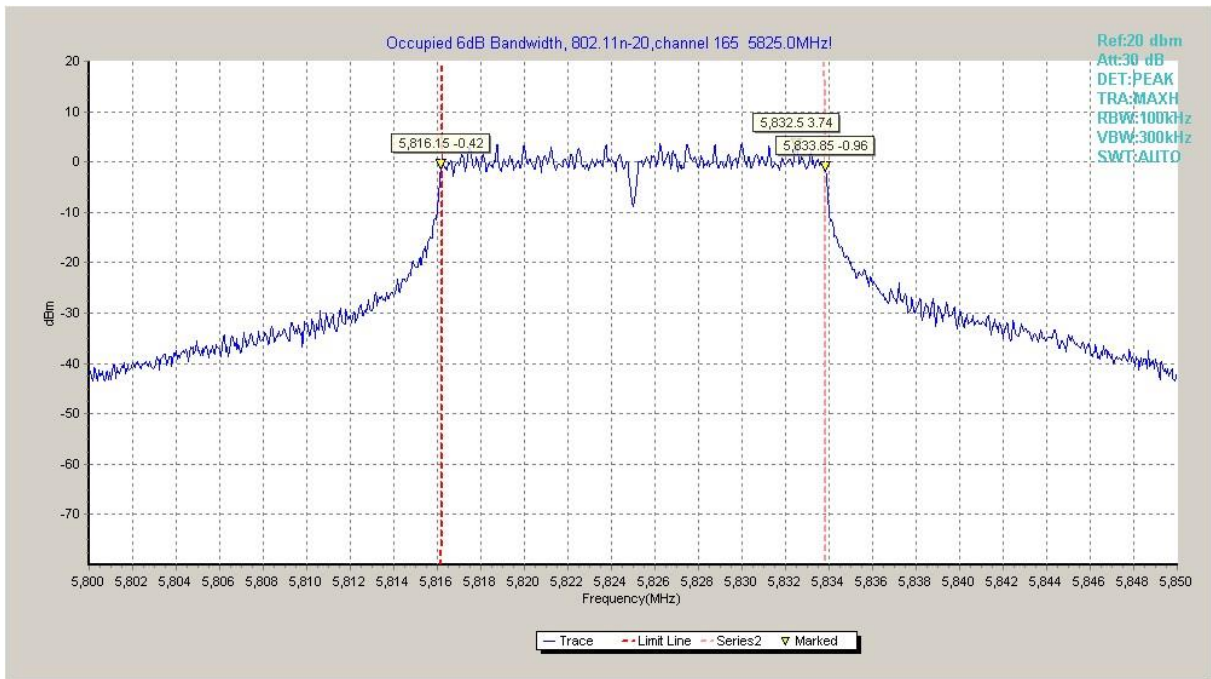


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

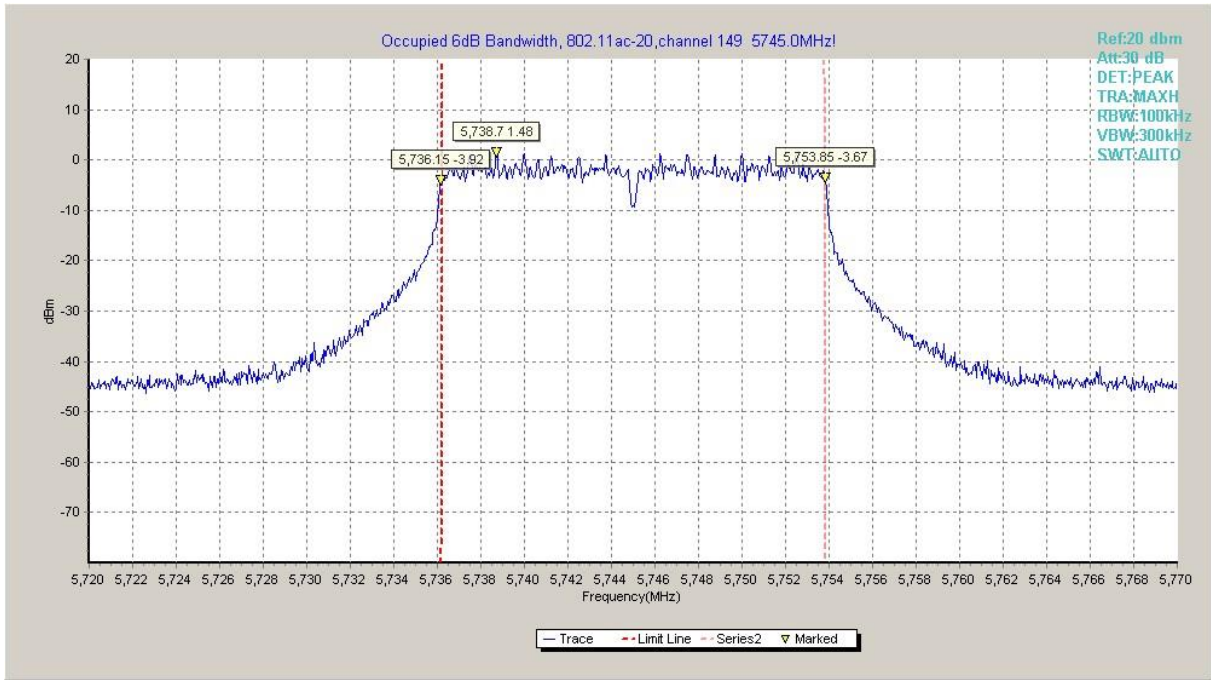


**Fig. 7 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 149)**

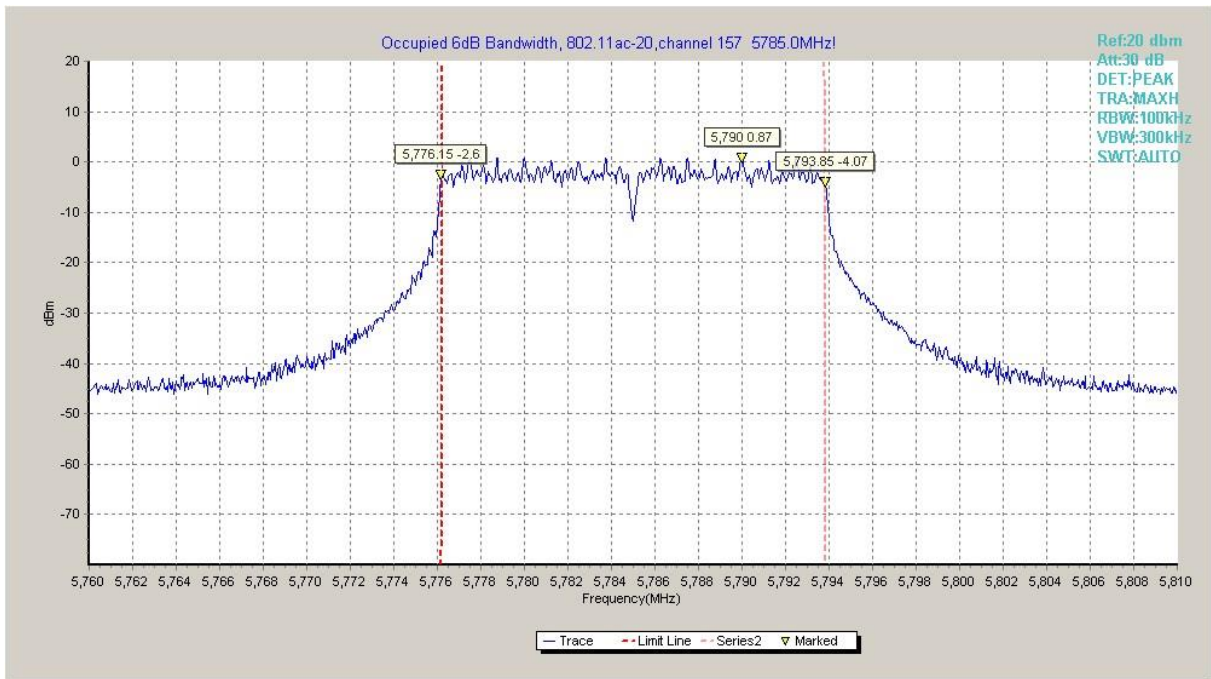


**Fig. 8 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 157)**




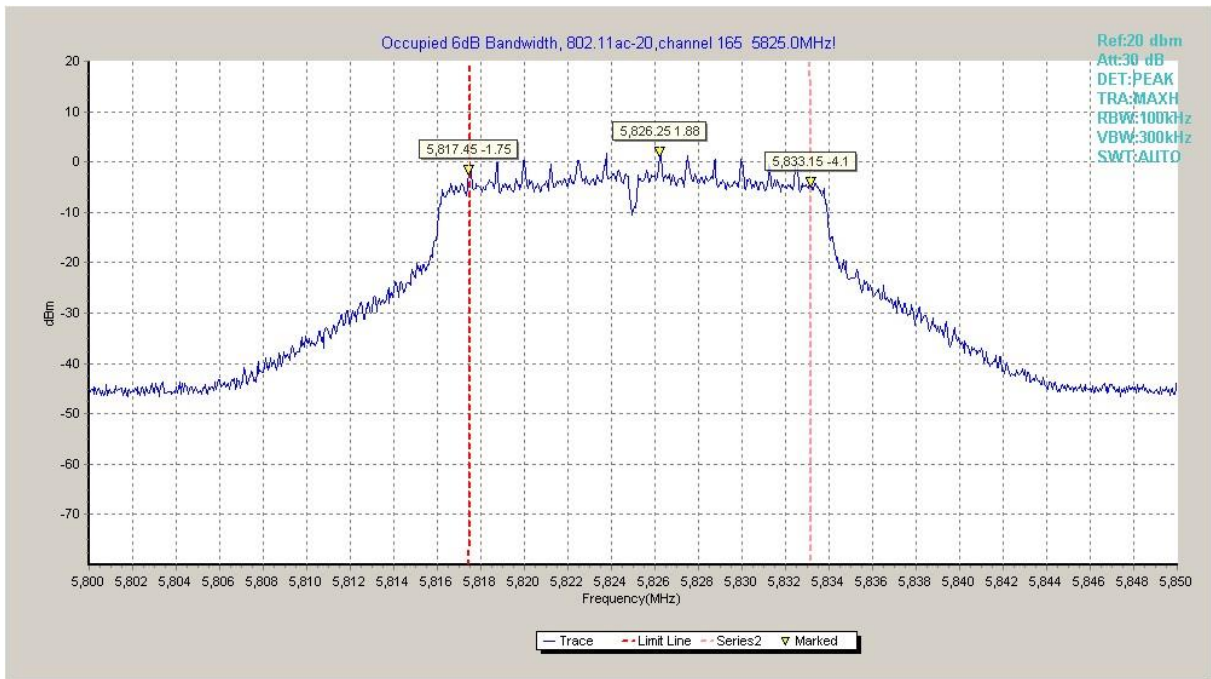


**Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 165)**

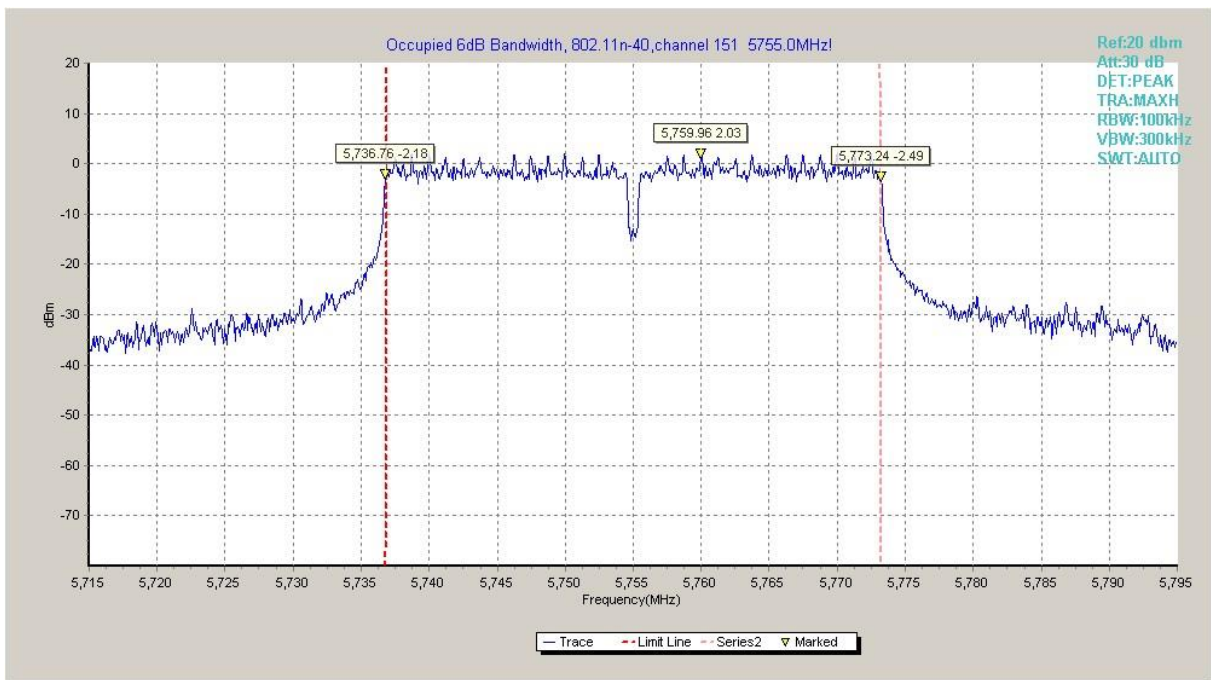


**Fig. 10 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**

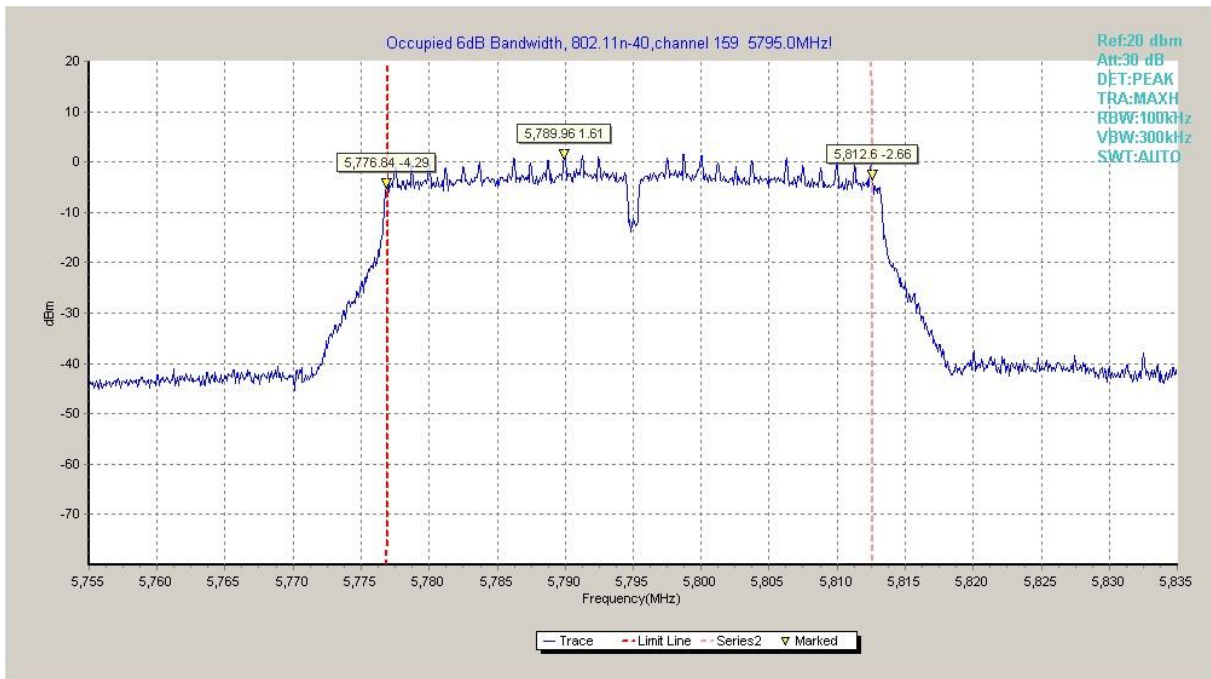


**Fig. 11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**

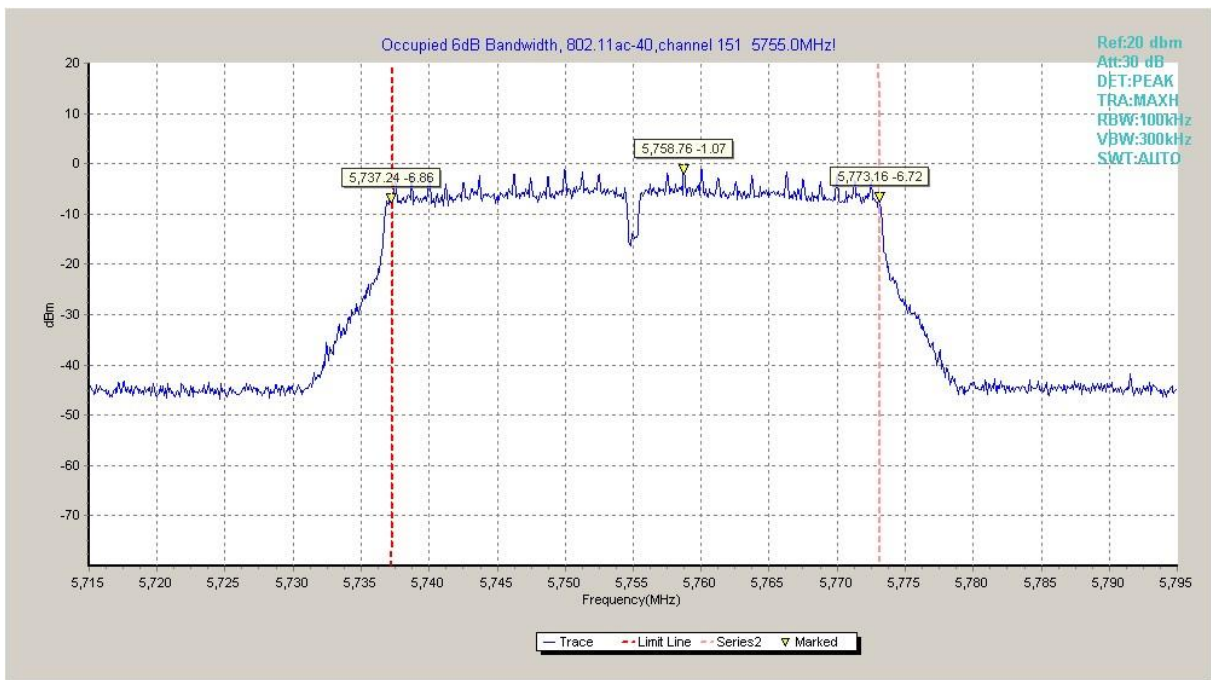

**Fig. 12 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 151)**

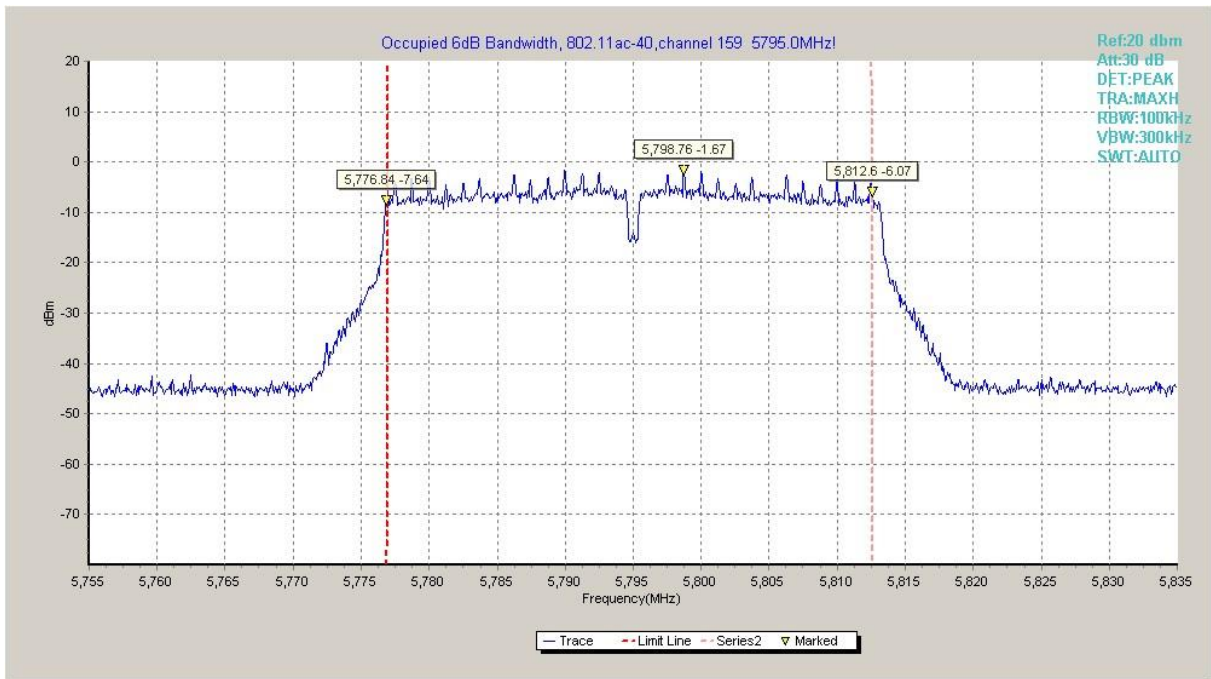

**Fig. 13 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 159)**

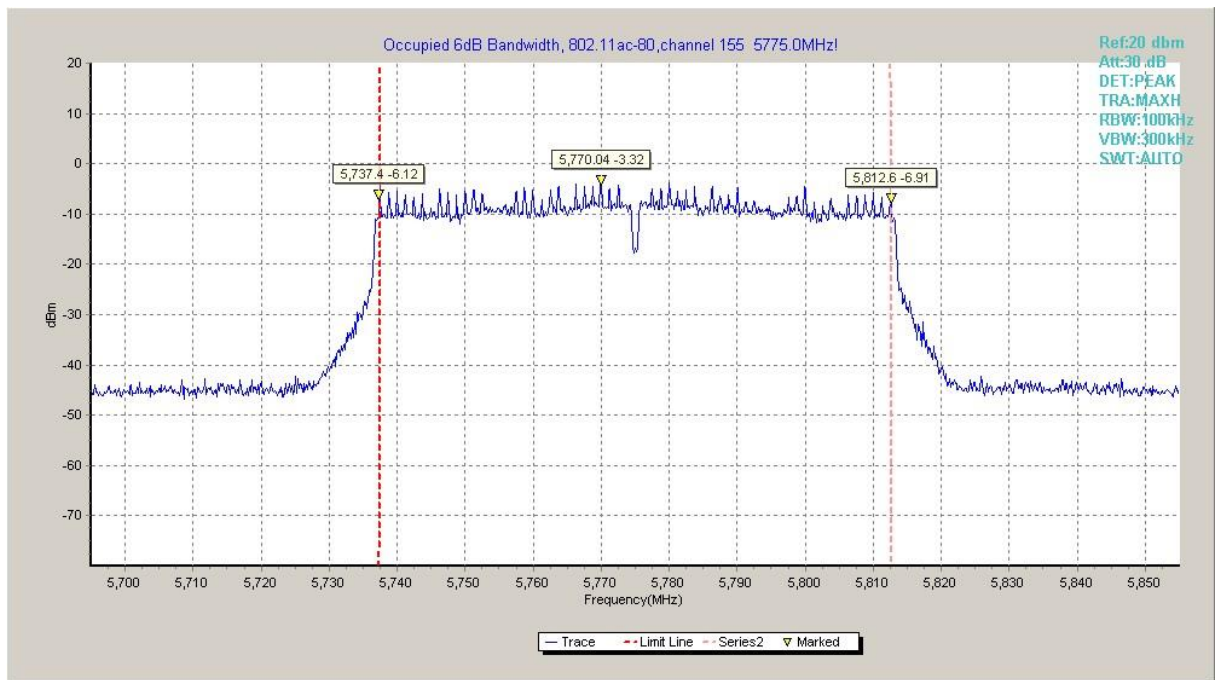

**Fig. 14 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)**

### A.5. Transmitter Spurious Emission

**Measurement Limit:**

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Measurement Uncertainty:**

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤3.6GHz	0.82
3.6GHz ≤ f ≤8GHz	1.55
8GHz ≤ f ≤20GHz	1.86
20GHz ≤ f ≤22GHz	1.90
22GHz ≤ f ≤26GHz	2.20

#### A.5.1 Transmitter Spurious Emission - Conducted

**Measurement Results:**

**802.11a mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.15	P
		1 GHz ~ 12 GHz	Fig.16	P
		12 GHz ~ 25 GHz	Fig.17	P
		25 GHz ~ 40 GHz	Fig.18	P
	157	30 MHz ~ 1 GHz	Fig.19	P
		1 GHz ~ 12 GHz	Fig.20	P
		12 GHz ~ 25 GHz	Fig.21	P
		25 GHz ~ 40 GHz	Fig.22	P
	165	30 MHz ~ 1 GHz	Fig.23	P
		1 GHz ~ 12 GHz	Fig.24	P
		12 GHz ~ 25 GHz	Fig.25	P
		25 GHz ~ 40 GHz	Fig.26	P

**802.11n-HT20 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.27	P
		1 GHz ~ 12 GHz	Fig.28	P
		12 GHz ~ 25 GHz	Fig.29	P
		25 GHz ~ 40 GHz	Fig.30	P
	157	30 MHz ~ 1 GHz	Fig.31	P
		1 GHz ~ 12 GHz	Fig.32	P
		12 GHz ~ 25 GHz	Fig.33	P
		25 GHz ~ 40 GHz	Fig.34	P
	165	30 MHz ~ 1 GHz	Fig.35	P
		1 GHz ~ 12 GHz	Fig.36	P
		12 GHz ~ 25 GHz	Fig.37	P
		25 GHz ~ 40 GHz	Fig.38	P

**802.11ac-HT20 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT20	149	30 MHz ~ 1 GHz	Fig.39	P
		1 GHz ~ 12 GHz	Fig.40	P
		12 GHz ~ 25 GHz	Fig.41	P
		25 GHz ~ 40 GHz	Fig.42	P
	157	30 MHz ~ 1 GHz	Fig.43	P
		1 GHz ~ 12 GHz	Fig.44	P
		12 GHz ~ 25 GHz	Fig.45	P
		25 GHz ~ 40 GHz	Fig.46	P
	165	30 MHz ~ 1 GHz	Fig.47	P
		1 GHz ~ 12 GHz	Fig.48	P
		12 GHz ~ 25 GHz	Fig.49	P
		25 GHz ~ 40 GHz	Fig.50	P

**802.11n-HT40 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.51	P
		1 GHz ~ 12 GHz	Fig.52	P
		12 GHz ~ 25 GHz	Fig.53	P
		25 GHz ~ 40 GHz	Fig.54	P
	159	30 MHz ~ 1 GHz	Fig.55	P
		1 GHz ~ 12 GHz	Fig.56	P
		12 GHz ~ 25 GHz	Fig.57	P
		25 GHz ~ 40 GHz	Fig.58	P

**802.11ac-HT40 mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT40	151	30 MHz ~ 1 GHz	Fig.59	P
		1 GHz ~ 12 GHz	Fig.60	P
		12 GHz ~ 25 GHz	Fig.61	P
		25 GHz ~ 40 GHz	Fig.62	P
	159	30 MHz ~ 1 GHz	Fig.63	P
		1 GHz ~ 12 GHz	Fig.64	P
		12 GHz ~ 25 GHz	Fig.65	P
		25 GHz ~ 40 GHz	Fig.66	P

**802.11ac-HT80 mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT80	155	30 MHz ~ 1 GHz	Fig.67	P
		1 GHz ~ 12 GHz	Fig.68	P
		12 GHz ~ 25 GHz	Fig.69	P
		25 GHz ~ 40 GHz	Fig.70	P

**Conclusion: PASS**


**Test graphs as below:**

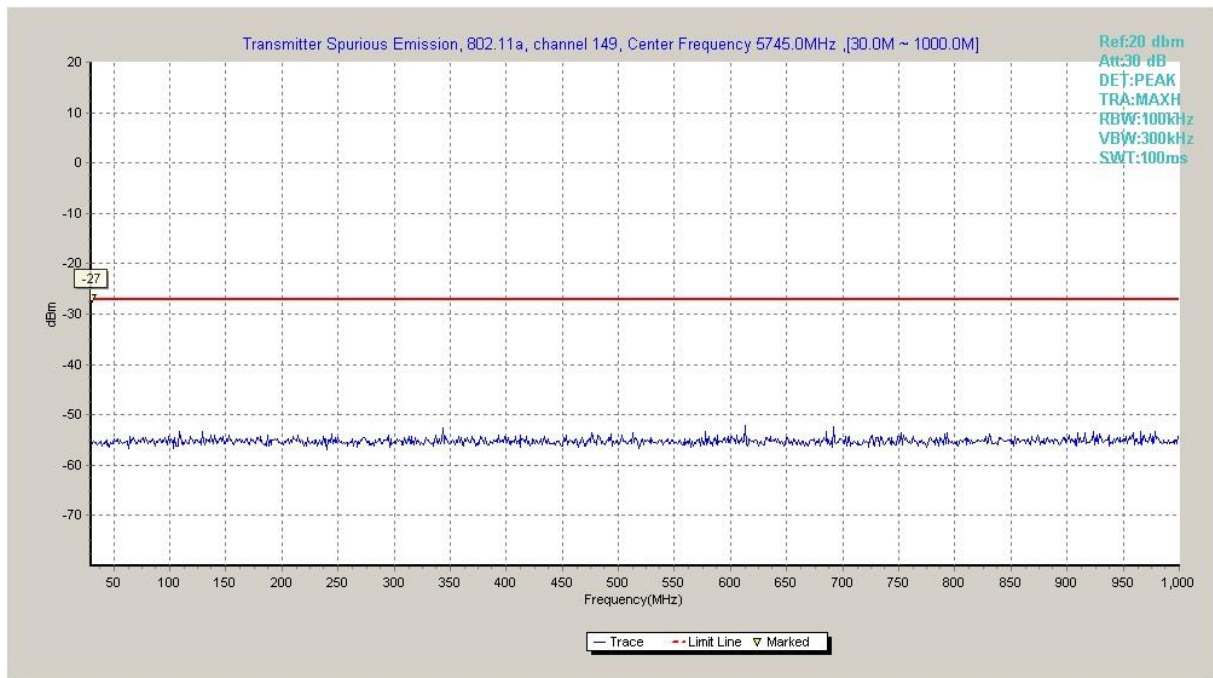


**Fig. 15 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)**

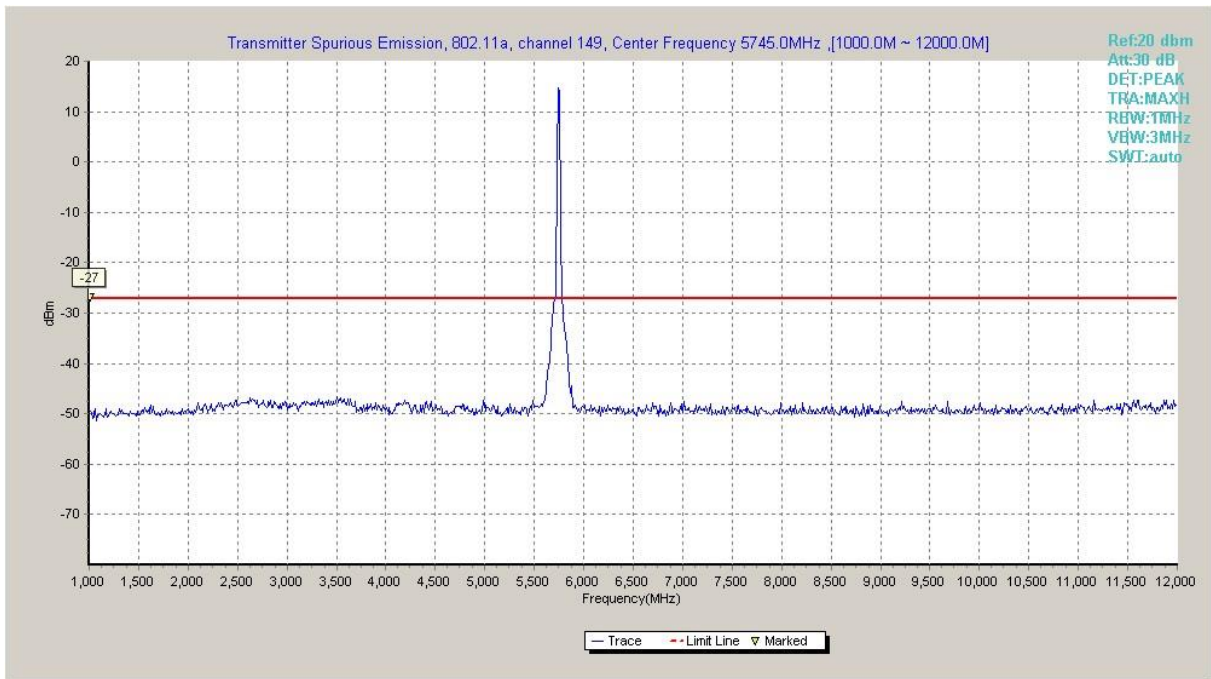


**Fig. 16 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -12 GHz)**

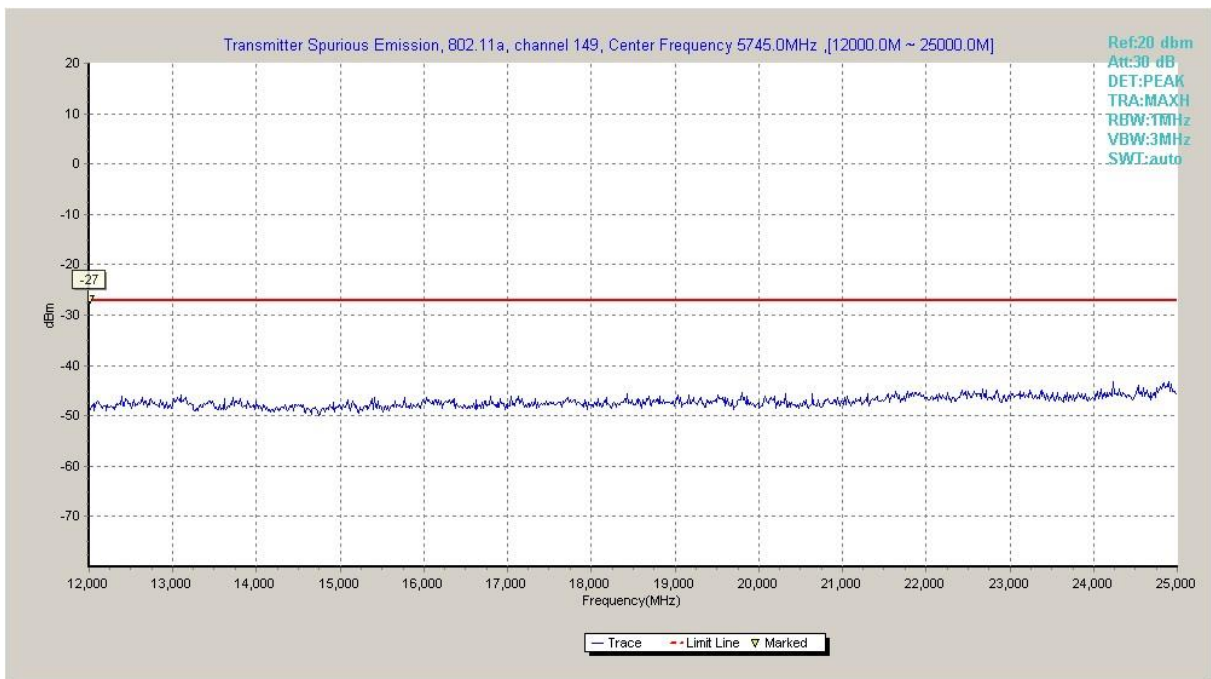

**Fig. 17 Conducted Spurious Emission (802.11a, Ch149, 12 GHz-25 GHz)**

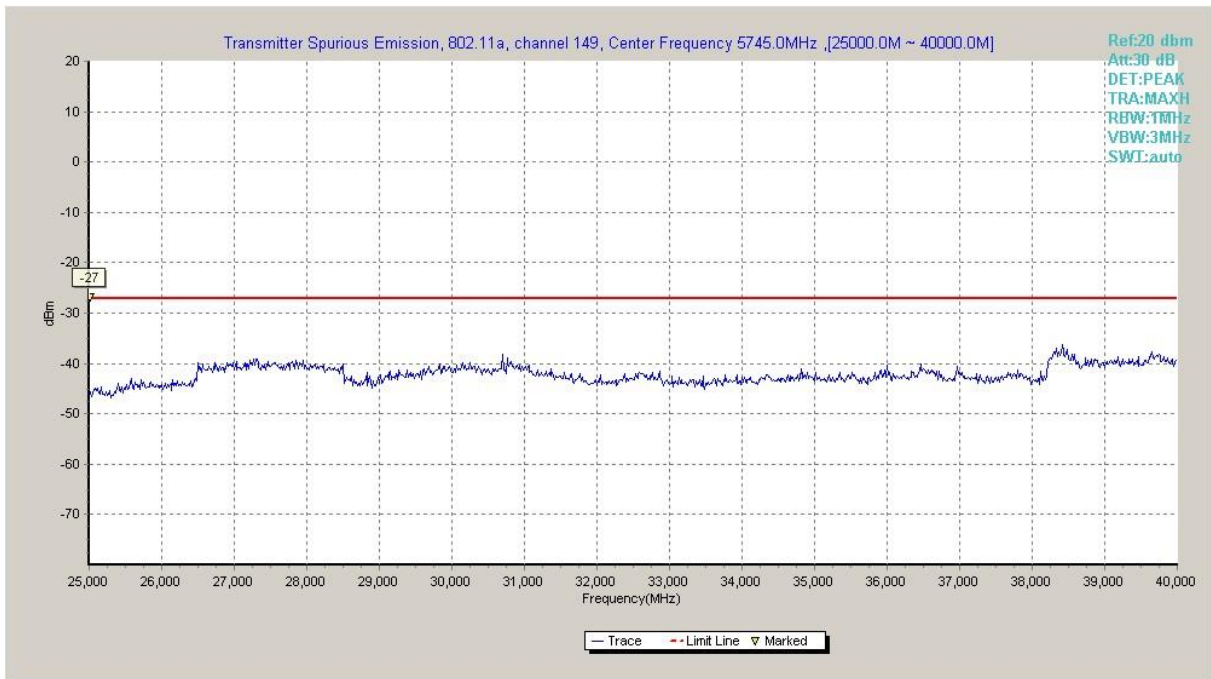


**Fig. 18 Conducted Spurious Emission (802.11a, Ch149, 25 GHz-40 GHz)**

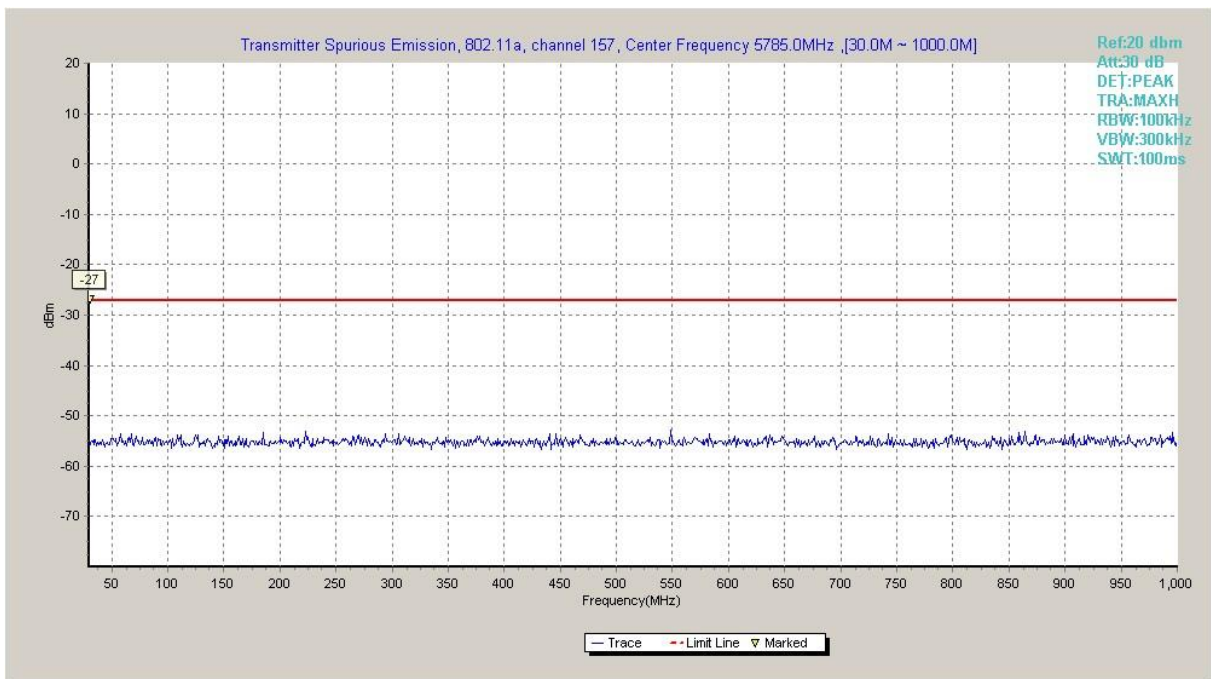


**Fig. 19 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)**




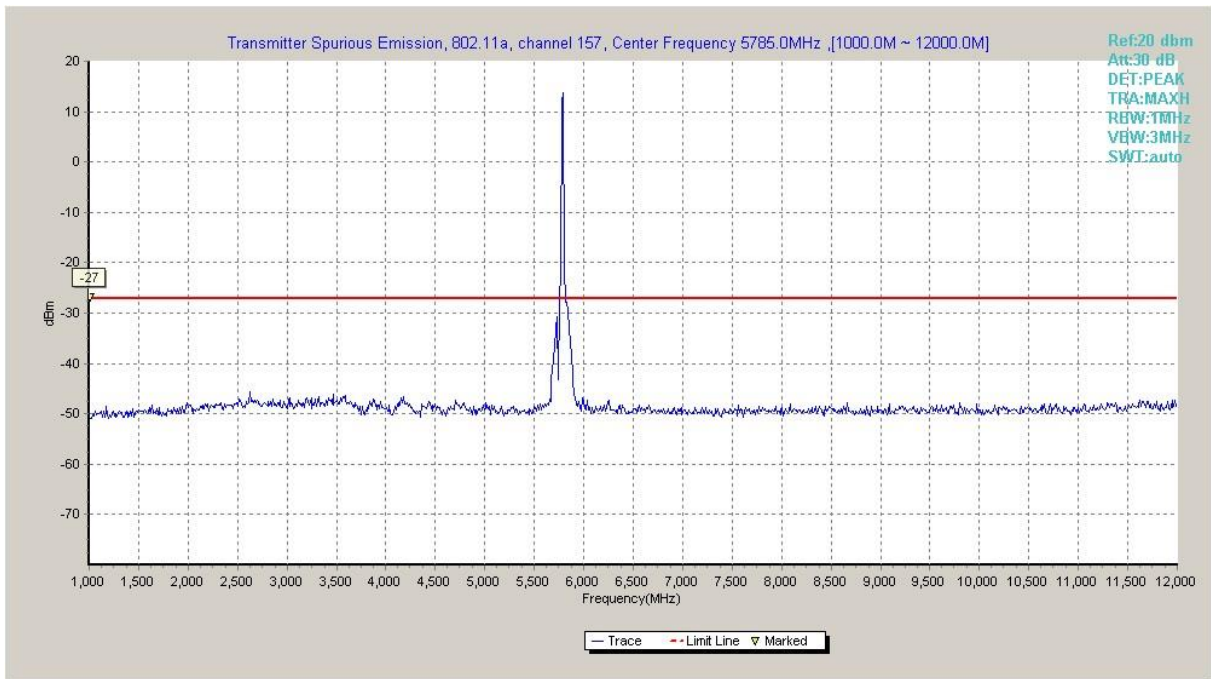


**Fig. 20 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -12 GHz)**

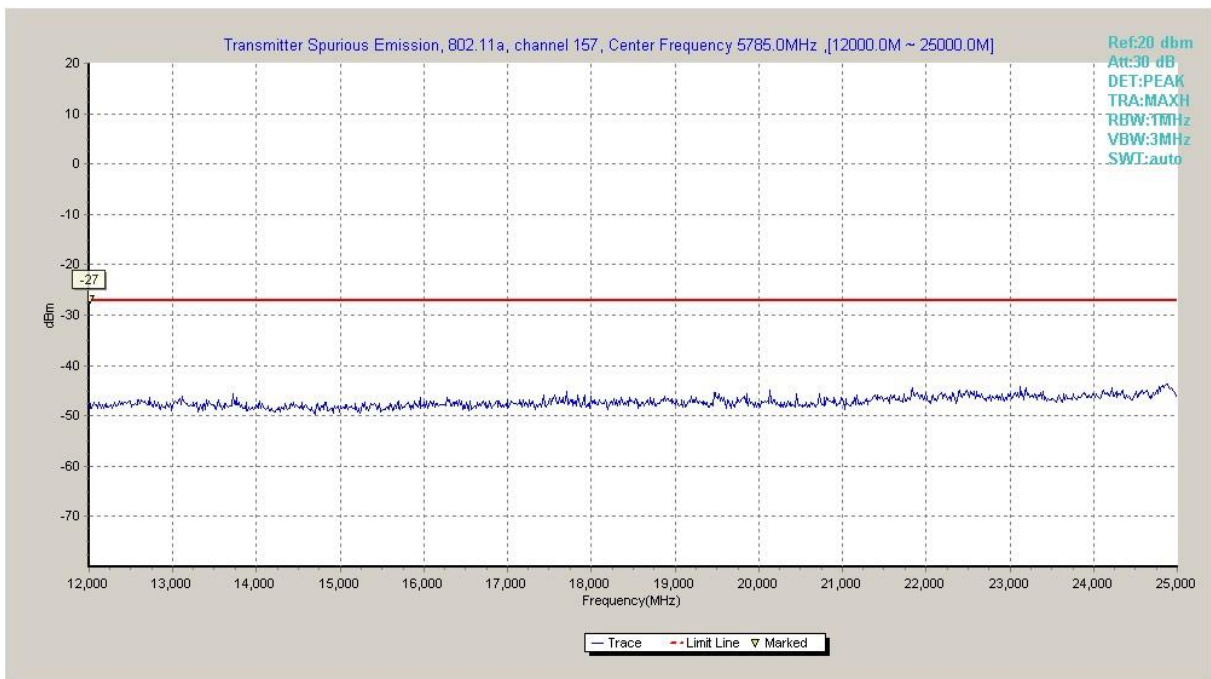


**Fig. 21 Conducted Spurious Emission (802.11a, Ch157, 12 GHz-25 GHz)**

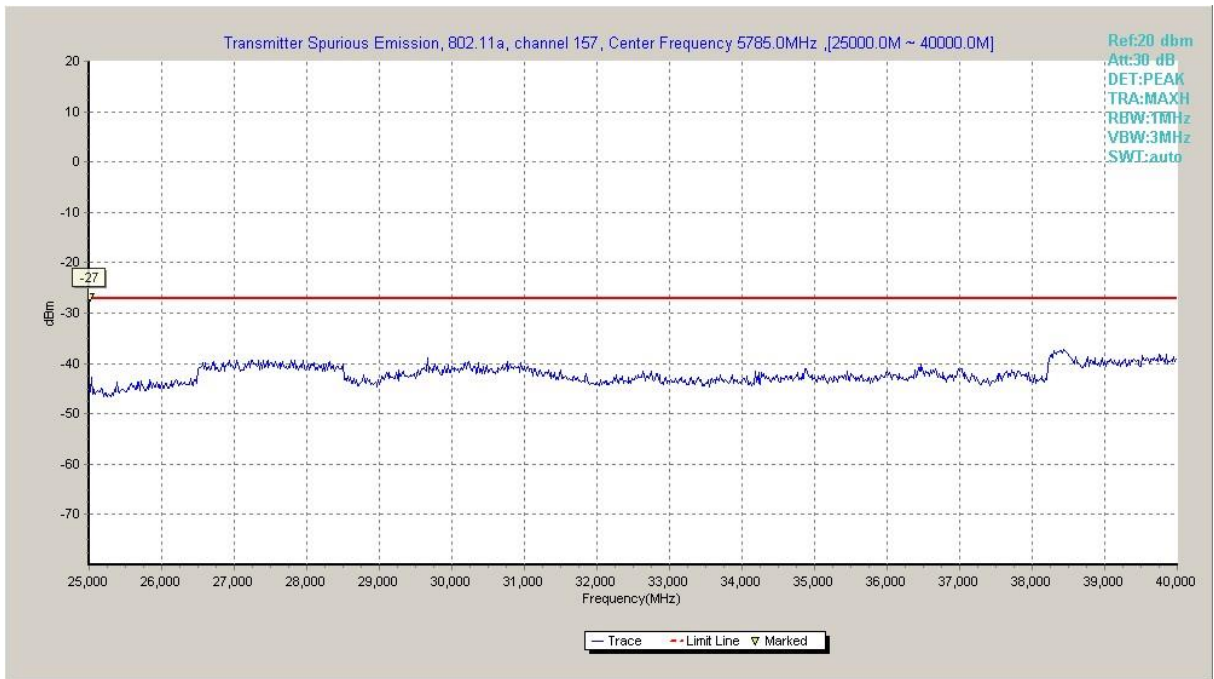


**Fig. 22 Conducted Spurious Emission (802.11a, Ch157, 25 GHz-40 GHz)**

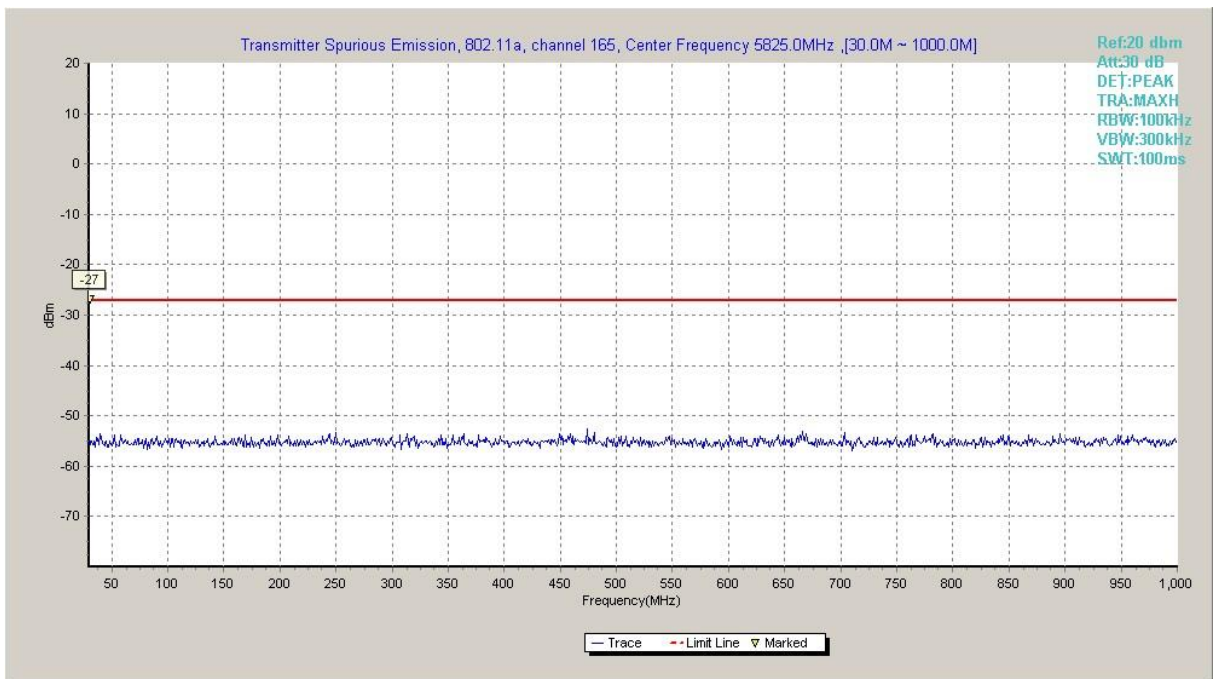


**Fig. 23 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)**

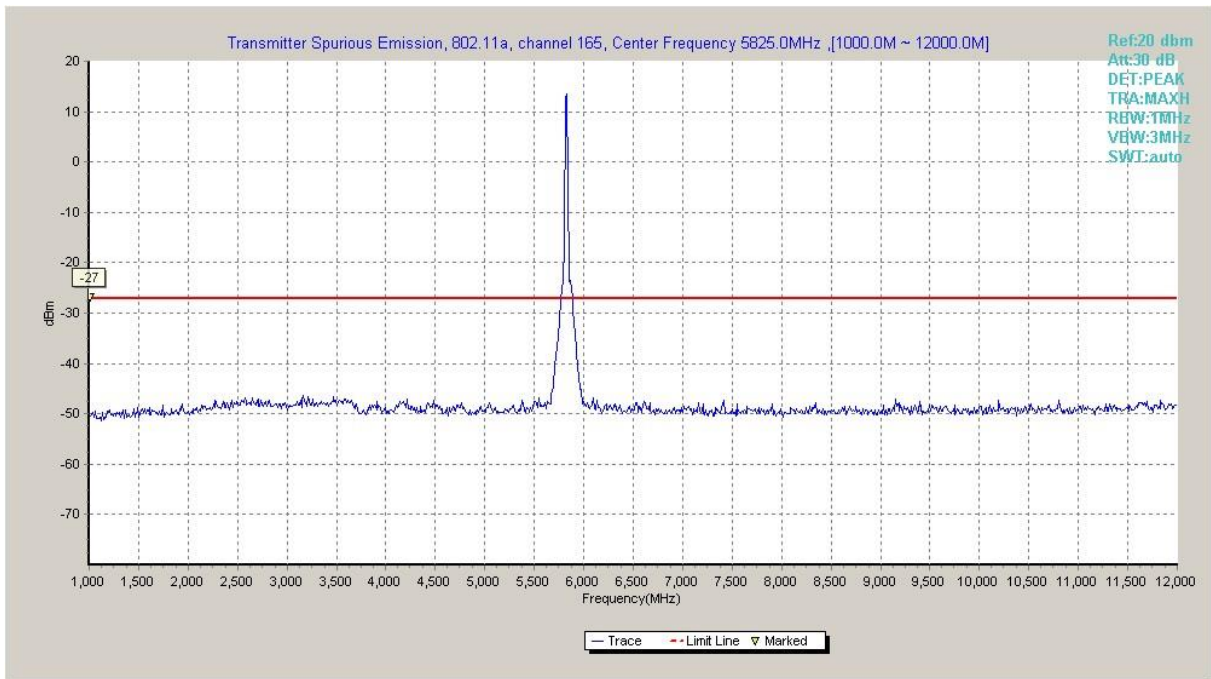


**Fig. 24 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -12 GHz)**

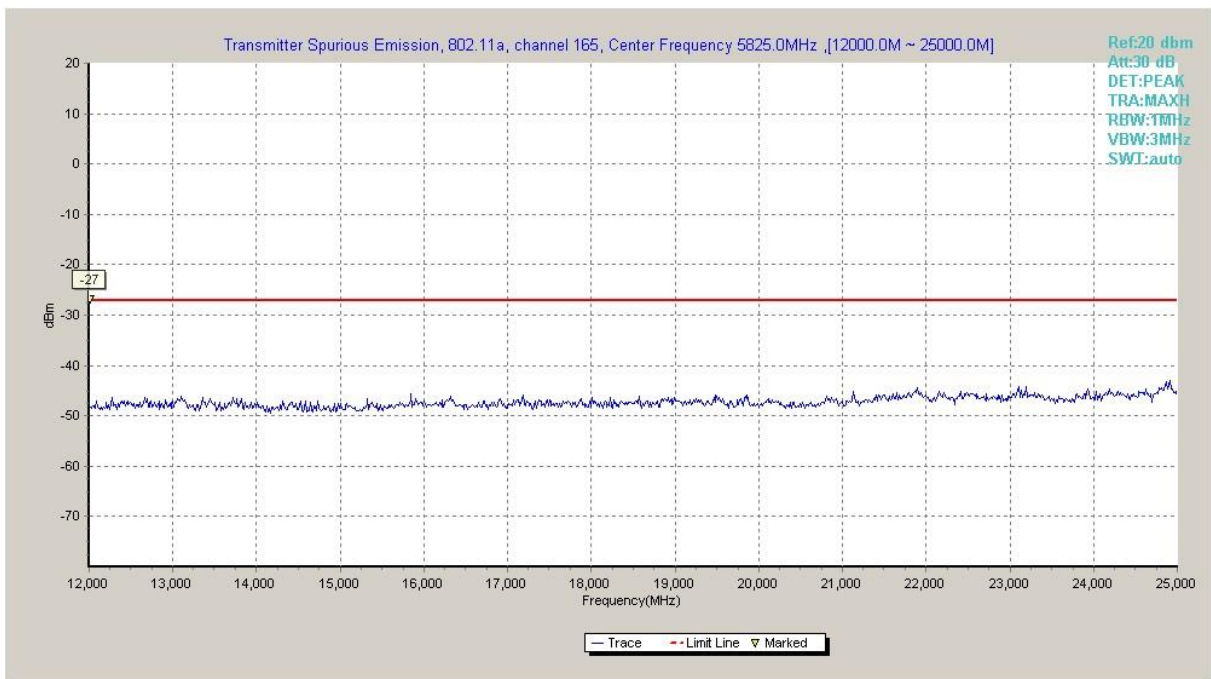


**Fig. 25 Conducted Spurious Emission (802.11a, Ch165, 12 GHz-25 GHz)**

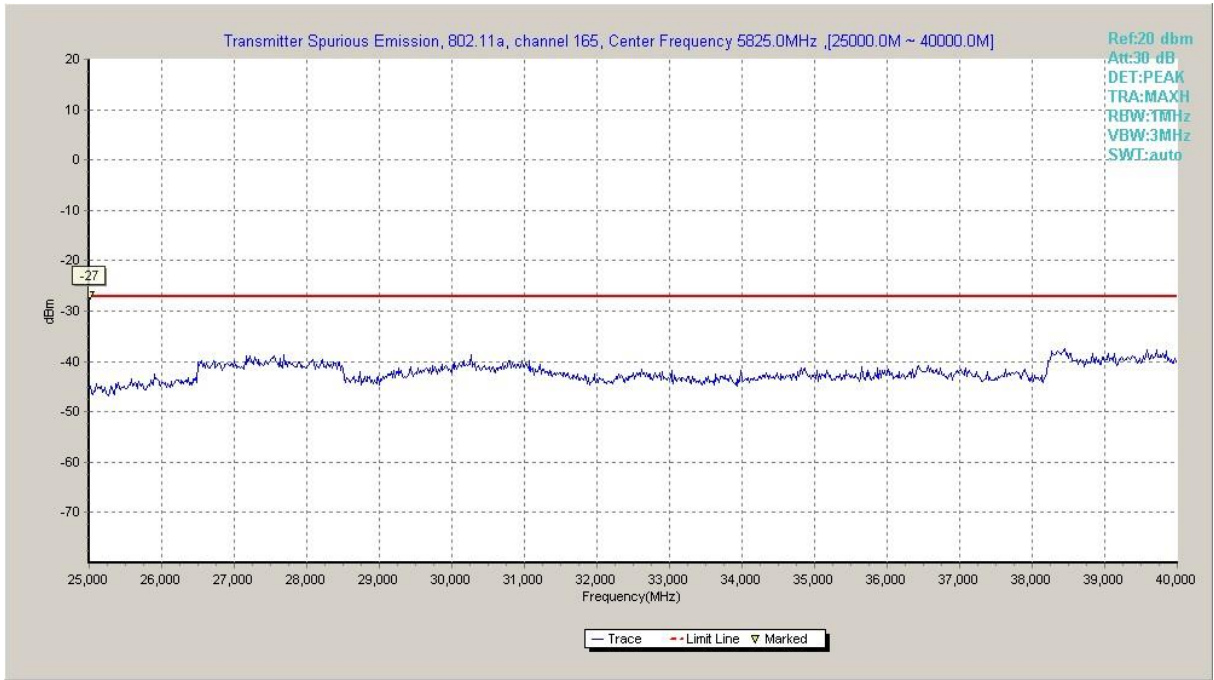


**Fig. 26 Conducted Spurious Emission (802.11a, Ch165, 25 GHz-40 GHz)**

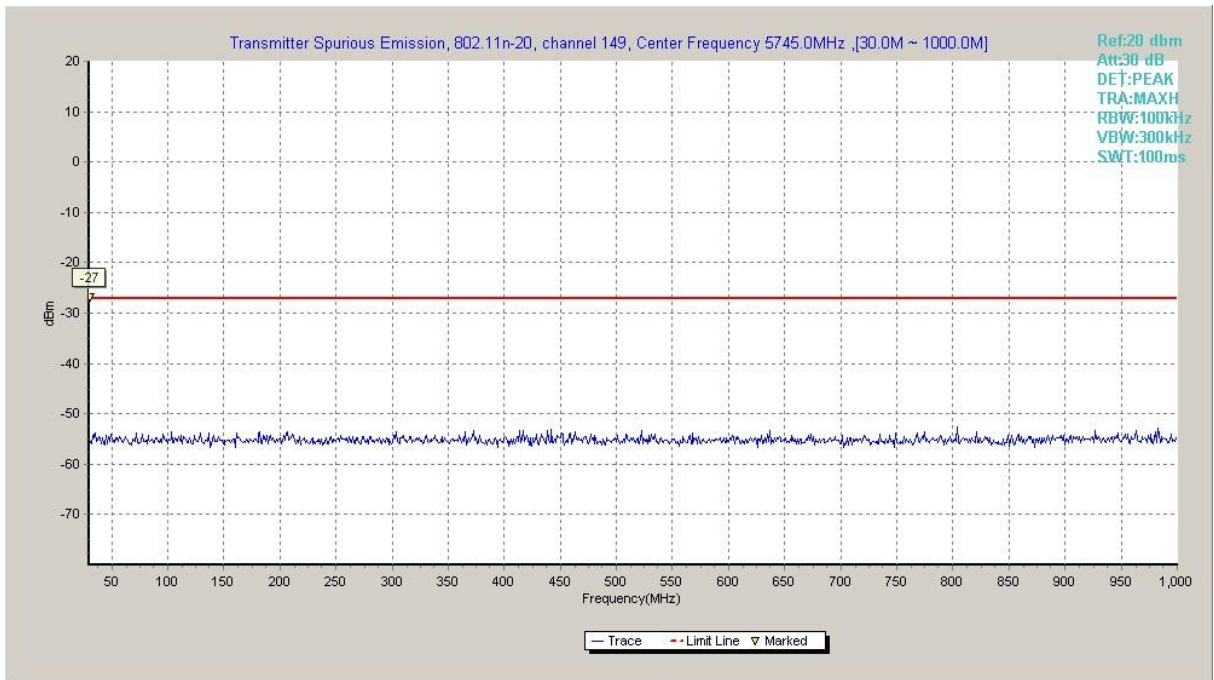


**Fig. 27 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)**

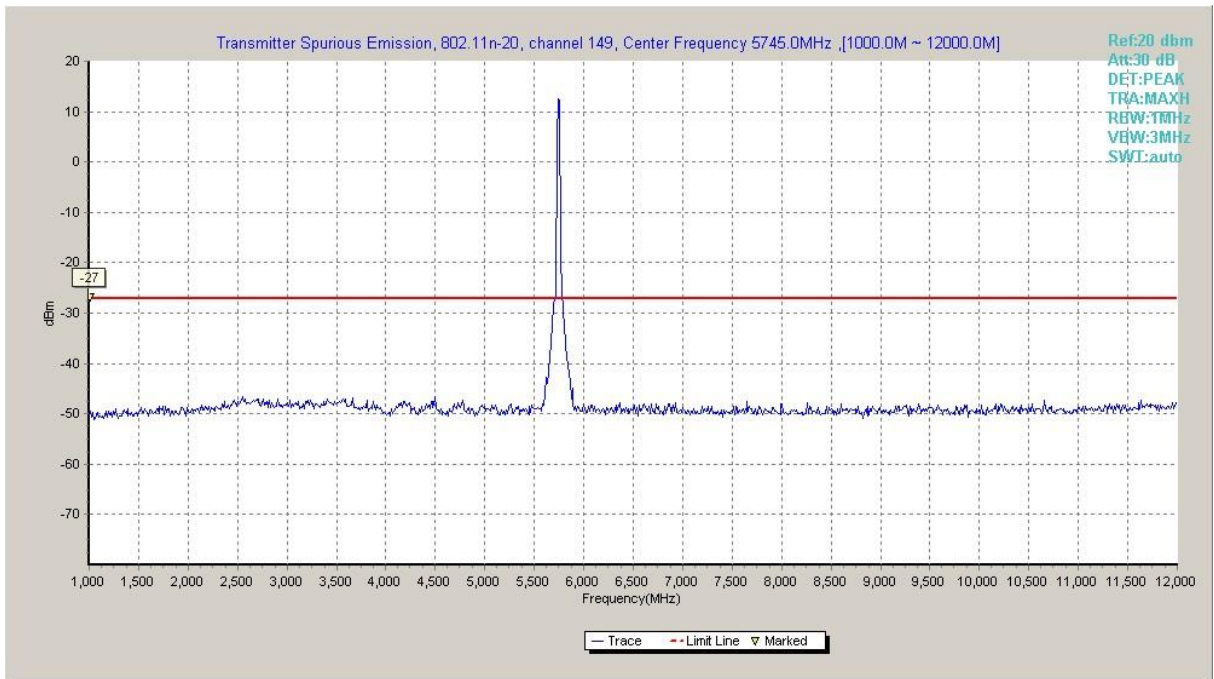


**Fig. 28 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -12 GHz)**

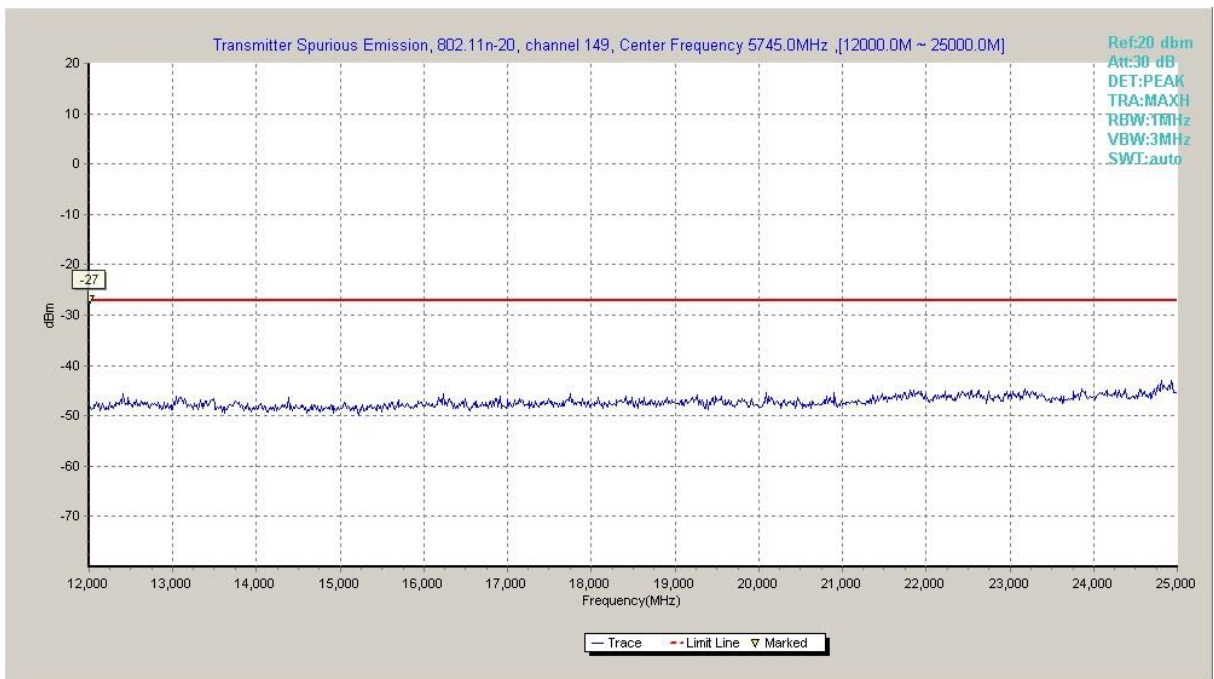


**Fig. 29 Conducted Spurious Emission (802.11n-HT20, Ch149, 12 GHz-25 GHz)**

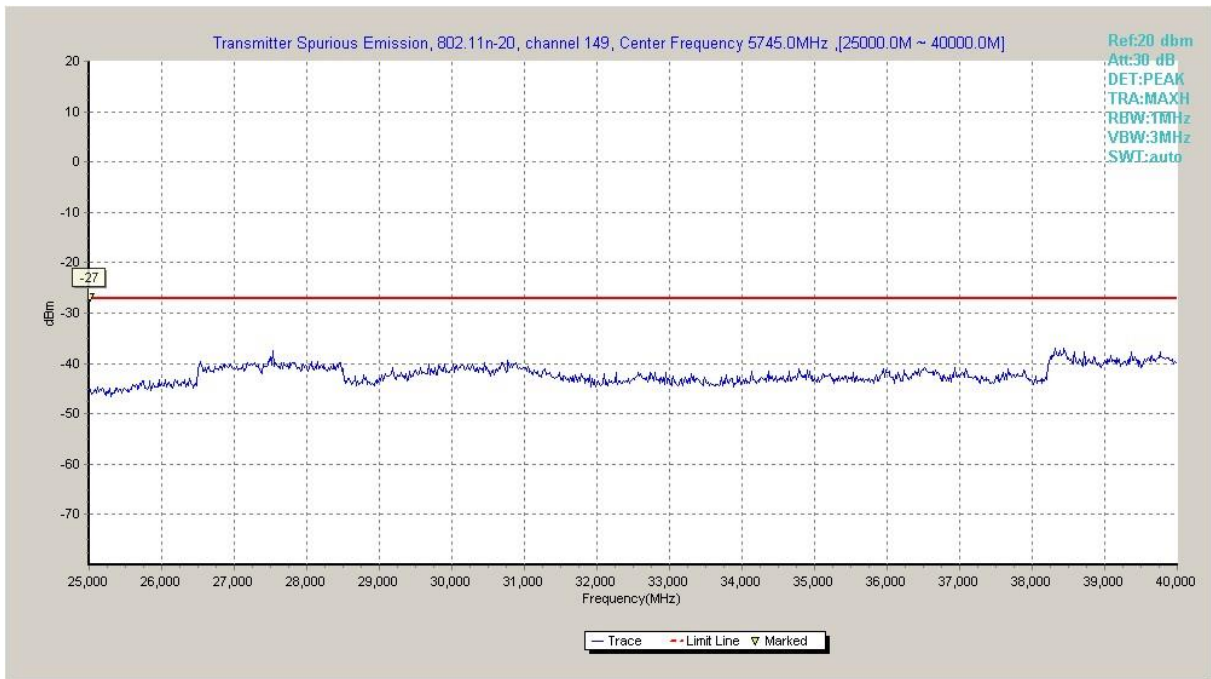


**Fig. 30 Conducted Spurious Emission (802.11n-HT20, Ch149, 25 GHz-40 GHz)**

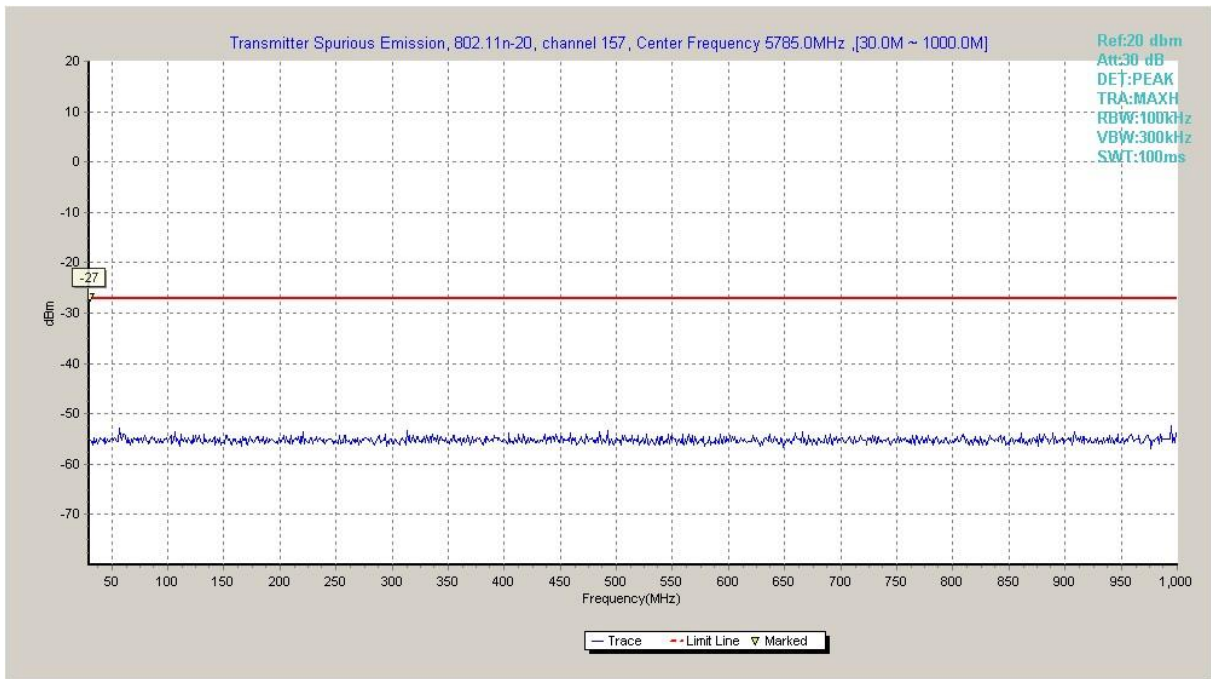


**Fig. 31 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)**

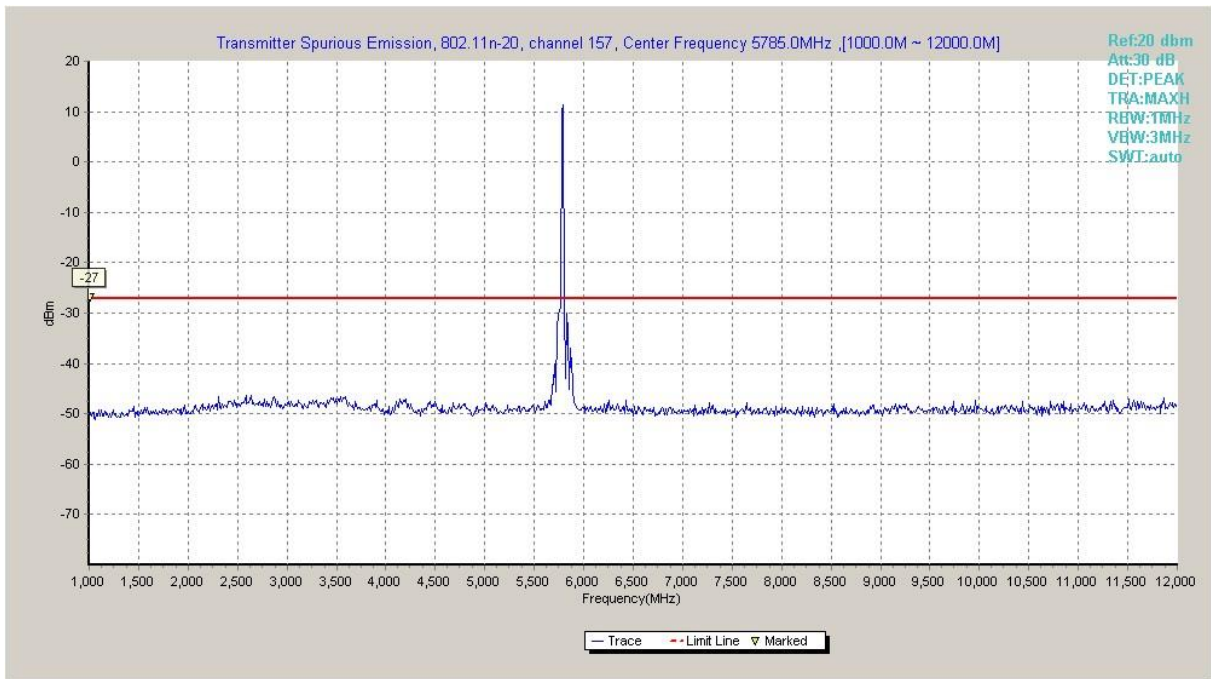


**Fig. 32 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -12 GHz)**

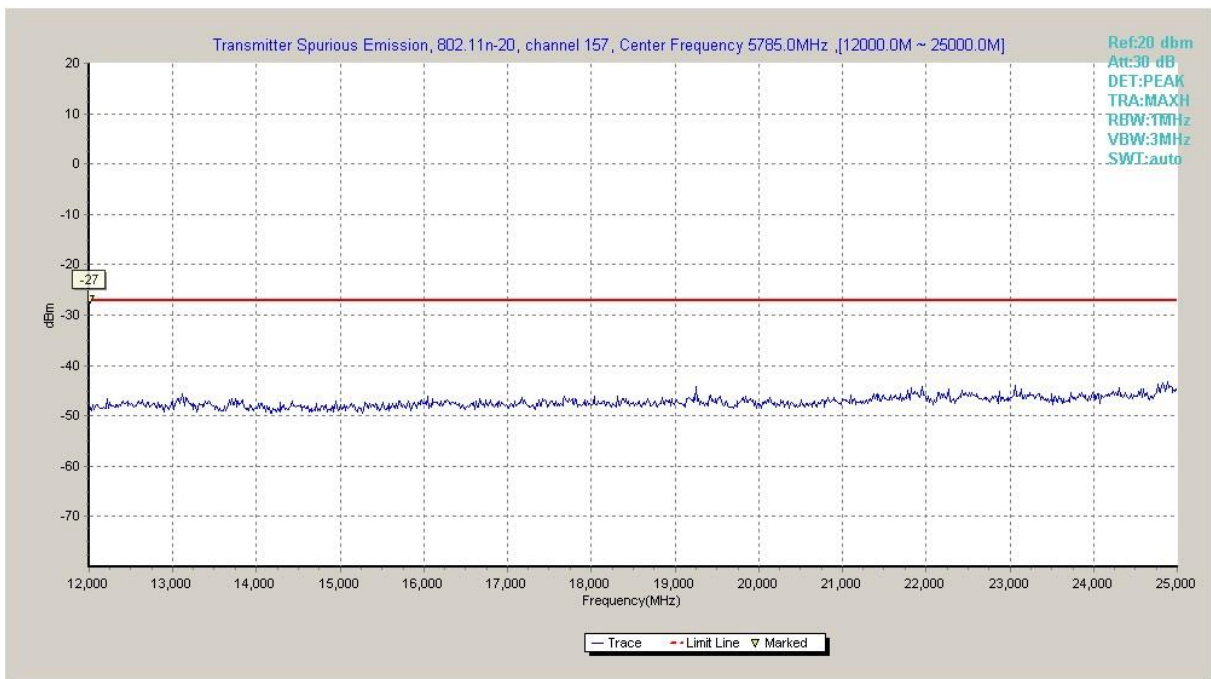

**Fig. 33 Conducted Spurious Emission (802.11n-HT20, Ch157, 12 GHz-25 GHz)**

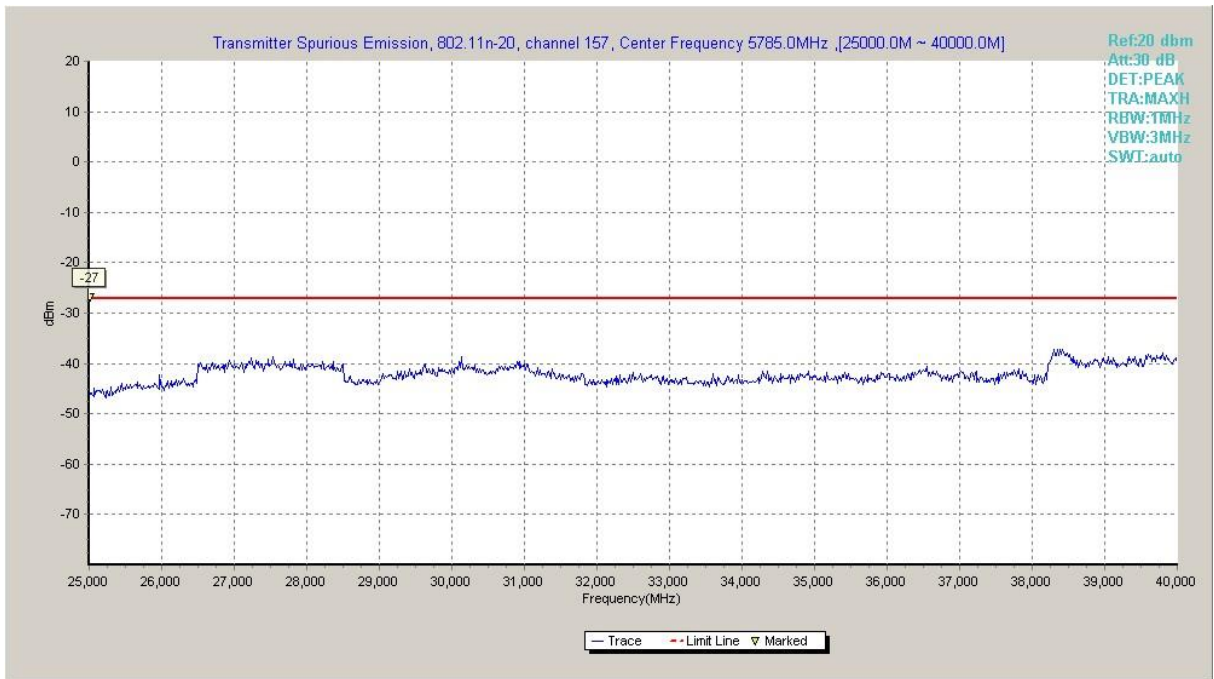


**Fig. 34 Conducted Spurious Emission (802.11n-HT20, Ch157, 25 GHz-40 GHz)**

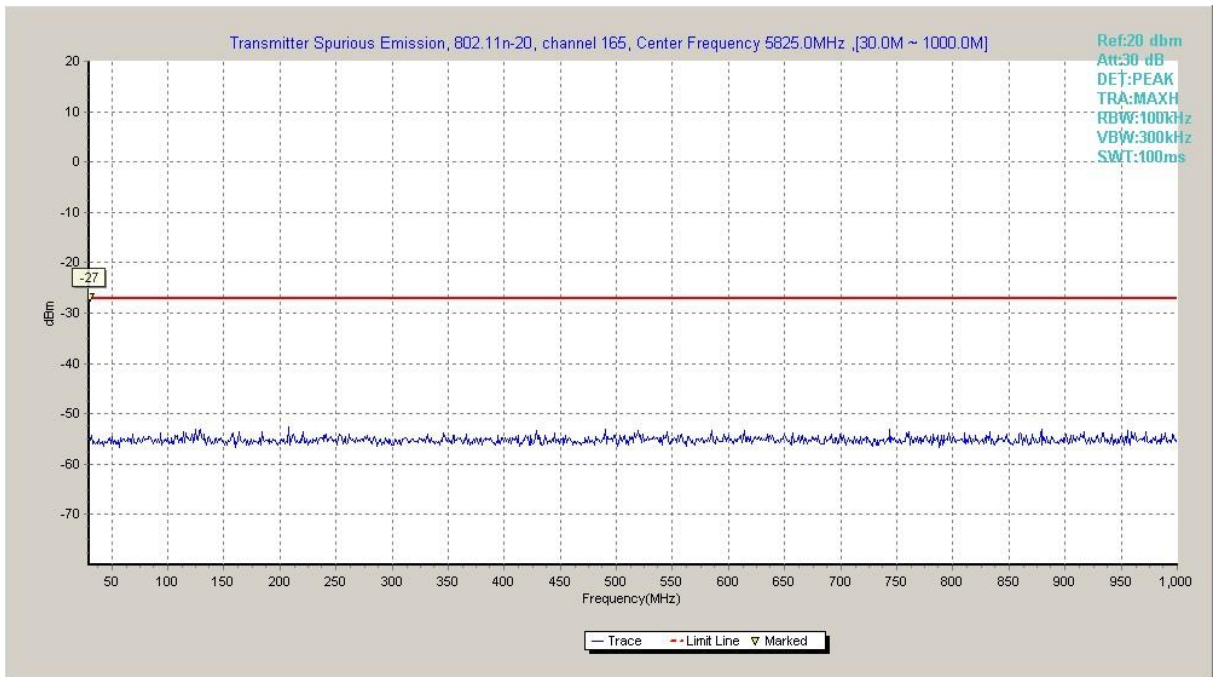


**Fig. 35 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)**




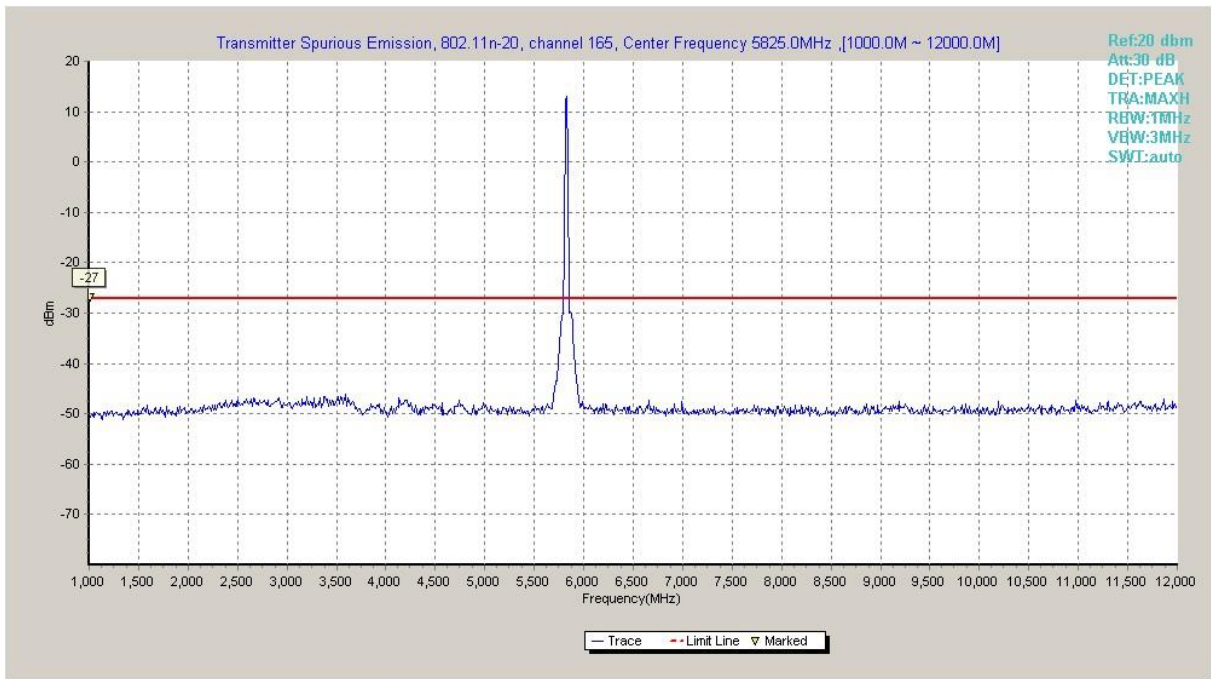


**Fig. 36 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -12 GHz)**

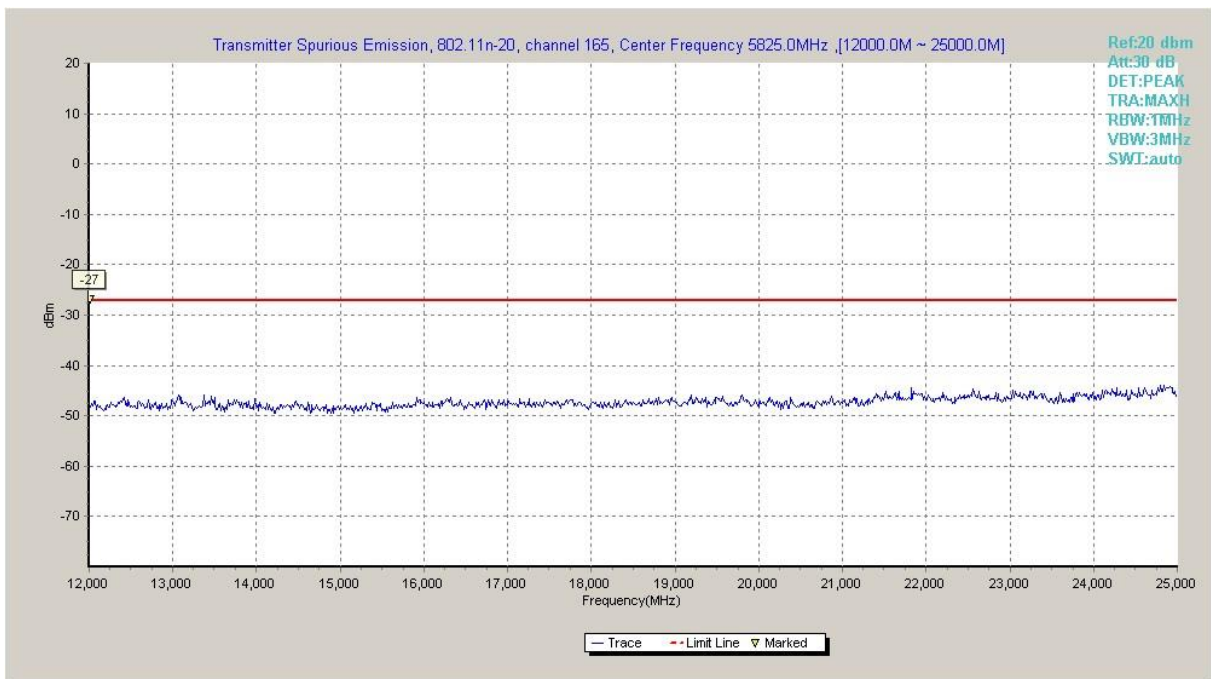


**Fig. 37 Conducted Spurious Emission (802.11n-HT20, Ch165, 12 GHz-25 GHz)**

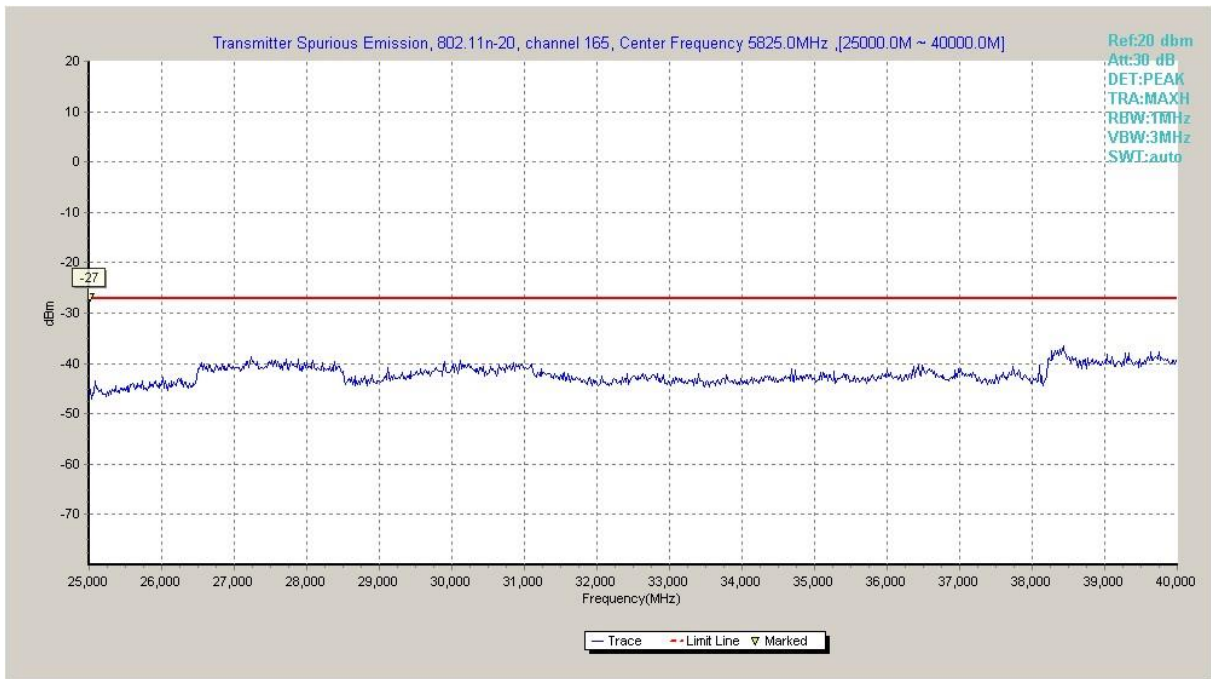


**Fig. 38 Conducted Spurious Emission (802.11n-HT20, Ch165, 25 GHz-40 GHz)**

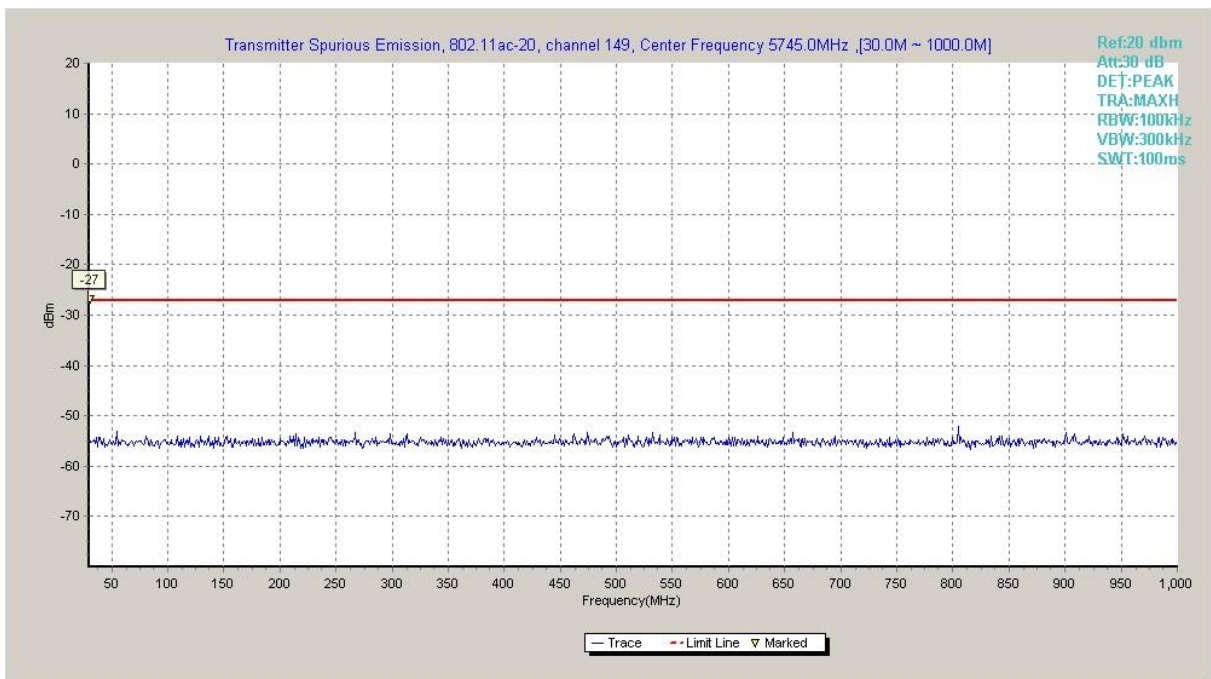

**Fig. 39 Conducted Spurious Emission (802.11ac-HT20, Ch149, 30 MHz-1 GHz)**

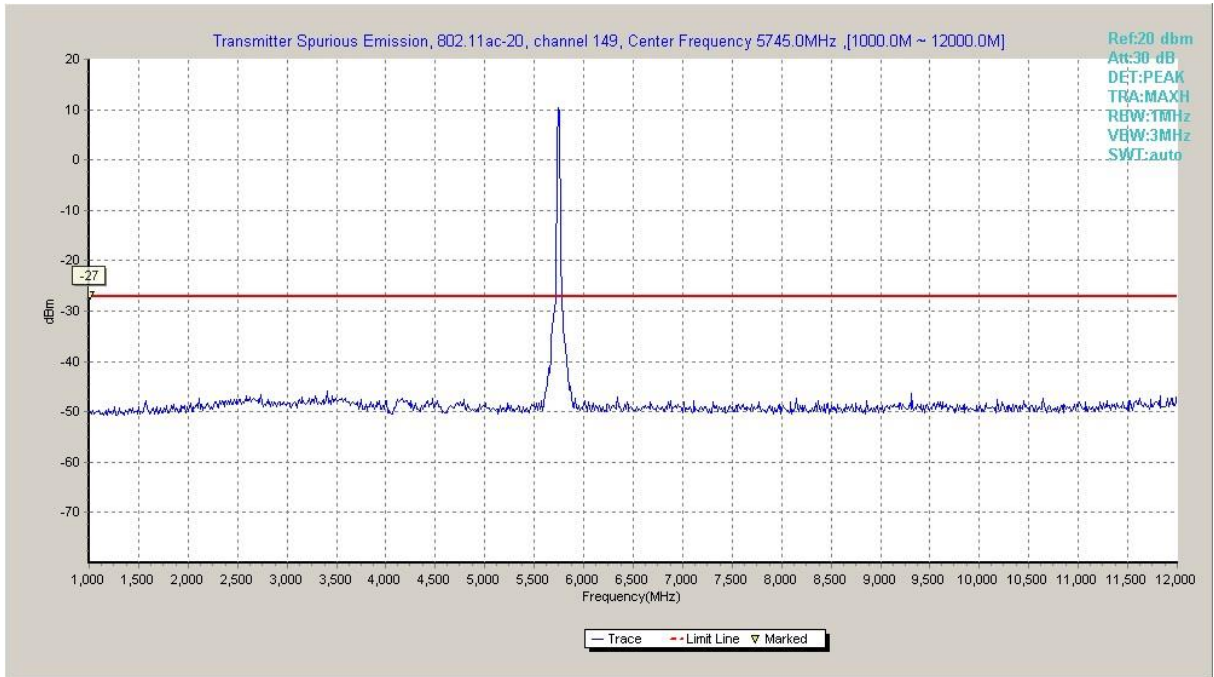

**Fig. 40 Conducted Spurious Emission (802.11ac-HT20, Ch149, 1 GHz -12 GHz)**

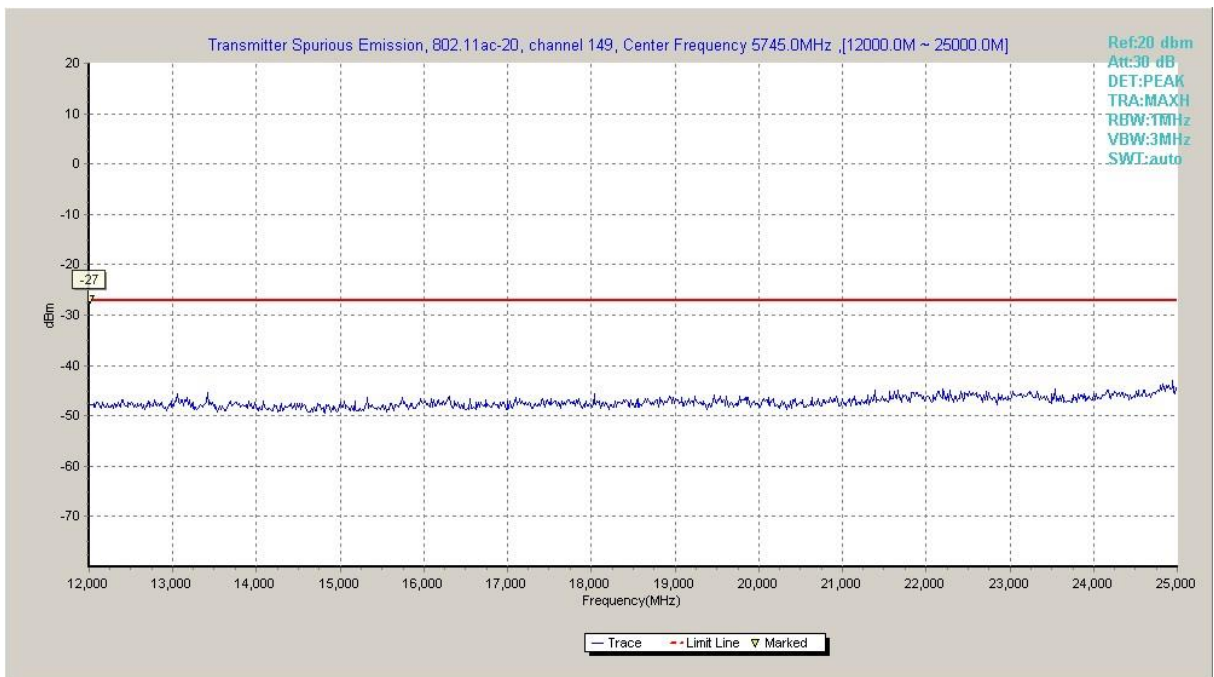

**Fig. 41 Conducted Spurious Emission (802.11ac-HT20, Ch149, 12 GHz-25 GHz)**