



FCC PART 15C TEST REPORT

BLUETOOTH LOW ENERGY (BLE) PART

No. I18Z60538-IOT02

for

TCL Communication Ltd.

GSM Quad-band/HSPA-UMTS Six-band/LTE 19 band mobile phone

Model Name: BBB100-5

FCC ID:2ACCJN027

with

Hardware Version: 05

Software Version: AAW880

Issued Date: 2018-4-12



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

[Tel:+86\(0\)10-62304633-2512](tel:+86(0)10-62304633-2512), [Fax:+86\(0\)10-62304633-2504](tel:+86(0)10-62304633-2504)

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z60538-IOT02	Rev.0	1st edition	2018-4-12



CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE	7
3.4. NORMAL ACCESSORY SETTING	8
3.5. GENERAL DESCRIPTION.....	8
4. REFERENCE DOCUMENTS.....	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS.....	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS.....	10
6. TEST FACILITIES UTILIZED	11
TEST SOFTWARE UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
7.1. PEAK OUTPUT POWER - CONDUCTED	12
7.2. FREQUENCY BAND EDGES.....	12
7.3. CONDUCTED EMISSION.....	12
7.4. RADIATED EMISSION	12
7.5. 6DB BANDWIDTH	12
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL	12
7.7. AC POWERLINE CONDUCTED EMISSION.....	13
ANNEX A: DETAILED TEST RESULTS.....	14
A.1. MEASUREMENT METHOD	14
A.2. PEAK OUTPUT POWER - CONDUCTED	15



A.3. FREQUENCY BAND EDGES - CONDUCTED.....	16
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	18
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED	27
A.6. 6dB BANDWIDTH.....	36
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL	39
A.8. AC POWERLINE CONDUCTED EMISSION	42
ANNEX E: ACCREDITATION CERTIFICATE.....	48

1. Test Laboratory

1.1. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-12-28

Testing End Date: 2017-2-22

1.4. Signature




Wu Le

(Prepared this test report)



Sun Zhenyu

(Reviewed this test report)



Lv Songdong

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
7/F, Block F4, TCL Communication Technology Building, TCL
Address /Post: International E City, Zhong Shan Yuan Road, Nanshan District,
Shenzhen, Guangdong, P.R. China 518052
City: Shenzhen
Postal Code: 518052
Country: China
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
7/F, Block F4, TCL Communication Technology Building, TCL
Address /Post: International E City, Zhong Shan Yuan Road, Nanshan District,
Shenzhen, Guangdong, P.R. China 518052
City: Shenzhen
Postal Code: 518052
Country: China
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 19 band mobile phone
Model Name	BBB100-5
FCC ID	2ACCJN027
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	05	AAW880
EUT2	/	05	AAW880

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description		
AE1	battery	/	/
AE2	battery	/	/
AE3	Travel charger	/	16TCT-CH-1886
AE4	Travel charger	/	16TCT-CH-1872
AE5	Travel charger	/	16TCT-CH-0005
AE6	Travel charger	/	/
AE7	Travel charger	/	/
AE8	USB Cable	/	/
AE9	USB Cable	/	/
AE1			
Model		BAT-63108-003	
SN		CAC3440001C3	
Manufacturer		ATL	
Capacitance		3440 mAh	
Nominal voltage		3.85V	
AE2			
Model		TLp034E1	
SN		CAC3440003C1	
Manufacturer		BYD	
Capacitance		3440 mAh	
Nominal voltage		3.85V	



AE3	
Name	CBA0060AGHC1
Model	QC10US
Manufacturer	BYD
Length of cable	/
AE4	
Name	CBA0060ACHC1
Model	QC10AU
Manufacturer	BYD
Length of cable	/
AE5	
Name	CBA0060AJHC1
Model	QC10IN
Manufacturer	BYD
Length of cable	/
AE6	
Name	CBA0060AAHC1
Model	QC10EU
Manufacturer	BYD
Length of cable	/
AE7	
Name	CBA0060ABHC1
Model	QC10UK
Manufacturer	BYD
Length of cable	/
AE8	
Model	CDA0000105CF
Manufacturer	LUXSHARE
Length of cable	99cm
AE9	
Model	CDA0000108C2
Manufacturer	SHENGHUA
Length of cable	99cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery is used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM Quad-band/HSPA-UMTS Six-band/LTE 19 band mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2016
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

P Pass, The EUT complies with the essential requirements in the standard.

F Fail, The EUT does not comply with the essential requirements in the standard

NA Not Applicable, The test was not applicable

NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	P
Peak Output Power - Conducted	15.247 (b)(1)	P
Maximum Power Spectral Density Level	15.247(e)	P
Conducted Emission	15.247 (d)	P
Radiated Emission	15.247, 15.205, 15.209	P
Frequency Band Edges	15.247 (d)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

This model is a variant product which model name is BBB100-1; all the test result has been derived from test report of BBB100-1.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2018-09-30
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2018-08-03
3	Test Receiver	ESCI	100948	Rohde & Schwarz	1 year	2018-07-25
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2018-11-27
2	Loop antenna	HFH2-Z2	829324/00 7	Rohde & Schwarz	3 years	2019-01-13
3	BiLog Antenna	VULB9163	301	Schwarzbeck	3 years	2019-02-03
4	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	3 years	2018-11-31
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2020-07-27
6	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2018-06-27
7	Semi-anechoic chamber	/	CT000332 -1074	Frankonia German	/	/

Test Software Utilized

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.40.0	R&S
Conducted Continuous Emission	EMC32 V8.52.0	R&S

7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.3. Conducted Emission

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.4. Radiated Emission

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------



7.7. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
 - 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
 - 3). Set the EUT to the required channel.
 - 4). Set the EUT hopping mode (hopping or hopping off).
 - 5). Set the spectrum analyzer to start measurement.
 - 6). Record the values. Vector Signal Analyzer
-

A.1.2. Radiated Emission Measurements

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;



A.2. Peak Output Power - Conducted

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
0	2402	-1.34	P
19	2440	-0.59	P
39	2480	-1.68	P

Conclusion: PASS

A.3. Frequency Band Edges - Conducted

Method of Measurement: See ANSI C63.10-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel No.	Frequency (MHz)	Hopping	Band Edge Power (dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-54.56	P
39	2480	Hopping OFF	Fig.2	-56.94	P

Conclusion: PASS

Test graphs as below

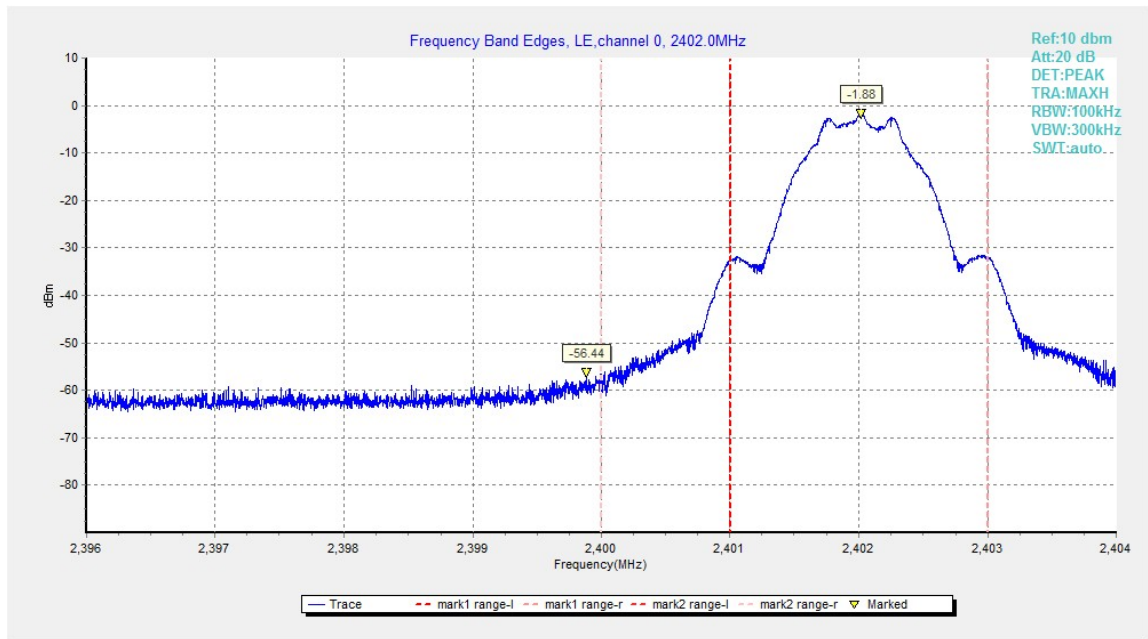


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

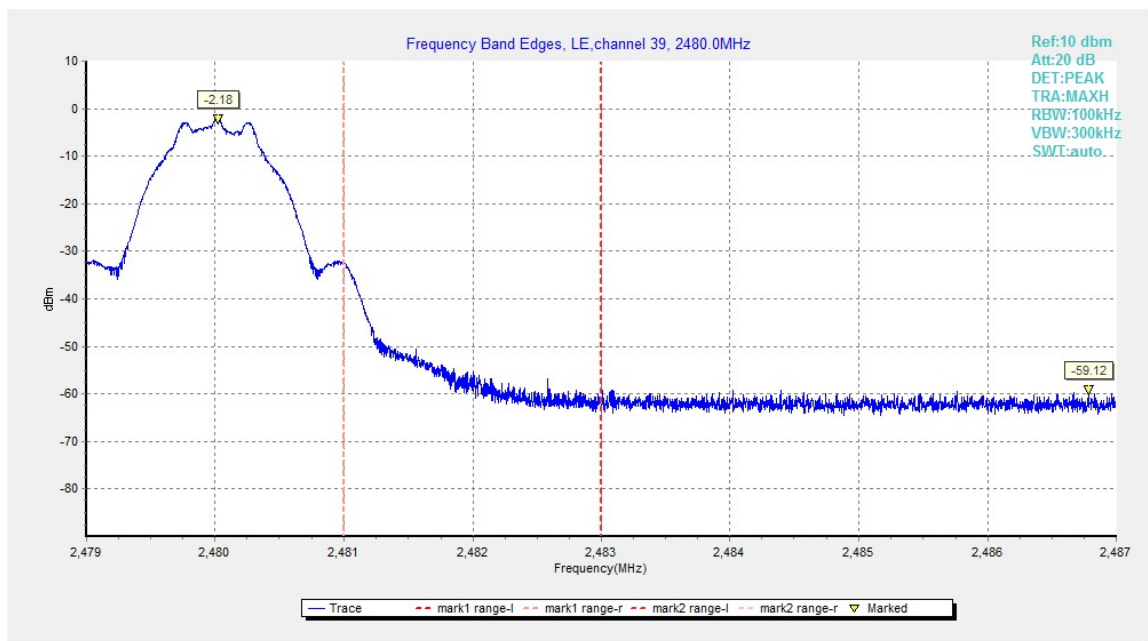


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off



A.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to ≥ 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
 2. Set VBW = 300 kHz.
 3. Set span to encompass the spectrum to be examined.
 4. Detector = peak.
 5. Trace Mode = max hold.
 6. Sweep = auto couple.
 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:
For GFSK

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

Conclusion: PASS

Test graphs as below

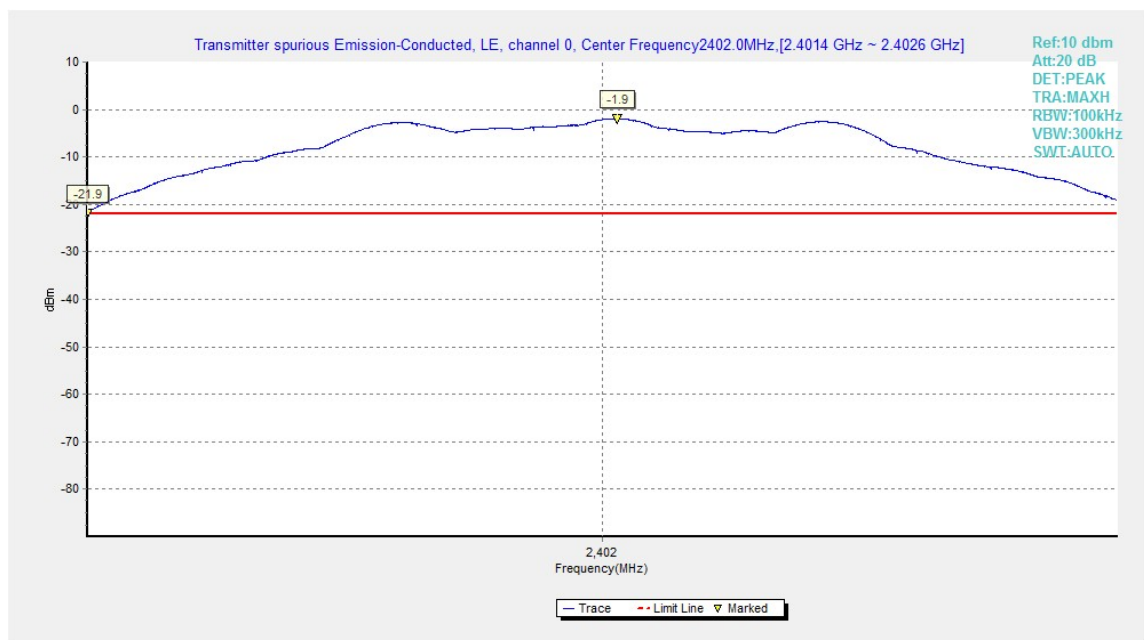


Fig.3. Transmitter Spurious Emission - Conducted: GFSK, 2402MHz

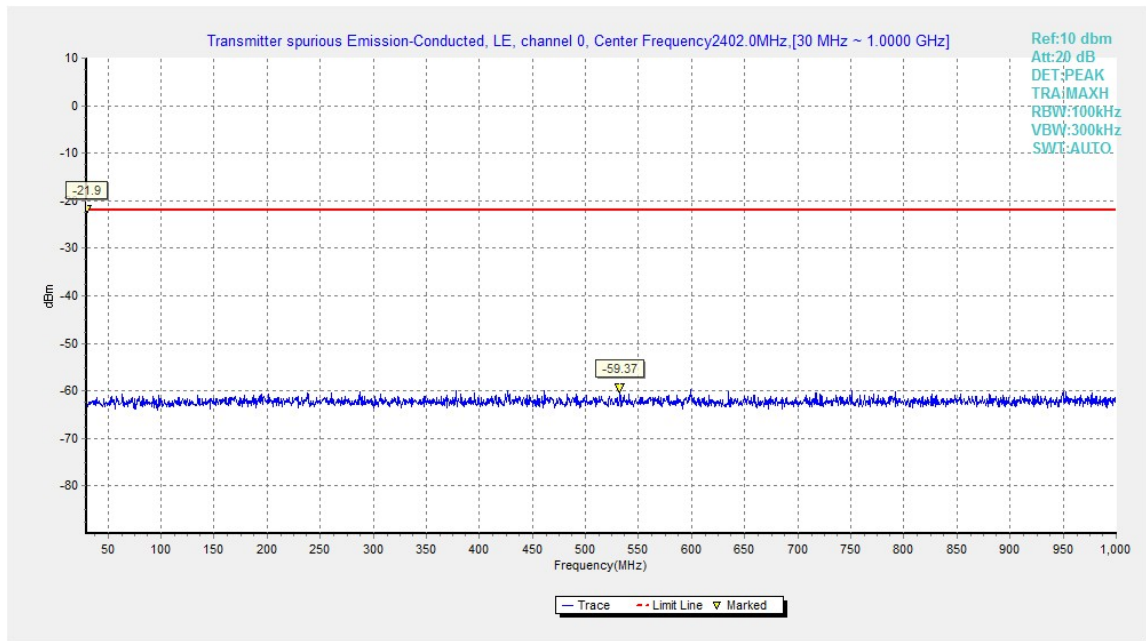


Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

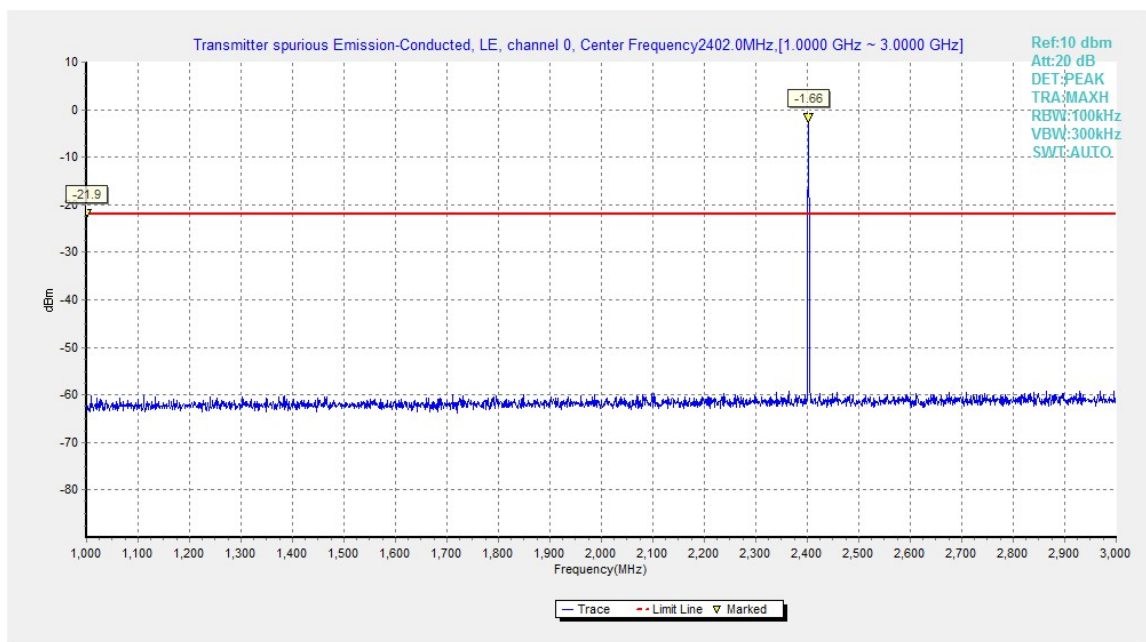


Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

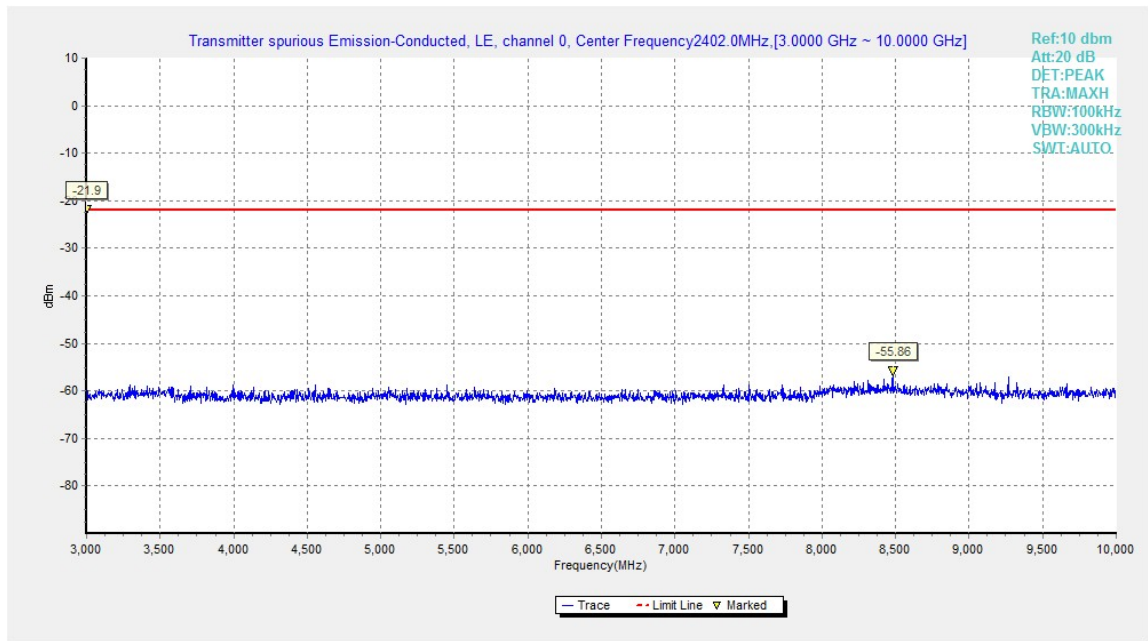


Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 3GHz - 10GHz

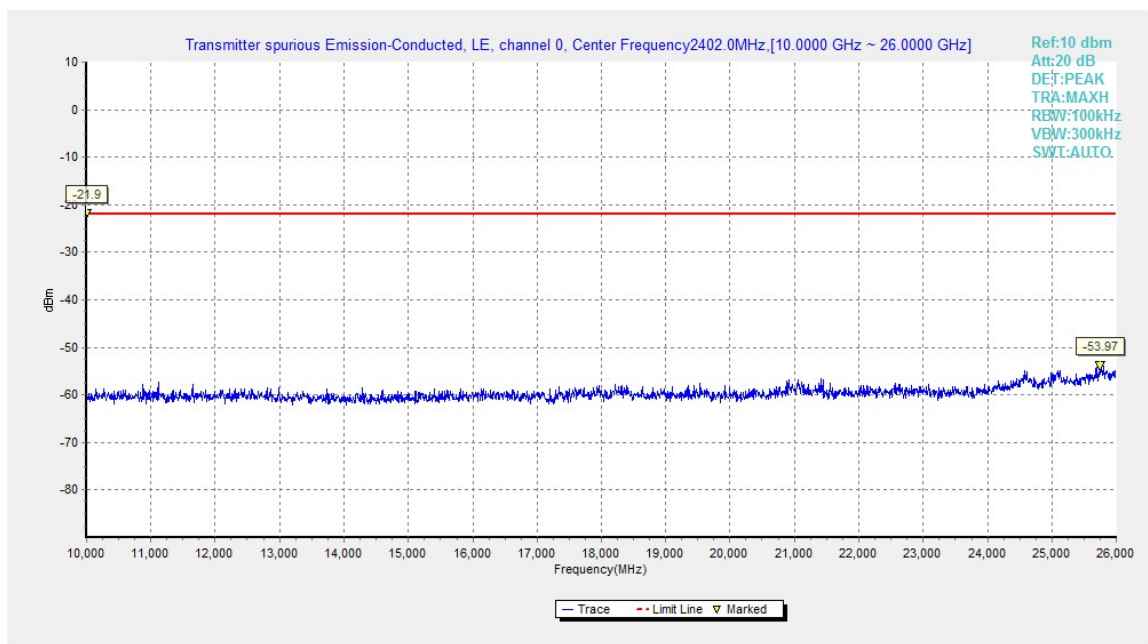


Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 10GHz - 26GHz

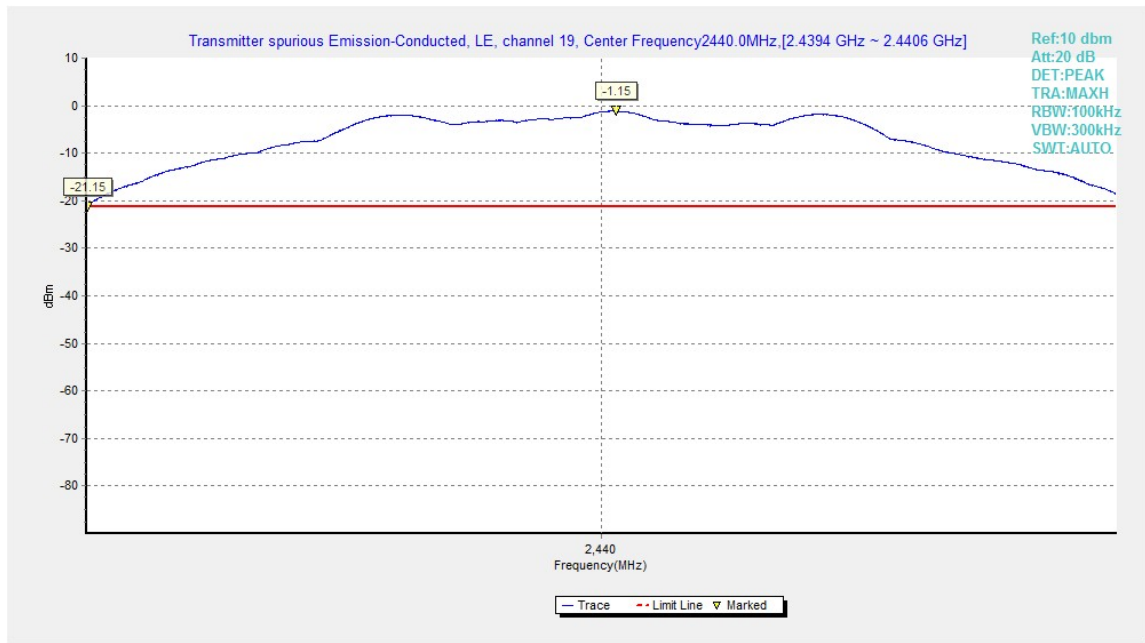


Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

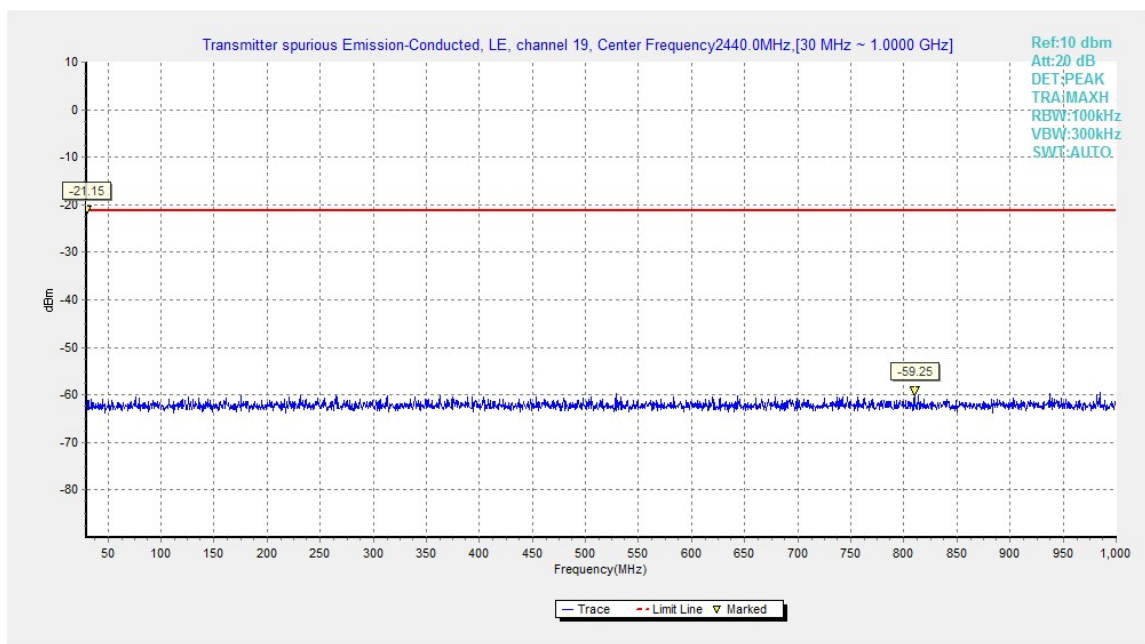


Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

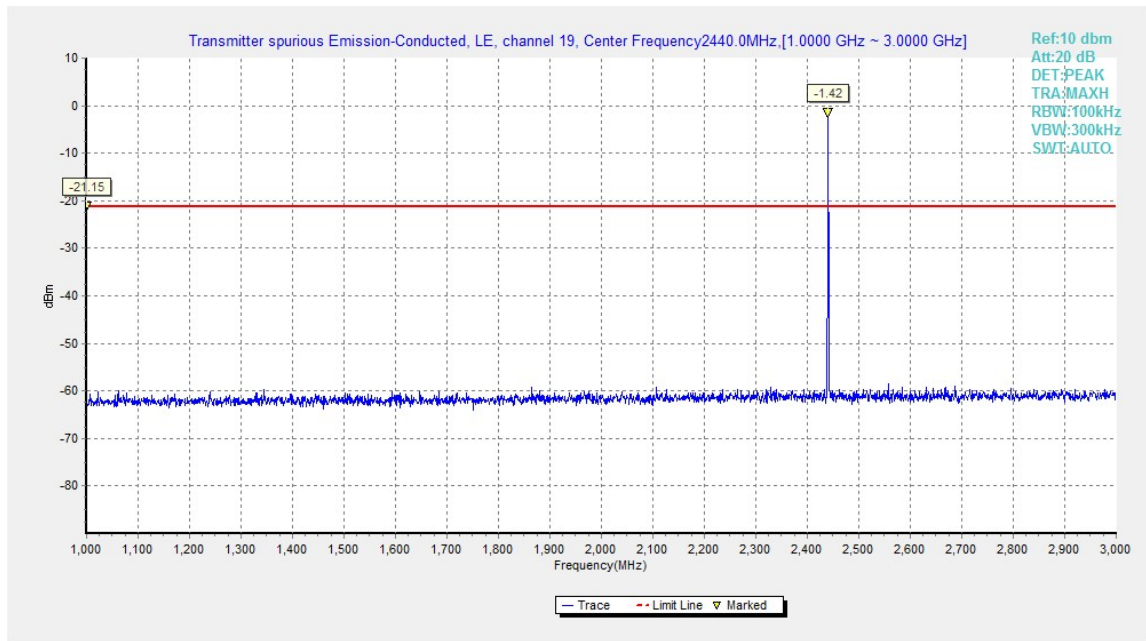


Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

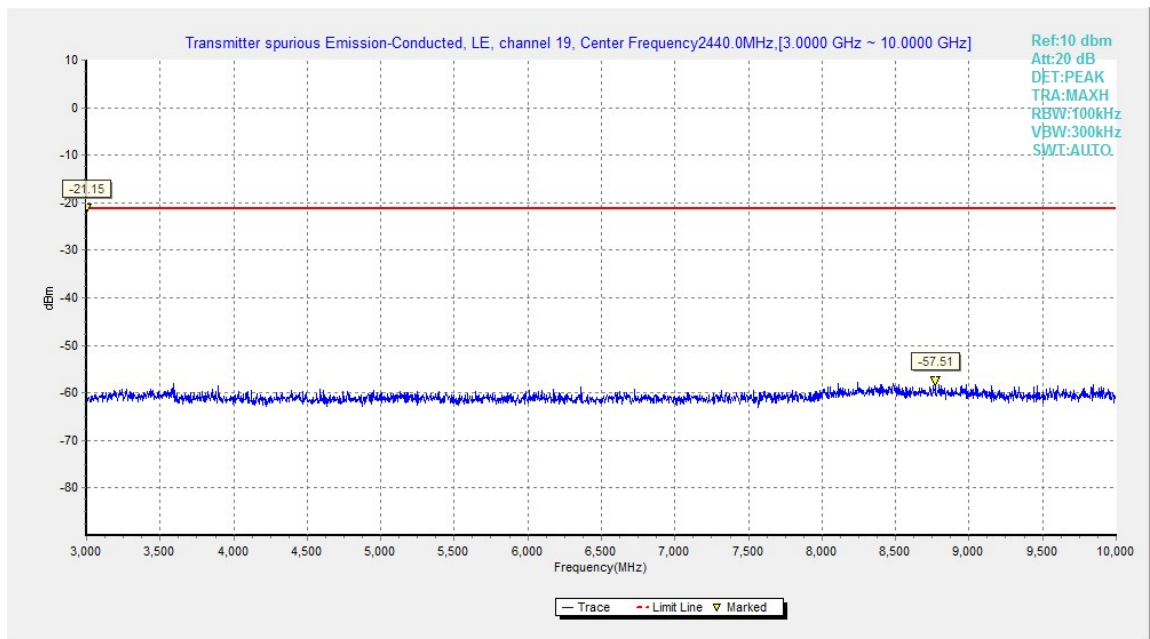


Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

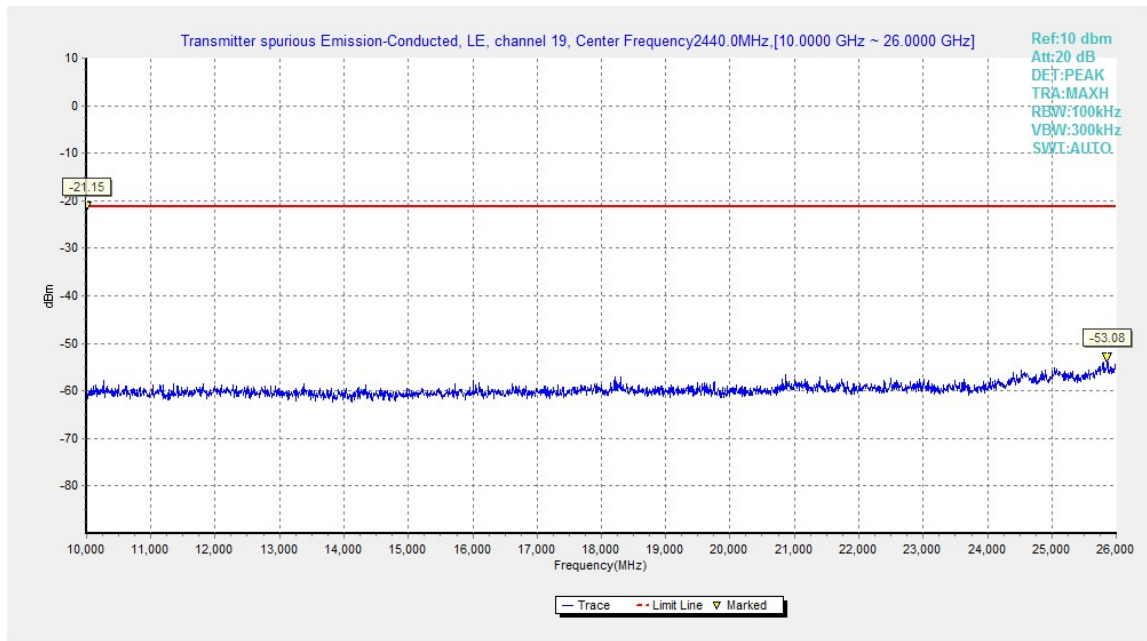


Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

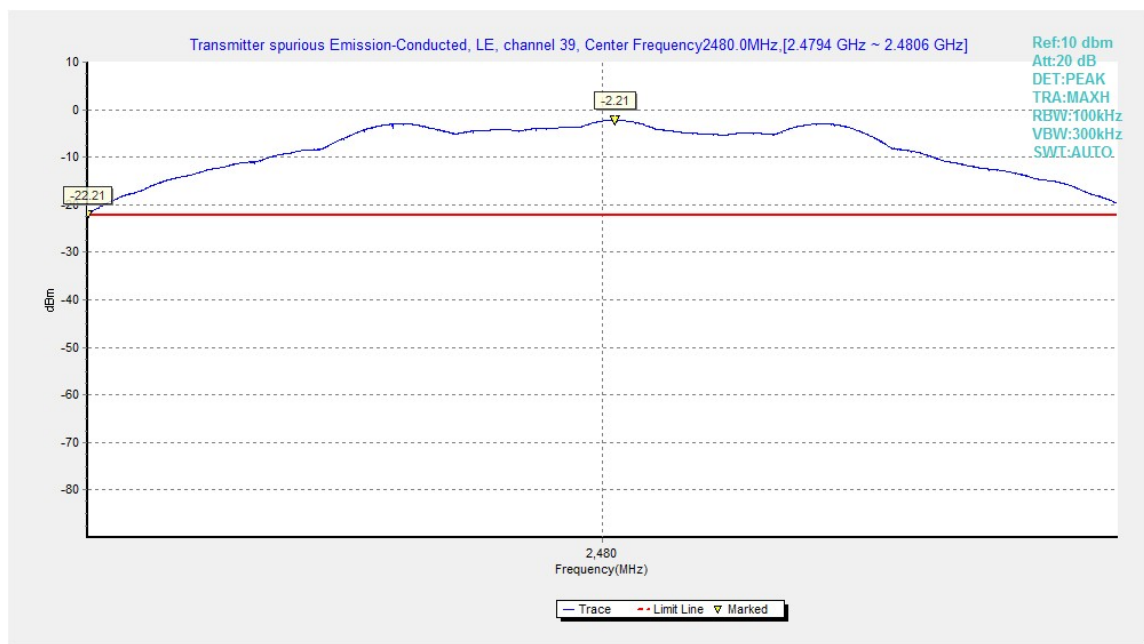


Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

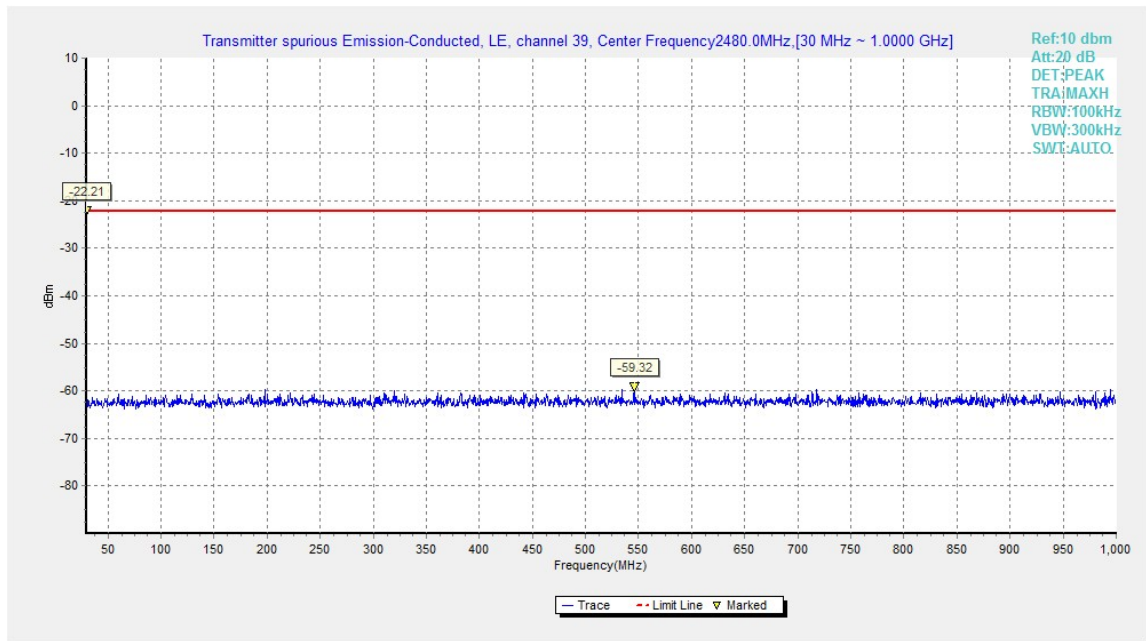


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

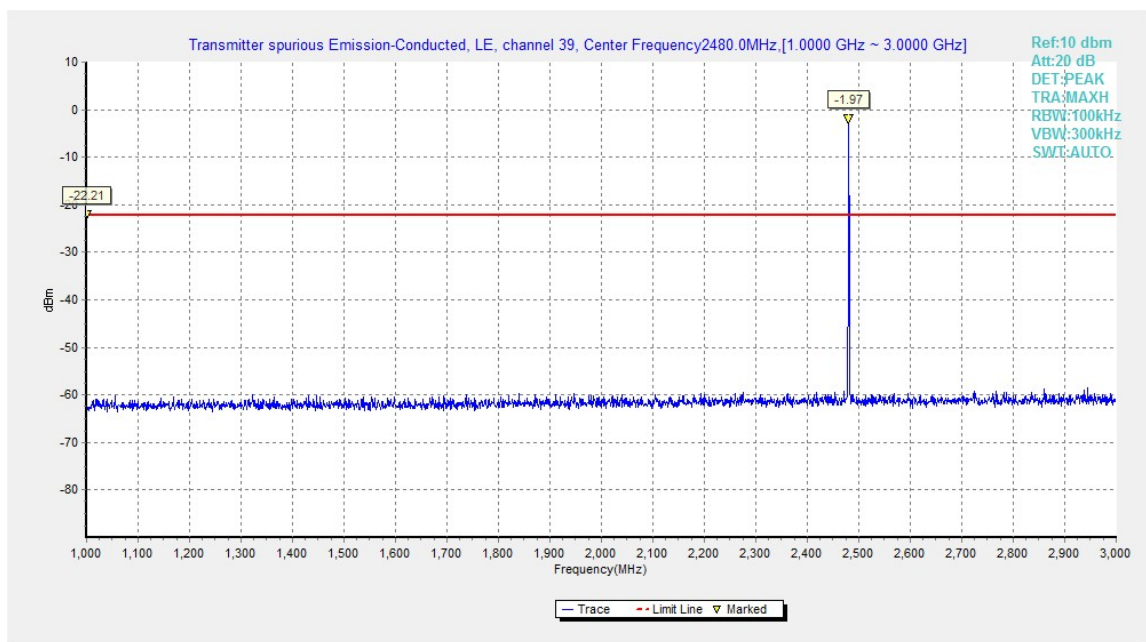


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

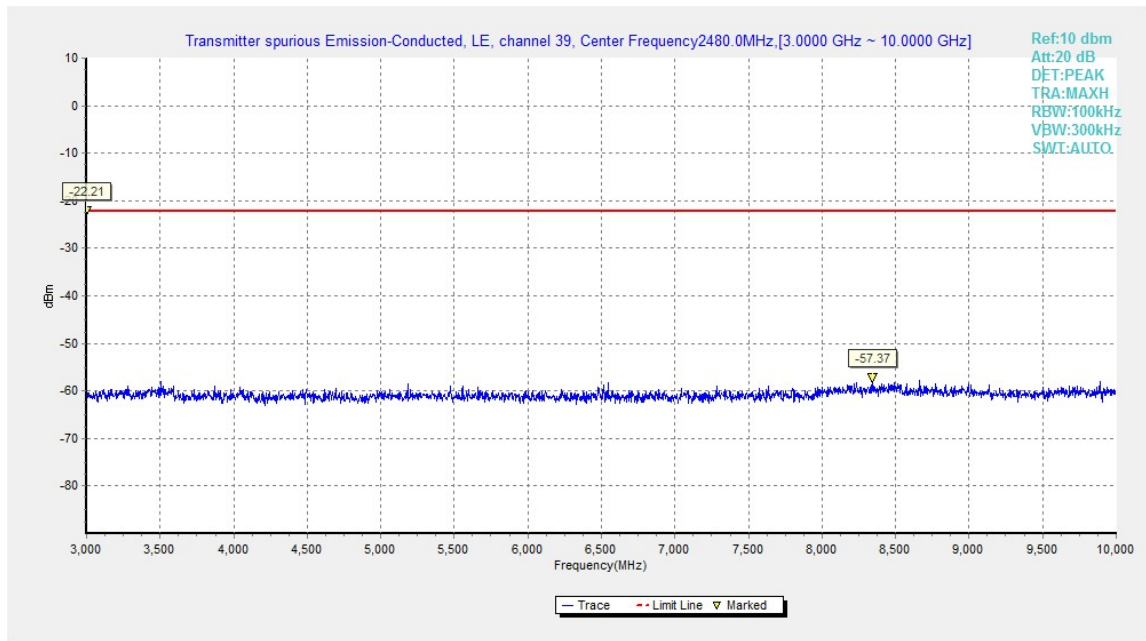


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

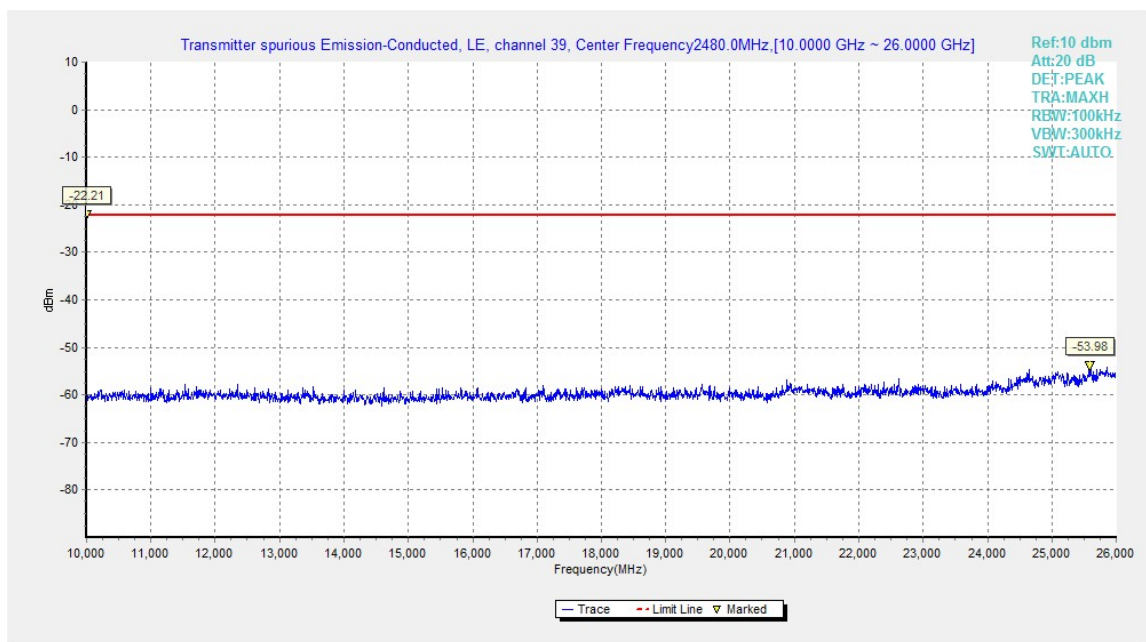


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl}$$

For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	Fig.18	P
	3 GHz ~ 18 GHz	Fig.19	P
2441 MHz	9 kHz ~ 30 MHz	Fig.20	P
	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P



2480 MHz	1 GHz ~ 3 GHz	Fig.24	P
	3 GHz ~ 18 GHz	Fig.25	P
Power	2.38GHz~2.4GHz---L	Fig.26	P
Power	2.45GHz~2.5GHz---H	Fig.27	P
For all channels	18 GHz ~ 26.5 GHz	Fig.28	P

GFSK 2402MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2387.435	42.0	-11.1	53.1	H
17986.875	50.0	27.9	22.1	H
17998.594	49.9	27.9	22.0	V
17989.688	49.8	27.9	21.9	H
17983.594	49.8	27.9	21.9	H
17997.656	49.7	27.9	21.8	H

GFSK 2440MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
17992.031	50.1	27.9	22.2	H
17983.125	50.1	27.9	22.2	H
17997.656	50.0	27.9	22.1	V
17996.719	49.9	27.9	22.0	H
17986.406	49.9	27.9	22.0	H
17997.188	49.9	27.9	22.0	H

GFSK 2480MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2496.460	42.0	-11.2	53.2	H
17996.719	50.0	27.9	22.1	H
17997.188	49.9	27.9	22.0	V
17993.906	49.9	27.9	22.0	H
17982.656	49.8	27.9	21.9	H
17985.000	49.8	27.9	21.9	H

GFSK 2402MHz–Peak

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2387.425	53.2	-11.1	64.3	H
17978.906	61.5	27.9	33.6	H
17999.063	60.7	27.9	32.8	V
17968.125	60.6	27.9	32.7	H
17994.844	60.4	27.9	32.5	H
17978.438	60.4	27.9	32.5	H

GFSK 2440MHz–Peak

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
17987.813	61.3	27.9	33.4	H
17992.969	61.3	27.9	33.4	H
17983.125	60.9	27.9	33.0	V
17980.313	60.5	27.9	32.6	H
17994.375	60.4	27.9	32.5	H
17986.406	60.4	27.9	32.5	H

GFSK 2480MHz–Peak

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2496.485	53.2	-11.2	64.4	H
17983.594	61.7	27.9	33.8	H
17996.719	61.0	27.9	33.1	V
17994.375	60.9	27.9	33.0	H
17999.531	60.8	27.9	32.9	H
17985.938	60.8	27.9	32.9	H

Sample calculation: GFSK 2480MHz–Peak, 2496.485MHz

Peak ERP(dBm) = $P_{Mea}(64.4 \text{ dBuV/m}) + A_{Rpl}(-11.2 \text{ dB}) = 53.2 \text{ dBuV/m}$

Conclusion: PASS

Test graphs as below:

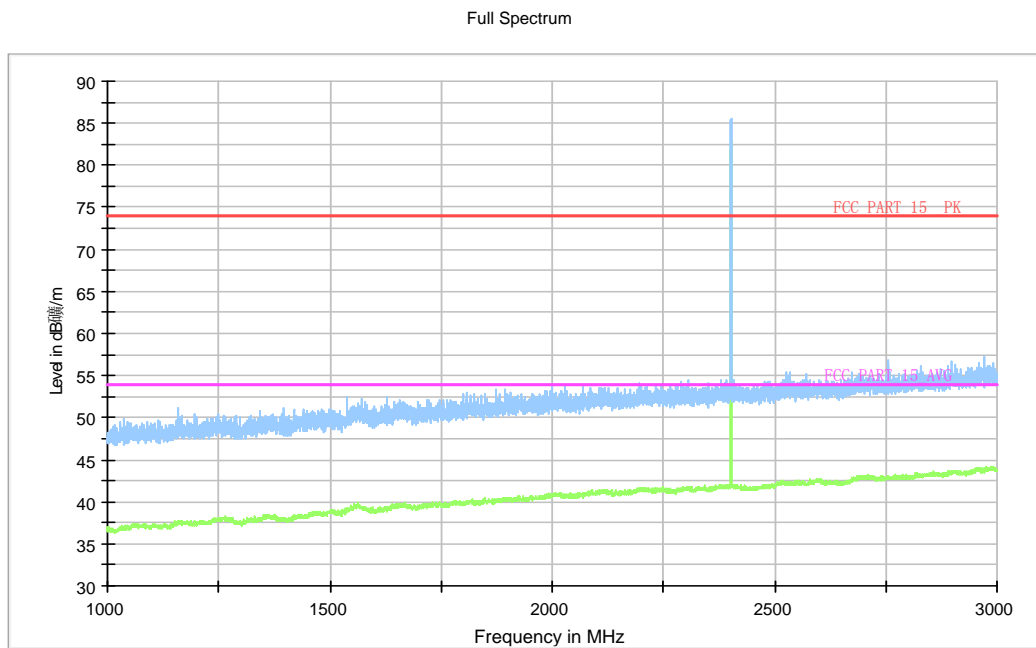


Fig.18. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 1 GHz - 3GHz

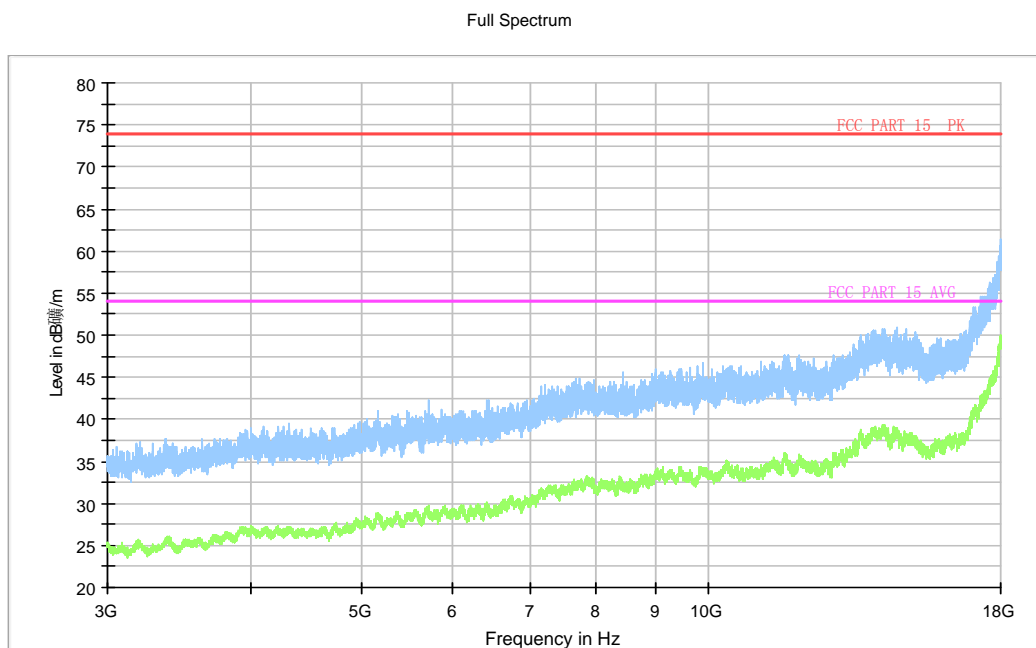


Fig.19. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 3 GHz - 18 GHz

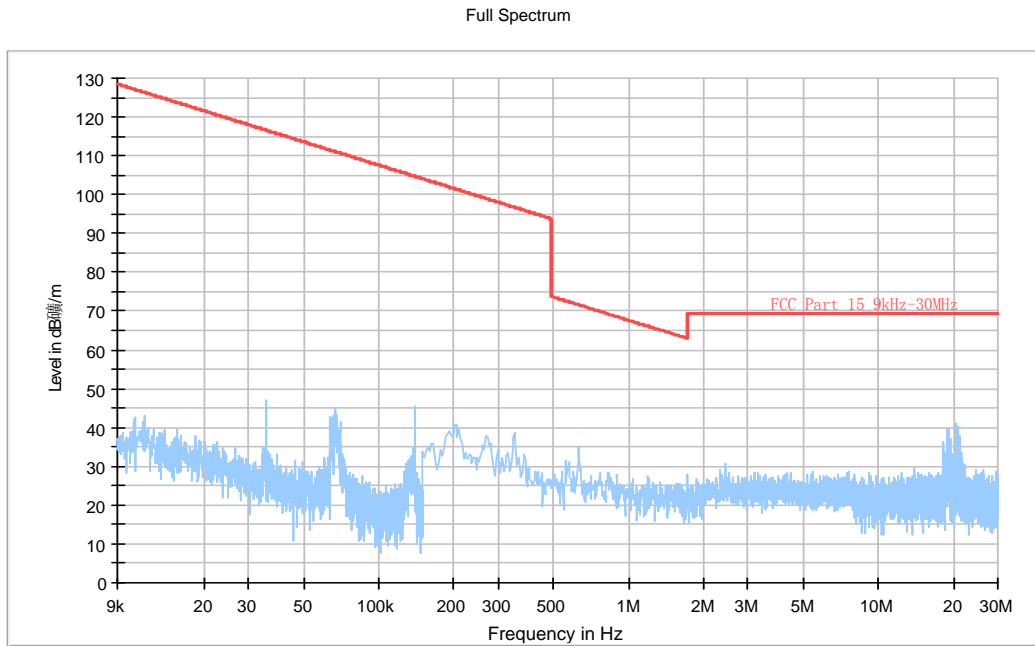


Fig.20. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 9 kHz - 30 MHz

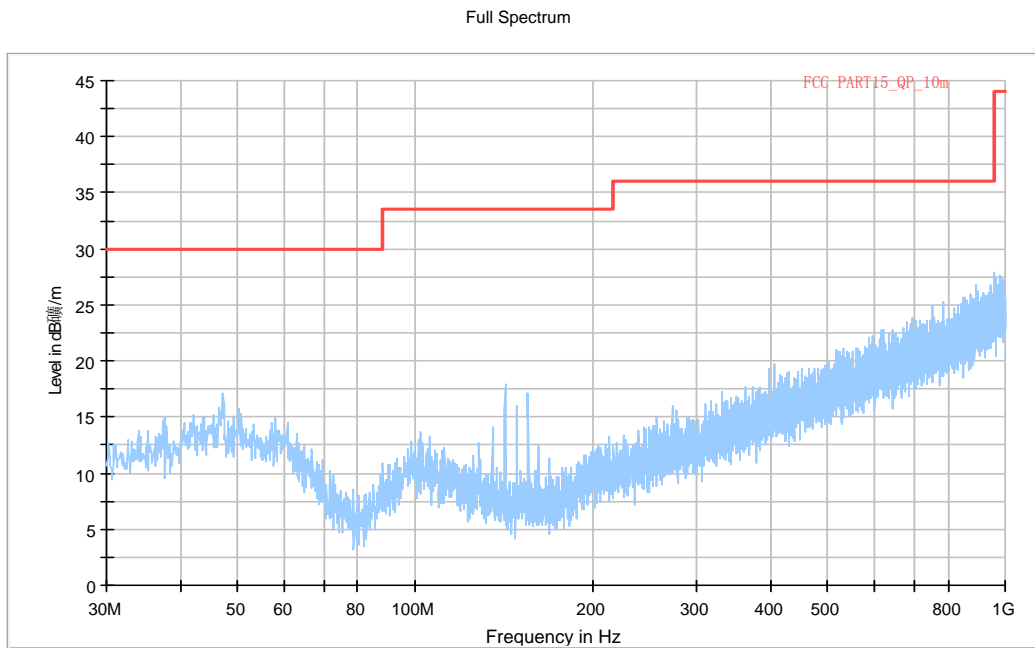


Fig.21. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 30 MHz - 1 GHz

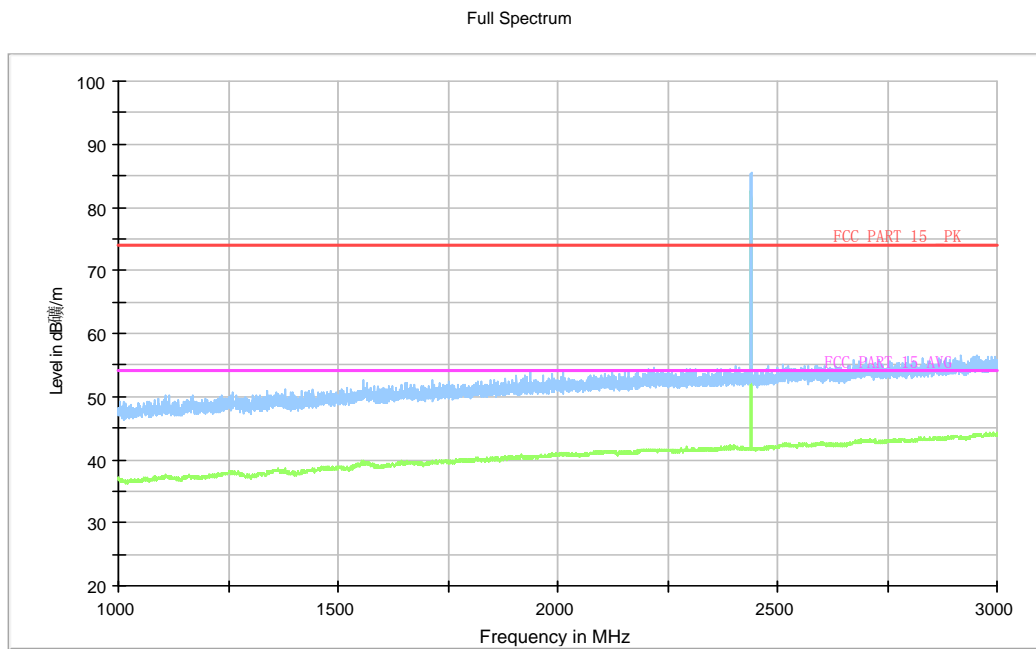


Fig.22. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 1 GHz - 3 GHz

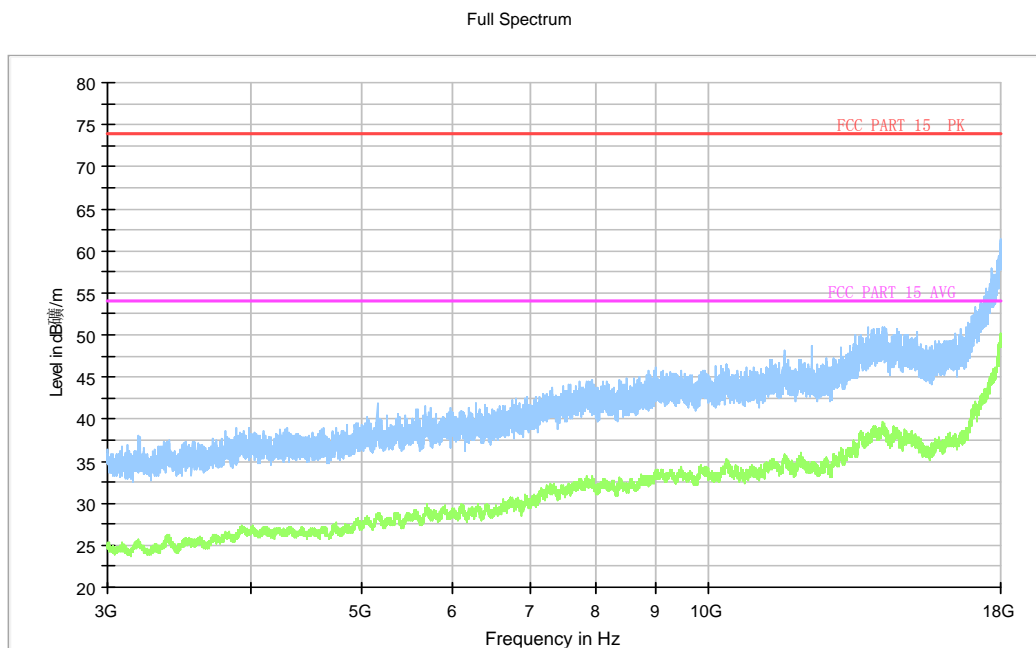


Fig.23. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 3 GHz - 18 GHz

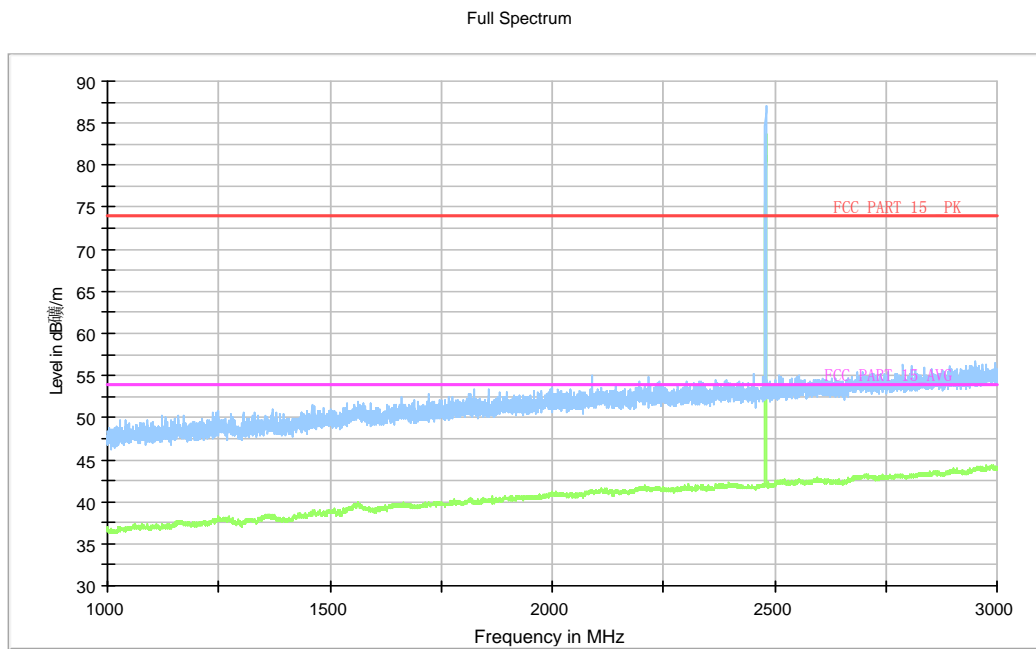


Fig.24. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 1 GHz - 3 GHz

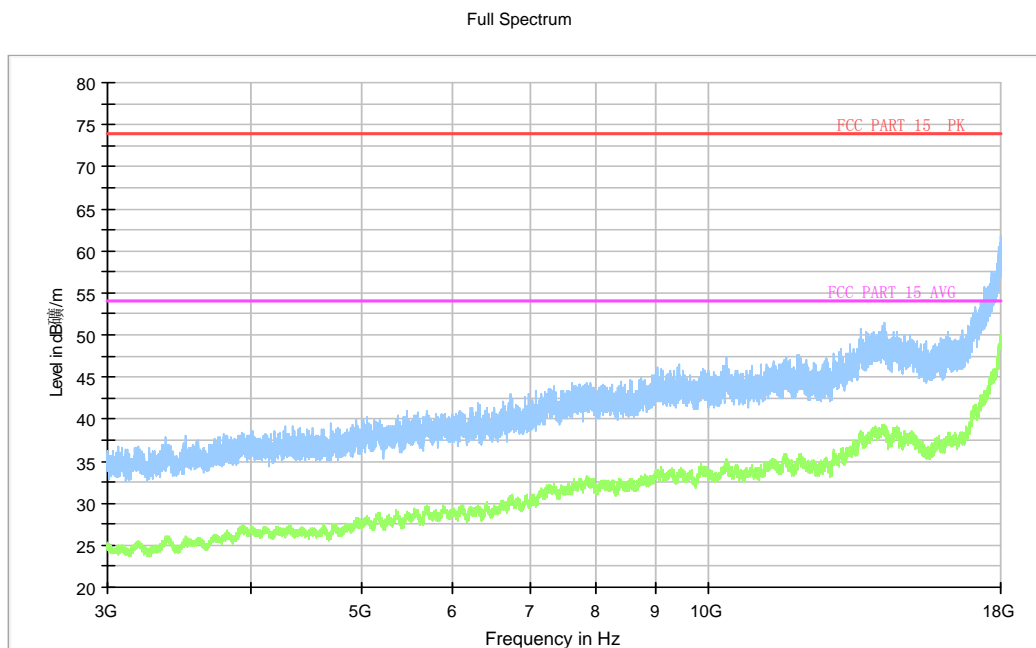


Fig.25. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 3 GHz - 18 GHz

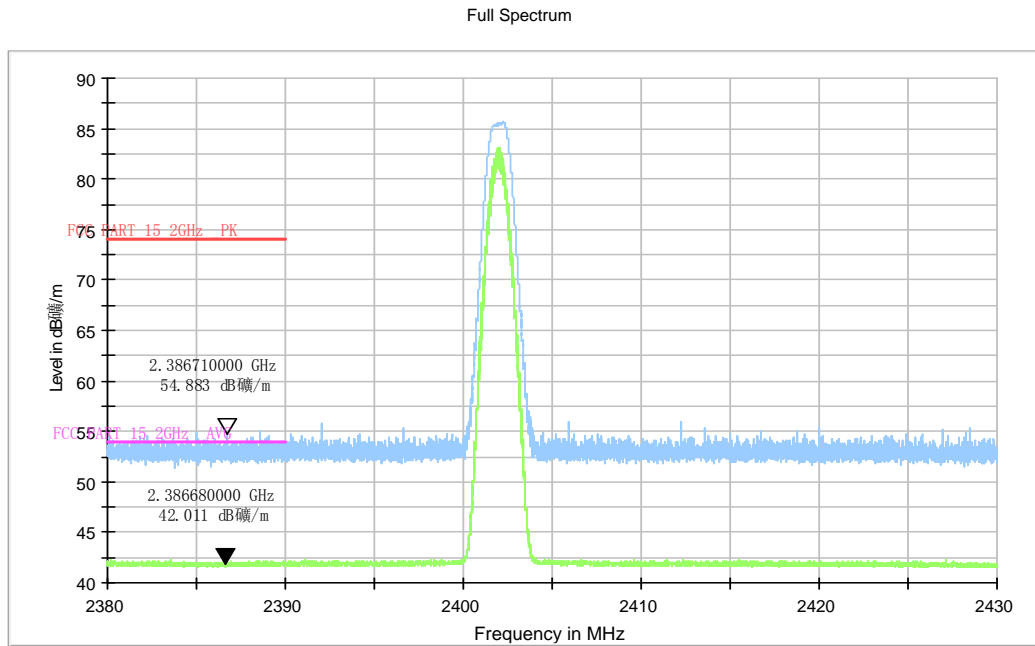


Fig.26. Transmitter Spurious Emission - Radiated (Power): GFSK low channel

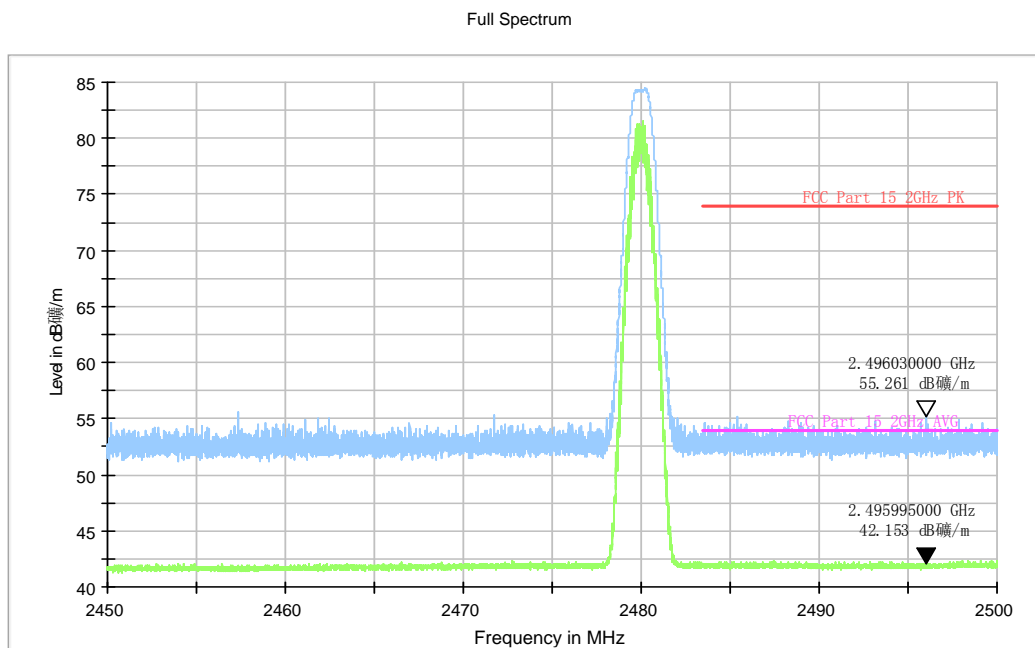


Fig.27. Transmitter Spurious Emission - Radiated (Power): GFSK high channel

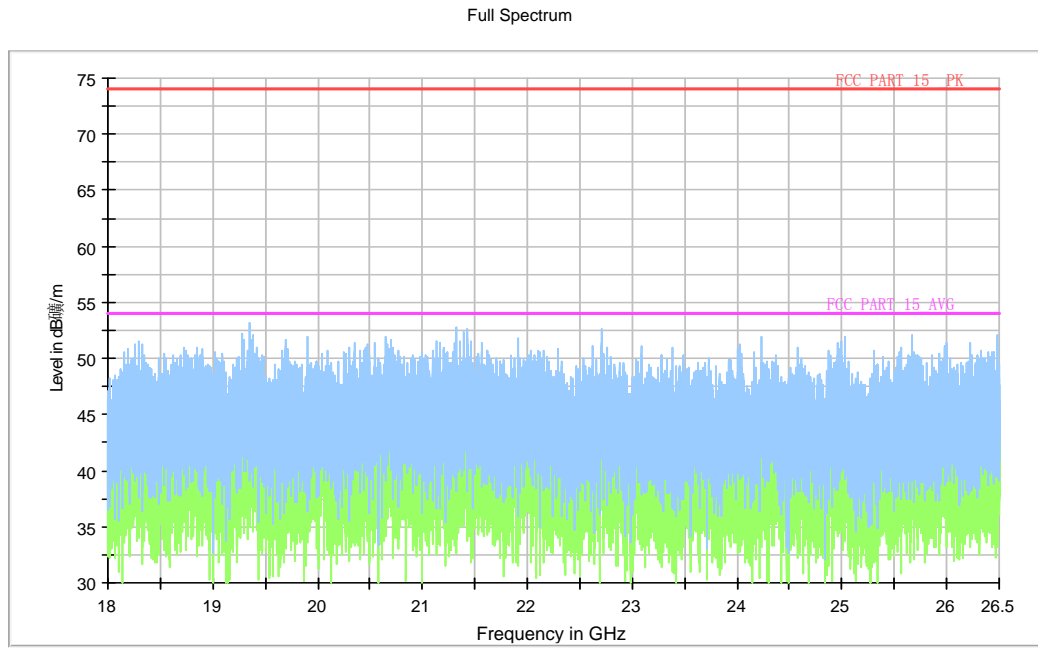


Fig.28. Transmitter Spurious Emission - Radiated: GFSK, 18 GHz - 26 GHz



A.6. 6dB Bandwidth

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.29	665.00	P
19	2440	Fig.30	671.00	P
39	2480	Fig.31	666.00	P

Conclusion: PASS

Test graphs as below:

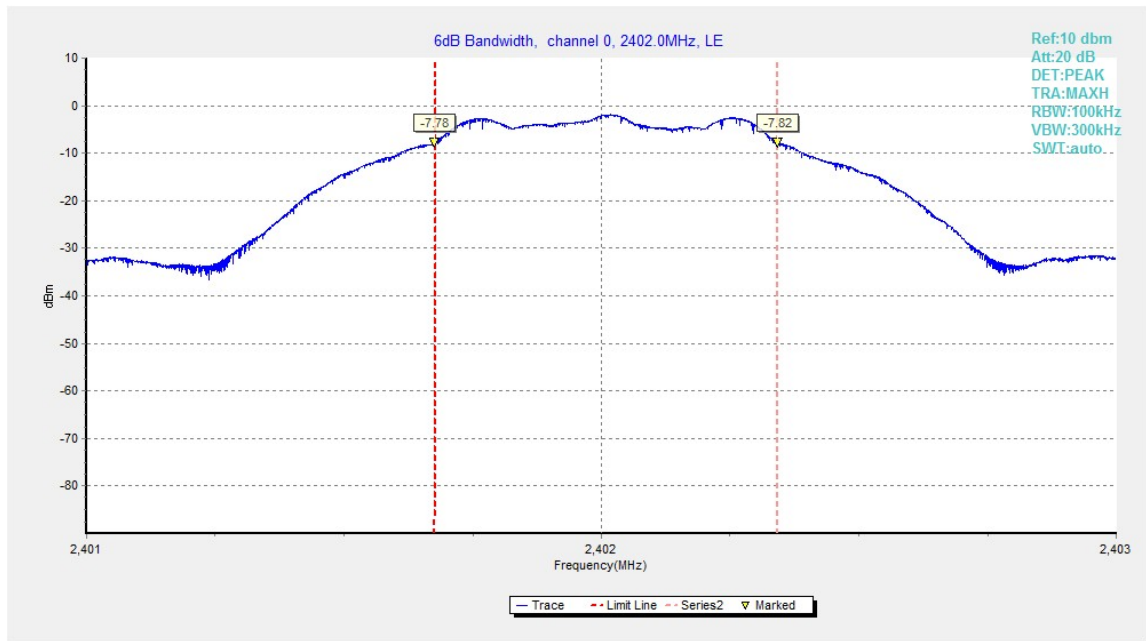


Fig.29. 6dB Bandwidth: GFSK, 2402 MHz

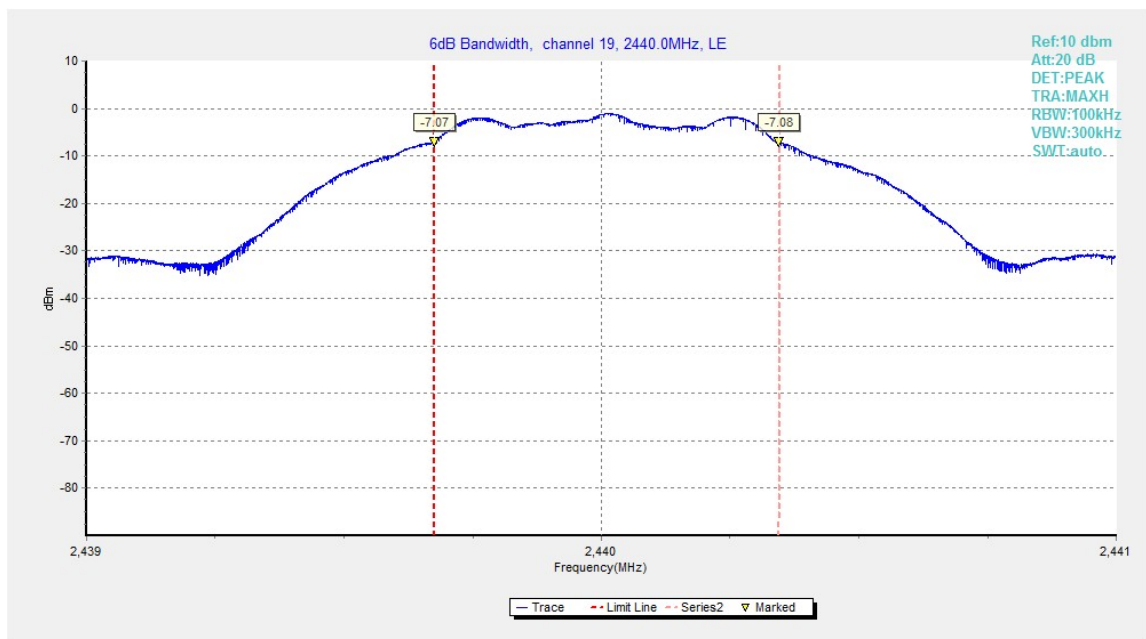


Fig.30. 6dB Bandwidth: GFSK, 2440 MHz

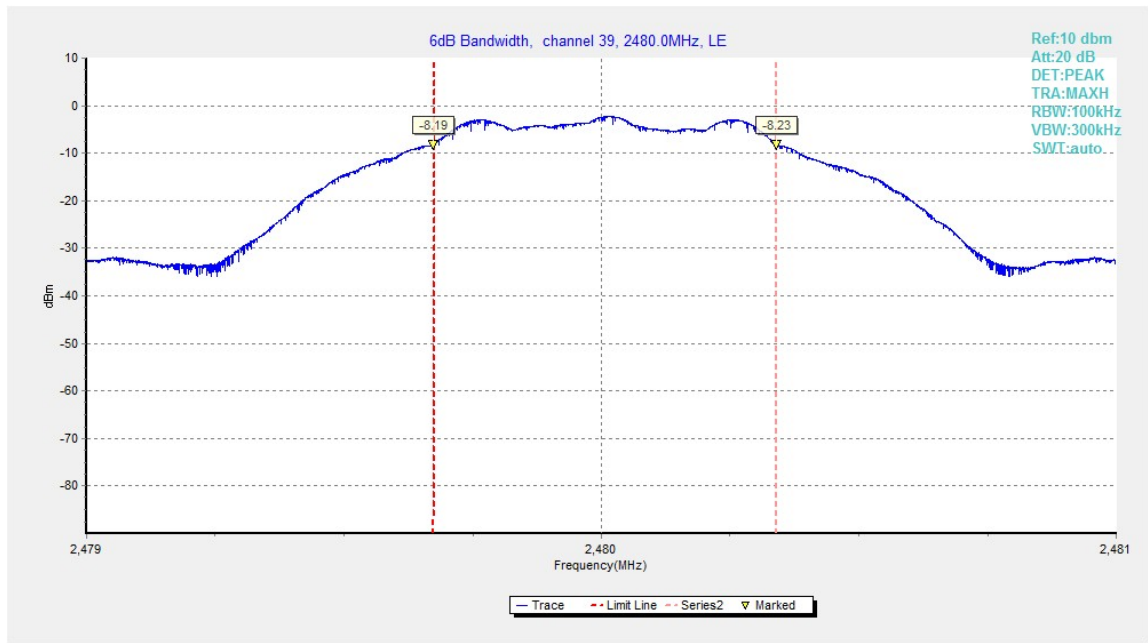


Fig.31. 6dB Bandwidth: GFSK, 2480 MHz

A.7. Maximum Power Spectral Density Level

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
0	2402	Fig.32	-16.95	P
19	2440	Fig.33	-16.29	P
39	2480	Fig.34	-17.24	P

Test graphs as below:

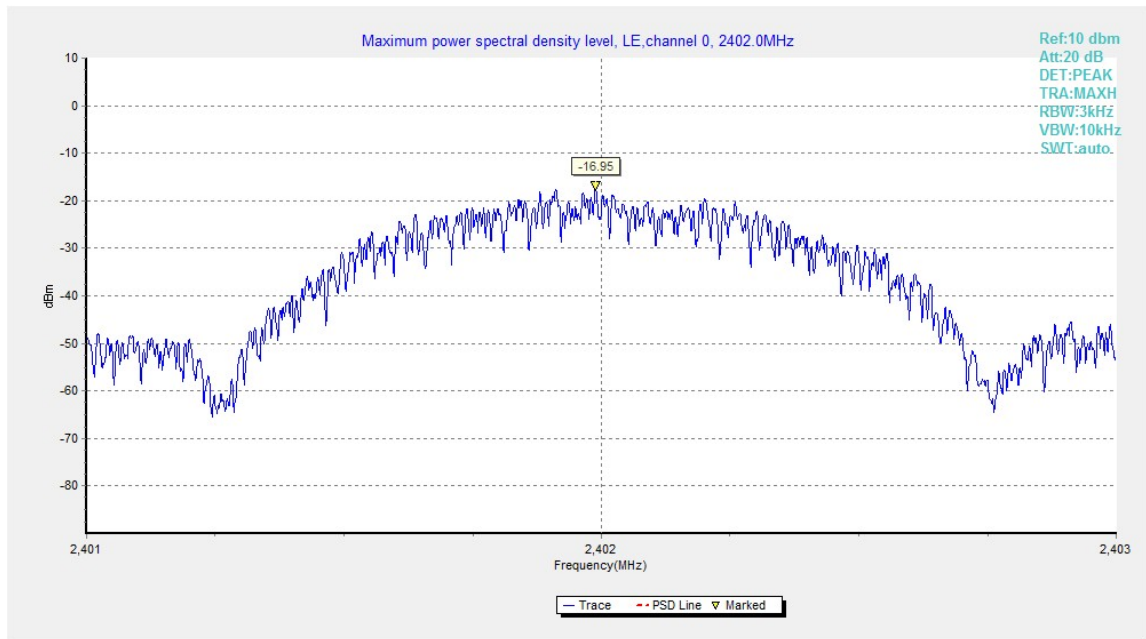


Fig.32. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

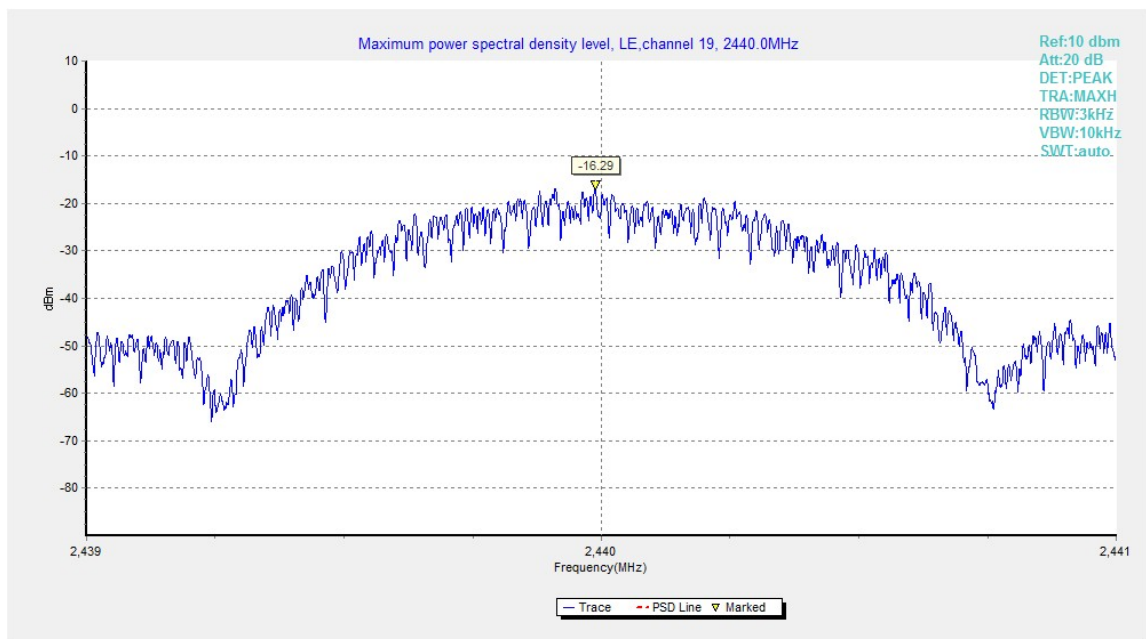


Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

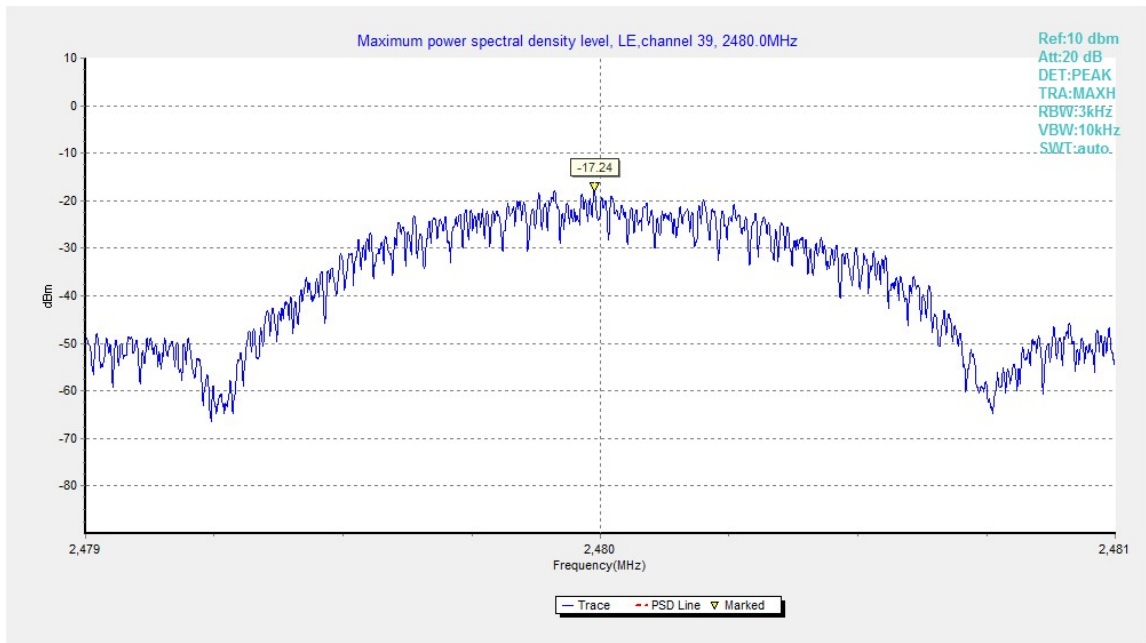


Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

A.8. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic (CBA0060AGHC1):

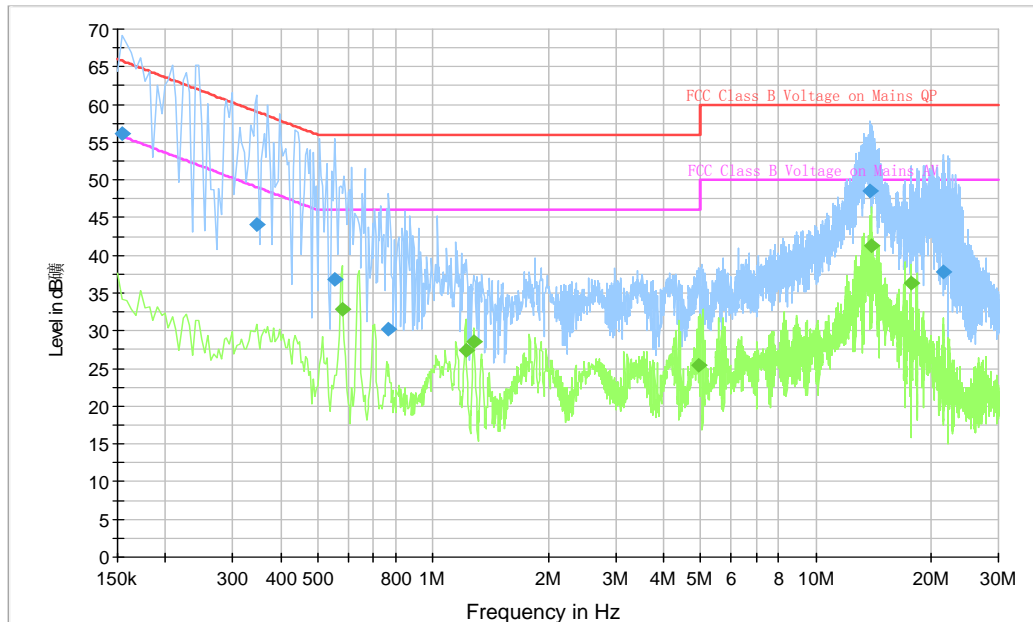


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	56.1	2000.0	9.000	On	N	20.0	9.6	65.8
0.348000	44.1	2000.0	9.000	On	N	19.9	14.9	59.0
0.555000	36.8	2000.0	9.000	On	N	19.9	19.2	56.0
0.766500	30.2	2000.0	9.000	On	N	19.8	25.8	56.0
13.884000	48.5	2000.0	9.000	On	L1	19.8	11.5	60.0
21.610500	37.7	2000.0	9.000	On	L1	20.0	22.3	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.577500	32.8	2000.0	9.000	On	L1	19.9	13.2	46.0
1.216500	27.4	2000.0	9.000	On	L1	19.7	18.6	46.0
1.275000	28.6	2000.0	9.000	On	L1	19.7	17.4	46.0
4.951500	25.5	2000.0	9.000	On	L1	19.6	20.5	46.0
13.951500	41.2	2000.0	9.000	On	L1	19.8	8.8	50.0
17.754000	36.3	2000.0	9.000	On	N	19.9	13.7	50.0

Idle (CBA0060AGHC1):

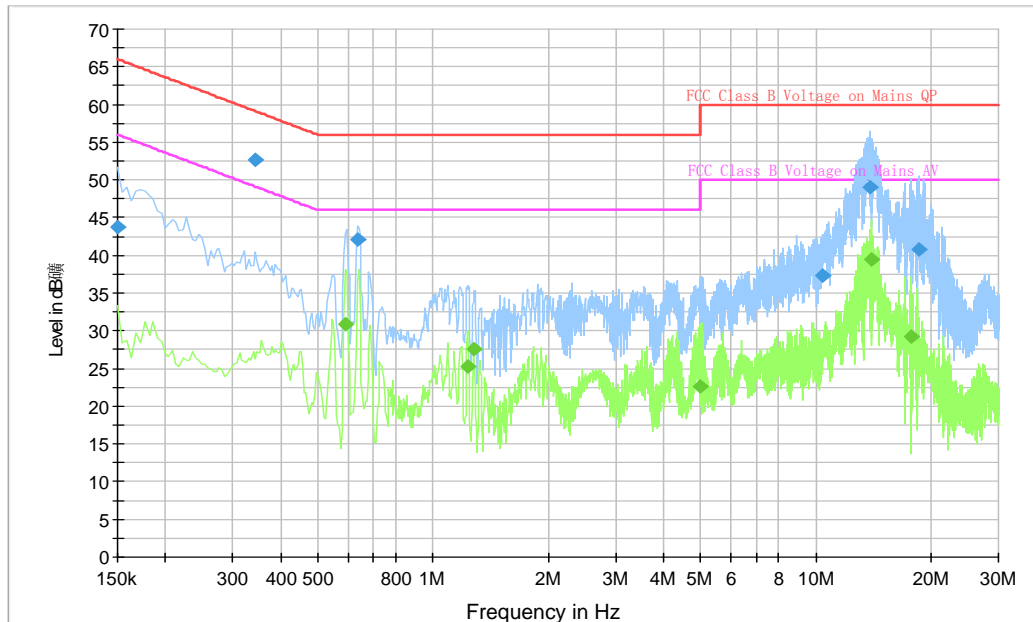


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.7	2000.0	9.000	On	L1	20.2	22.3	66.0
0.343500	52.7	2000.0	9.000	On	N	19.9	6.4	59.1
0.636000	42.1	2000.0	9.000	On	N	19.8	13.9	56.0
10.396500	37.4	2000.0	9.000	On	L1	19.7	22.6	60.0
13.852500	49.0	2000.0	9.000	On	L1	19.8	11.0	60.0
18.609000	40.8	2000.0	9.000	On	N	19.9	19.2	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.591000	30.8	2000.0	9.000	On	L1	19.8	15.2	46.0
1.230000	25.2	2000.0	9.000	On	L1	19.7	20.8	46.0
1.279500	27.5	2000.0	9.000	On	L1	19.7	18.5	46.0
4.992000	22.6	2000.0	9.000	On	L1	19.6	23.4	46.0
14.001000	39.5	2000.0	9.000	On	L1	19.8	10.5	50.0
17.727000	29.3	2000.0	9.000	On	N	19.9	20.7	50.0

Traffic (CBA0060ACHC1):

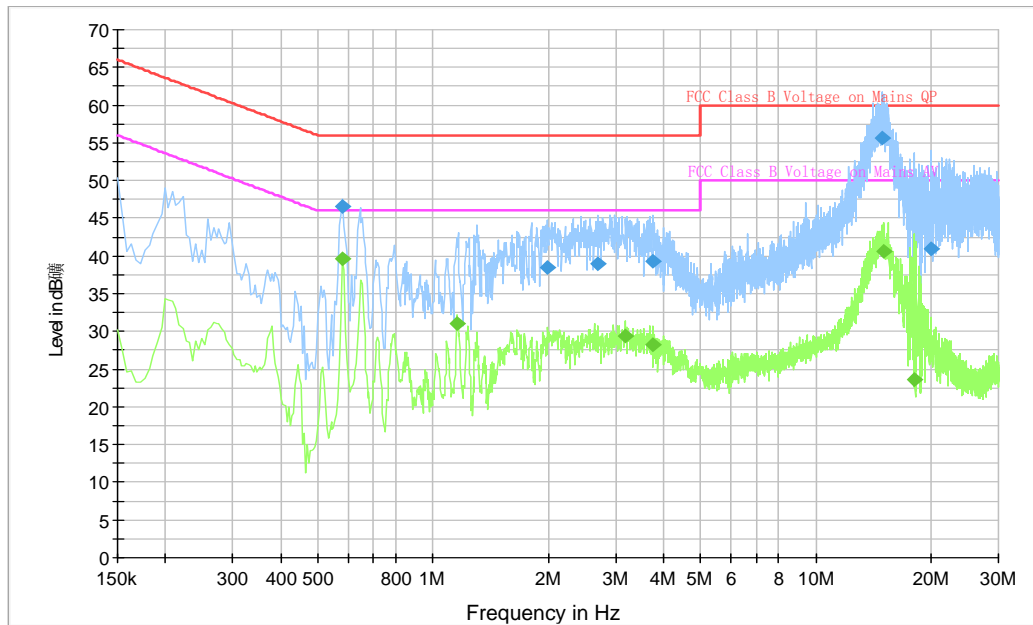


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.577500	46.5	2000.0	9.000	On	N	19.9	9.5	56.0
1.986000	38.4	2000.0	9.000	On	N	19.7	17.6	56.0
2.706000	39.0	2000.0	9.000	On	N	19.2	17.0	56.0
3.768000	39.3	2000.0	9.000	On	L1	19.5	16.7	56.0
14.941500	55.7	2000.0	9.000	On	N	19.8	4.3	60.0
20.067000	40.9	2000.0	9.000	On	L1	19.9	19.1	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.577500	39.7	2000.0	9.000	On	N	19.9	6.3	46.0
1.153500	31.0	2000.0	9.000	On	N	19.7	15.0	46.0
3.183000	29.4	2000.0	9.000	On	N	19.3	16.6	46.0
3.768000	28.3	2000.0	9.000	On	L1	19.5	17.7	46.0
15.031500	40.7	2000.0	9.000	On	L1	19.8	9.3	50.0
18.069000	23.6	2000.0	9.000	On	N	19.9	26.4	50.0

Traffic (CBA0060AJHC1):

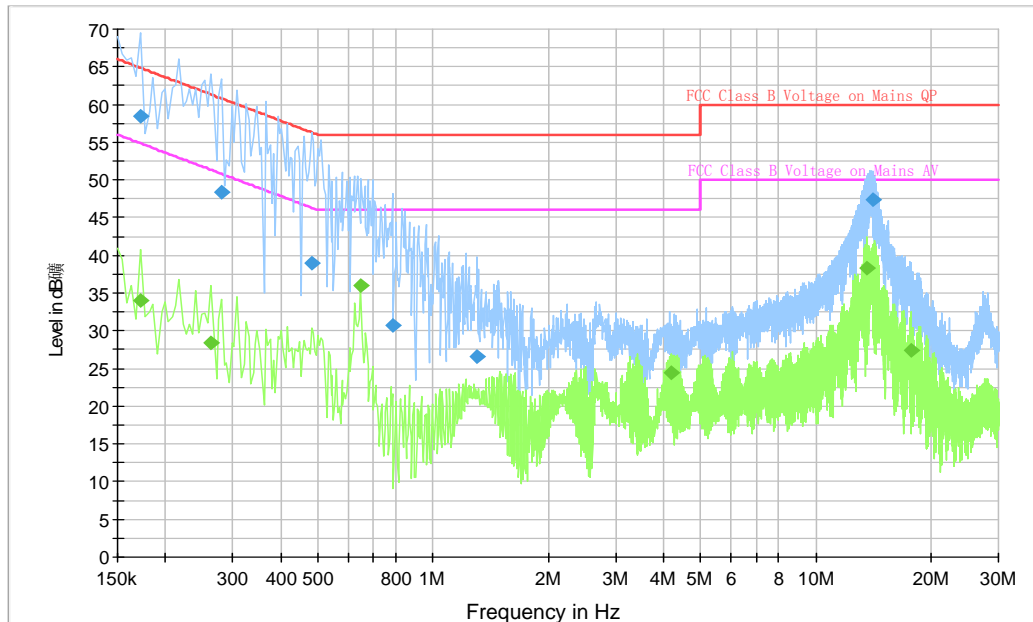

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.172500	58.5	2000.0	9.000	On	N	19.8	6.3	64.8
0.280500	48.4	2000.0	9.000	On	N	19.8	12.4	60.8
0.483000	38.9	2000.0	9.000	On	N	19.9	17.4	56.3
0.784500	30.6	2000.0	9.000	On	N	19.8	25.4	56.0
1.306500	26.6	2000.0	9.000	On	N	19.7	29.4	56.0
14.046000	47.4	2000.0	9.000	On	L1	19.8	12.6	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.172500	34.0	2000.0	9.000	On	N	19.8	20.8	54.8
0.262500	28.4	2000.0	9.000	On	N	19.8	22.9	51.4
0.645000	36.0	2000.0	9.000	On	N	19.8	10.0	46.0
4.195500	24.5	2000.0	9.000	On	N	19.6	21.5	46.0
13.623000	38.2	2000.0	9.000	On	N	19.8	11.8	50.0
17.754000	27.4	2000.0	9.000	On	N	19.9	22.6	50.0

ANNEX E: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2016-09-29 through 2017-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

END OF REPORT