



TEST REPORT

No. I18Z60261-EMC04

for

TCL Communication Ltd.

GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile phone

Model Name: BBE100-1

FCC ID: 2ACCJN028

with

Hardware Version: 04

Software Version: V6R13-6

Issued Date: 2018-07-11



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z60261-EMC04	Rev.0	1st edition	2018-06-19
I18Z60261-EMC04	Rev.1	2nd edition	2018-07-11



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China
100191

CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development
Area, Beijing, P. R. China 100176

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2018-05-04

Testing End Date: 2018-06-01

1.4. Signature




Li Yan

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,
Address /Post: Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Shenzhen, Guangdong
Contact Person: Gong Zhizhou
Contact Email zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-75536612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,
Address /Post: Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Shenzhen, Guangdong
Contact Person: Gong Zhizhou
Contact Email zhizhou.gong@tcl.com
Telephone: 0086-755-36611722
Fax: 0086-75536612000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile phone
Model Name	BBE100-1
FCC ID	2ACCJN028
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	04	V6R13-6
EUT2	/	04	V6R13-6

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	USB Cable	/	/
AE5	Charger	/	NO TEST

AE1

Model	TLp029C1
Manufacturer	BYD
Capacitance	2900mAh
Nominal voltage	3.85V

AE2

Model	CBA0064AGBC1
Manufacturer	BYD
Length of cable	/

AE3

Model	CDA0000119CF
Manufacturer	LUXSHARE
Length of cable	/

AE4

Model	CDA0000119C1
Manufacturer	Juwei
Length of cable	/

AE5

Model	CBA0064AHBC1
Manufacturer	BYD



Length of cable /

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+ AE2+ AE3/AE4	Charger
Set.2	EUT1+ AE1+ AE3/AE4	USB mode

Note: GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile phone BBE100-1 manufactured by TCL Communication Ltd. is a variant model based on BBE100-2 for conformance test. According to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, all the test results are derived from test report I18Z60272-EMC01.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17 meters×10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	BR	Re-use test data from basic model report.
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	BR	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	A.2	BR	CTTL(huayuan North Road)



7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	R&S	2019-03-31	1 year
2	Test Receiver	ESCI 7	100344	R&S	2019-02-28	1 year
3	Universal Radio Communication Tester	CMW500	116588	R&S	2018-11-26	1 year
4	LISN	ENV216	101200	R&S	2019-04-15	1 year
5	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2021-01-03	3 years
6	EMI Antenna	3115	6914	ETS-Lindgren	2018-12-31	1 years
7	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
10	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.16dB, 1GHz-18GHz: 5.44dB, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17426.533	41.7	-19.2	41.5	19.400	H
17856.633	41.7	-18.5	45.6	14.600	H
17423.700	41.7	-19.2	41.5	19.400	V
17867.400	41.5	-18.5	45.6	14.400	H
17448.633	41.5	-19.2	41.5	19.200	H
17425.967	41.5	-19.2	41.5	19.200	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17435.033	53.2	-19.2	41.5	30.900	H
17828.300	53.0	-18.5	45.6	25.900	H
17355.133	53.0	-19.5	41.5	31.000	V
17565.367	53.0	-18.9	45.6	26.300	H
17414.633	53.0	-19.2	41.5	30.700	H
17431.067	52.9	-19.2	41.5	30.600	H

Measurement results for Set.2:

USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17435.033	42.2	-19.2	41.5	19.900	H
17444.100	41.8	-19.2	41.5	19.500	H
17441.833	41.7	-19.2	41.5	19.400	V
17432.767	41.7	-19.2	41.5	19.400	H
17760.300	41.6	-18.5	45.6	14.500	H
17451.467	41.6	-19.2	41.5	19.300	H

USB Mode/ Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17725.167	53.9	-18.9	45.6	27.200	H
17544.400	53.7	-19.2	45.6	27.300	H
17877.033	53.5	-18.5	45.6	26.400	V
17169.267	53.5	-19.8	41.5	31.800	H
17257.100	53.5	-19.5	41.5	31.500	H
17964.867	53.4	-17.7	45.6	25.500	H

Note: The measurement results of Set.1 and Set.2 showed here are worst cases of the combinations of different USB cables.

Charging Mode, Set.1

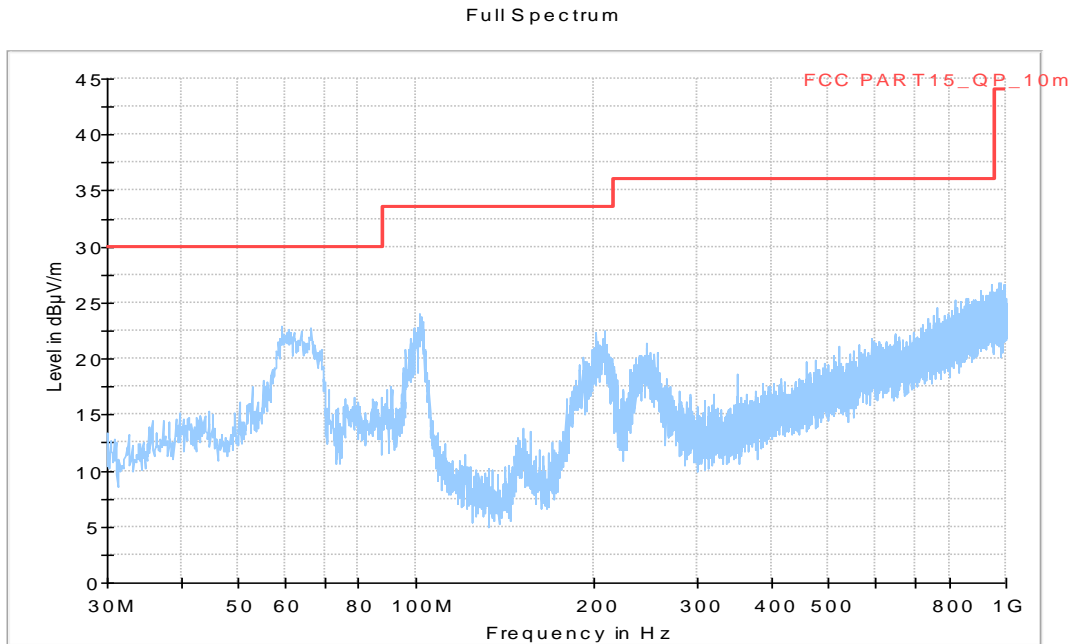


Fig A.1 Radiated Emission from 30MHz to 1GHz

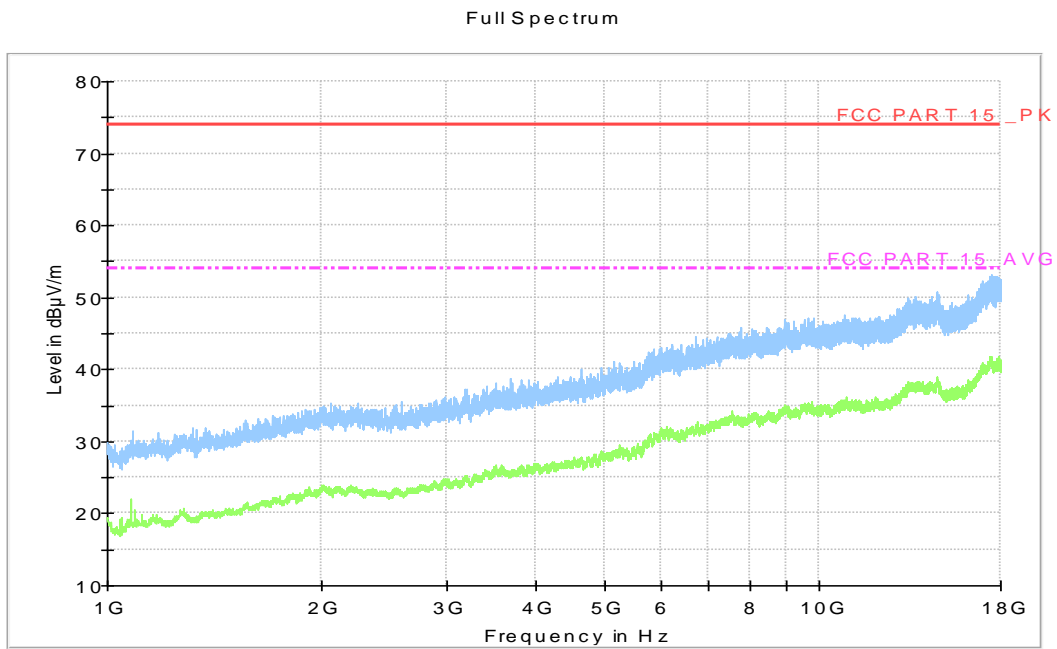


Fig A.2 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.2

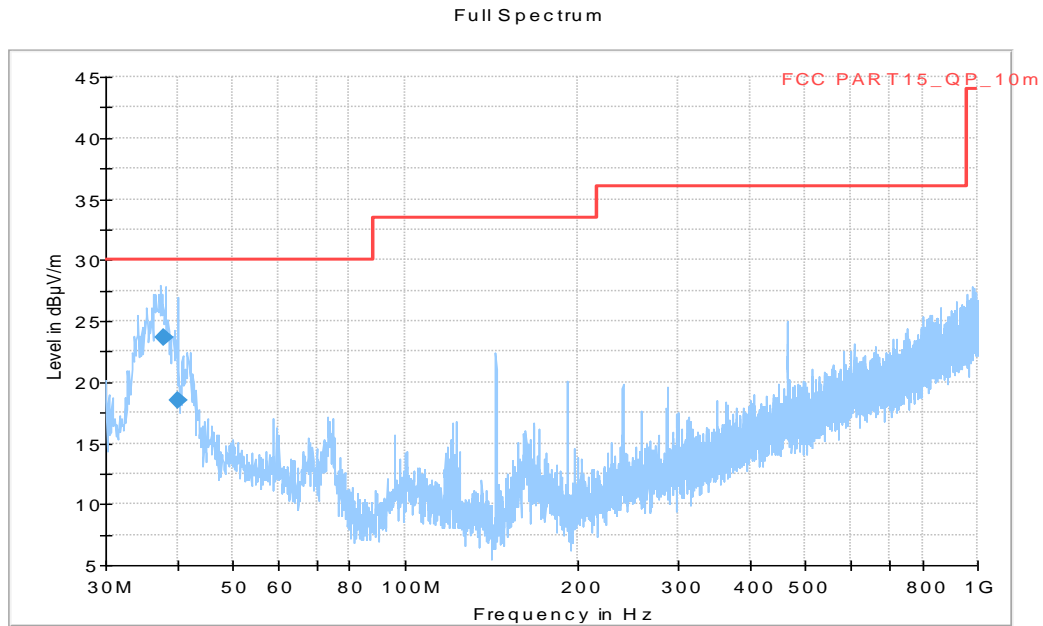


Fig A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
37.949000	23.66	30.00	6.34	1000.0	120.000	225.0	V	-8.0
40.148000	18.44	30.00	11.56	1000.0	120.000	279.0	V	186.0

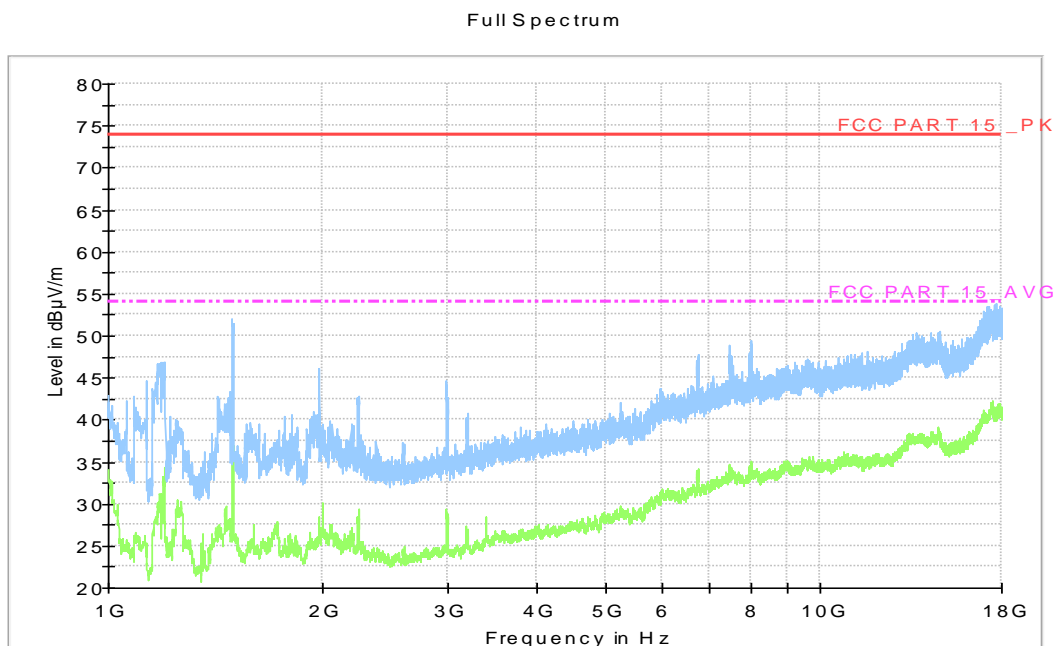


Fig A.4 Radiated Emission from 1GHz to 3GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.08 \text{ dB}$, $k=2$.

Charging Mode, Set.1

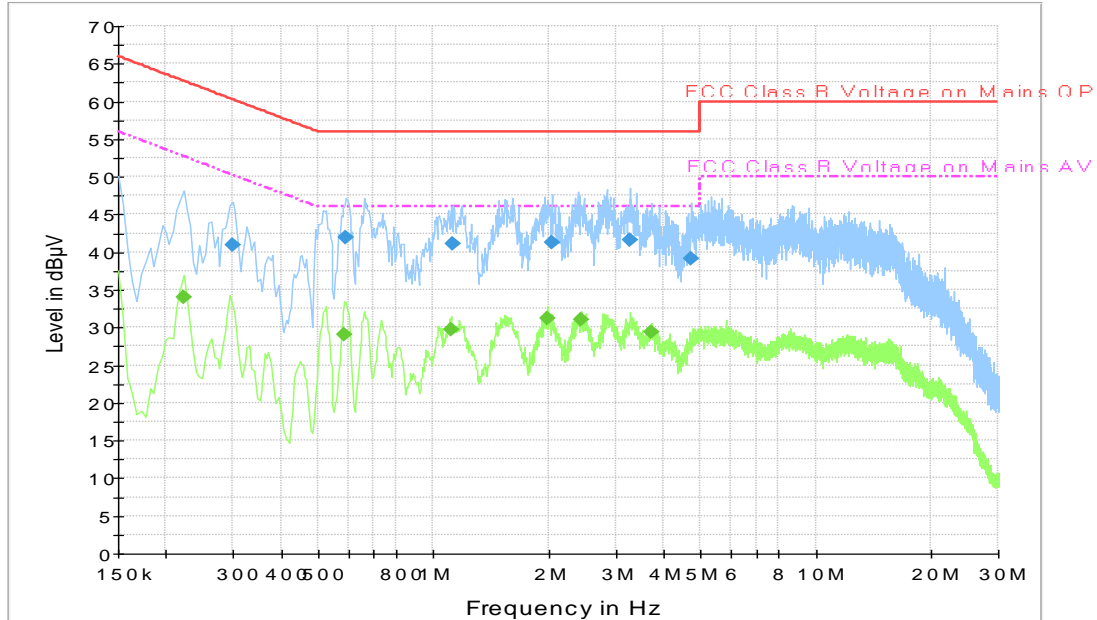


Fig A.5 Conducted Emission

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.298500	41.0	2000.0	9.000	On	L1	19.8	19.3	60.3
0.591000	42.0	2000.0	9.000	On	L1	19.9	14.0	56.0
1.126500	41.1	2000.0	9.000	On	L1	19.6	14.9	56.0
2.040000	41.2	2000.0	9.000	On	L1	19.7	14.8	56.0
3.277500	41.6	2000.0	9.000	On	L1	19.7	14.4	56.0
4.717500	39.1	2000.0	9.000	On	L1	19.6	16.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.222000	34.0	2000.0	9.000	On	L1	19.8	18.7	52.7
0.586500	29.0	2000.0	9.000	On	L1	19.9	17.0	46.0
1.113000	29.8	2000.0	9.000	On	L1	19.6	16.2	46.0
1.990500	31.2	2000.0	9.000	On	L1	19.7	14.8	46.0
2.440500	31.1	2000.0	9.000	On	L1	19.7	14.9	46.0
3.727500	29.4	2000.0	9.000	On	L1	19.6	16.6	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

USB Mode, Set.2

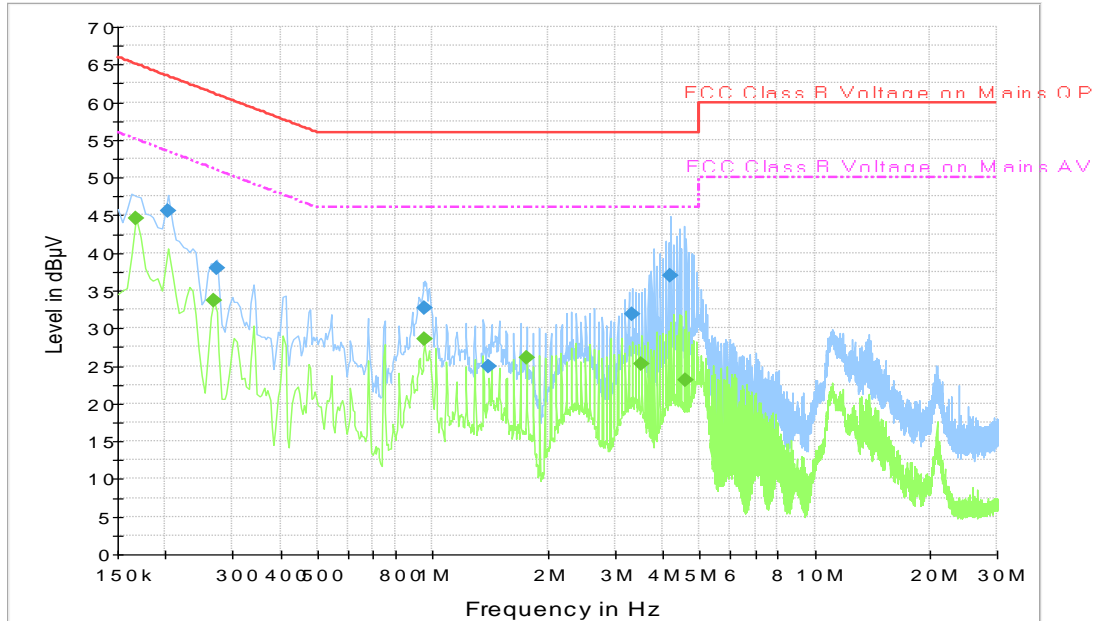

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.204000	45.6	2000.0	9.000	On	L1	19.8	17.8	63.4
0.271500	38.1	2000.0	9.000	On	N	19.8	23.0	61.1
0.955500	32.6	2000.0	9.000	On	L1	19.6	23.4	56.0
1.405500	24.9	2000.0	9.000	On	N	19.6	31.1	56.0
3.327000	31.8	2000.0	9.000	On	N	19.7	24.2	56.0
4.209000	37.0	2000.0	9.000	On	N	19.7	19.0	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.204000	45.6	2000.0	9.000	On	L1	19.8	17.8	63.4
0.271500	38.1	2000.0	9.000	On	N	19.8	23.0	61.1
0.955500	32.6	2000.0	9.000	On	L1	19.6	23.4	56.0
1.405500	24.9	2000.0	9.000	On	N	19.6	31.1	56.0
3.327000	31.8	2000.0	9.000	On	N	19.7	24.2	56.0
4.209000	37.0	2000.0	9.000	On	N	19.7	19.0	56.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

END OF REPORT