

# FCC PART 15C TEST REPORT No.**I18Z60261-IOT20**

for

**TCL Communication Ltd.** 

## GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile phone

Model Name: BBE100-1

FCC ID:2ACCJN028

with

Hardware Version:04

Software Version: V6R13-6

Issued Date: 2018-7-1



#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

#### **Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: <a href="mailto:cttl">cttl</a> terminals@caict.ac.cn, website: <a href="mailto:www.caict.ac.cn">www.caict.ac.cn</a>




## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
I18Z60261-IOT20	Rev.0	1st edition	2018-6-21
I18Z60261-IOT20	Rev.1	Update chapter 5.3	2018-7-11



## **CONTENTS**

1. T	EST LABORATORY	5
1.1.	TESTINGLOCATION	5
1.2.	TESTINGENVIRONMENT	5
1.3.	Project data	5
1.4.	Signature	5
2. C	CLIENTINFORMATION	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3. E	QUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT	7
3.3.	INTERNAL IDENTIFICATION OF AE	7
3.4.	EUT SET-UPS	8
3.5.	NORMAL ACCESSORY SETTING	8
3.6.	GENERAL DESCRIPTION	8
4. R	EFERENCE DOCUMENTS	9
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	9
4.2.	REFERENCE DOCUMENTS FOR TESTING	9
5. T	EST RESULTS	10
5.1.	SUMMARY OF TEST RESULTS	10
5.2.	STATEMENTS	10
5.3.	EXPLANATION OF RE-USE OF TEST DATA	10
6. T	EST FACILITIES UTILIZED	11
7. M	MEASUREMENT UNCERTAINTY	12
7.1.	PEAK OUTPUT POWER - CONDUCTED	12
7.2.	Frequency Band Edges	12
7.3.	TRANSMITTER SPURIOUS EMISSION - CONDUCTED	12
7.4.	Transmitter Spurious Emission - Radiated	12
7.5.	TIME OF OCCUPANCY (DWELL TIME)	12
7.6.	20dB Bandwidth	12
7.7.	CARRIER FREQUENCY SEPARATION	12
7.8.	AC POWERLINE CONDUCTED EMISSION	13
ANNE	EX A: DETAILED TEST RESULTS	14
A.1.	MEASUREMENT METHOD	14
A.2.	PEAK OUTPUT POWER – CONDUCTED	15
A.3.	. Frequency Band Edges – Conducted	16
A.4.	. Transmitter Spurious Emission - Conducted	23





ANNEX E: ACCREDITATION CERTIFICATE	86
A.10. AC POWERLINE CONDUCTED EMISSION	82
A.9. NUMBER OF HOPPING CHANNELS	78
A.8. CARRIER FREQUENCY SEPARATION	75
A.7. 20dB Bandwidth	69
A.6. TIME OF OCCUPANCY (DWELL TIME)	59
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED	



## 1. Test Laboratory

#### 1.1. TestingLocation

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology

Development Area, Beijing, P. R. China 100176

#### 1.2. TestingEnvironment

Normal Temperature:  $15-35^{\circ}$ C Relative Humidity: 20-75%

#### 1.3. Project data

Testing Start Date: 2018-5-4
Testing End Date: 2018-6-19

## 1.4. Signature

Wu Le

(Prepared this test report)

Sun Zhenyu

(Reviewed this test report)

Lv Songdong

3 Frots

(Approved this test report)



## 2. ClientInformation

## 2.1. Applicant Information

Company Name: TCL Communication Ltd.

7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,

Nanshan District, Shenzhen, Guangdong, P.R. China 518052

City: /
Postal Code: /
Country: /

Telephone: 0086-755-36611722

Fax: 0086-75536612000-81722

#### 2.2. Manufacturer Information

Company Name: TCL Communication Ltd.

Address/Post: 7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,

Nanshan District, Shenzhen, Guangdong, P.R. China 518052

City: /
Postal Code: /
Country: /

Telephone: 0086-755-36611722

Fax: 0086-75536612000-81722



## 3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile

phone

Model Name BBE100-1 FCC ID 2ACCJN028

Frequency Band ISM 2400MHz~2483.5MHz Type of Modulation GFSK/π/4 DQPSK/8DPSK

Number of Channels 79

Power Supply 3.85V DC by Battery

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	<b>HW Version</b>	SW Version
EUT4	/	04	V6R13-6
EUT5	/	04	V6R13-6

<sup>\*</sup>EUT ID: is used to identify the test sample in the lab internally.

## 3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	USB Cable	/	/
AE5	Charger	/	NO TEST
AE1			
Model		TLp029C1	
Manufad	cturer	BYD	
Capacita	ance	2900mAh	
Nomina	l voltage	3.85V	
AE2			
Model		CBA0064AGBC1	
Manufad	cturer	BYD	
Length of	of cable	/	
AE3			
Model		CDA0000119CF	
Manufad	cturer	LUXSHARE	
Length of	of cable	/	
AE4			
Model		CDA0000119C1	
Manufad	cturer	Juwei	



Length of cable /

AE5

Model CBA0064AHBC1

Manufacturer BYD Length of cable /

## 3.4. EUT set-ups

**EUT set-up No. Combination of EUT and AE Remarks** Set.10 EUT4+ AE1+ AE2+ AE3 BT

## 3.5. Normal Accessory setting

Fully charged battery should be used during the test.

## 3.6. General Description

The Equipment Under Test (EUT) is a model of GSM Quad-band/HSPA-UMTS Six-band/LTE 17-bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

<sup>\*</sup>AE ID: is used to identify the test sample in the lab internally.



## 4. Reference Documents

## 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

## 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

<u> </u>	<u> </u>	
Reference	Title	Version
	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2016
	15.247 Operation within the bands 902–928MHz,	
	2400-2483.5 MHz, and 5725-5850 MHz.	
ANCI 000 40	American National Standard of Procedures for	luna 2012
ANSI C63.10	Compliance Testing of Unlicensed Wireless Devices	June,2013



## 5. Test Results

#### 5.1. Summary of Test Results

Abbreviations used in this clause:

- **P** Pass, The EUT complies with the essential requirements in the standard.
- F Fail, The EUT does not comply with the essential requirements in the standard
- NA Not Applicable, The test was not applicable
- NP Not Performed, The test was not performed by CTTL
- R Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	R
Frequency Band Edges	15.247 (d)	R
Transmitter Spurious Emission - Conducted	15.247 (d)	R
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	R
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	R
20dB Bandwidth	15.247 (a)(1)	R
Carrier Frequency Separation	15.247 (a)(1)	R
Number of hopping channels	15.247 (a)(b)(iii)	R
AC Powerline Conducted Emission	15.107, 15.207	R

Please refer to ANNEX A for detail.

The measurement is made according to ANSI C63.10.

#### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

### 5.3. Explanation of re-use of test data

This model is a variant product which model name is BBE100-2, according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, all test results are derived from test report No. I18Z60272-IOT13. For detail differences between two models please refer the Declaration of Changes document.



## 6. Test Facilities Utilized

## **Conducted test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibratio n Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2018-09-30
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2018-09-29
3	LISN	ENV216	101200	Rohde & Schwarz	1 year	2018-08-03
4	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2019-02-28
5	Shielding Room	S81	/	ETS-Lindgren	/	/

## Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2018-12-30
2	BiLog Antenna	VULB9163	514	Schwarzbeck	3 years	2021-01-03
3	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2020-05-31
4	EMI Antenna	3117	00139065	ETS-Lindgren	3 Years	2020-11-15
5	Spectrum Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2018-07-22
6	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2019-03-08



## 7. Measurement Uncertainty

## 7.1. Peak Output Power - Conducted

#### **Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

## 7.2. Frequency Band Edges

## **Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

## 7.3. Transmitter Spurious Emission - Conducted

## **Measurement Uncertainty:**

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

## 7.4. Transmitter Spurious Emission - Radiated

## **Measurement Uncertainty:**

FrequencyRange	Uncertainty(k=2)
<1 GHz	5.40 dB
> 1 GHz	5.26 dB

## 7.5. Time of Occupancy (Dwell Time)

#### **Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.88ms
------------------------------	--------

### 7.6. 20dB Bandwidth

## **Measurement Uncertainty:**

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

## 7.7. Carrier Frequency Separation

#### **Measurement Uncertainty:**



Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

## 7.8. AC Powerline Conducted Emission

## **Measurement Uncertainty:**

Measurement Uncertainty(k=2)	3.08dB
------------------------------	--------




## **ANNEX A: Detailed Test Results**

#### A.1. Measurement Method

#### A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

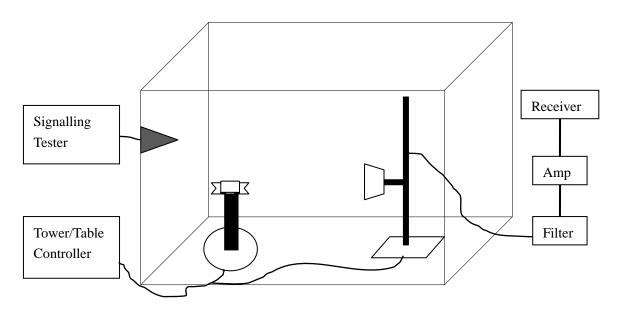



## A.2. Peak Output Power - Conducted

## Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

Span: 6MHzRBW: 3MHzVBW: 3MHz

Sweep time: 2.5msDetector function: peak

Trace: max hold

b) Allow trace to stabilize.

- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power.

#### **Measurement Limit:**

Standard	Limit (dBm)	
FCC Part 15.247(b)(1)	< 30	

#### **Measurement Results:**

#### For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.86	7.89	7.68	Р

#### Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.13	7.14	7.26	Р

#### For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.29	7.40	7.44	Р

**Conclusion: PASS** 



### A.3. Frequency Band Edges - Conducted

#### Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

-Span: 10 MHz

Resolution Bandwidth: 100 kHzVideo Bandwidth: 300 kHz

Sweep Time:AutoDetector: PeakTrace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude deltabetween the peak of the fundamental and the peak of the band-edge emission. This is not anabsolute field strength measurement; it is only a relative measurement to determine the amount bywhich the emission drops at the band edge relative to the highest fundamental emission level.

#### **Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20

#### **Measurement Result:**

#### For GFSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.1	-56.90	Р
U	Hopping ON	Fig.2	-64.34	Р
70	Hopping OFF	Fig.3	-64.45	Р
78	Hopping ON	Fig.4	-65.82	Р

#### Forπ/4 DQPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.5	-57.14	Р
0	Hopping ON	Fig.6	-61.56	Р
70	Hopping OFF	Fig.7	-61.84	Р
78	Hopping ON	Fig.8	-62.53	Р

#### For 8DPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.9	-58.94	Р
0	Hopping ON	Fig.10	-60.59	Р
78	Hopping OFF	Fig.11	-61.94	Р



Hamming ON	F: - 40	04.00	n
Hopping ON	Fig.12	-61.39	P

Conclusion: PASS
Test graphs as below

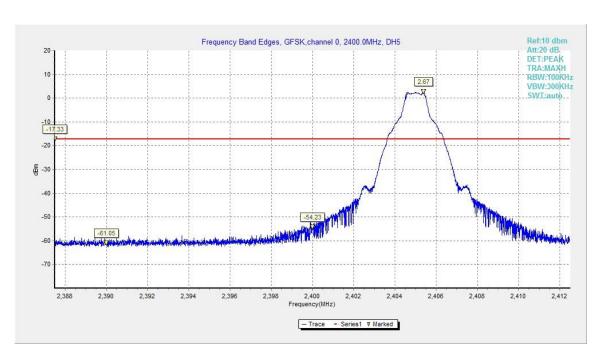


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

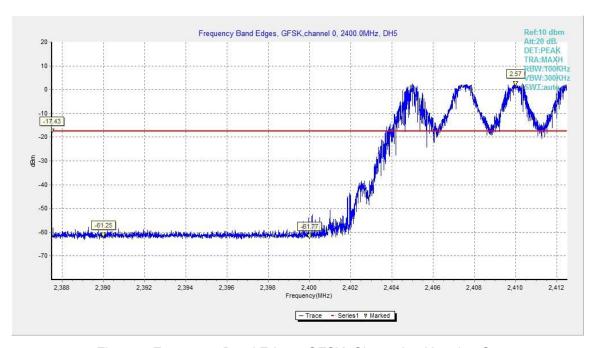


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On



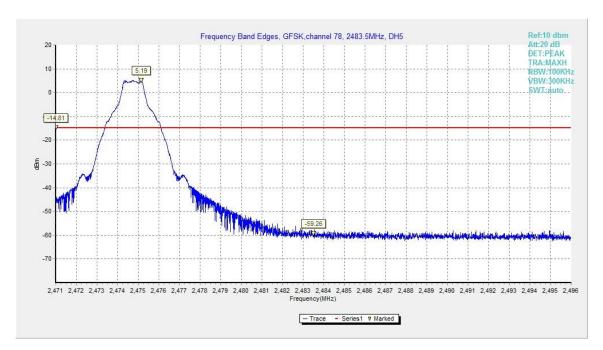


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

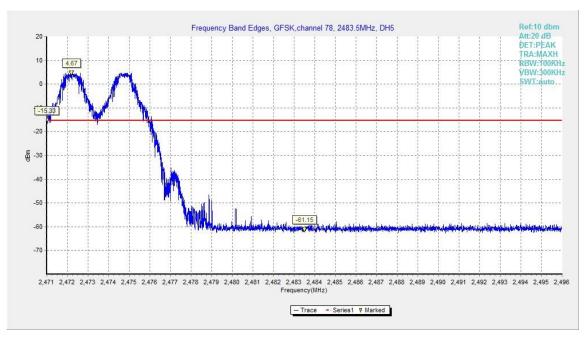


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On



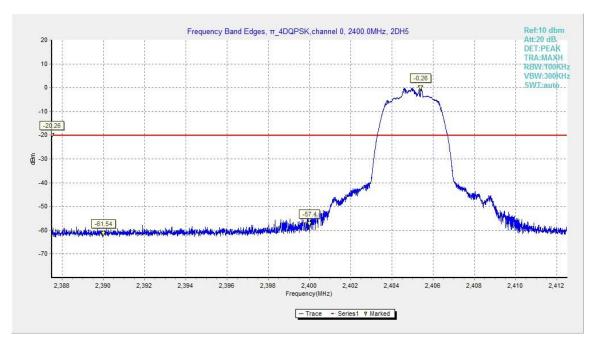


Fig.5. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off

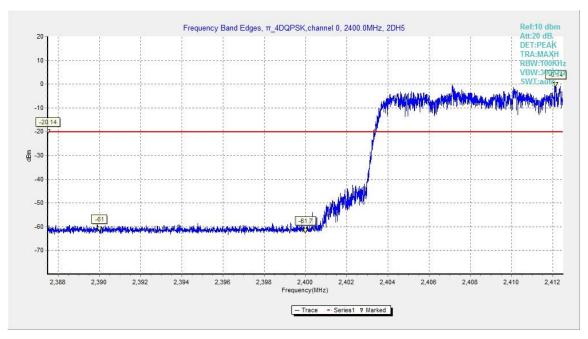


Fig.6. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping On



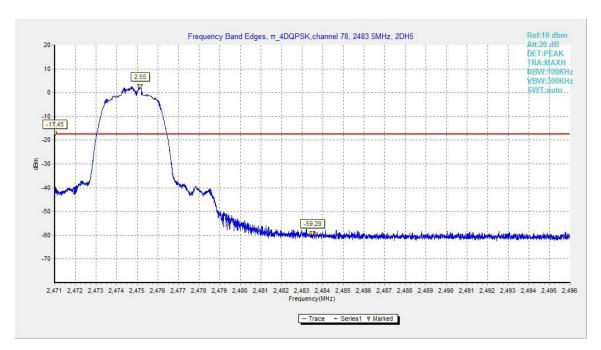


Fig.7. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off

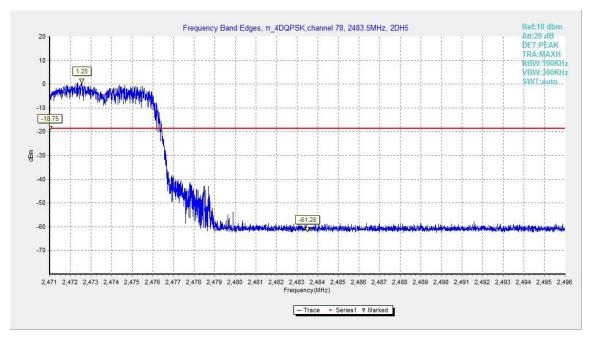


Fig.8. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping On



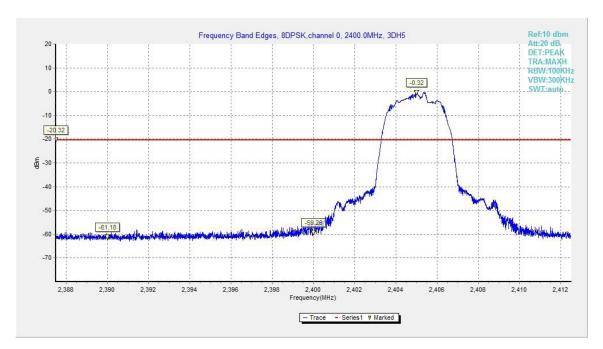


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

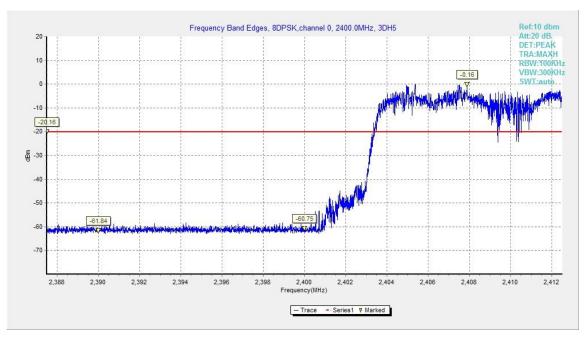


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On



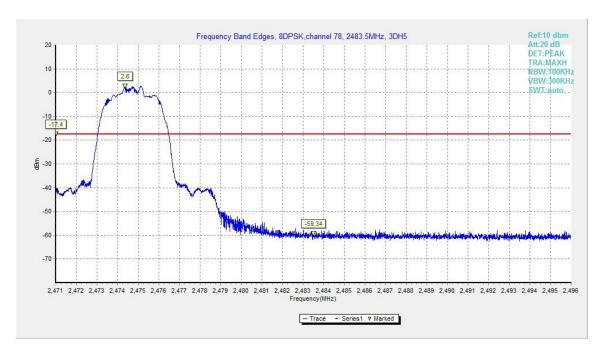


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

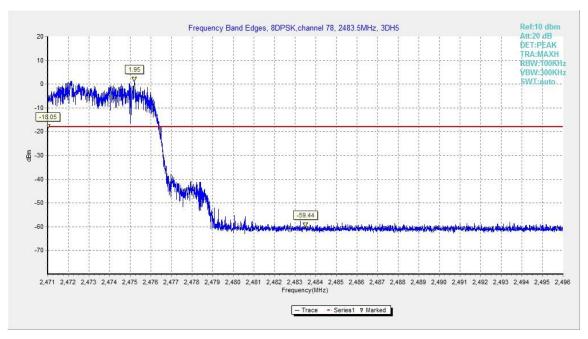


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On



### A.4. Transmitter Spurious Emission - Conducted

#### Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure - Reference Level

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW = 300 kHz.
- 3. Set the span to 5-30 % greater than the EBW.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

- 1. Set RBW = 100 kHz.
- 2. Set VBW = 300 kHz.
- 3. Set span to encompass the spectrum to be examined.
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.
- 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

#### **Measurement Limit:**

Standard	Limit	
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz	
FCC 47 CFR Pail 15.247 (d)	bandwidth	

#### Measurement Results:

#### For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	Р
2402 MHz	30 MHz ~ 1 GHz	Fig.14	Р



	1 GHz ~ 3 GHz	Fig.15	Р
	3 GHz ~ 10 GHz	Fig.16	Р
	10 GHz ~ 26 GHz	Fig.17	Р
	Center Frequency	Fig.18	Р
Ch 20	30 MHz ~ 1 GHz	Fig.19	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.20	Р
	3 GHz ~ 10 GHz	Fig.21	Р
	10 GHz ~ 26 GHz	Fig.22	Р
Ch 78 2480 MHz	Center Frequency	Fig.23	Р
	30 MHz ~ 1 GHz	Fig.24	Р
	1 GHz ~ 3 GHz	Fig.25	Р
	3 GHz ~ 10 GHz	Fig.26	Р
	10 GHz ~ 26 GHz	Fig.27	Р

## For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ob O	Center Frequency	Fig.28	Р
	30 MHz ~ 1 GHz	Fig.29	Р
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.30	Р
2 102 11112	3 GHz ~ 10 GHz	Fig.31	Р
	10 GHz ~ 26 GHz	Fig.32	Р
	Center Frequency	Fig.33	Р
01.00	30 MHz ~ 1 GHz	Fig.34	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.35	Р
211111112	3 GHz ~ 10 GHz	Fig.36	Р
	10 GHz ~ 26 GHz	Fig.37	Р
Ch 78 2480 MHz	Center Frequency	Fig.38	Р
	30 MHz ~ 1 GHz	Fig.39	Р
	1 GHz ~ 3 GHz	Fig.40	Р
	3 GHz ~ 10 GHz	Fig.41	Р
	10 GHz ~ 26 GHz	Fig.42	Р

## For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
	Center Frequency	Fig.43	Р
Ch O	30 MHz ~ 1 GHz	Fig.44	Р
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.45	Р
	3 GHz ~ 10 GHz	Fig.46	Р
	10 GHz ~ 26 GHz	Fig.47	Р
Ch 39	Center Frequency	Fig.48	Р



2441 MHz	30 MHz ~ 1 GHz	Fig.49	Р
	1 GHz ~ 3 GHz	Fig.50	Р
	3 GHz ~ 10 GHz	Fig.51	Р
	10 GHz ~ 26 GHz	Fig.52	Р
Ch 78 2480 MHz	Center Frequency	Fig.53	Р
	30 MHz ~ 1 GHz	Fig.54	Р
	1 GHz ~ 3 GHz	Fig.55	Р
	3 GHz ~ 10 GHz	Fig.56	Р
	10 GHz ~ 26 GHz	Fig.57	Р

Conclusion: PASS
Test graphs as below

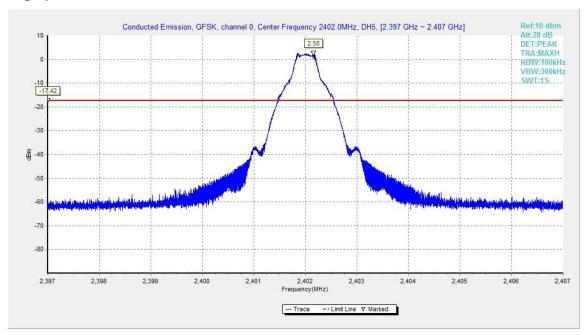


Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz



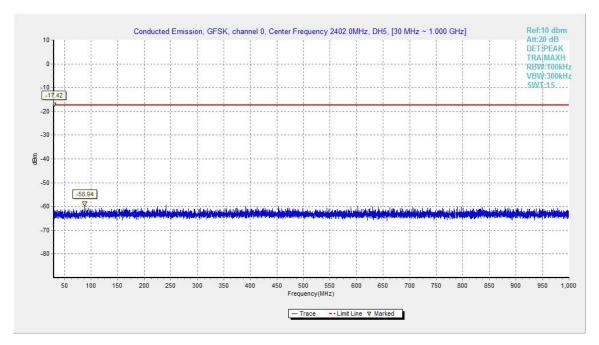


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

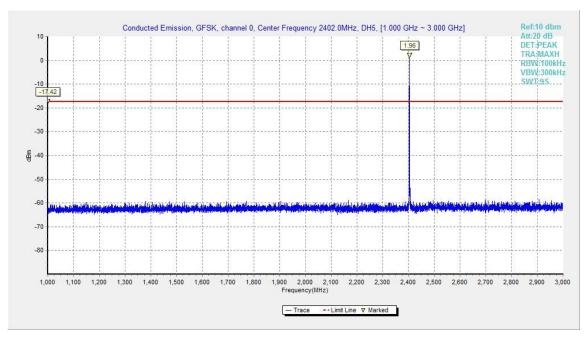


Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz



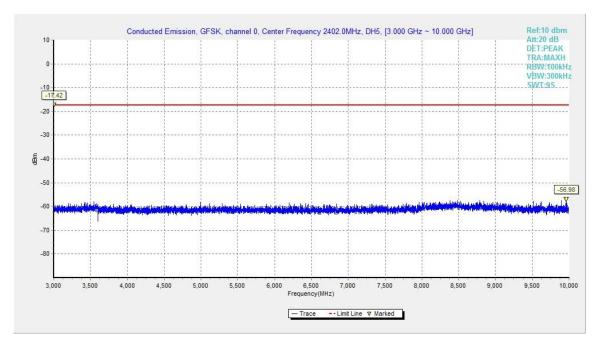


Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

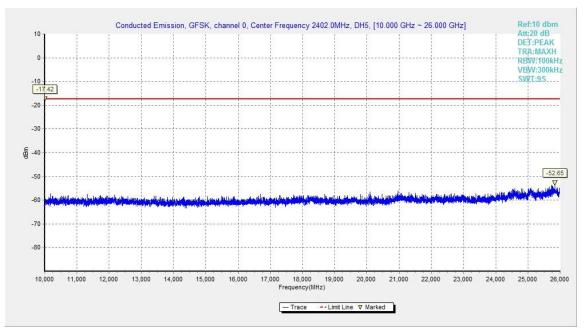


Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz



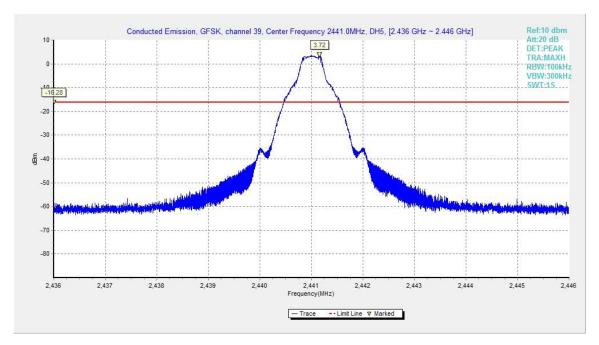


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

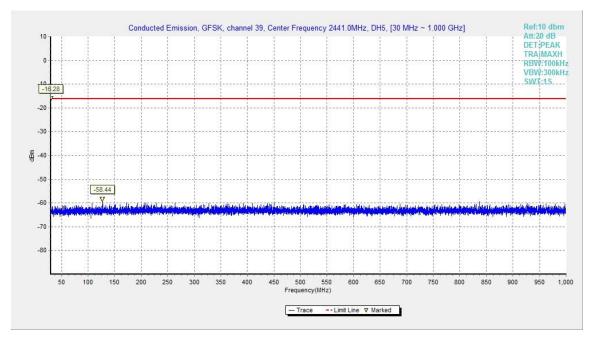


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz



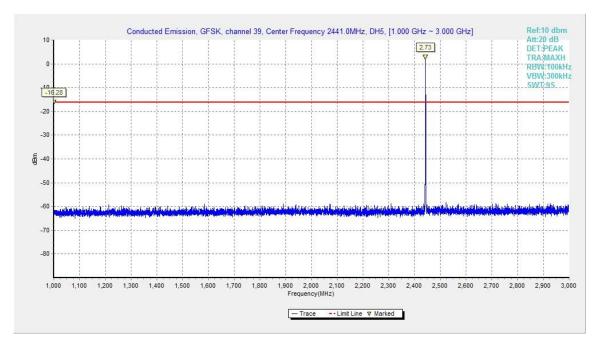


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

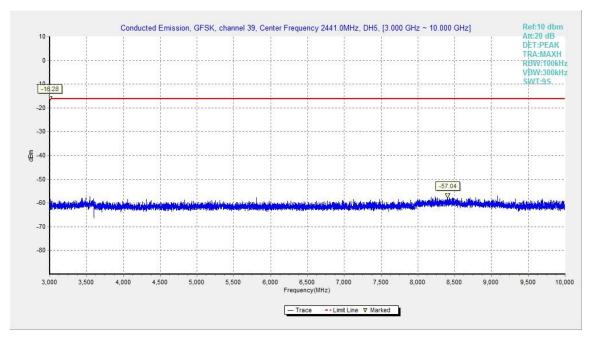


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz - 10GHz



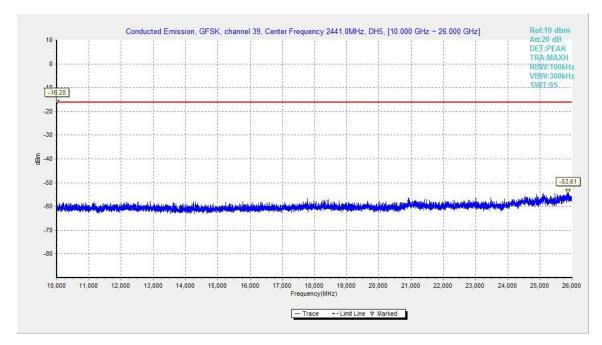


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

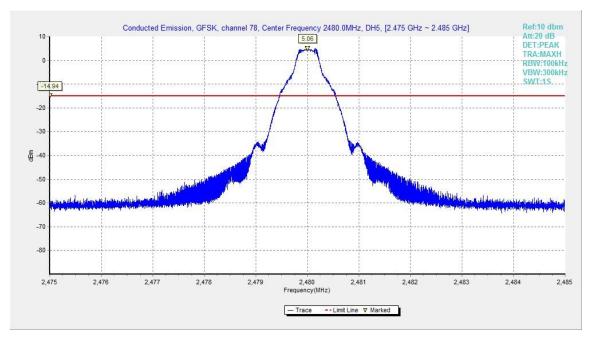


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz



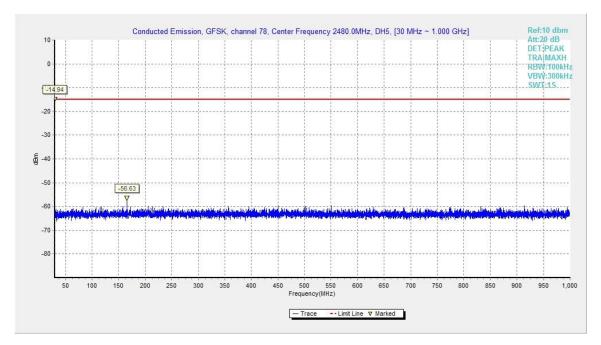


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

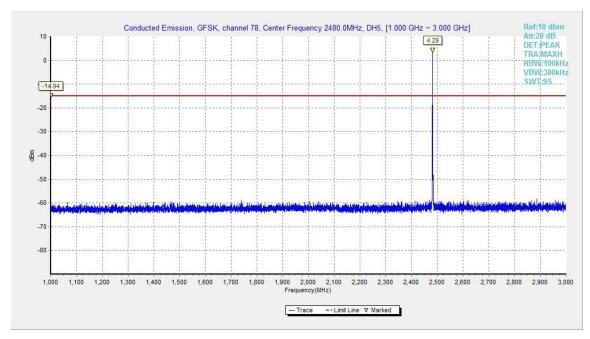


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz



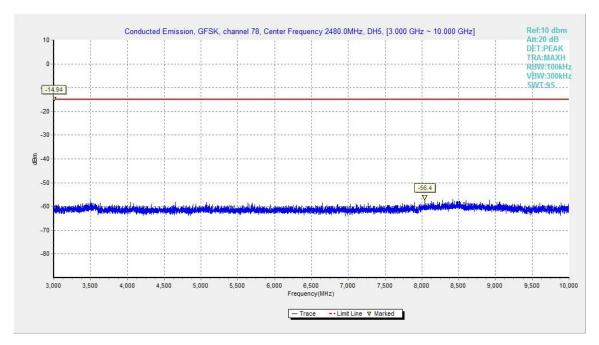


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

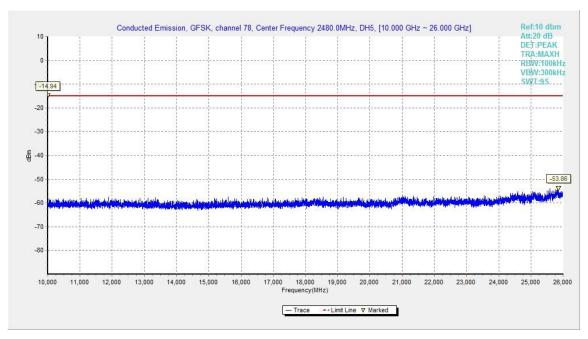


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz



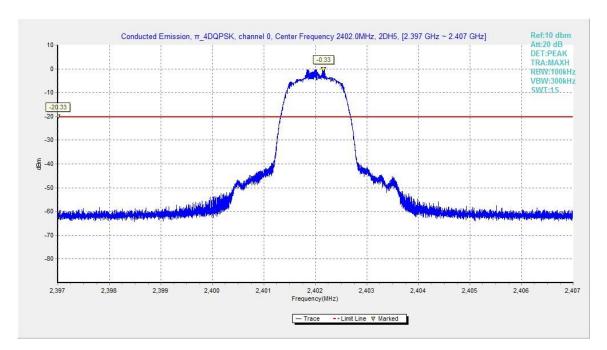


Fig.28. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0,2402MHz

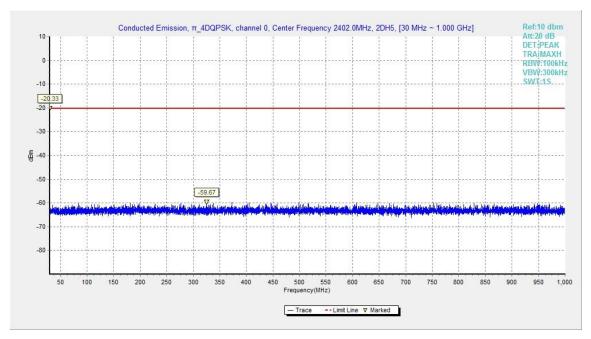


Fig.29. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 30MHz - 1GHz



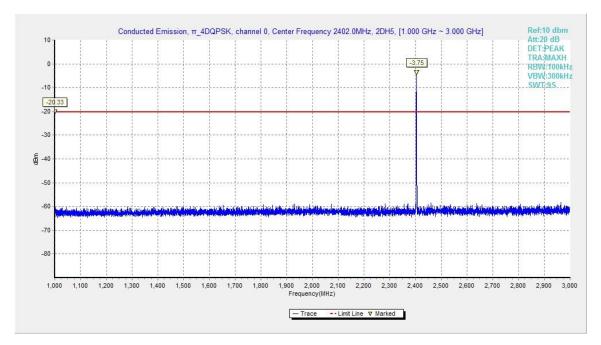


Fig.30. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 1GHz - 3GHz

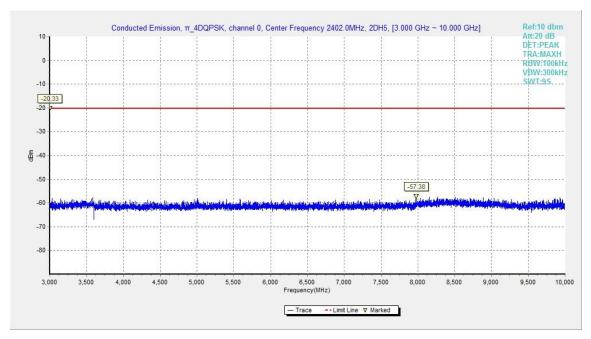


Fig.31. Conducted spurious emission: π/4 DQPSK, Channel 0, 3GHz - 10GHz



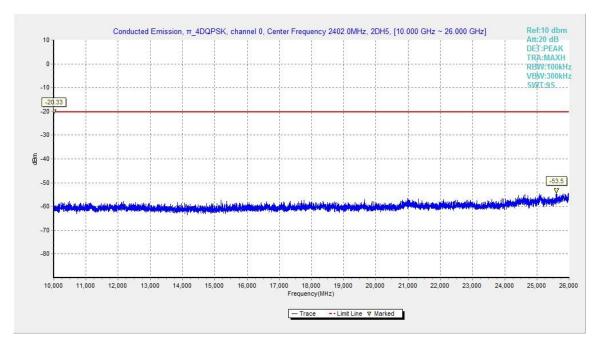


Fig.32. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0,10GHz - 26GHz

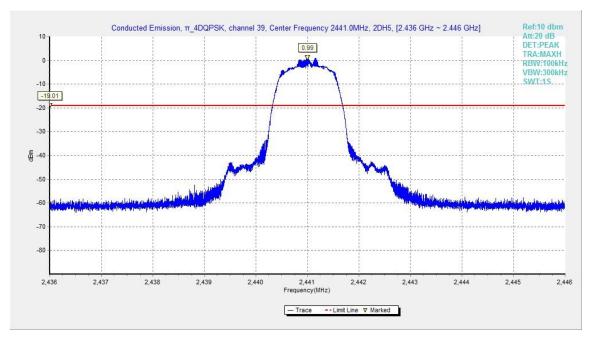


Fig.33. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 2441MHz



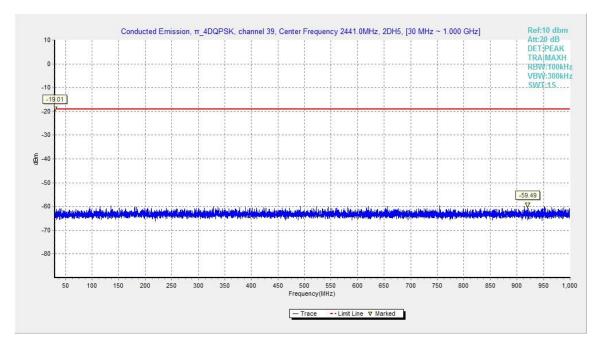


Fig.34. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 30MHz - 1GHz

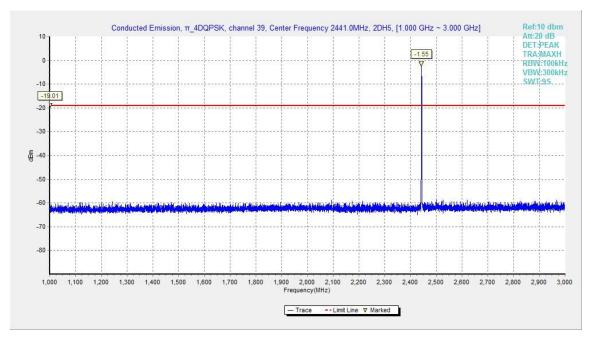


Fig.35. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 1GHz - 3GHz



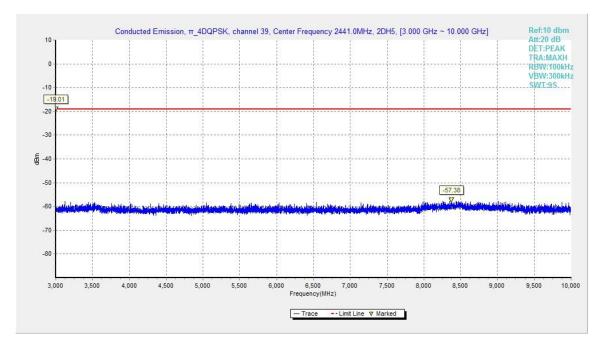


Fig.36. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 3GHz - 10GHz

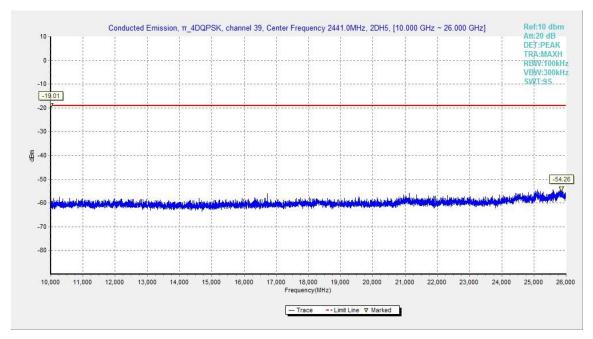


Fig.37. Conducted spurious emission: π/4 DQPSK, Channel 39, 10GHz – 26GHz



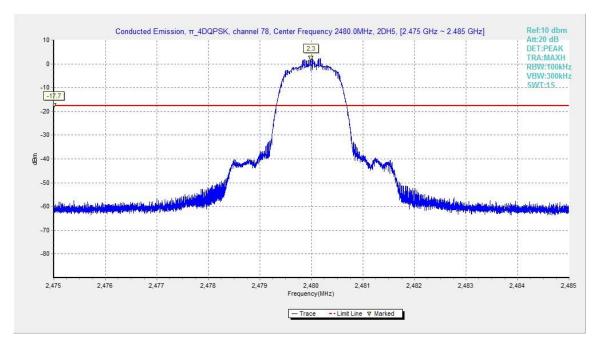


Fig.38. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 2480MHz

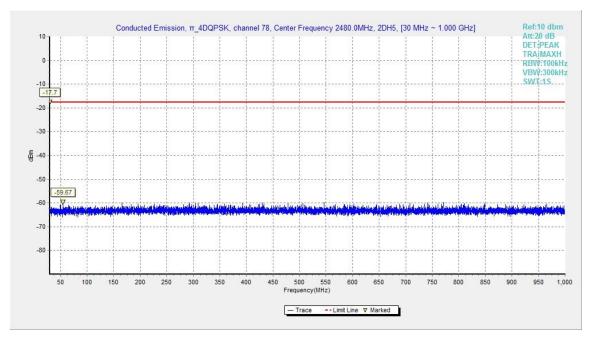


Fig.39. Conducted spurious emission: π/4 DQPSK, Channel 78, 30MHz - 1GHz



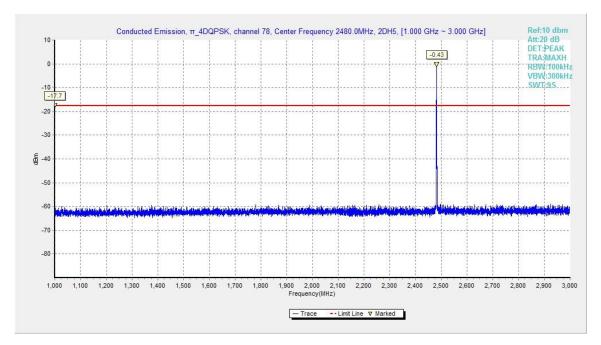


Fig.40. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 1GHz - 3GHz

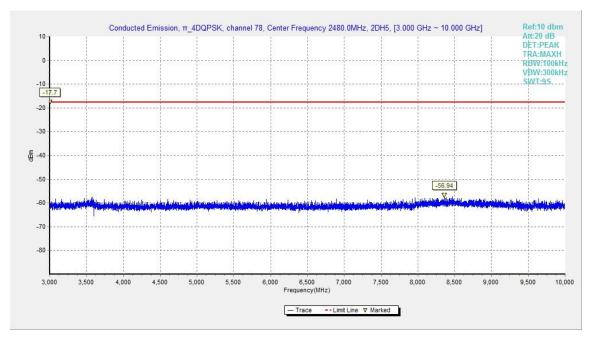


Fig.41. Conducted spurious emission: π/4 DQPSK, Channel 78, 3GHz - 10GHz



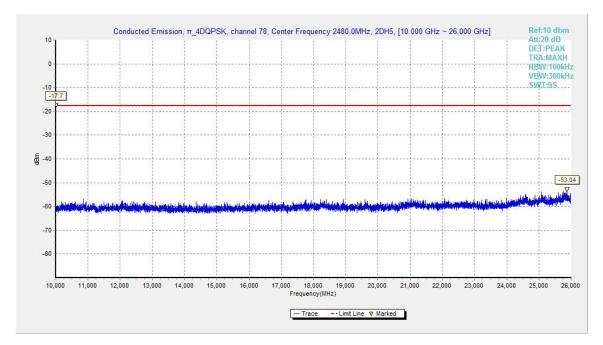


Fig.42. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 10GHz - 26GHz

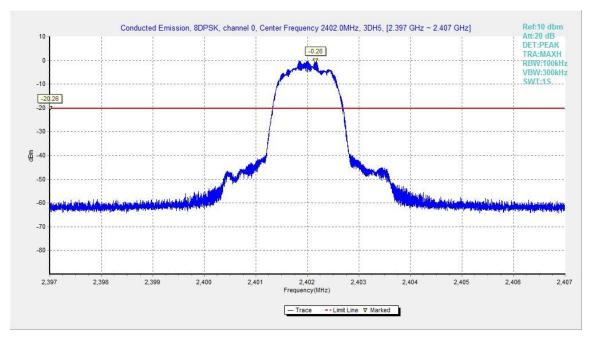


Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz



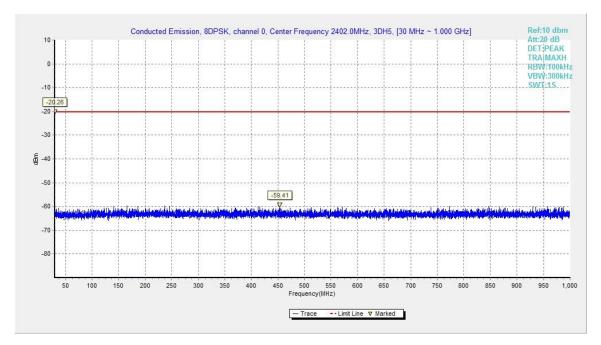


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

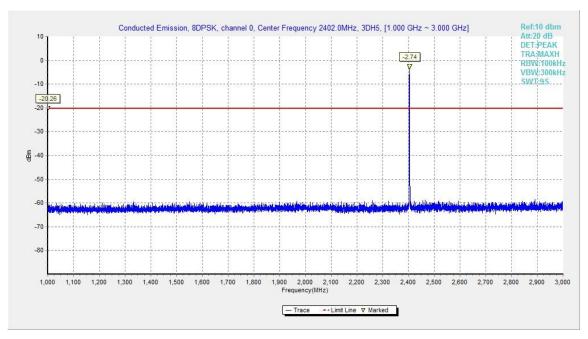


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz



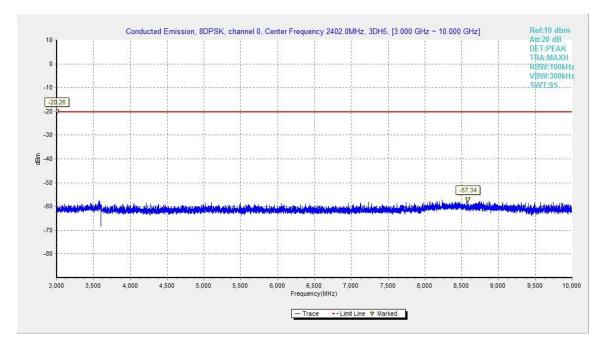


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

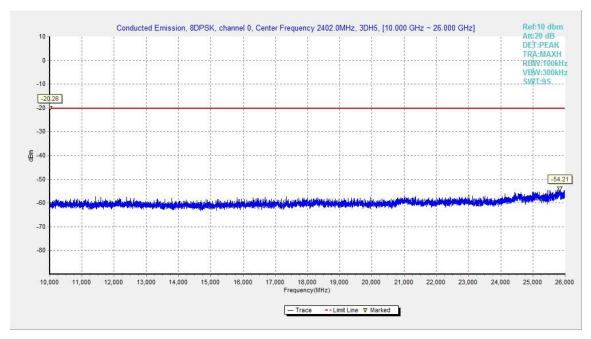


Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz



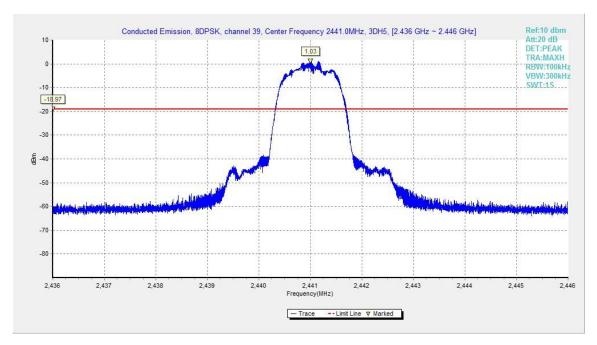


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

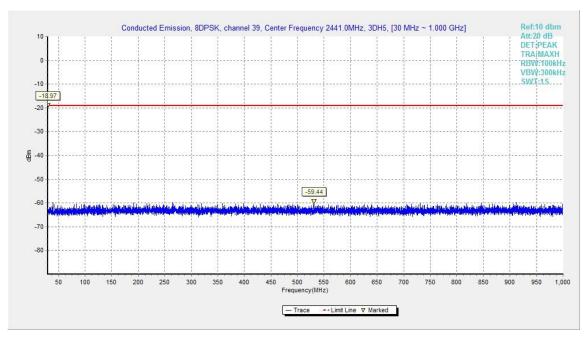


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz



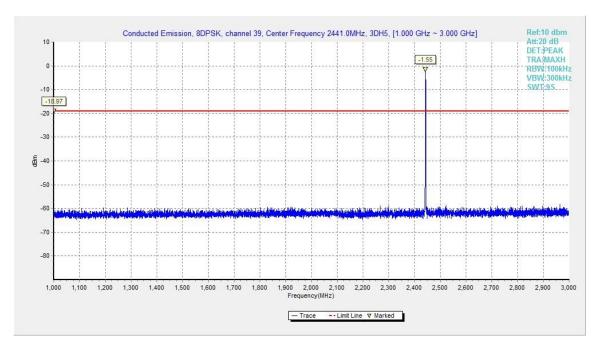


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

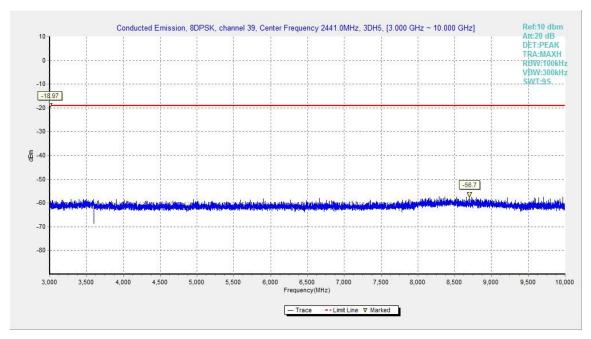


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz



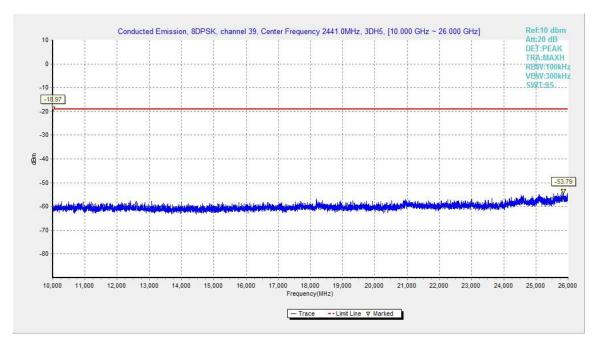


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

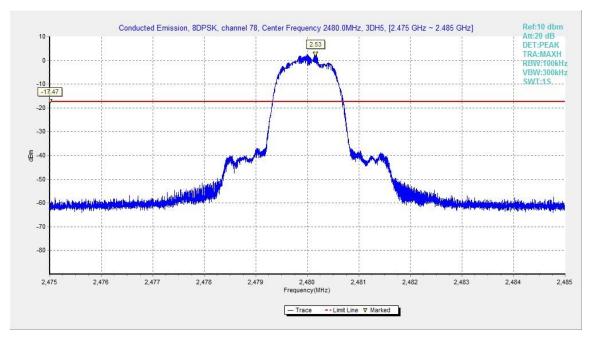


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz