



The Photos of SAR test

No. I18Z62245-SEM03

For

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Tri Band/GSM Bi Band/LTE Quad Bands mobile phone

Model name: 4051S

With

Hardware Version: 02

Software Version: XV21

FCC ID: 2ACCJN030



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample




Picture 2: Left Hand Touch Cheek Position

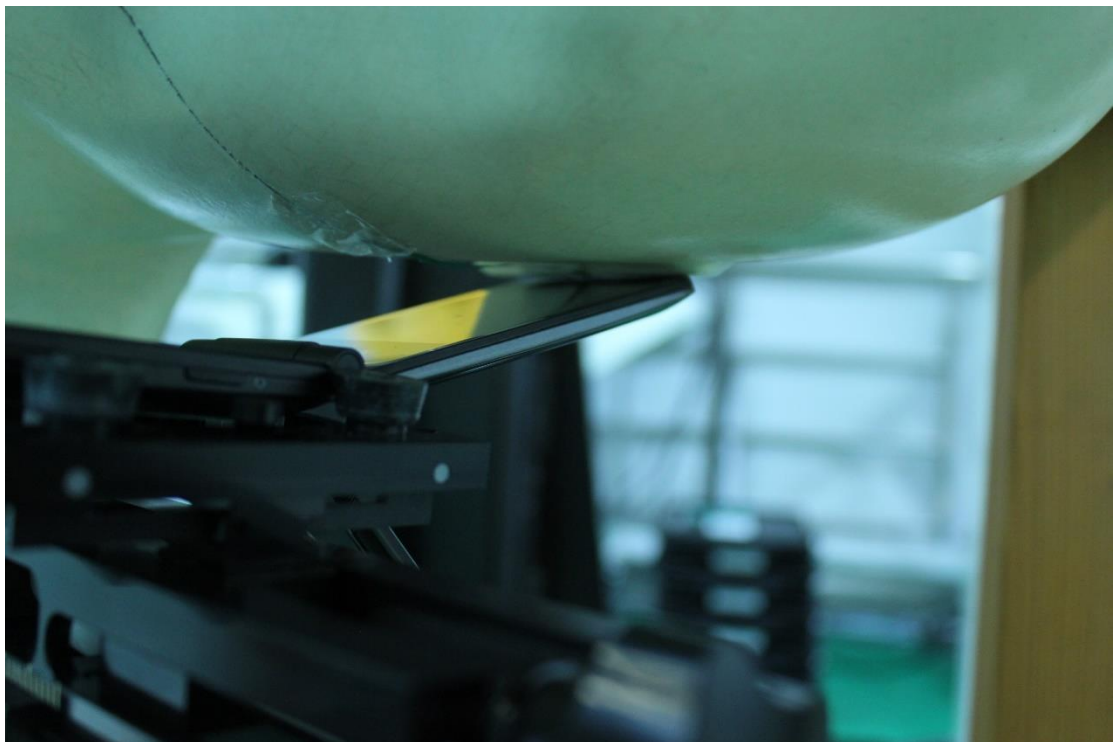

Picture 3: Left Hand Tilt 15° Position

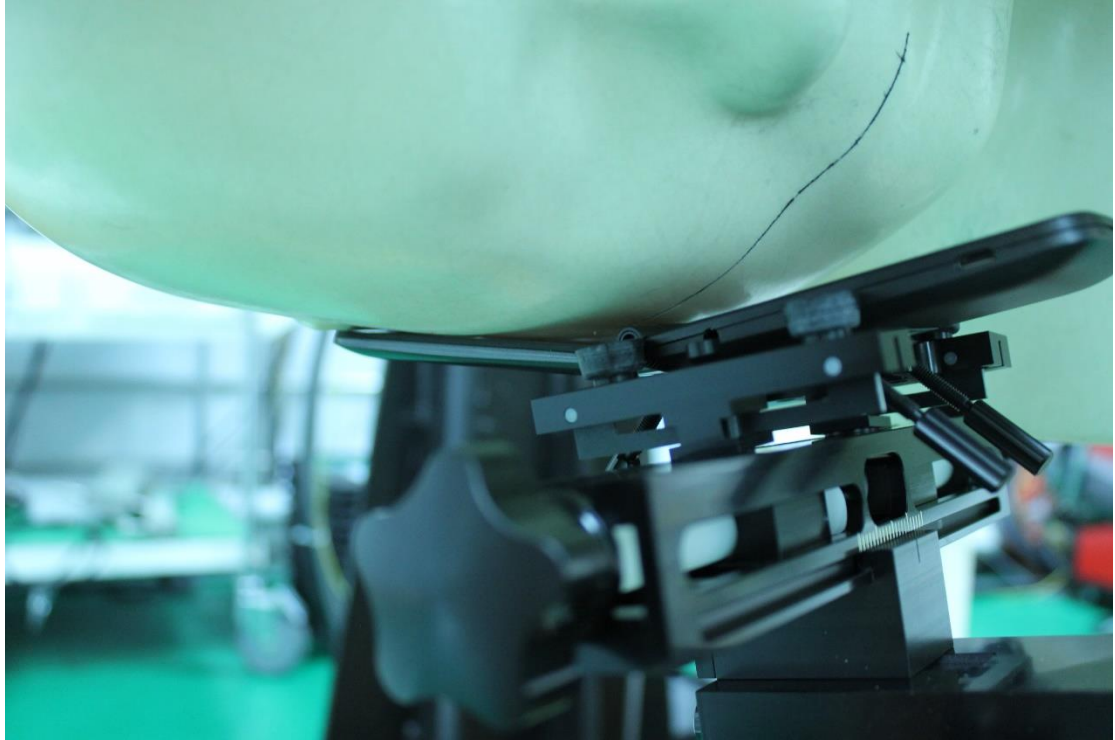

Picture 4: Right Hand Touch Cheek Position

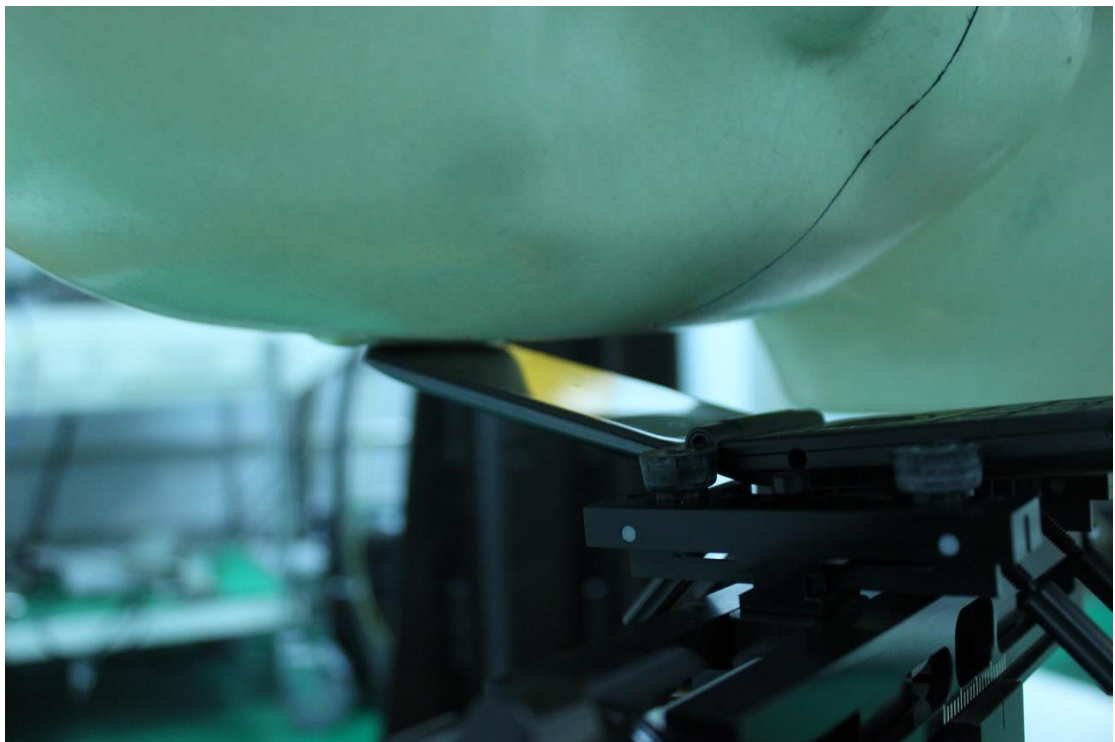

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 7 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:




Picture 6: Front fold with 15mm




Picture 7: Rear fold with 15mm

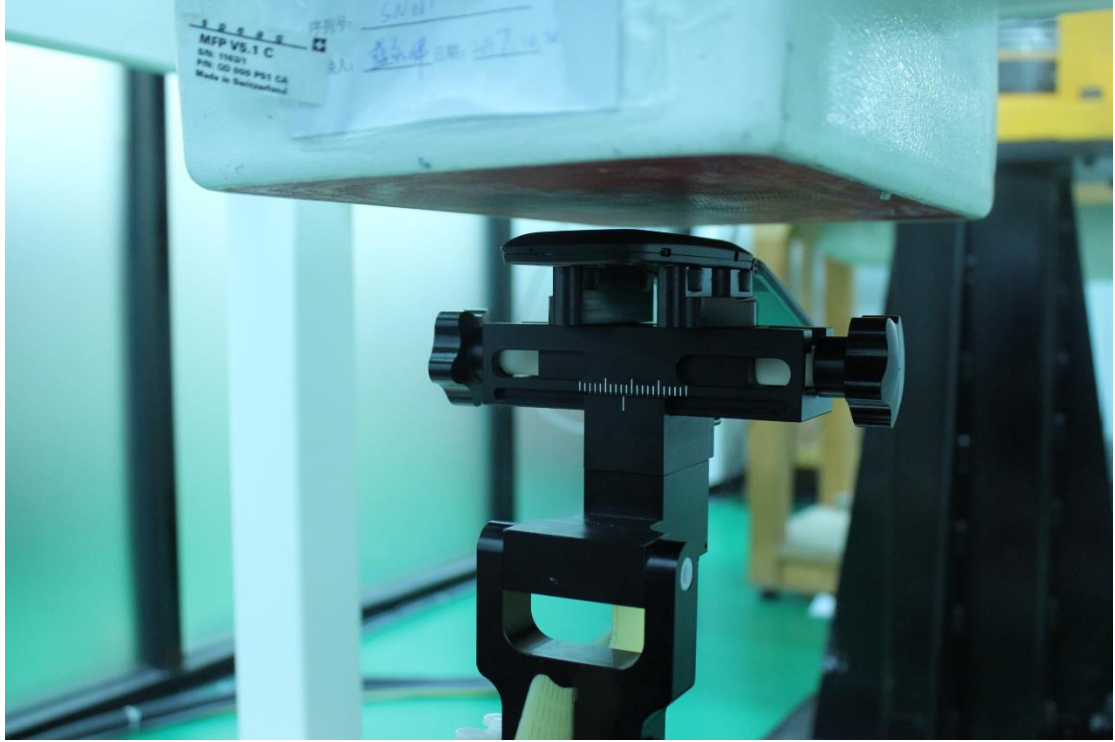


Picture 8: Rear unfold with 15mm

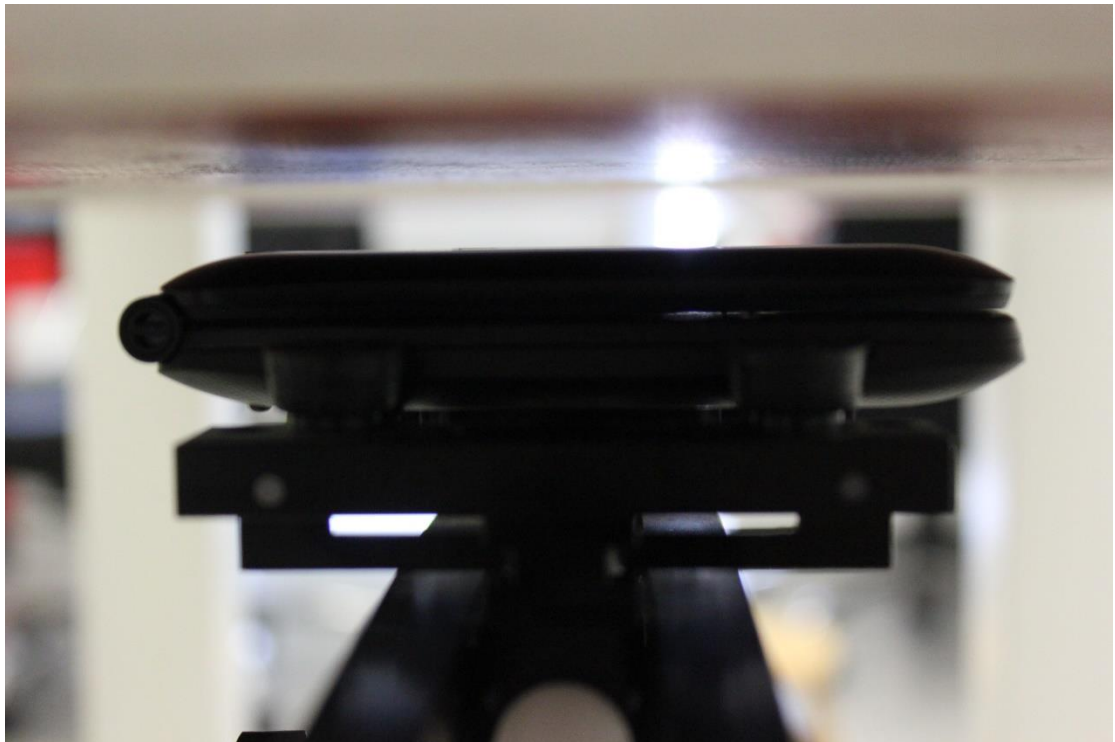


Picture 9: Front fold with 10mm

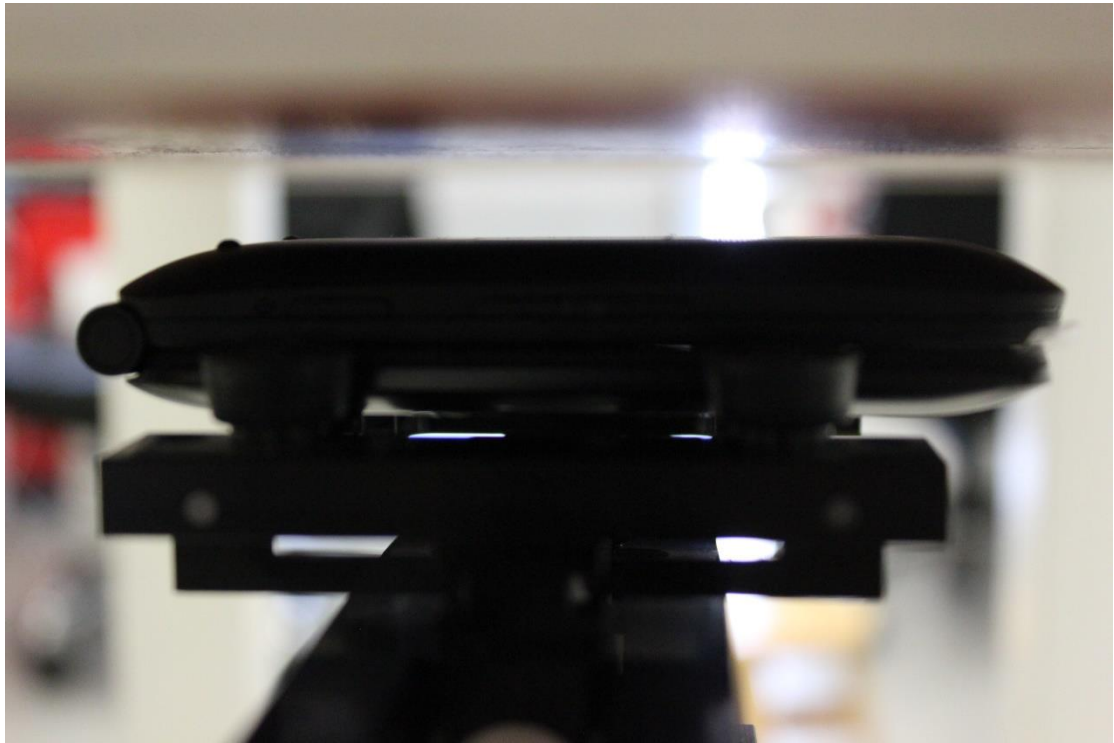

Picture 10: Rear fold with 10mm

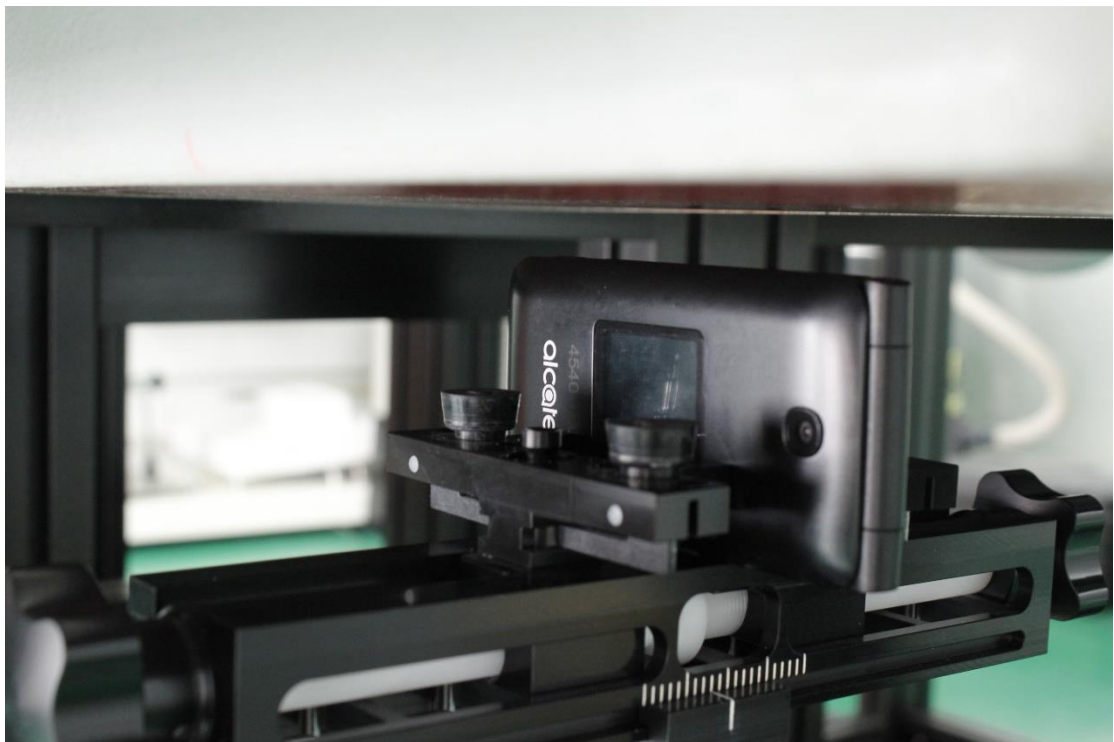


Picture 11: Left fold with 10mm

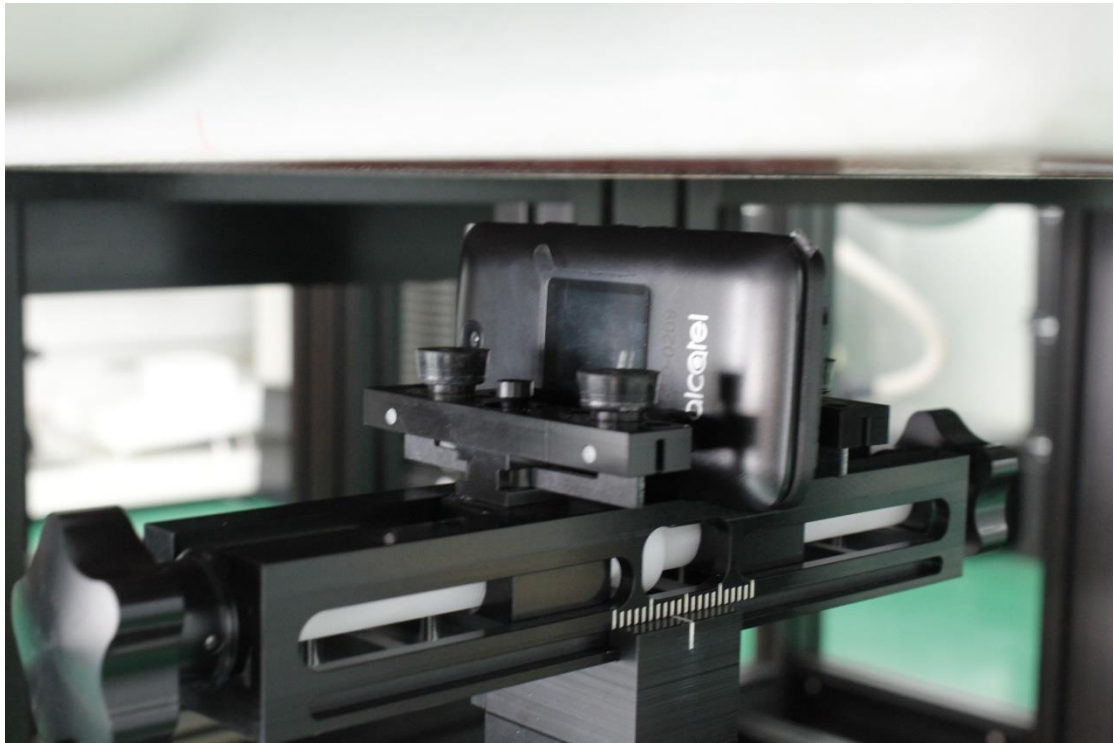


Picture 12: Righth fold with 10mm



Picture 13: Bottom fold with 10mm

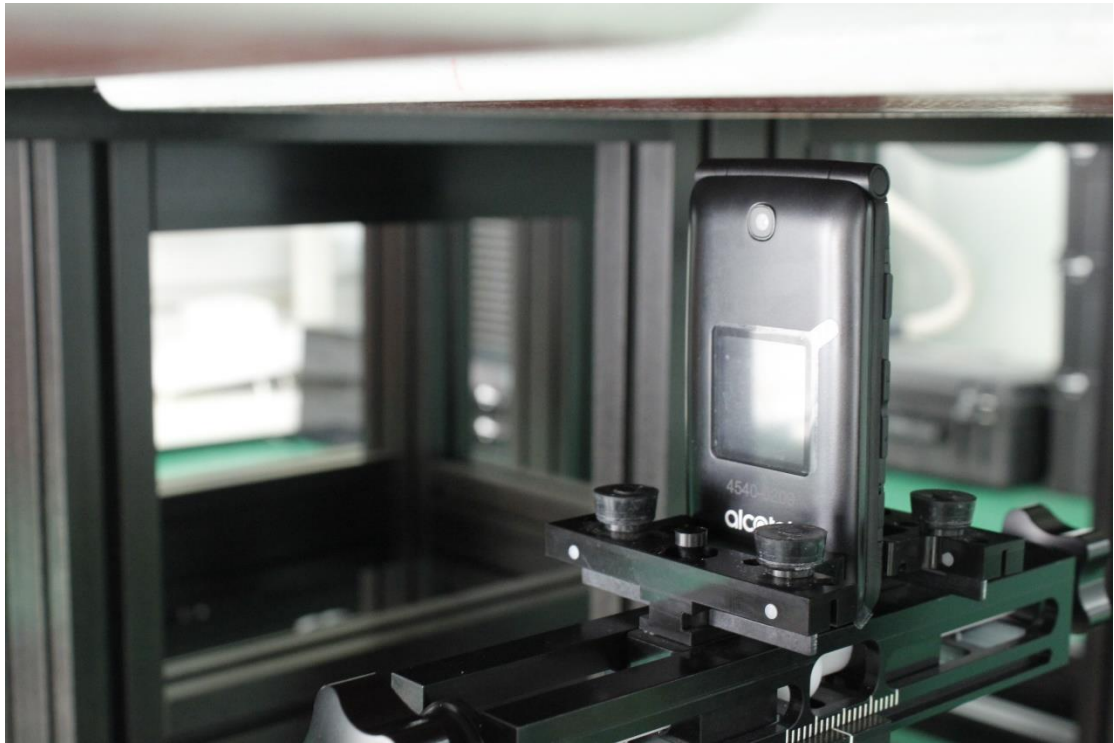

Picture 14: Top fold with 10mm

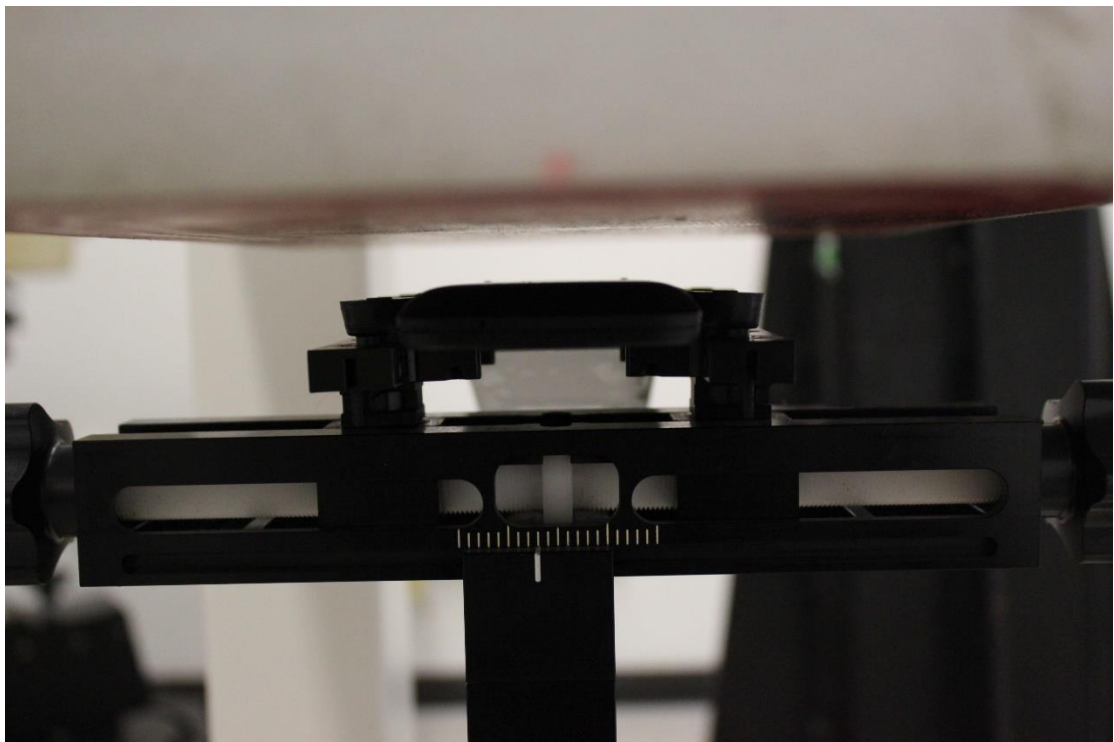

Picture 15: Rear unfold with 10mm