



The Photos of SAR test No. I18Z60716-SEM03

For

TCL Communication Ltd.

**HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/LTE 5 Band Mobile
Phone**

Model name: 4052R

With

Hardware Version: 04

Software Version: ZXXD

FCC ID: 2ACCJN031



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

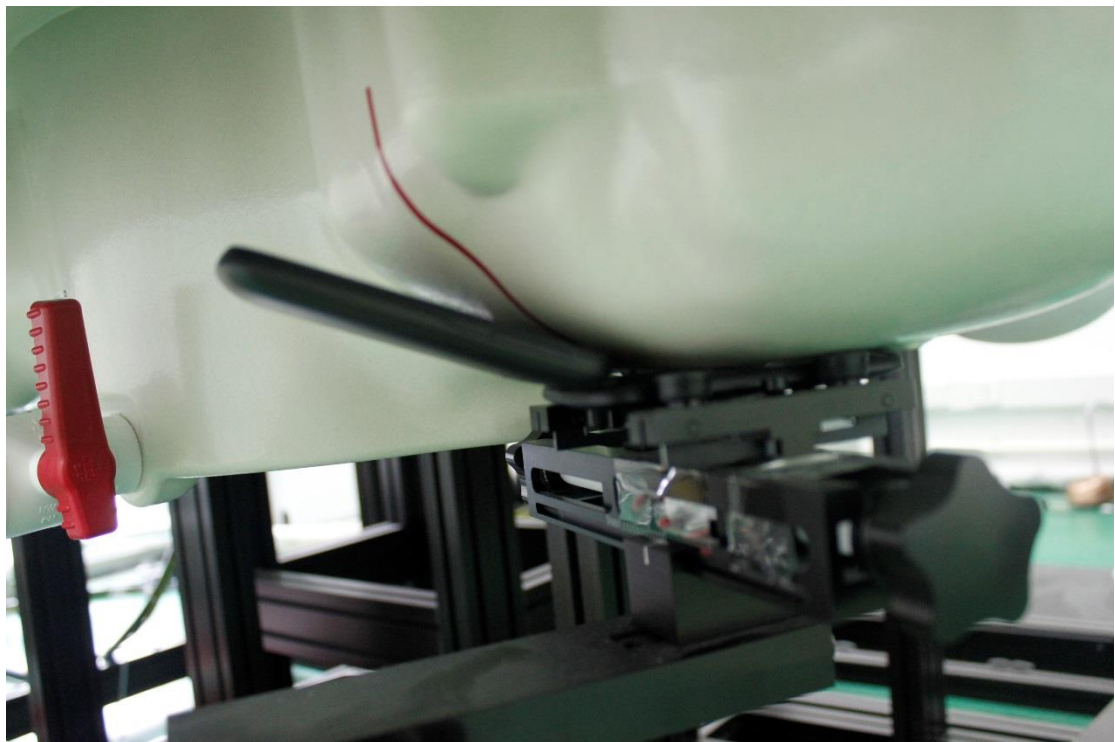

Picture 2: Left Hand Touch Cheek Position

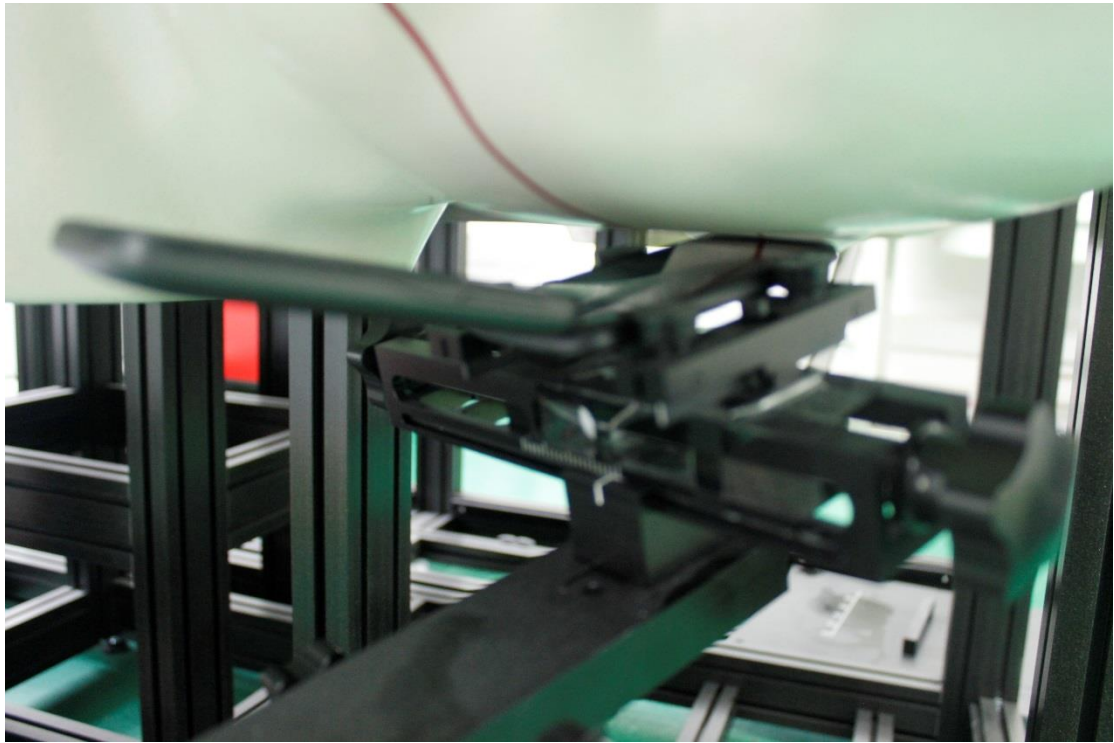

Picture 3: Left Hand Tilt 15° Position

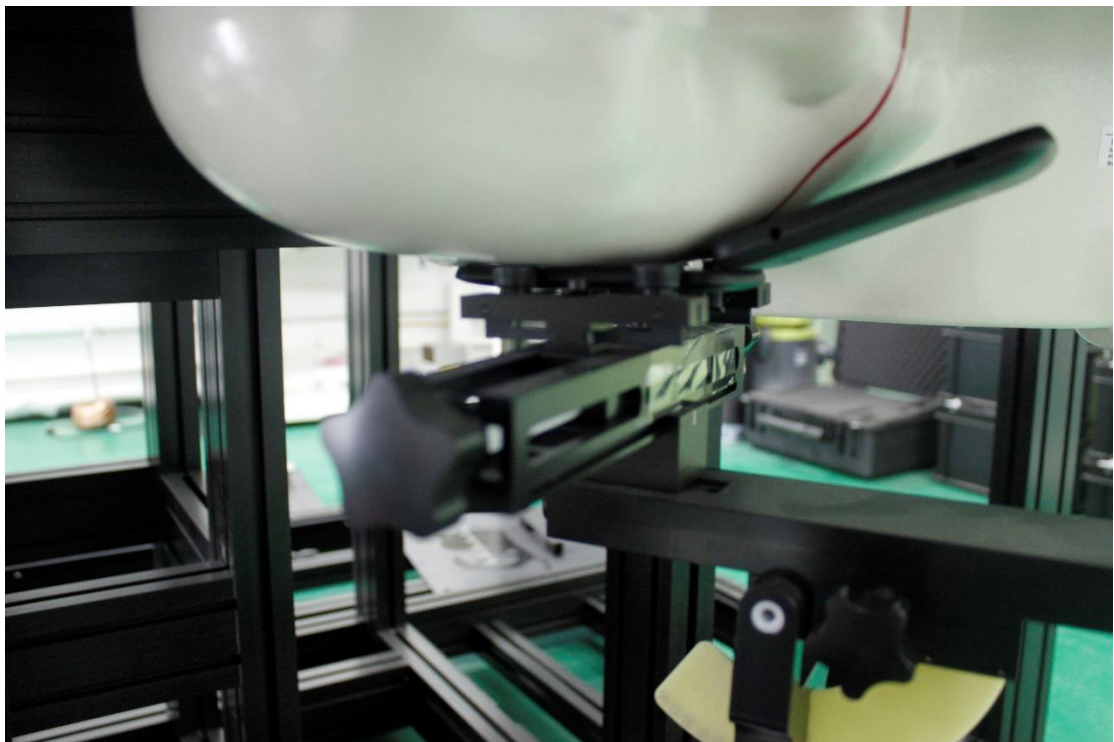


Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 3 test positions all with the distance = 15mm between the EUT and the phantom bottom:

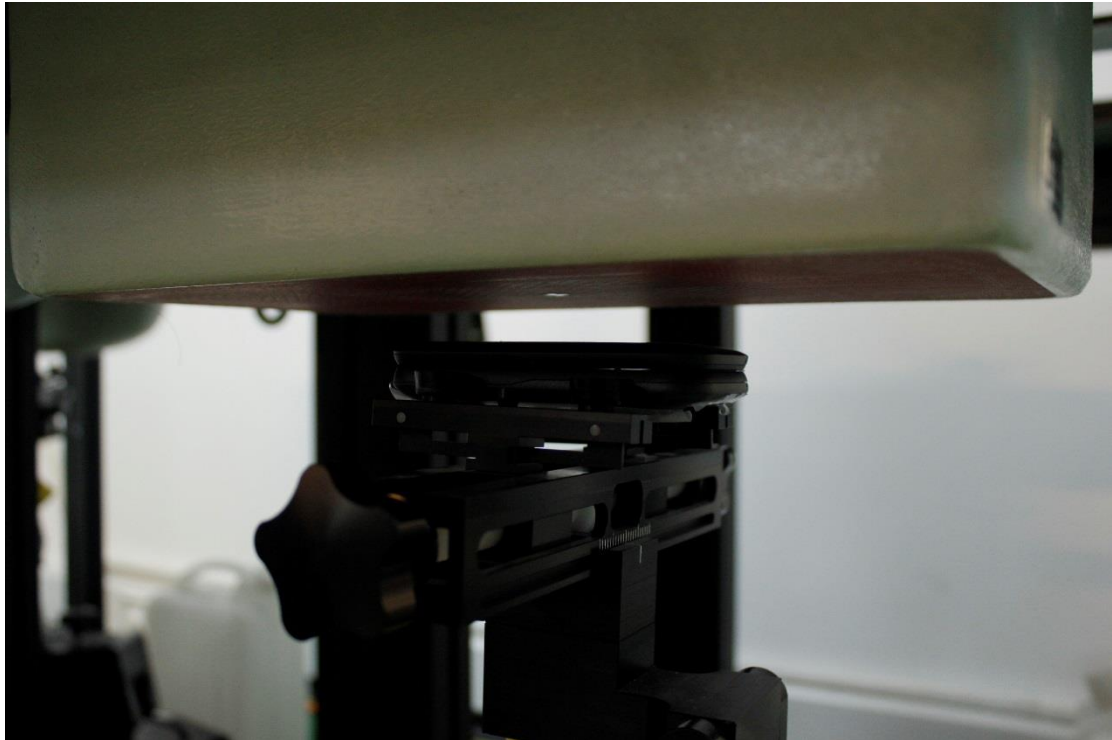

Picture 6: Front with 15mm

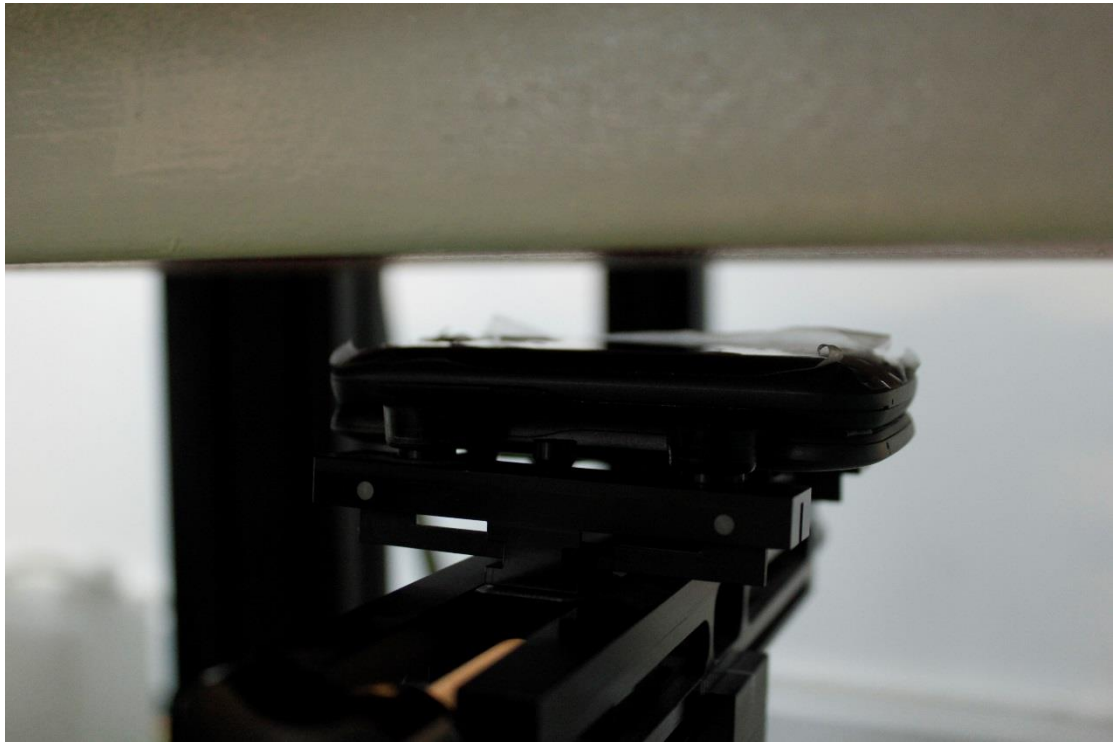

Picture 7: Rear with 15mm

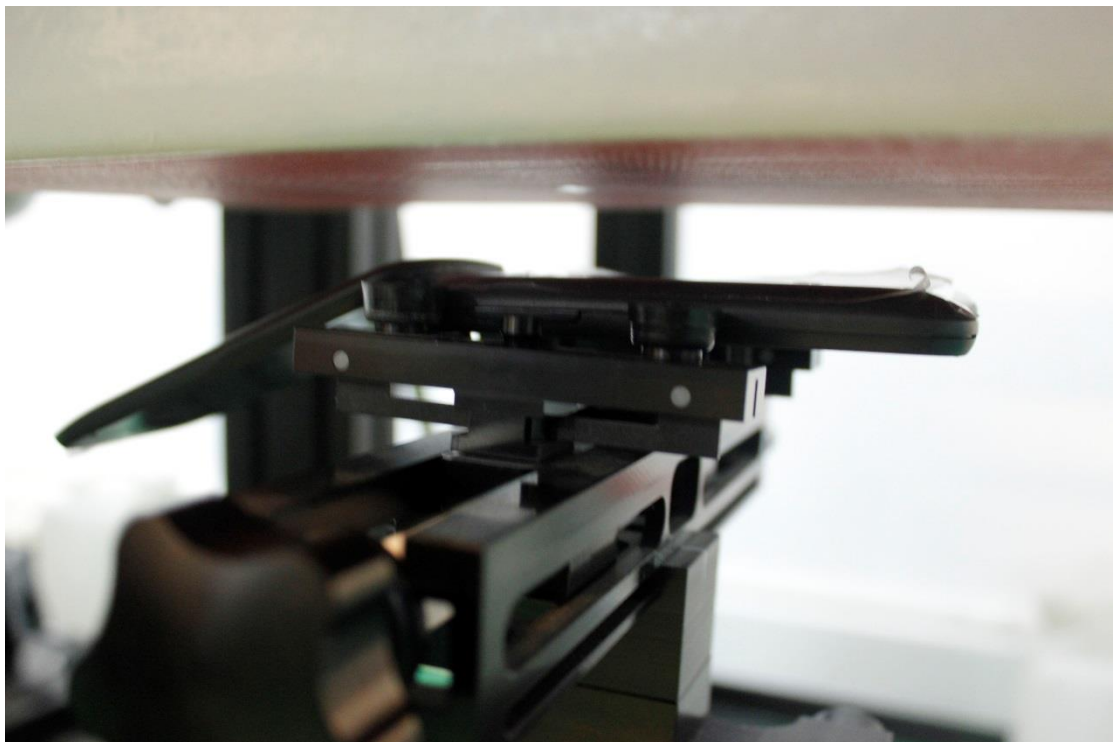

Picture 8: Rear unfold with 15mm