



# The Photos of SAR test

No. I19Z60613-SEM05

For

**TCL Communication Ltd.**

**HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/LTE 9 Band**

**Mobile Phone**

**Model name: 4052W, 4052Z**

With

**Hardware Version: 04**

**Software Version: YWX9**

**FCC ID: 2ACCJN032**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)




**Picture 1: Constituents of the sample**

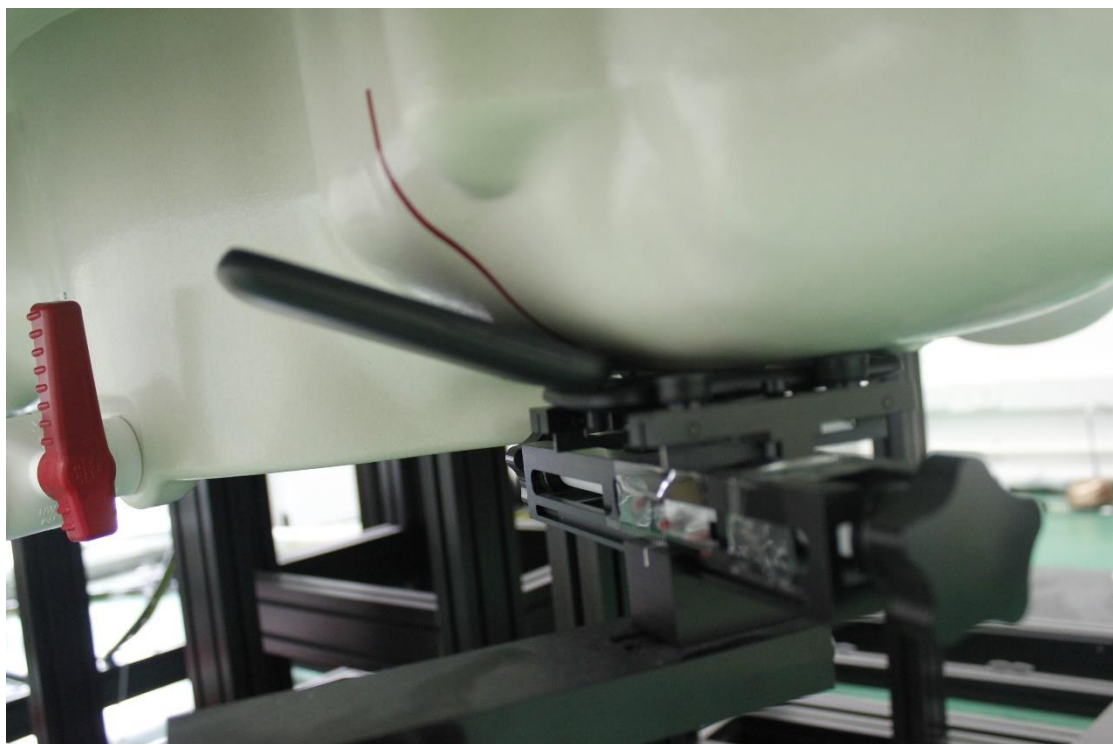


**Picture 2: Left Hand Touch Cheek Position**

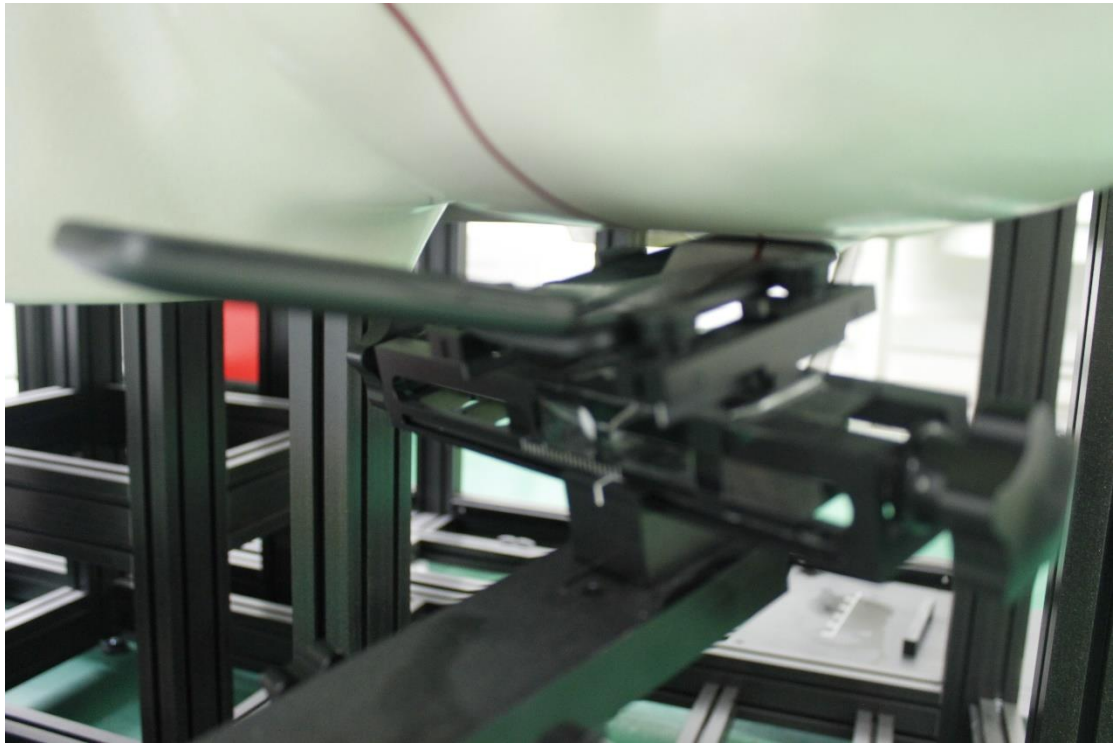

**Picture 3: Left Hand Tilt 15° Position**

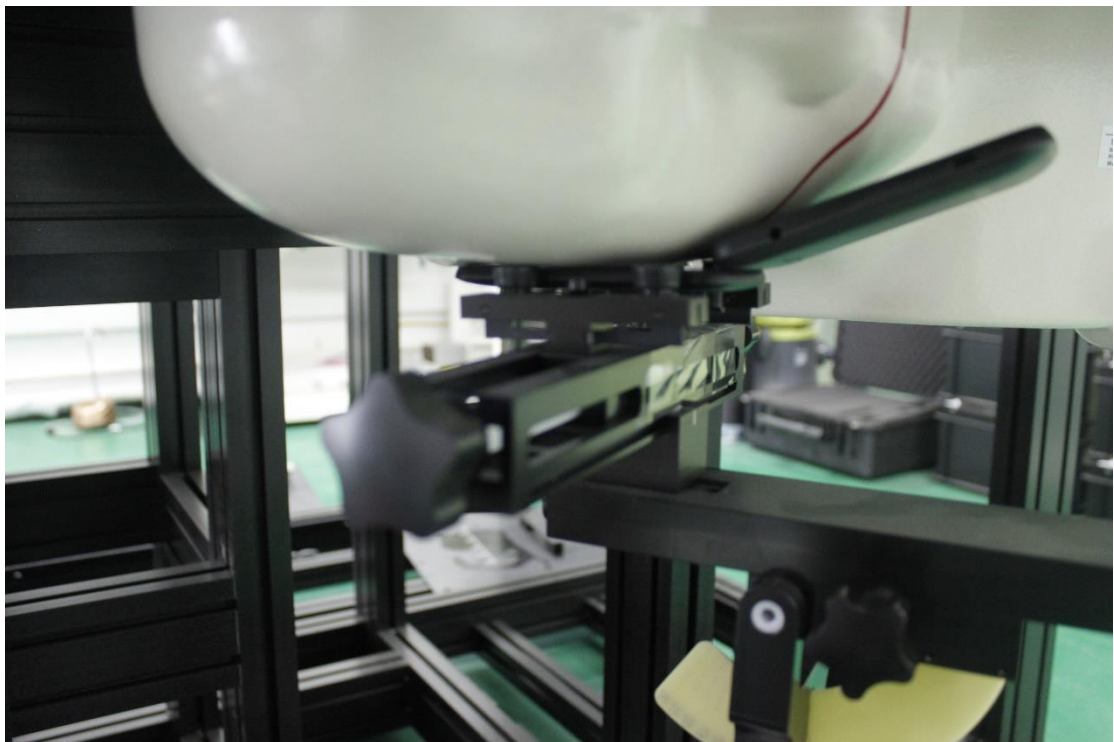


**Picture 4: Right Hand Touch Cheek Position**

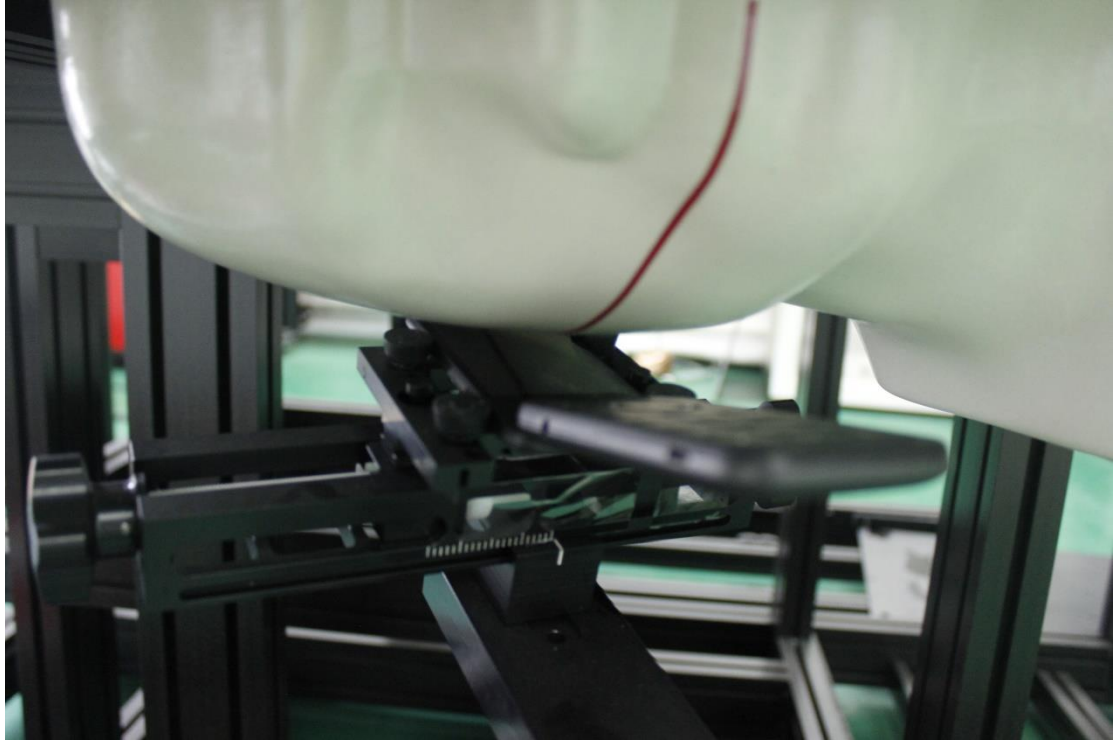

**Picture 5: Right Hand Tilt 15° Position**


**Test positions for body:**

The Body SAR is tested at the following 6 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:

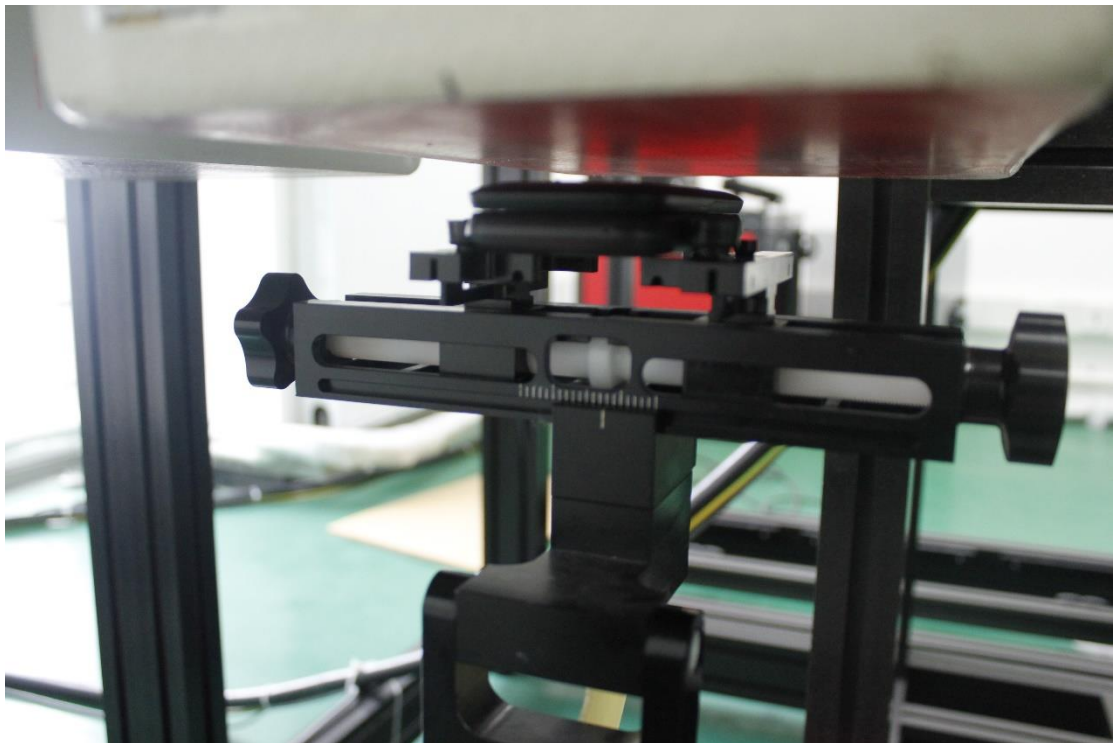


**Picture 6: Front with 10mm**



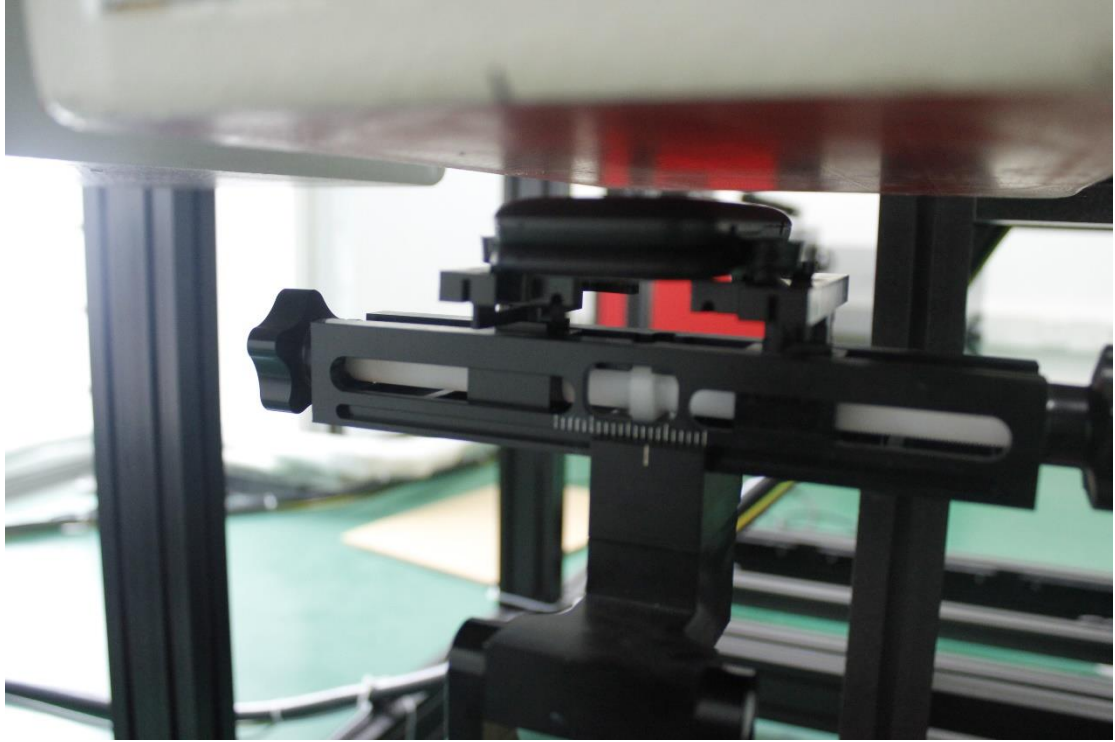


**Picture 7: Rear with 10mm**

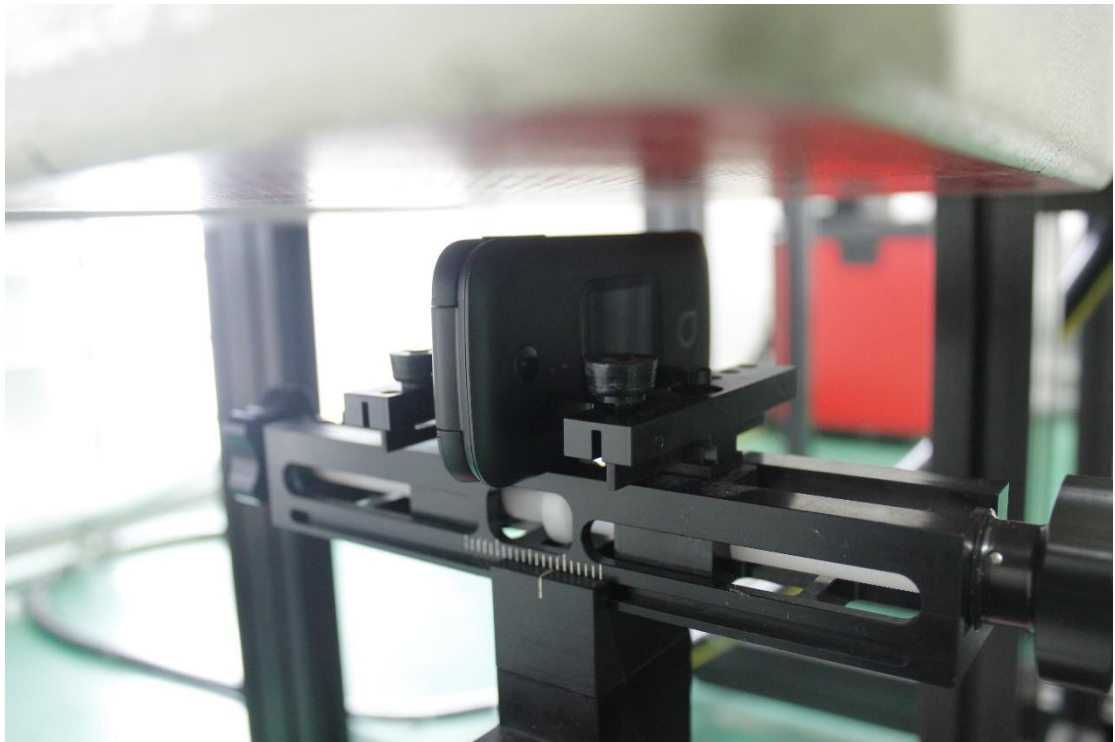


**Picture 8: Left with 10mm**




**Picture 9: Right with 10mm**

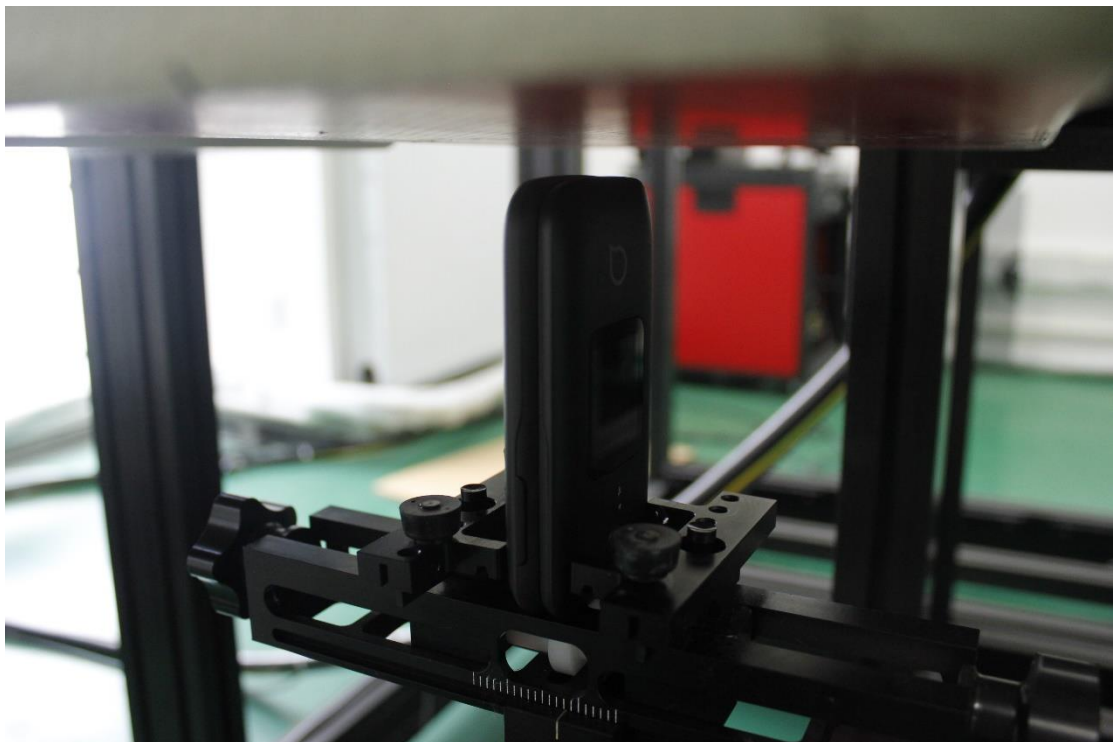

**Picture 10: Bottom with 10mm**

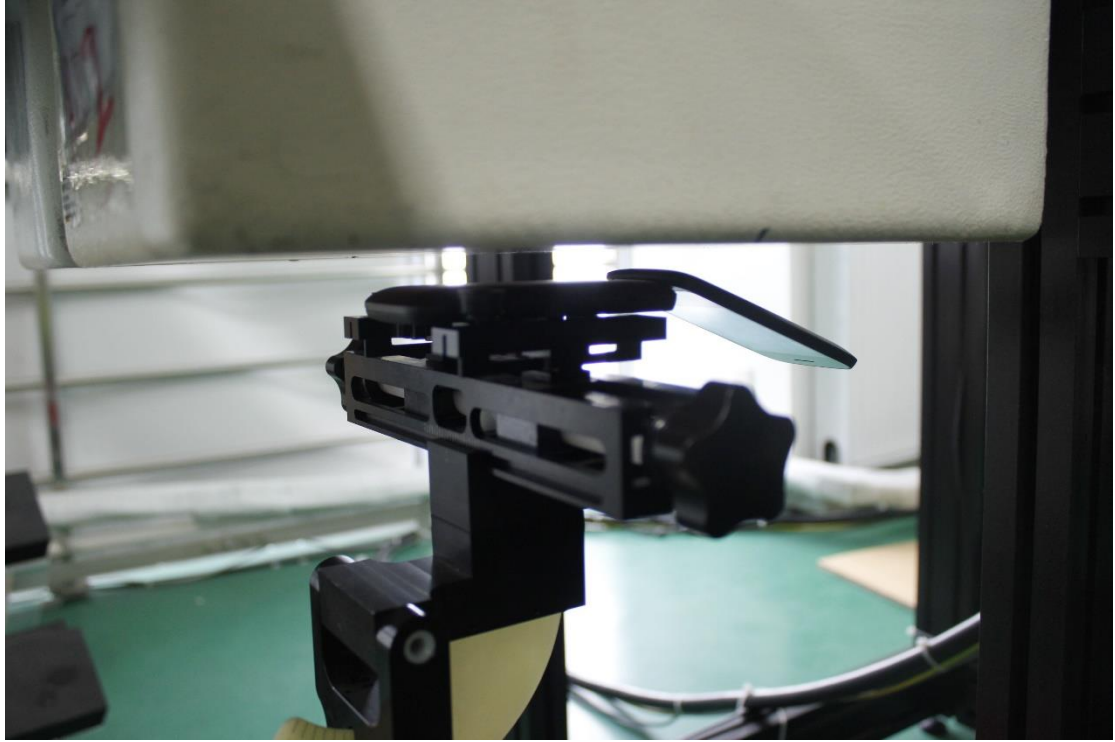


**Picture 11: Rear unfold with 10mm**

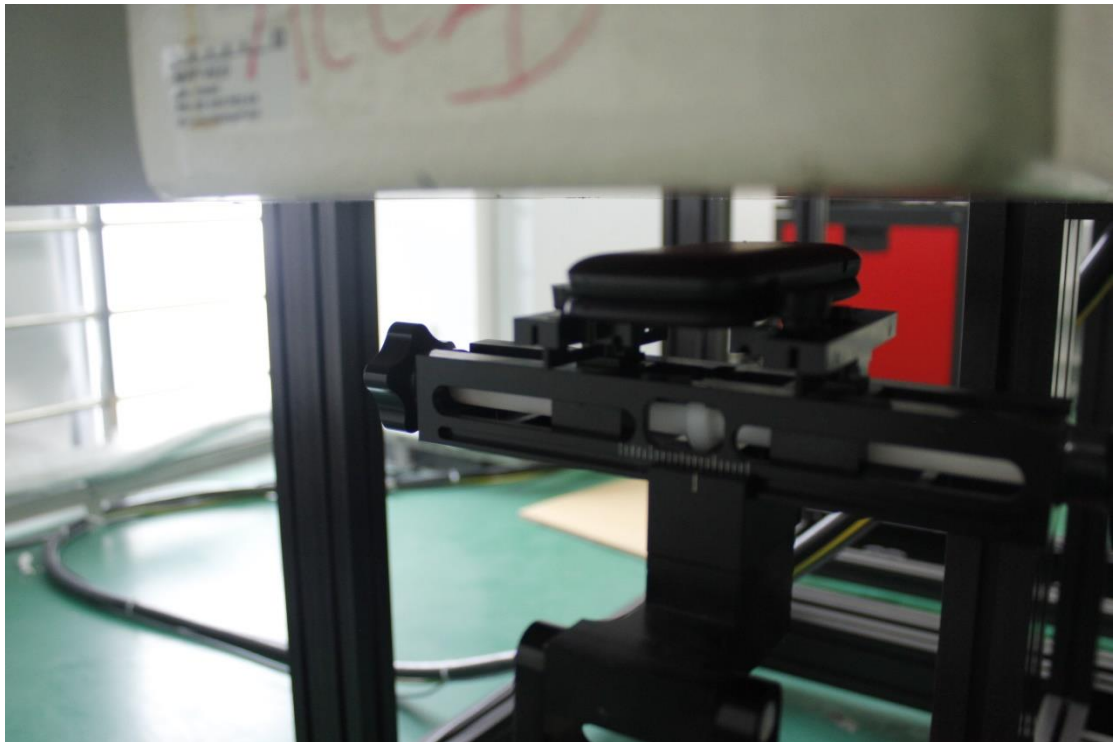


**Picture 12: Rear unfold with 15mm**



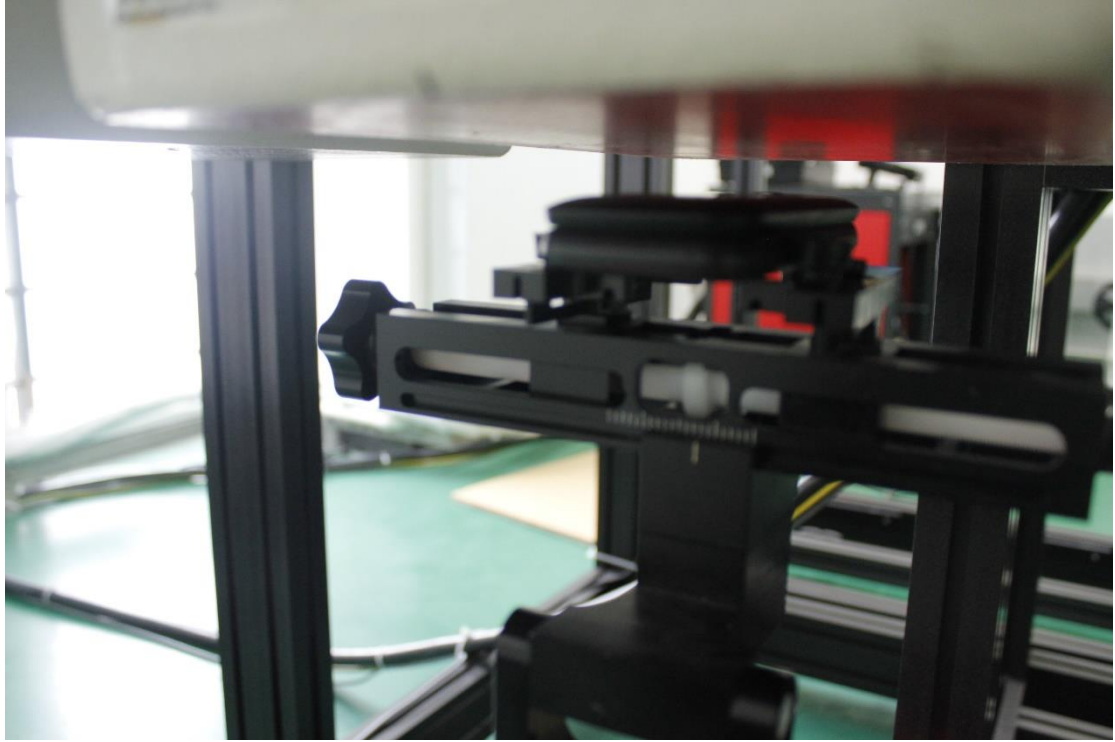

**Picture 13: Front with 15mm**

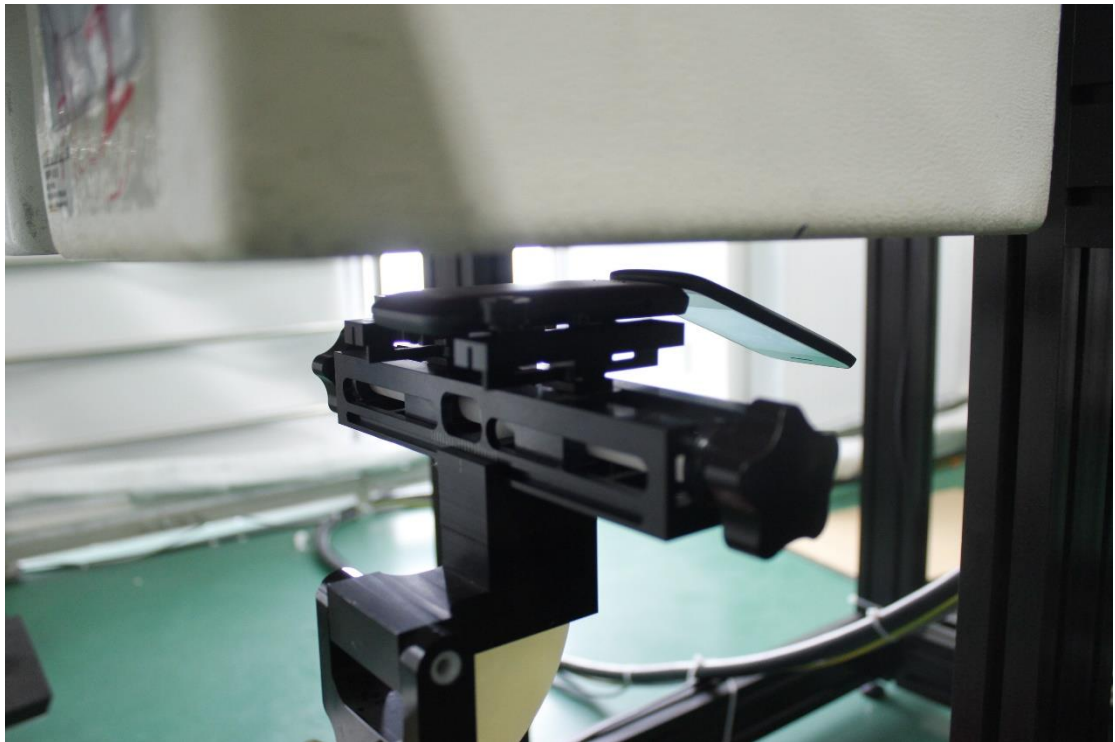

**Picture 14: Rear unfold with 15mm**