



FCC PART 15 TEST REPORT No. I20Z61601-IOT07

for

TCL Communication Ltd.

5G NR/LTE/WCDMA/GSM Mobile phone

T790B

FCC ID : 2ACCJN044

with

Hardware Version: PIO

Software Version: v2.0.1A.I.R

Issued Date: 2020-10-25

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I20Z61601-IOT07 | Rev.0 | 1st edition | 2020-10-25 |
| | | | |

CONTENTS

| | |
|--------------------------------------------------------------|----|
| CONTENTS | 3 |
| 1. TEST LATORATORY | 4 |
| 1.1. Introduction & Accreditation | 4 |
| 1.2. Testing Location | 4 |
| 1.3. Testing Environment | 4 |
| 1.4. Project date | 4 |
| 1.5. Signature | 4 |
| 2. CLIENT INFORMATION | 5 |
| 2.1. Applicant Information | 5 |
| 2.2. Manufacturer Information | 5 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) | 6 |
| 3.1. About EUT | 6 |
| 3.2. Internal Identification of EUT used during the test | 6 |
| 3.3. General Description | 6 |
| 4. REFERENCE DOCUMENTS | 7 |
| 4.1. Documents supplied by applicant | 7 |
| 4.2. Reference Documents for testing | 7 |
| 5. LABORATORY ENVIRONMENT | 7 |
| 6. SUMMARY OF TEST RESULTS | 7 |
| 6.1. Summary of Test Results | 7 |
| 6.2. Statements | 7 |
| 7. TEST EQUIPMENTS UTILIZED | 8 |
| ANNEX A: MEASUREMENT RESULTS | 9 |
| A.1. Measurement Method | 9 |
| A.2. Channel move time and channel closing transmission time | 12 |
| A.3.Non-Occupancy Period | 16 |
| A3.1 Associated test | 16 |
| ANNEX B: Accreditation Certificate | 18 |

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2020-10-12

Testing End Date: 2020-10-25


1.5. Signature



Feng Aiyu
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Hu Xiaoyu
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: CHINA
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: CHINA
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

| | |
|----------------------|----------------------------------------------------------|
| Description | 5G NR/LTE/WCDMA/GSM Mobile phone |
| Model name | T790B |
| FCC ID | 2ACCJN044 |
| WLAN Frequency Range | ISM Band: -5250MHz~5350MHz -5470MHz~5725MHz |
| Type of modulation | OFDM |
| Antenna | Integral Antenna |
| Extreme vol. Limits | 3.8V |
| Device Type (DFS) | Client without radar detection(only support client mode) |
| TPC mechanism | Not support |
| Antenna gain | -1.9 dBi |

3.2. Internal Identification of EUT used during the test

| EUT ID* | S/N | HW Version | SW Version |
|----------------|-----------------|-------------------|-------------------|
| UT07a | 015852000000403 | PIO | v2.0.1A.I.R |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. General Description

The Equipment Under Test (EUT) is a model of 5G NR/LTE/WCDMA/GSM Mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

| | | |
|----------------|---------------------------------------------------------------------------|------|
| FCC Part15 | FCC CFR 47, Part 15, Subpart E: 15.407 General technical requirements. | 2018 |
| KDB 905642 D02 | UNII DFS Compliance Procedures New Rules v02 | 2016 |
| KDB 905462 D03 | UNII Clients Without Radar Detection New Rules v01r02 | 2016 |

5. LABORATORY ENVIRONMENT

Measurement is performed in shielding room.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

| SUMMARY OF MEASUREMENT RESULTS | Sub-clause of Part15E | Verdict |
|---------------------------------------------------------|-----------------------|----------|
| Channel move time and channel closing transmission time | 15.407 (h)(2)(iii) | P |
| Non-Occupancy Period | 15.407 (h)(2) (iv) | P |

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

| | |
|----|-------------------------------------------------------------------------------|
| P | Pass, The EUT complies with the essential requirements in the standard. |
| NM | Not measured, The test was not measured by CTTL |
| NA | Not Applicable, The test was not applicable |
| F | Fail, The EUT does not comply with the essential requirements in the standard |

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deal with the UNII DFS functions among the features described in section 3, and The EUT met all requirements of the reference documents.

The end user is not available to get and modify the parameters of the detected Radar Waveforms in this product.

Test Conditions

| | |
|-------|--------------------|
| T nom | Normal Temperature |
| T min | Low Temperature |
| T max | High Temperature |
| V nom | Normal Voltage |
| V min | Low Voltage |

| | |
|-------|-------------------|
| V max | High Voltage |
| H nom | Norm Humidity |
| A nom | Norm Air Pressure |

For this report, all the test case listed above is tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

| | | |
|--------------|-------|------------------|
| Temperature | T nom | 26°C |
| Voltage | V nom | 3.8V(By battery) |
| Humidity | H nom | 44% |
| Air Pressure | A nom | 1010hPa |

7. TEST EQUIPMENTS UTILIZED

Conducted test system


| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Period | Calibration Due Date |
|-----|------------------------|---------|---------------|-----------------|--------------------|----------------------|
| 1 | Vector Signal Analyzer | FSQ40 | 200089 | Rohde & Schwarz | 1 year | 2021-05-15 |
| 2 | Vector Signal General | SMU200A | 103752 | Rohde & Schwarz | 1 year | 2021-05-14 |
| 3 | Shielding Room | S81 | / | ETS-Lindgren | / | / |

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

The below figure shows the DFS setup, where the EUT is a RLAN device operating in slave mode, without Radar Interference Detection function. This setup also contains a device operating in master mode. The radar test signals are injected into the master device. The EUT (slave device) is associated with the master device. WLAN traffic is generated by streaming the mpeg file from the master to the slave in full monitor video mode using the media player.

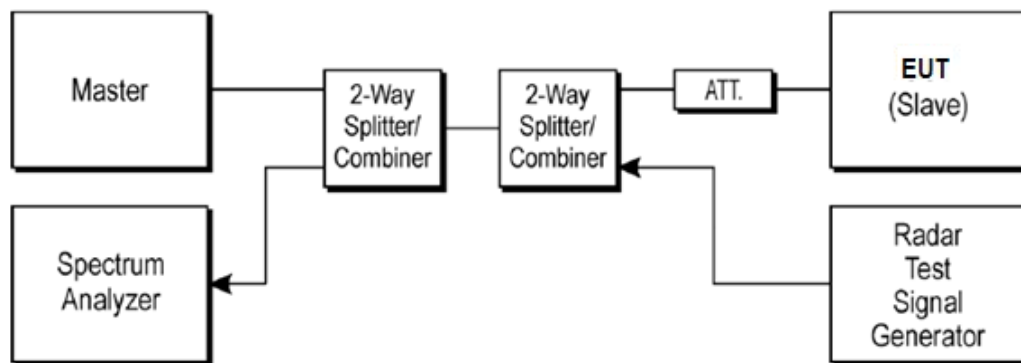

Note:

- 1) All Measurements are performed with the EUT's narrowest channel bandwidth.
- 2) The master device information is as follows
Vendor: RUCKUS
Model: R600
FCC ID: S9GR600
- 3) The software of radar signal generator (R&S SMU200A) is completely designed based on FCC-06-96A1/NTIA requirement.

A.1.2. Parameters of DFS test signal

1). Interference threshold values, master or client incorporation in service monitoring. For device power less than 23dBm (E.I.R.P.), the threshold level is -62 dBm at the antenna port after correction for antenna gain and procedural adjustments.


Because of conducted measurement performed, the calibration power from radar signal generator to antenna port of DFS test equipment is -62 dBm.

| Maximum Transmit Power | Value |
|------------------------|---------|
| > 200 mW | -64 dBm |
| < 200 mW | -62 dBm |

The radar Detection Threshold, lowest antenna gain is the parameter of interference radar DFS detection threshold.


One 10 Second plot bee reported for the short Pulse Radar type 1-4, the type 0 was be used, which was selected by auto test software.

Radar Waveform Calibration Result:

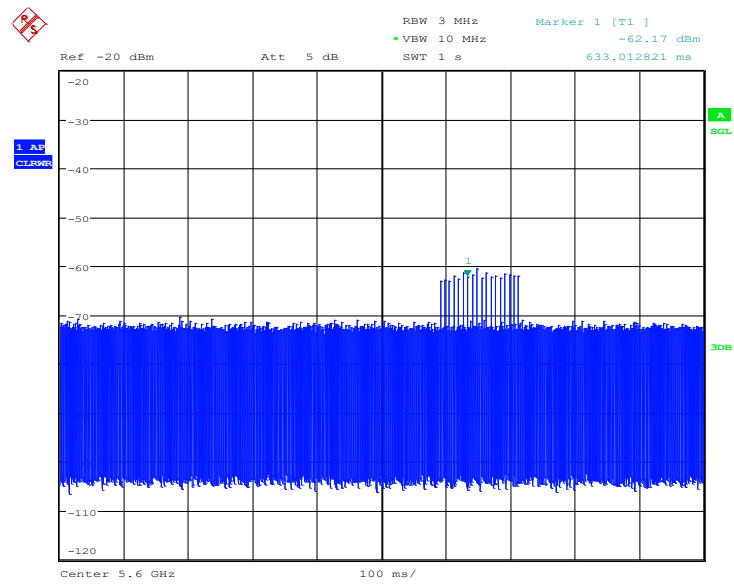


Date: 4.JUN.2018 10:01:55

Fig.A.1 20M Calibration Result

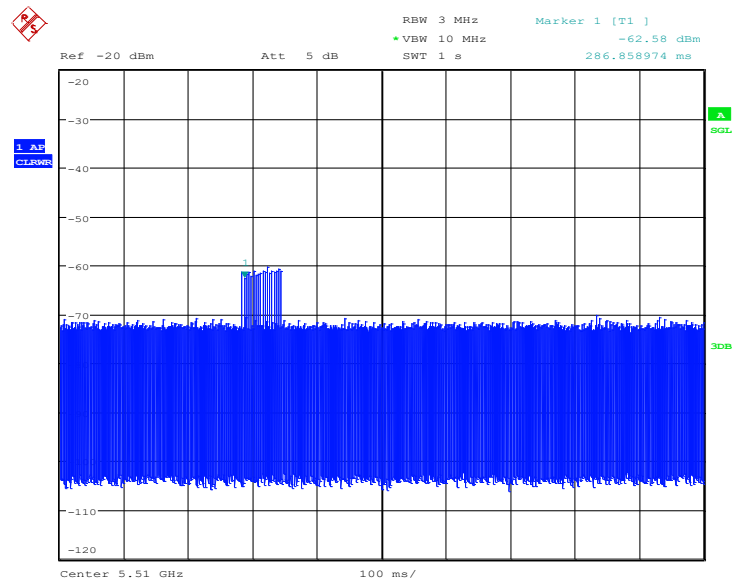

Date: 4.JUN.2018 10:03:04

Fig.A.2 40M Calibration Result

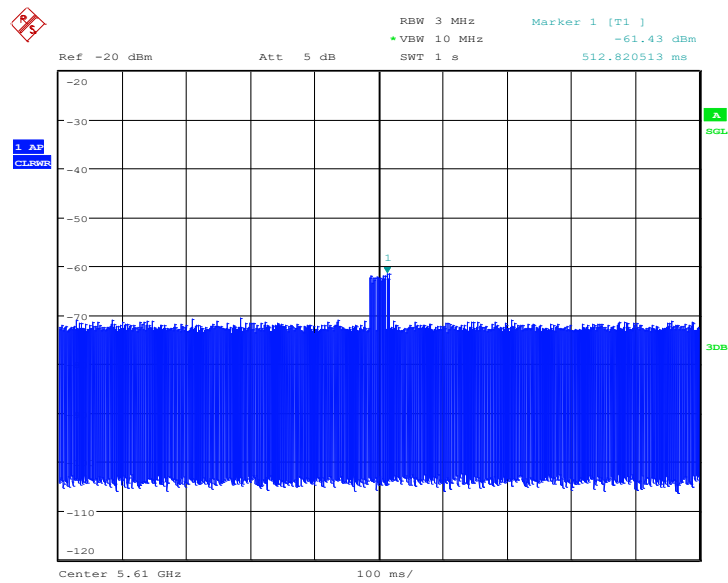

Date: 4.JUN.2018 10:00:37

Fig.A.3 80M Calibration Result

2). DFS requirement values

The required values are as the following table.

| Parameter | Value |
|-----------------------------------|-----------------------------------------------------|
| Non-occupancy | > 1800 s |
| Channel Availability Check Time | 60 s |
| Channel Move Time | 10 s |
| Channel Closing Transmission Time | 200 ms + 60 ms |
| U-NII Detection Bandwidth | Minimum 80% of the 99% transmission power bandwidth |

As the EUT is IP based system, the MPEG video file from NTIA website is used to steam to EUT via the Master device.

A.1.3. Measurement Uncertainty

| Item | Measurement Uncertainty |
|-------|-------------------------|
| Time | 0.70 ms |
| Power | 0.75 dBm |


A.2. Channel move time and channel closing transmission time

Measurement Limit:

| Test Items | Limit |
|-----------------------------------|------------------|
| channel closing transmission time | < 200 ms + 60 ms |
| Channel move time | < 10 s |

Measurement Results:


Frequency Band: 5250MHz ~ 5350MHz

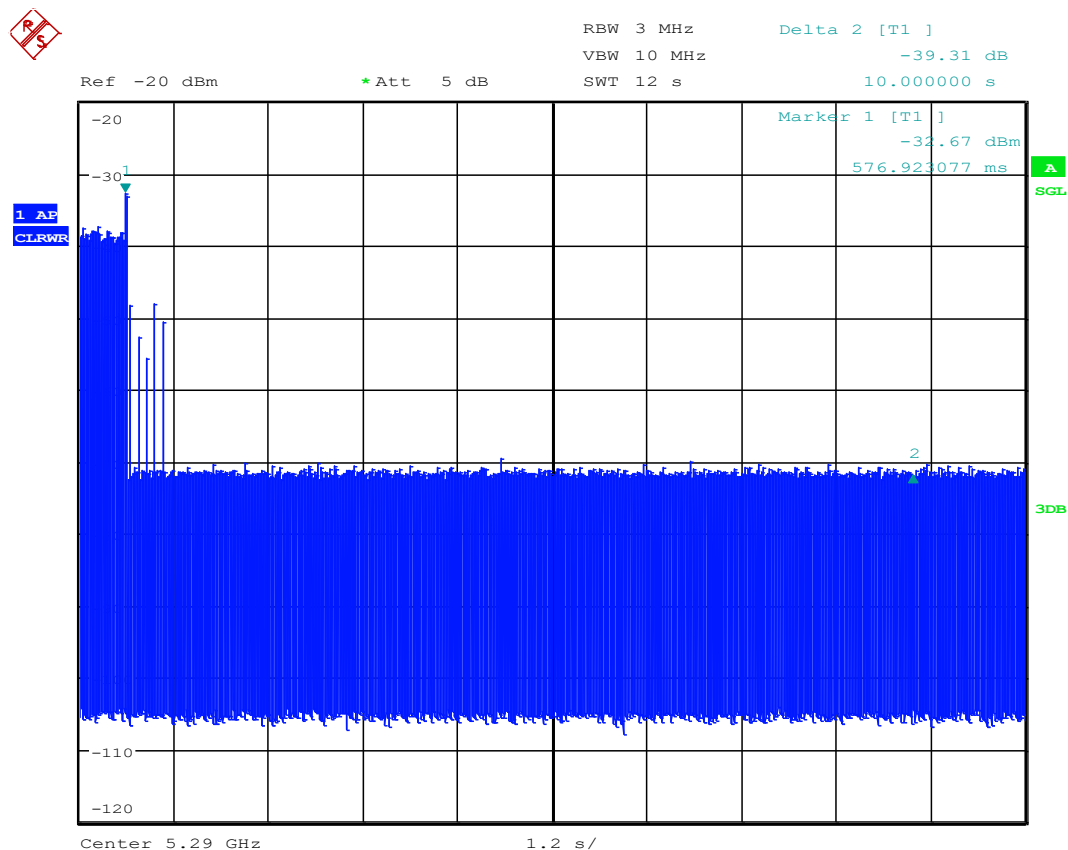

Date: 22.OCT.2020 01:53:01

Fig.A.4 Channel move time

The channel move time is as the figure. It shows the time of the radar and the client pulses. The figure shows that the client stops transmission within 10 seconds, and no transmissions occur after 10 seconds later of the radar burst signal.

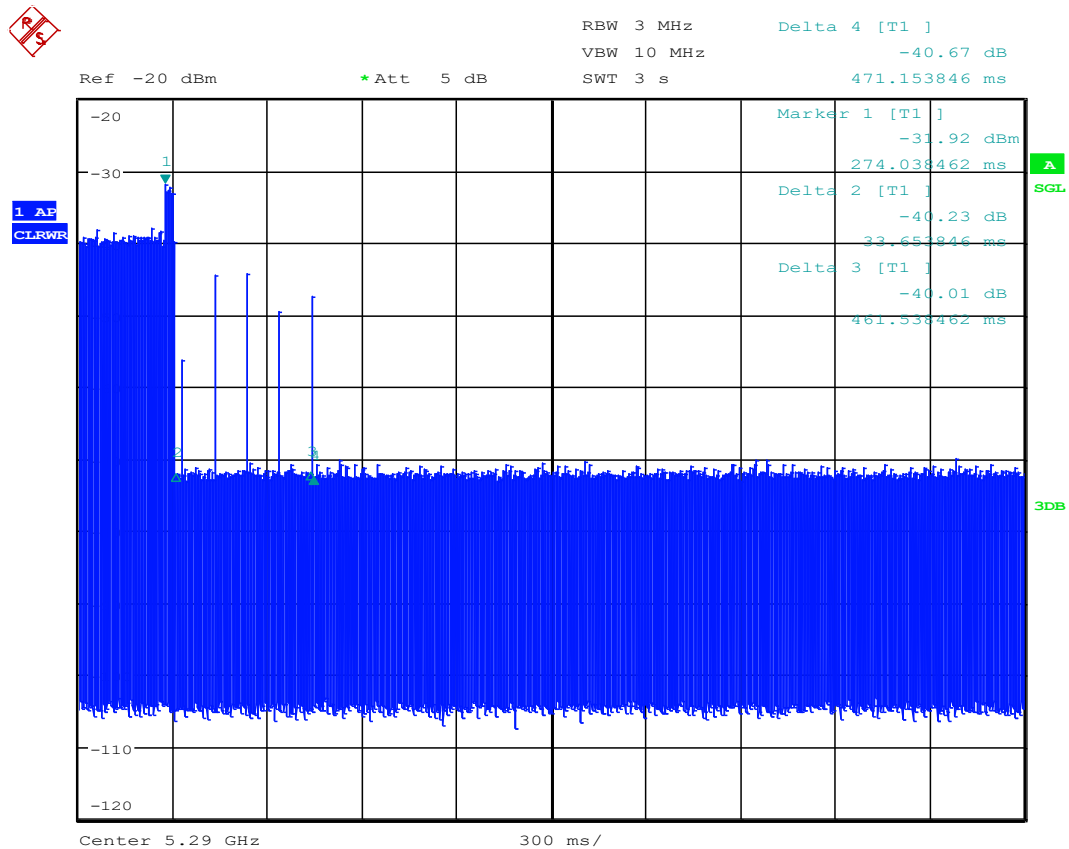


Date: 22.OCT.2020 01:57:21

Fig.A.5 channel closing transmission time

The closing transmission time is as the figure, and the result is 81.7ms.

Conclusion: PASS


Frequency Band 5470MHz ~ 5725MHz

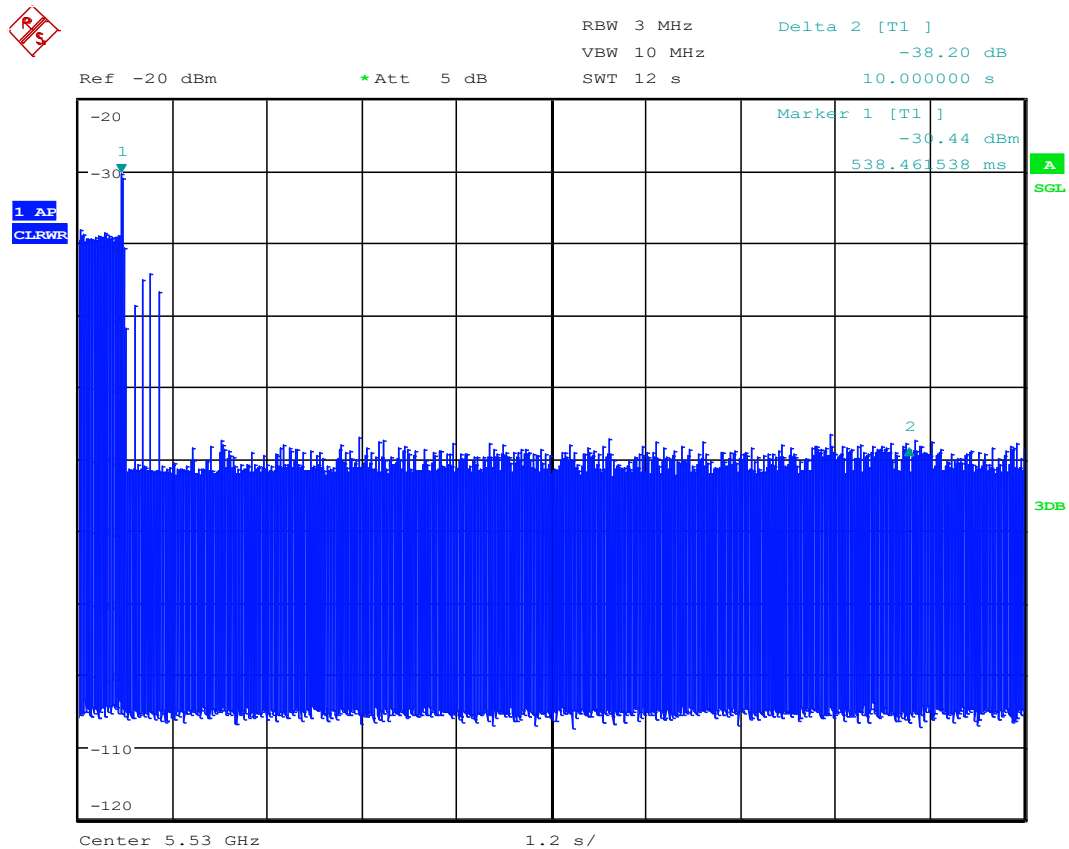

Date: 22.OCT.2020 05:00:50

Fig.A.6 Channel move time

The channel move time is as the figure. It shows the time of the radar and the client pulses. The figure shows that the client stops transmission within 10 seconds, and no transmissions occur after 10 seconds later of the radar burst signal.

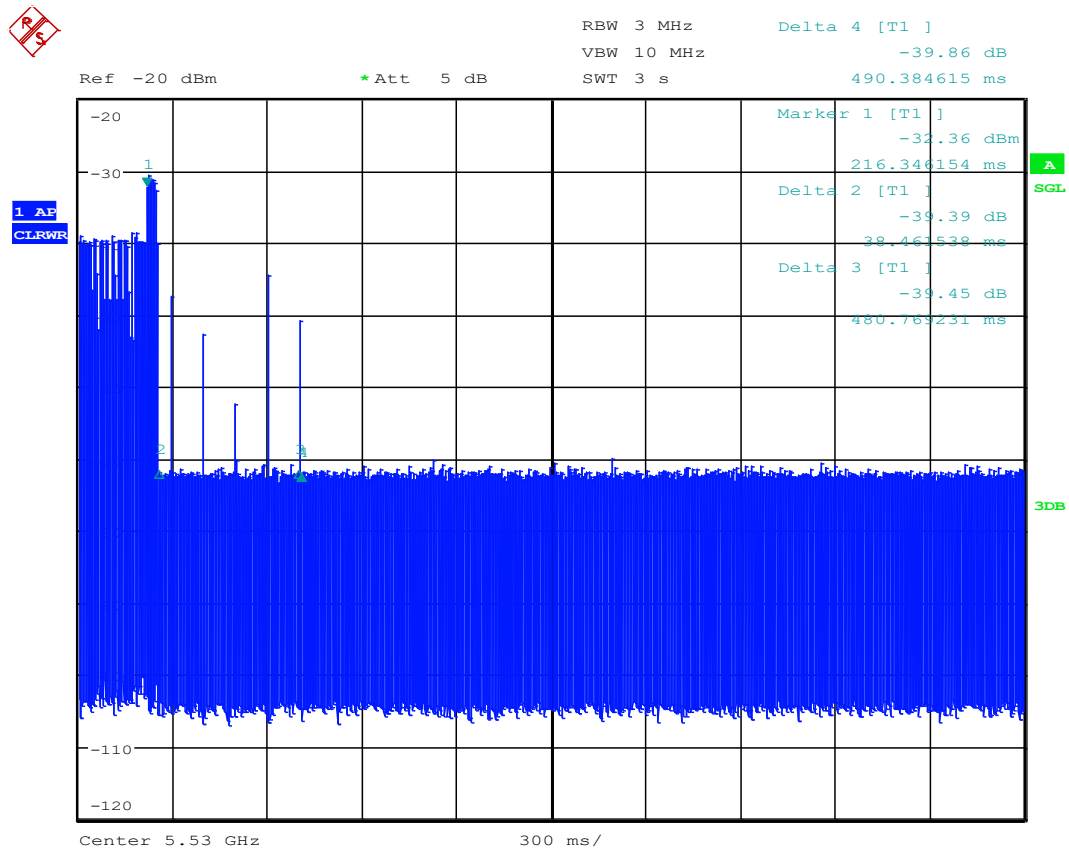

Date: 22.OCT.2020 04:43:49

Fig.A.7 channel closing transmission time

The closing transmission time is as the figure, and the result is 86.56ms

Conclusion: PASS

A.3.Non-Occupancy Period


Measurement Limit:

| Test Items | Limit |
|----------------------|----------|
| Non-Occupancy Period | > 1800 s |

A3.1 Associated test

Associate the master and client, transmit specified stream between the master and client; monitor the analyzer on the operating frequency to make sure no beacons have been transmitted for 1800 seconds.

Frequency Band: 5150MHz ~ 5350MHz

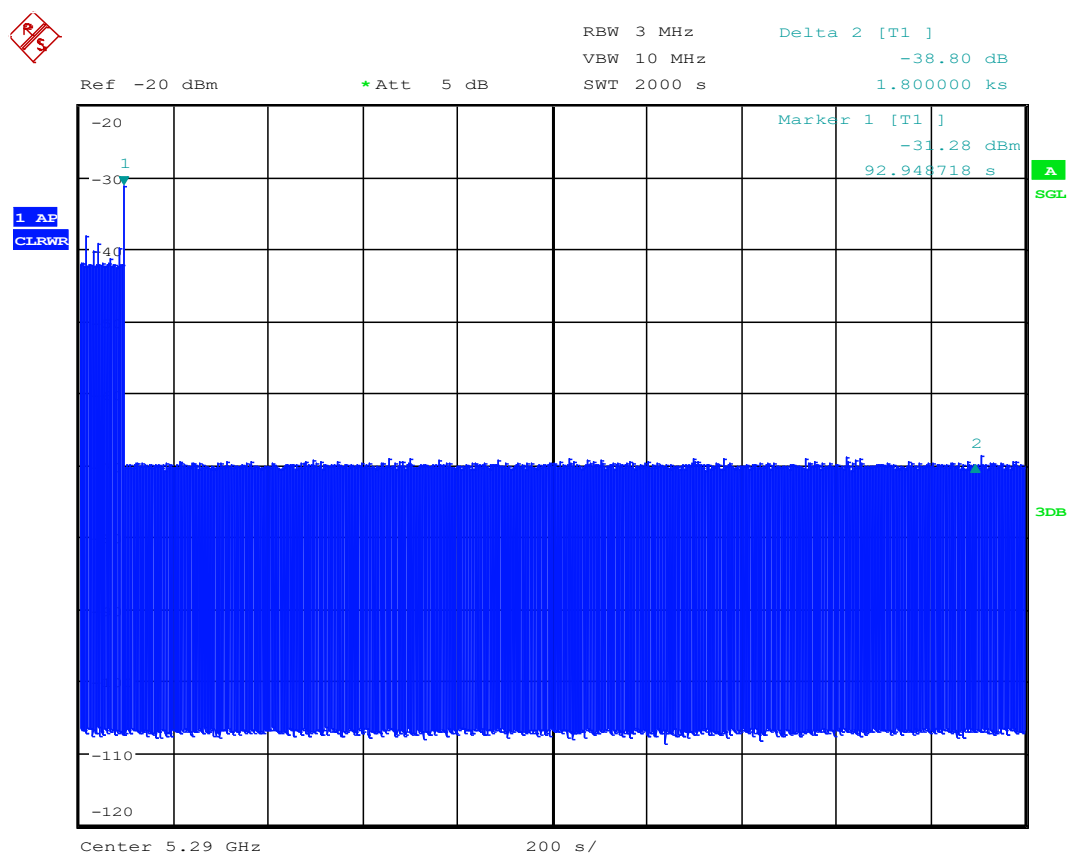


Date: 22.OCT.2020 03:26:43

Fig.A.8 Non-Occupancy Period

The figure above shows that the client does not transmit any emission within 1800 seconds after getting the order of “stop transmits” from the DFS master (access point).

Frequency Band: 5470MHz ~ 5725MHz

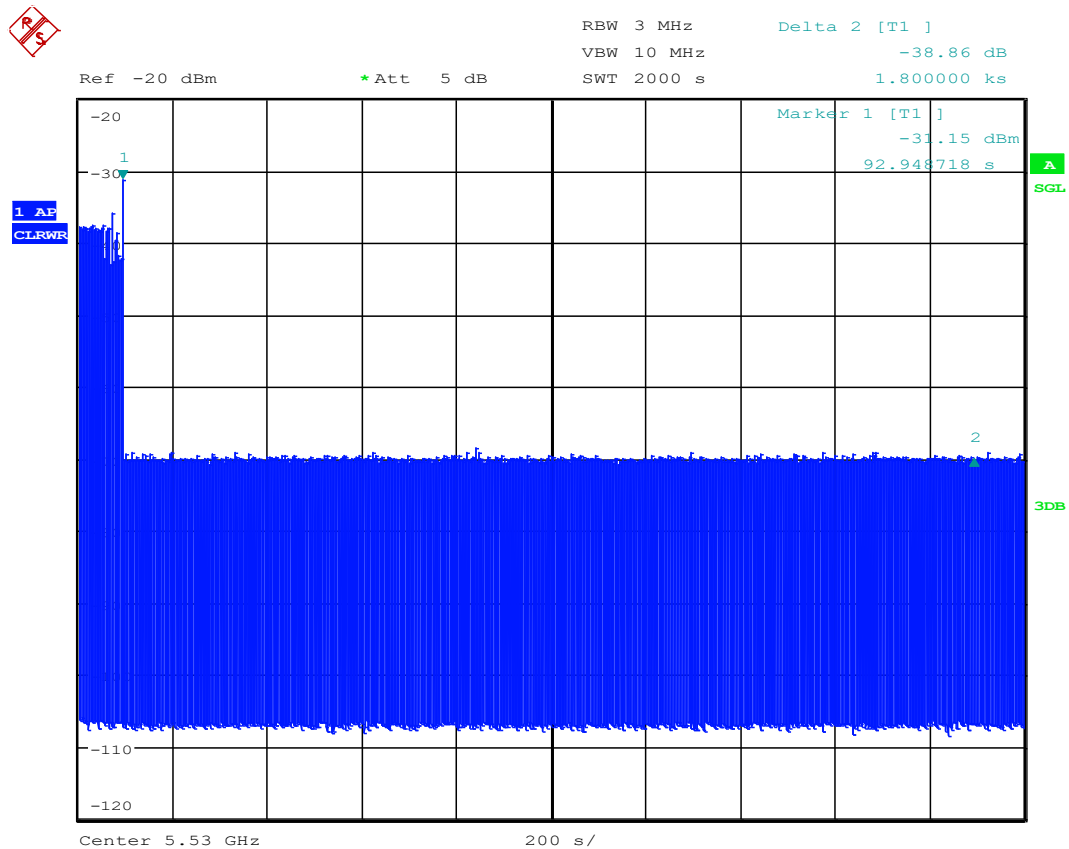




Date: 22.OCT.2020 06:03:25

Fig.A.9 Non-Occupancy Period

The figure above shows that the client does not transmit any emission within 1800 seconds after getting the order of “stop transmits” from the DFS master (access point).

Conclusion: PASS

ANNEX B: Accreditation Certificate

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>United States Department of Commerce National Institute of Standards and Technology</p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 2em; font-weight: bold; letter-spacing: 0.5em;">NVLAP[®]</div><div style="text-align: center;"> ilac-MRA</div></div> | |
| <hr/> <h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr/> | |
| <p>NVLAP LAB CODE: 600118-0</p> | |
| <p>Telecommunication Technology Labs, CAICT Beijing China</p> | |
| <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> | |
| <p>Electromagnetic Compatibility & Telecommunications</p> | |
| <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i></p> | |
| <hr/> <p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p> | <div style="display: flex; align-items: center; justify-content: center;"><div style="text-align: center;"> DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</div><div style="margin-left: 20px;"> _____ <i>For the National Voluntary Laboratory Accreditation Program</i></div></div> |

*** END OF REPORT BODY ***