

Fig.46. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

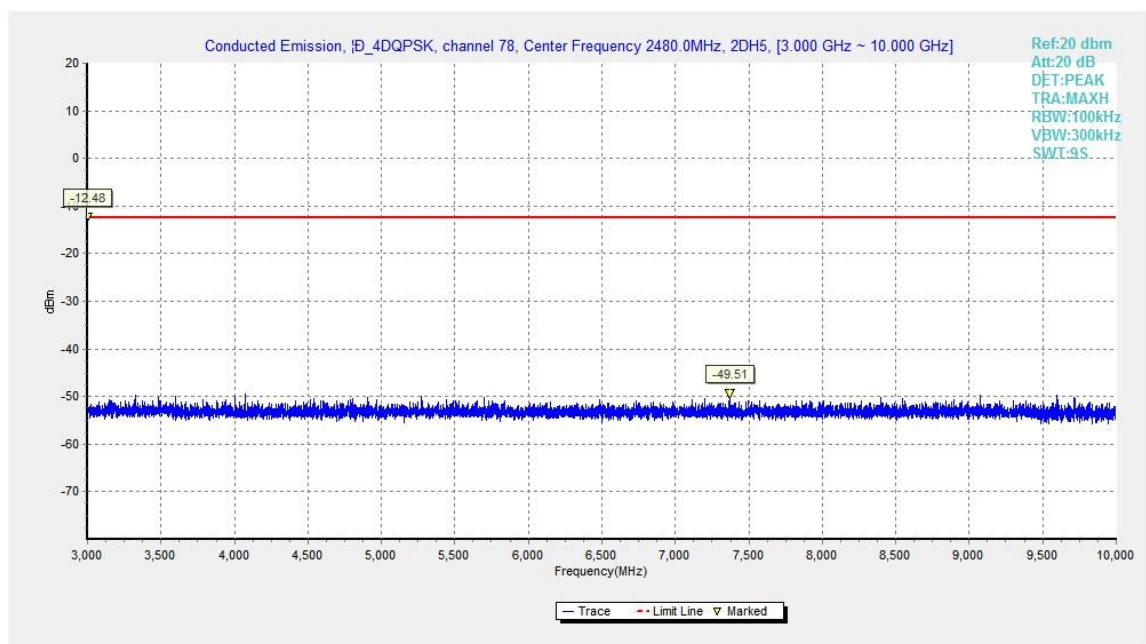


Fig.47. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

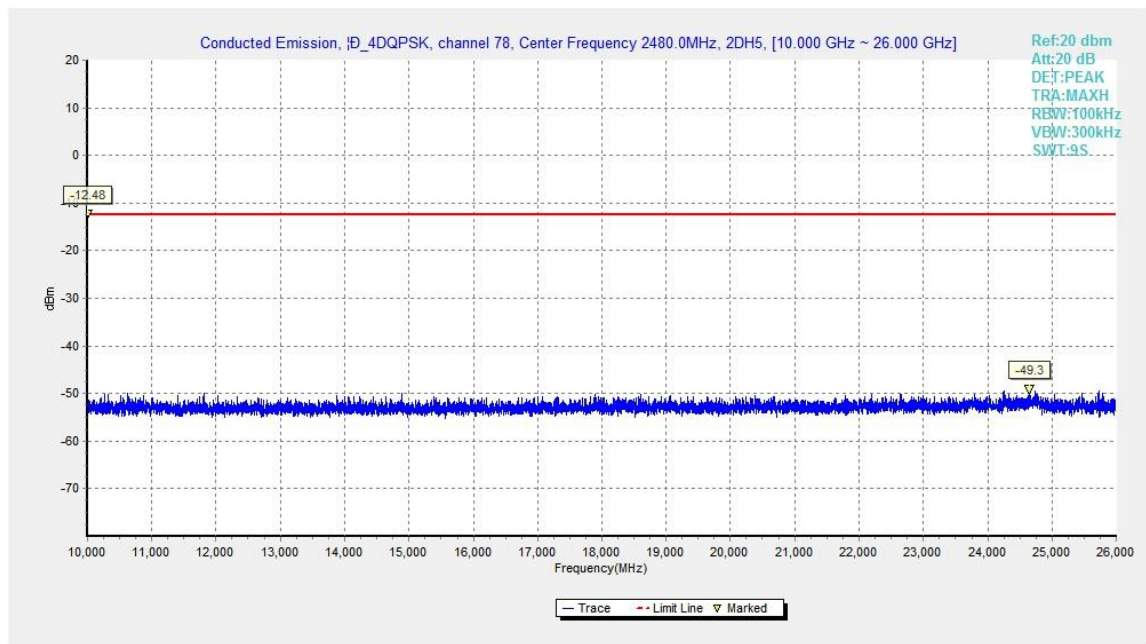


Fig.48. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

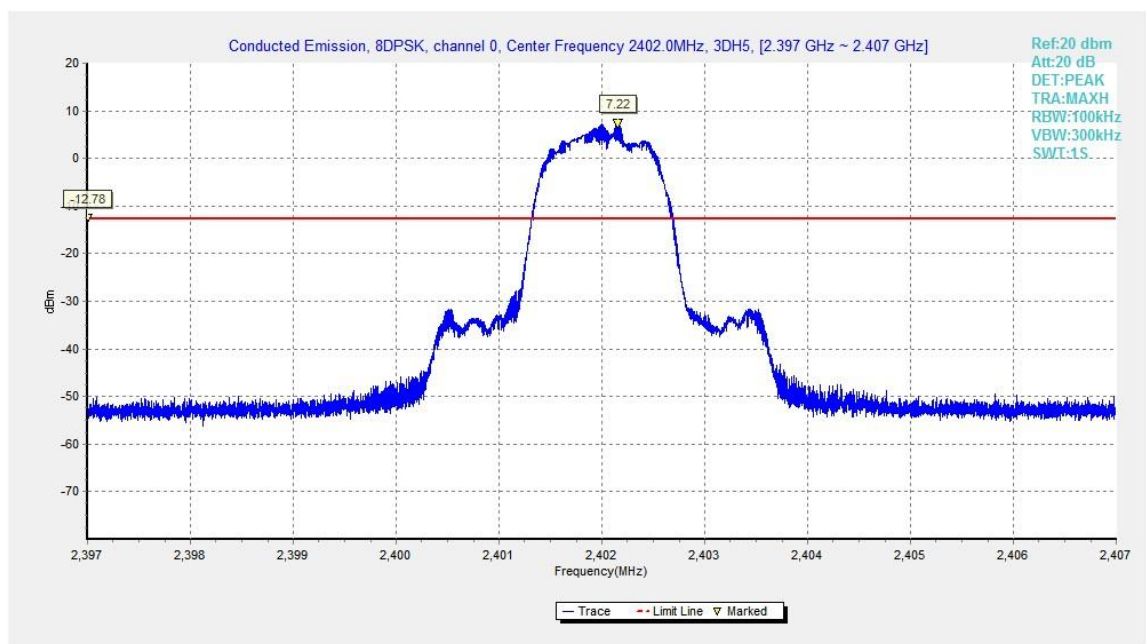


Fig.49. Conducted spurious emission: 8DPSK, Channel 0, 2,402MHz

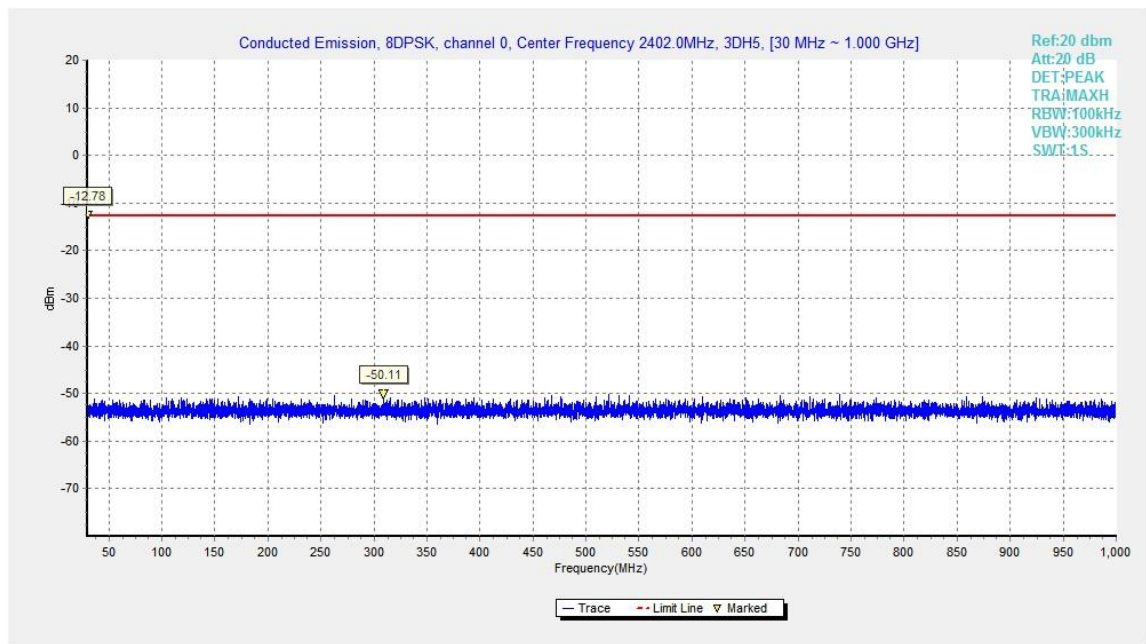


Fig.50. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

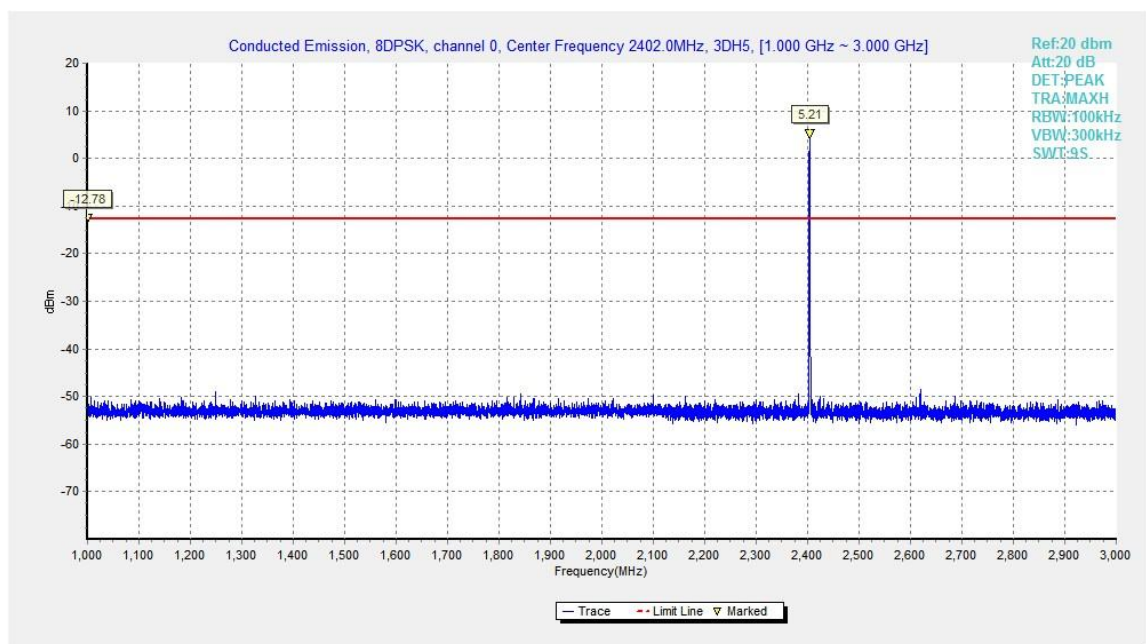


Fig.51. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

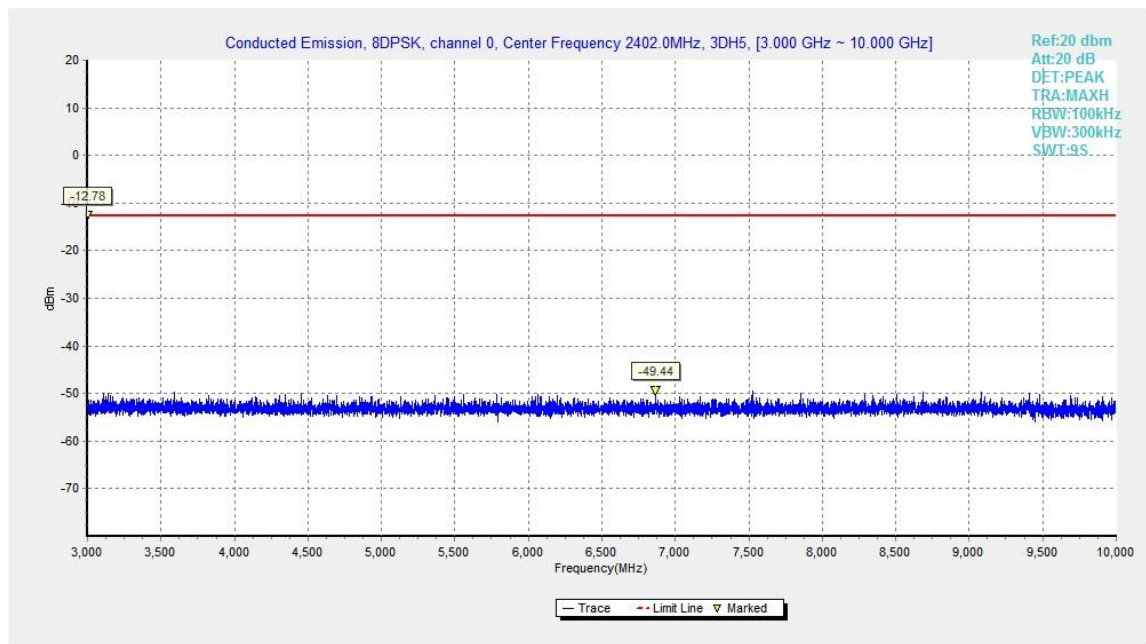


Fig.52. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

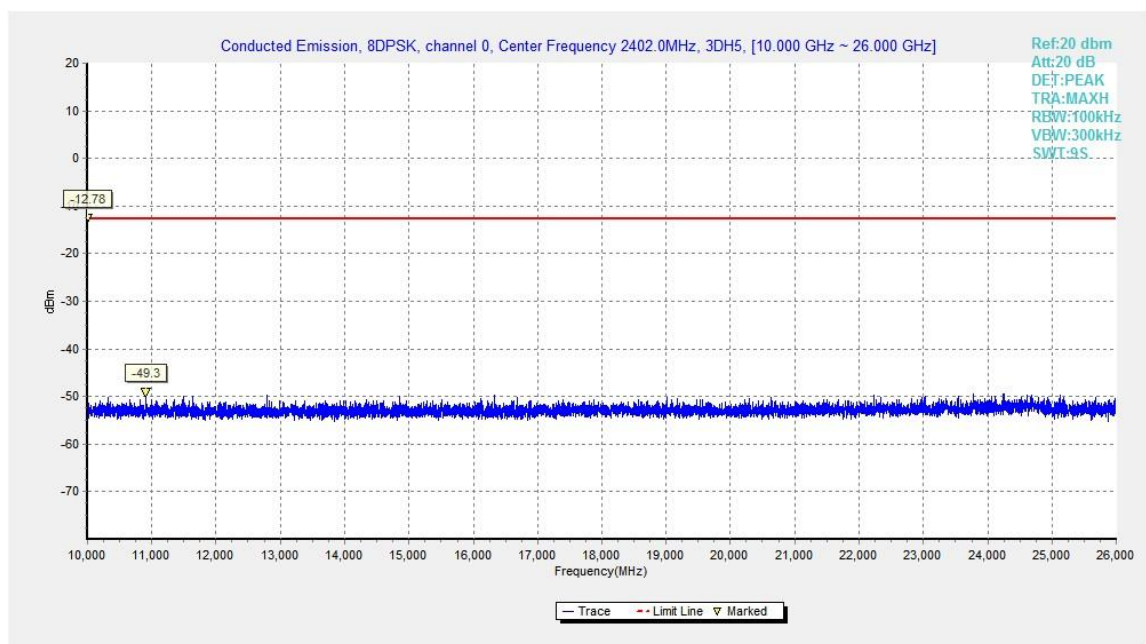


Fig.53. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz

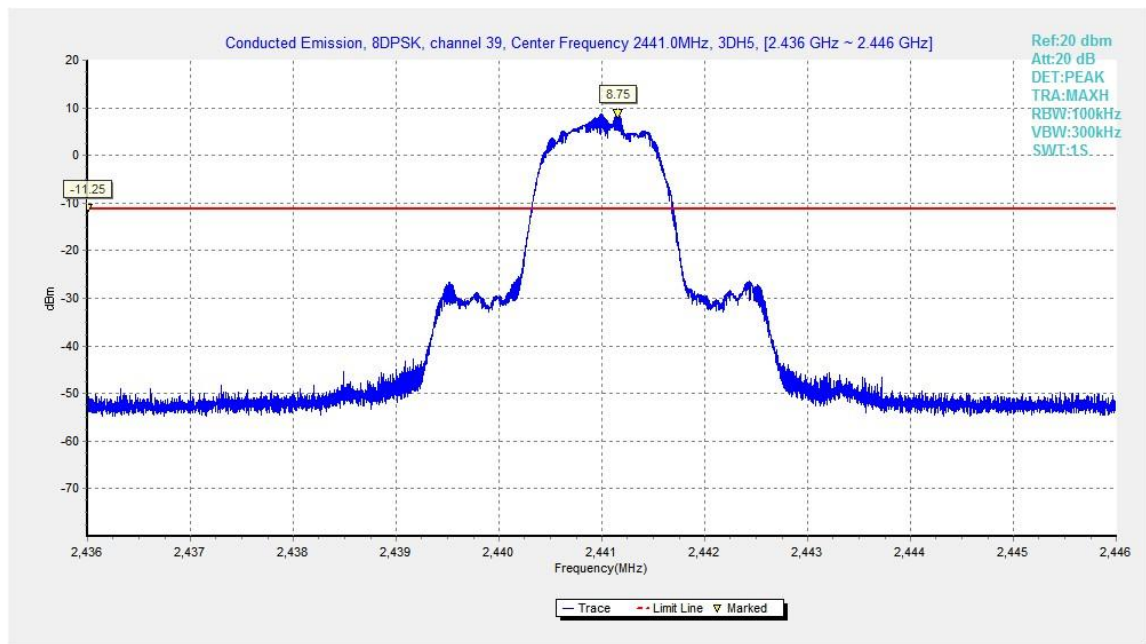


Fig.54. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

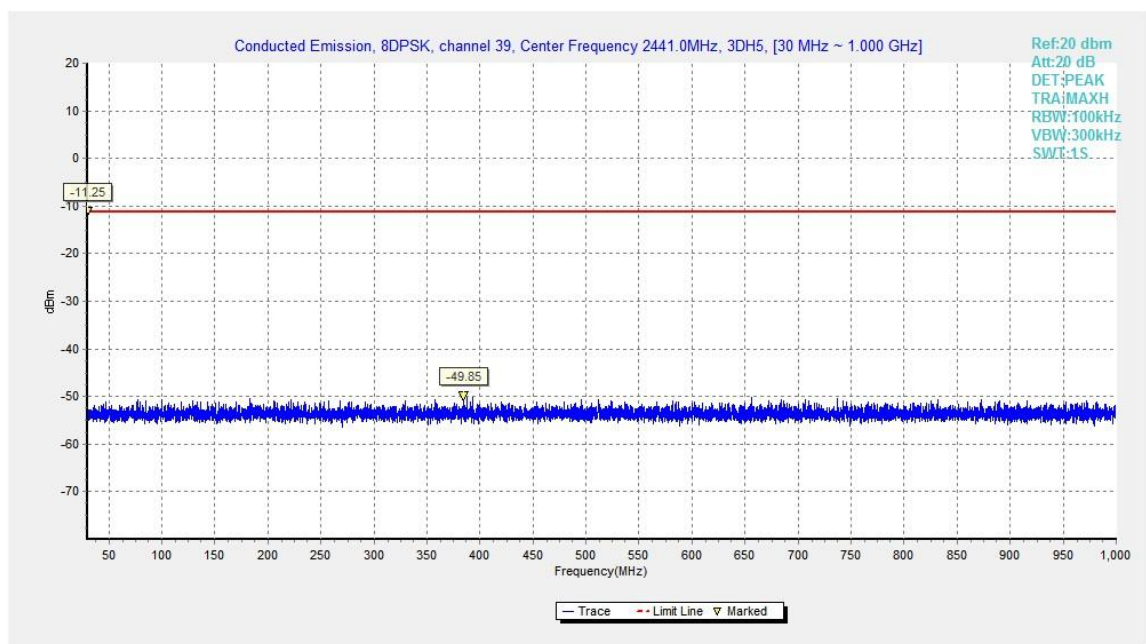


Fig.55. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

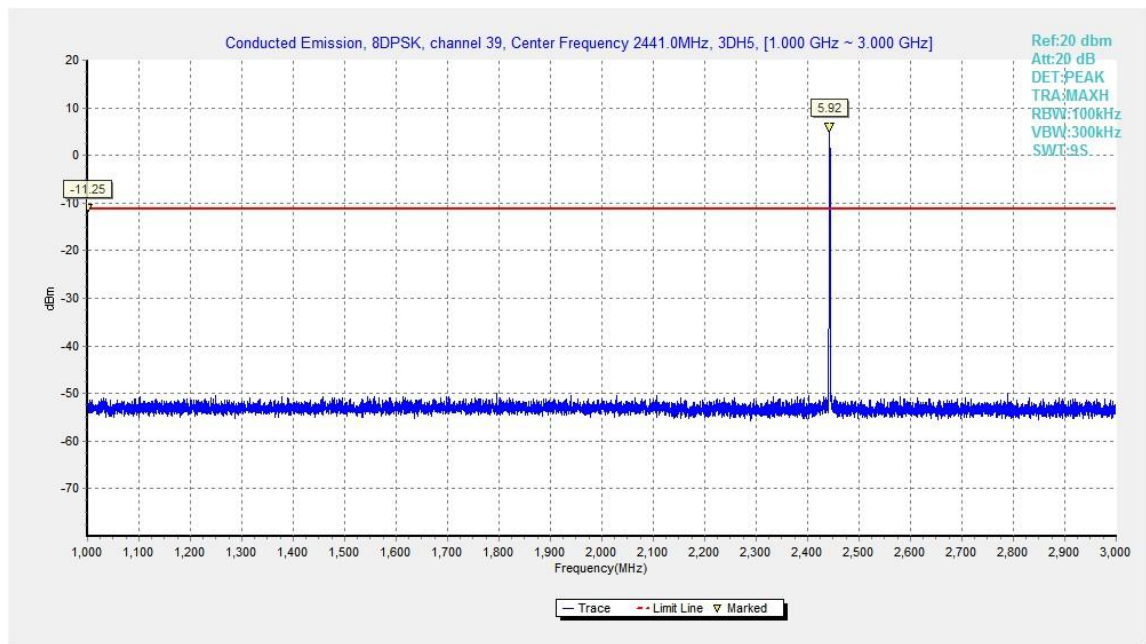


Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

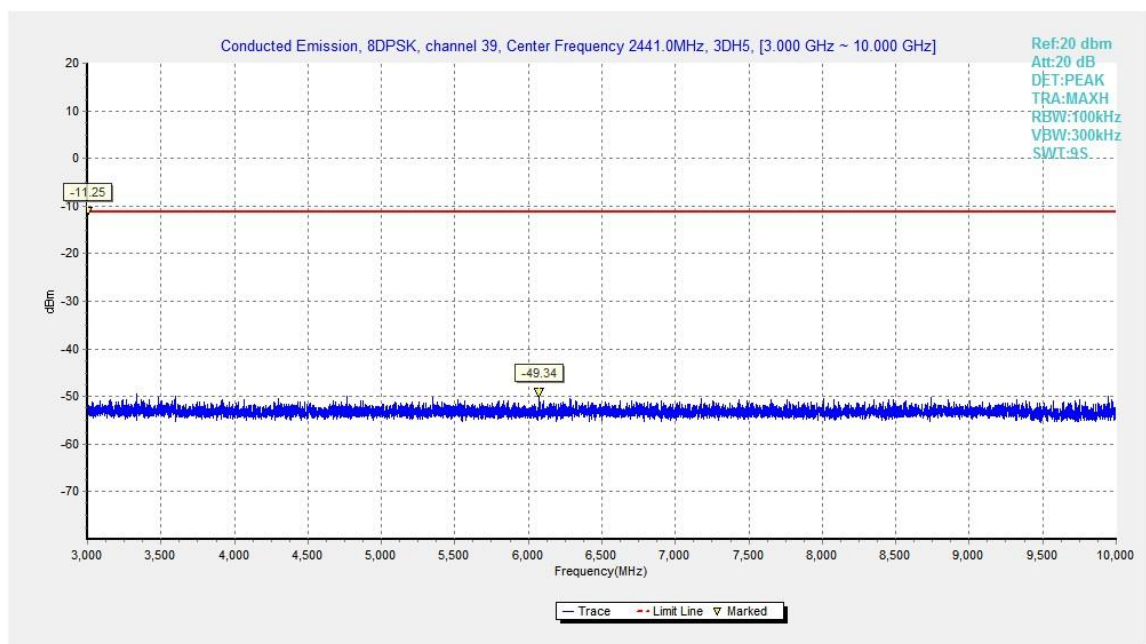


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

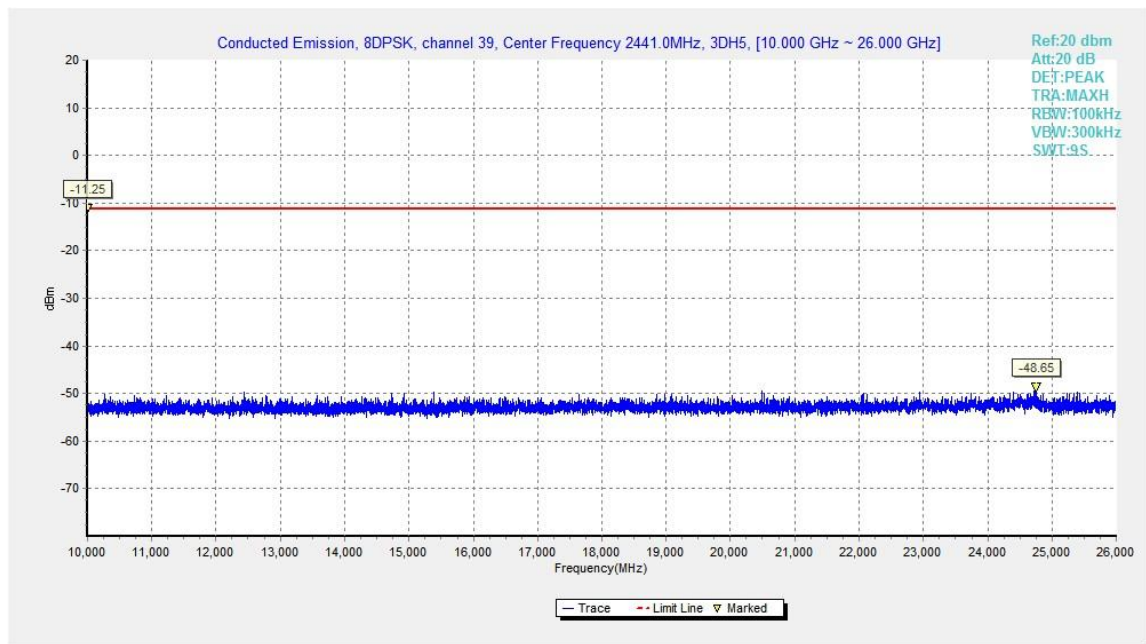


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

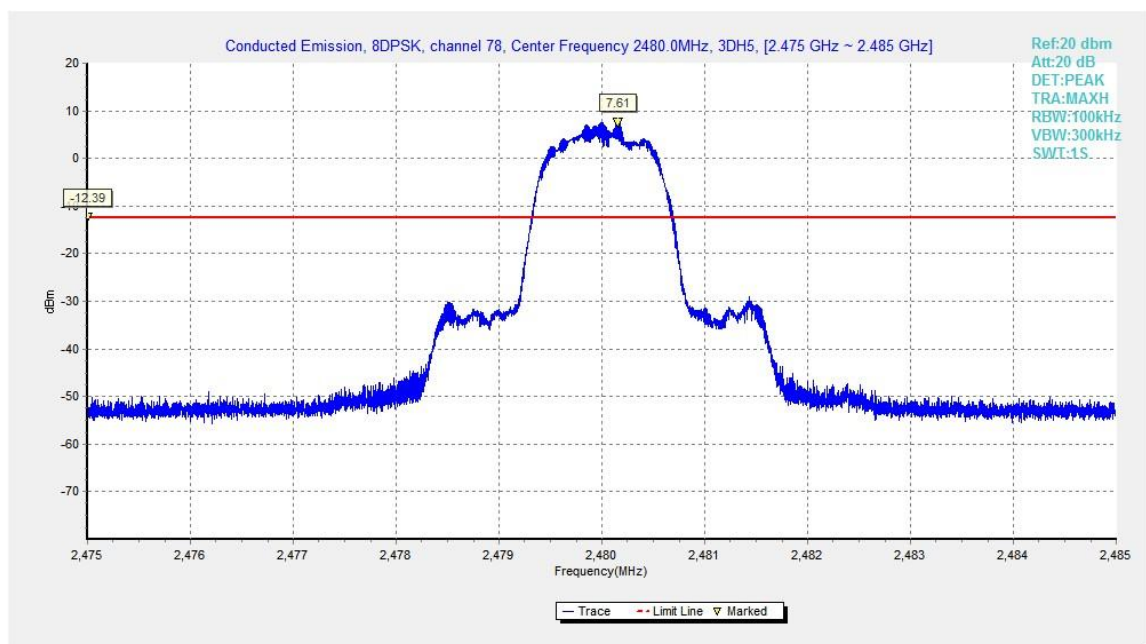


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

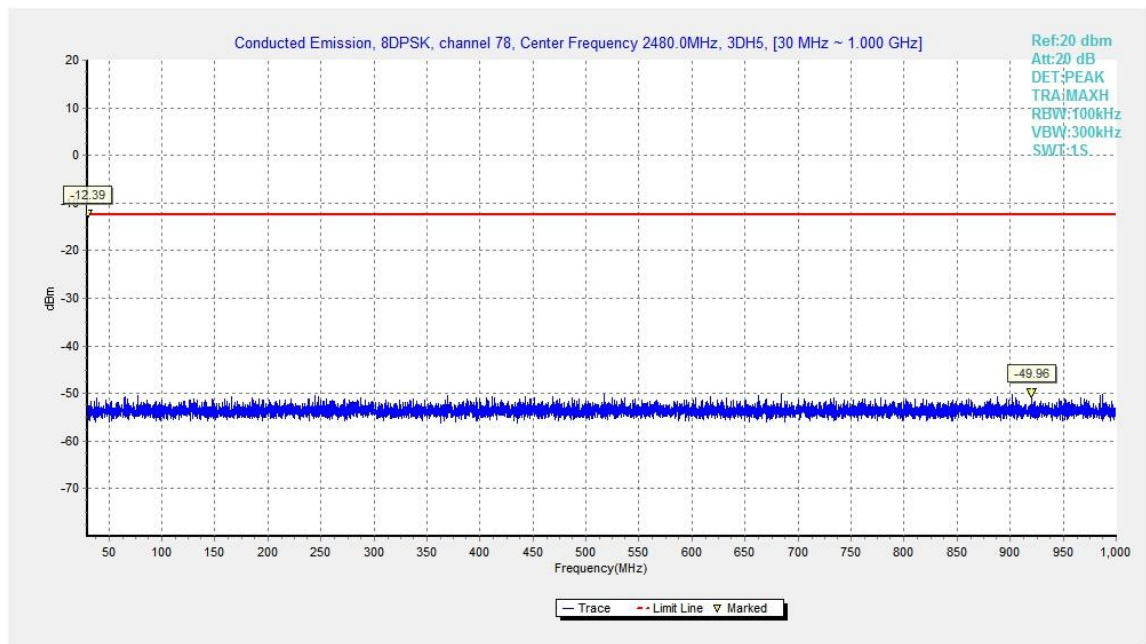


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

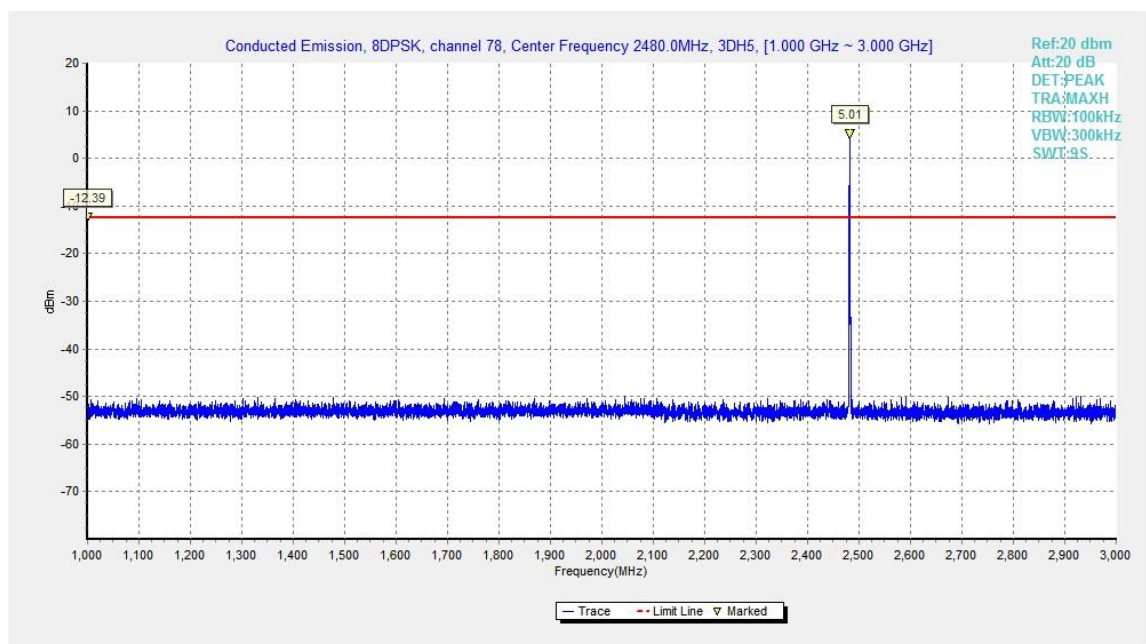


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

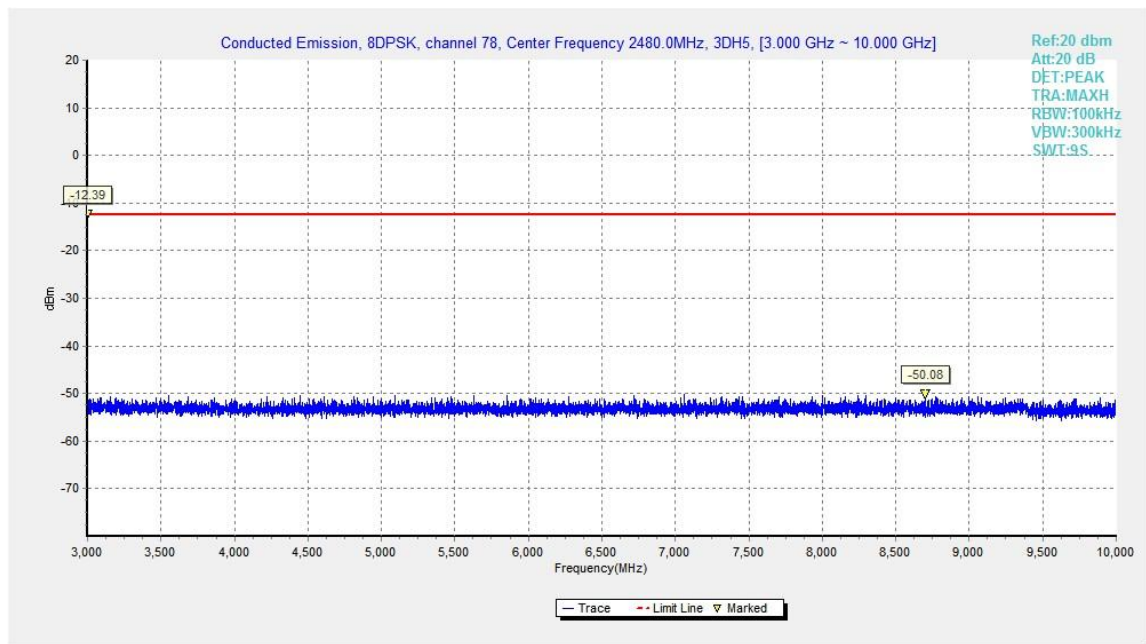


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

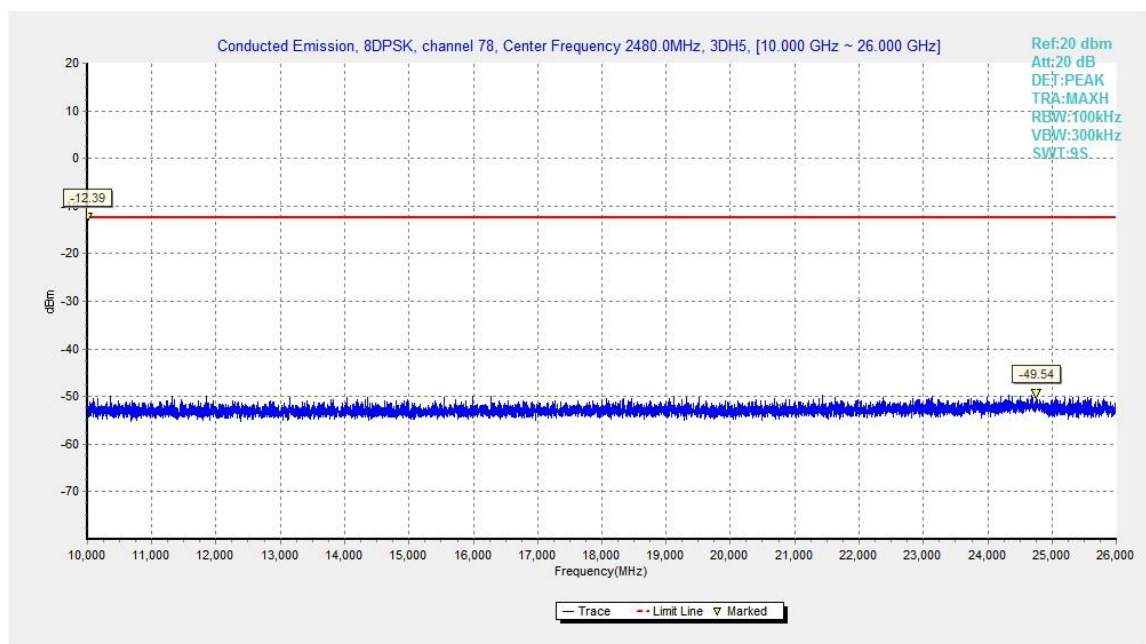


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:


Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

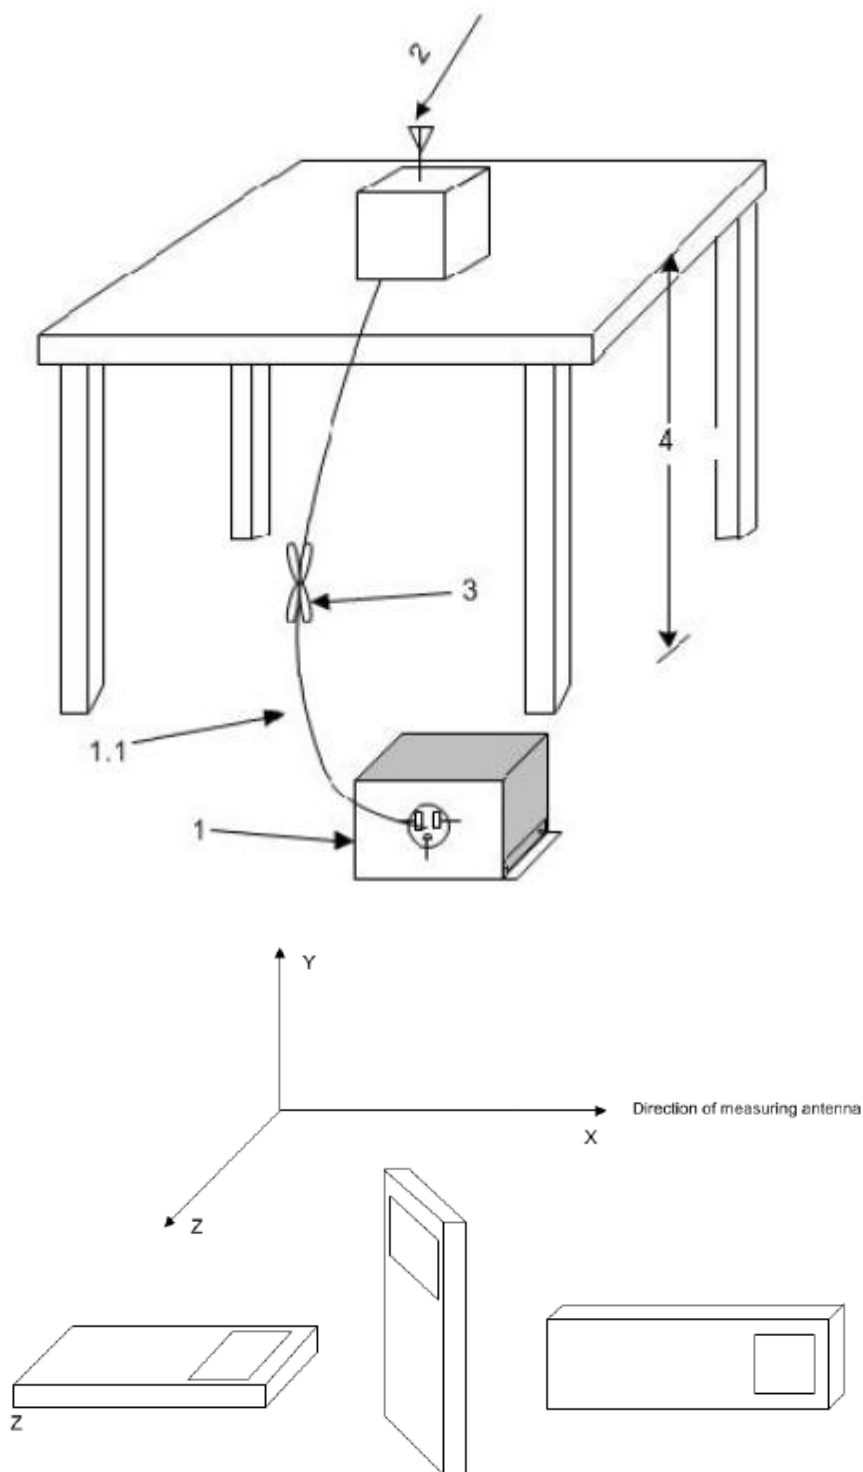

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the

nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360° . For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

Peak Measurement results

GFSK Ch0

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2366.140	59.97	2.8	32.0	25.15	74.0	14.0	H	155	176
2382.380	60.08	2.9	32.0	25.23	74.0	13.9	H	155	0
4804.000	41.03	-33.3	34.1	40.17	74.0	33.0	H	155	22
7206.000	42.49	-31.2	35.8	37.87	74.0	31.5	V	155	352
9608.000	44.26	-30.6	36.7	38.16	74.0	29.7	H	155	0
12010.000	45.69	-28.9	38.7	35.91	74.0	28.3	V	155	0

GFSK Ch39

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2367.400	43.94	-35.3	32.0	47.30	74.0	30.1	H	155	0
2511.600	44.88	-34.9	32.1	47.66	74.0	29.1	H	155	0
4882.000	43.09	-33.3	34.2	42.26	74.0	30.9	H	155	22
7323.000	43.49	-30.9	35.8	38.56	74.0	30.5	H	155	352
9764.000	44.69	-30.3	36.9	38.15	74.0	29.3	V	155	88
12205.000	46.49	-28.0	38.8	35.69	74.0	27.5	V	155	88

GFSK Ch78

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2484.160	60.48	2.9	32.1	25.46	74.0	13.5	H	155	22
2490.080	60.83	2.9	32.1	25.80	74.0	13.2	H	155	44
4959.500	43.13	-33.6	34.2	42.54	74.0	30.9	H	155	66
7440.000	42.97	-31.7	35.9	38.79	74.0	31.0	H	155	0
9920.000	44.41	-30.0	37.1	37.32	74.0	29.6	V	155	22
12400.000	45.88	-28.1	38.9	35.04	74.0	28.1	V	155	44

$\pi/4$ DQPSK Ch0

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2377.032	60.56	2.9	32.0	25.71	74.0	13.4	H	155	22
2383.206	60.58	2.9	32.0	25.73	74.0	13.4	H	155	44
4804.000	40.45	-33.3	34.1	39.60	74.0	33.5	V	155	242
7206.000	42.52	-31.2	35.8	37.90	74.0	31.5	V	155	176
9608.000	43.50	-30.6	36.7	37.40	74.0	30.5	V	155	88
12010.000	45.40	-28.9	38.7	35.63	74.0	28.6	H	155	22

$\pi/4$ DQPSK Ch39

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2364.800	44.87	-35.3	32.0	48.23	74.0	29.1	V	155	88
2502.000	44.57	-35.1	32.1	47.51	74.0	29.4	H	155	242
4882.000	41.18	-33.3	34.2	40.34	74.0	32.8	V	155	110
7323.000	42.17	-30.9	35.8	37.24	74.0	31.8	H	155	0
9764.000	44.08	-30.3	36.9	37.54	74.0	29.9	H	155	44
12205.000	47.59	-28.0	38.8	36.78	74.0	26.4	V	155	22

$\pi/4$ DQPSK Ch78

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2487.095	60.92	2.9	32.1	25.90	74.0	13.1	V	155	22
2492.015	60.40	2.9	32.1	25.37	74.0	13.6	H	155	44
4960.000	42.14	-33.6	34.2	41.55	74.0	31.9	H	155	88
7440.000	42.92	-31.7	35.9	38.74	74.0	31.1	V	155	66
9920.000	44.23	-30.0	37.1	37.13	74.0	29.8	H	155	220
12400.000	46.67	-28.1	38.9	35.83	74.0	27.3	V	155	0

8DPSK Ch0

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2363.060	60.37	2.8	32.0	25.55	74.0	13.6	H	155	0
2383.234	60.04	2.9	32.0	25.19	74.0	14.0	V	155	0
4804.000	40.27	-33.3	34.1	39.42	74.0	33.7	H	155	22
7206.000	42.73	-31.2	35.8	38.11	74.0	31.3	H	155	66
9608.000	43.92	-30.6	36.7	37.81	74.0	30.1	V	155	132
12010.000	45.54	-28.9	38.7	35.76	74.0	28.5	H	155	274

8DPSK Ch39

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2372.600	44.19	-35.3	32.0	47.55	74.0	29.8	V	155	110
2506.800	44.30	-35.0	32.1	47.17	74.0	29.7	V	155	132
4882.000	41.10	-33.3	34.2	40.26	74.0	32.9	H	155	88
7323.000	42.05	-30.9	35.8	37.13	74.0	31.9	H	155	44
9764.000	44.27	-30.3	36.9	37.73	74.0	29.7	H	155	0
12205.000	47.28	-28.0	38.8	36.47	74.0	26.7	H	155	22

8DPSK Ch78

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2485.945	60.56	2.9	32.1	25.54	74.0	13.4	H	155	242
2488.540	60.52	2.9	32.1	25.50	74.0	13.5	V	155	88
4960.000	43.52	-33.6	34.2	42.93	74.0	30.5	H	155	44
7440.000	41.94	-31.7	35.9	37.75	74.0	32.1	V	155	132
9920.000	44.62	-30.0	37.1	37.53	74.0	29.4	V	155	242
12400.000	47.24	-28.1	38.9	36.40	74.0	26.8	V	155	66

Average Measurement results
GFSK Ch0

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.700	46.45	2.9	32.0	11.59	54.0	7.5	H	155	175
2390.000	46.49	2.9	32.0	11.62	54.0	7.5	H	155	5
4804.000	28.77	-33.3	34.1	27.92	54.0	25.2	H	155	26
7206.000	30.45	-31.2	35.8	25.83	54.0	23.6	H	155	355
7608.000	31.48	-30.5	35.9	26.11	54.0	22.5	H	155	6
12010.000	34.03	-28.9	38.7	24.25	54.0	20.0	H	155	12

GFSK Ch39

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.300	46.62	2.9	32.0	11.68	54.0	7.4	H	155	4
2445.900	46.76	2.9	32.1	11.81	54.0	7.2	H	155	2
4882.000	33.38	-33.3	34.2	32.54	54.0	20.6	H	155	25
7323.000	30.58	-30.9	35.8	25.65	54.0	23.4	H	155	350
9764.000	31.83	-30.3	36.9	25.29	54.0	22.2	H	155	92
12205.000	34.95	-28.0	38.8	24.14	54.0	19.1	H	155	85

GFSK Ch78

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.85	2.9	32.1	12.83	54.0	6.2	H	155	20
2483.700	47.63	2.9	32.1	12.61	54.0	6.4	H	155	40
4960.000	35.51	-33.6	34.2	34.93	54.0	18.5	H	155	56
7440.000	39.92	-31.7	35.9	35.73	54.0	14.1	H	155	4
9920.000	32.05	-30.0	37.1	24.95	54.0	22.0	H	155	18
12400.000	34.79	-28.1	38.9	23.94	54.0	19.2	H	155	48

$\pi/4$ DQPSK Ch0

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2389.300	46.54	2.9	32.0	11.67	54.0	7.5	H	155	20
2390.000	46.43	2.9	32.0	11.57	54.0	7.6	H	155	45
4804.000	29.65	-33.3	34.1	28.79	54.0	24.4	H	155	240
7206.000	30.37	-31.2	35.8	25.76	54.0	23.6	H	155	180
9608.000	31.52	-30.6	36.7	25.41	54.0	22.5	H	155	85
12010.000	34.04	-28.9	38.7	24.26	54.0	20.0	H	155	25

$\pi/4$ DQPSK Ch39

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.200	46.59	2.9	32.0	11.65	54.0	7.4	H	155	92
2445.900	46.69	2.9	32.1	11.74	54.0	7.3	H	155	248
4882.000	30.53	-33.3	34.2	29.69	54.0	23.5	H	155	132
7323.000	30.68	-30.9	35.8	25.76	54.0	23.3	H	155	8
9764.000	31.89	-30.3	36.9	25.35	54.0	22.1	H	155	36
12205.000	34.97	-28.0	38.8	24.16	54.0	19.0	H	155	28

$\pi/4$ DQPSK Ch78

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.55	2.9	32.1	12.53	54.0	6.5	H	155	28
2483.900	46.92	2.9	32.1	11.91	54.0	7.1	H	155	48
4959.000	31.09	-33.6	34.2	30.51	54.0	22.9	H	155	92
7440.000	29.95	-31.7	35.9	25.76	54.0	24.0	H	155	72
9920.000	31.97	-30.0	37.1	24.88	54.0	22.0	H	155	226
12400.000	34.80	-28.1	38.9	23.95	54.0	19.2	H	155	4

8DPSK Ch0

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.400	46.49	2.9	32.0	11.63	54.0	7.5	H	155	8
2390.000	46.48	2.9	32.0	11.62	54.0	7.5	H	155	6
4804.000	29.70	-33.3	34.1	28.84	54.0	24.3	H	155	25
7206.000	30.43	-31.2	35.8	25.81	54.0	23.6	H	155	70
9608.000	31.56	-30.6	36.7	25.46	54.0	22.4	H	155	135
12010.000	34.10	-28.9	38.7	24.33	54.0	19.9	H	155	270

8DPSK Ch39

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.600	46.67	2.9	32.0	11.72	54.0	7.3	H	155	116
2445.700	46.79	2.9	32.1	11.84	54.0	7.2	H	155	139
4882.000	30.48	-33.3	34.2	29.64	54.0	23.5	H	155	94
7323.000	30.60	-30.9	35.8	25.67	54.0	23.4	H	155	49
9764.000	31.89	-30.3	36.9	25.35	54.0	22.1	H	155	4
12205.000	34.93	-28.0	38.8	24.12	54.0	19.1	H	155	28

8DPSK Ch78

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	47.52	2.9	32.1	12.50	54.0	6.5	H	155	248
2483.700	47.18	2.9	32.1	12.16	54.0	6.8	H	155	92
4959.000	31.22	-33.6	34.2	30.63	54.0	22.8	H	155	49
7440.000	29.98	-31.7	35.9	25.80	54.0	24.0	H	155	138
9920.000	31.97	-30.0	37.1	24.88	54.0	22.0	H	155	248
12400.000	34.79	-28.1	38.9	23.95	54.0	19.2	H	155	72

Conclusion: Pass

B.7. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	DH1	Fig.64	0.38	Fig.65	319	121.22	P
	DH3	Fig.66	1.63	Fig.67	107	174.41	P
	DH5	Fig.68	2.88	Fig.69	66	190.08	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	2DH1	Fig.70	0.38	Fig.71	318	120.84	P
	2DH3	Fig.72	1.64	Fig.73	96	157.44	P
	2DH5	Fig.74	2.88	Fig.75	71	204.48	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	318	120.84	P
	3DH3	Fig.78	1.63	Fig.79	111	180.93	P
	3DH5	Fig.80	2.89	Fig.81	75	216.75	P

Conclusion: PASS

Test graphs as below:

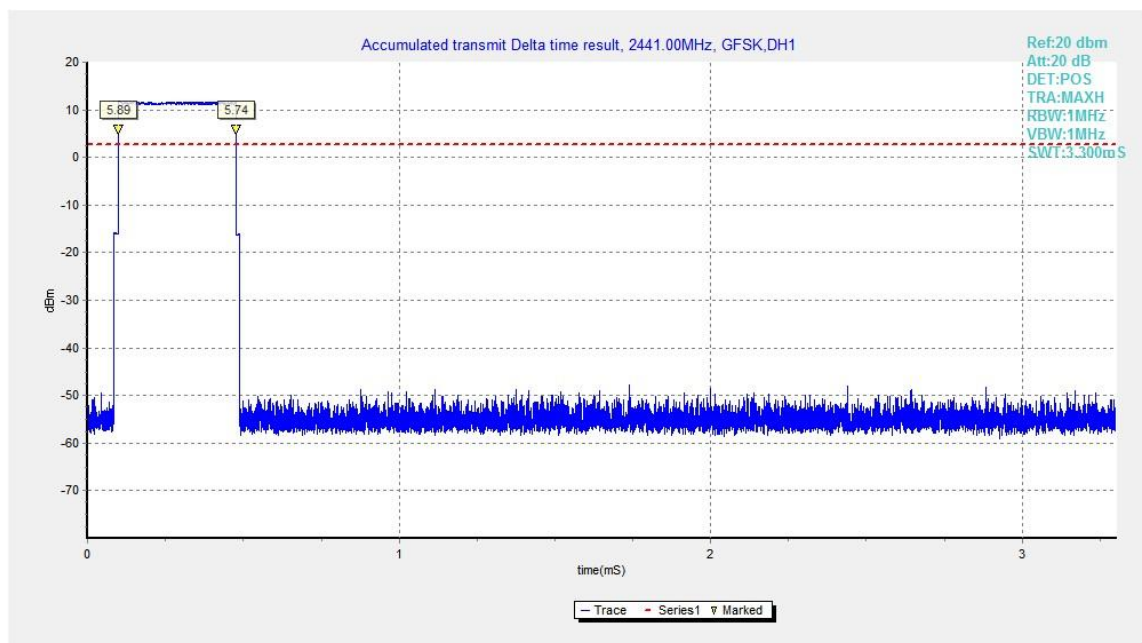


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

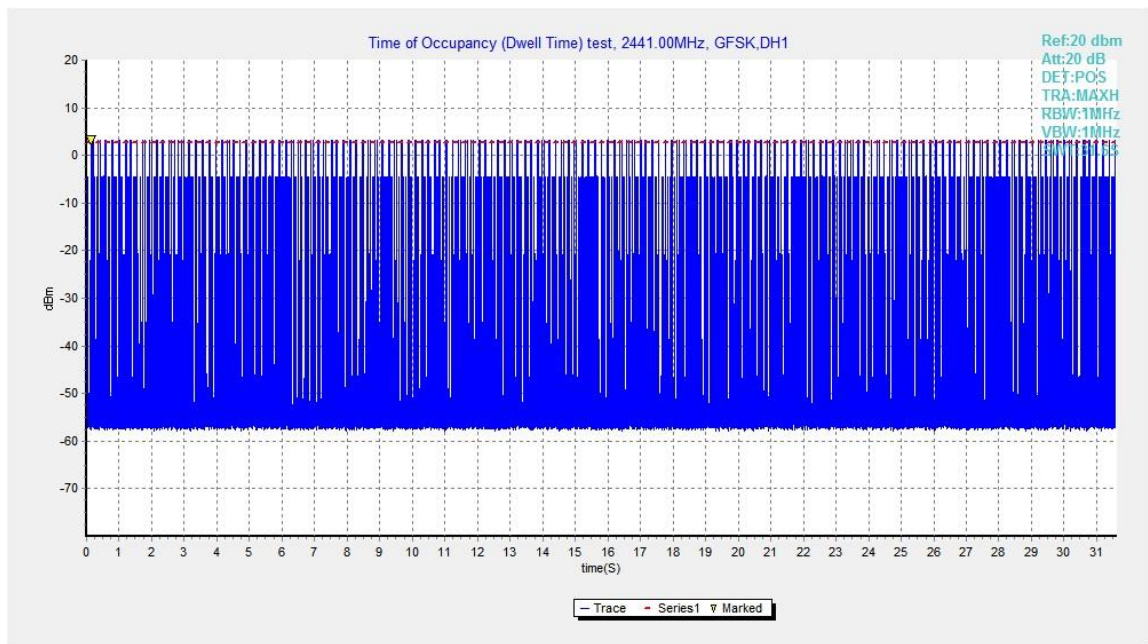


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

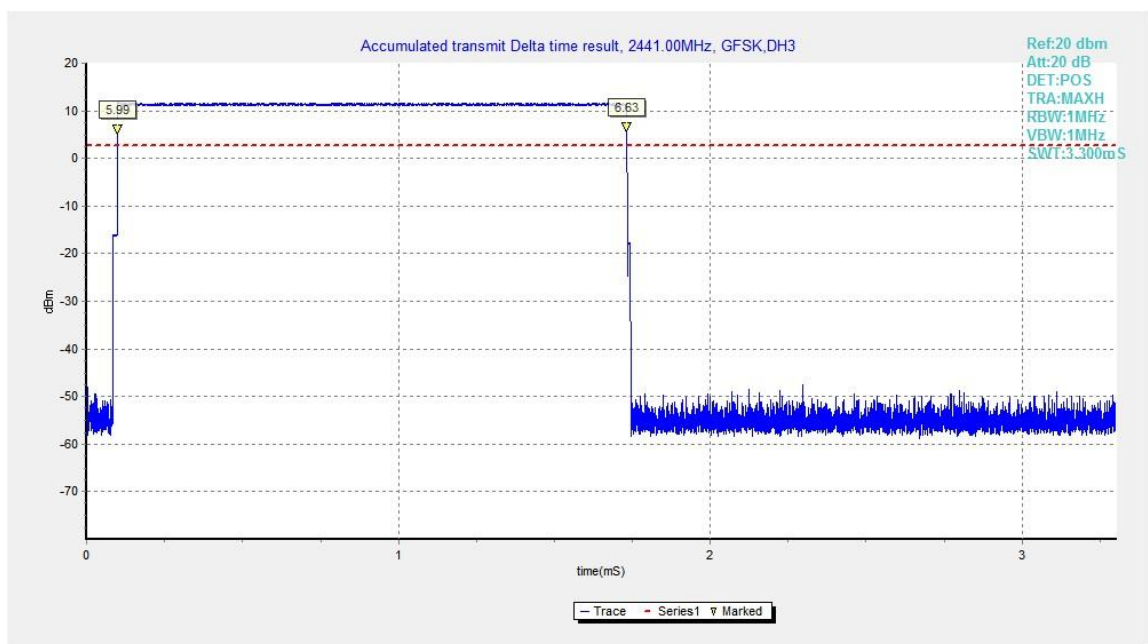


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

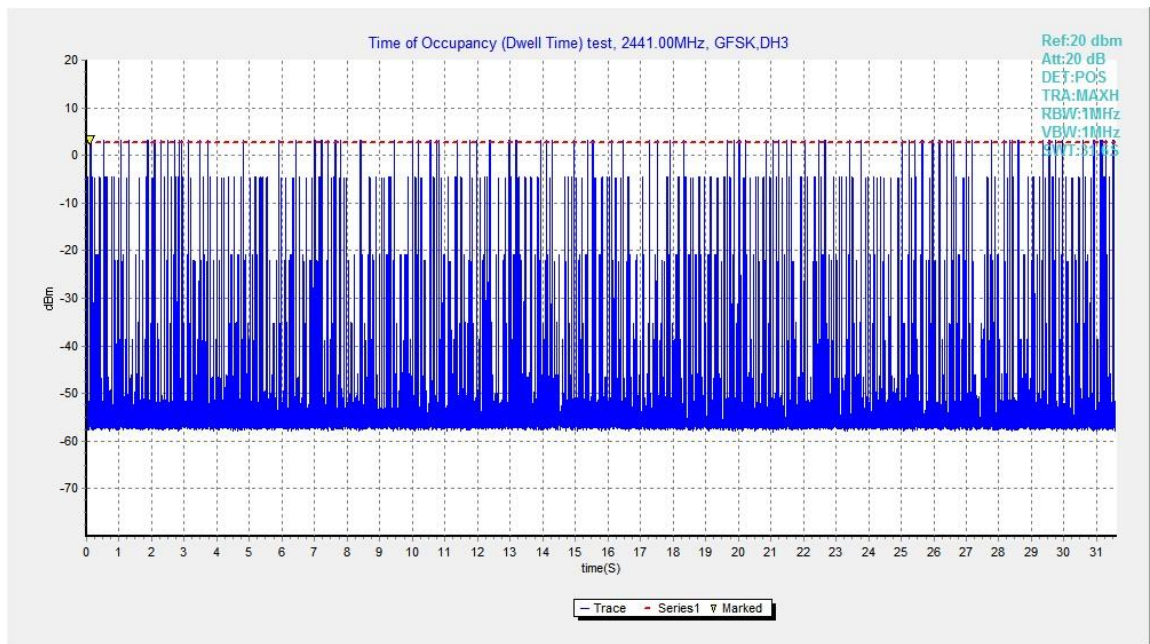


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

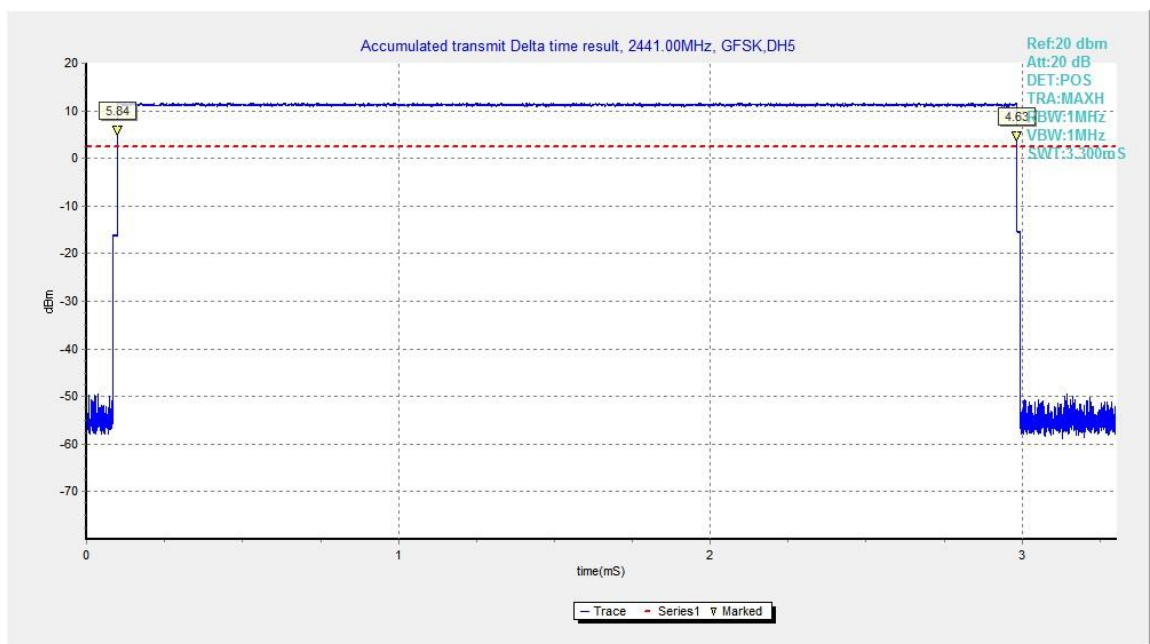


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

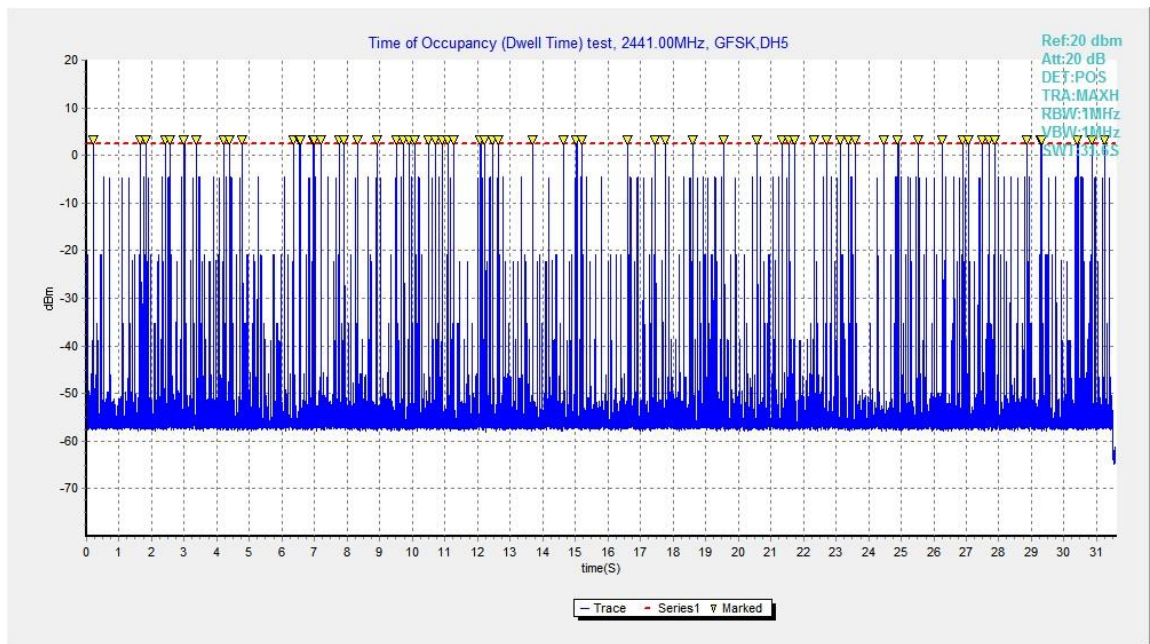


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

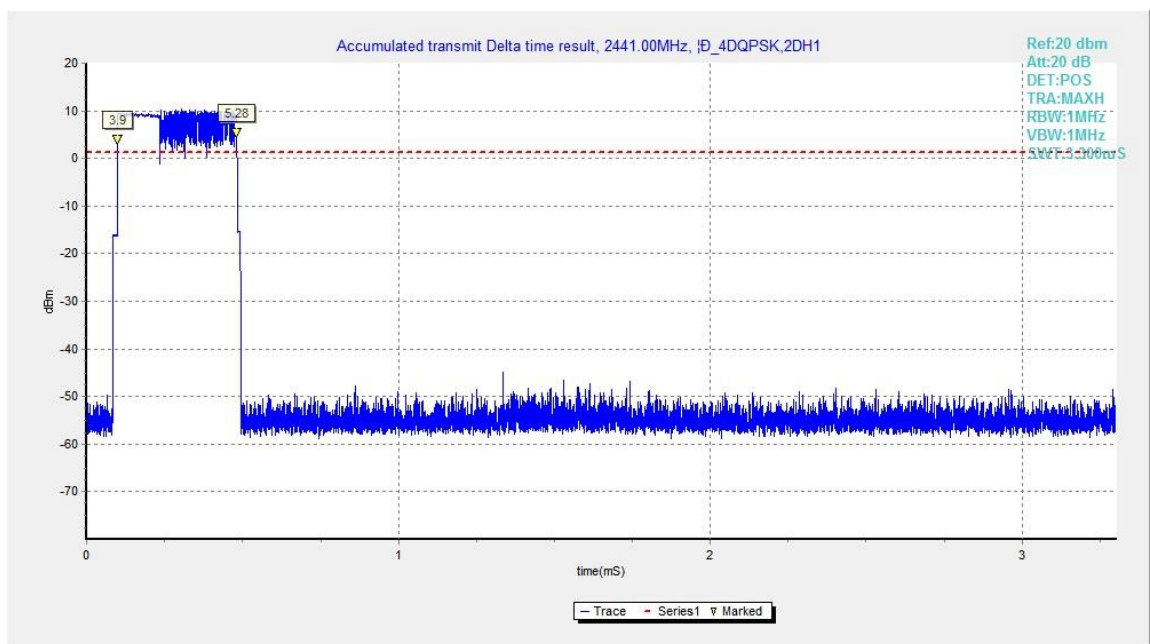


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

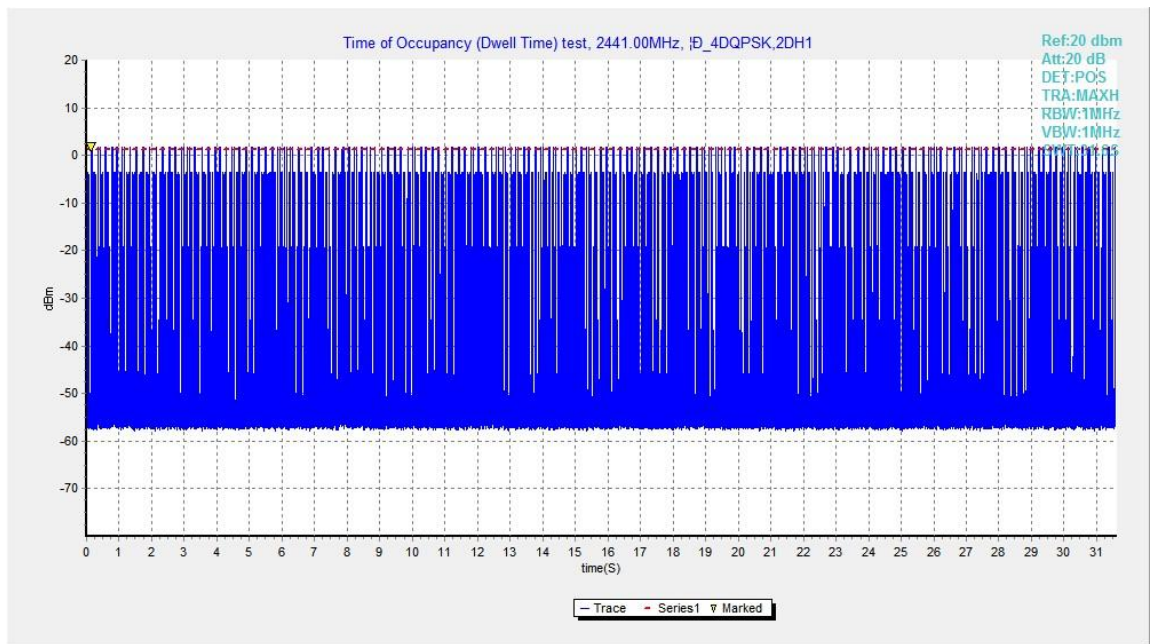


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

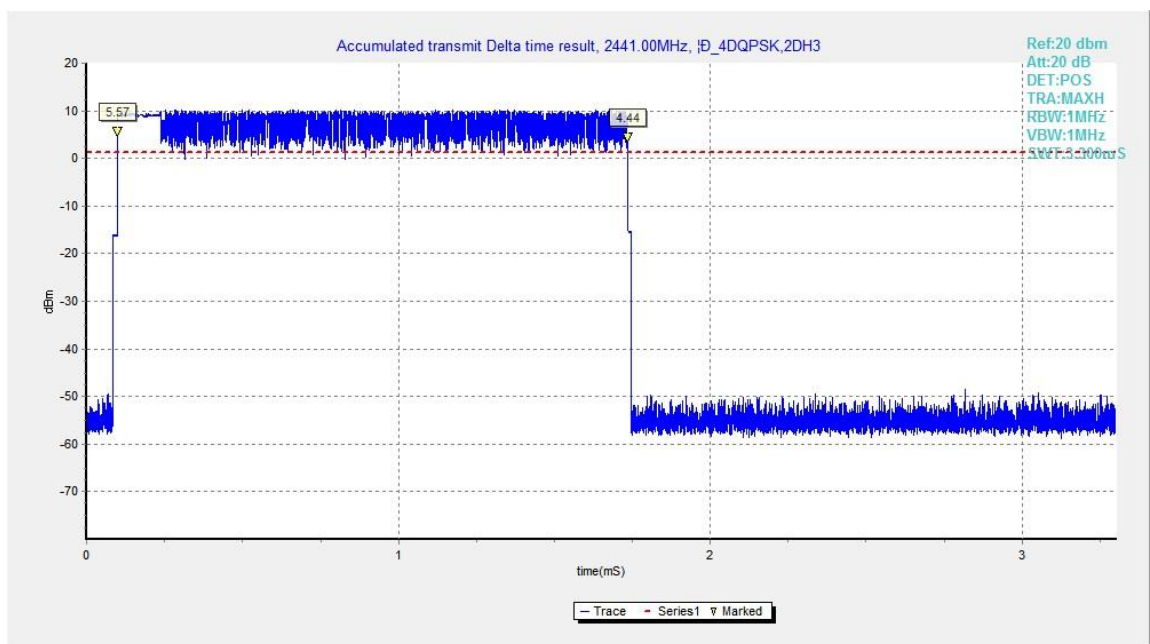


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

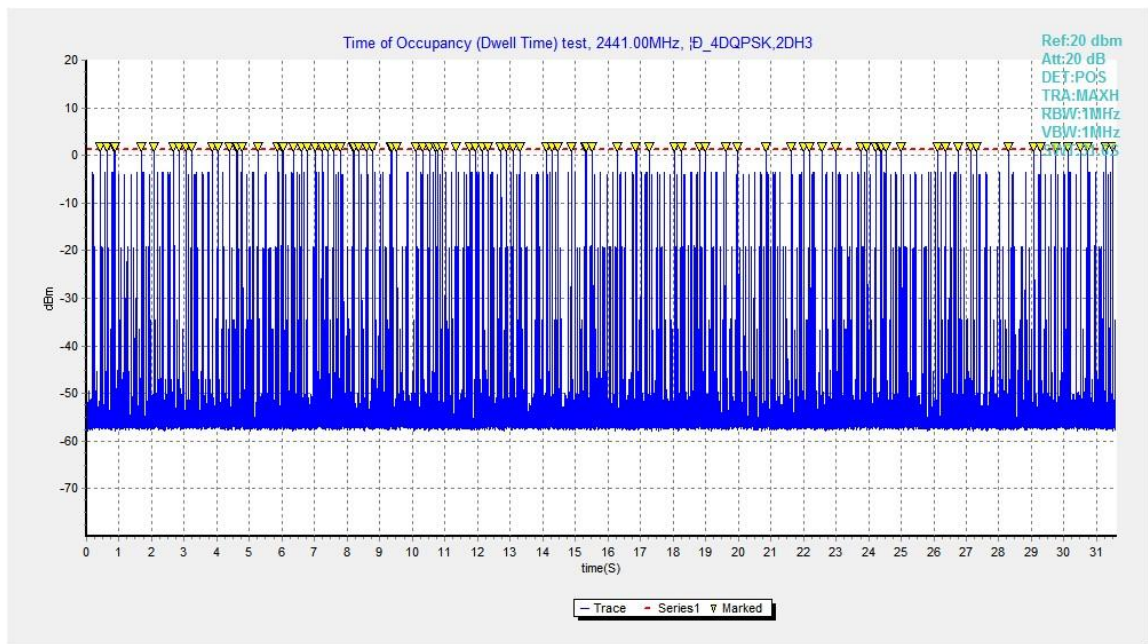


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

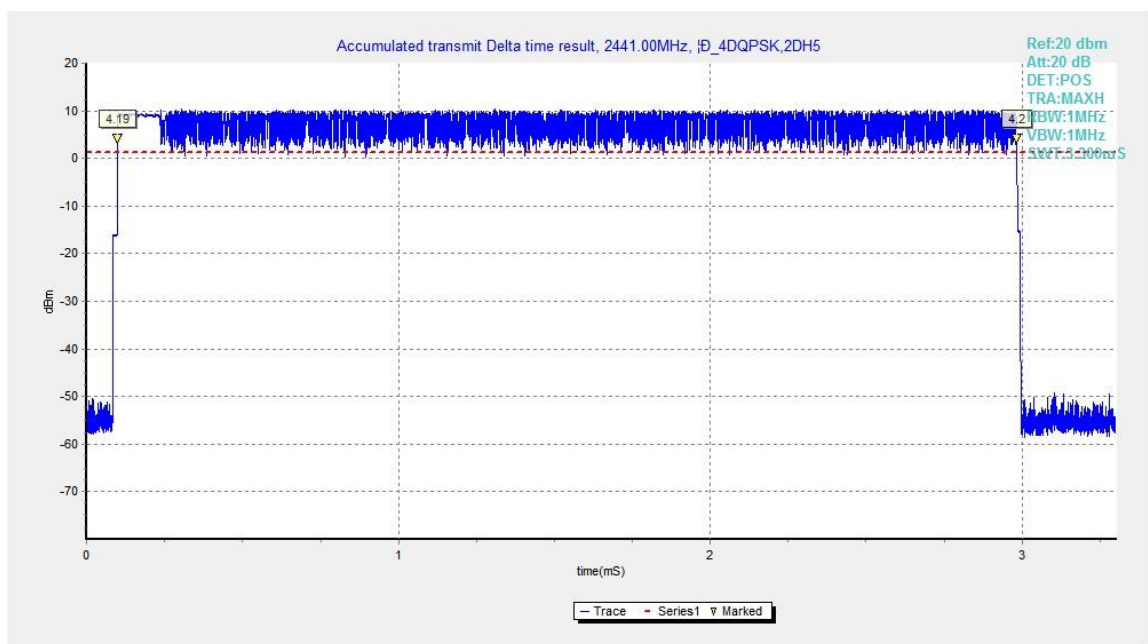


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

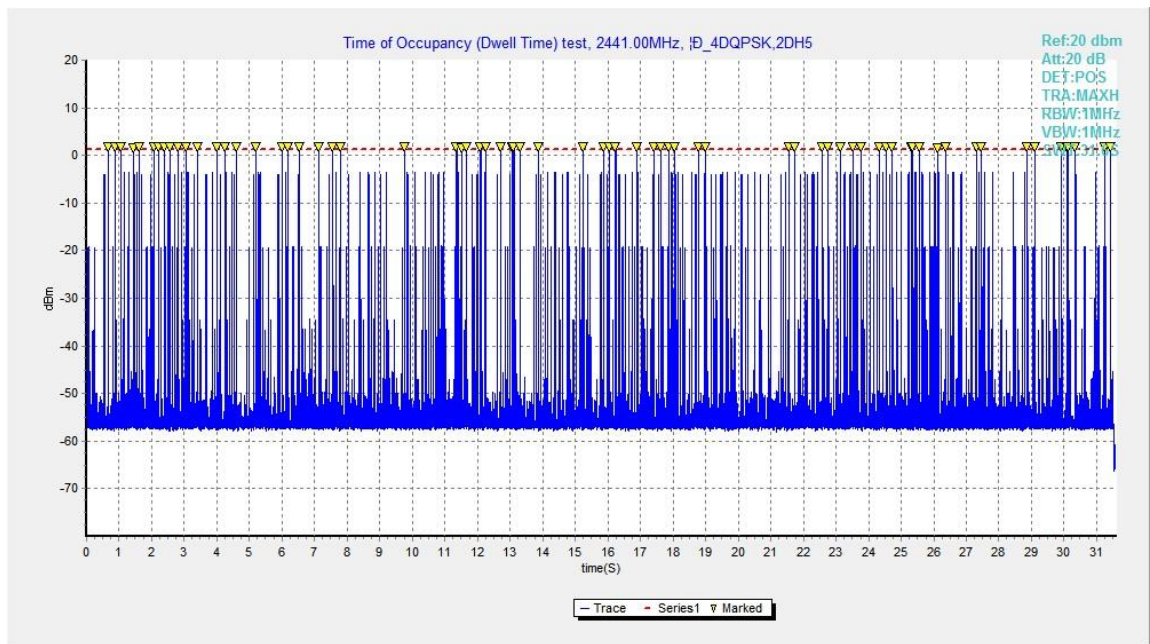


Fig.75. Number of Transmissions Measurement: Channel 39, Packet 2-DH5

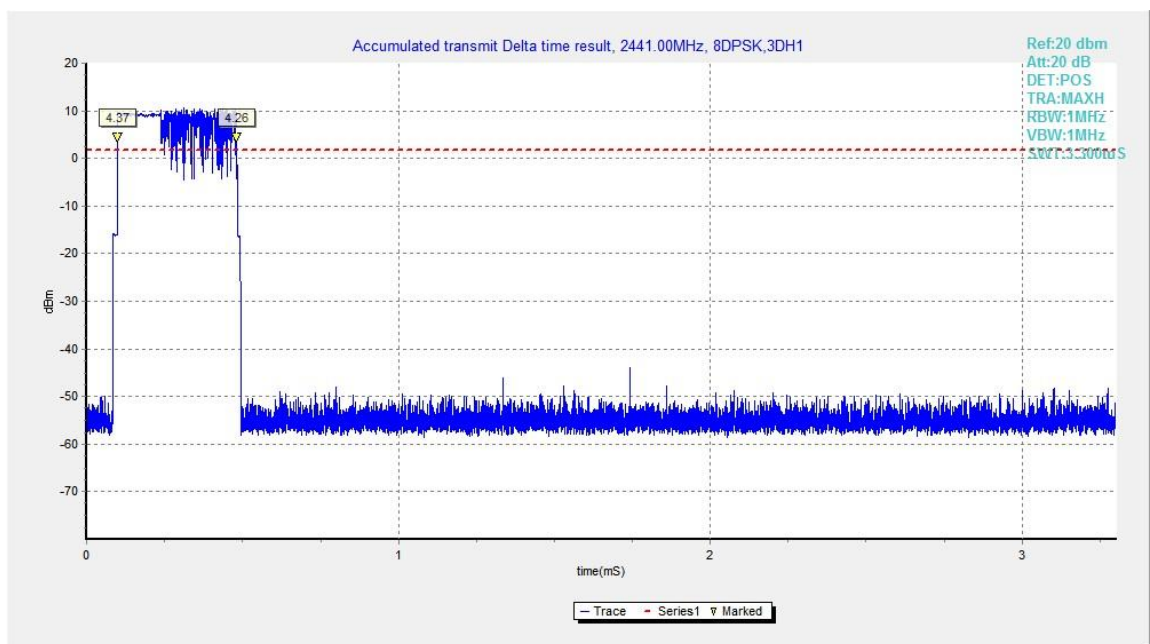


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

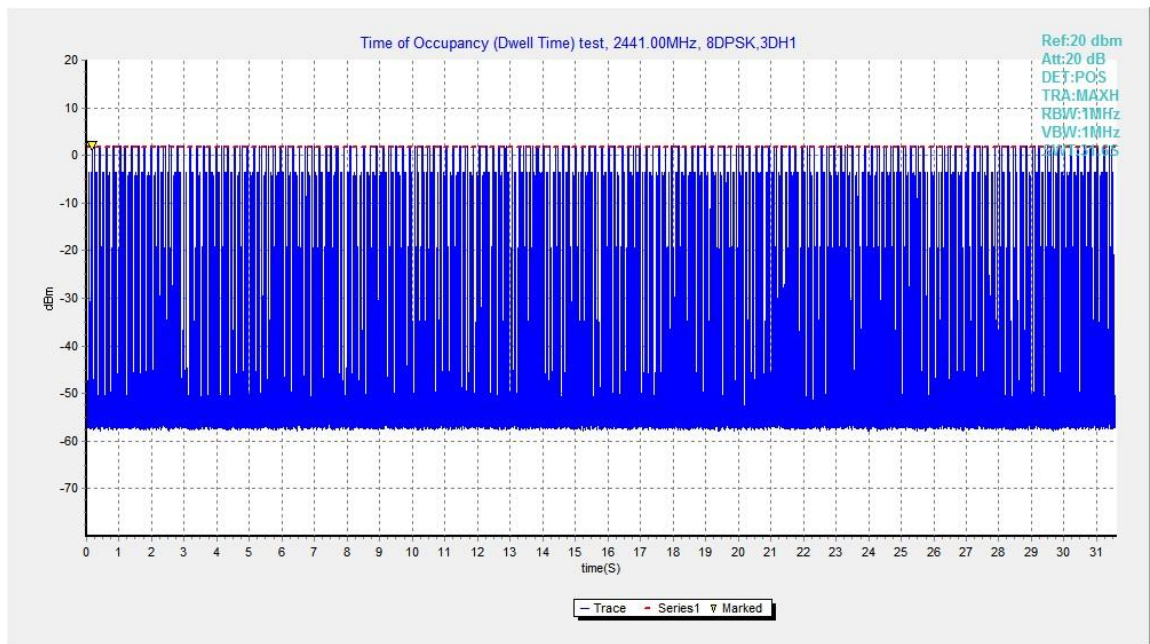


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

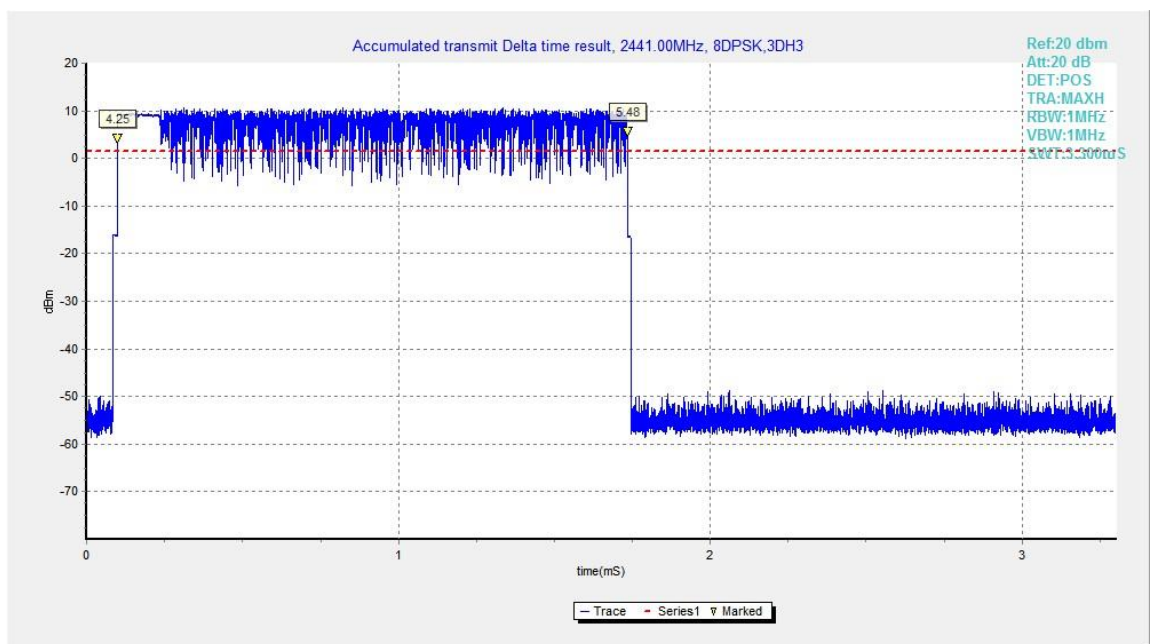


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

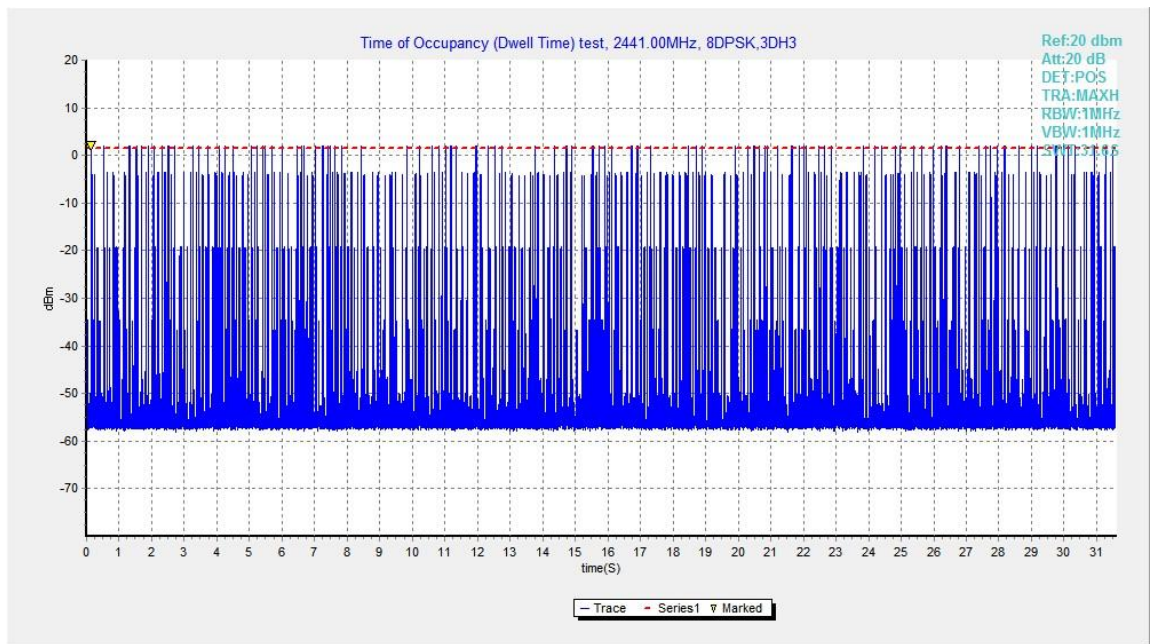


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

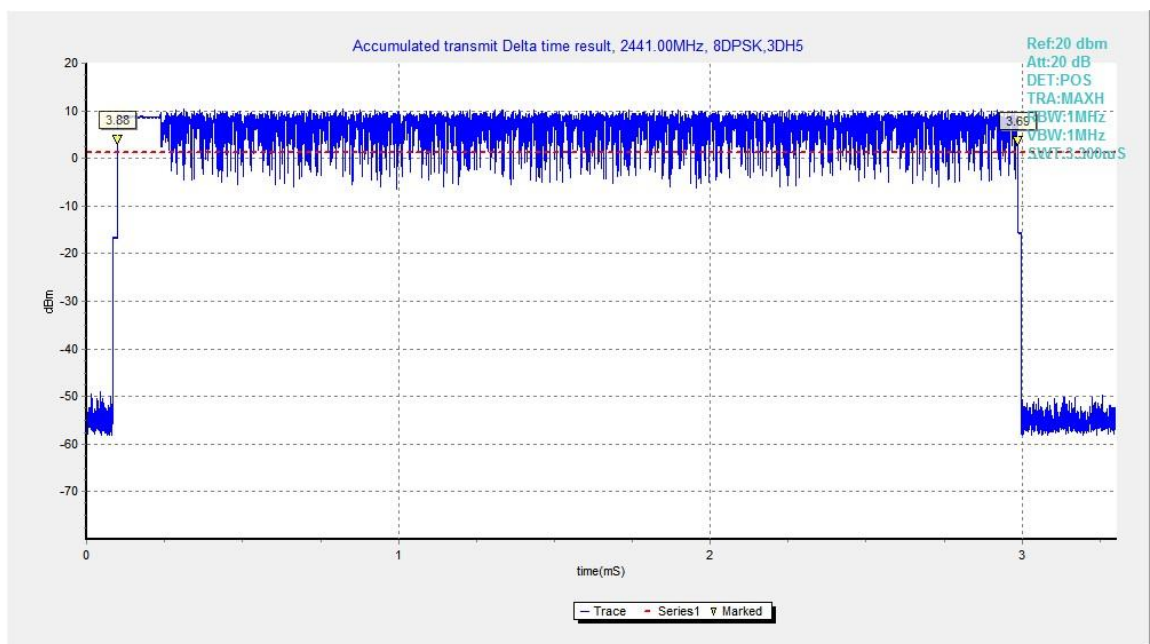


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

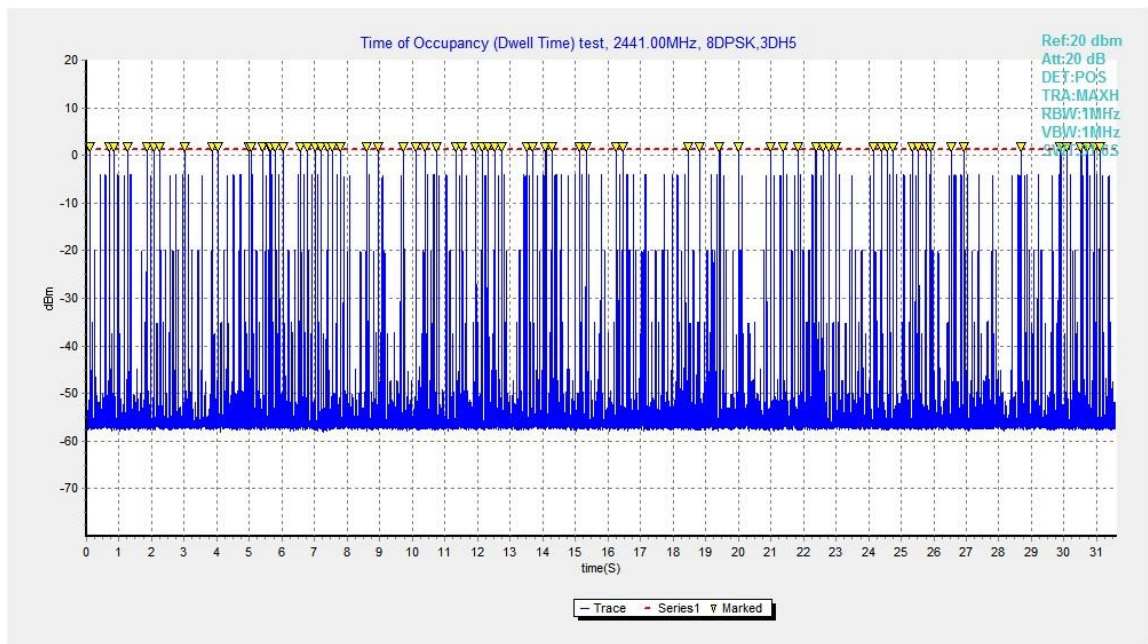


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	930.00	NA
39	Fig.83	933.00	NA
78	Fig.84	882.75	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1280.25	NA
39	Fig.86	1278.75	NA
78	Fig.87	1279.50	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1296.00	NA
39	Fig.89	1279.50	NA
78	Fig.90	1295.25	NA

Conclusion: NA

Test graphs as below:

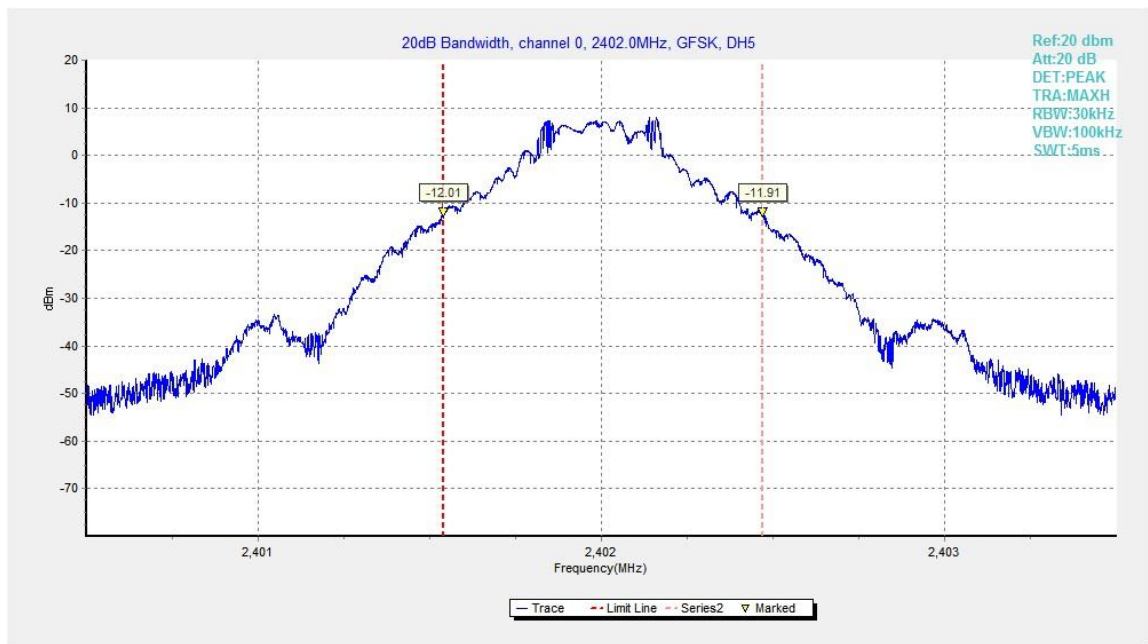


Fig.82. 20dB Bandwidth: GFSK, Channel 0

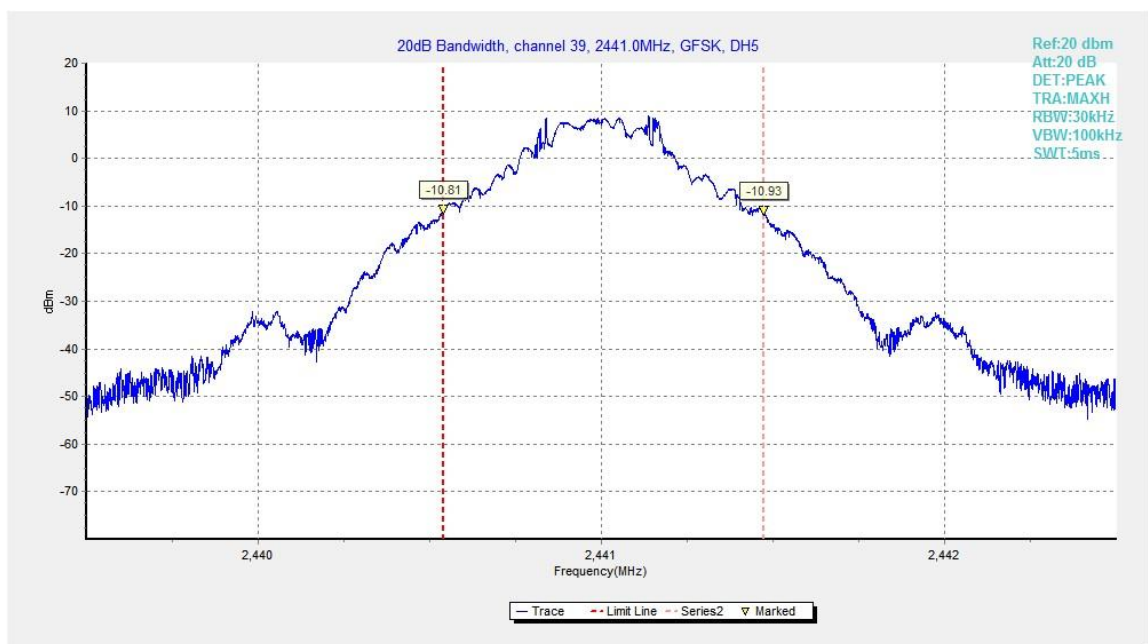


Fig.83. 20dB Bandwidth: GFSK, Channel 39

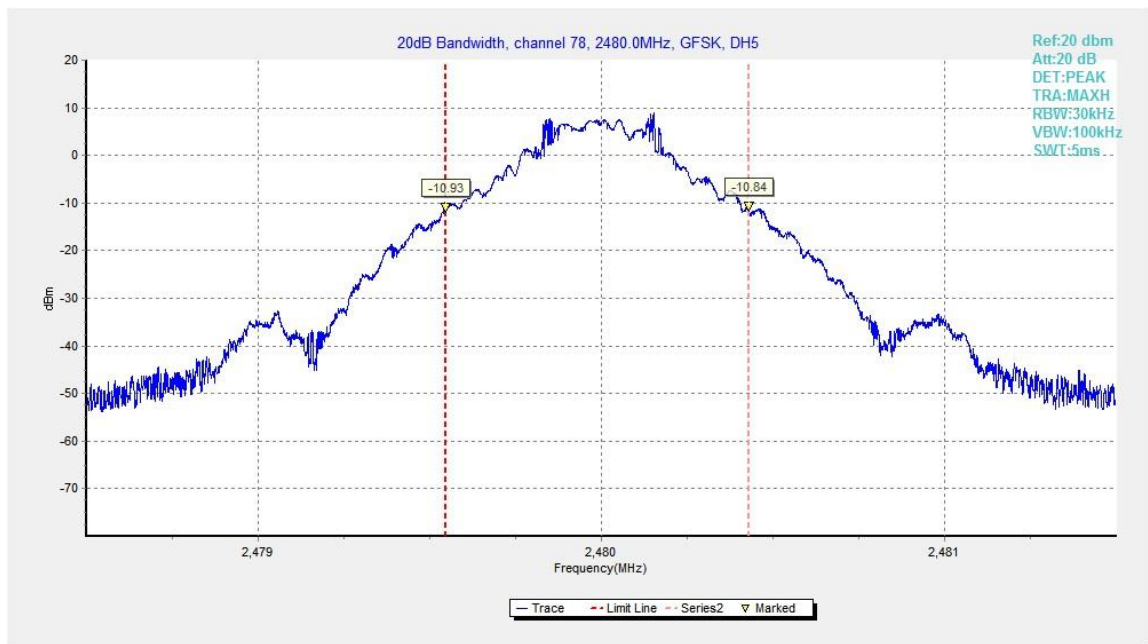


Fig.84. 20dB Bandwidth: GFSK, Channel 78

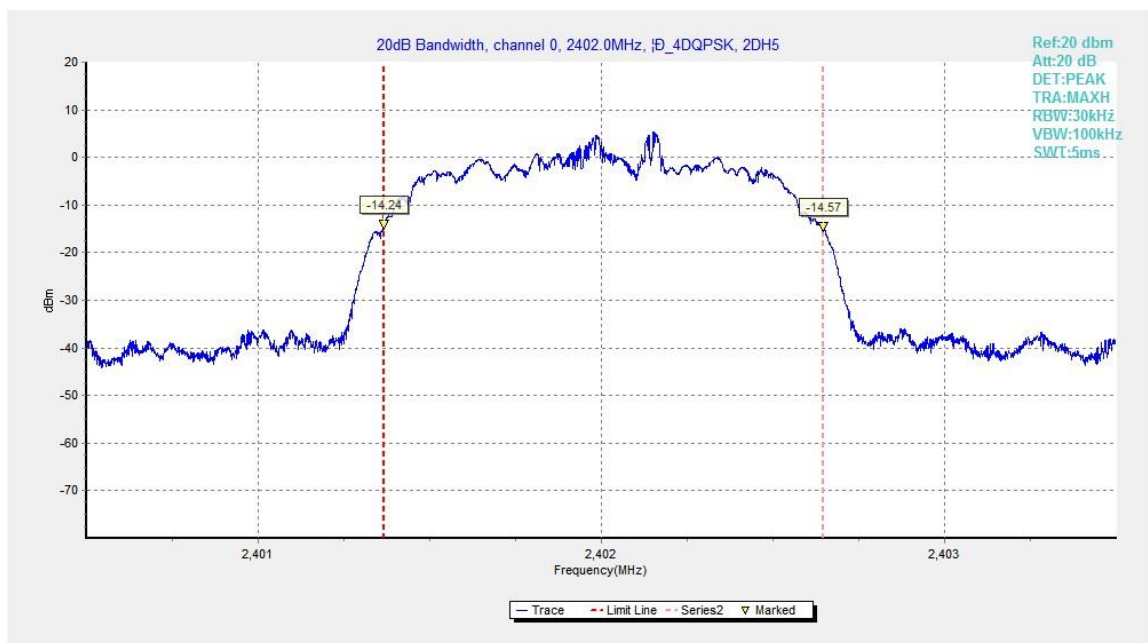


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

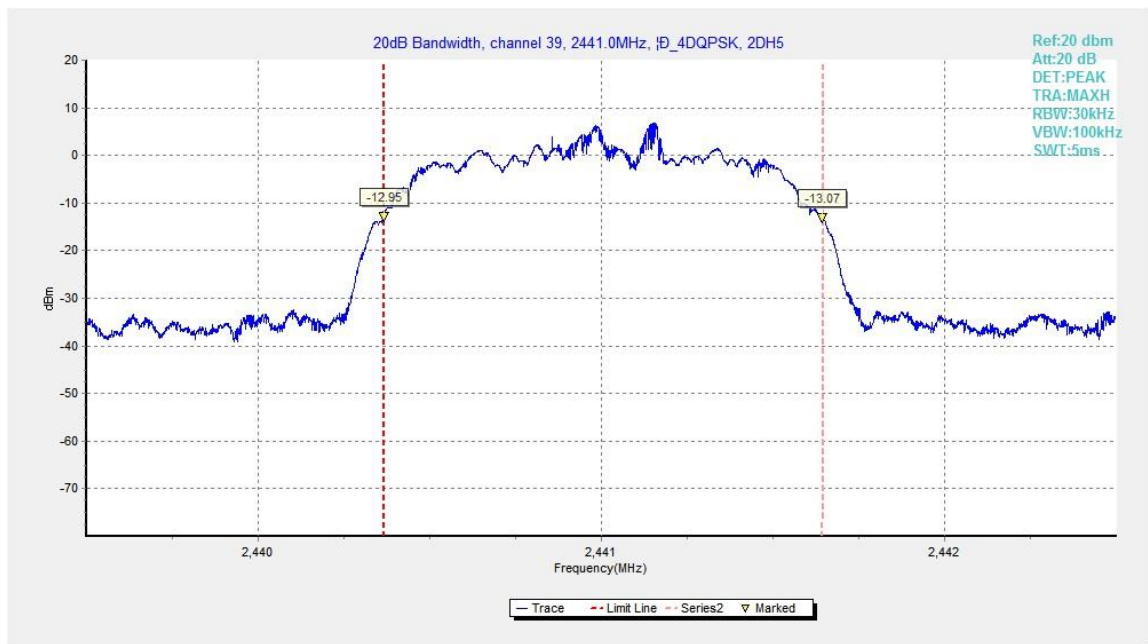


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

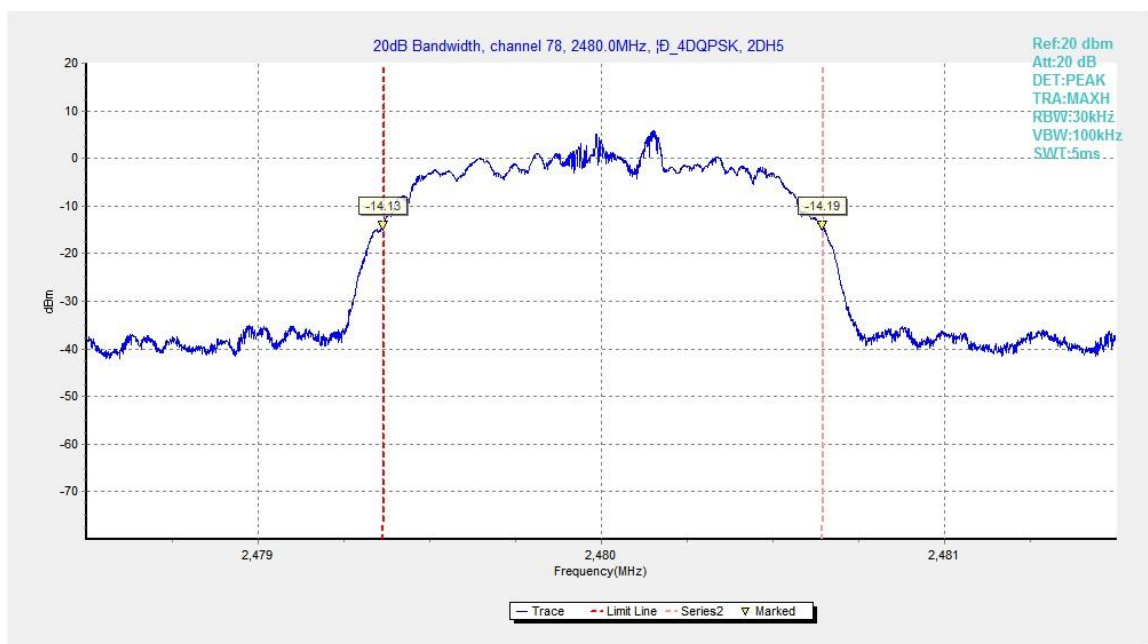


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

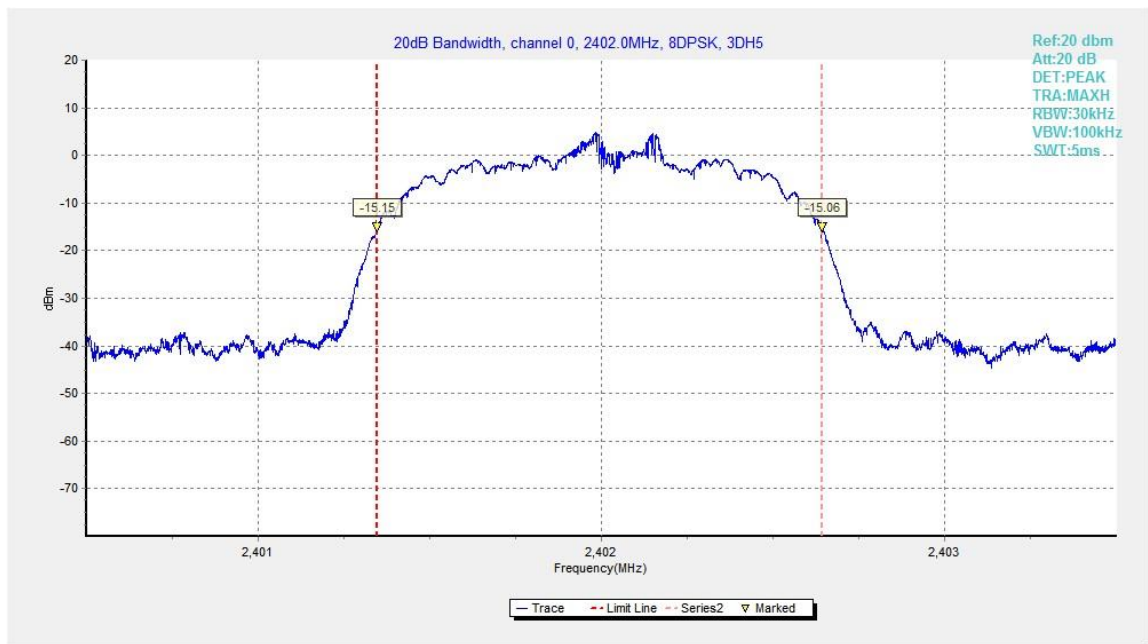


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

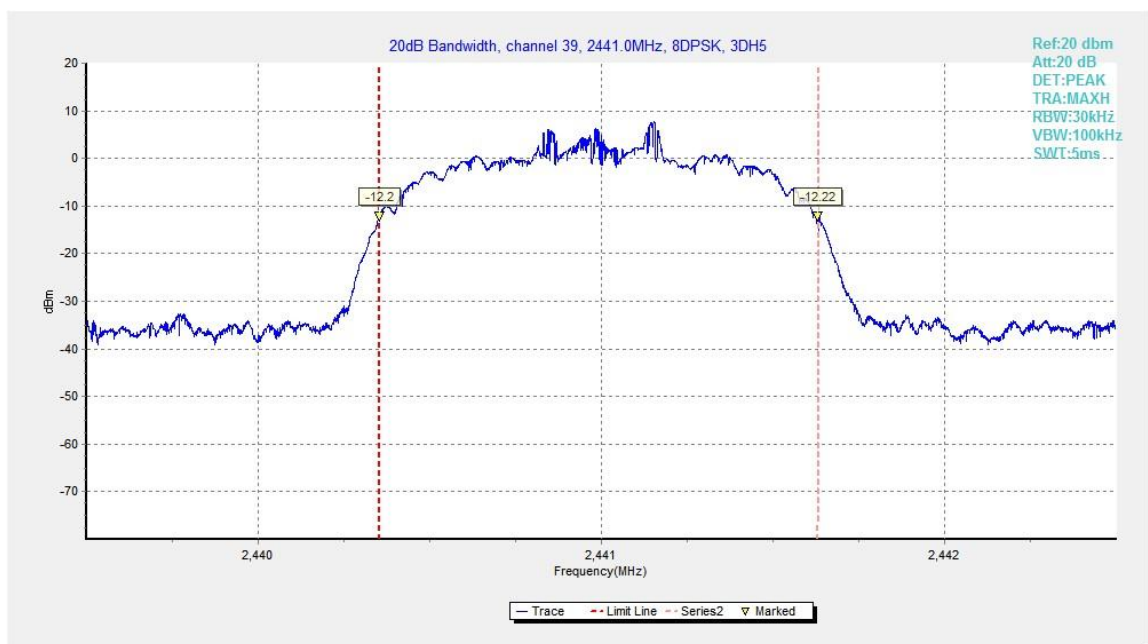


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

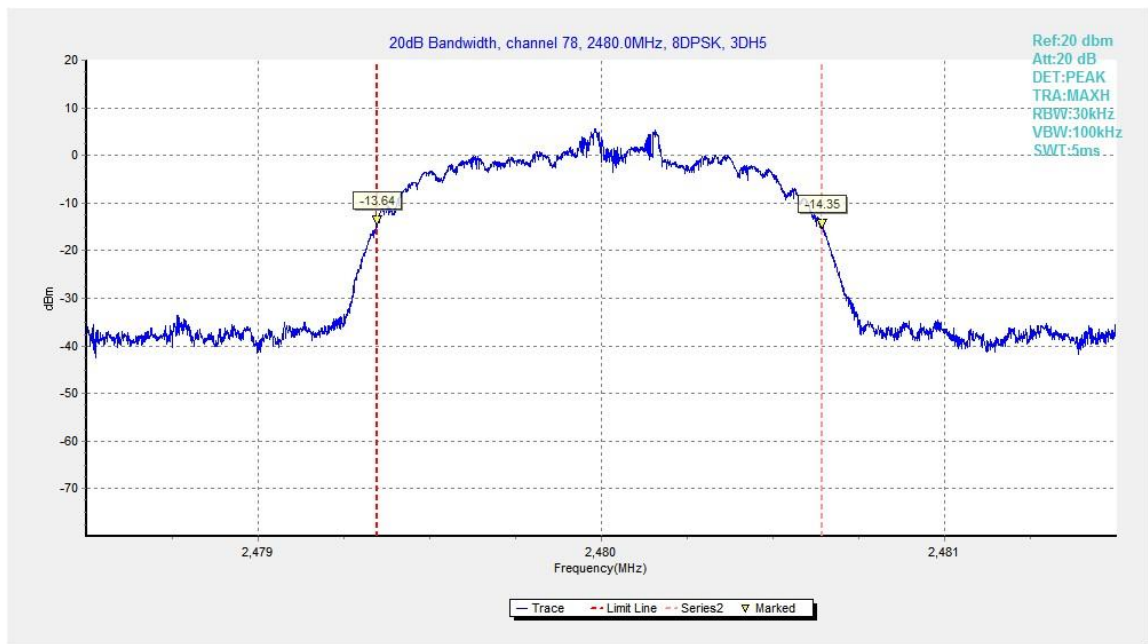


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	1145.25	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1146.00	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1158.75	P

Conclusion: PASS

Test graphs as below:

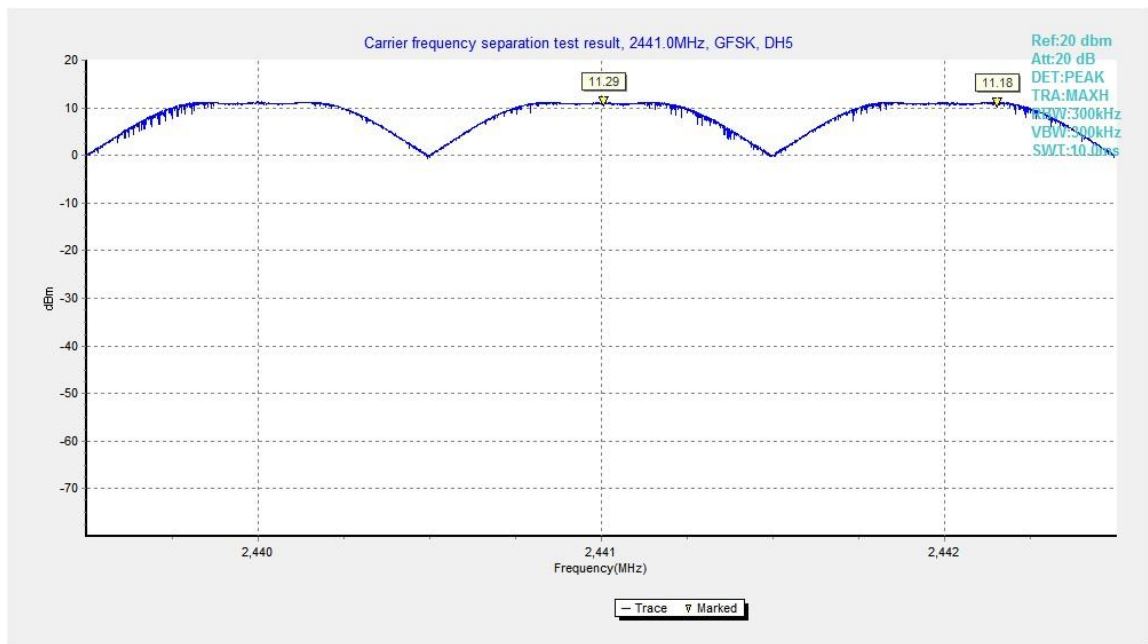


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

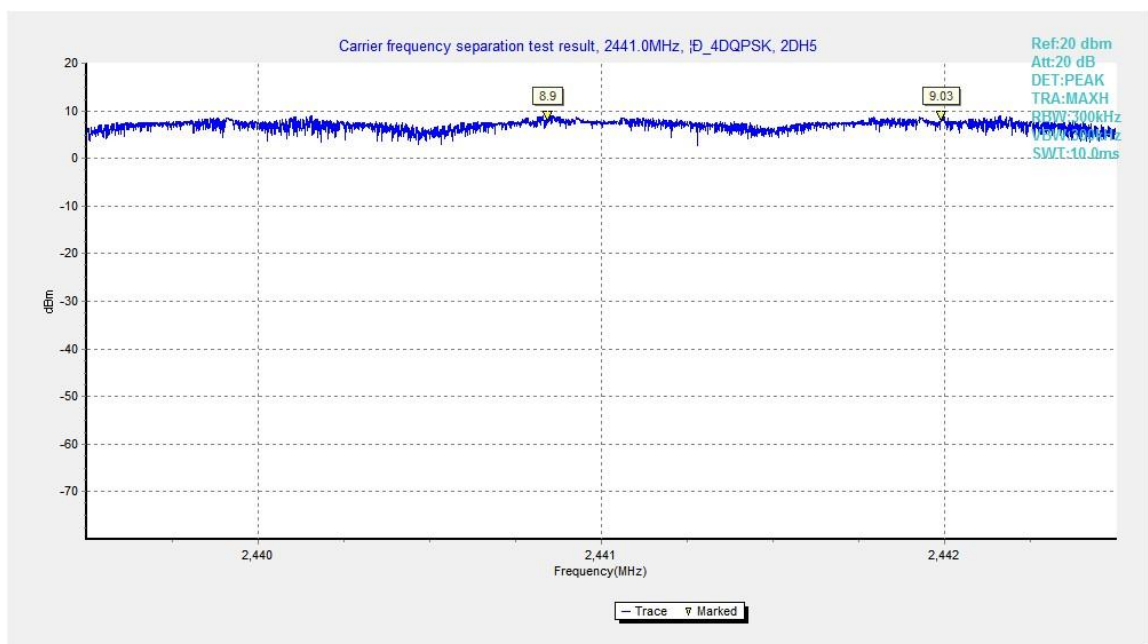


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

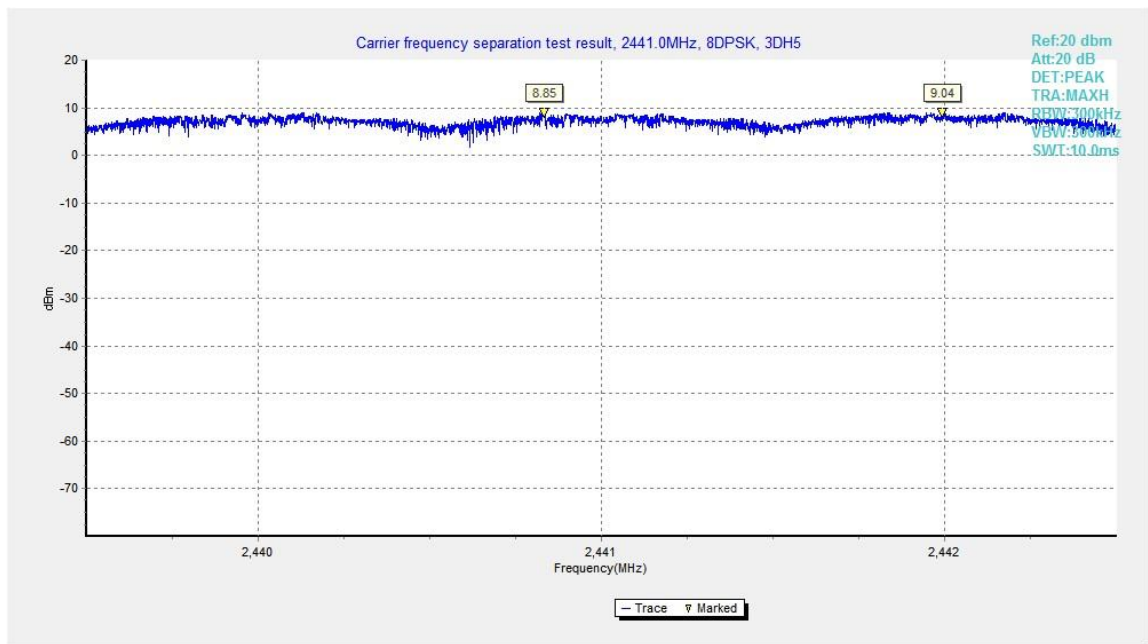


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

Conclusion: PASS

Test graphs as below:

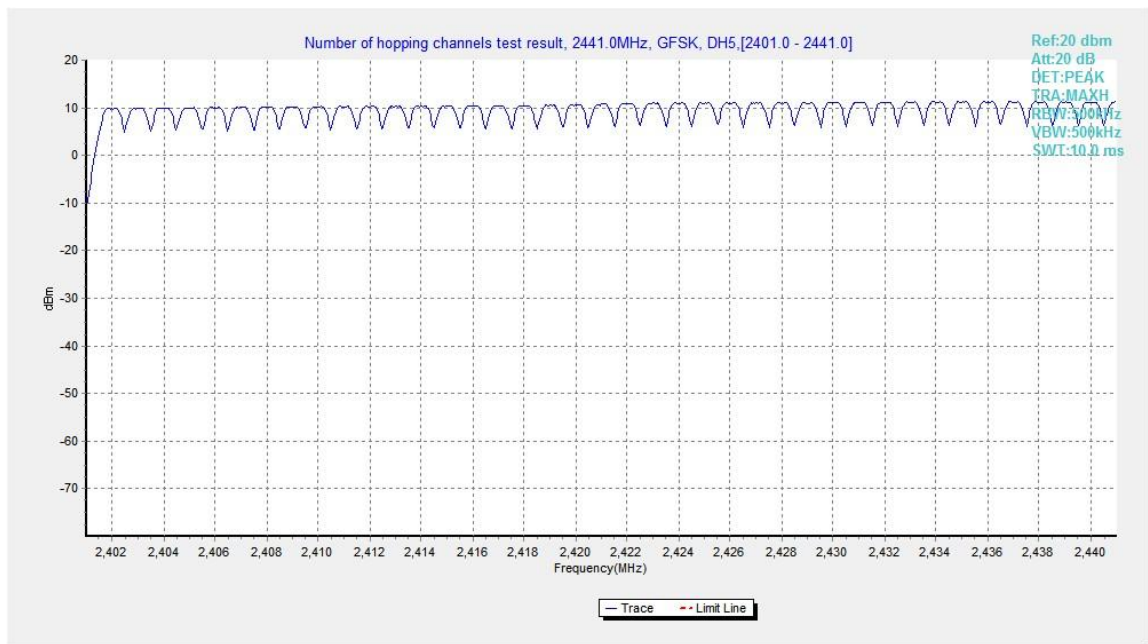


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

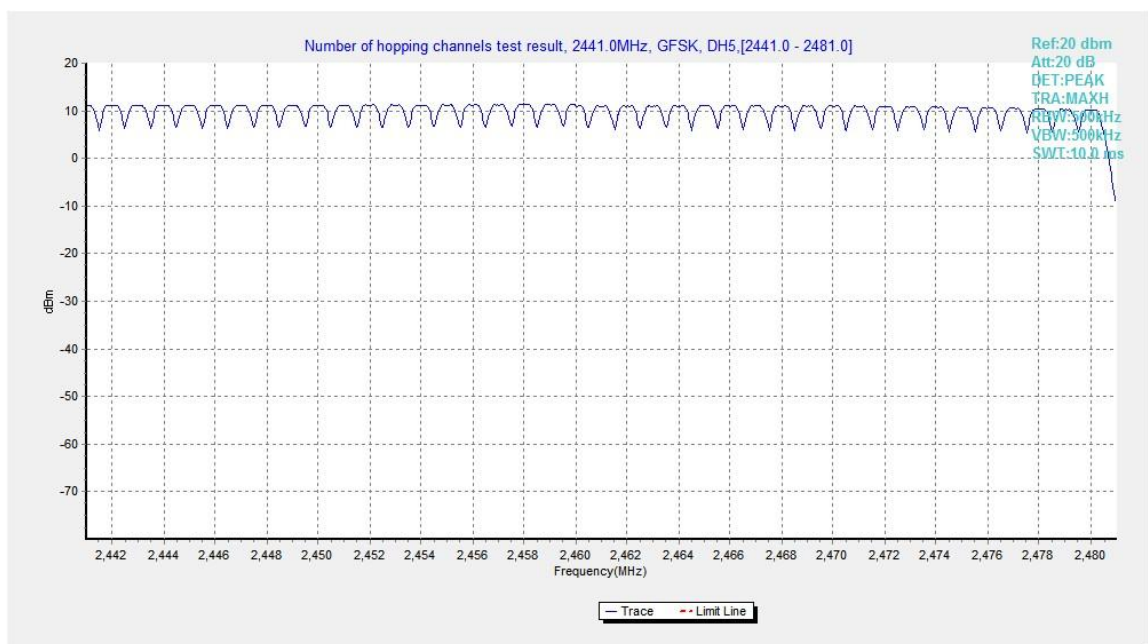


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

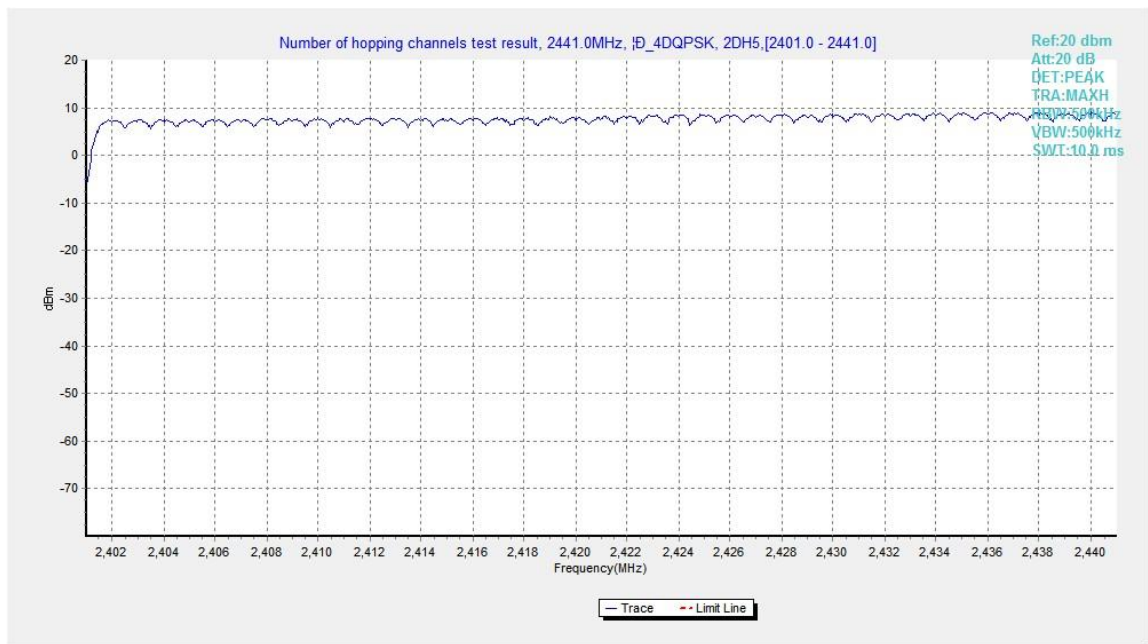


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

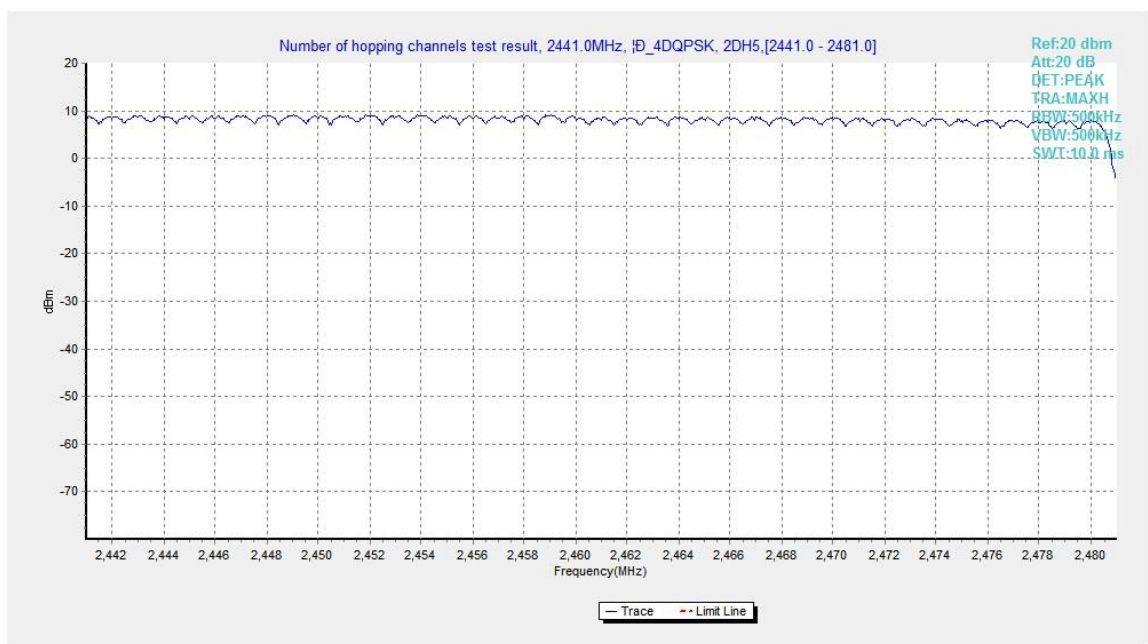


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

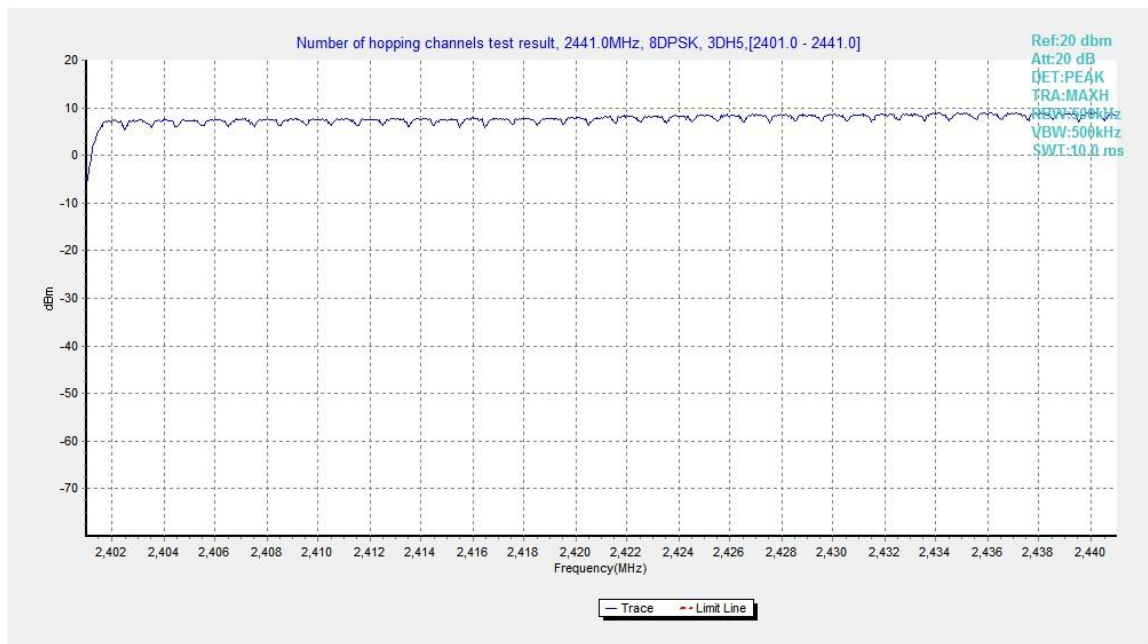


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

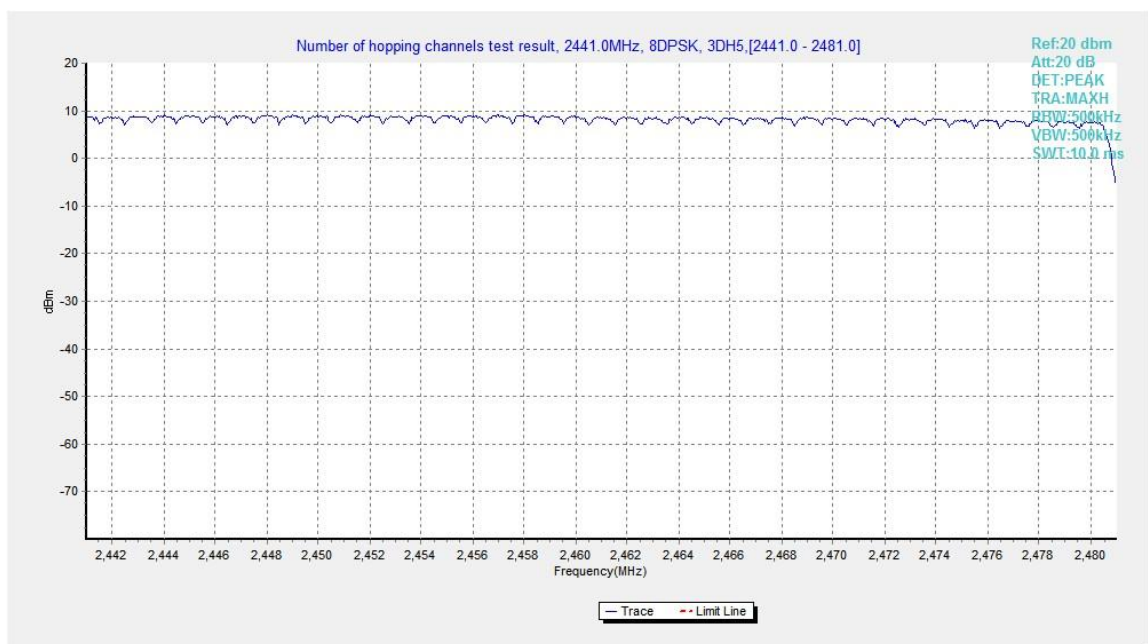


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78


B.11. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.

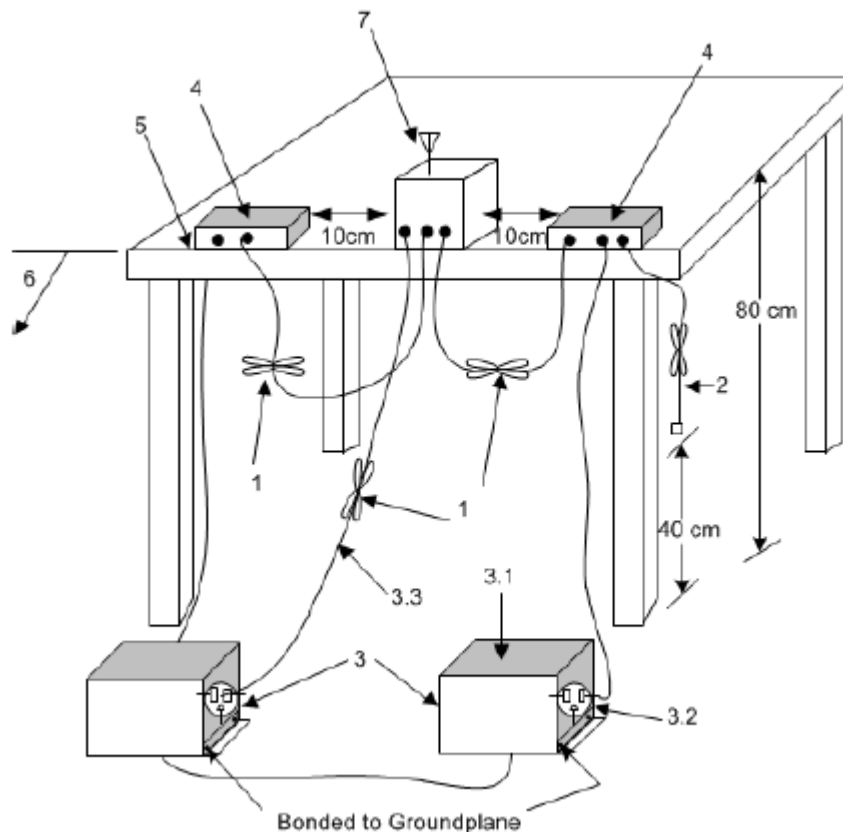

Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords

associated with non-EUT equipment in the overall system), the one configuration and arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

EUT ID: UT10A

Bluetooth (Quasi-peak Limit)

Bluetooth (Quasi-peak Limit)				
Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

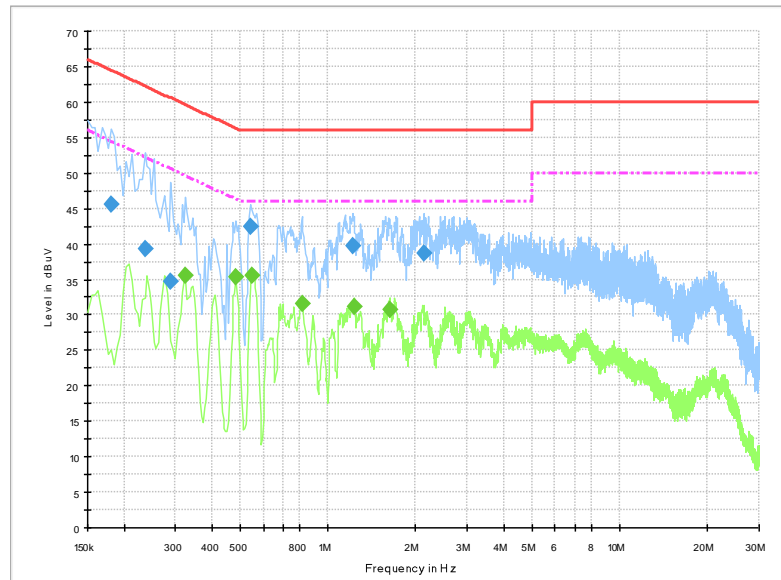


Fig.B.11.1 AC Powerline Conducted Emission-traffic

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.181500	45.5	5000.0	9.000	On	N	20.1	18.9	64.4	
0.235500	39.3	5000.0	9.000	On	N	19.9	22.9	62.3	
0.289500	34.7	5000.0	9.000	On	N	19.9	25.8	60.5	
0.541500	42.5	5000.0	9.000	On	L1	20.0	13.5	56.0	
1.216500	39.7	5000.0	9.000	On	L1	19.8	16.3	56.0	
2.125500	38.7	5000.0	9.000	On	L1	19.8	17.3	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.325500	35.5	5000.0	9.000	On	L1	19.9	14.1	49.6	
0.483000	35.3	5000.0	9.000	On	L1	20.0	11.0	46.3	
0.550500	35.5	5000.0	9.000	On	L1	20.0	10.5	46.0	
0.816000	31.6	5000.0	9.000	On	L1	19.9	14.4	46.0	
1.225500	31.2	5000.0	9.000	On	L1	19.8	14.8	46.0	
1.626000	30.8	5000.0	9.000	On	L1	19.8	15.2	46.0	

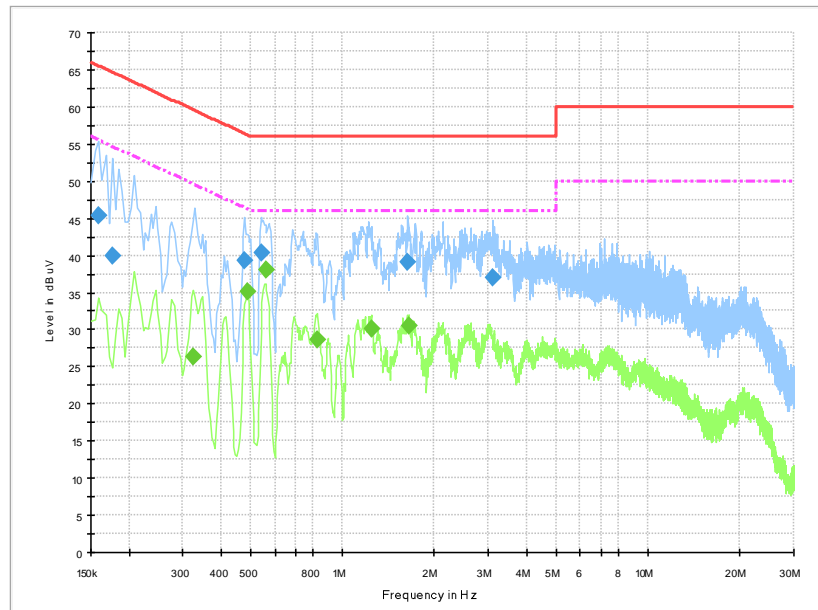


Fig.B.11.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.159000	45.3	5000.0	9.000	On	N	19.9	20.2	65.5	
0.177000	40.0	5000.0	9.000	On	N	20.1	24.6	64.6	
0.478500	39.4	5000.0	9.000	On	L1	20.0	17.0	56.4	
0.541500	40.3	5000.0	9.000	On	L1	20.0	15.7	56.0	
1.639500	39.1	5000.0	9.000	On	L1	19.8	16.9	56.0	
3.111000	36.9	5000.0	9.000	On	L1	19.8	19.1	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.325500	26.3	5000.0	9.000	On	L1	19.9	23.3	49.6	
0.487500	35.1	5000.0	9.000	On	L1	20.0	11.1	46.2	
0.559500	38.1	5000.0	9.000	On	L1	20.0	7.9	46.0	
0.825000	28.6	5000.0	9.000	On	L1	19.9	17.4	46.0	
1.239000	30.1	5000.0	9.000	On	L1	19.8	15.9	46.0	
1.648500	30.5	5000.0	9.000	On	L1	19.8	15.5	46.0	

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <div style="display: flex; justify-content: space-around; align-items: center;"></div>	
<hr/> <h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>	<div style="display: flex; justify-content: space-around; align-items: center;"><div style="text-align: right;"> <i>For the National Voluntary Laboratory Accreditation Program</i></div></div>

*****END OF REPORT*****