



FCC PART 15C TEST REPORT No. I20Z62070-IOT05

for

TCL Communication Ltd.

GSM/UMTS/LTE mobile phone

T7730

FCC ID : 2ACCJN045

with

Hardware Version: 03

Software Version: v3.0.9D1Y

Issued Date: 2021-01-12

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20Z62070-IOT05	Rev.0	1st edition	2021-01-02

CONTENTS

CONTENTS	3
1. TEST LATORATORY	4
1.1. Introduction & Accreditation	4
1.2. Testing Location.....	4
1.3. TestingEnvironment.....	4
1.4. Project date.....	4
1.5. Signature	4
2. CLIENT INFORMATION.....	5
2.1. Applicant Information.....	5
2.2. Manufacturer Information.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	6
3.1. About EUT.....	6
3.2. Internal Identification of EUT used during the test.....	6
3.3. Internal Identification of AE used during the test	6
3.4. General Description	7
4. REFERENCE DOCUMENTS.....	8
4.1. Documents supplied by applicant	8
4.2. Reference Documents for testing.....	8
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. Summary of Test Results	9
6.2. Statements	9
6.3. Test Conditions	9
7. TEST EQUIPMENTS UTILIZED.....	10
8. Measurement Uncertainty.....	11
8.1. Transmitter Output Power.....	11
8.2. Peak Power Spectral Density	11
8.3. Occupied 6dB Bandwidth.....	11
8.4. Band Edges Compliance	11
8.5. Spurious Emissions	11
8.6. AC Power-line Conducted Emission	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1. Measurement Method	12
A.2.2. Maximum Average Output Power-Conducted	13
A.3. Peak Power Spectral Density	14
A.4. Occupied 6dB Bandwidth	15
A.5.2 Transmitter Spurious Emission - Radiated	23
A6.2 Band Edges - Radiated.....	35
A.7. AC Powerline Conducted Emission	43
ANNEX B: Accreditation Certificate	52

1. TEST LABORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1:CTTL(Gaolizhang Road)

Address: Cuihu Cloud Center, No.1, Gaolizhang Road, Wenquan,
Haidian District, Beijing, China

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35°C

Extreme Temperature: -20/+55°C

Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2020-12-01


Testing End Date: 2021-01-12

1.5. Signature




Feng Aiyu

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: CHINA
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: CHINA
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model name	T7730
FCC ID	O57TBJ606F
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85 V

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	015888000200569/01	03	v3.0.9D1Y
EUT2	015888000200619/01	03	v3.0.9D1Y

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description		
AE1	battery	/	Inbuilt
AE2	battery	/	Inbuilt
AE3	Travel charger	/	/
AE4	Travel charger	/	/
AE5	Travel charger	/	/
AE6	Travel charger	/	/
AE7	USB Cable	/	/
AE8	USB Cable	/	/

AE1

Model	TLp048A1
Manufacturer	BYD
Capacitance	4360mAh
Nominal voltage	3.85V

AE2

Model	TLp048A7
Manufacturer	VEKEN
Capacitance	4360mAh
Nominal voltage	3.85V

AE3

Model	QC13US
Manufacturer	BYD
Length of cable	/
AE4	
Model	QC13US
Manufacturer	PUAN
Length of cable	/
AE5	
Model	UC13US
Manufacturer	PUAN
Length of cable	/
AE6	
Model	UC13US
Manufacturer	Chen Yang
Length of cable	/
AE7	
Model	CDA0000128C1
Manufacturer	Juwei
Length of cable	/
AE8	
Model	CDA0000128C2
Manufacturer	shenghua
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with Bluetooth, WLAN with integrated antenna and inbuilt battery..

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/matrix manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85 V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2021-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2021-08-03
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2021-03-15
4	Shielding Room	S81	/	ETS-Lindgren	/	/
5	Attenuator	K40	/	Rosenberger	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2021-03-03
2	BiLog Antenna	VULB9163	1223	Schwarzbeck	1 year	2021-03-18
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1 year	2021-01-14
4	EMI Antenna	3116	2663	ETS-Lindgren	1 year	2021-09-15
5	Spectrum Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2021-06-18

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.16
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.44
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

8.6. AC Power-line Conducted Emission

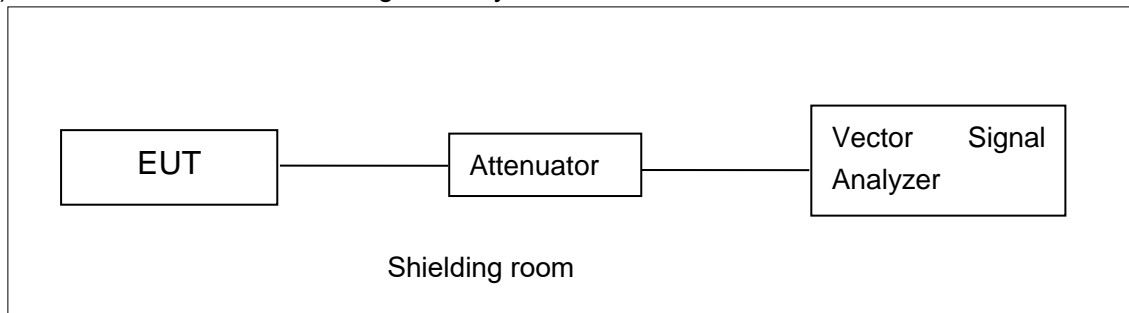
Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer




A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

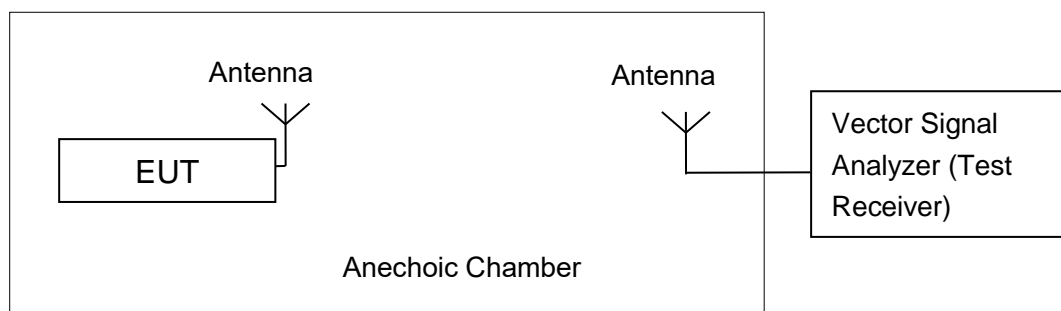Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;



The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2.2. Maximum Average Output Power-Conducted

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	16.68	16.16	17.13

802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	14.51	14.89	15.98

802.11ac-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11ac(20MHz)	15.06	15.15	14.79

802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11n(40MHz)	14.42	15.47

802.11ac-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11ac(40MHz)	14.73	14.10

802.11ac-HT80 mode

Mode	Test Result (dBm)
	5775MHz (Ch155)
802.11ac(80MHz)	13.92

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	1.78	P
	157	2.84	P
	165	2.80	P
802.11n HT20	149	0.05	P
	157	1.22	P
	165	1.27	P
802.11ac HT20	149	-0.24	P
	157	0.59	P
	165	0.78	P
802.11n HT40	151	-2.20	P
	159	-2.95	P
802.11ac HT40	151	-2.77	P
	159	-2.83	P
802.11ac HT80	155	-5.90	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (KHz)		conclusion
		Fig.	Value	
802.11a	149	Fig.1	16040.00	P
	157	Fig.2	15700.00	P
	165	Fig.3	15950.00	P
802.11n HT20	149	Fig.4	15350.00	P
	157	Fig.5	15450.00	P
	165	Fig.6	16950.00	P
802.11ac HT20	149	Fig.7	16450.00	P
	157	Fig.8	15050.00	P
	165	Fig.9	16790.00	P
802.11n HT40	151	Fig.10	35040.00	P
	159	Fig.11	34950.00	P
802.11ac HT40	151	Fig.12	36320.00	P
	159	Fig.13	35680.00	P
802.11ac HT80	155	Fig.14	72480.00	P

Conclusion: PASS

Test graphs as below:

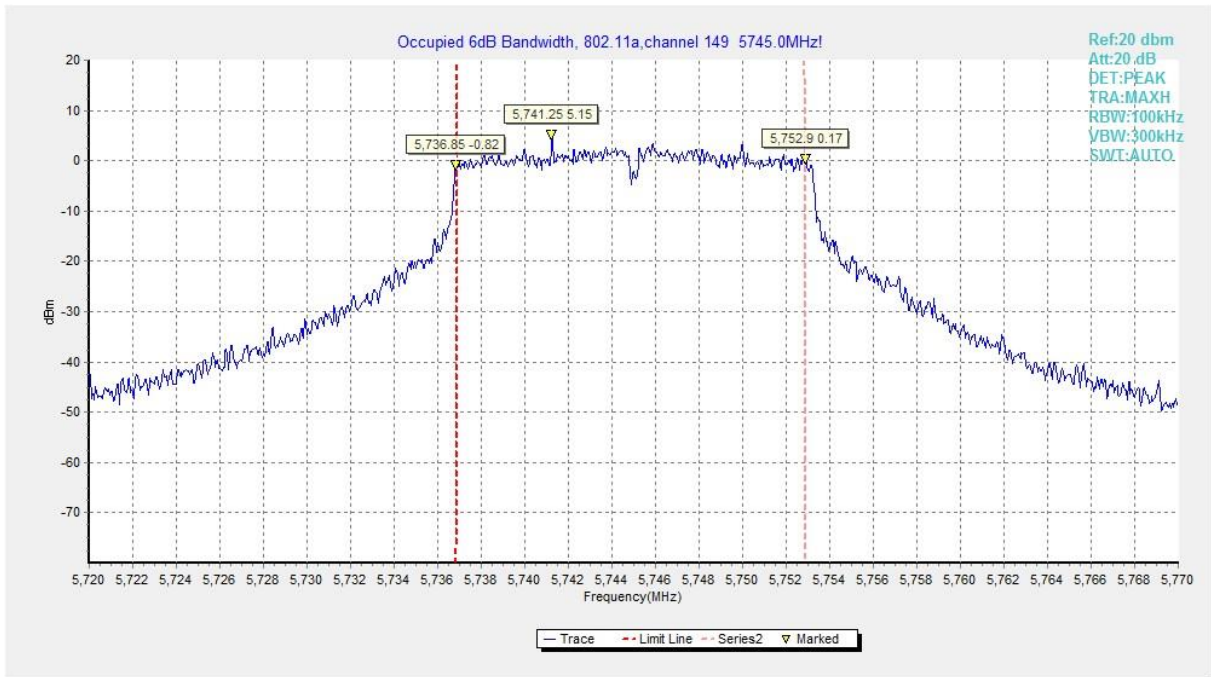


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

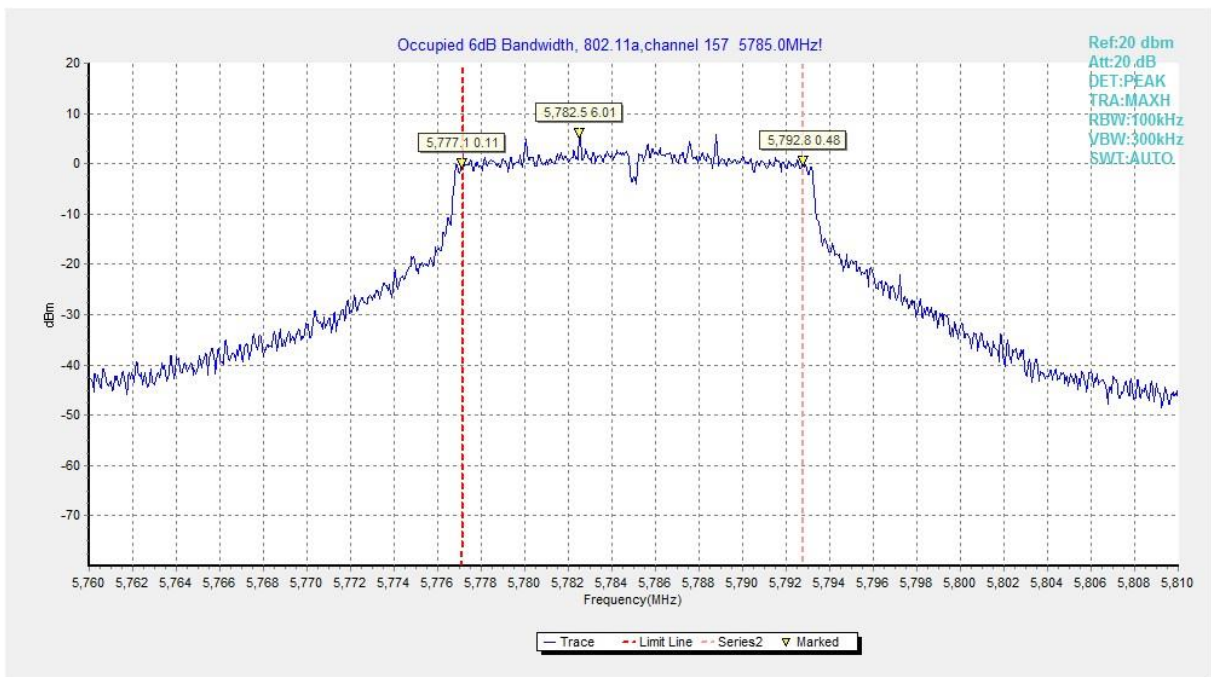


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

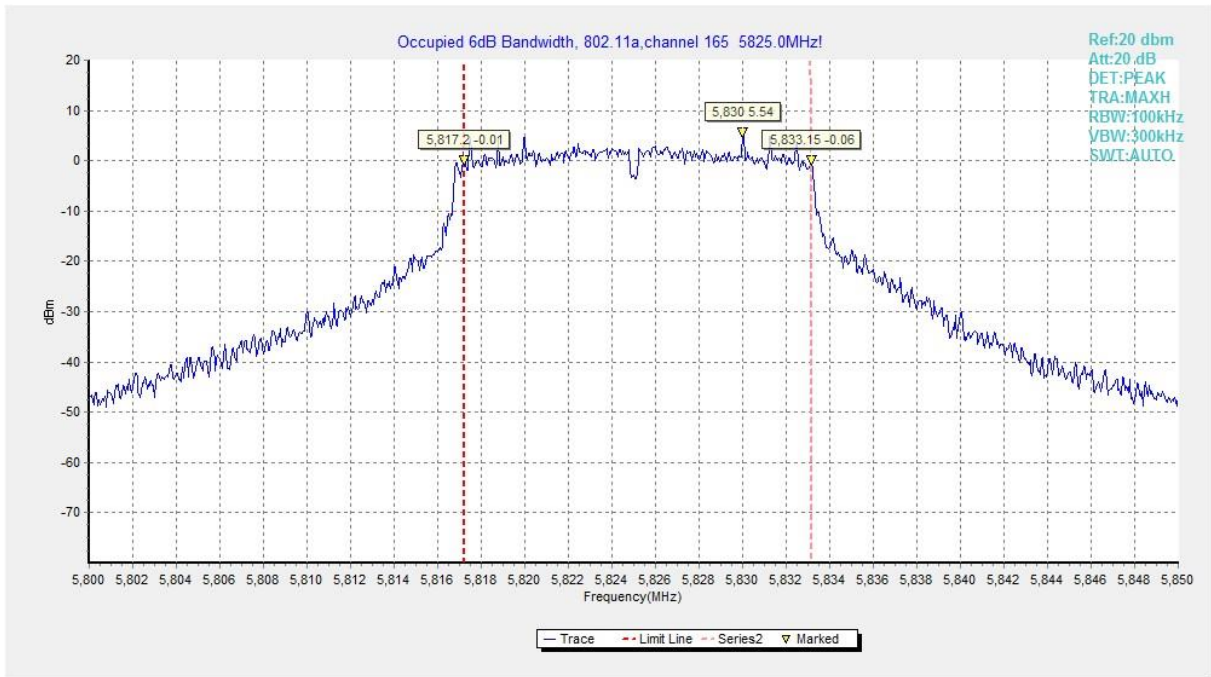


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

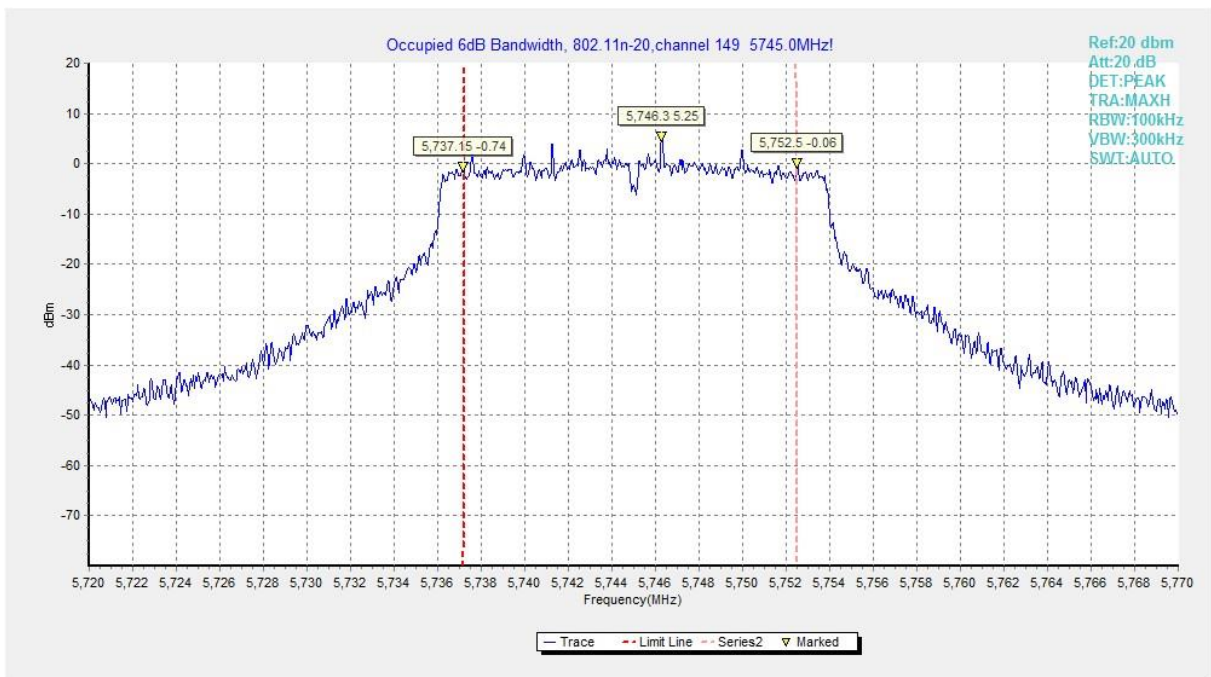


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

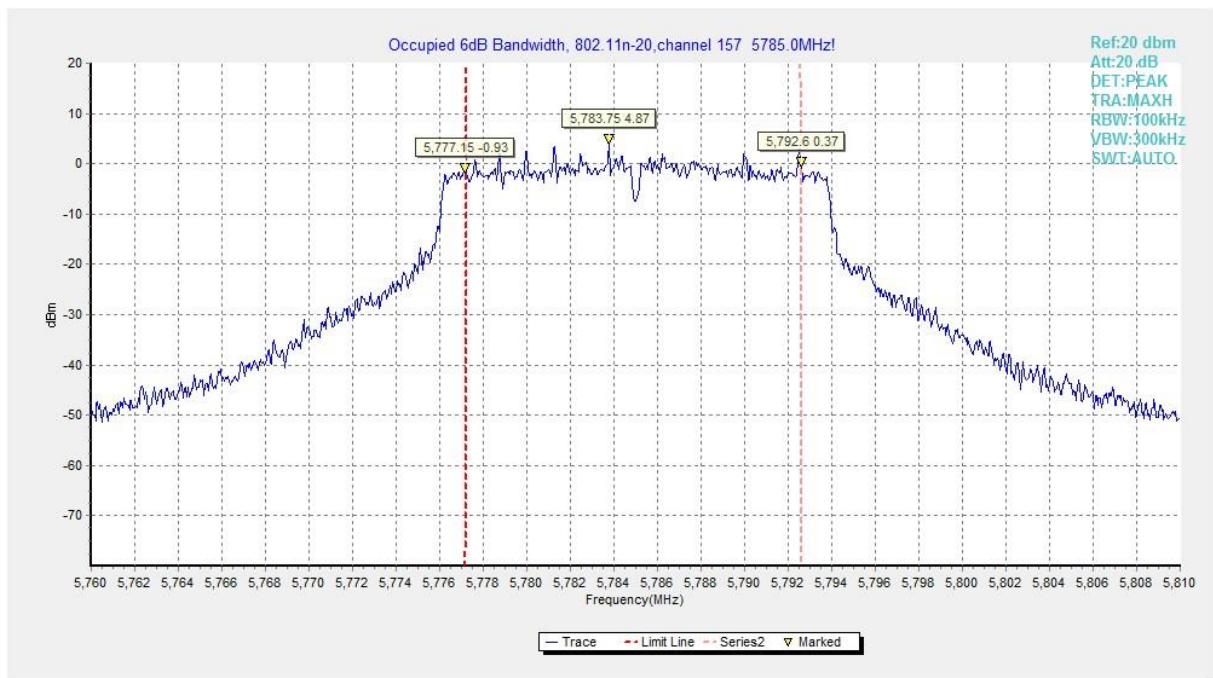


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

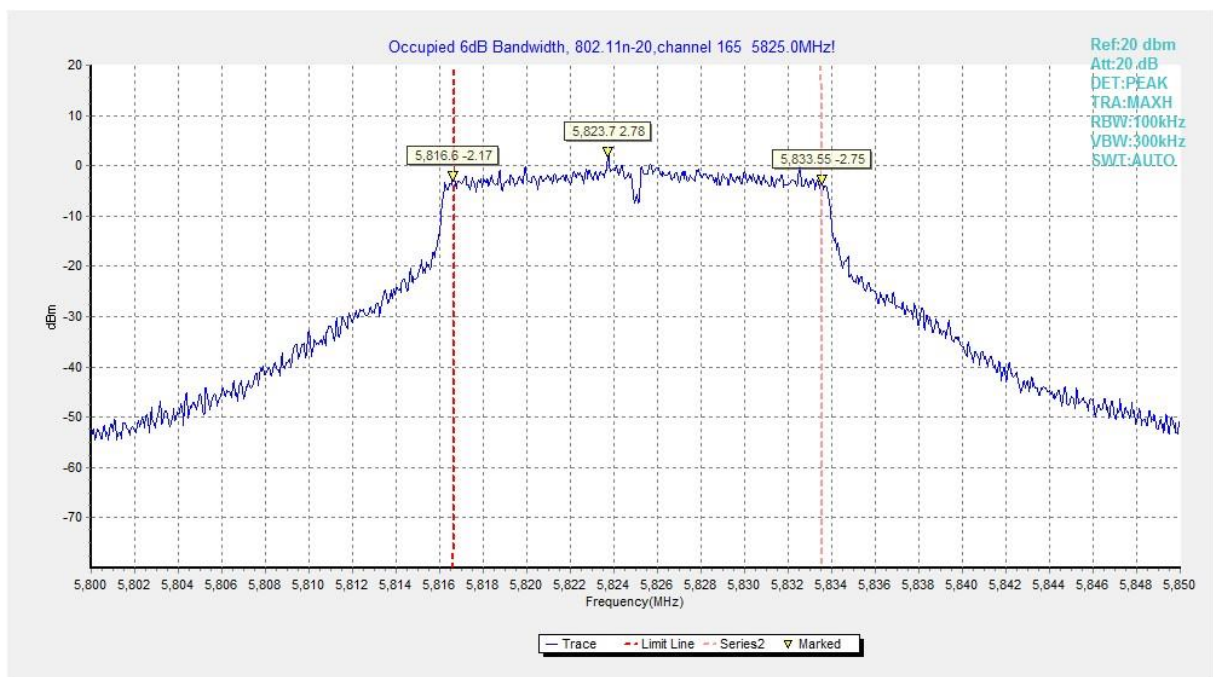


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

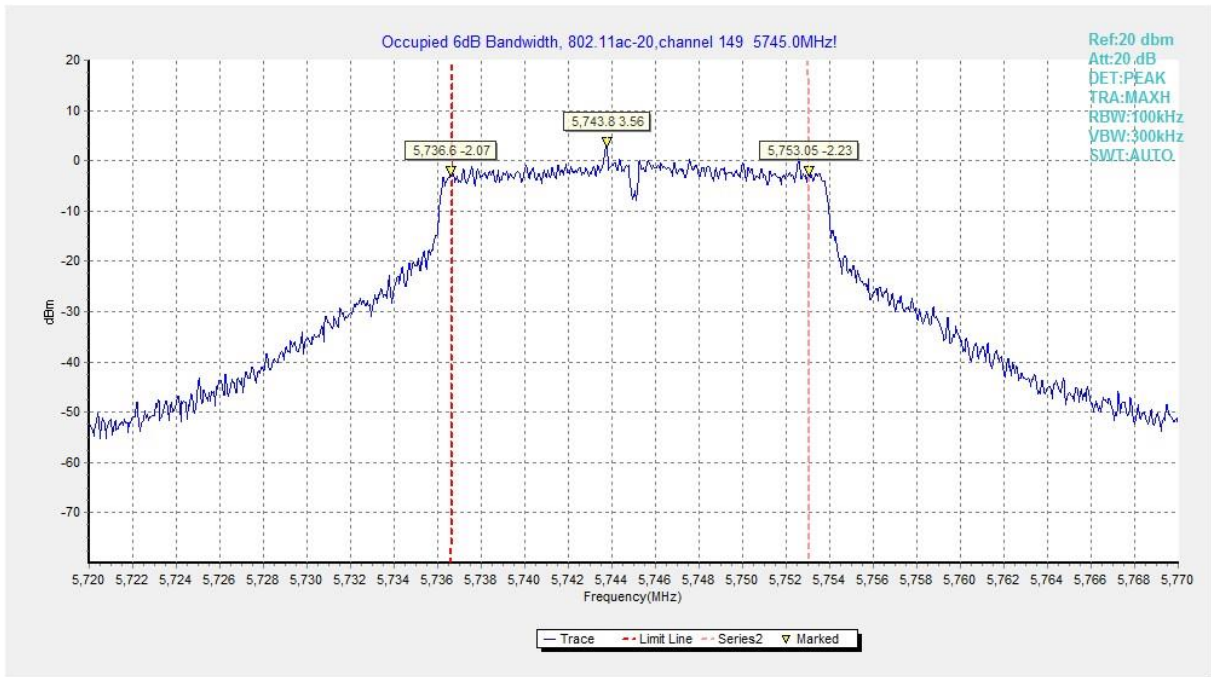


Fig. 7 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 149)

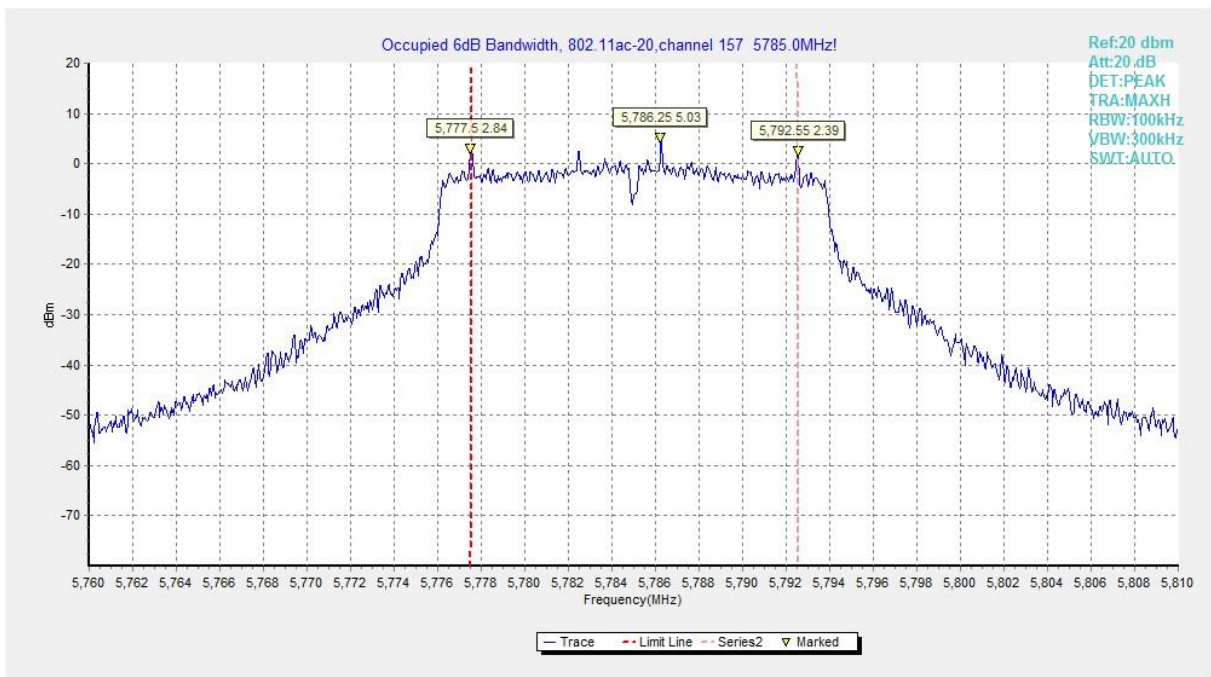


Fig. 8 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 157)

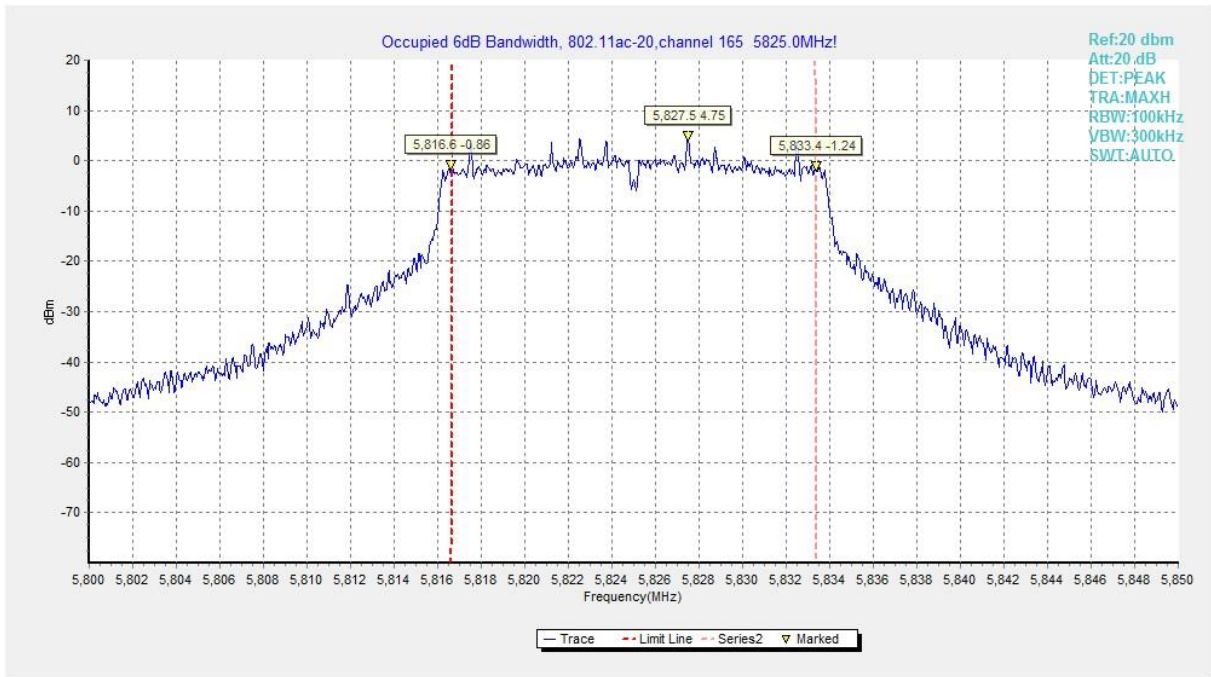


Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 165)

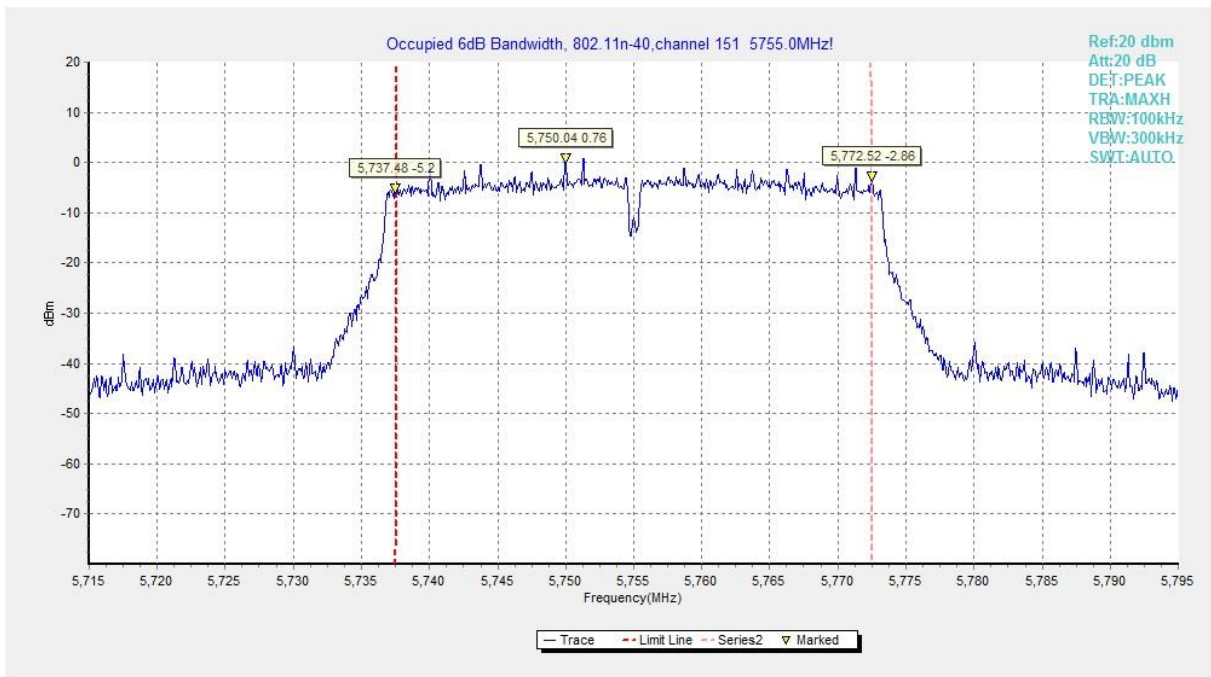


Fig. 10 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

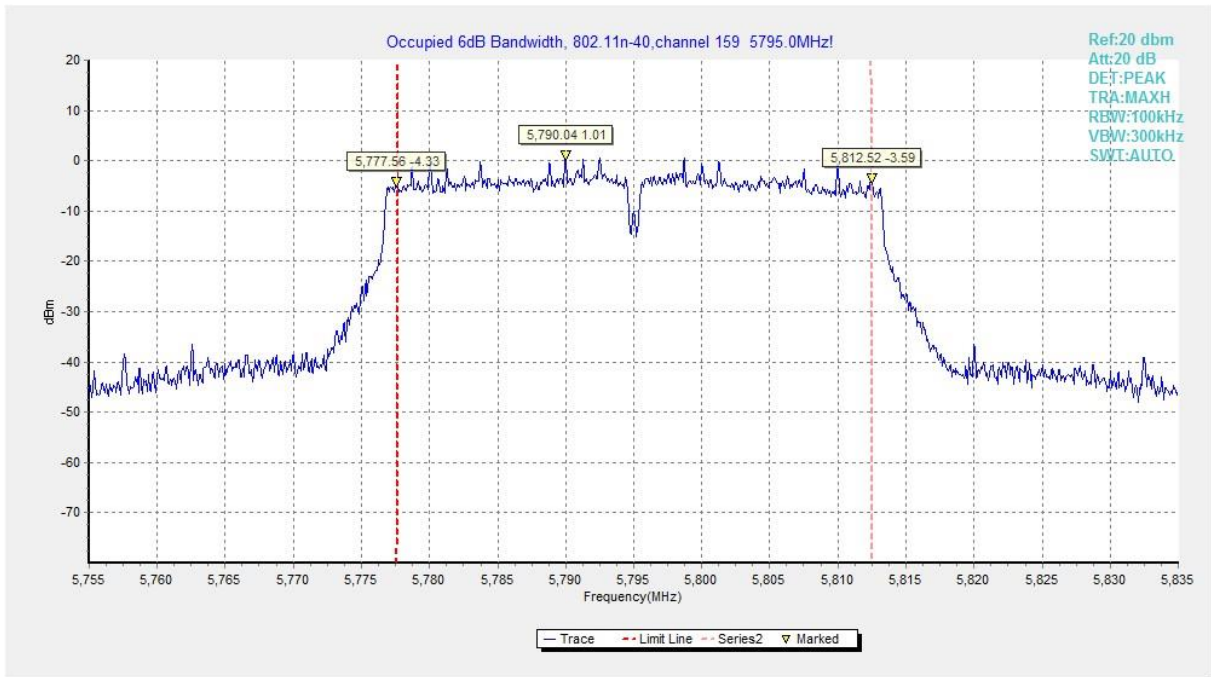


Fig. 11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

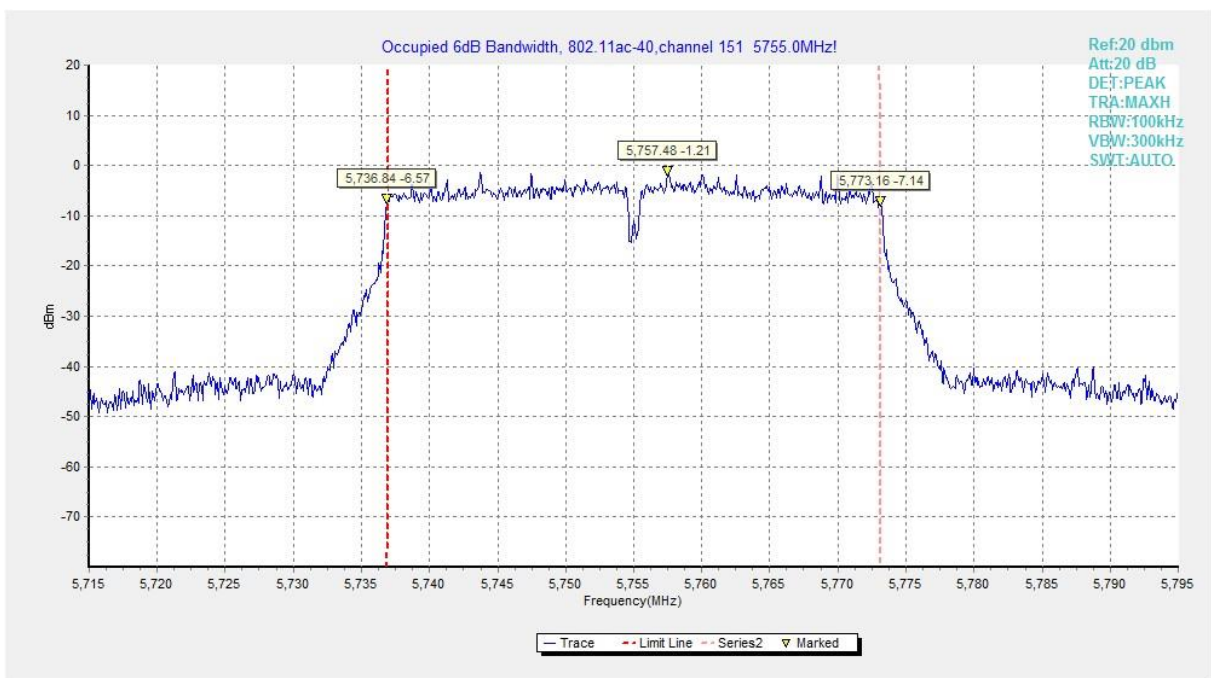


Fig. 12 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 151)

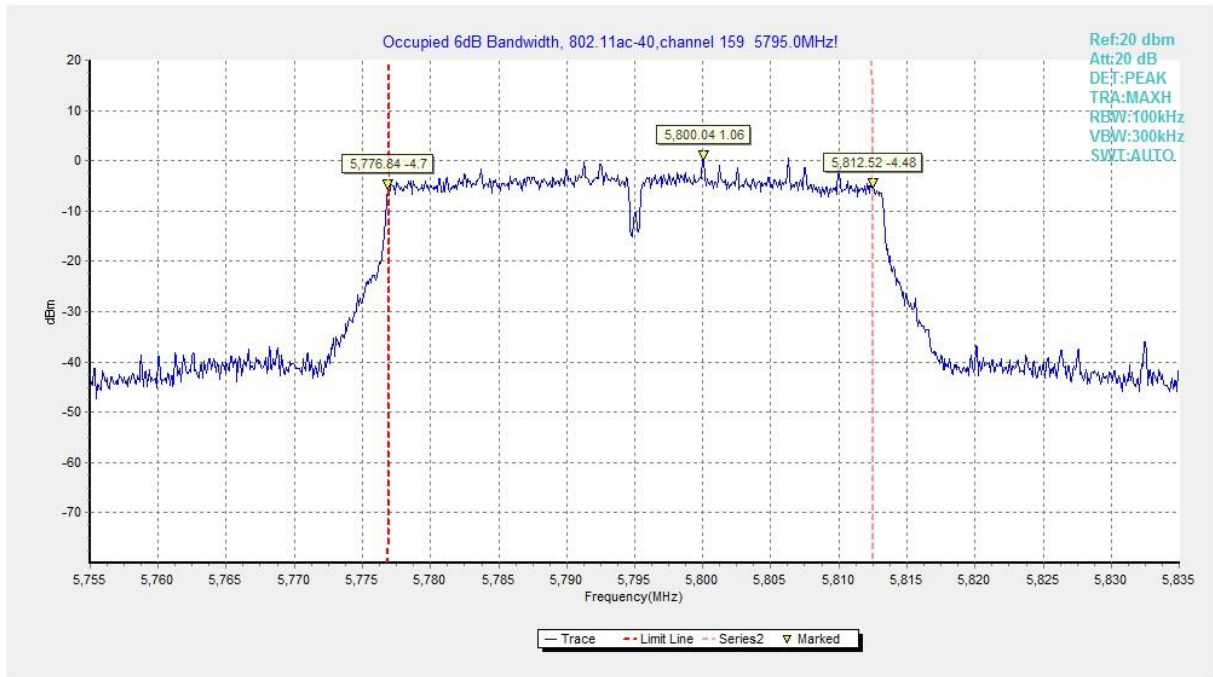


Fig. 13 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 159)

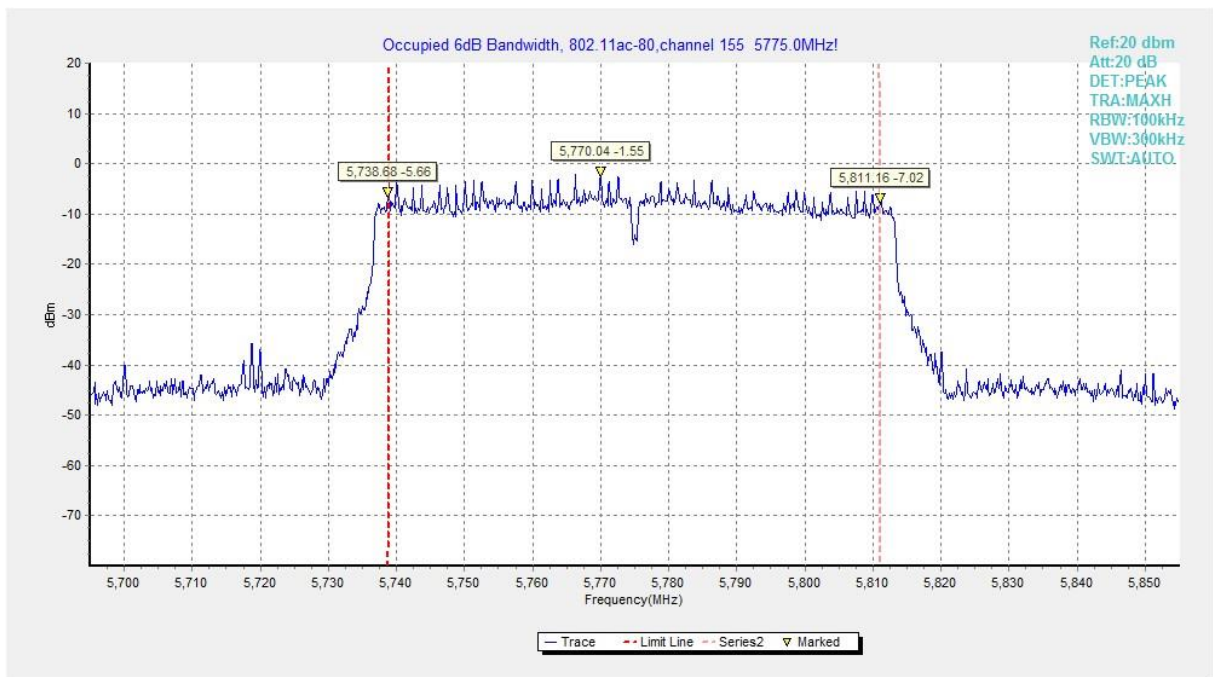


Fig. 14 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

A A.5.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:


Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

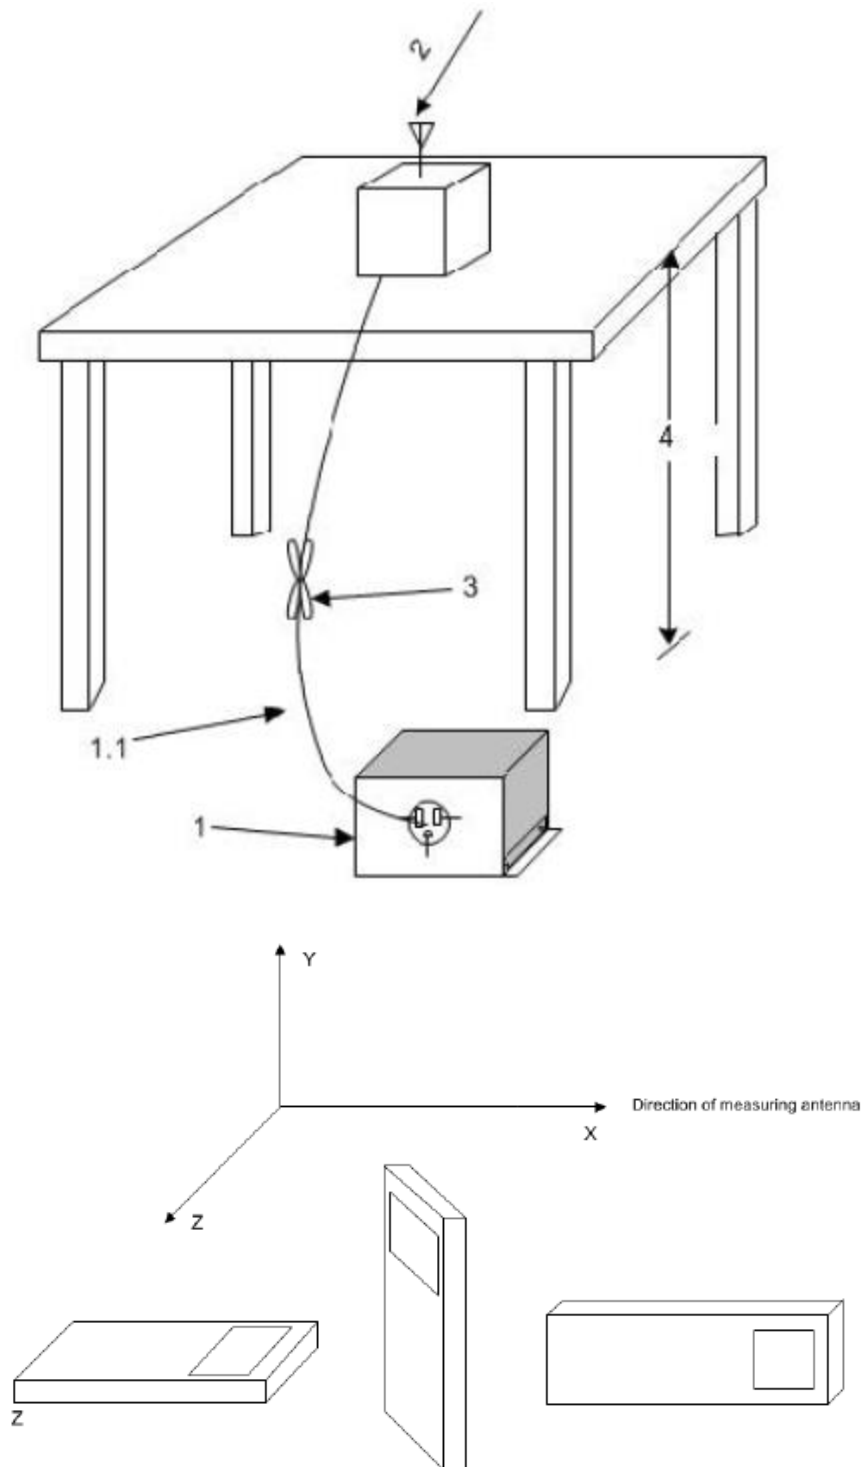The EUT and transmitting antenna shall be centered on the turntable.



Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the

nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

Conclusion: PASS

EUT ID: EUT2(UT15a)

Average Results:

802.11a

Ch149

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17984.000	46.70	-25.50	46.70	25.50	54.00	7.30	V
17972.500	46.60	-25.50	46.70	25.40	54.00	7.40	V
17995.000	46.50	-25.50	46.70	25.30	54.00	7.50	V
17981.300	46.40	-25.50	46.70	25.20	54.00	7.60	V
17971.400	46.30	-25.50	46.70	25.10	54.00	7.70	V
5724.900	44.00	-27.10	34.30	36.80	54.00	10.00	H

Ch157

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17993.400	46.60	-25.50	46.70	25.40	54.00	7.40	V
17969.800	46.50	-25.50	46.70	25.30	54.00	7.50	V
17980.800	46.50	-25.50	46.70	25.30	54.00	7.50	V
17985.200	46.40	-25.50	46.70	25.20	54.00	7.60	V
17994.000	46.40	-25.50	46.70	25.20	54.00	7.60	V
17973.000	46.30	-25.50	46.70	25.10	54.00	7.70	V

Ch165

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17967.000	46.50	-25.50	46.70	25.30	54.00	7.50	V
17989.500	46.40	-25.50	46.70	25.20	54.00	7.60	V
17990.700	46.40	-25.50	46.70	25.20	54.00	7.60	V
17997.800	46.40	-25.50	46.70	25.20	54.00	7.60	V
17946.100	46.30	-25.50	46.70	25.10	54.00	7.70	V
5850.400	41.20	-27.10	34.40	33.90	54.00	12.80	H

802.11n-HT20
Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.700	46.90	-25.50	46.70	25.70	54.00	7.10	V
17986.800	46.90	-25.50	46.70	25.70	54.00	7.10	V
17960.400	46.80	-25.50	46.70	25.60	54.00	7.20	V
17978.000	46.70	-25.50	46.70	25.50	54.00	7.30	V
17991.200	46.70	-25.50	46.70	25.50	54.00	7.30	V
5725.000	44.90	-27.10	34.30	37.70	54.00	9.10	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.300	46.90	-25.50	46.70	25.70	54.00	7.10	V
17987.900	46.90	-25.50	46.70	25.70	54.00	7.10	V
17991.200	46.90	-25.50	46.70	25.70	54.00	7.10	V
17978.500	46.70	-25.50	46.70	25.50	54.00	7.30	V
17993.400	46.70	-25.50	46.70	25.50	54.00	7.30	V
17996.200	46.70	-25.50	46.70	25.50	54.00	7.30	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.300	46.80	-25.50	46.70	25.60	54.00	7.20	V
17991.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
17969.800	46.70	-25.50	46.70	25.50	54.00	7.30	V
17972.000	46.70	-25.50	46.70	25.50	54.00	7.30	V
17980.800	46.70	-25.50	46.70	25.50	54.00	7.30	V
5850.000	42.50	-27.10	34.40	35.20	54.00	11.50	V

802.11n-HT40

Ch151

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17985.700	46.80	-25.50	46.70	25.60	54.00	7.20	V
17991.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
17964.200	46.70	-25.50	46.70	25.50	54.00	7.30	V
17977.500	46.70	-25.50	46.70	25.50	54.00	7.30	V
17980.200	46.70	-25.50	46.70	25.50	54.00	7.30	V
5724.300	47.80	-27.10	34.30	40.60	54.00	6.20	H

Ch159

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17967.000	47.00	-25.50	46.70	25.80	54.00	7.00	V
17975.200	46.90	-25.50	46.70	25.70	54.00	7.10	V
17983.000	46.90	-25.50	46.70	25.70	54.00	7.10	V
17994.500	46.90	-25.50	46.70	25.70	54.00	7.10	V
17976.900	46.80	-25.50	46.70	25.60	54.00	7.20	V
5850.400	41.40	-27.10	34.40	34.10	54.00	12.60	H

802.11ac-HT20

Ch149

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17983.000	47.00	-25.50	46.70	25.80	54.00	7.00	V
17967.500	46.80	-25.50	46.70	25.60	54.00	7.20	V
17971.400	46.80	-25.50	46.70	25.60	54.00	7.20	V
17983.500	46.80	-25.50	46.70	25.60	54.00	7.20	V
17988.500	46.80	-25.50	46.70	25.60	54.00	7.20	V
5724.800	44.70	-27.10	34.30	37.50	54.00	9.30	H

Ch157

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17981.800	47.10	-25.50	46.70	25.90	54.00	6.90	V
17962.000	47.00	-25.50	46.70	25.80	54.00	7.00	V
17988.500	47.00	-25.50	46.70	25.80	54.00	7.00	V
17953.200	46.80	-25.50	46.70	25.60	54.00	7.20	V
17984.000	46.80	-25.50	46.70	25.60	54.00	7.20	V
17986.800	46.80	-25.50	46.70	25.60	54.00	7.20	V

Ch165

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17952.700	46.90	-25.50	46.70	25.70	54.00	7.10	V
17983.000	46.90	-25.50	46.70	25.70	54.00	7.10	V
17985.200	46.90	-25.50	46.70	25.70	54.00	7.10	V
17957.100	46.80	-25.50	46.70	25.60	54.00	7.20	V
17986.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
5850.100	42.50	-27.10	34.40	35.20	54.00	11.50	H

802.11ac-HT40

Ch151

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17956.000	47.10	-25.50	46.70	25.90	54.00	6.90	V
17976.300	46.90	-25.50	46.70	25.70	54.00	7.10	V
17986.200	46.80	-25.50	46.70	25.60	54.00	7.20	V
17991.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
17969.200	46.70	-25.50	46.70	25.50	54.00	7.30	V
5723.900	47.50	-27.10	34.30	40.30	54.00	6.50	H

Ch159

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17958.200	46.90	-25.50	46.70	25.70	54.00	7.10	V
17964.800	46.90	-25.50	46.70	25.70	54.00	7.10	V
17965.300	46.90	-25.50	46.70	25.70	54.00	7.10	V
17983.000	46.90	-25.50	46.70	25.70	54.00	7.10	V
17963.200	46.80	-25.50	46.70	25.60	54.00	7.20	V
5851.800	41.30	-27.10	34.40	34.00	54.00	12.70	V

802.11ac-HT80

Ch155

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17950.500	47.00	-25.50	46.70	25.80	54.00	7.00	V
17983.000	46.90	-25.50	46.70	25.70	54.00	7.10	V
17990.700	46.90	-25.50	46.70	25.70	54.00	7.10	V
17959.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
17975.800	46.80	-25.50	46.70	25.60	54.00	7.20	V
17996.200	46.80	-25.50	46.70	25.60	54.00	7.20	V

Peak Results:
802.11a

Ch149

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17982.400	58.40	-25.50	46.70	37.20	68.30	9.90	V
17994.500	57.40	-25.50	46.70	36.20	68.30	10.90	V
17998.900	57.40	-25.50	46.70	36.20	68.30	10.90	V
17975.200	57.30	-25.50	46.70	36.10	68.30	11.00	V
17971.400	57.20	-25.50	46.70	36.00	68.30	11.10	V
5724.800	56.20	-27.10	34.30	49.00	68.30	12.10	H

Ch157

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17870.800	58.10	-25.50	46.70	36.90	68.30	10.20	V
17963.200	58.10	-25.50	46.70	36.90	68.30	10.20	V
17953.200	57.30	-25.50	46.70	36.10	68.30	11.00	V
17979.700	57.30	-25.50	46.70	36.10	68.30	11.00	V
17965.300	57.20	-25.50	46.70	36.00	68.30	11.10	V
17980.800	57.00	-25.50	46.70	35.80	68.30	11.30	V

Ch165

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17976.300	58.40	-25.50	46.70	37.20	68.30	9.90	V
17929.000	57.40	-25.50	46.70	36.20	68.30	10.90	V
17969.200	57.40	-25.50	46.70	36.20	68.30	10.90	V
17855.900	57.30	-25.50	46.70	36.10	68.30	11.00	V
17937.300	57.30	-25.50	46.70	36.10	68.30	11.00	V
5893.700	52.80	-27.20	34.40	45.60	68.30	15.50	H

802.11n-HT20

Ch149

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17897.200	57.90	-25.50	46.70	36.70	68.30	10.40	V
17932.900	57.90	-25.50	46.70	36.70	68.30	10.40	V
17948.300	57.90	-25.50	46.70	36.70	68.30	10.40	V
17979.700	57.80	-25.50	46.70	36.60	68.30	10.50	V
17899.900	57.60	-25.50	46.70	36.40	68.30	10.70	V
5724.800	56.90	-27.10	34.30	49.70	68.30	11.40	H

Ch157

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17889.500	59.00	-25.50	46.70	37.80	68.30	9.30	V
17978.500	57.90	-25.50	46.70	36.70	68.30	10.40	V
17965.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
17962.000	57.70	-25.50	46.70	36.50	68.30	10.60	V
17963.700	57.70	-25.50	46.70	36.50	68.30	10.60	V
17954.900	57.60	-25.50	46.70	36.40	68.30	10.70	V

Ch165

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17986.200	58.10	-25.50	46.70	36.90	68.30	10.20	V
17921.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
17965.900	57.80	-25.50	46.70	36.60	68.30	10.50	V
17997.800	57.80	-25.50	46.70	36.60	68.30	10.50	V
17994.000	57.70	-25.50	46.70	36.50	68.30	10.60	V
5855.300	58.10	-27.10	34.40	50.80	68.30	10.20	V

802.11n-HT40

Ch151

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17924.100	59.10	-25.50	46.70	37.90	68.30	9.20	V
17991.800	58.30	-25.50	46.70	37.10	68.30	10.00	V
17943.300	57.90	-25.50	46.70	36.70	68.30	10.40	V
17954.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
17989.500	57.80	-25.50	46.70	36.60	68.30	10.50	V
5724.900	59.10	-27.10	34.30	51.90	68.30	9.20	H

Ch159

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17987.900	58.60	-25.50	46.70	37.40	68.30	9.70	V
17997.200	58.50	-25.50	46.70	37.30	68.30	9.80	V
17965.900	58.00	-25.50	46.70	36.80	68.30	10.30	V
17988.500	57.90	-25.50	46.70	36.70	68.30	10.40	V
17994.500	57.90	-25.50	46.70	36.70	68.30	10.40	V
5862.200	56.30	-27.10	34.40	49.00	68.30	12.00	V

802.11ac-HT20

Ch149

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17963.700	58.40	-25.50	46.70	37.20	68.30	9.90	V
17943.900	58.10	-25.50	46.70	36.90	68.30	10.20	V
17997.200	58.10	-25.50	46.70	36.90	68.30	10.20	V
17964.200	57.90	-25.50	46.70	36.70	68.30	10.40	V
17981.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
5724.700	57.80	-27.10	34.30	50.60	68.30	10.50	V

Ch157

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17930.700	58.00	-25.50	46.70	36.80	68.30	10.30	V
17965.300	58.00	-25.50	46.70	36.80	68.30	10.30	V
17990.100	57.90	-25.50	46.70	36.70	68.30	10.40	V
17970.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
17946.100	57.60	-25.50	46.70	36.40	68.30	10.70	V
17887.800	57.50	-25.50	46.70	36.30	68.30	10.80	V

Ch165

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17966.500	58.70	-25.50	46.70	37.50	68.30	9.60	V
17980.800	58.20	-25.50	46.70	37.00	68.30	10.10	V
17989.500	58.10	-25.50	46.70	36.90	68.30	10.20	V
17562.800	57.70	-25.70	46.00	37.50	68.30	10.60	V
17934.500	57.70	-25.50	46.70	36.50	68.30	10.60	V
5851.400	58.40	-27.10	34.40	51.10	68.30	9.90	V

802.11ac-HT40

Ch151

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17965.300	57.80	-25.50	46.70	36.60	68.30	10.50	V
17875.700	57.70	-25.50	46.70	36.50	68.30	10.60	V
17978.000	57.70	-25.50	46.70	36.50	68.30	10.60	V
17943.300	57.60	-25.50	46.70	36.40	68.30	10.70	V
17893.300	57.50	-25.50	46.70	36.30	68.30	10.80	V
5724.100	59.80	-27.10	34.30	52.60	68.30	8.50	H

Ch159

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17989.000	58.80	-25.50	46.70	37.60	68.30	9.50	V
17950.500	58.30	-25.50	46.70	37.10	68.30	10.00	V
17958.200	58.10	-25.50	46.70	36.90	68.30	10.20	V
17983.000	57.90	-25.50	46.70	36.70	68.30	10.40	V
17984.600	57.90	-25.50	46.70	36.70	68.30	10.40	V
5855.900	55.80	-27.10	34.40	48.50	68.30	12.50	V

802.11ac-HT80

Ch155

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17945.000	59.20	-25.50	46.70	38.00	68.30	9.10	V
17978.000	58.30	-25.50	46.70	37.10	68.30	10.00	V
17955.500	57.90	-25.50	46.70	36.70	68.30	10.40	V
17858.700	57.80	-25.50	46.70	36.60	68.30	10.50	V
17981.800	57.80	-25.50	46.70	36.60	68.30	10.50	V
17961.000	57.70	-25.50	46.70	36.50	68.30	10.60	V

Sample calculation: 802.11ac 80MHz CH155–Peak, 17945.000MHz

$$\text{Peak ERP(dBm)} = P_{\text{Mea}}(38.00 \text{ dBuV/m}) + \text{Cable Loss}(-25.50) + \text{Antenna Factor}(46.70) = 59.20 \text{ dBuV/m}$$

A6.2 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	


The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.15	P
	5825 MHz	Fig.16	P
802.11n HT20	5745 MHz	Fig.17	P
	5825 MHz	Fig.18	P
802.11ac HT20	5745 MHz	Fig.19	P
	5825 MHz	Fig.20	P

802.11n HT40	5755 MHz	Fig.21	P
	5795 MHz	Fig.22	P
802.11ac HT40	5755 MHz	Fig.23	P
	5795 MHz	Fig.24	P
802.11ac HT80	5775 MHz	Fig.25	P
	5775 MHz	Fig.26	P

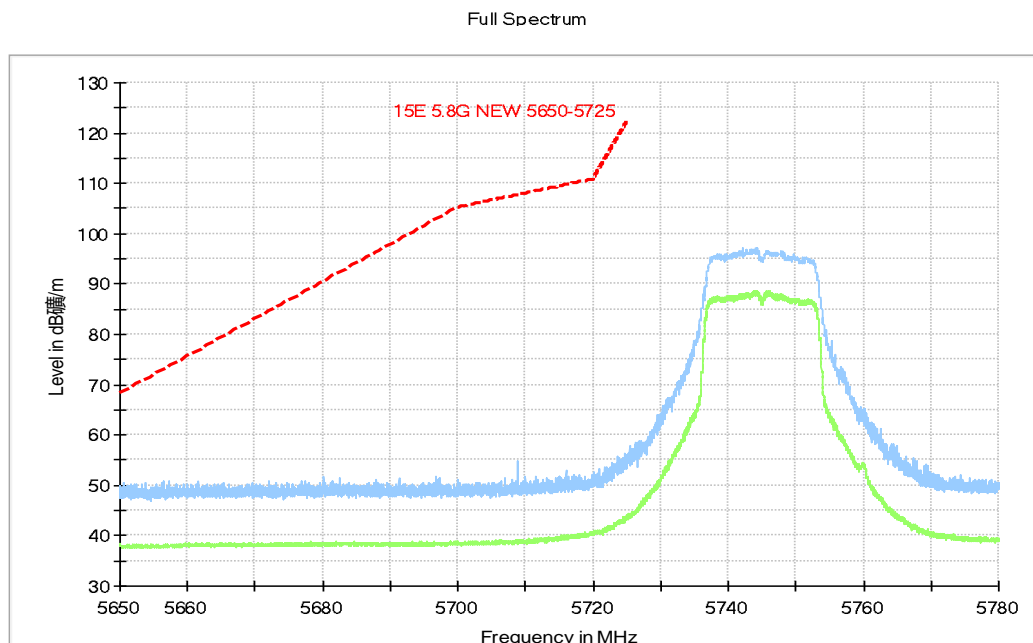EUT ID: EUT2(UT15a)
Conclusion: PASS
Test graphs as below:

Fig. 15 Band Edges (802.11a, 5745MHz)

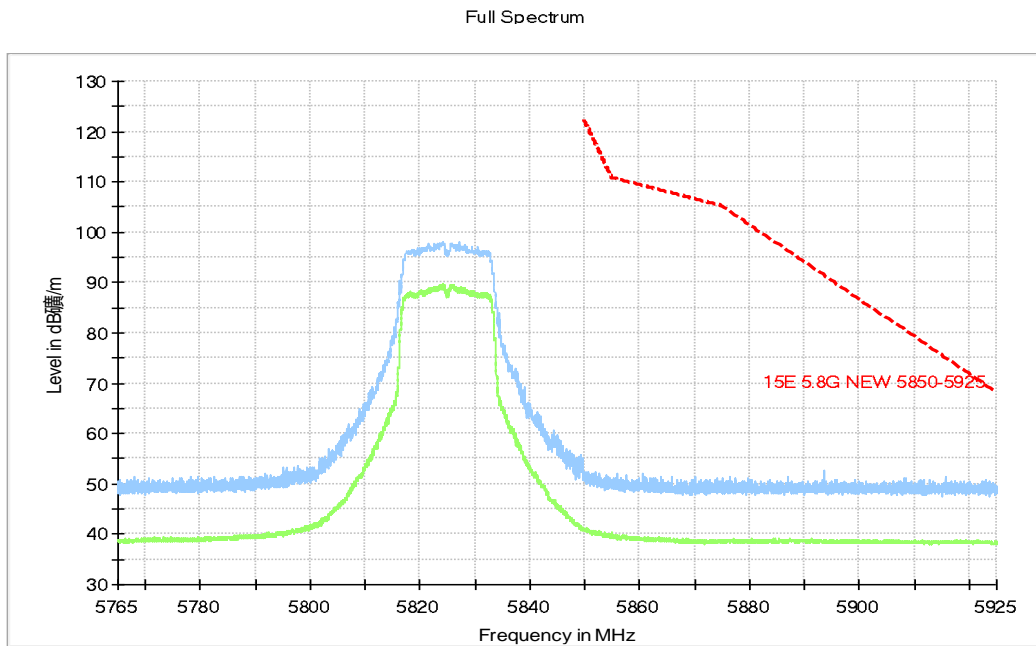


Fig. 16 Band Edges (802.11a, 5825MHz)

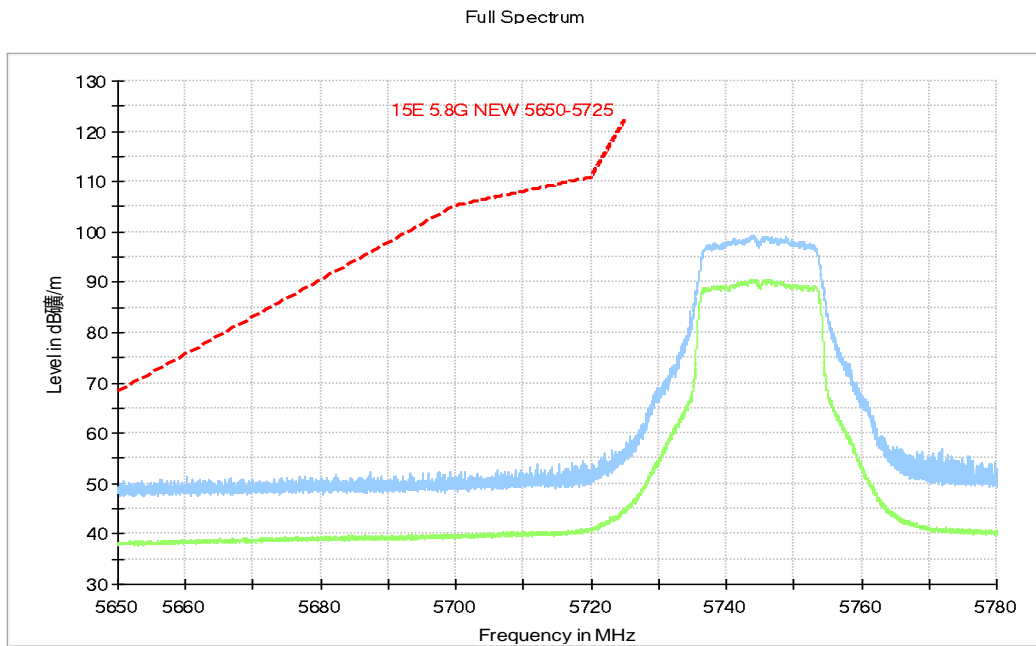


Fig. 17 Band Edges (802.11n-HT20, 5745MHz)

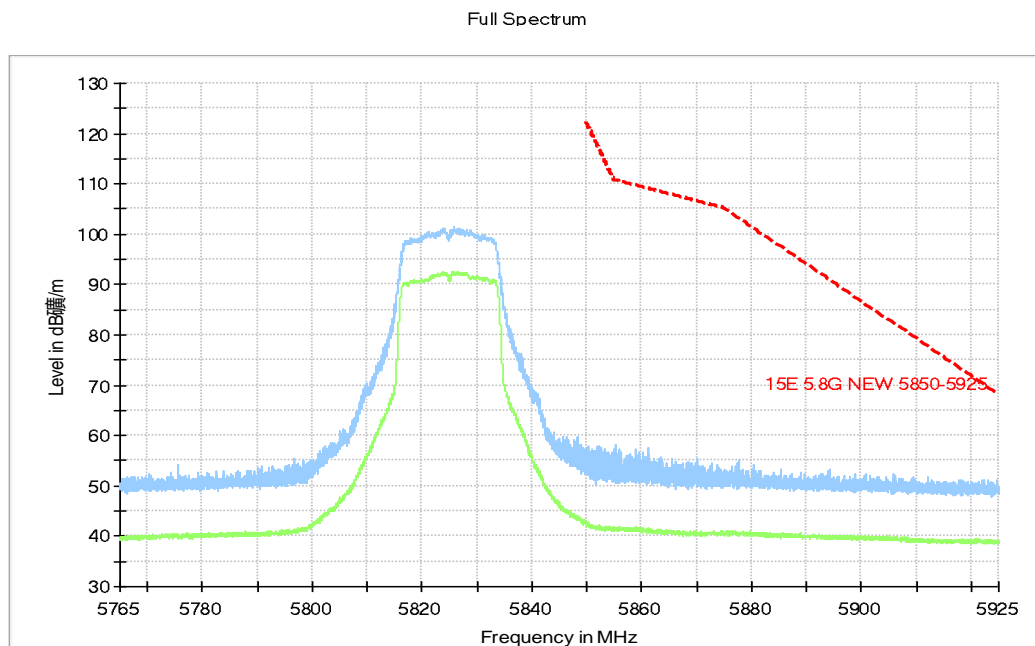


Fig. 18 Band Edges (802.11n-HT20, 5825MHz)

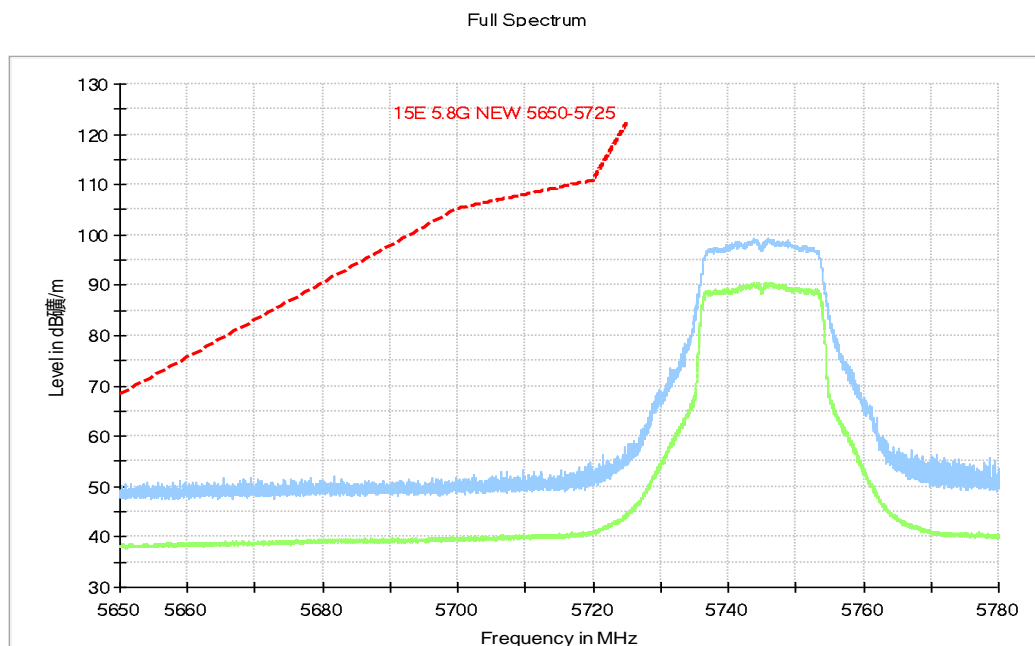


Fig. 19 Band Edges (802.11ac-HT20, 5745MHz)

Full Spectrum

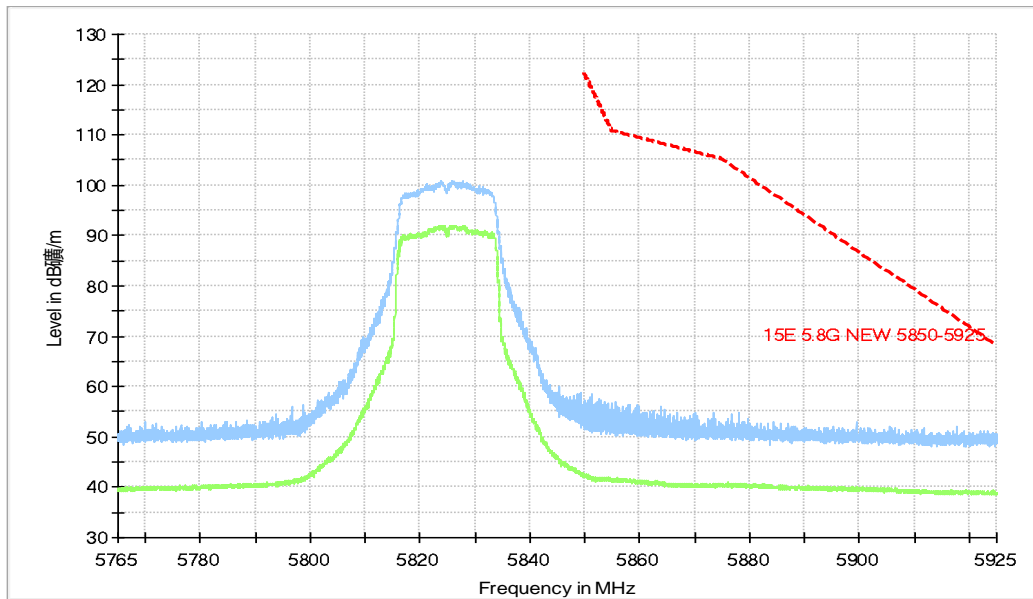


Fig. 20 Band Edges (802.11ac-HT20, 5825MHz)

Full Spectrum

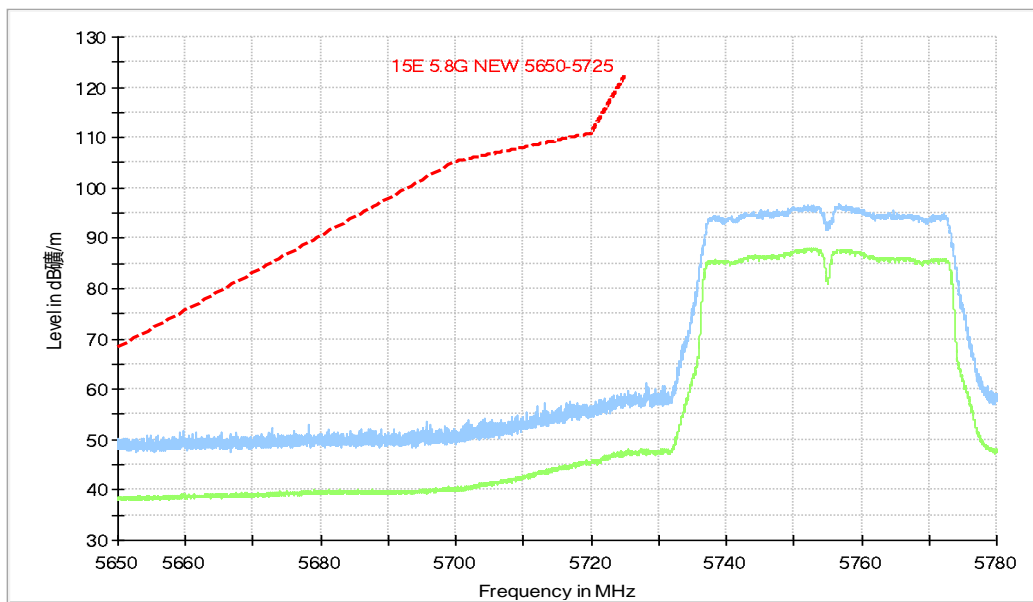


Fig. 21 Band Edges (802.11n-HT40, 5755MHz)

Full Spectrum

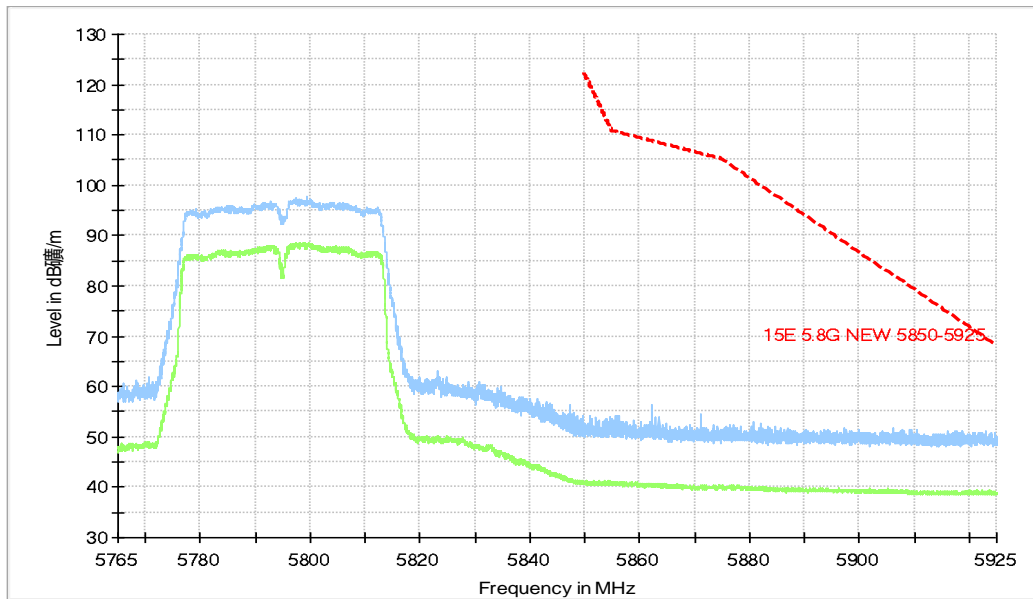


Fig. 22 Band Edges (802.11n-HT40, 5795MHz)

Full Spectrum

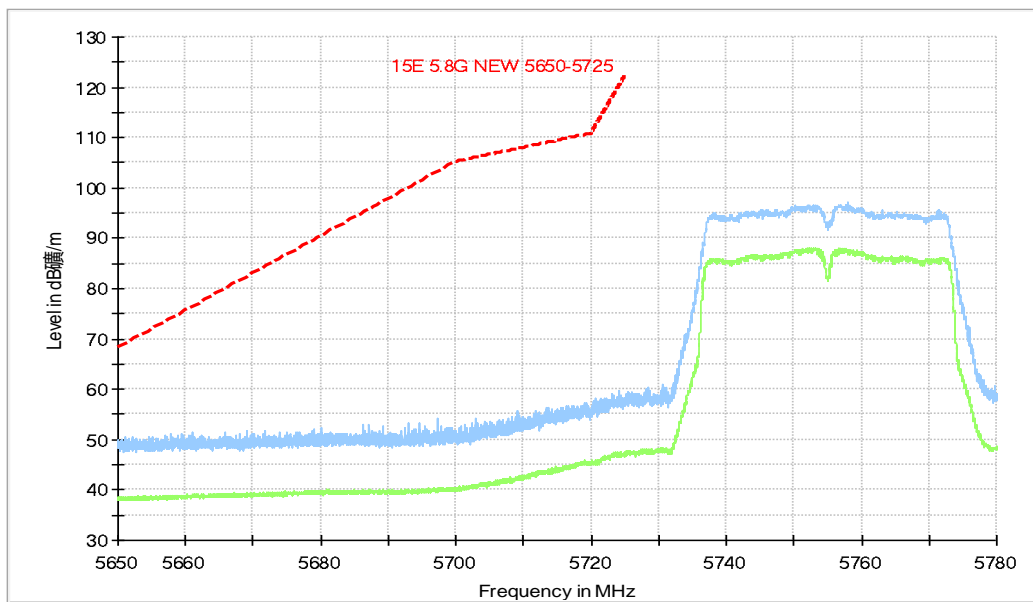


Fig. 23 Band Edges (802.11ac-HT40, 5755MHz)

Full Spectrum

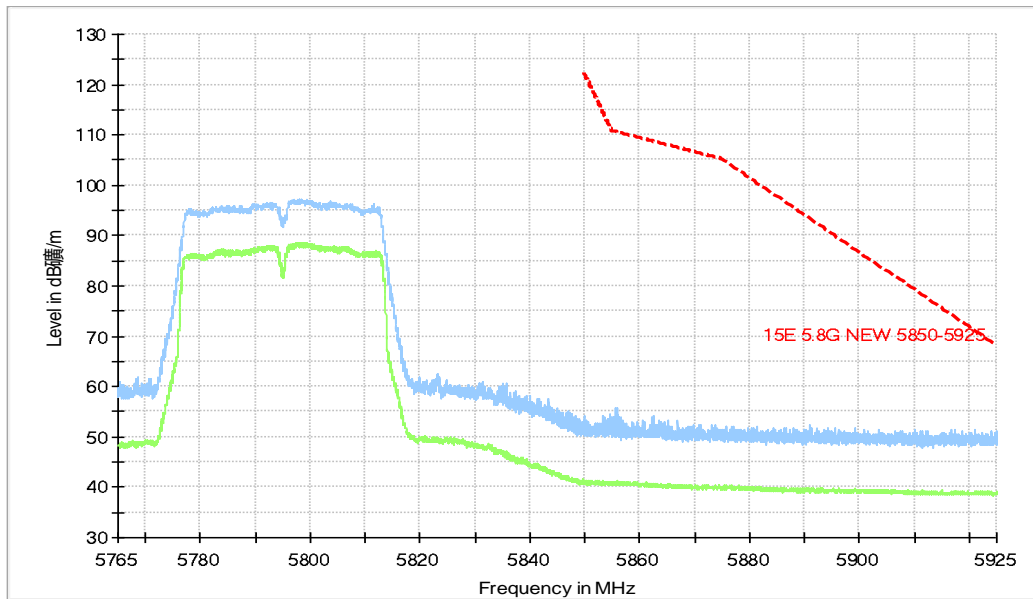


Fig. 24 Band Edges (802.11ac-HT40, 5795MHz)

Full Spectrum

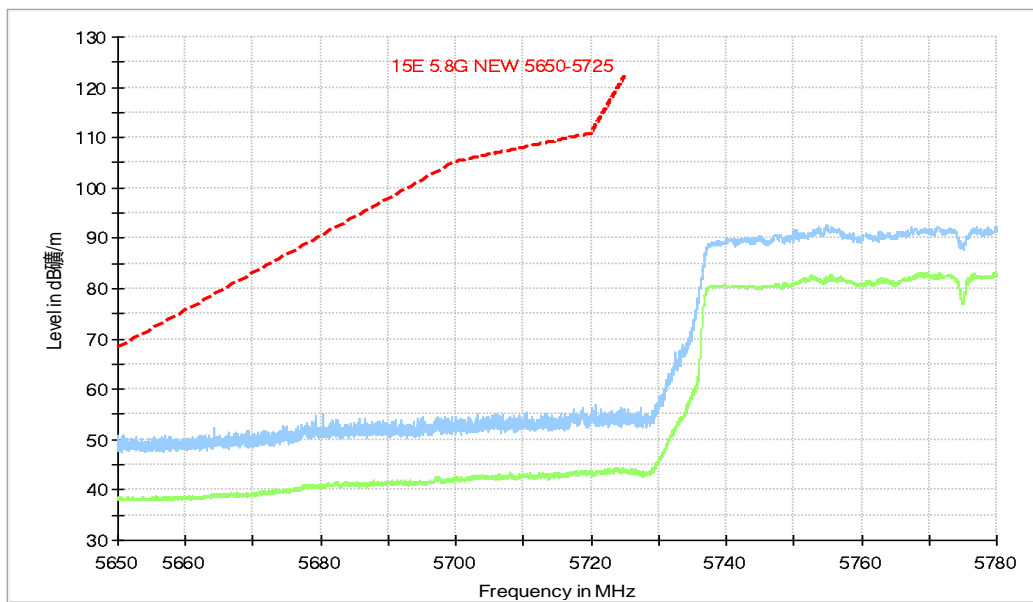


Fig. 25 Band Edges (802.11ac-HT80, 5775MHz)

Full Spectrum

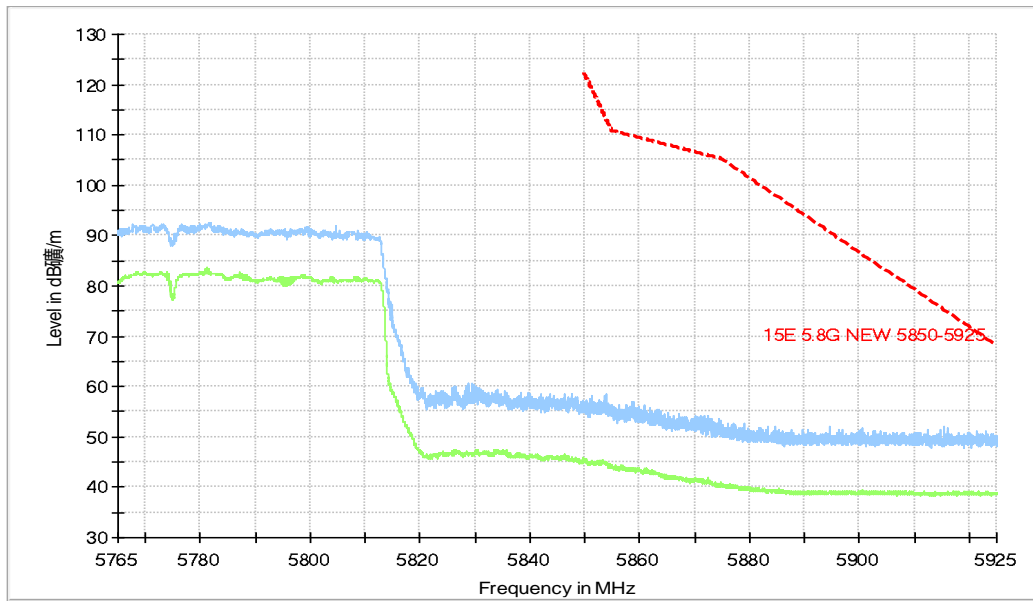


Fig. 26 Band Edges (802.11ac-HT80, 5775MHz)

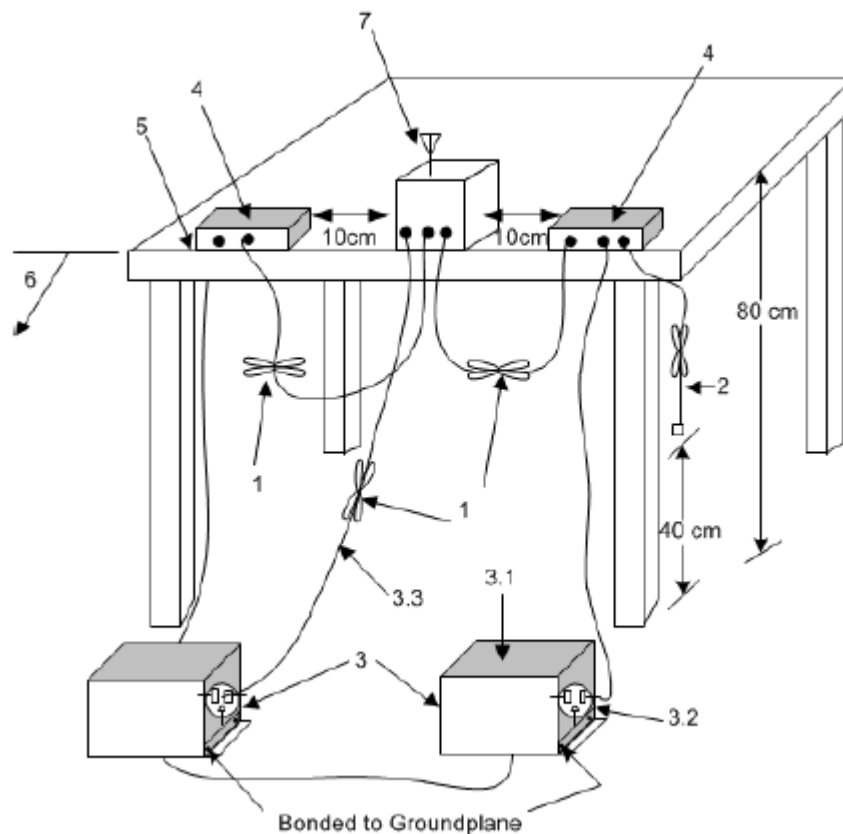
A.7. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.



Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords associated with non-EUT equipment in the overall system), the one configuration and

arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage (V)	Frequency (Hz)
--------------------	-----------------------

Measurement Result and limit:

EUT ID: EUT2(UT15a)

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger QC13US(BYD)		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig. 27	Fig. 28	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger QC13US(BYD)		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.27	Fig.28	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger QC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	67 to 56	Fig. 29	/	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger QC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.29	/	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger UC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	68 to 56	Fig. 30	/	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger UC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.30	/	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger UC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	69 to 56	Fig. 31	/	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger UC13US(PUAN)		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.31	/	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

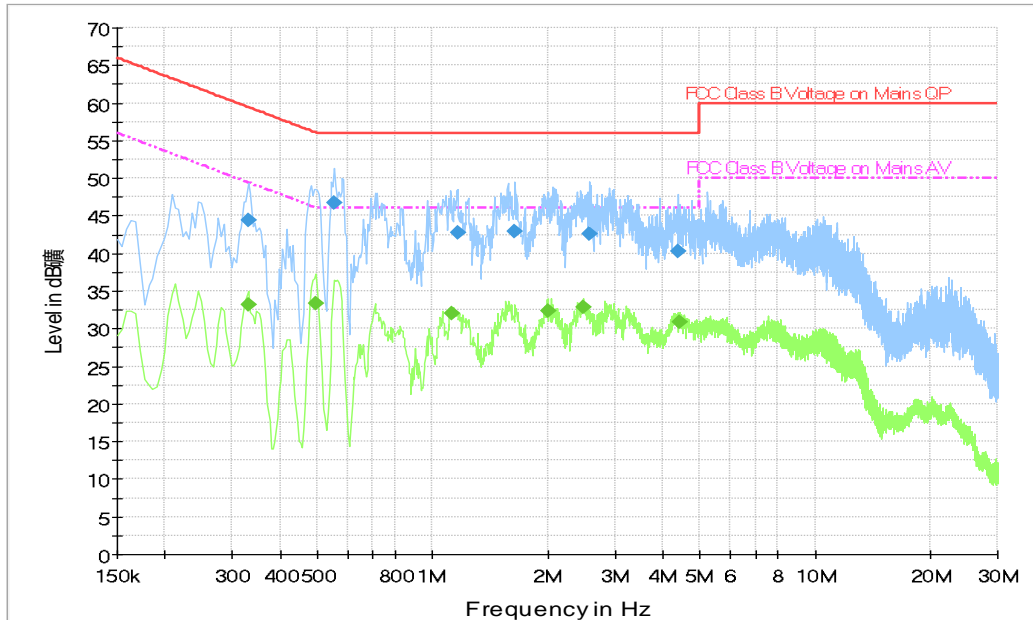


Fig. 27 AC Powerline Conducted Emission-802.11a, charger QC13US(BYD)

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.330000	44.5	L1	19.6	15.0	59.5
0.555000	46.7	L1	19.6	9.3	56.0
1.162500	42.7	L1	19.6	13.3	56.0
1.644000	42.9	L1	19.6	13.1	56.0
2.575500	42.6	L1	19.6	13.4	56.0
4.393500	40.3	L1	19.8	15.7	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.330000	33.1	L1	19.6	16.3	49.5
0.496500	33.3	L1	19.6	12.8	46.1
1.122000	32.1	L1	19.6	13.9	46.0
1.999500	32.4	L1	19.5	13.6	46.0
2.485500	32.8	L1	19.6	13.2	46.0
4.416000	30.9	L1	19.8	15.1	46.0

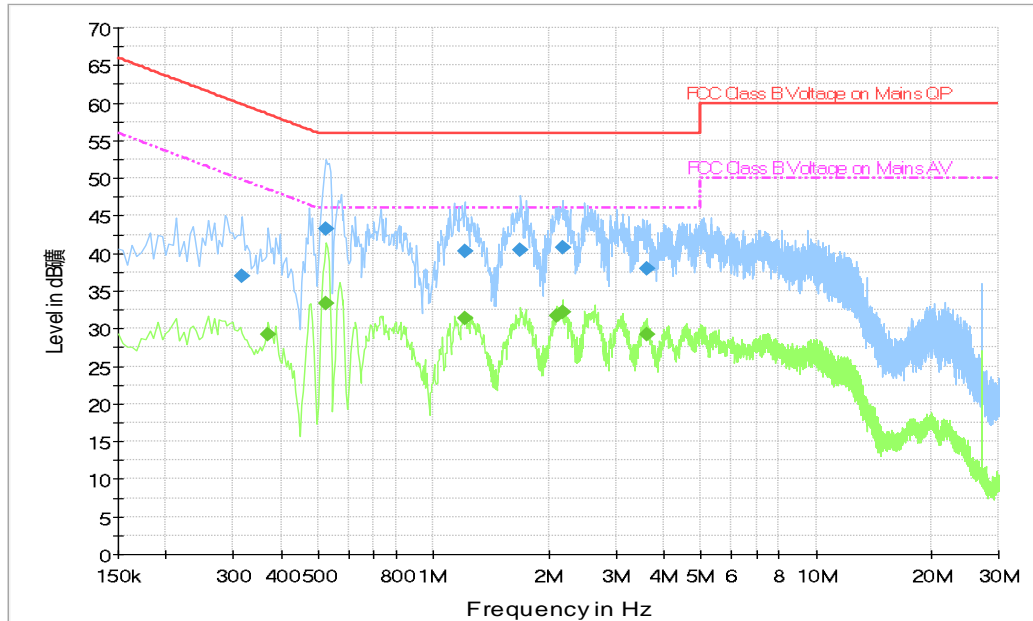


Fig. 28 AC Powerline Conducted Emission-Idle ,charger QC13US(BYD)

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.316500	36.9	L1	19.6	22.9	59.8
0.523500	43.3	L1	19.6	12.7	56.0
1.207500	40.3	L1	19.6	15.7	56.0
1.689000	40.4	L1	19.6	15.6	56.0
2.179500	40.7	L1	19.6	15.3	56.0
3.619500	37.9	L1	19.7	18.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.370500	29.2	L1	19.6	19.3	48.5
0.523500	33.3	L1	19.6	12.7	46.0
1.207500	31.4	L1	19.6	14.6	46.0
2.107500	31.7	L1	19.5	14.3	46.0
2.179500	32.2	L1	19.6	13.8	46.0
3.615000	29.2	L1	19.7	16.8	46.0

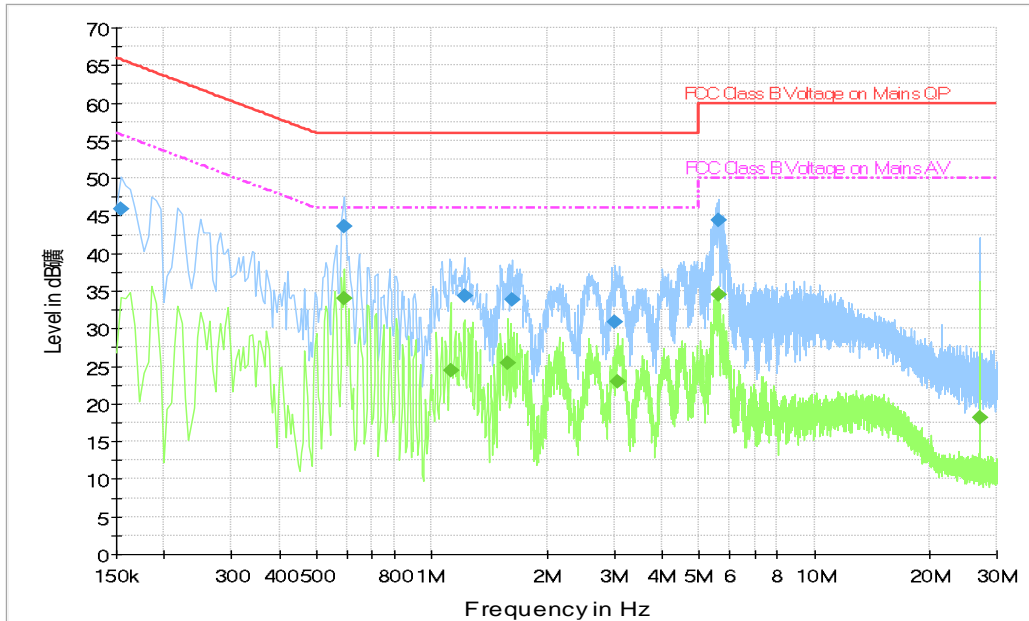


Fig. 29 AC Powerline Conducted Emission-802.11a, charger QC13US(PUAN)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	45.9	L1	19.7	19.8	65.8
0.591000	43.5	L1	19.6	12.5	56.0
1.216500	34.4	L1	19.6	21.6	56.0
1.626000	33.8	L1	19.6	22.2	56.0
3.021000	30.9	L1	19.6	25.1	56.0
5.635500	44.4	L1	19.8	15.6	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.591000	34.1	L1	19.6	11.9	46.0
1.122000	24.5	N	19.6	21.5	46.0
1.585500	25.5	N	19.6	20.5	46.0
3.057000	23.0	N	19.6	23.0	46.0
5.635500	34.6	L1	19.8	15.4	50.0
27.118500	18.1	L1	20.2	31.9	50.0

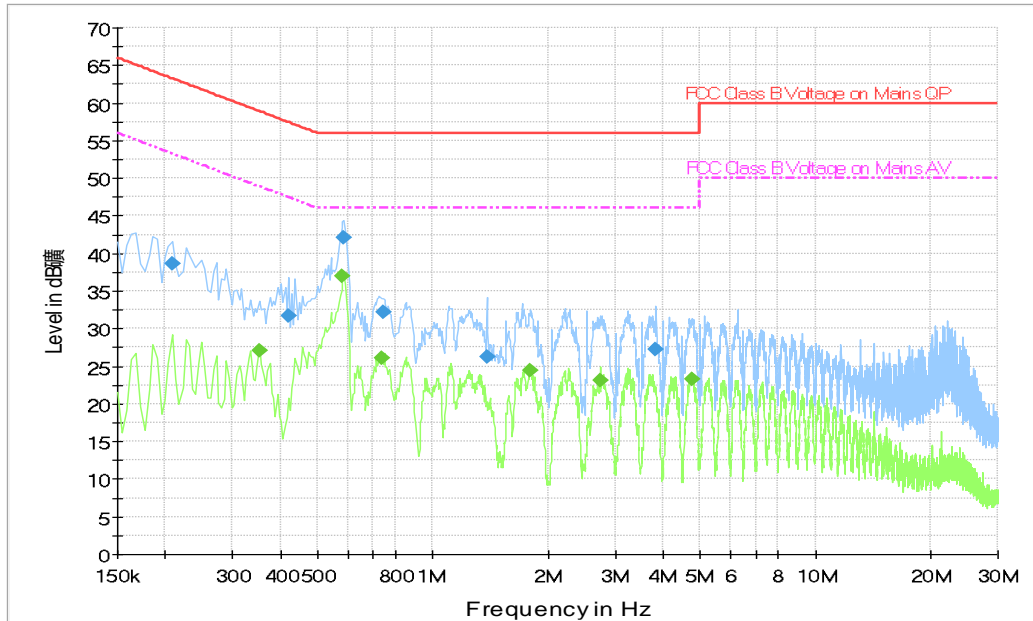


Fig. 30 AC Powerline Conducted Emission-802.11a, charger UC13US(PUAN)

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.208500	38.6	L1	19.6	24.7	63.3
0.420000	31.7	L1	19.6	25.7	57.4
0.586500	42.2	L1	19.6	13.8	56.0
0.744000	32.1	L1	19.6	23.9	56.0
1.387500	26.2	L1	19.6	29.8	56.0
3.835500	27.3	L1	19.7	28.7	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.352500	27.1	L1	19.6	21.8	48.9
0.582000	37.1	L1	19.6	8.9	46.0
0.739500	26.0	L1	19.6	20.0	46.0
1.801500	24.4	L1	19.5	21.6	46.0
2.746500	23.2	L1	19.6	22.8	46.0
4.749000	23.3	L1	19.8	22.7	46.0

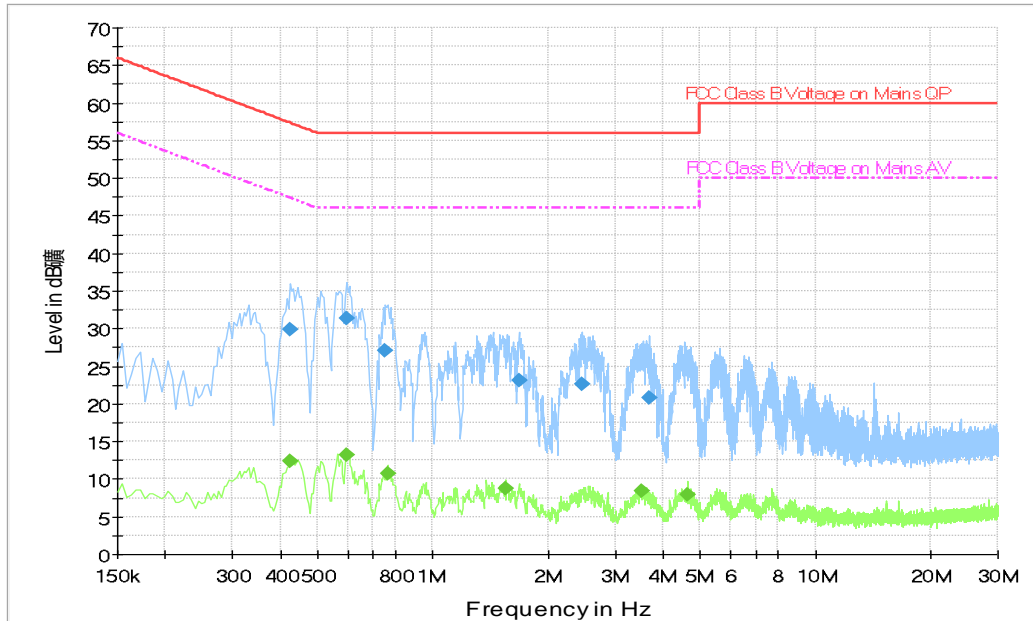


Fig. 31 AC Powerline Conducted Emission-802.11a, charger UC13US(Chen Yang)

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.424500	29.9	L1	19.6	27.5	57.4
0.595500	31.4	L1	19.6	24.6	56.0
0.753000	27.1	L1	19.6	28.9	56.0
1.680000	23.0	L1	19.6	33.0	56.0
2.454000	22.6	L1	19.6	33.4	56.0
3.678000	20.8	L1	19.7	35.2	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.424500	12.3	L1	19.6	35.0	47.4
0.595500	13.3	L1	19.6	32.7	46.0
0.762000	10.7	L1	19.6	35.3	46.0
1.549500	8.7	L1	19.6	37.3	46.0
3.516000	8.3	L1	19.7	37.7	46.0
4.654500	7.9	L1	19.8	38.1	46.0

ANNEX B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 2em; font-weight: bold; letter-spacing: 0.5em;">NVLAP[®]</div><div style="text-align: center;"> ilac-MRA</div></div> <hr/> <p style="font-size: 1.2em; font-weight: bold;">Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>	<div style="display: flex; align-items: center; justify-content: center;"><div style="text-align: center;"> DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</div><div style="margin-left: 20px;"> _____ <i>For the National Voluntary Laboratory Accreditation Program</i></div></div>

*** END OF REPORT BODY ***