



LTE band 13: 30MHz – 7.87GHz

NOTE: peak above the limit line is the carrier frequency.

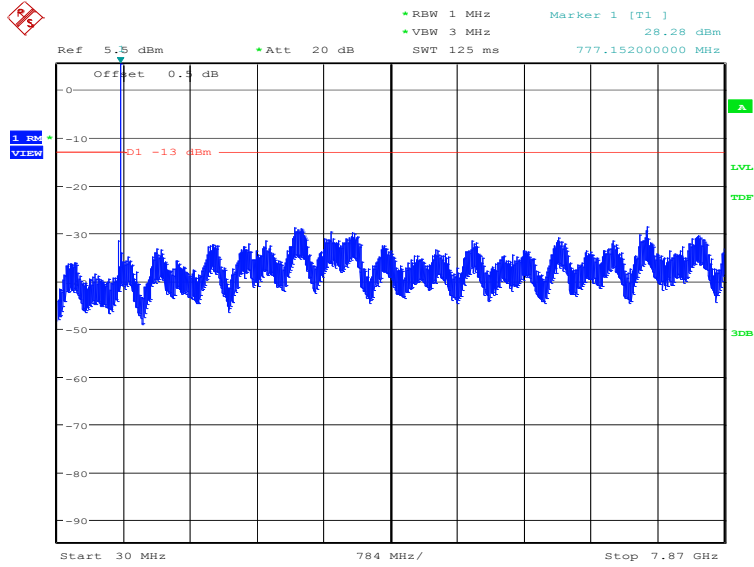

Date: 14.JAN.2021 12:05:48


LTE band 13: 1559MHz – 1610MHz

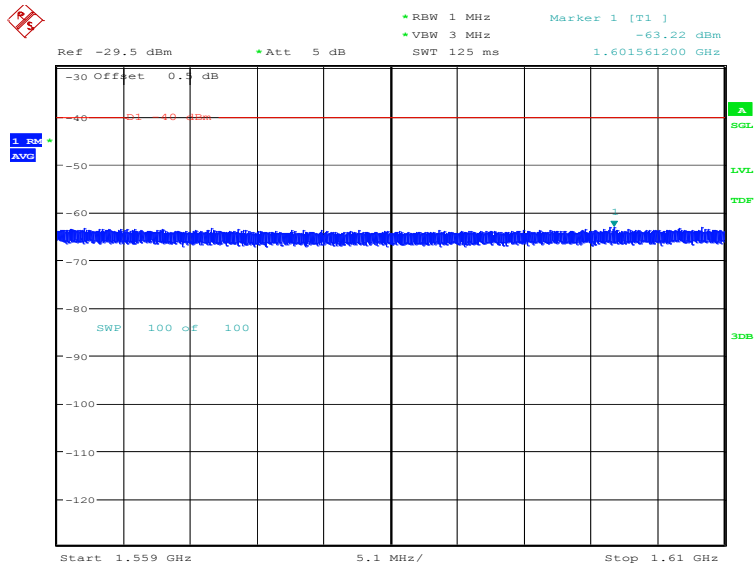

Date: 14.JAN.2021 12:06:16

LTE band 25: 30MHz – 19.15GHz


NOTE: peak above the limit line is the carrier frequency.

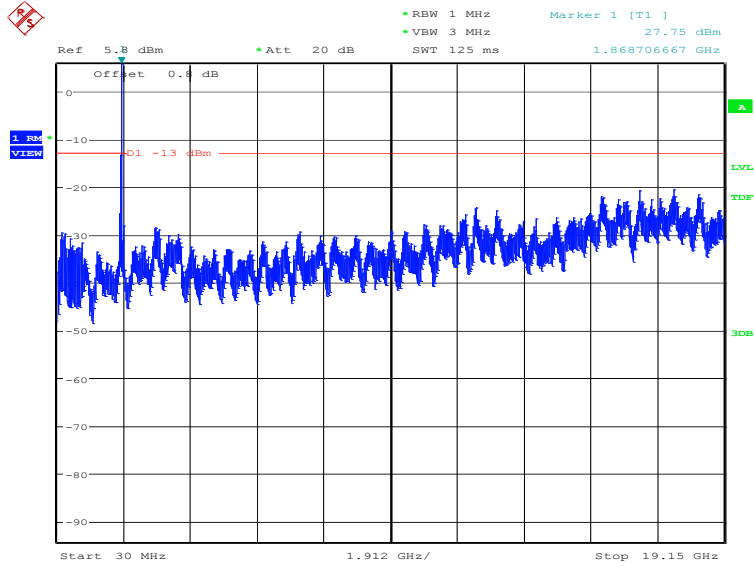

Date: 14.JAN.2021 12:07:00

LTE band 26(814MHz~824MHz): 30MHz – 8.24GHz


NOTE: peak above the limit line is the carrier frequency.

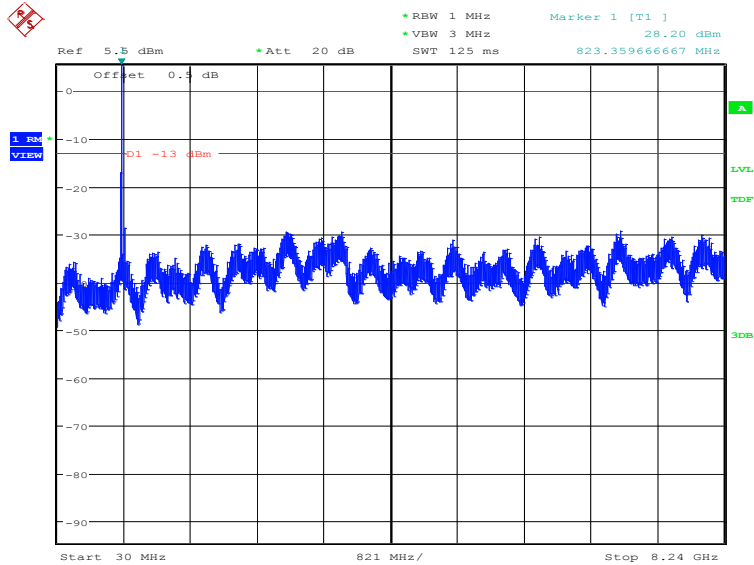

Date: 14.JAN.2021 12:09:50

LTE band 26(824MHz~849MHz): 30MHz – 8.49GHz


NOTE: peak above the limit line is the carrier frequency.

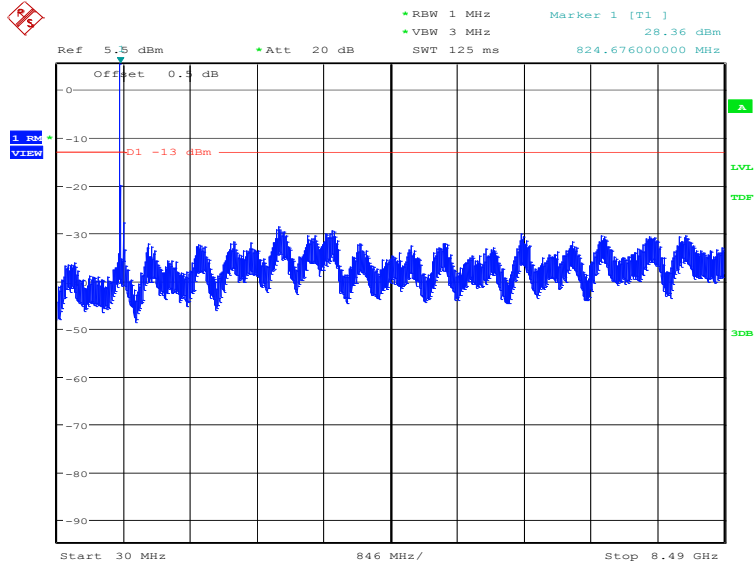

Date: 14.JAN.2021 12:08:31

LTE band 41: 30MHz – 26.5GHz


NOTE: peak above the limit line is the carrier frequency.

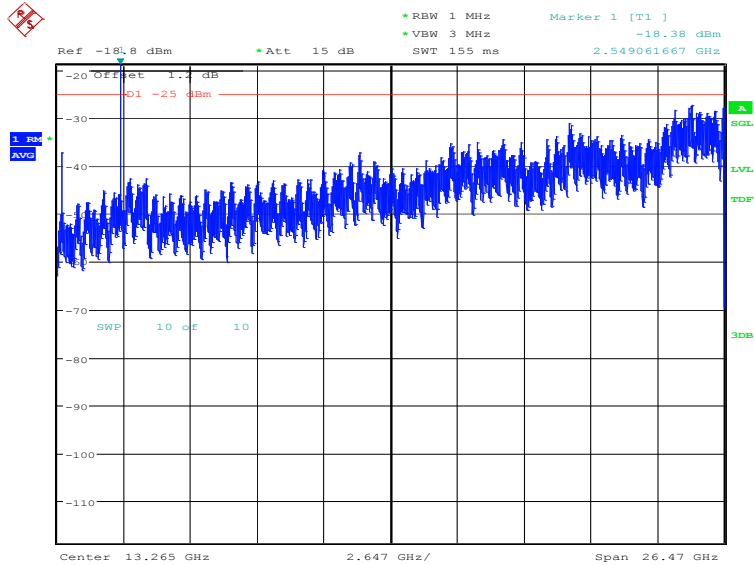

Date: 14.JAN.2021 11:17:50

LTE band 66: 30MHz – 17.8GHz


NOTE: peak above the limit line is the carrier frequency.

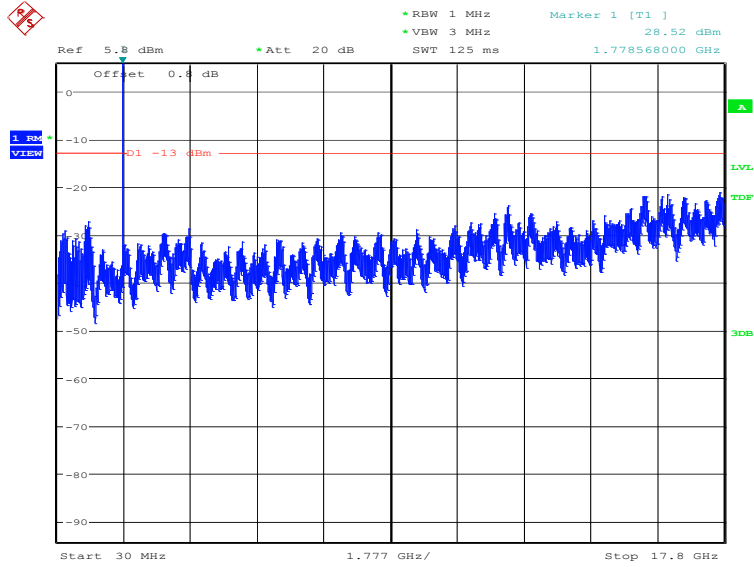

Date: 14.JAN.2021 12:11:13

LTE band 71: 30MHz – 6.98GHz

NOTE: peak above the limit line is the carrier frequency.

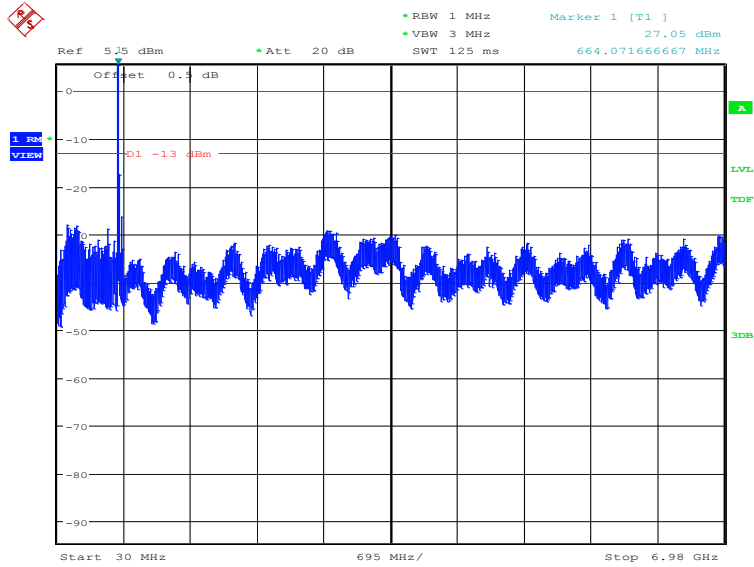

Date: 14.JAN.2021 12:03:02

A.8 Peak-to-Average Power Ratio

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

Measurement results

LTE band 7, 20MHz

Frequency (MHz)	PAPR (dB)		
2535.0	QPSK	16QAM	64QAM
	6.57	7.31	7.47

LTE band 12, 10MHz

Frequency (MHz)	PAPR (dB)		
707.5	QPSK	16QAM	64QAM
	5.19	6.22	6.54

LTE band 13, 10MHz

Frequency (MHz)	PAPR (dB)		
782.0	QPSK	16QAM	64QAM
	5.10	6.15	6.44

LTE band 25, 20MHz

Frequency (MHz)	PAPR (dB)		
1882.5	QPSK	16QAM	64QAM
	6.67	7.44	7.44

LTE band 41, 20MHz

Frequency (MHz)	PAPR (dB)		
2593.0	QPSK	16QAM	64QAM
	8.17	9.04	9.20

LTE band 66, 20MHz

Frequency (MHz)	PAPR (dB)		
1745.0	QPSK	16QAM	64QAM
	6.60	7.28	7.34

LTE band 71, 20MHz

Frequency (MHz)	PAPR (dB)		
680.5	QPSK	16QAM	64QAM
	6.51	7.28	7.40

Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2020-09-29 through 2021-09-30 <i>Effective Dates</i>	 For the National Voluntary Laboratory Accreditation Program

END OF REPORT