



**No. I20Z62110-SEM01**

**For**

**TCL Communication Ltd.  
GSM/UMTS/LTE mobile phone  
Model name: 4056W, 4056Z**

**With**

**Hardware Version: 03  
Software Version: 5FYCZZ00  
FCC ID: 2ACCJN048**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)




**Picture 1: Constituents of the sample**




**Picture 2: Left Hand Touch Cheek Position**



**Picture 3: Left Hand Tilt 15° Position**

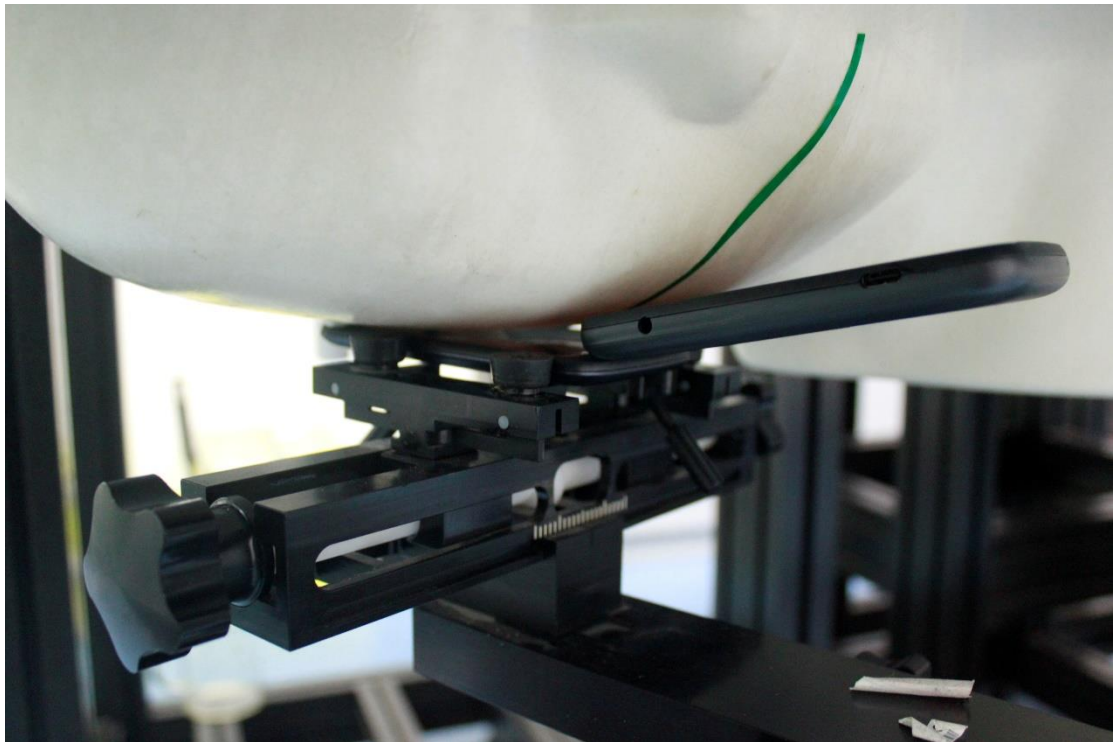

**Picture 4: Right Hand Touch Cheek Position**

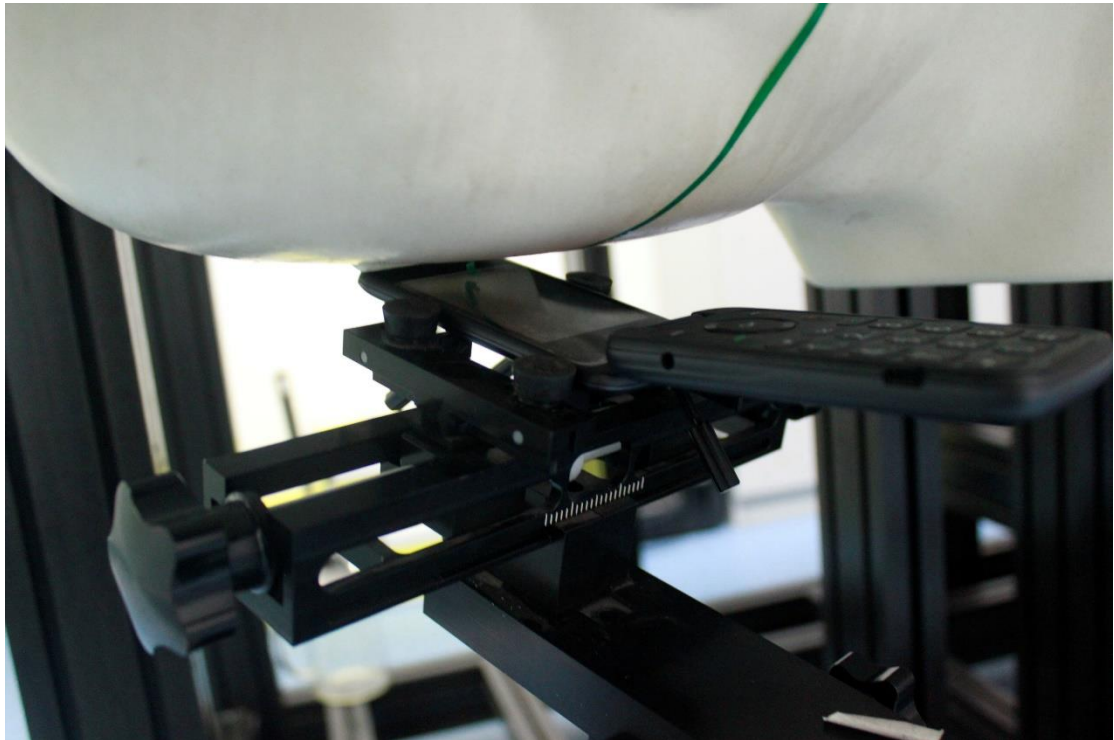


**Picture 5: Right Hand Tilt 15° Position**

**Test positions for body:**


The Body SAR is tested at the following 6 test positions all with the distance =10/15mm between the EUT and the phantom bottom:




**Picture 6: Front 10mm**

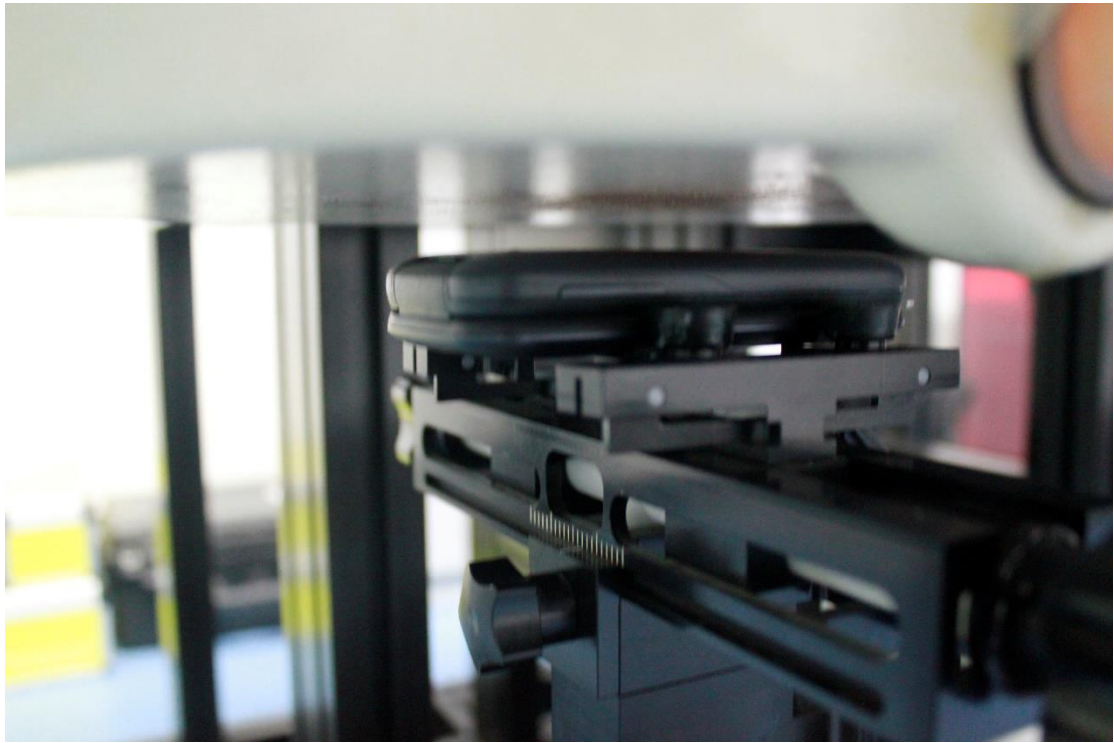

**Picture 7: Rear 10mm**

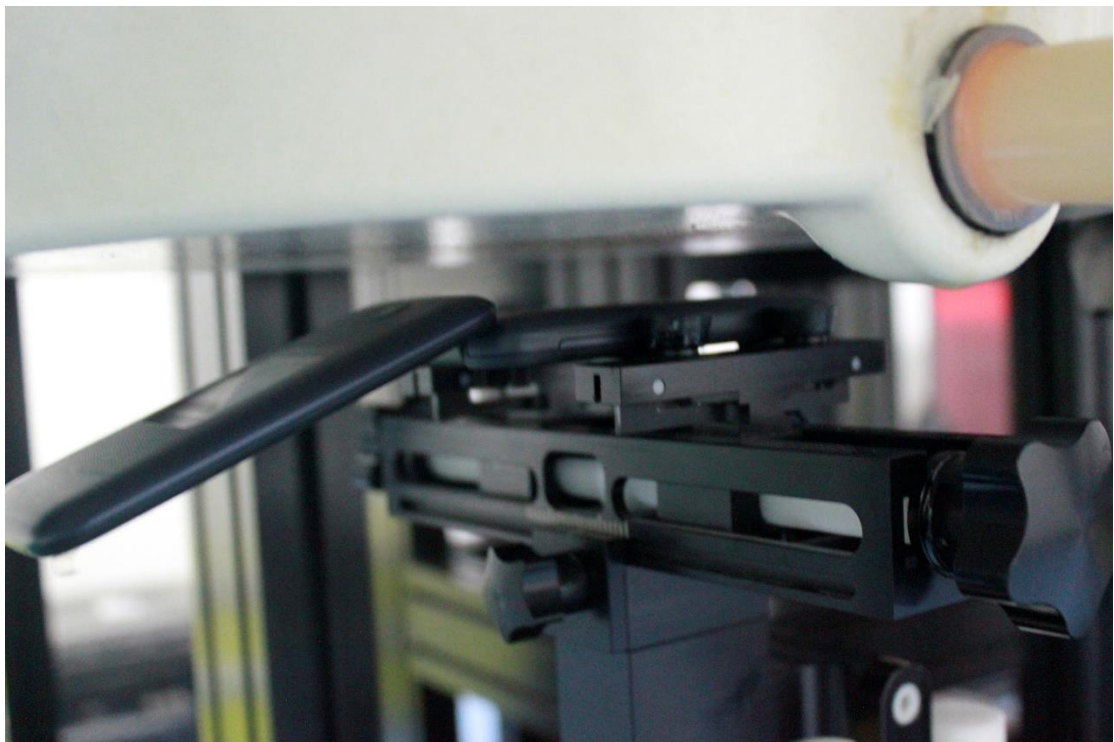

**Picture 8: Rear unfold 10mm**

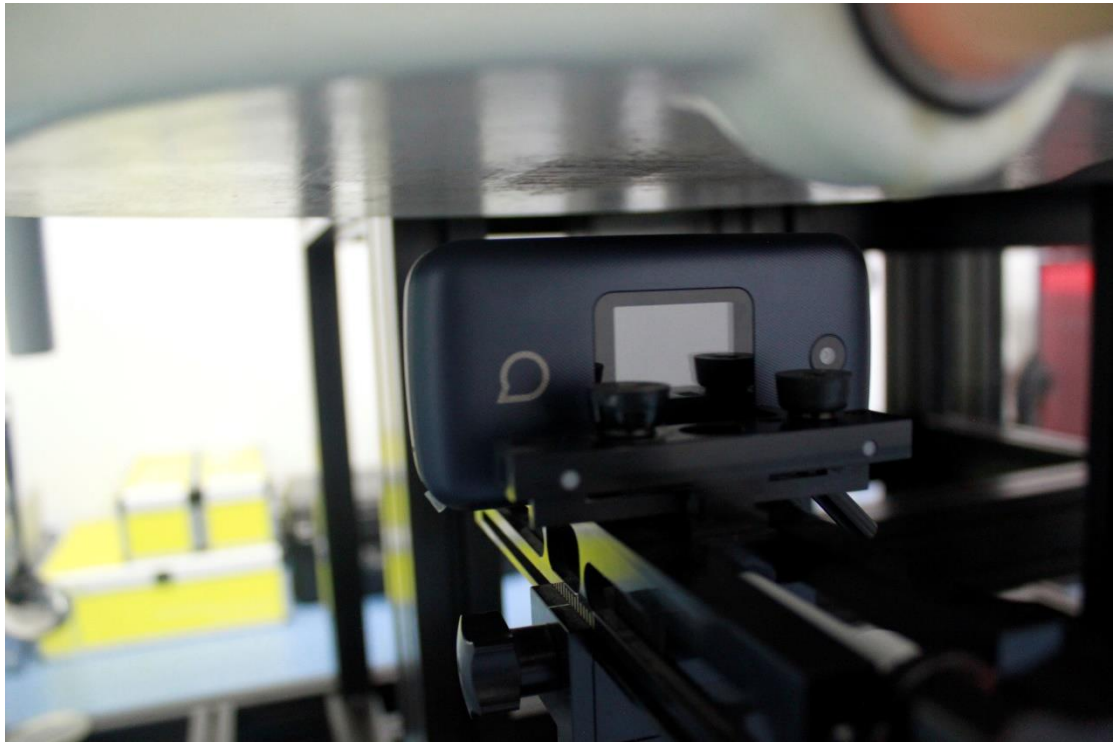


**Picture 9: Left 10mm**



**Picture 10: Right 10mm**




**Picture 11: Top 10mm**

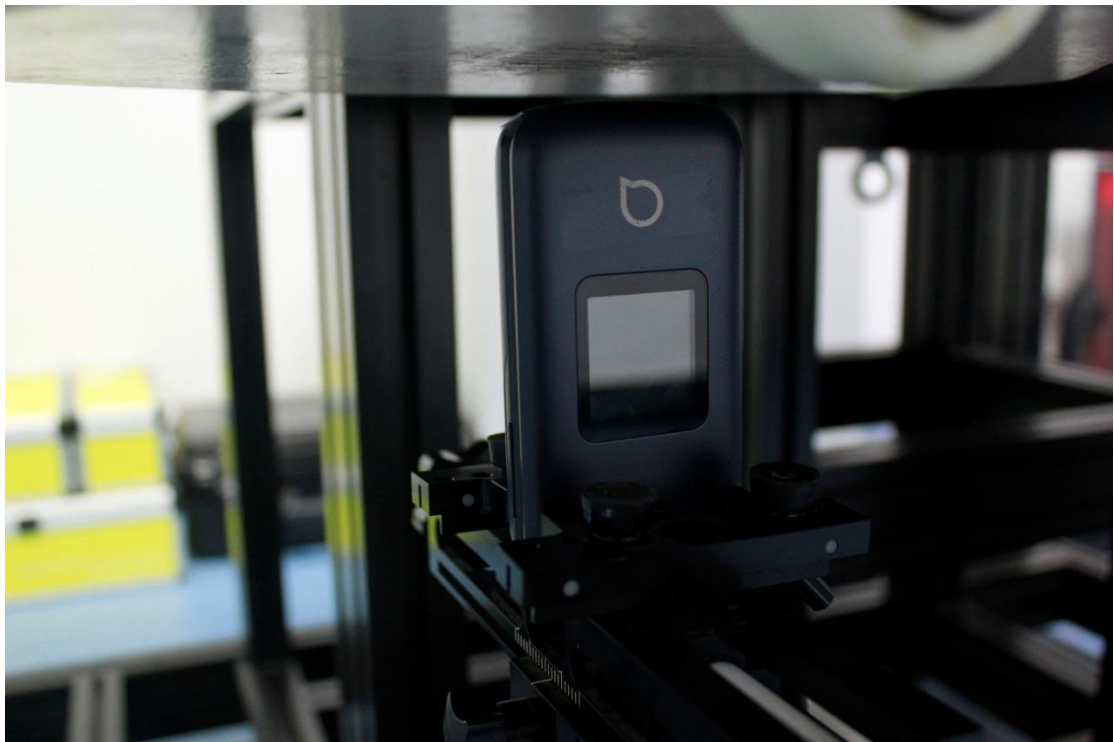

**Picture 12: Bottom 10mm**




**Picture 13: Front 15mm**

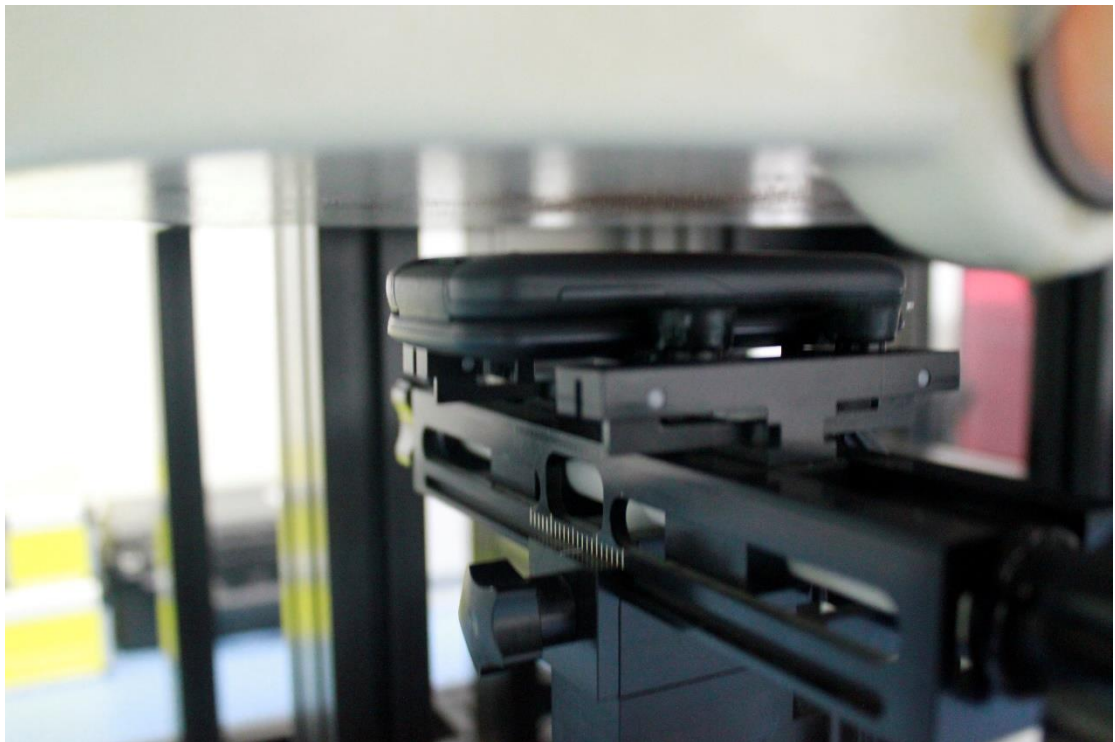

**Picture 14: Rear 15mm**




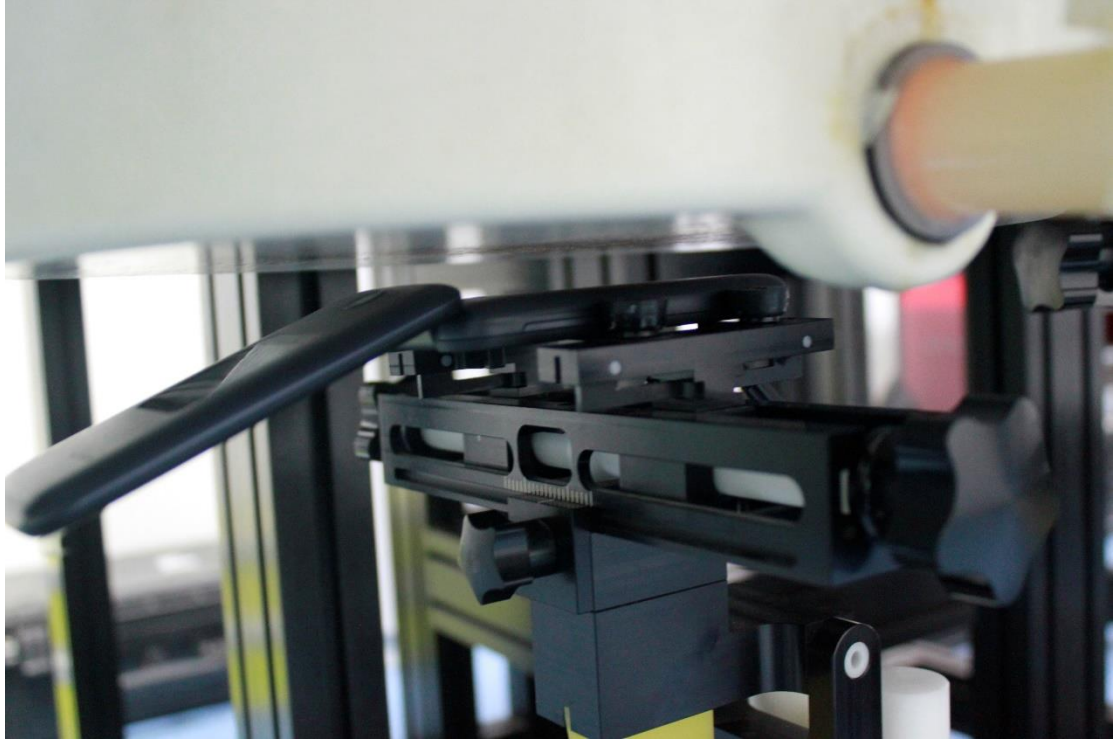

**Picture 15: Rear unfold 15mm**



**Picture 16: Rear 10mm with Headset**

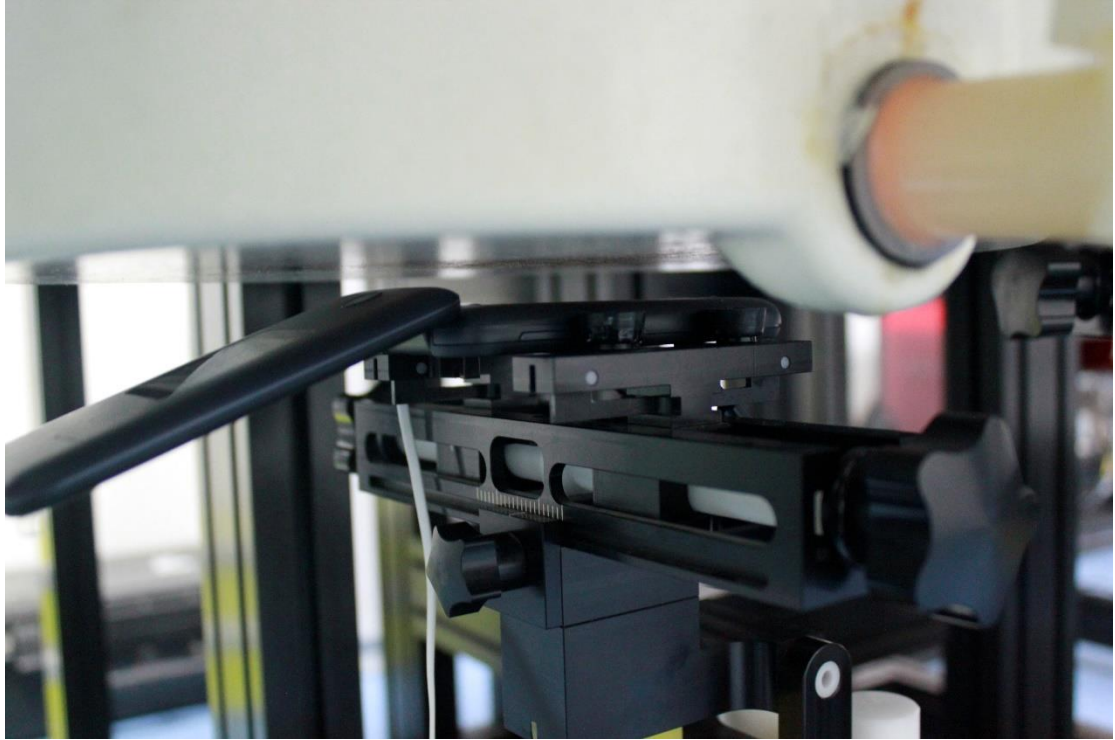

**Picture 17: Rear unfold 10mm with Headset**



**Picture 18: Rear 15mm with Headset**