



FCC PART 15C TEST REPORT No. I21Z61482-IOT01

for

TCL Communication Ltd.

5G NR/ LTE/WCDMA/GSM Mobile Phone

T781S,T781SPP

FCC ID : 2ACCJN056

with

Hardware Version: 03

Software Version: 3D4Y

Issued Date: 2021-09-24

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21Z61482-IOT01	Rev.0	1st edition	2021-09-24
I21Z61482-IOT01	Rev.1	page 30,add the table of 802.11n-HT40 mode	2021-10-15

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION.....	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	8
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. TEST RESULTS	9
5.1. SUMMARY OF TEST RESULTS.....	9
5.2. STATEMENTS.....	9
5.3. TEST CONDITIONS	9
6. TEST FACILITIES UTILIZED	10
7. MEASUREMENT UNCERTAINTY	11
7.1. MAXIMUM OUTPUT POWER.....	11
7.2. PEAK POWER SPECTRAL DENSITY	11
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	11
7.4. BAND EDGES COMPLIANCE	11
7.5. TRANSMITTER SPURIOUS EMISSION	11
7.6. AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: DETAILED TEST RESULTS.....	12
A.1. MEASUREMENT METHOD.....	12
A.2. MAXIMUM OUTPUT POWER.....	13
A.2.1. PEAK OUTPUT POWER-CONDUCTED	13
A.3. PEAK POWER SPECTRAL DENSITY.....	16



A.5. BAND EDGES COMPLIANCE 29

A.6. TRANSMITTER SPURIOUS EMISSION 35

 A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED 35

 A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED 49

A.7. AC POWER-LINE CONDUCTED EMISSION 61

ANNEX B: ACCREDITATION CERTIFICATE..... 65

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2021-08-13

Testing End Date: 2021-09-18


1.5. Signature

封爱宇

Feng Aiyu
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Hu Xiaoyu
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: /
Postal Code: /
Country: /
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: /
Postal Code: /
Country: /
Contact: Gong Zhizhou
Telephone: 0086-755-36611722
E-mail: zhizhou.gong@tcl.com

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	5G NR/ LTE/WCDMA/GSM Mobile Phone
Model name	T781S,T781SPP
FCC ID	2ACCJN056
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	24.77dBm
Power Supply	3.85V

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT16	016048000212259	03	3D4Y
EUT1	016048000215997	03	3D4Y

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	USB Cable	/
AE3	Charger	/

AE1

Model	TLp043F1
Manufacturer	BYD
Capacity	4360 mAh
Nominal Voltage	3.85V

AE2

Model	QC13US
Manufacturer	BYD
Note	/

AE3

Model	CDA0000183C1
Manufacturer	Juwei
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of 5G NR/ LTE/WCDMA/GSM Mobile Phone with WLAN with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2018
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division	2013
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. Test Results

5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.85V
Humidity	H nom	20-75%

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-15
2	LISN	ENV216	101200	R&S	1 year	2022-05-30
3	Test Receiver	ESCI	100344	R&S	1 year	2022-02-23
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2022-02-23
2	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	1 year	2022-03-22
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-03
4	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2022-01-03

7. Measurement Uncertainty

7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

7.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.86
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.26
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

7.6. AC Power-line Conducted Emission

Measurement Uncertainty: 3.38dB, k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

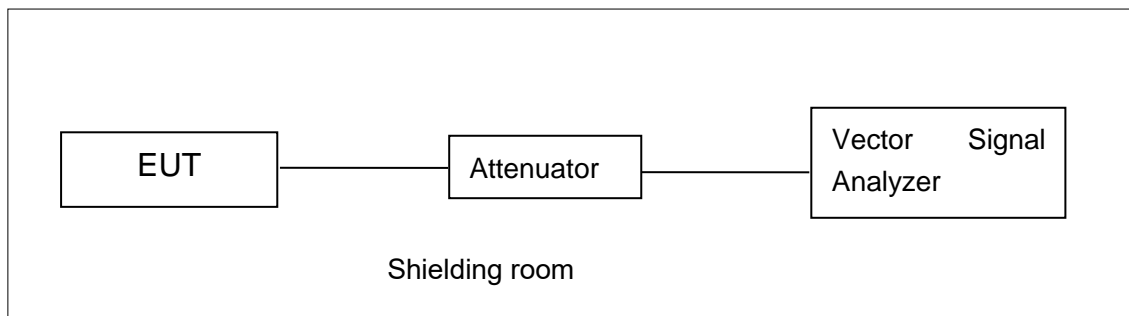


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

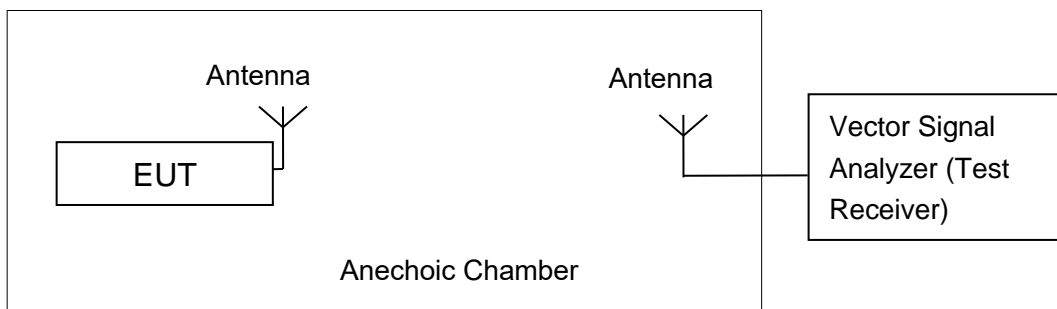


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.2

- Set the RBW = 1 MHz.
- Set the VBW = 3 MHz.
- Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector).


Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

EUT ID: EUT16

A.2.1. Peak Output Power-conducted

Measurement Results:

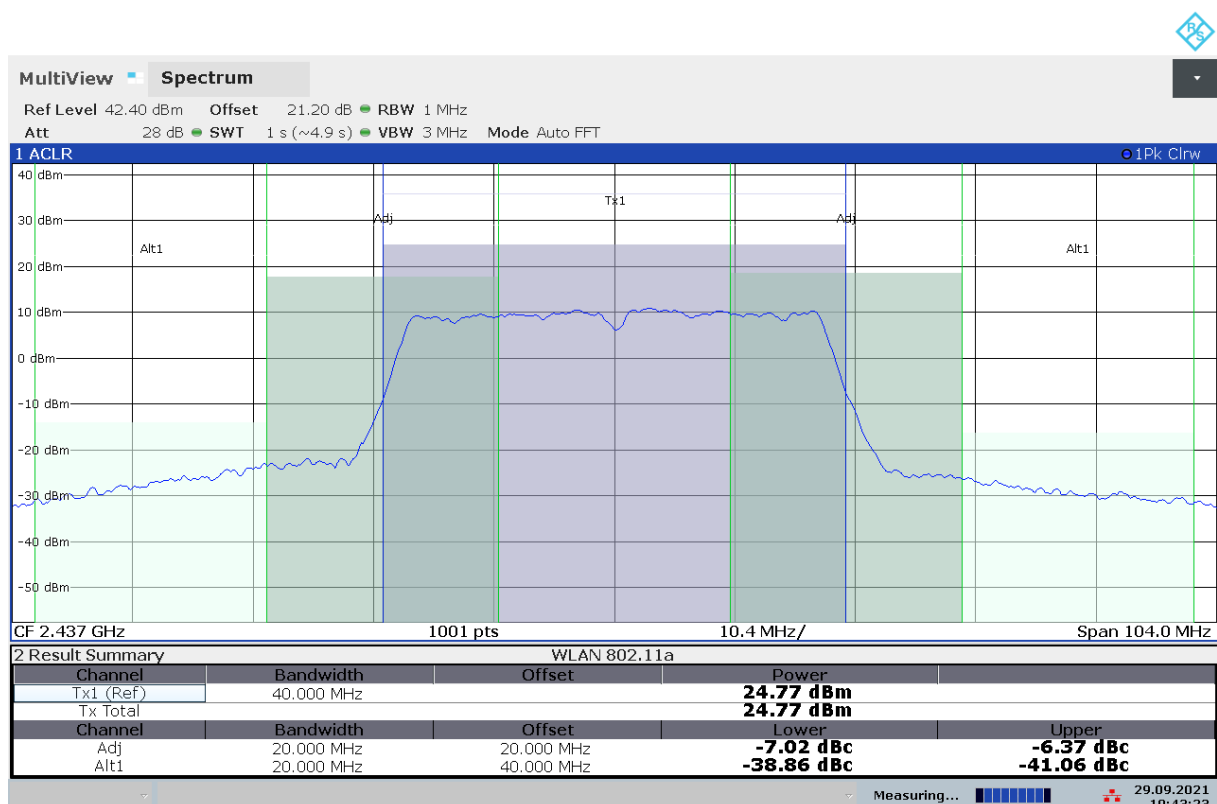

PIC. 802.11N 40MHz CH6 Power

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	21.07	21.08	21.17
	2	/	/	/
	5.5	/	/	/
	11	/	/	/
802.11g	6	23.93	23.84	23.88
	9	/	/	/
	12	/	/	/
	18	/	/	/
	24	/	/	/
	36	/	/	/
	48	/	/	/
	54	/	/	/

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	23.77	23.77	23.68
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	23.39	24.77	23.78
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/

	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Note: The duty cycle of the EUT is 100%.

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/3 kHz) ANT0
802.11b	1	-7.05
	6	-7.1
	11	-7.14
802.11g	1	-9.53
	6	-11.57
	11	-12.96
802.11n (HT20)	1	-11.92
	6	-11.42
	11	-11.64
802.11n (HT40)	3	-13.05
	6	-12.98
	9	-13.40

Conclusion: Pass

Test graphs as below:

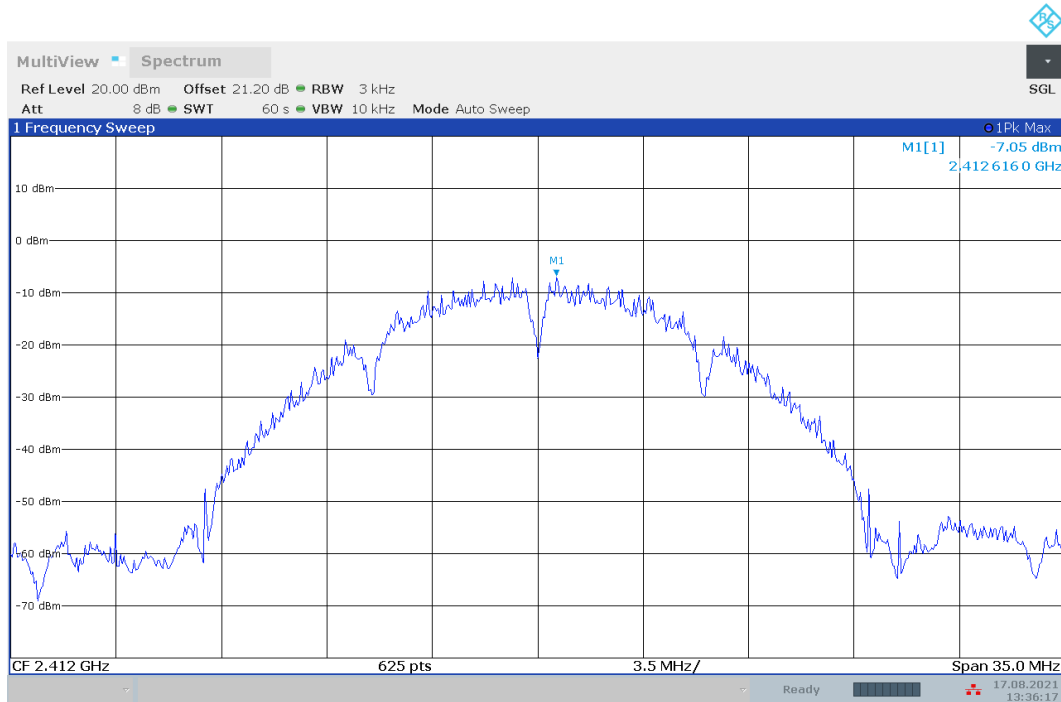


Fig.A.3.1 Power Spectral Density(802.11b,Ch1)

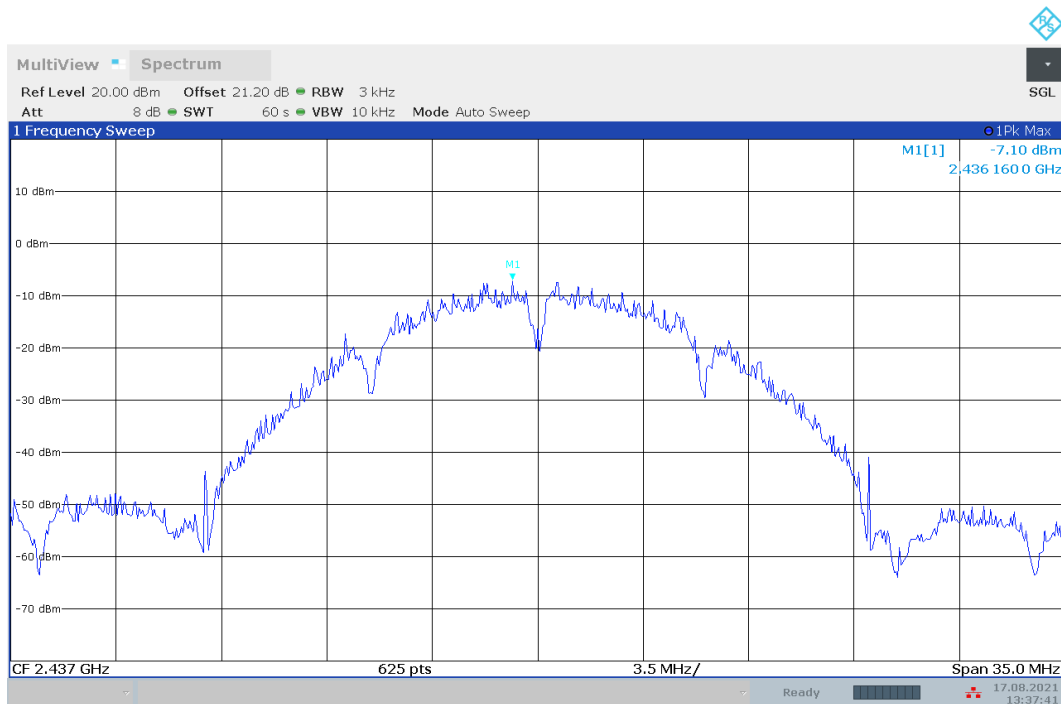


Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)

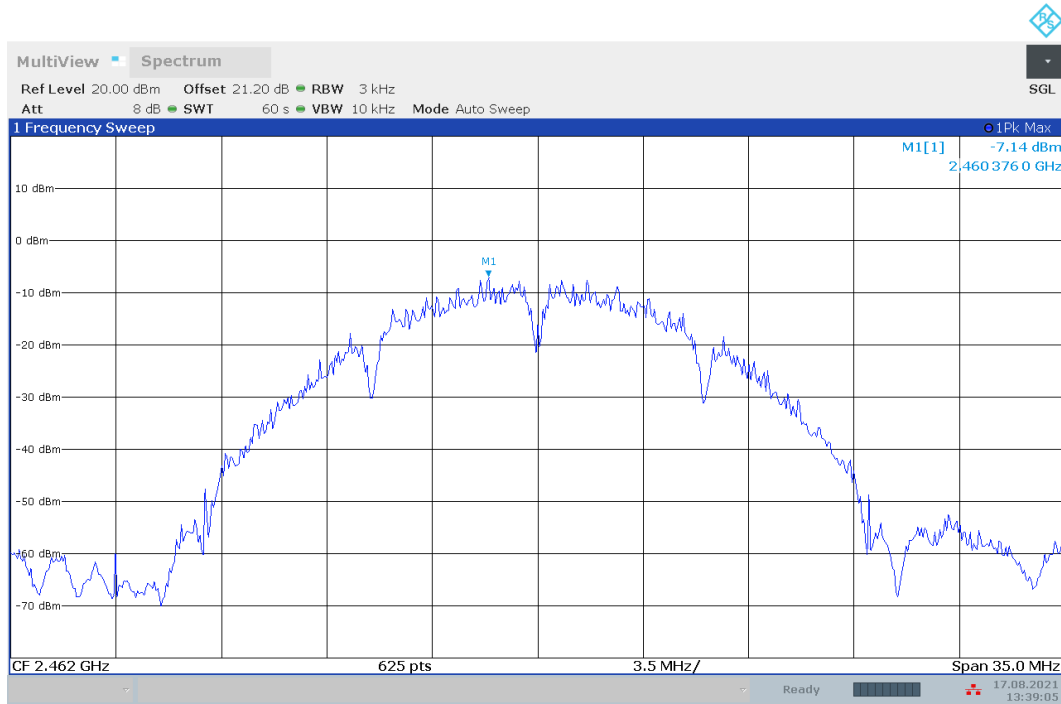


Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)

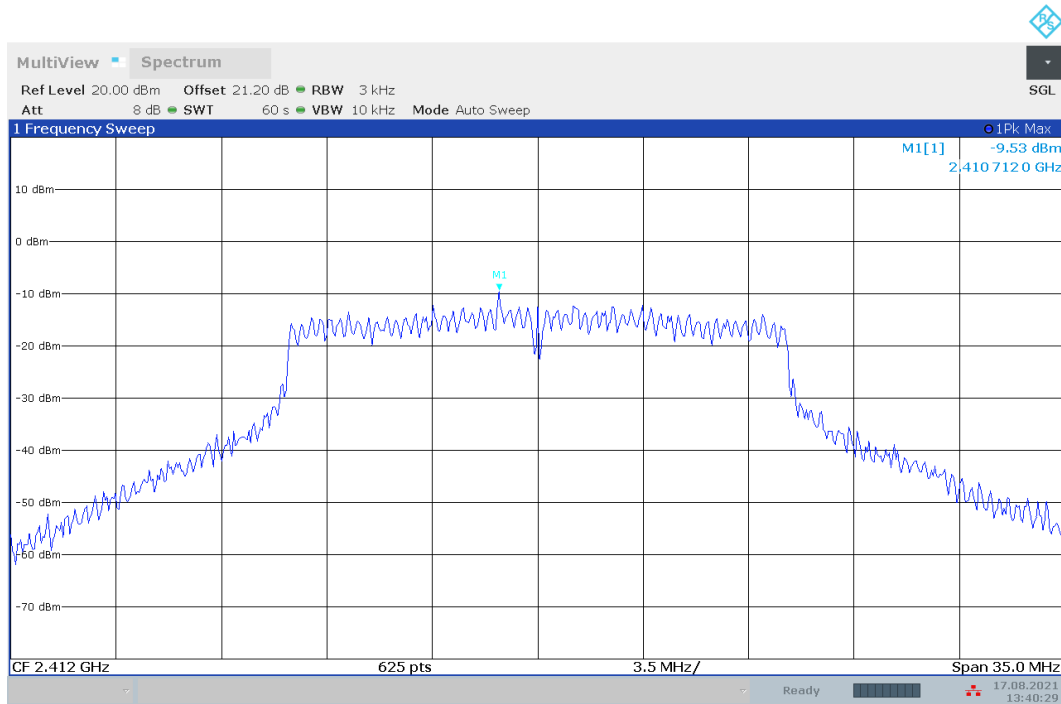


Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)

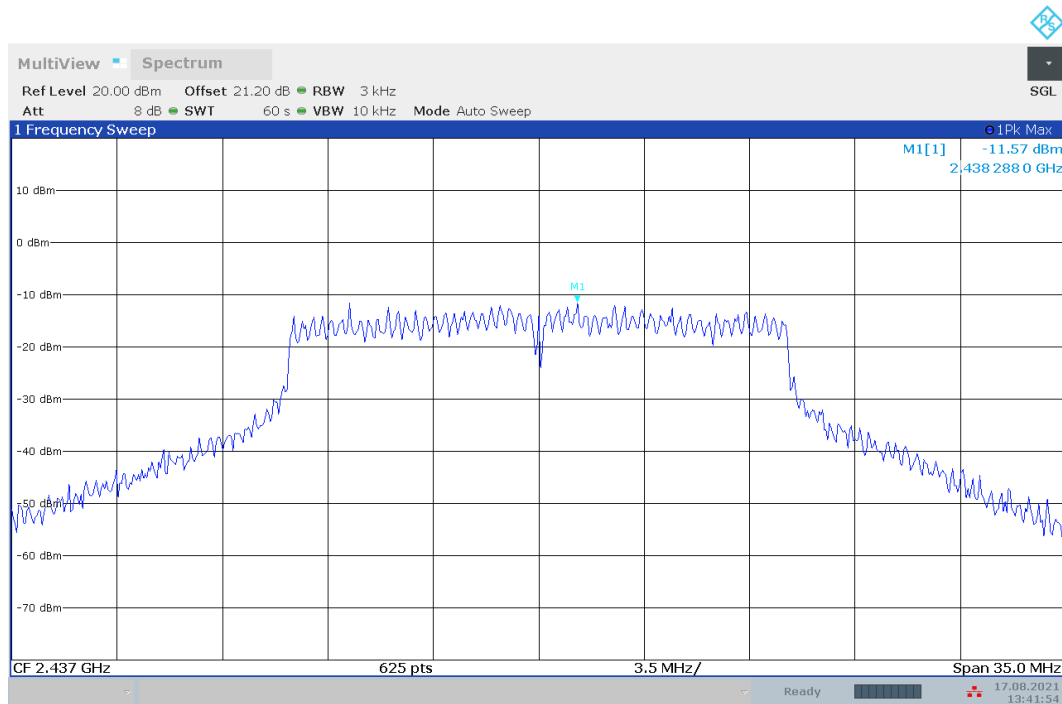


Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)

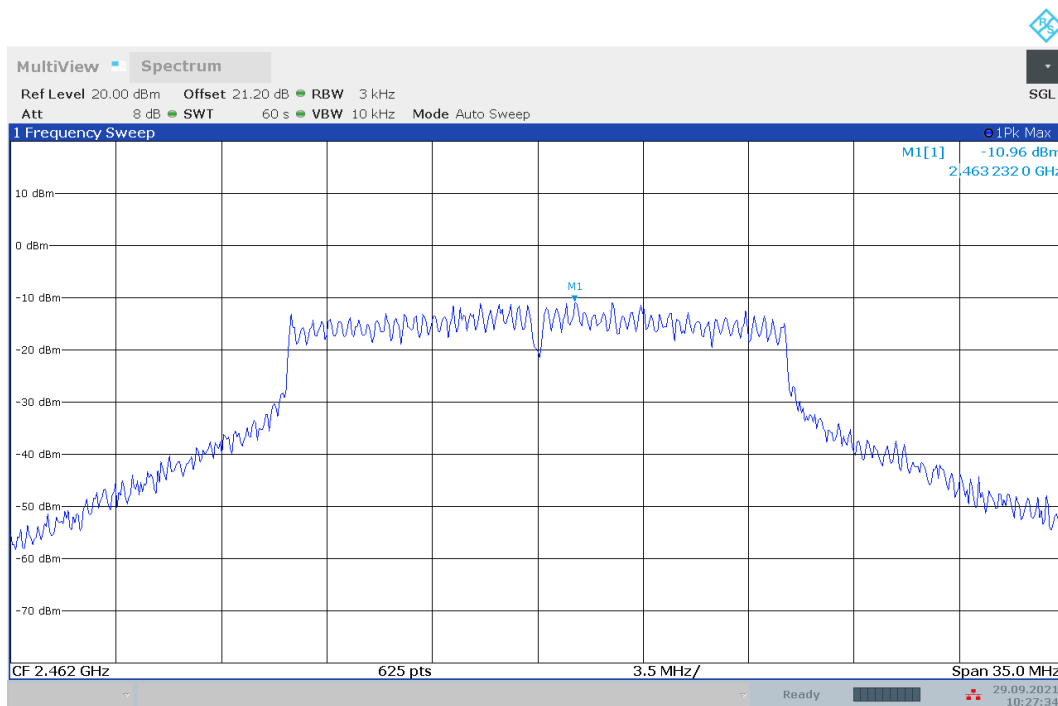


Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)

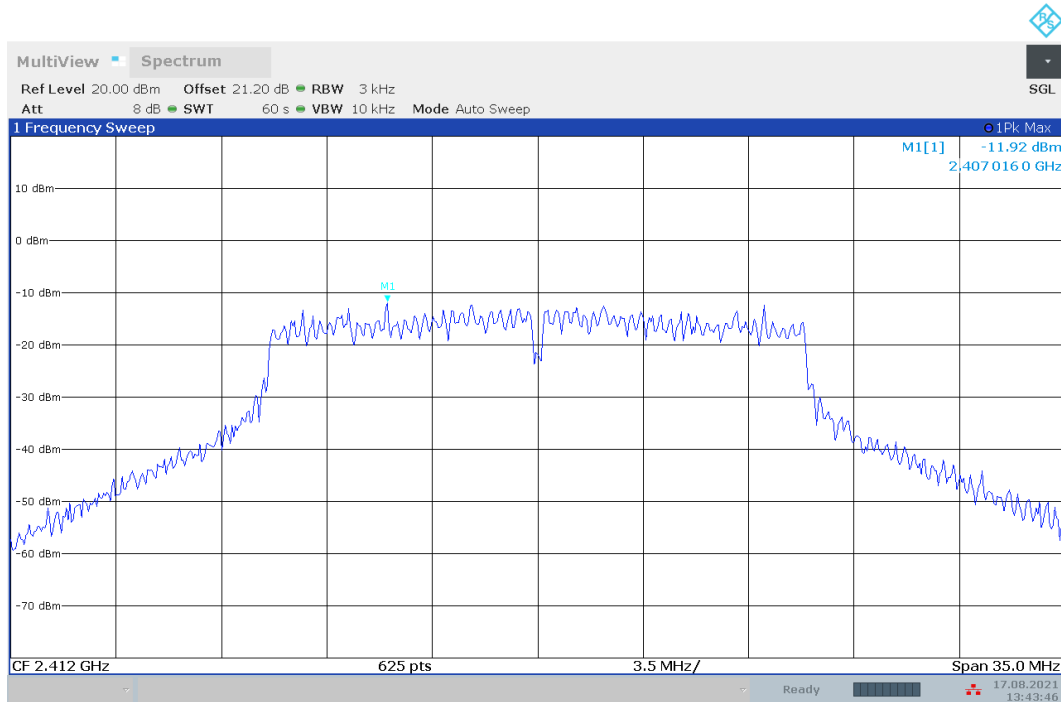


Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)

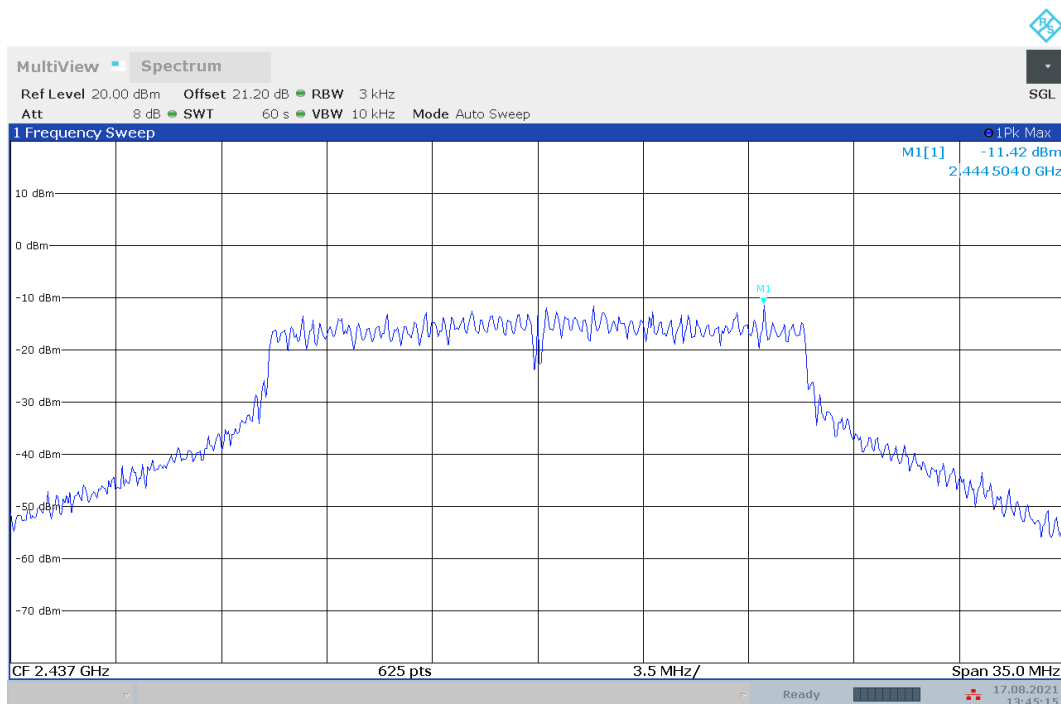


Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)

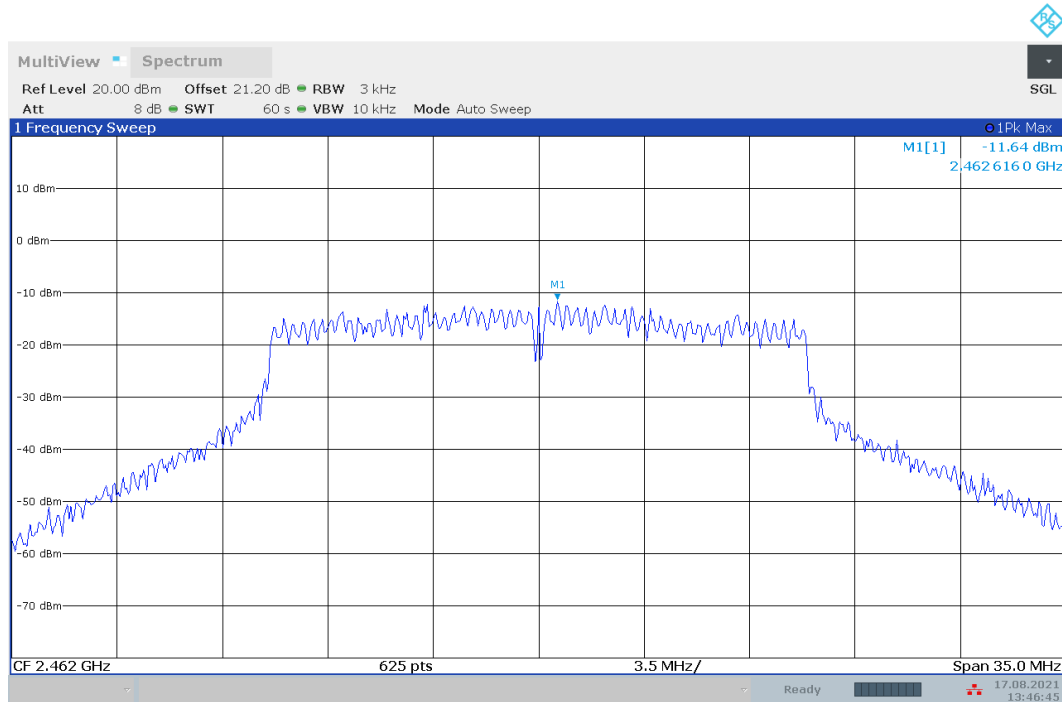


Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)

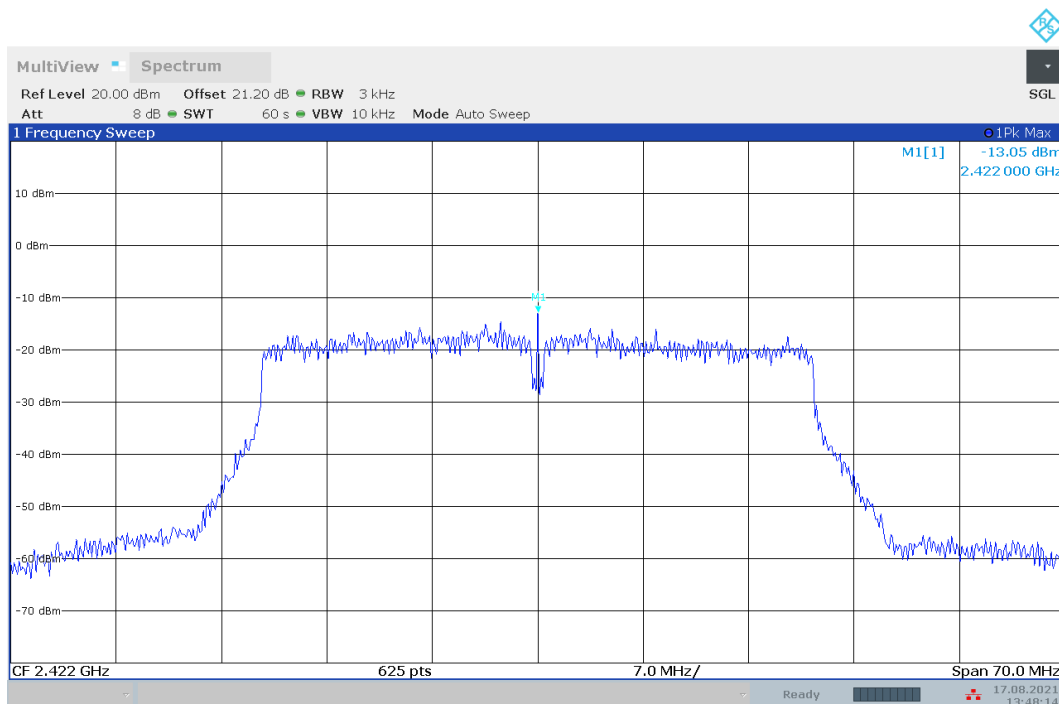


Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)

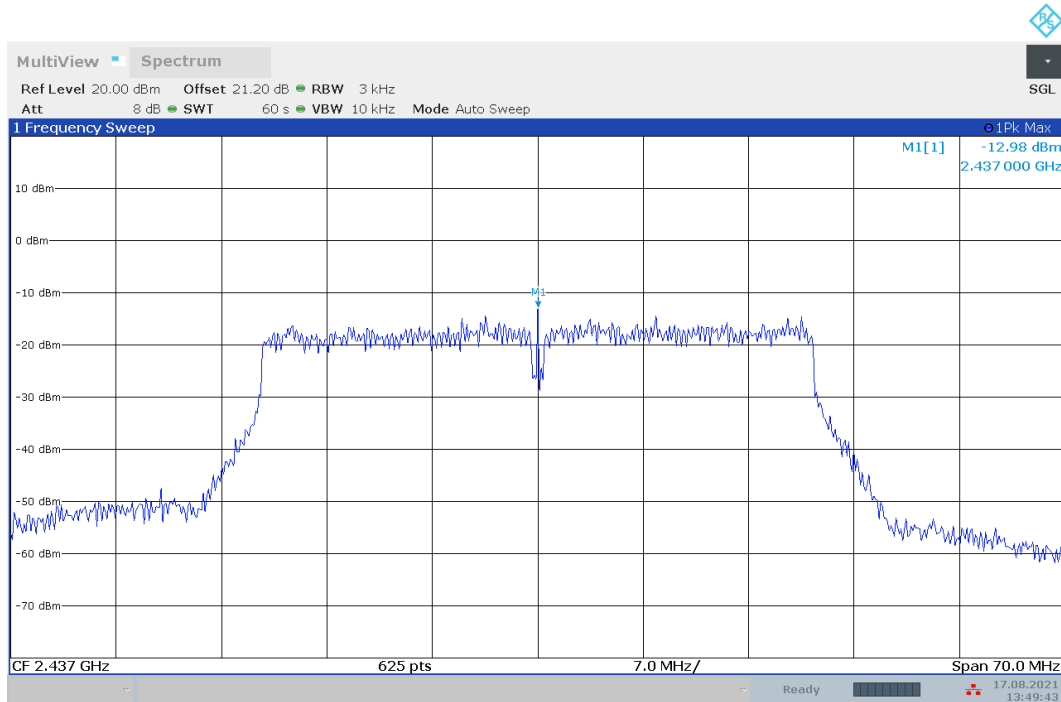


Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)

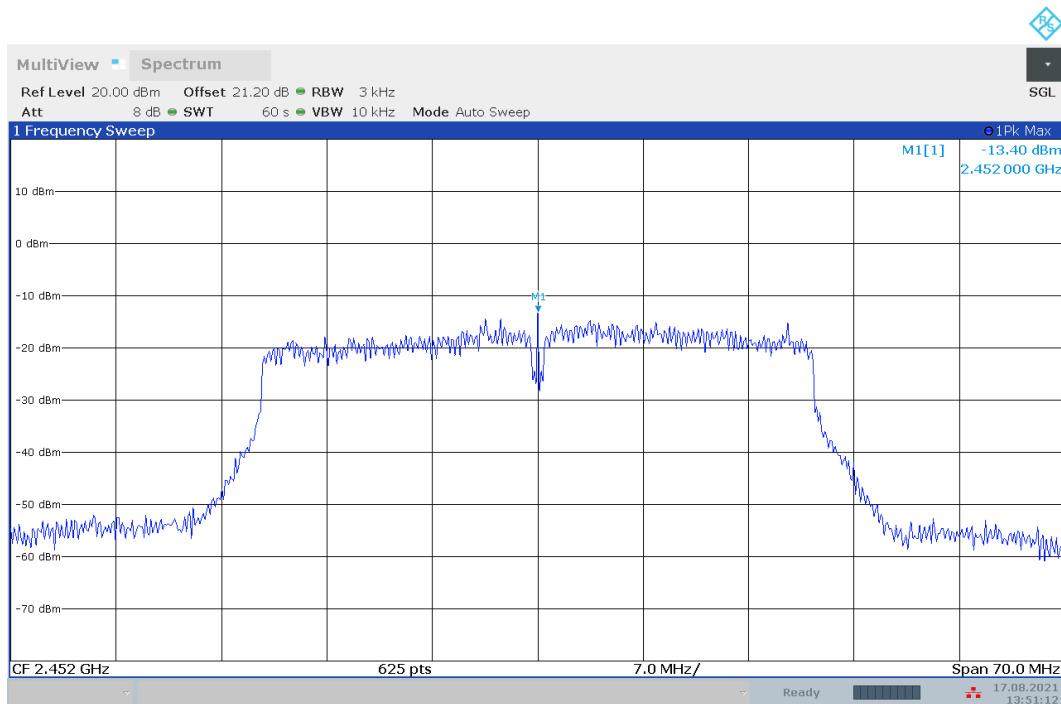


Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)

A.4. DTS 6-dB Signal Bandwidth

Method of Measurement: See ANSI C63.10-2013 section 11.8.1.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

EUT ID: EUT54

Measurement Result:

SISO ANT0:

802.11b/g mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.A.4.1	8024	P
	6	Fig.A.4.2	8012	P
	11	Fig.A.4.3	8546	P
802.11g	1	Fig.A.4.4	15136	P
	6	Fig.A.4.5	15641	P
	11	Fig.A.4.6	15129	P

802.11n-HT20 mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	15131	P
	6	Fig.A.4.8	16775	P
	11	Fig.A.4.9	15933	P

802.11n-HT40 mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11n	3	Fig.A.4.1	35120	P

(HT40)	6	Fig.A.4.2	36318	P
	9	Fig.A.4.3	35078	P

Test graphs as below:
SISO ANT0:

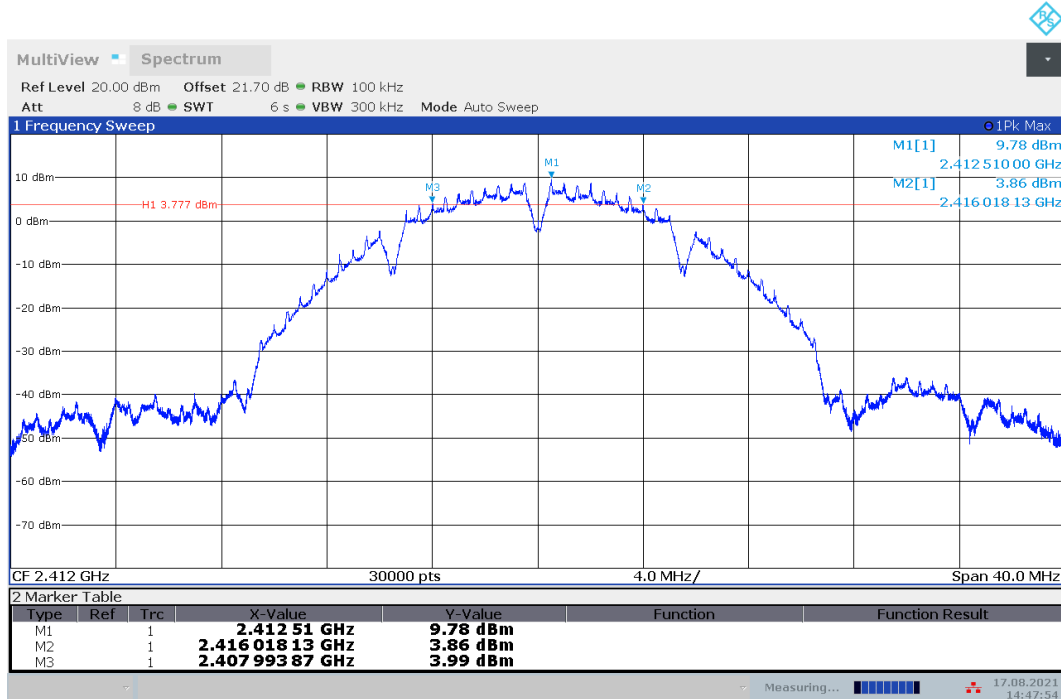


Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)

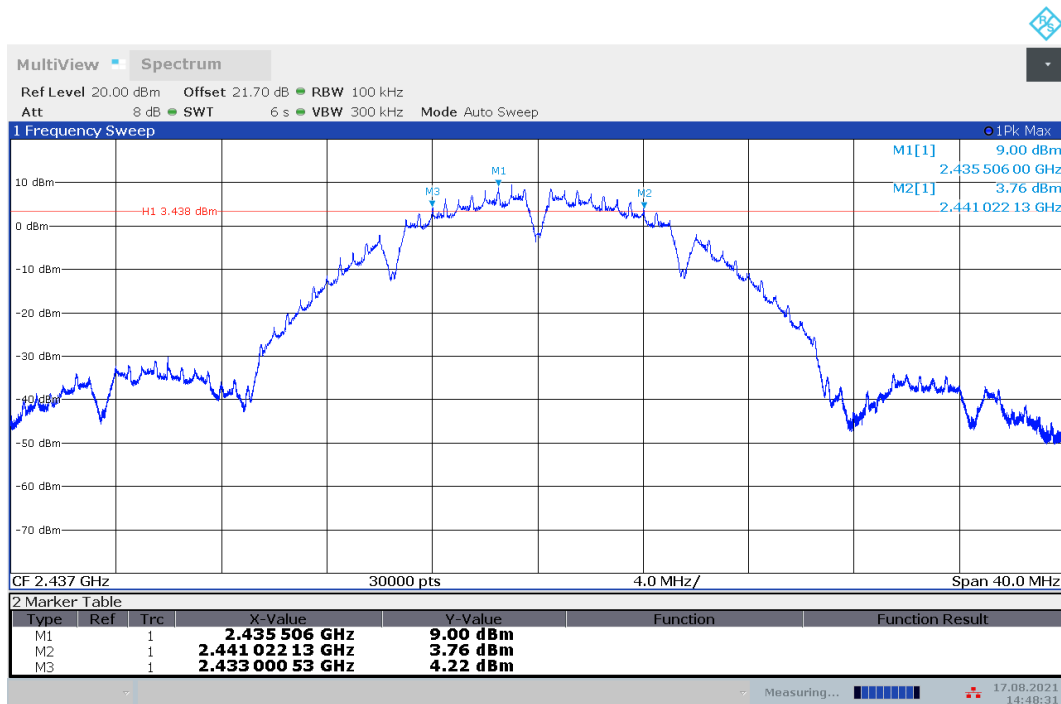


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)

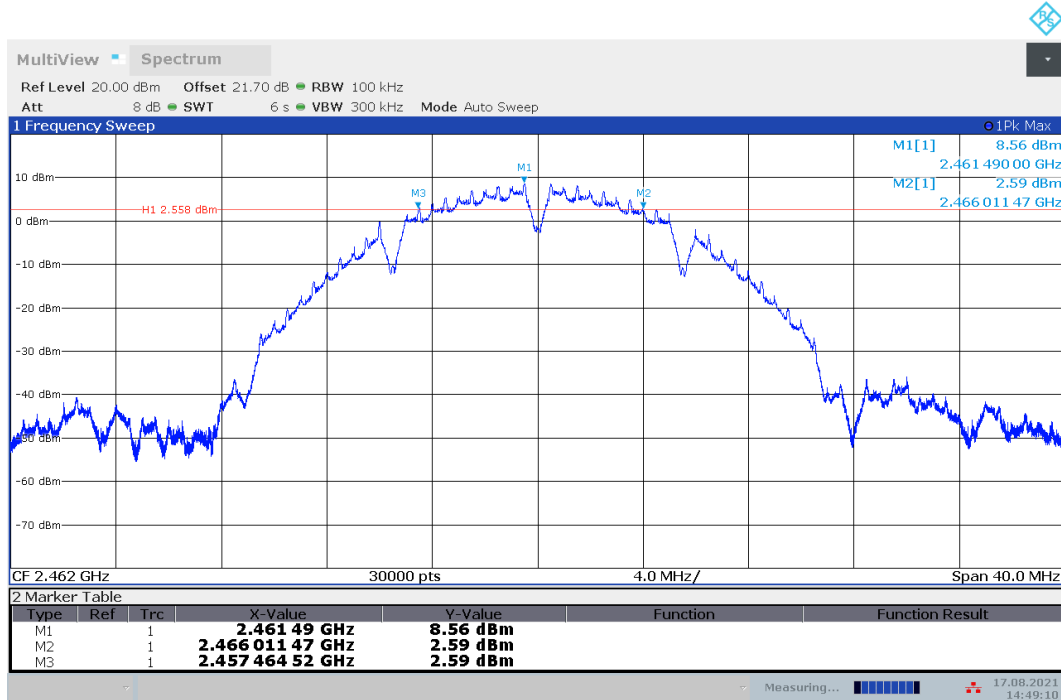


Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

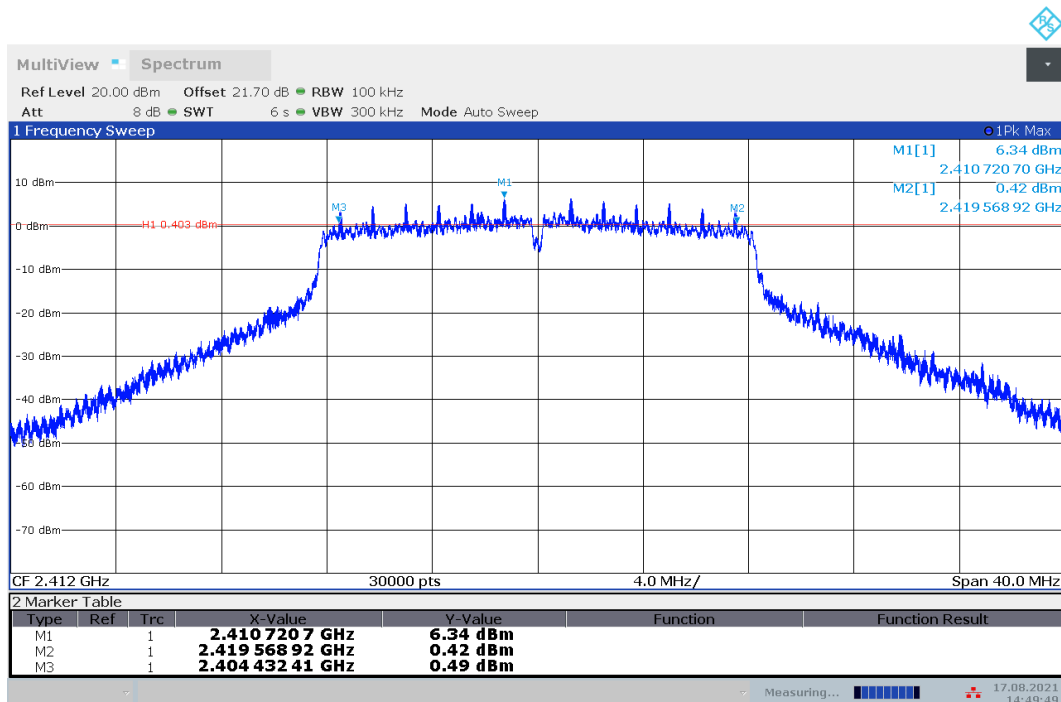


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

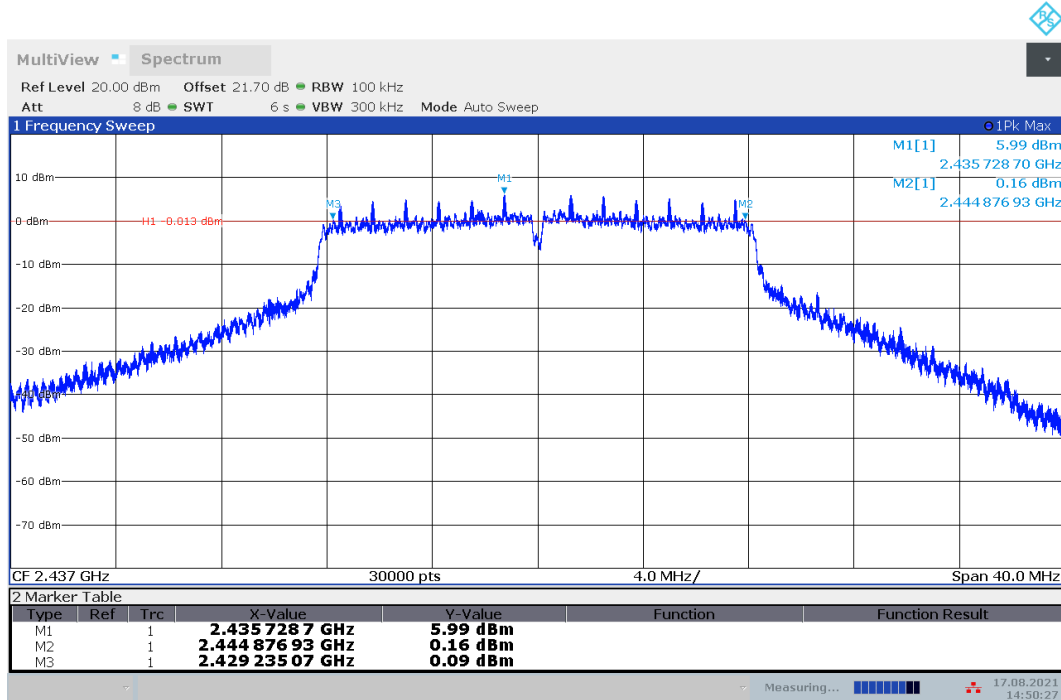


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

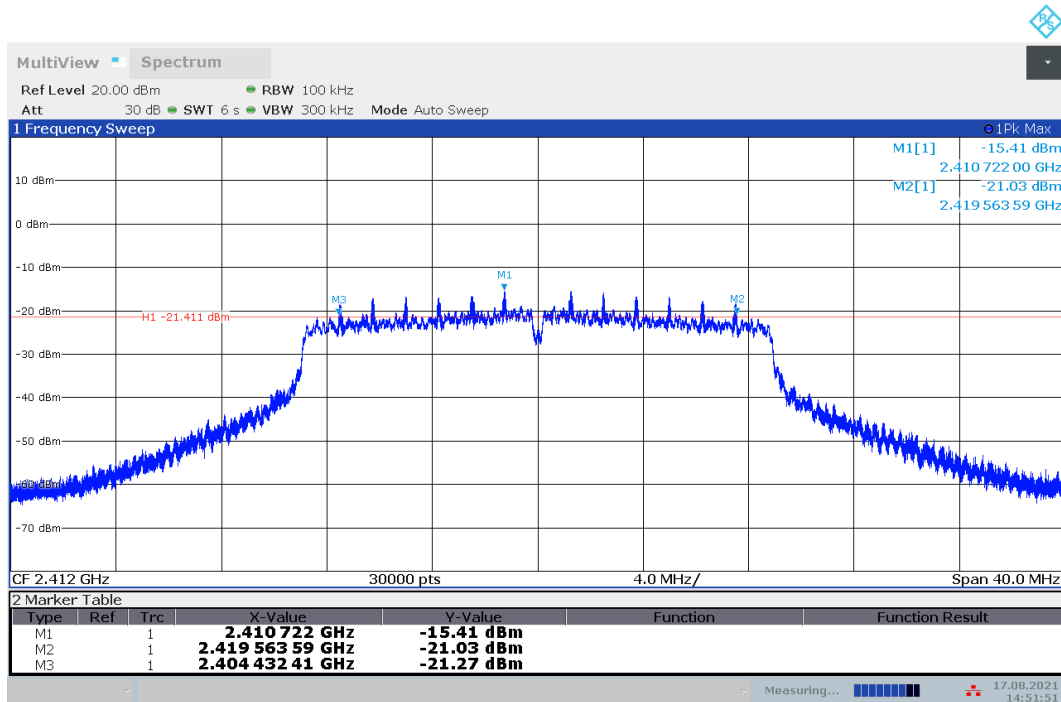


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

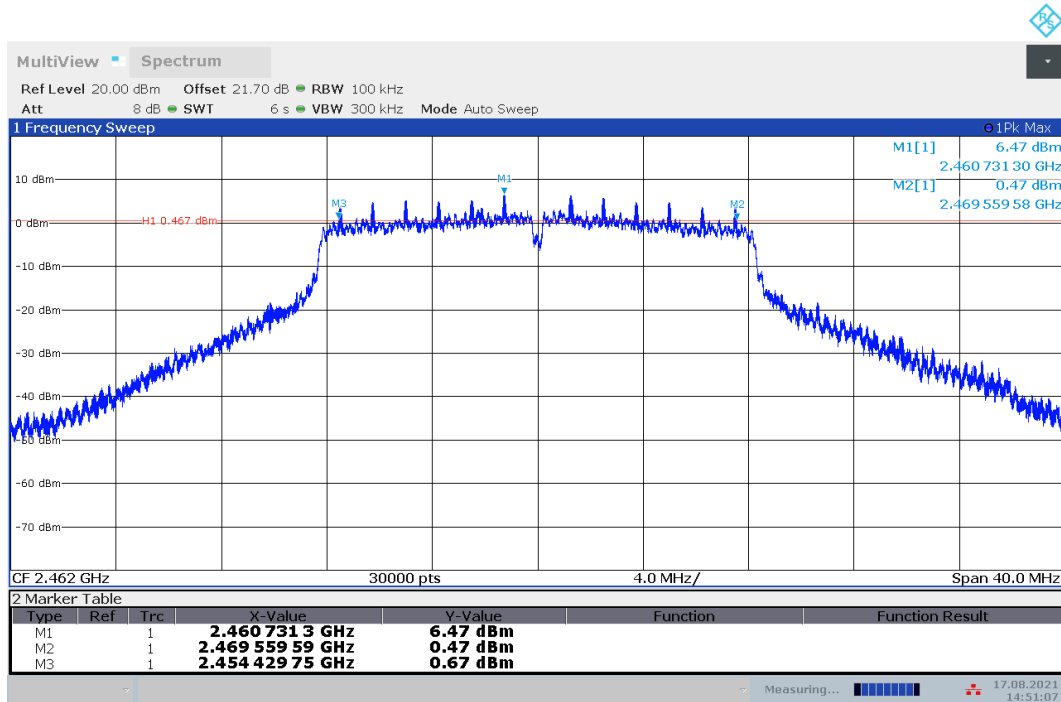


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

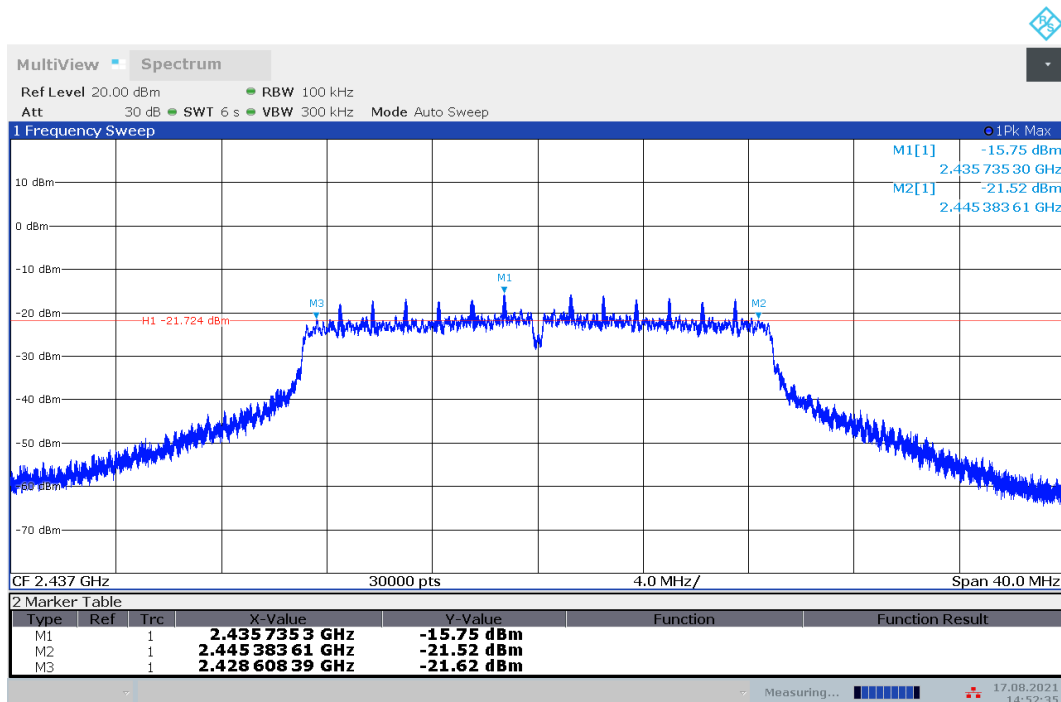


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

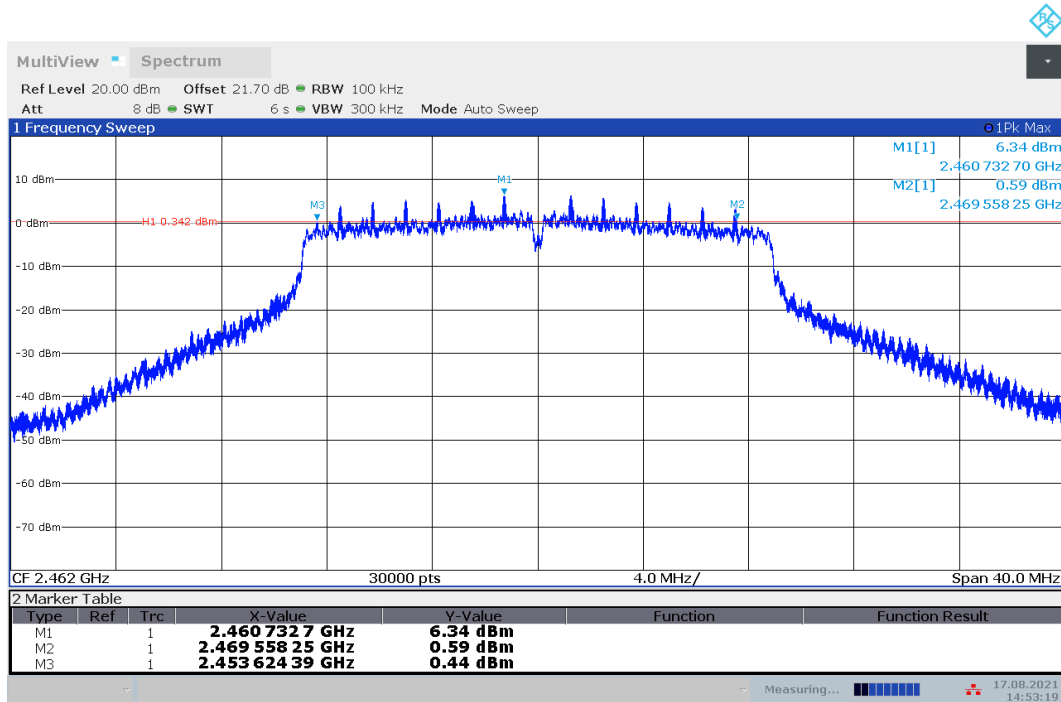


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

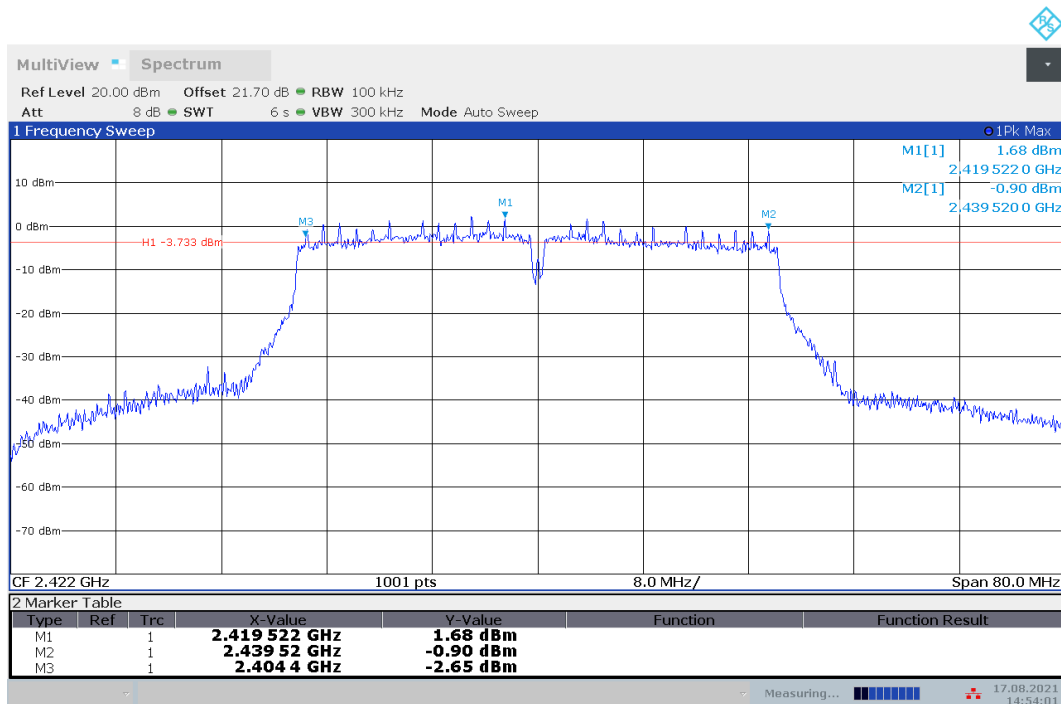


Fig.A.4.10 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 3)

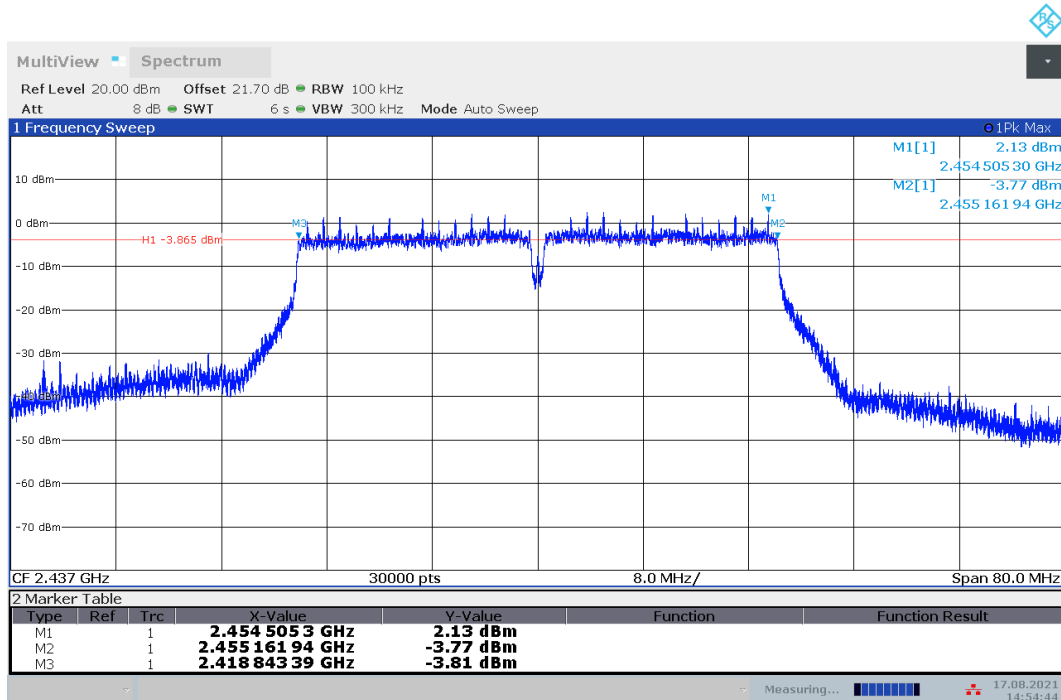


Fig.A.4.11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 6)

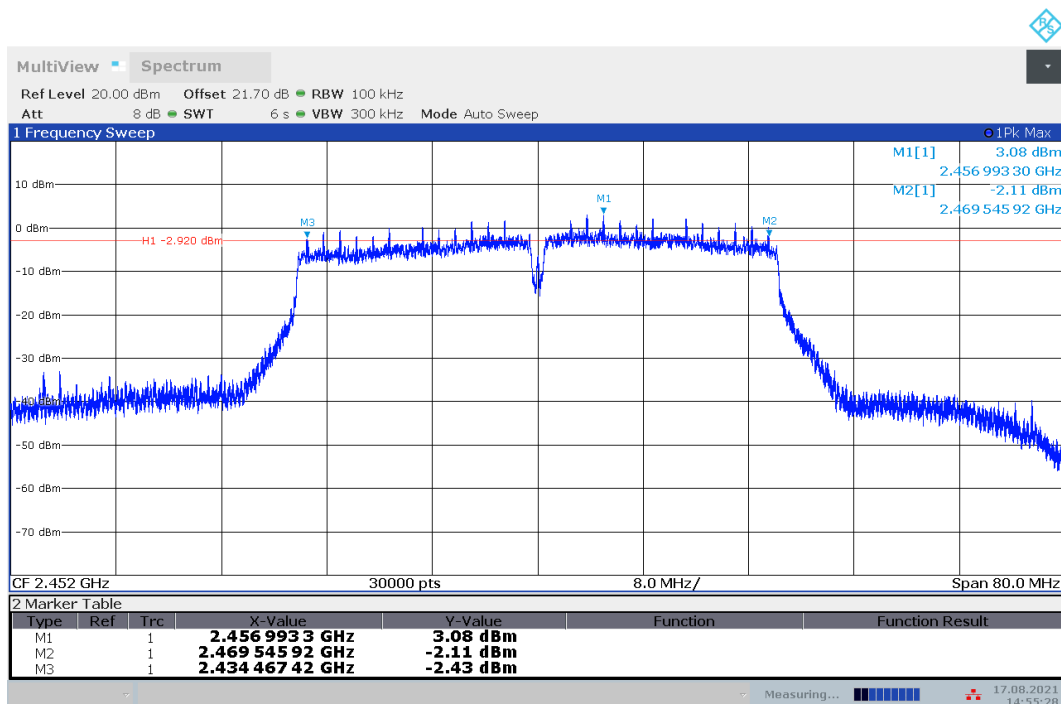


Fig.A.4.12 Occupied 6dB Bandwidth (802.11n-HT40, Ch 9)

A.5. Band Edges Compliance

Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz

- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

EUT ID: EUT54
Measurement Result:
802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	P
	11	Fig.A.5.2	P
802.11g	1	Fig.A.5.3	P
	11	Fig.A.5.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	P
	11	Fig.A.5.6	P

802.11n-HT40 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.5.7	P
	9	Fig.A.5.8	P

Test graphs as below:

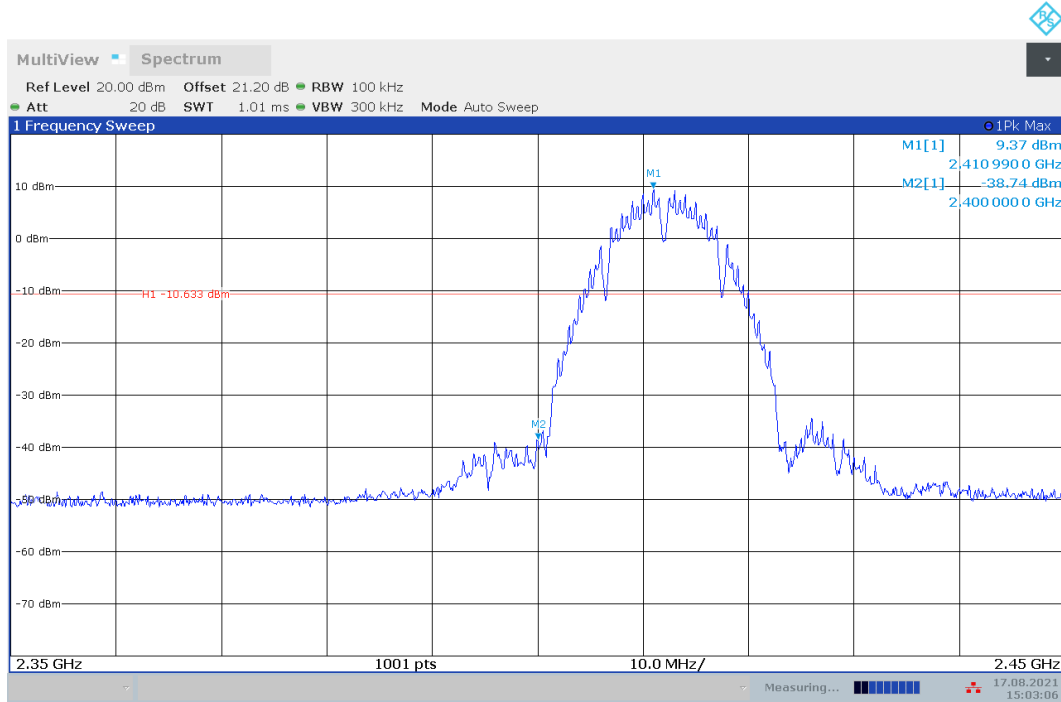


Fig.A.5.1 Band Edges (802.11b, Ch 1)

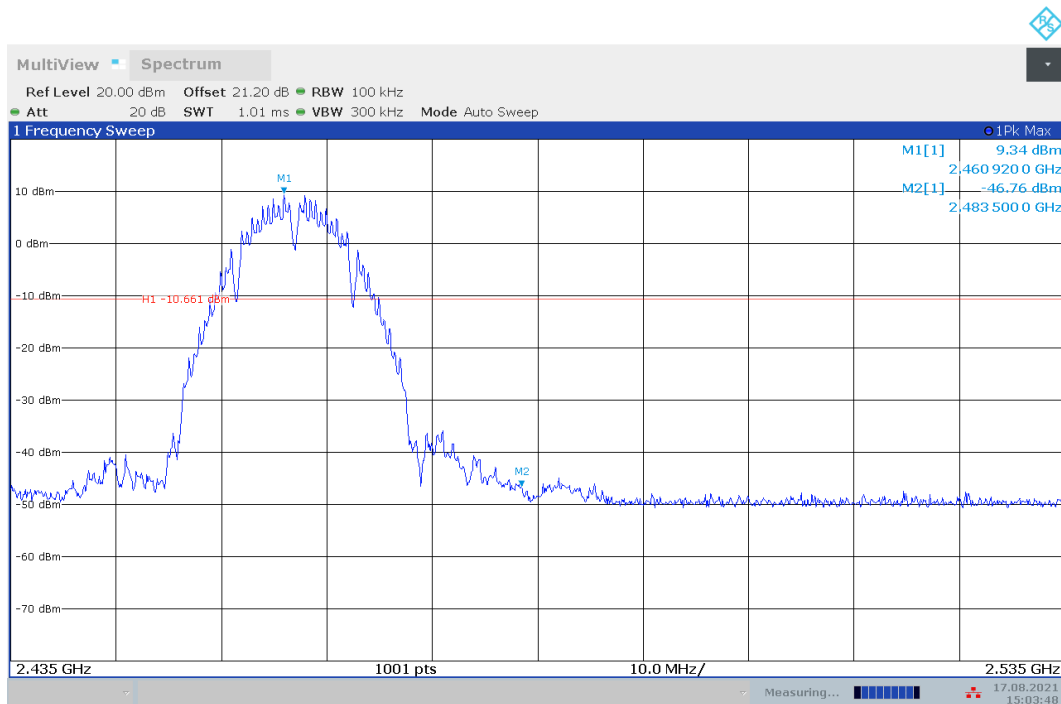


Fig.A.5.2 Band Edges (802.11b, Ch 11)

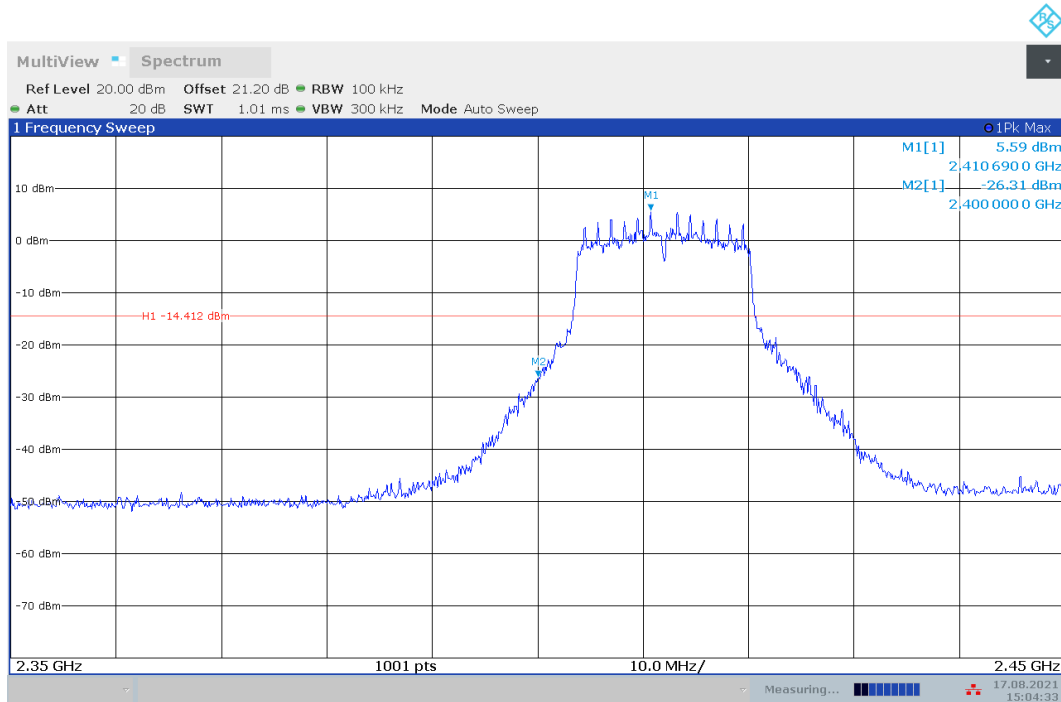


Fig.A.5.3 Band Edges (802.11g, Ch 1)

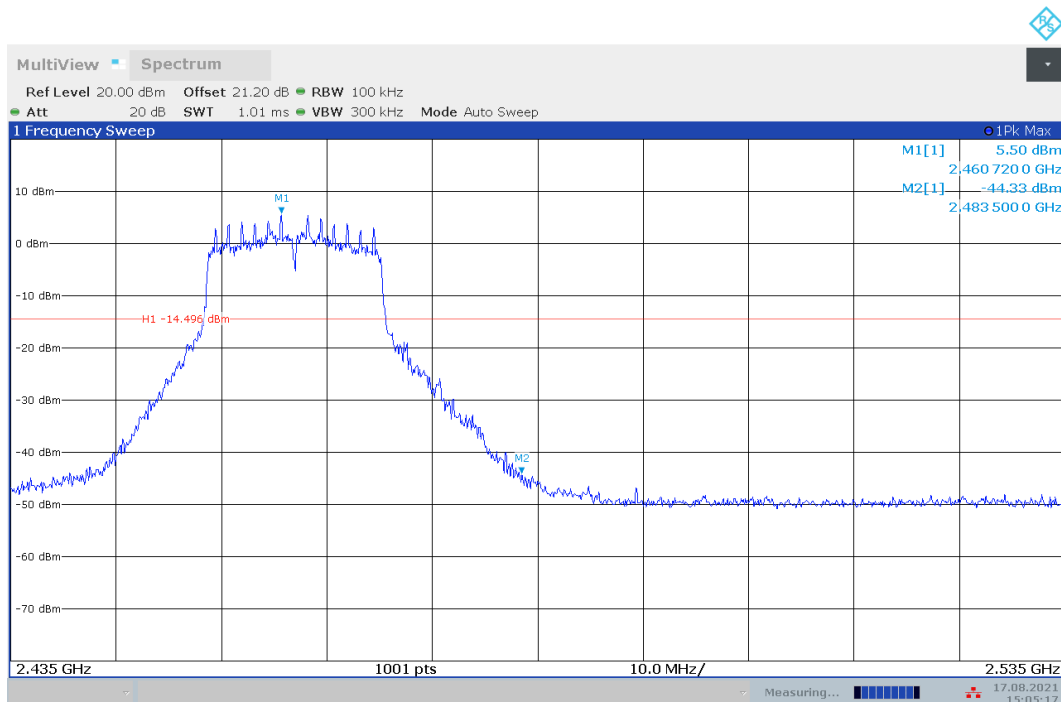


Fig.A.5.4 Band Edges (802.11g, Ch 11)

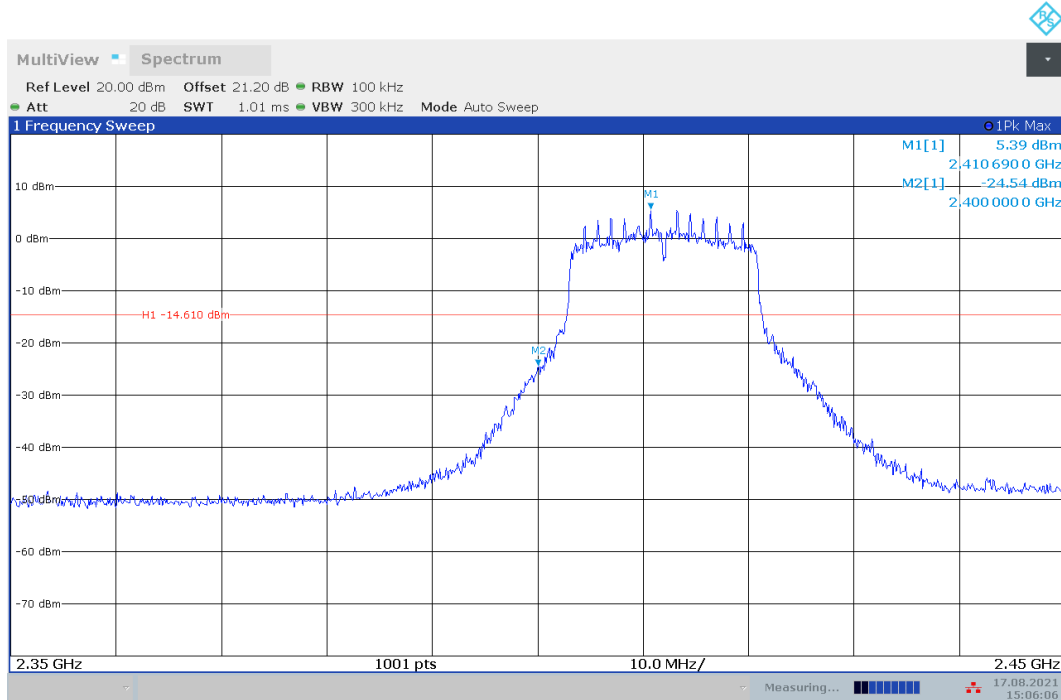


Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)

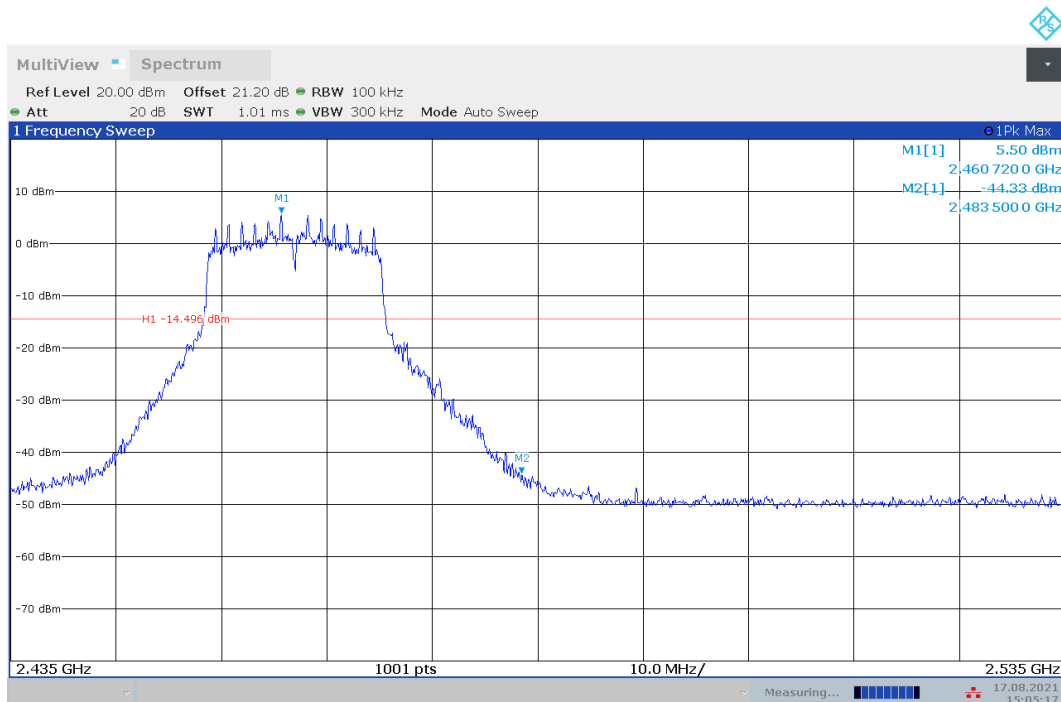


Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)

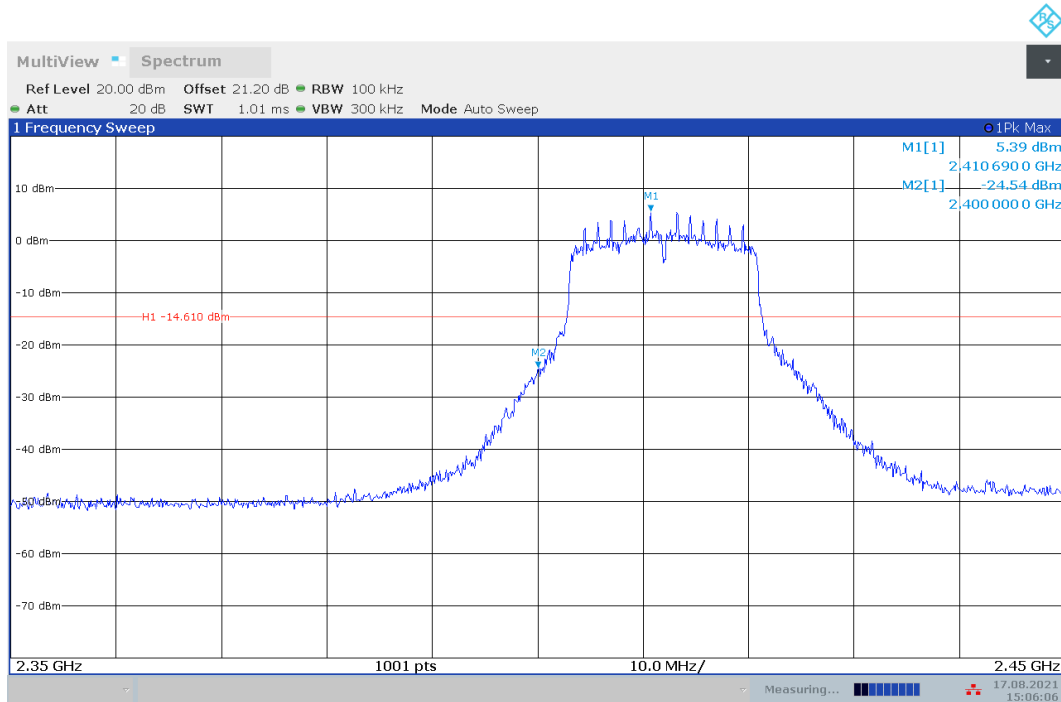


Fig.A.5.7 Band Edges (802.11n-HT40, Ch 3)

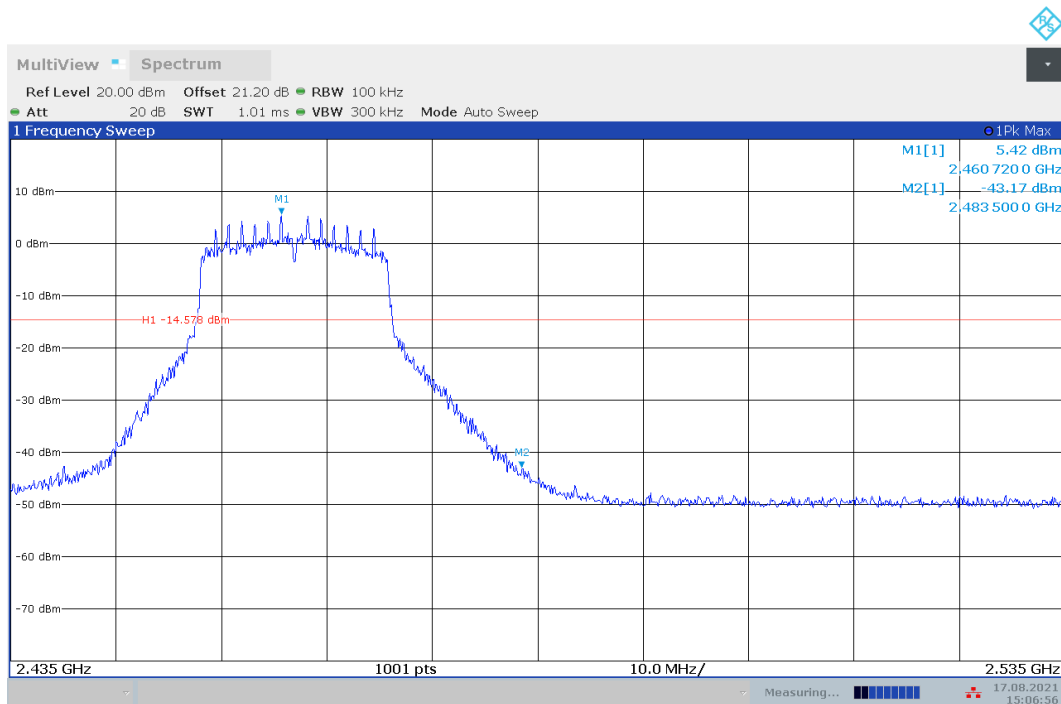


Fig.A.5.8 Band Edges (802.11n-HT40, Ch 9)

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission – Conducted

Method of Measurement: See ANSI C63.10-2013-clause 11.11

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

EUT ID: EUT54

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.A.6.1.1	P
		30 MHz ~ 26 GHz	Fig.A.6.1.2	P
	6	2.437 GHz	Fig.A.6.1.3	P
		30 MHz ~ 26 GHz	Fig.A.6.1.4	P
	11	2.462 GHz	Fig.A.6.1.5	P
		30 MHz ~ 26 GHz	Fig.A.6.1.6	P
MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.7	P
		30 MHz ~ 26 GHz	Fig.A.6.1.8	P
	6	2.437 GHz	Fig.A.6.1.9	P
		30 MHz ~ 26 GHz	Fig.A.6.1.10	P
	11	2.462 GHz	Fig.A.6.1.11	P
		30 MHz ~ 26 GHz	Fig.A.6.1.12	P
MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.13	P
		30 MHz ~ 26 GHz	Fig.A.6.1.14	P
	6	2.437 GHz	Fig.A.6.1.15	P
		30 MHz ~ 26 GHz	Fig.A.6.1.16	P
	11	2.462 GHz	Fig.A.6.1.17	P
		30 MHz ~ 26 GHz	Fig.A.6.1.18	P

802.11n (HT40)	3	2.412 GHz	Fig.A.6.1.19	P
		30 MHz ~ 26 GHz	Fig.A.6.1.20	P
	6	2.437 GHz	Fig.A.6.1.21	P
		30 MHz ~ 26 GHz	Fig.A.6.1.22	P
	9	2.462 GHz	Fig.A.6.1.23	P
		30 MHz ~ 26 GHz	Fig.A.6.1.24	P

Conclusion: Pass

Test graphs as below:

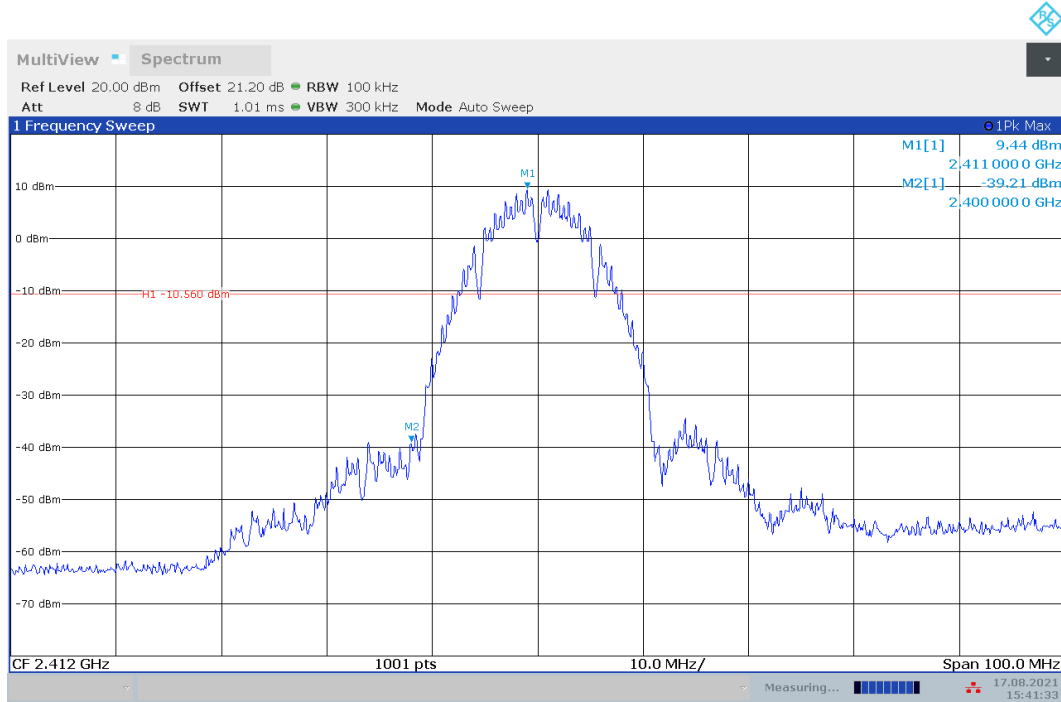


Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)

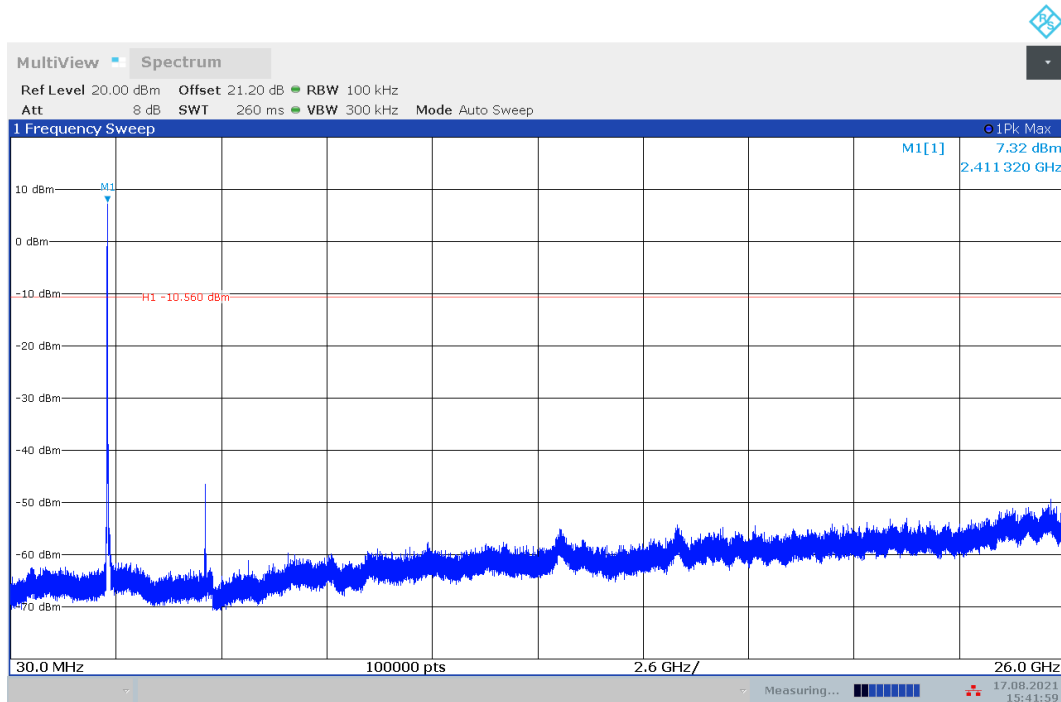


Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-26 GHz)

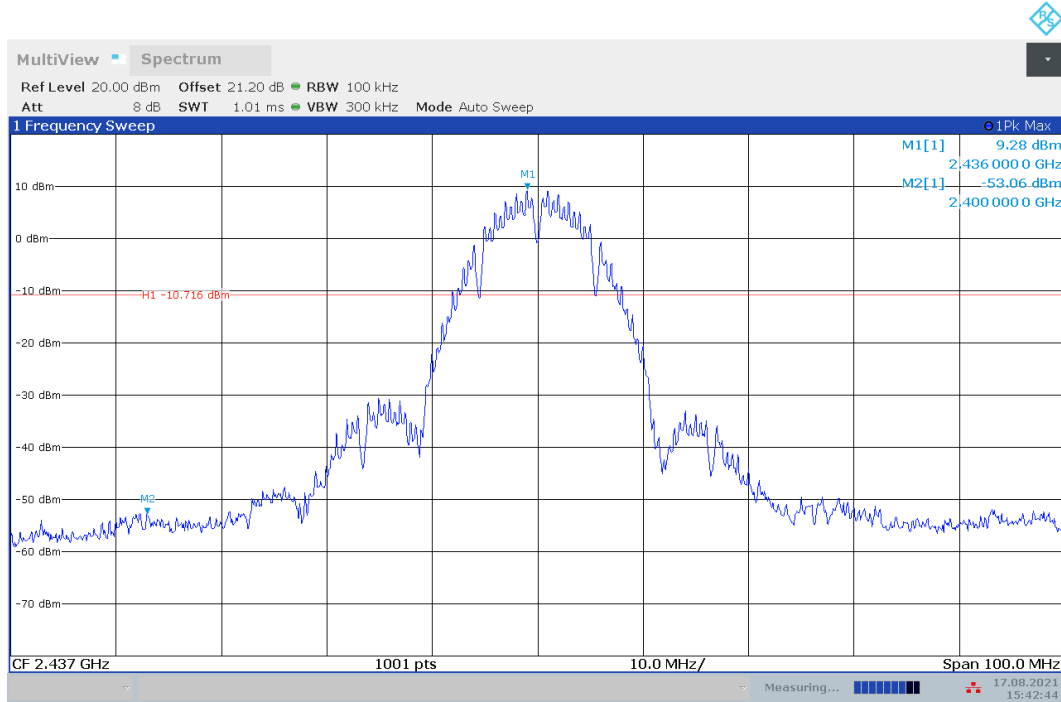


Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)

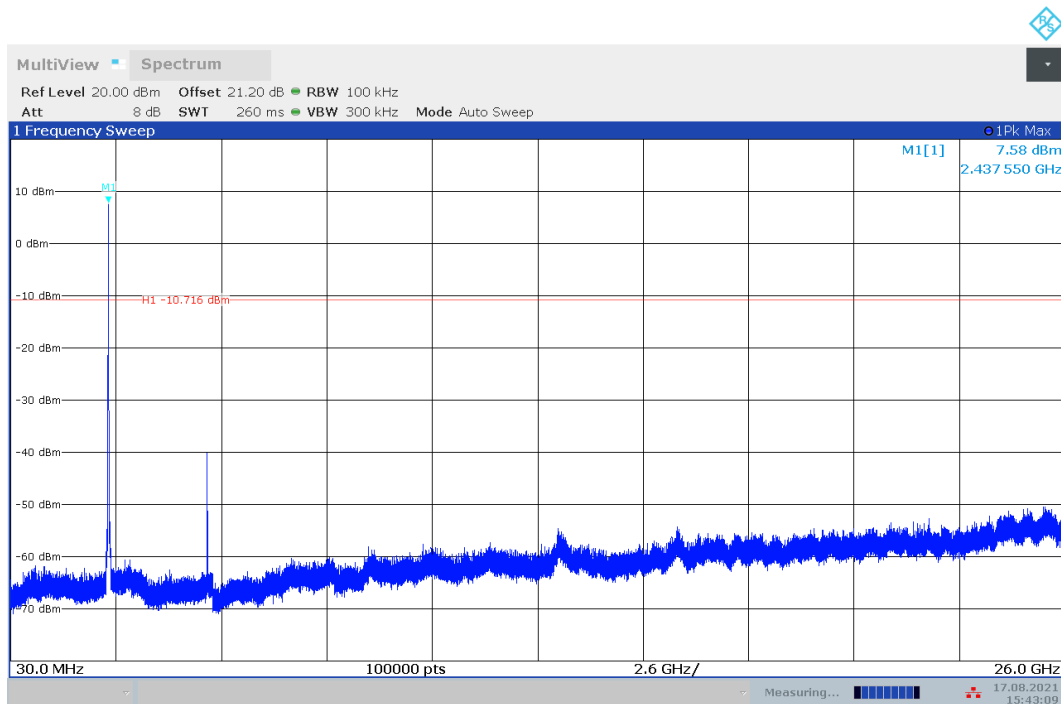


Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-26 GHz)

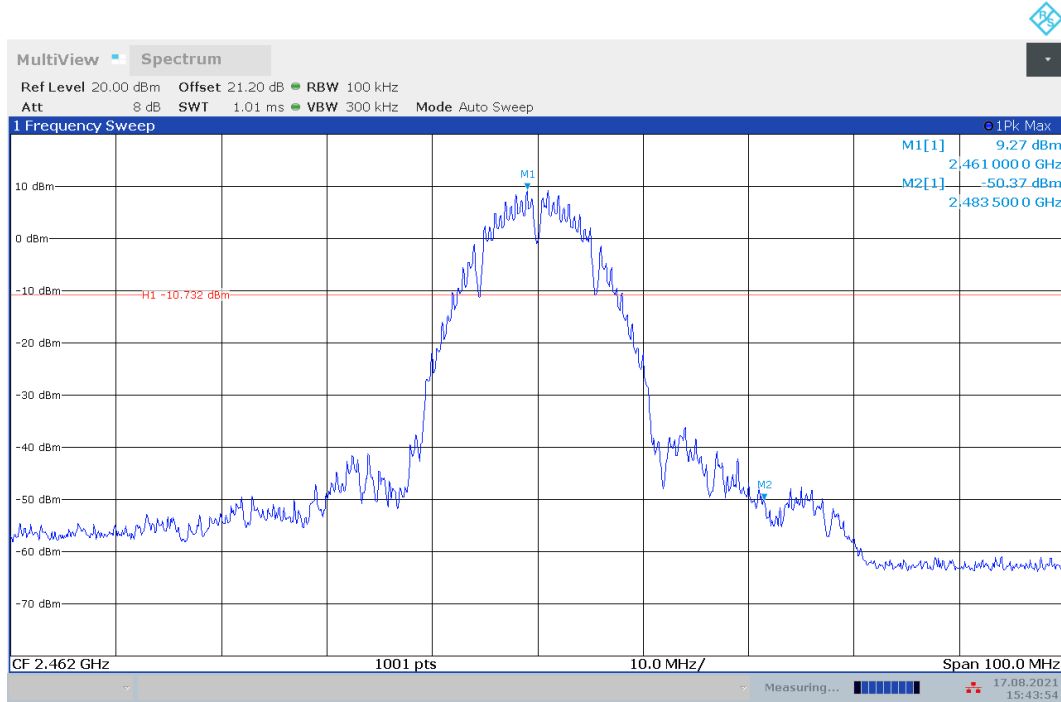


Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)

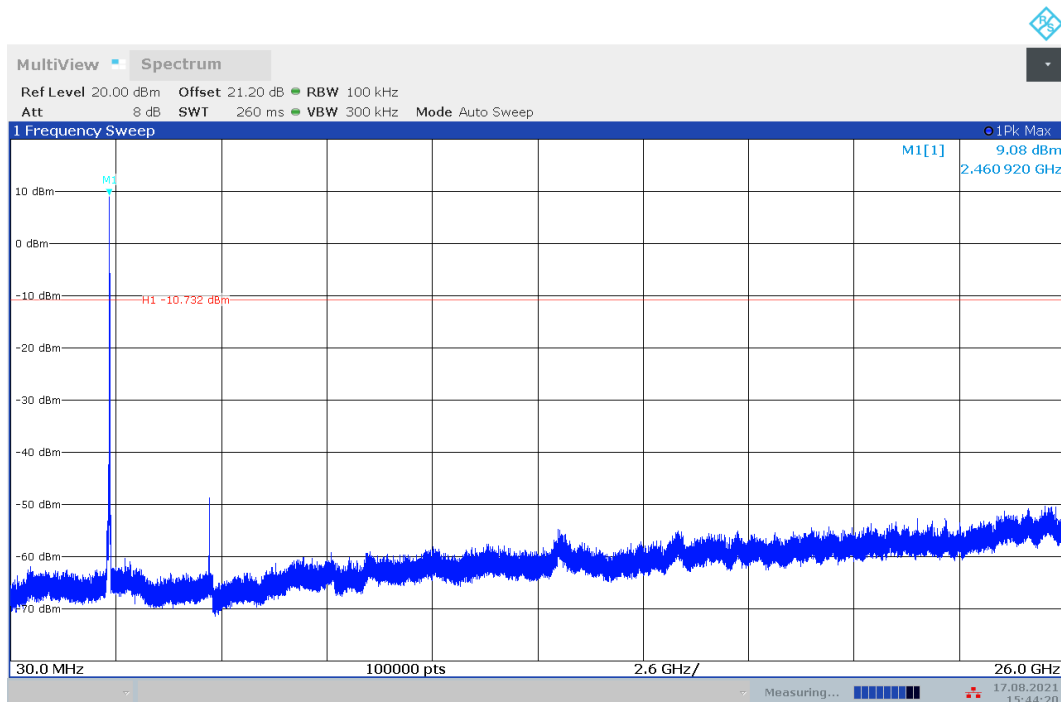


Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-26 GHz)

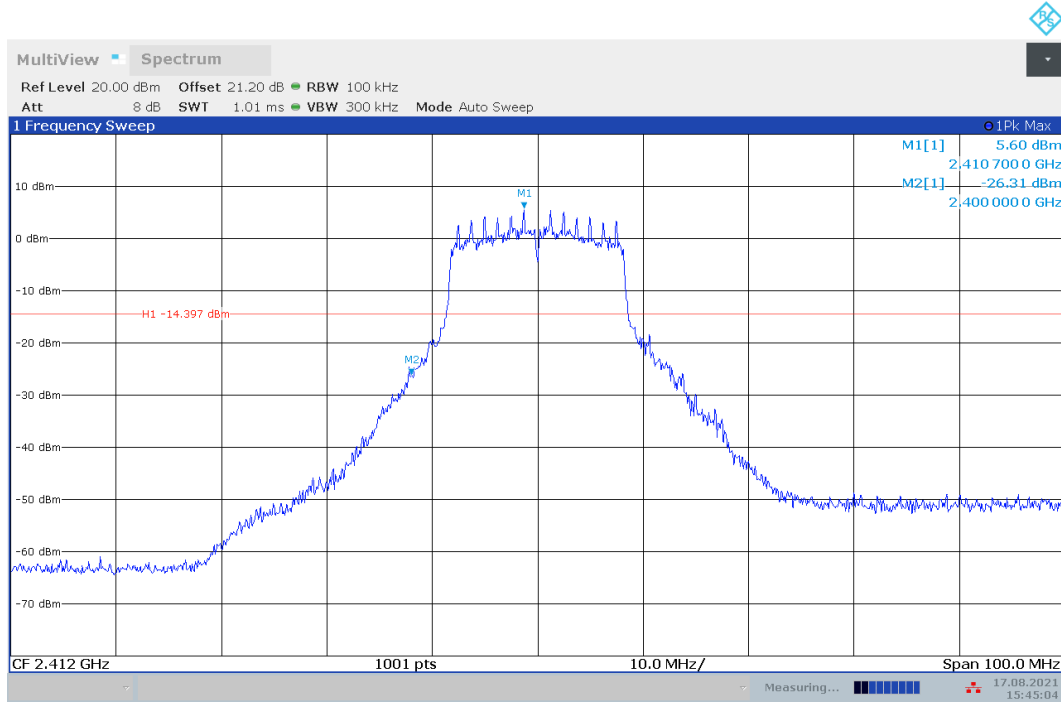


Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)

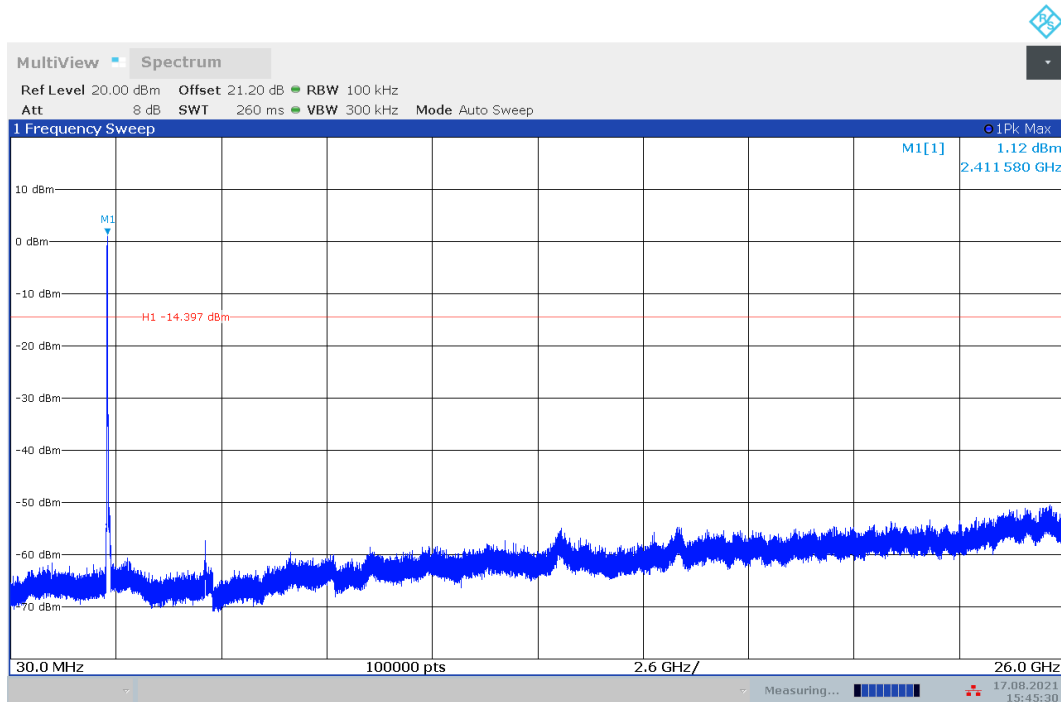


Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-26 GHz)

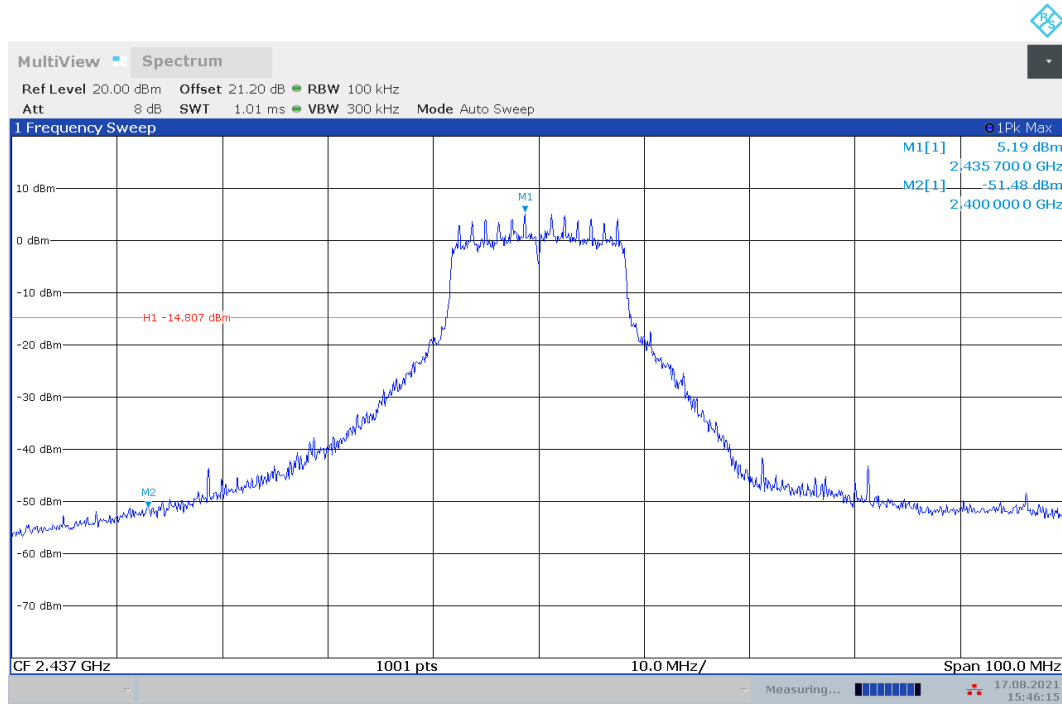


Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)

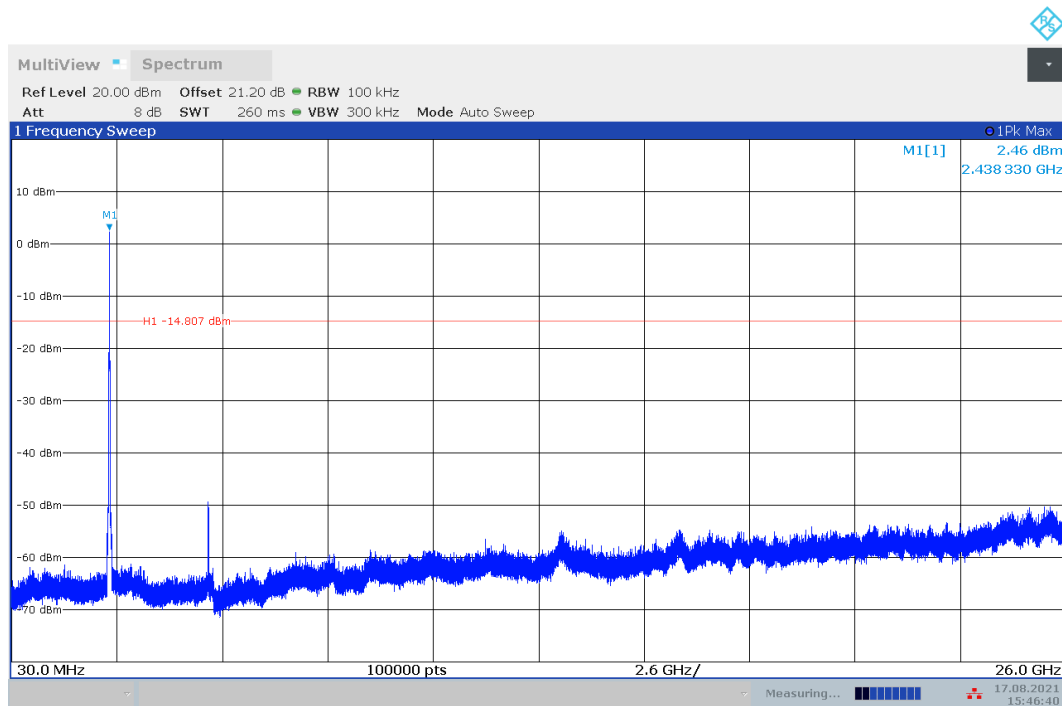


Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-26 GHz)

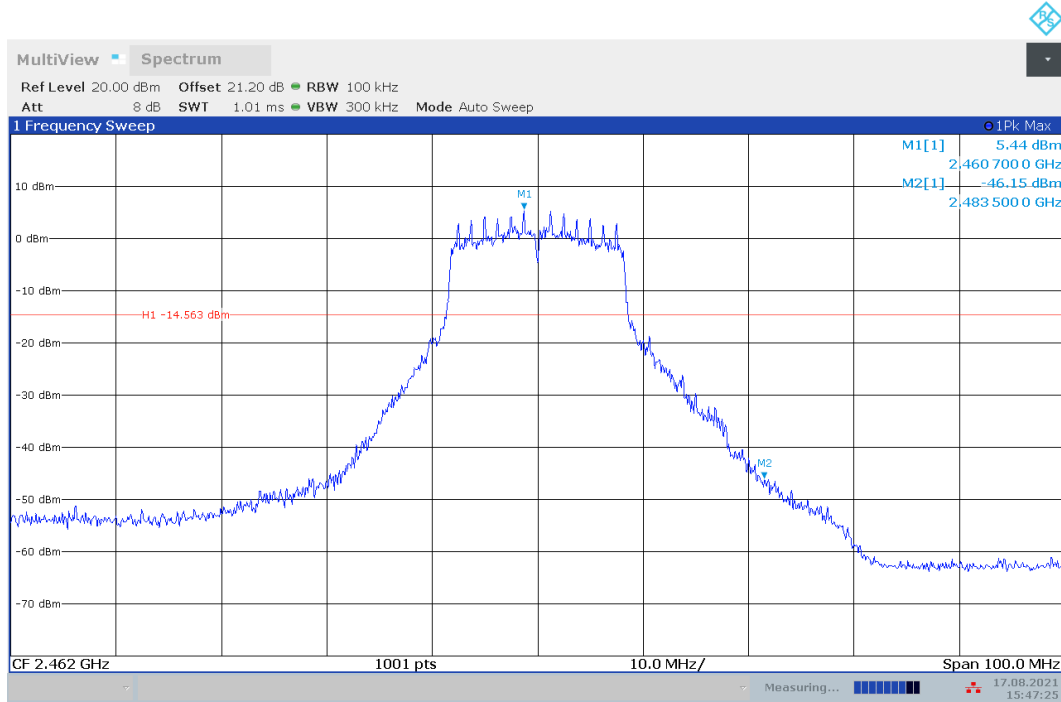


Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

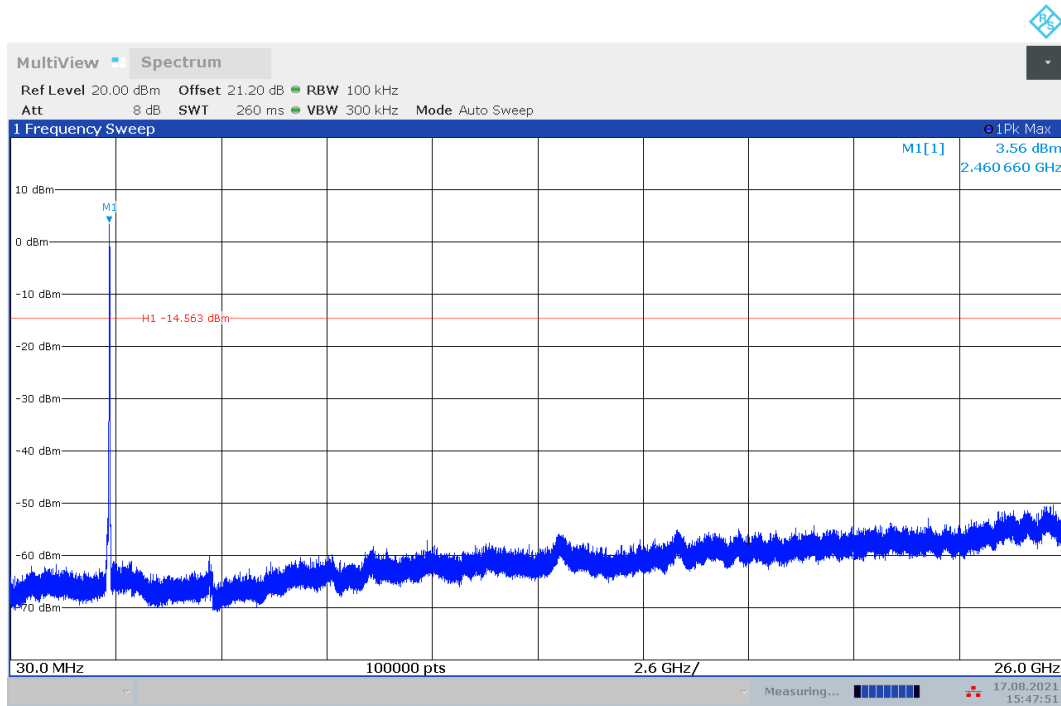


Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-26 GHz)

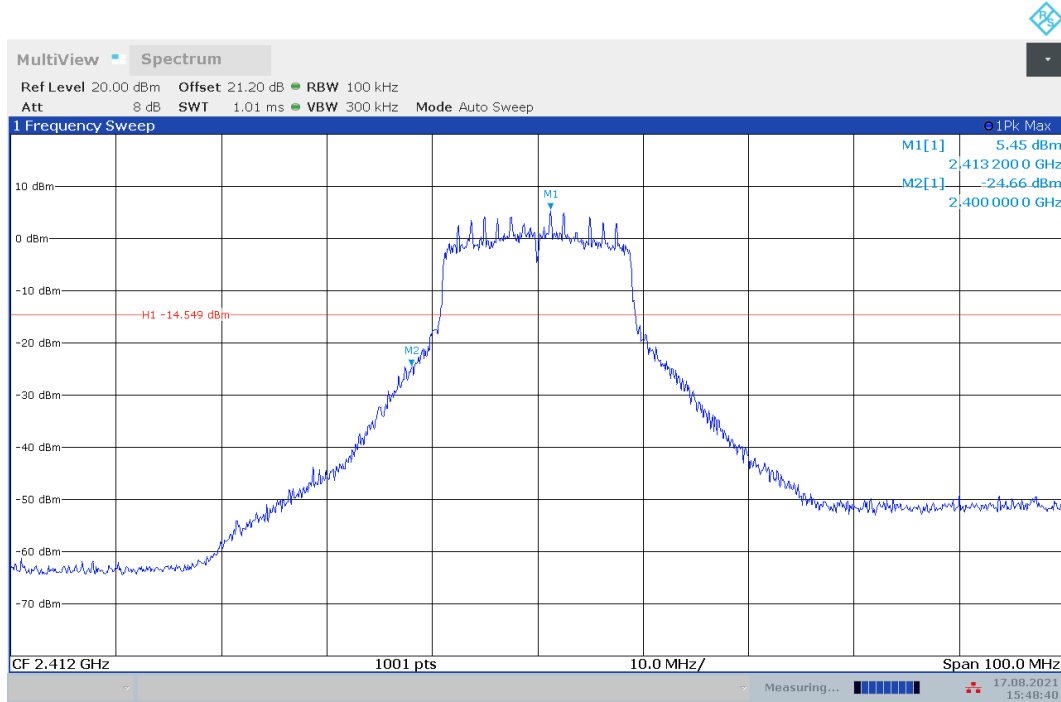


Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

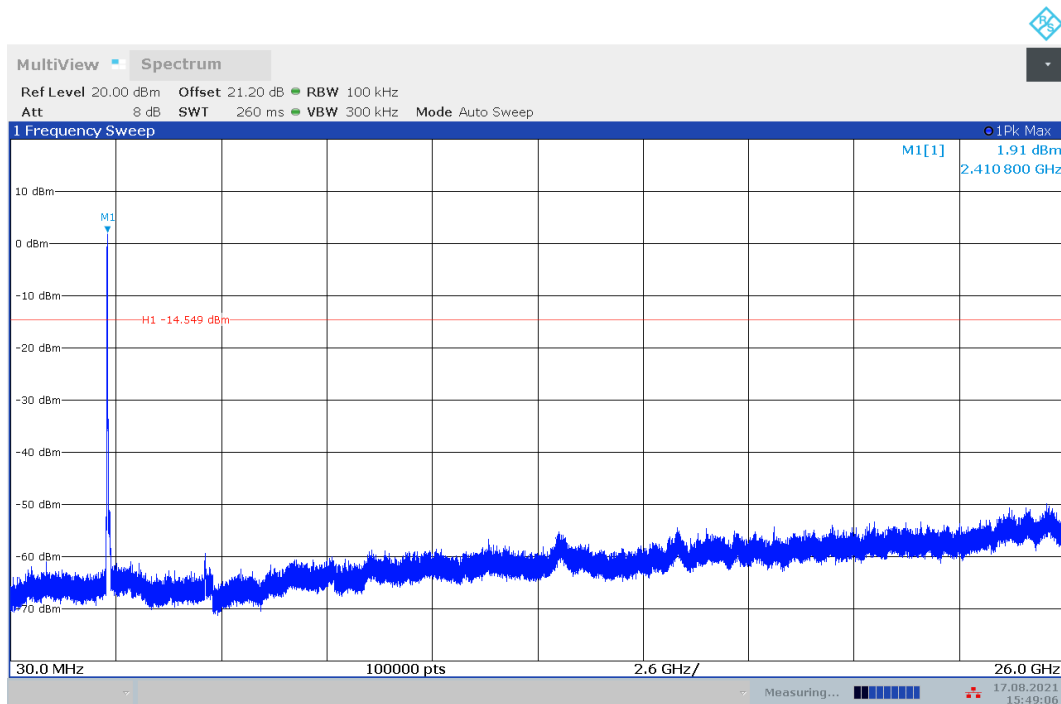


Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-26 GHz)

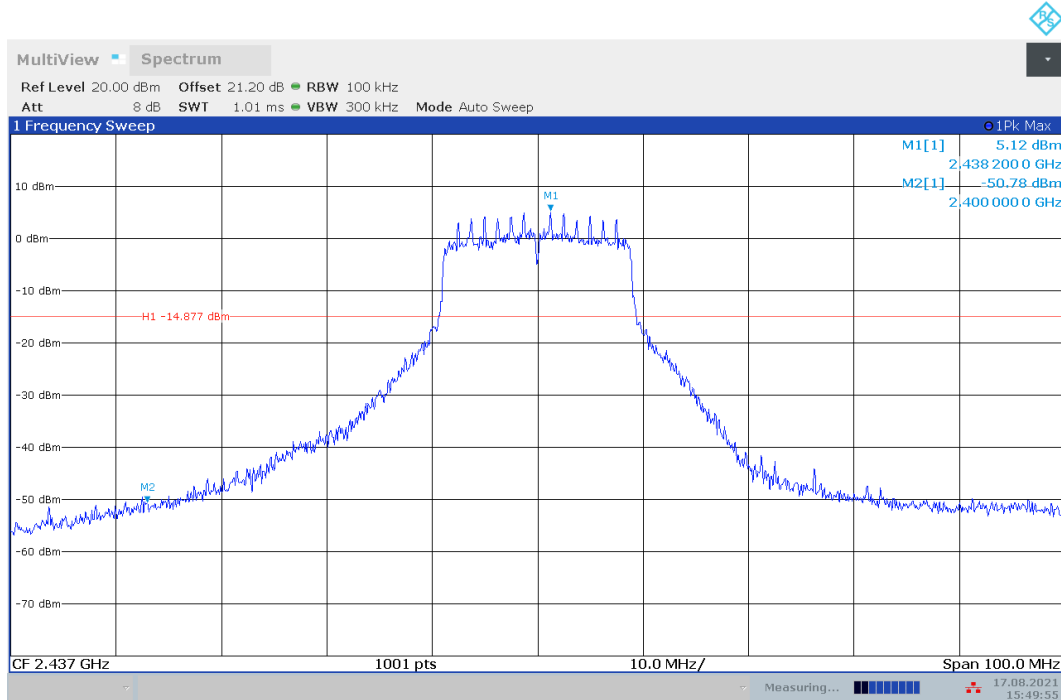


Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)

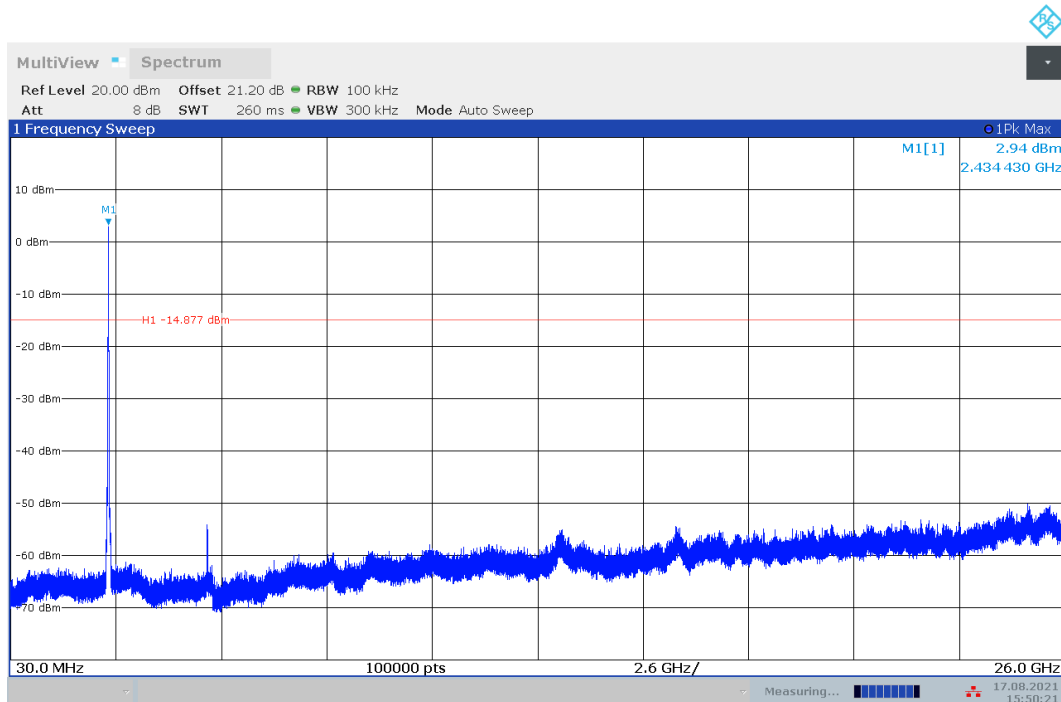


Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-26 GHz)

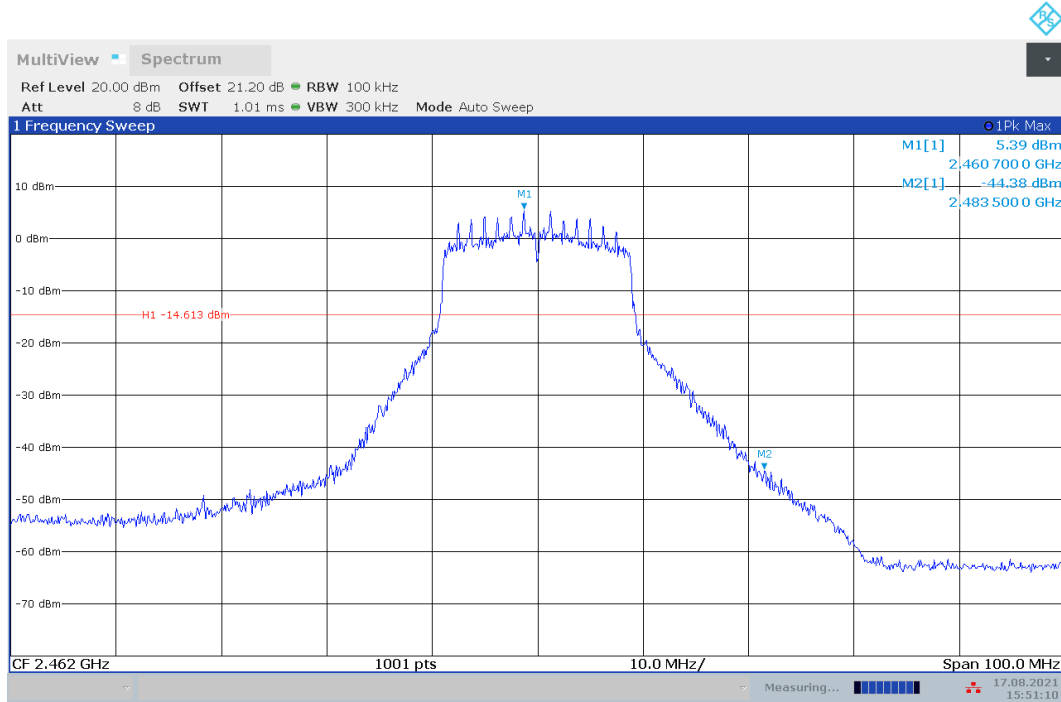


Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

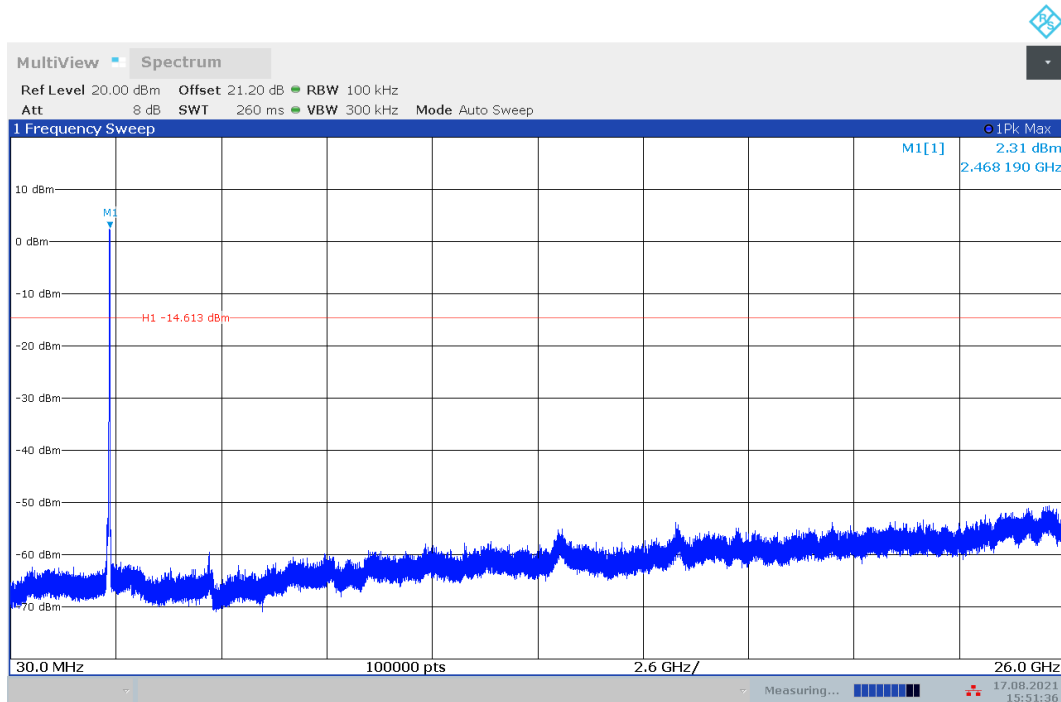


Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-26 GHz)

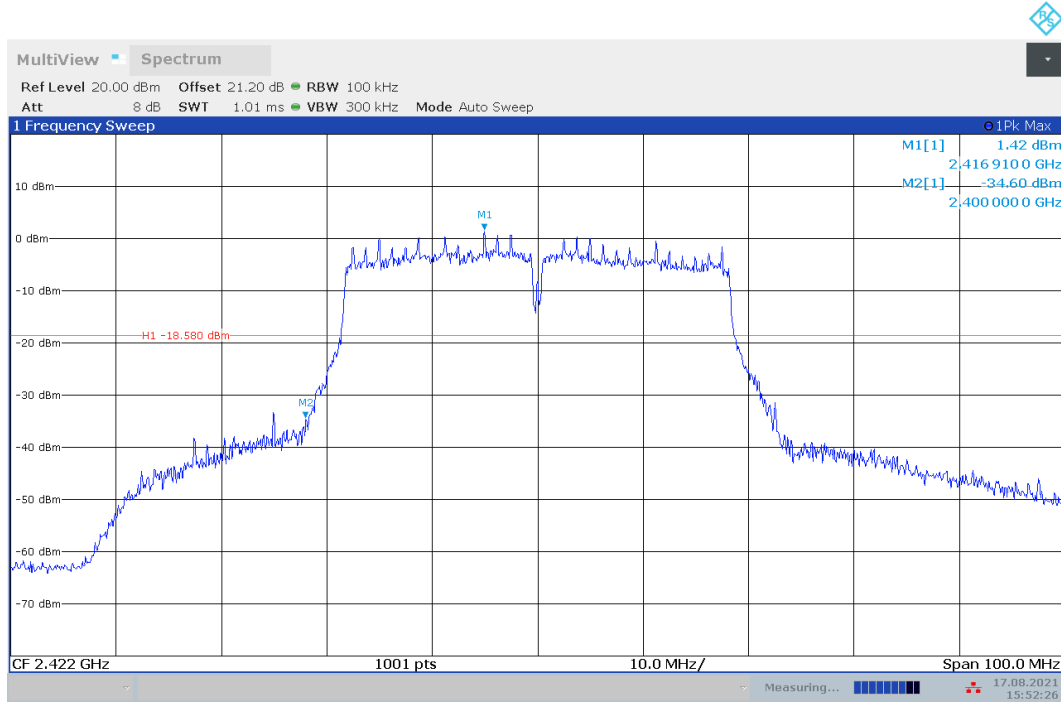


Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, Center Frequency)

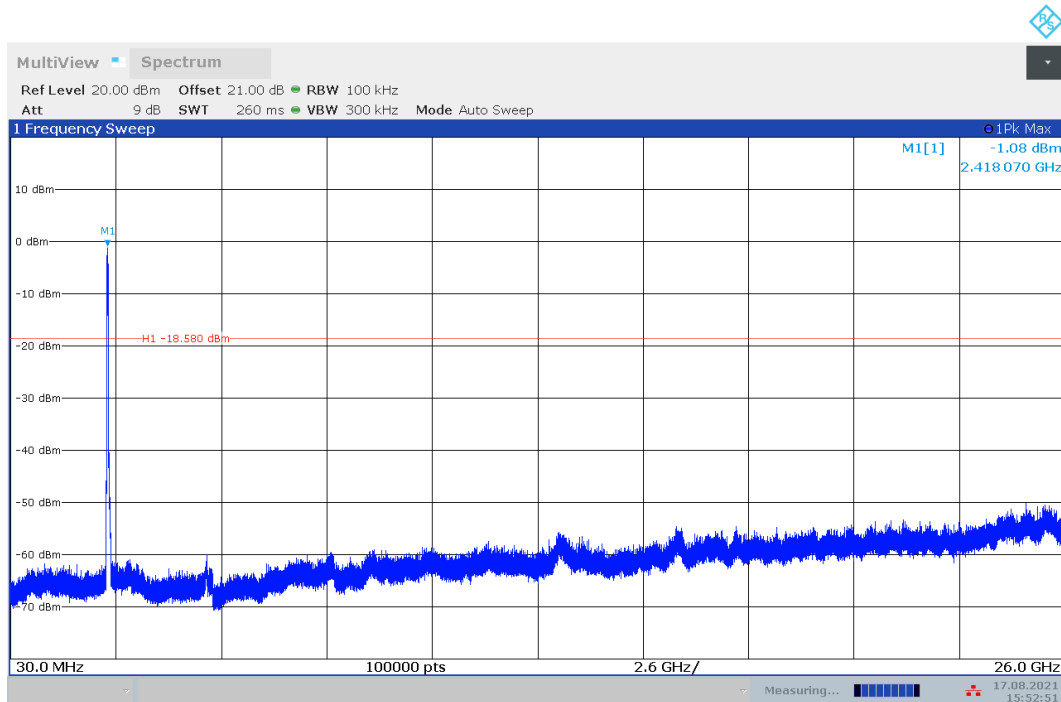


Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 30 MHz-26 GHz)

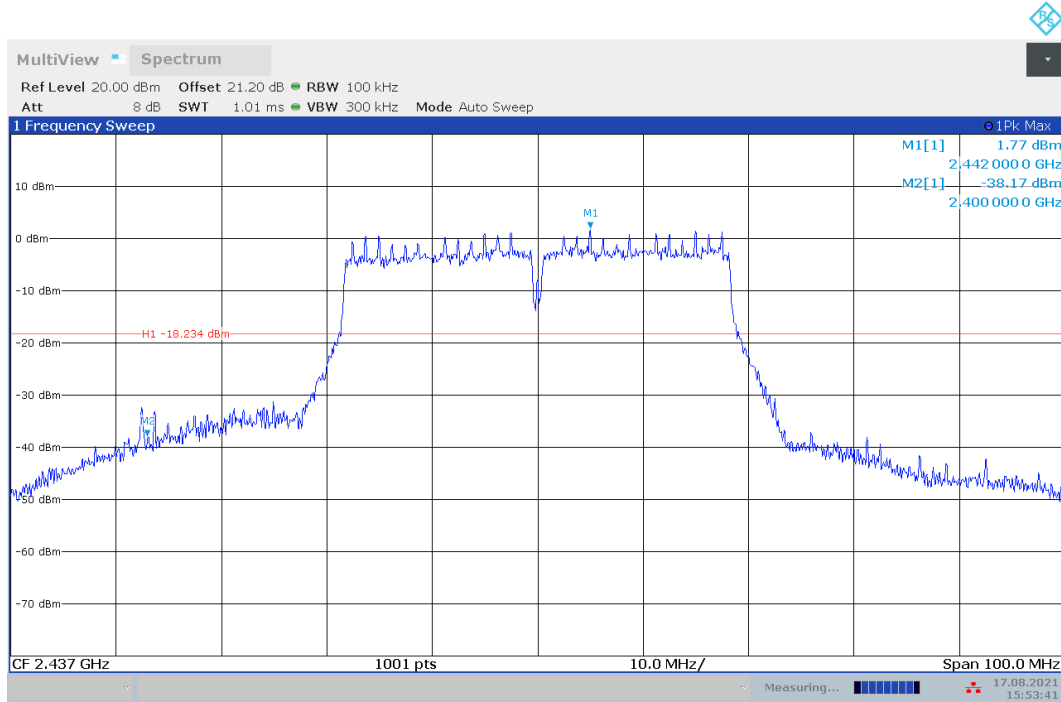


Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, Center Frequency)

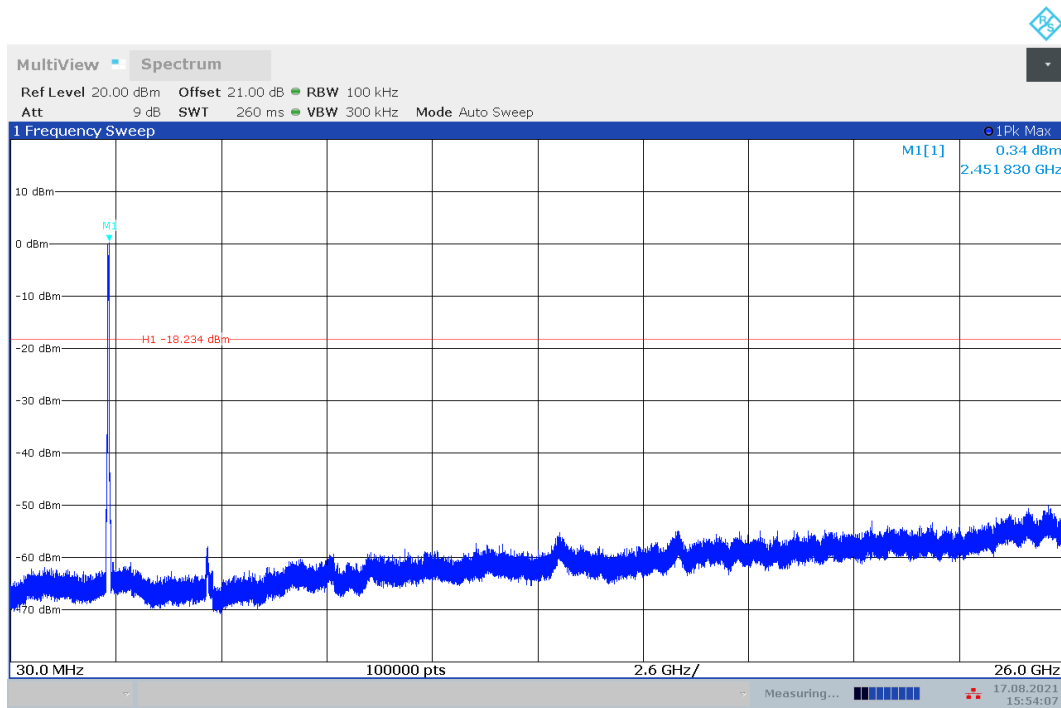


Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 30 MHz-26 GHz)

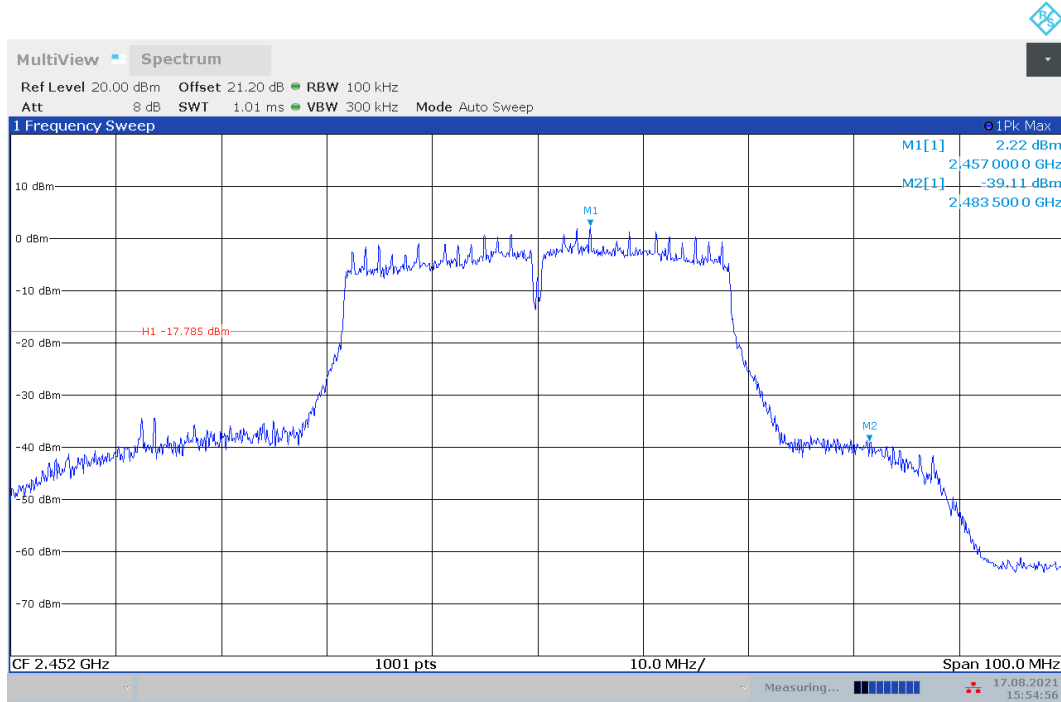


Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, Center Frequency)

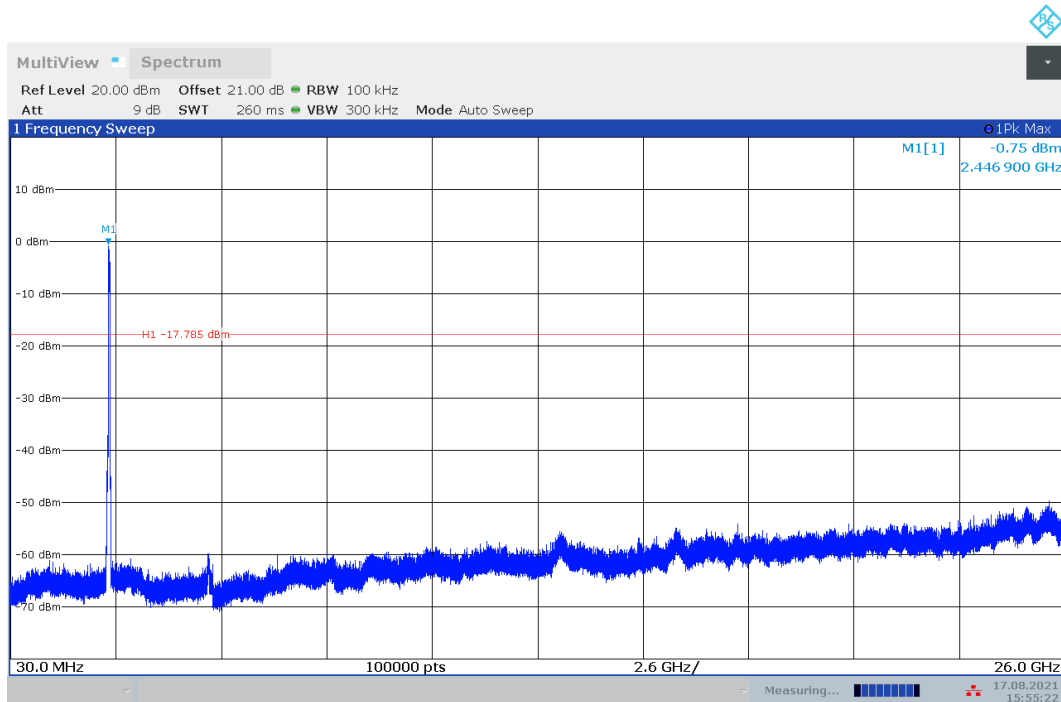


Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 30 MHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

EUT ID: EUT1

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.6.2.1	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.6.2.3	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.A.6.2.5	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.6	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.31GHz~2.43GHz---L	Fig.A.6.2.7	P
	9	2.45GHz~2.50GHz---H	Fig.A.6.2.8	P

Conclusion: Pass

Note1:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

Note2: The measurement results showed here are worst cases.

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17853.500	56.51	-25.50	46.70	35.31	74.00	17.49	V
14374.500	51.69	-28.40	42.30	37.79	74.00	22.31	V
4824.000	50.98	-37.50	33.10	55.28	74.00	23.02	H
12131.500	47.75	-31.60	39.00	40.35	74.00	26.25	H
9818.000	45.08	-33.50	38.00	40.58	74.00	28.92	V
2378.900	56.91	-20.00	28.10	48.91	74.00	17.09	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17850.000	56.87	-25.50	46.70	35.67	74.00	17.13	V
14397.000	52.23	-28.60	42.50	38.33	74.00	21.77	H
4874.000	48.97	-37.20	33.20	52.97	74.00	25.03	H
12795.500	47.66	-30.70	39.10	39.16	74.00	26.34	H
8998.000	45.17	-33.30	38.20	40.27	74.00	28.83	H
7257.000	43.50	-35.00	36.50	41.90	74.00	30.50	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17894.000	56.64	-25.50	46.70	35.44	74.00	17.36	V
14292.000	51.82	-28.40	42.30	37.92	74.00	22.18	H
4924.000	48.19	-37.10	33.30	51.99	74.00	25.81	H
12317.500	47.87	-31.10	38.90	40.07	74.00	26.13	V
8321.500	45.26	-35.00	37.60	42.66	74.00	28.74	V
2485.100	57.53	-20.00	28.30	49.23	74.00	16.47	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.000	56.84	-25.50	46.70	35.64	74.00	17.16	V
14397.500	52.06	-28.60	42.50	38.16	74.00	21.94	H
12907.500	47.90	-30.50	39.20	39.20	74.00	26.10	V
8461.000	45.49	-34.40	37.80	42.09	74.00	28.51	H
7550.500	43.49	-35.00	36.90	41.69	74.00	30.51	V
2388.600	59.65	-20.00	28.10	51.65	74.00	14.35	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17888.500	57.71	-25.50	46.70	36.51	74.00	16.29	H
14402.000	51.93	-28.60	42.50	38.03	74.00	22.07	V
12855.000	48.35	-30.70	39.10	39.85	74.00	25.65	V
9387.500	45.04	-32.90	37.90	40.04	74.00	28.96	H
7525.000	44.29	-34.50	36.80	41.99	74.00	29.71	H
4873.000	43.80	-37.20	33.20	47.80	74.00	30.20	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17954.000	56.67	-25.50	46.70	35.47	74.00	17.33	H
14370.000	51.96	-28.40	42.30	38.06	74.00	22.04	H
12966.500	47.74	-30.50	39.20	39.04	74.00	26.26	H
9105.000	45.37	-33.80	38.10	40.97	74.00	28.63	V
7906.500	44.10	-34.90	37.10	41.90	74.00	29.90	V
2485.100	60.15	-20.00	28.30	51.85	74.00	13.85	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17922.000	57.18	-25.50	46.70	35.98	74.00	16.82	V
14282.000	52.13	-28.40	42.30	38.23	74.00	21.87	V
12965.000	48.09	-30.50	39.20	39.39	74.00	25.91	V
9512.000	45.59	-33.20	37.90	40.89	74.00	28.41	V
7720.500	43.58	-34.80	37.00	41.48	74.00	30.42	V
2389.500	63.64	-20.00	28.10	55.64	74.00	10.36	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.500	57.73	-25.50	46.70	36.53	74.00	16.27	H
14700.500	51.68	-28.30	41.30	38.68	74.00	22.32	V
12646.000	47.60	-30.50	39.10	39.00	74.00	26.40	V
4871.500	45.71	-37.20	33.20	49.71	74.00	28.29	H
8383.500	45.70	-34.50	37.70	42.50	74.00	28.30	H
7855.000	44.48	-34.90	37.10	42.28	74.00	29.52	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.500	57.48	-25.50	46.70	36.28	74.00	16.52	H
14612.500	51.53	-27.30	41.90	36.93	74.00	22.47	H
12937.000	48.11	-30.50	39.20	39.41	74.00	25.89	H
9422.500	45.51	-32.90	37.90	40.51	74.00	28.49	V
7847.500	44.27	-34.90	37.10	42.07	74.00	29.73	V
2485.000	65.58	-20.00	28.30	57.28	74.00	8.42	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.000	57.13	-25.50	46.70	35.93	74.00	16.87	V
14426.000	51.90	-28.60	42.50	38.00	74.00	22.10	H
12666.500	47.69	-30.50	39.10	39.09	74.00	26.31	H
9467.000	45.44	-32.90	37.90	40.44	74.00	28.56	V
7826.500	43.73	-35.10	37.00	41.83	74.00	30.27	V
2389.800	60.60	-20.00	28.10	52.60	74.00	13.40	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.500	56.93	-25.50	46.70	35.73	74.00	17.07	H
14504.000	51.70	-28.60	42.50	37.80	74.00	22.30	H
12779.500	47.81	-30.70	39.10	39.31	74.00	26.19	H
9737.000	45.45	-33.00	38.00	40.45	74.00	28.55	H
7982.000	44.64	-34.80	37.10	42.34	74.00	29.36	H
4876.000	41.38	-37.20	33.20	45.38	74.00	32.62	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17950.500	57.05	-25.50	46.70	35.85	74.00	16.95	V
14272.500	52.29	-28.40	42.30	38.39	74.00	21.71	H
12025.000	48.25	-31.50	39.10	40.65	74.00	25.75	V
9585.500	45.54	-33.10	38.00	40.64	74.00	28.46	V
7800.500	44.00	-35.10	37.00	42.10	74.00	30.00	V
2488.300	64.80	-20.00	28.30	56.50	74.00	9.20	H

Average
802.11b
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4824.000	48.08	-37.50	33.10	52.38	54.00	5.92	H
17990.500	45.44	-25.50	46.70	24.24	54.00	8.56	V
14387.500	39.94	-28.40	42.30	26.04	54.00	14.06	H
12746.500	36.00	-30.50	39.10	27.40	54.00	18.00	H
8978.000	33.40	-33.30	38.20	28.50	54.00	20.60	H
2390.000	45.00	-20.00	28.10	37.00	54.00	9.00	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4874.000	46.10	-37.20	33.20	50.10	54.00	7.90	H
17996.000	45.71	-25.50	46.70	24.51	54.00	8.29	V
14392.000	40.10	-28.40	42.30	26.20	54.00	13.90	H
12633.500	36.13	-31.00	39.00	28.23	54.00	17.87	V
9543.000	33.38	-33.20	37.90	28.68	54.00	20.62	H
7983.000	32.01	-34.80	37.10	29.71	54.00	21.99	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.500	45.53	-25.50	46.70	24.33	54.00	8.47	H
4924.000	45.27	-37.10	33.30	49.07	54.00	8.73	H
14408.500	40.26	-28.60	42.50	26.36	54.00	13.74	H
12663.500	36.07	-30.50	39.10	27.47	54.00	17.93	V
8998.000	33.54	-33.30	38.20	28.64	54.00	20.46	H
2487.400	46.23	-20.00	28.30	37.93	54.00	7.77	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.000	45.67	-25.50	46.70	24.47	54.00	8.33	H
14364.000	40.08	-28.40	42.30	26.18	54.00	13.92	V
12670.000	35.82	-30.50	39.10	27.22	54.00	18.18	H
9521.500	33.34	-33.20	37.90	28.64	54.00	20.66	H
7982.000	32.09	-34.80	37.10	29.79	54.00	21.91	V
2389.900	47.64	-20.00	28.10	39.64	54.00	6.36	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.000	45.57	-25.50	46.70	24.37	54.00	8.43	H
14373.500	40.11	-28.40	42.30	26.21	54.00	13.89	V
12678.000	35.95	-30.50	39.10	27.35	54.00	18.05	V
8989.000	33.60	-33.30	38.20	28.70	54.00	20.40	V
7914.000	32.08	-34.90	37.10	29.88	54.00	21.92	V
4874.000	31.99	-37.20	33.20	35.99	54.00	22.01	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.000	45.43	-25.50	46.70	24.23	54.00	8.57	V
14386.000	40.13	-28.40	42.30	26.23	54.00	13.87	V
12648.500	36.11	-30.50	39.10	27.51	54.00	17.89	H
9637.000	33.46	-33.10	38.00	28.56	54.00	20.54	V
7877.500	32.08	-34.90	37.10	29.88	54.00	21.92	H
2485.100	47.29	-20.00	28.30	38.99	54.00	6.71	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.500	45.61	-25.50	46.70	24.41	54.00	8.39	H
14370.500	40.14	-28.40	42.30	26.24	54.00	13.86	H
12915.000	36.24	-30.50	39.20	27.54	54.00	17.76	H
8981.500	33.54	-33.30	38.20	28.64	54.00	20.46	H
4828.500	32.59	-37.50	33.10	36.89	54.00	21.41	H
2389.900	49.47	-20.00	28.10	41.47	54.00	4.53	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.000	45.44	-25.50	46.70	24.24	54.00	8.56	H
14497.500	40.02	-28.60	42.50	26.12	54.00	13.98	H
12637.500	36.14	-31.00	39.00	28.24	54.00	17.86	H
9097.500	33.63	-33.80	38.10	29.23	54.00	20.37	H
4870.000	33.55	-37.20	33.20	37.55	54.00	20.45	H
7919.500	32.28	-34.90	37.10	30.08	54.00	21.72	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.000	45.64	-25.50	46.70	24.44	54.00	8.36	V
14405.000	39.98	-28.60	42.50	26.08	54.00	14.02	H
12644.000	35.85	-31.00	39.00	27.95	54.00	18.15	V
9082.500	33.53	-33.80	38.10	29.13	54.00	20.47	H
7934.000	32.27	-34.80	37.10	29.97	54.00	21.73	V
2485.100	51.58	-20.00	28.30	43.28	54.00	2.42	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.500	45.39	-25.50	46.70	24.19	54.00	8.61	V
14488.000	40.19	-28.60	42.50	26.29	54.00	13.81	V
12754.000	36.01	-30.50	39.10	27.41	54.00	17.99	H
8985.500	33.59	-33.30	38.20	28.69	54.00	20.41	H
7918.500	32.31	-34.90	37.10	30.11	54.00	21.69	H
2389.600	49.14	-20.00	28.10	41.14	54.00	4.86	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.000	45.79	-25.50	46.70	24.59	54.00	8.21	H
14390.500	40.35	-28.40	42.30	26.45	54.00	13.65	H
12631.000	35.88	-31.00	39.00	27.98	54.00	18.12	H
8991.500	33.71	-33.30	38.20	28.81	54.00	20.29	H
7834.000	32.32	-35.10	37.00	30.42	54.00	21.68	H
4882.500	30.98	-37.20	33.20	34.98	54.00	23.02	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.500	45.82	-25.50	46.70	24.62	54.00	8.18	H
14419.500	40.49	-28.60	42.50	26.59	54.00	13.51	H
12973.000	36.30	-30.50	39.20	27.60	54.00	17.70	V
8983.500	34.01	-33.30	38.20	29.11	54.00	19.99	H
7585.500	32.38	-35.00	36.90	30.58	54.00	21.62	V
2485.000	52.73	-20.00	28.30	44.43	54.00	1.27	H

Test graphs as below:

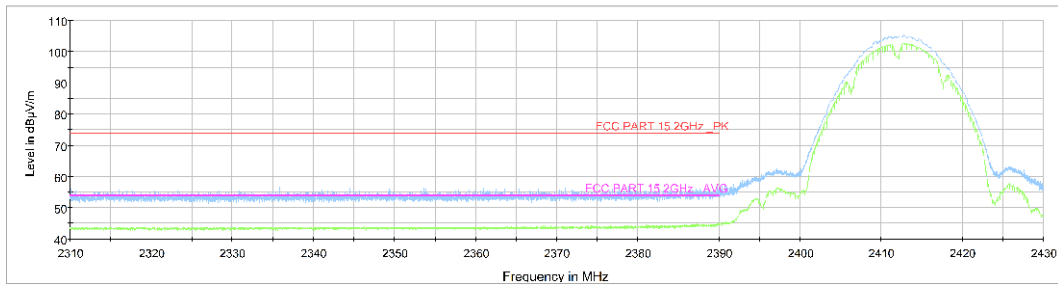


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.45GHz

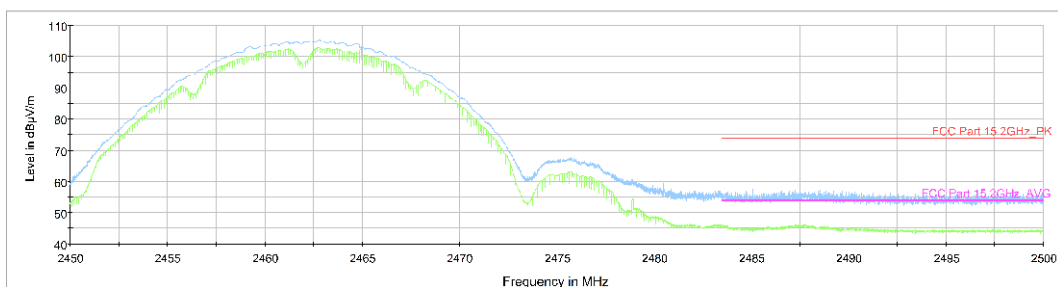


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

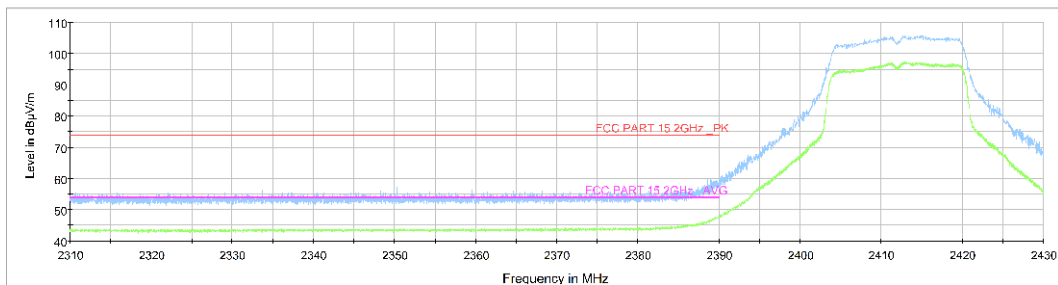


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.45GHz

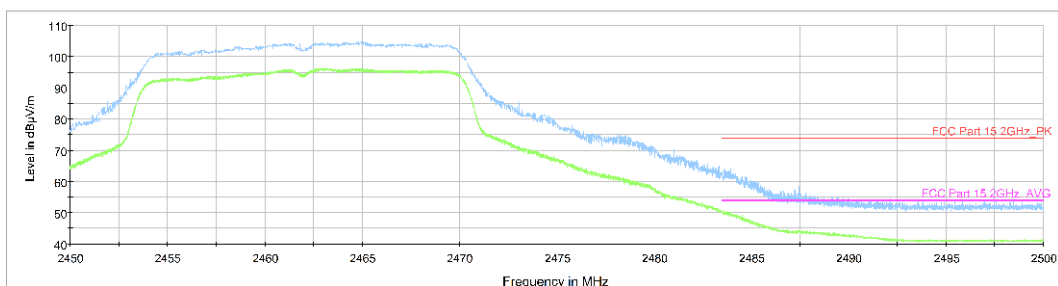


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

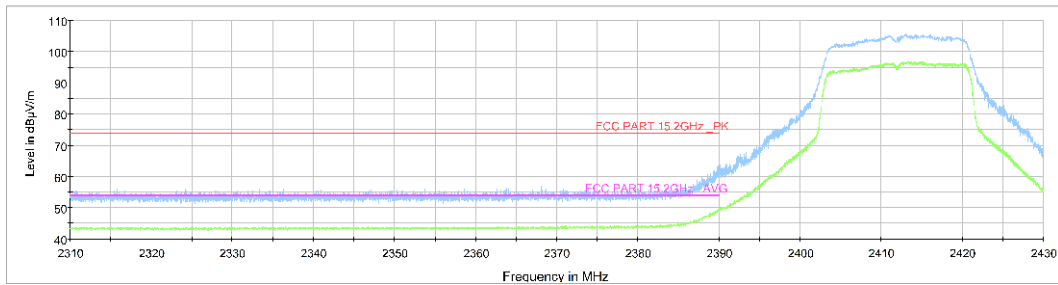


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz

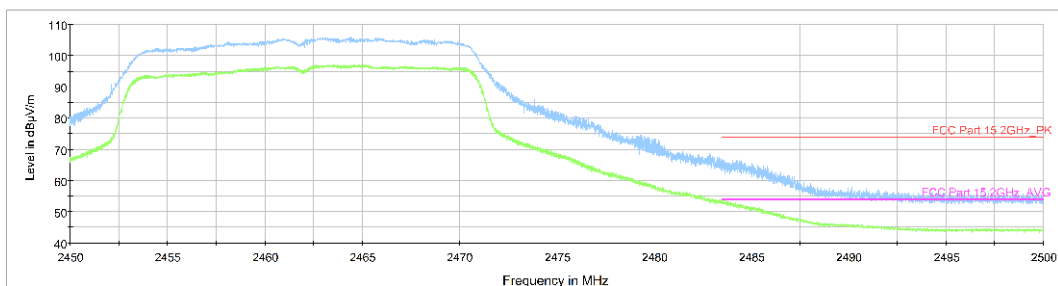


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

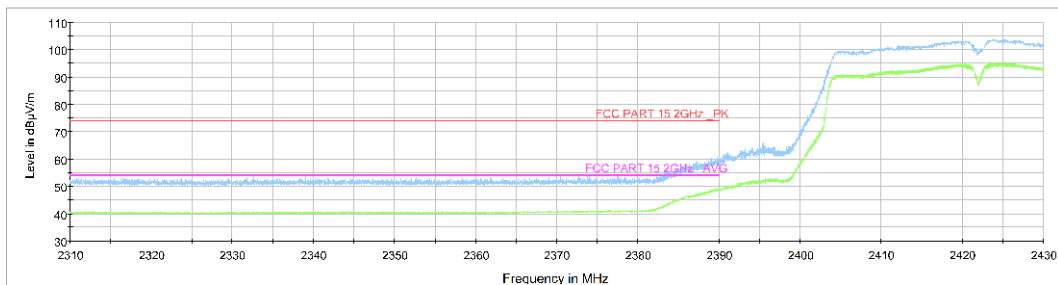


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.45GHz

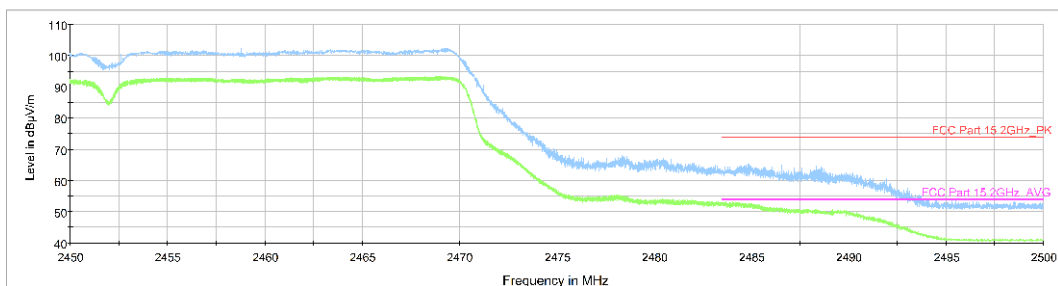


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

EUT ID: EUT1

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

Result for Traffic:

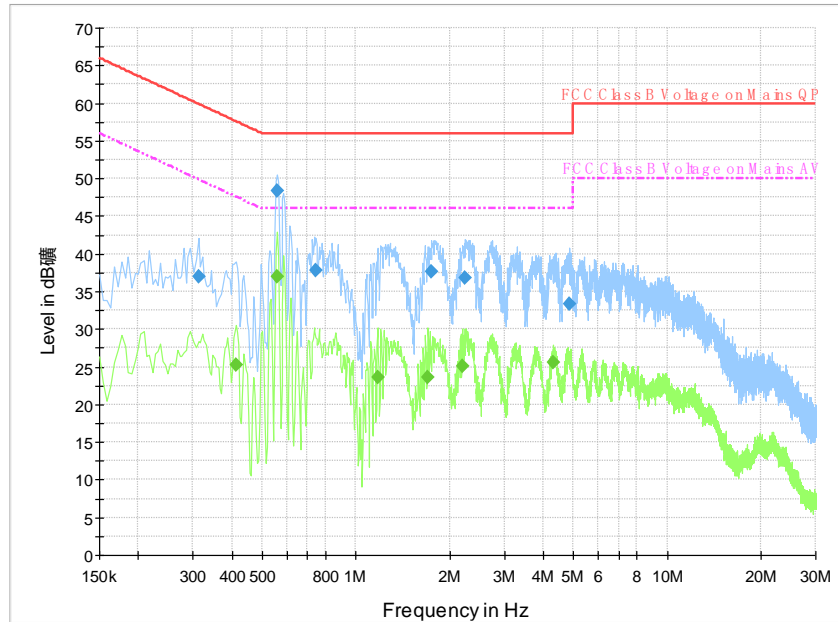


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.312000	36.9	1000.0	9.000	On	L1	20.0	23.0	59.9
0.559500	48.4	1000.0	9.000	On	L1	19.9	7.6	56.0
0.744000	37.9	1000.0	9.000	On	L1	19.7	18.1	56.0
1.752000	37.7	1000.0	9.000	On	L1	19.5	18.3	56.0
2.251500	36.9	1000.0	9.000	On	L1	19.5	19.1	56.0
4.852500	33.3	1000.0	9.000	On	L1	19.6	22.7	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.411000	25.3	1000.0	9.000	On	L1	19.9	22.3	47.6
0.559500	37.0	1000.0	9.000	On	L1	19.9	9.0	46.0
1.176000	23.6	1000.0	9.000	On	L1	19.5	22.4	46.0
1.707000	23.5	1000.0	9.000	On	L1	19.5	22.5	46.0
2.202000	25.1	1000.0	9.000	On	L1	19.5	20.9	46.0
4.321500	25.5	1000.0	9.000	On	L1	19.6	20.5	46.0

Note2: The measurement results showed here are worst cases.

Result for Idle:

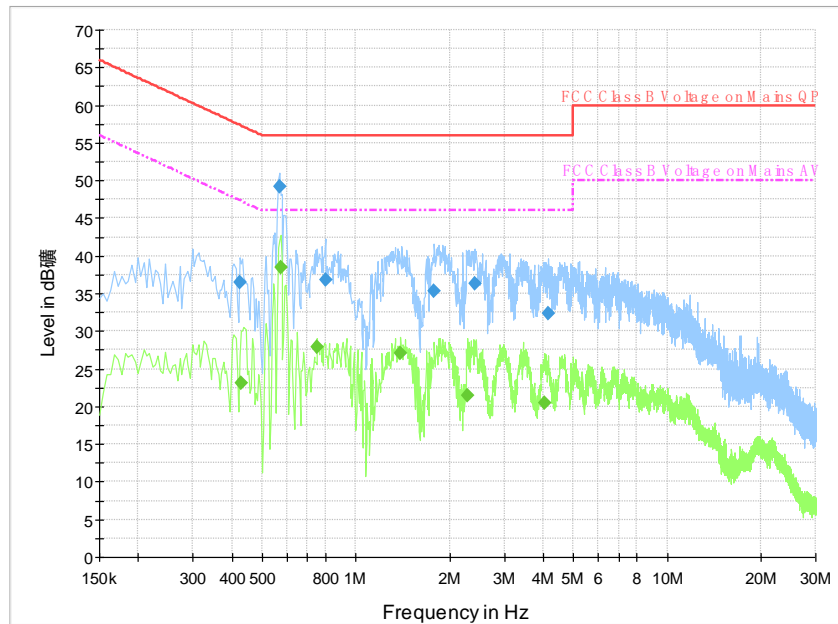


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.424500	36.4	1000.0	9.000	On	L1	19.9	21.0	57.4
0.568500	49.2	1000.0	9.000	On	L1	19.8	6.8	56.0
0.798000	36.8	1000.0	9.000	On	L1	19.7	19.2	56.0
1.788000	35.3	1000.0	9.000	On	L1	19.5	20.7	56.0
2.404500	36.3	1000.0	9.000	On	L1	19.5	19.7	56.0
4.146000	32.4	1000.0	9.000	On	L1	19.6	23.6	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.429000	23.0	1000.0	9.000	On	L1	19.9	24.2	47.3
0.573000	38.4	1000.0	9.000	On	N	19.9	7.6	46.0
0.753000	27.8	1000.0	9.000	On	L1	19.7	18.2	46.0
1.392000	27.1	1000.0	9.000	On	L1	19.5	18.9	46.0
2.278500	21.4	1000.0	9.000	On	L1	19.5	24.6	46.0
4.047000	20.5	1000.0	9.000	On	L1	19.6	25.5	46.0

Note2: The measurement results showed here are worst cases.

ANNEX B: Accreditation Certificate



END OF REPORT