



No. I22Z60033-SEM01

For

TCL Communication Ltd.

GSM/UMTS/LTE Mobile phone

Model Name: 4058W

with

Hardware Version: 03

Software Version: KE26

FCC ID: 2ACCJN059

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

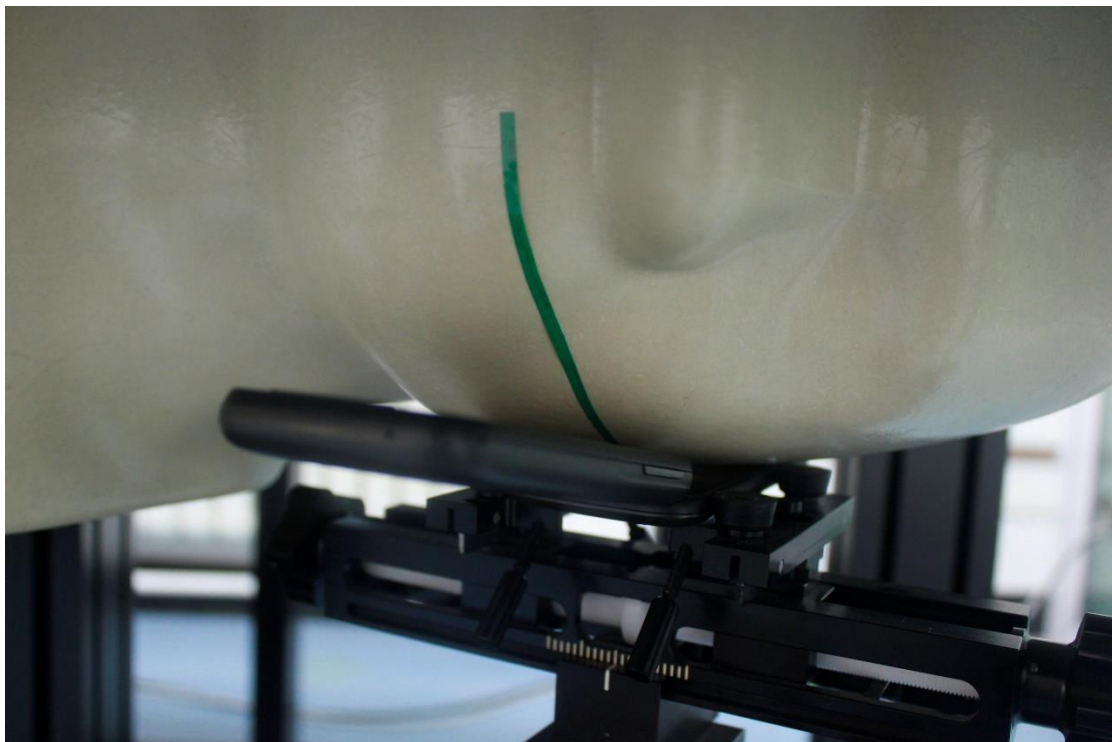

Picture 2: Left Head Touch Cheek Position

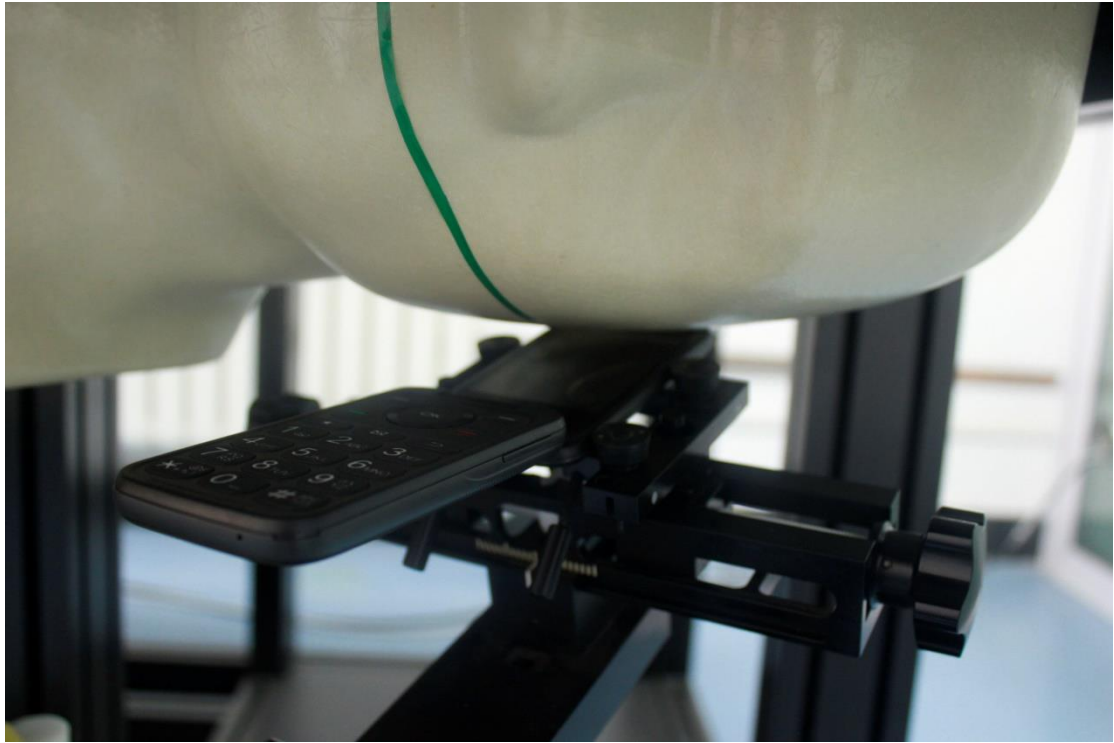

Picture 3: Left Head Tilt 15° Position

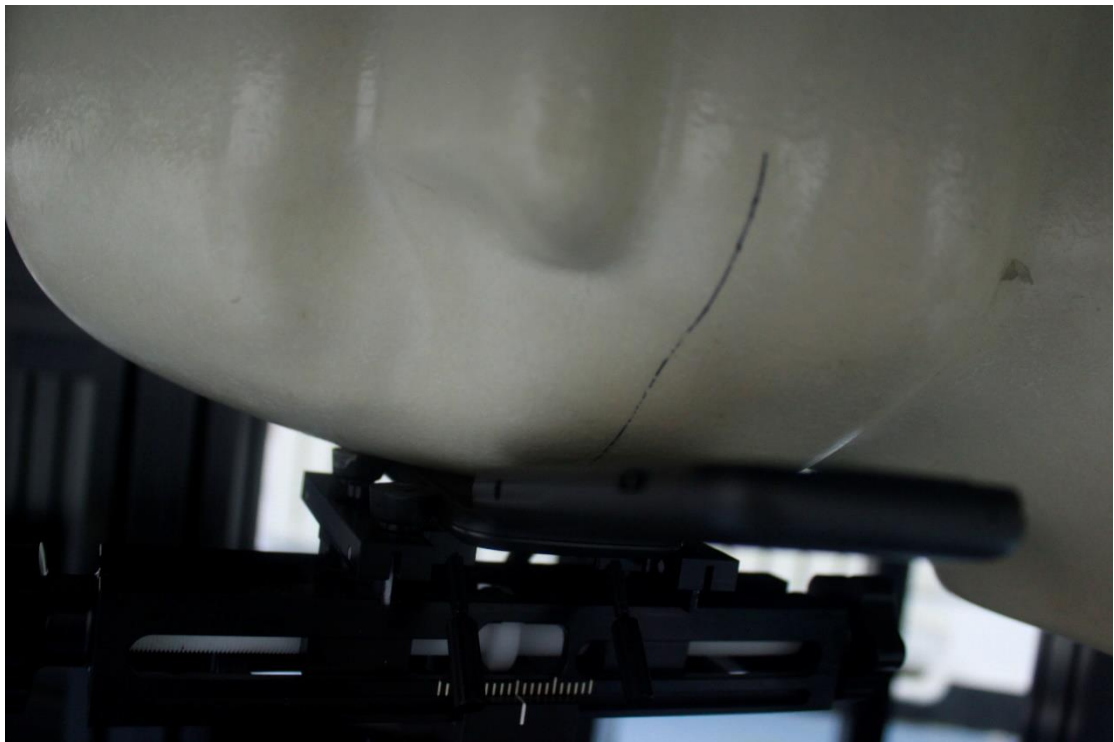

Picture 4: Right Head Touch Cheek Position




Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 12 test positions all with the distance =10/15mm between the EUT and the phantom bottom:



Picture 6: Front 10mm

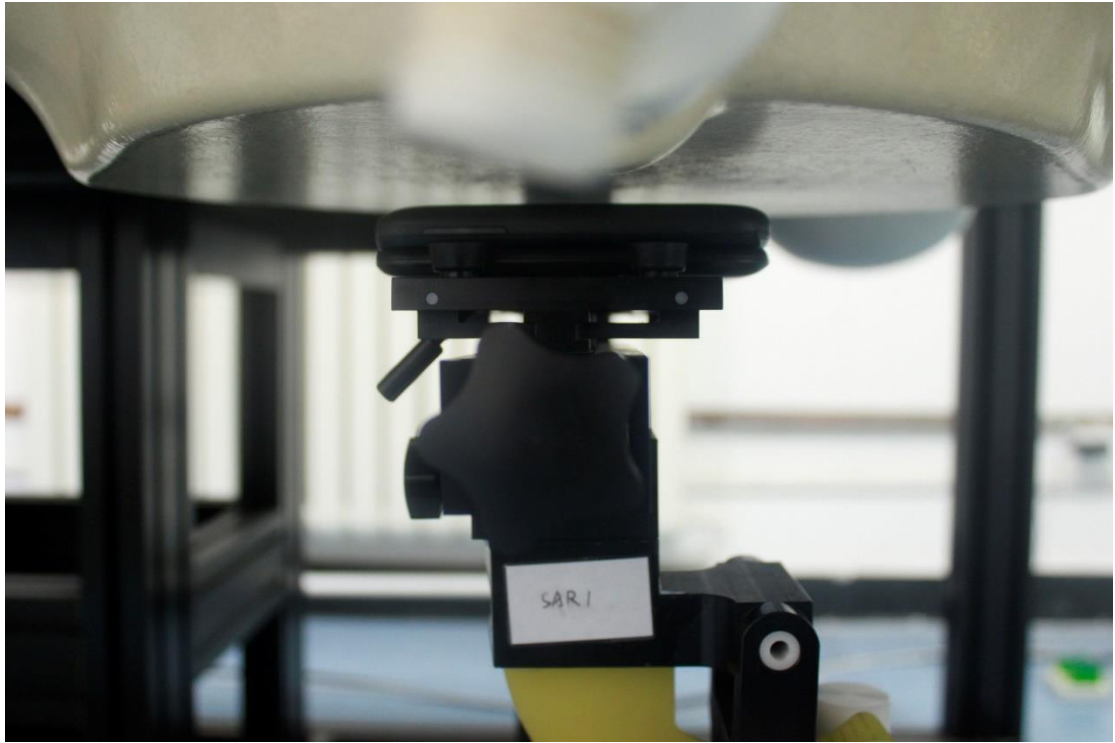

Picture 7: Rear 10mm



Picture 8: Rear 10mm Unfold



Picture 9: Left 10mm



Picture 10: Right 10mm



Picture 11: Top 10mm




Picture 12: Bottom 10mm




Picture 13: Front 15mm



Picture 14: Rear 15mm

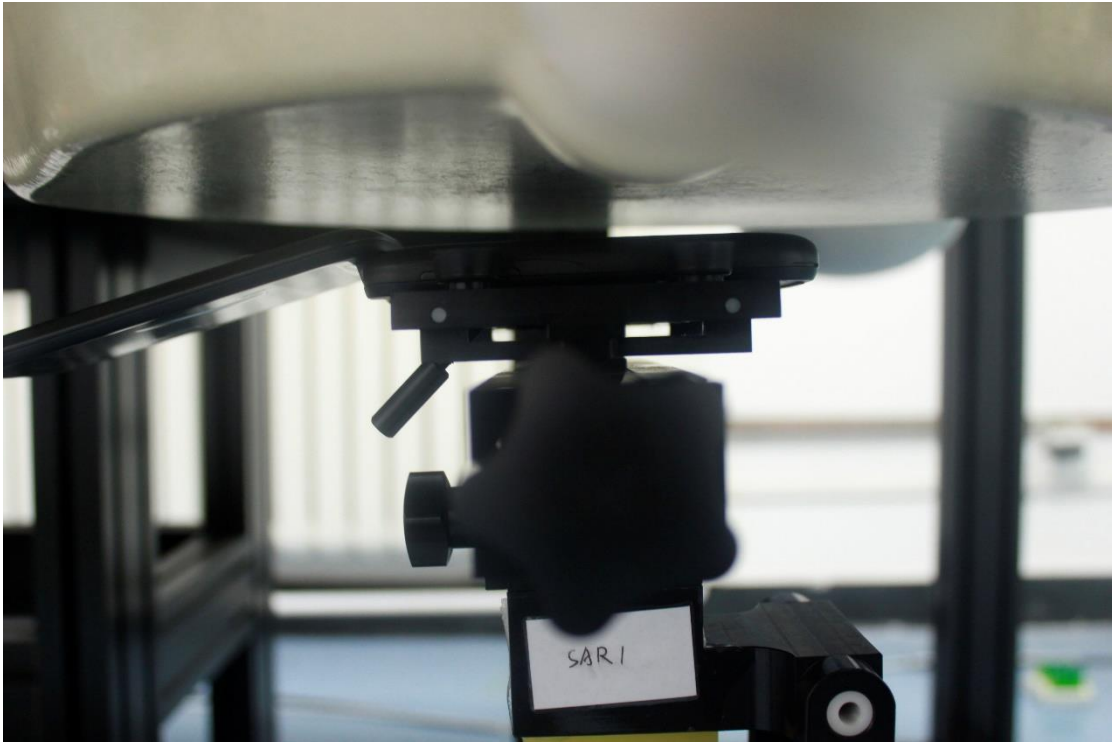

Picture 15: Rear 15mm Unfold

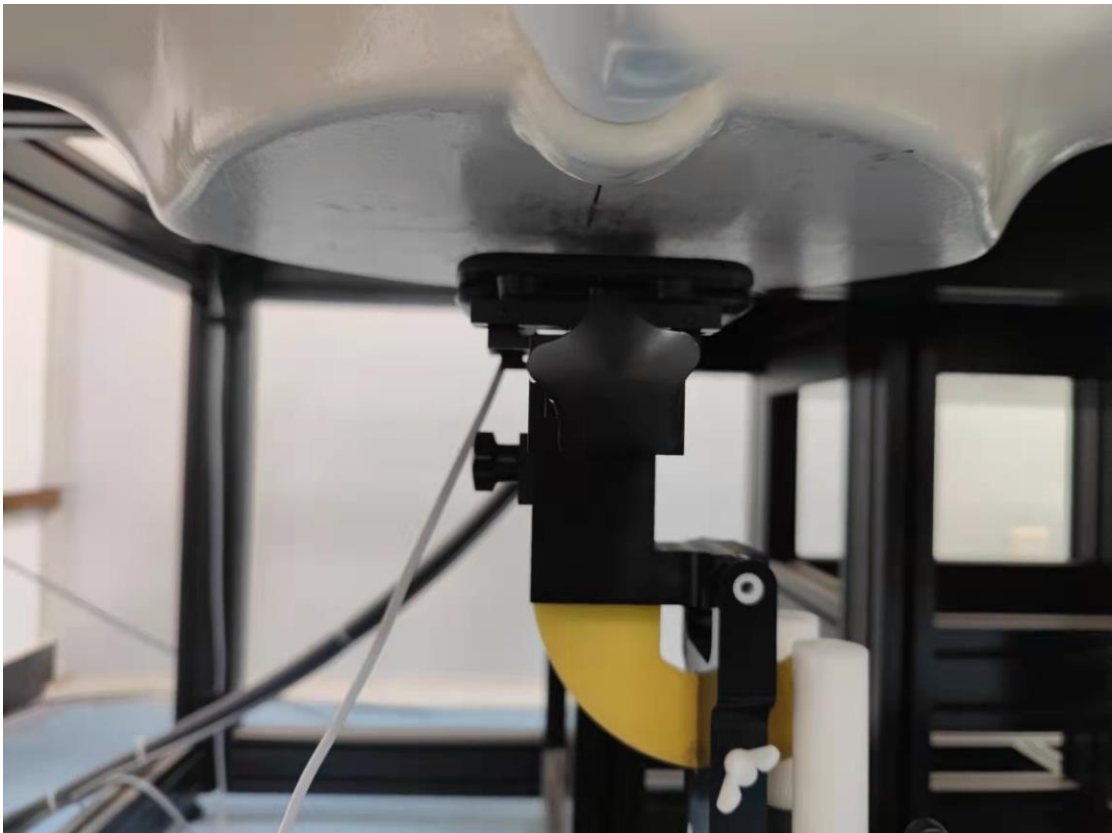

Picture 16: Rear 10mm with headset



Picture 17: Rear 15mm with headset