



# FCC PART 15C TEST REPORT No.I21Z62705-IOT03

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE mobile phone**

**4058R, 4058C**

With

**FCC ID: 2ACCJN060**

**Hardware Version: 03**

**Software Version: NH35**

**Issued Date: 2022-01-28**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z62705-IOT03	Rev.0	1st edition	2022-01-28

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE.....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
3.4. GENERAL DESCRIPTION.....	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. TEST RESULTS .....</b>	<b>9</b>
5.1. SUMMARY OF TEST RESULTS .....	9
5.2. STATEMENTS.....	9
5.3. EXPLANATION OF RE-USE OF TEST DATA .....	9
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
7.1. MAXIMUM OUTPUT POWER.....	11
7.2. PEAK POWER SPECTRAL DENSITY.....	11
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	11
7.4. BAND EDGES COMPLIANCE.....	11
7.5. TRANSMITTER SPURIOUS EMISSION .....	11
7.6. AC POWER-LINE CONDUCTED EMISSION .....	11
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>12</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>13</b>
A.2.1. PEAK OUTPUT POWER-CONDUCTED(NORMAL).....	13



**A.3. PEAK POWER SPECTRAL DENSITY ..... 15**

**A.4. DTS 6-DB SIGNAL BANDWIDTH ..... 22**

**A.5. BAND EDGES COMPLIANCE ..... 29**

**A.5.1 BAND EDGES COMPLIANCE(CONDUCTED)..... 29**

**A.5.2 BAND EDGES COMPLIANCE(RADIATED)..... 34**

**A.6. TRANSMITTER SPURIOUS EMISSION..... 41**

    A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED ..... 41

    A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED ..... 94

**A.7. AC POWER-LINE CONDUCTED EMISSION ..... 106**

**ANNEX B: EUT PARAMETERS.....110**

**ANNEX C: ACCREDITATION CERTIFICATE .....110**

## 1. Test Laboratory

### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191


### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project date


Testing Start Date: 2021-12-15  
Testing End Date: 2022-01-25

### 1.5. Signature




---

Xie Xiuzhen  
(Prepared this test report)



---

Zheng Wei  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model name	4058R, 4058C
FCC ID	2ACCJN060
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	26.70dBm
Power Supply	3.8V

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
UT37a	/	03	NH35
UT36a	/	03	NH35
UT12a	016144000013878	03	NH35

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description	SN	Remarks
AE1	Battery	TLi017C7	inbuilt
AE4	Charger	/	/
AE10	USB Cable	CDA0000187C8	/

##### AE1

Model	TLi017C7
Manufacturer	Veken
Capacity	1780mAh
Voltage	3.8V

##### AE4

Model	UC11
Manufacturer	PUAN

##### AE10

Model	CDA0000187C8
Manufacturer	PUAN

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. General Description

The Equipment under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### 3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor  $k=2$ .

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON	2013
KDB 558074 D01	DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019



## 5. Test Results

### 5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	BR
Peak Power Spectral Density	15.247 (e)	/	BR
Occupied 6dB Bandwidth	15.247 (a)	/	BR
Band Edges Compliance	15.247 (d)	/	BR
Transmitter Spurious Emission - Conducted	15.247 (d)	/	BR
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	BR
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
BR	Re-use test data from basic model report.
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2 The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

### 5.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model 4058R, 4058C (FCC ID: 2ACCJN060) is a variant product of T408DL, 4058L, 4058G (FCC ID: 2ACCJN059), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements of output power and AC powerline conducted emission were performed on this device, all the other test results are derived from test report No.I21Z62522-IOT03.

For detail differences between two models please refer the Declaration of Changes document.

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.8V
Humidity	H nom	20-75%

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	R&S	1 year	2022-05-30
3	Test Receiver	ESCI7	100344	R&S	1 year	2022-02-23
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	R&S	1 year	2022-02-23
2	BiLog Antenna	VULB9163	01223	Schwarzbeck	1 year	2022-03-22
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-03
4	EMI Antenna	3116	2661	ETS-Lindgren	1 year	2022-01-05

## 7. Measurement Uncertainty

### 7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 7.5. Transmitter Spurious Emission

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.18
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

### 7.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

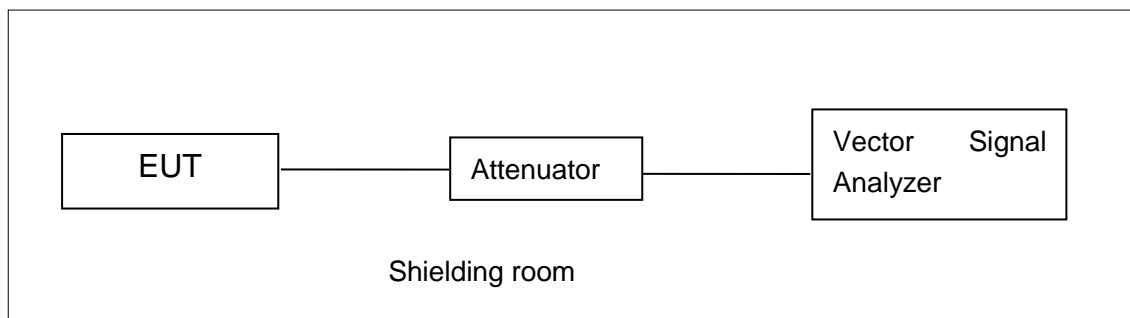


**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

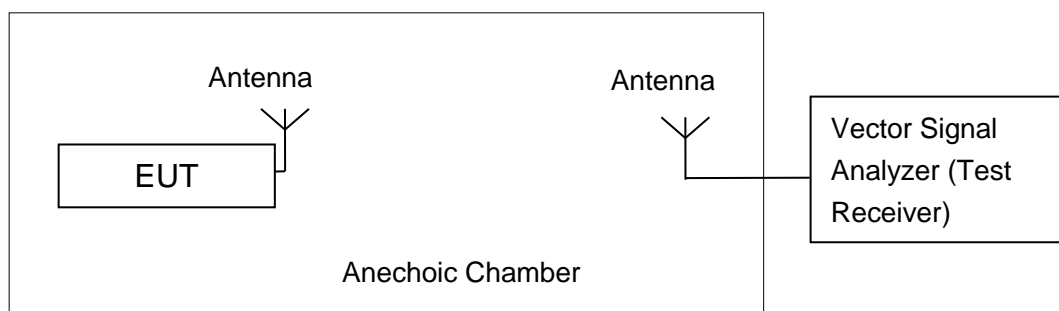

**Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements**

## **A.2. Maximum Output Power**

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.1**

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  [3  $\times$  RBW].
- c) Set span  $\geq$  [3  $\times$  RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**EUT ID: EUT2**

### **A.2.1. Peak Output Power-conducted(normal)**

**Measurement Results:**

#### **802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	21.04	21.32	21.27
802.11g	6	25.42	26.13	25.44

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n(20MHz)	MCS0	25.47	26.70	25.26

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n(40MHz)	MCS0	25.44	25.46	25.48

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%.

The spot check result of average output power is 17.45dBm (802.11n-HT40 MCS0 ch9 prototype result: 18.08dBm).

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**Measurement Results:**

**802.11b/g mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11b	1	Fig.A.3.1	-10.40	<b>P</b>
	6	Fig.A.3.2	-10.50	<b>P</b>
	11	Fig.A.3.3	-10.84	<b>P</b>
802.11g	1	Fig.A.3.4	-9.20	<b>P</b>
	6	Fig.A.3.5	-9.61	<b>P</b>
	11	Fig.A.3.6	-9.86	<b>P</b>

**802.11n-HT20 mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-10.11	<b>P</b>
	6	Fig.A.3.8	-10.29	<b>P</b>
	11	Fig.A.3.9	-10.66	<b>P</b>

**802.11n-HT40 mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT40)	3	Fig.A.3.10	-14.51	<b>P</b>
	6	Fig.A.3.11	-13.63	<b>P</b>
	9	Fig.A.3.12	-13.70	<b>P</b>

**Conclusion: Pass**

Test graphs as below:

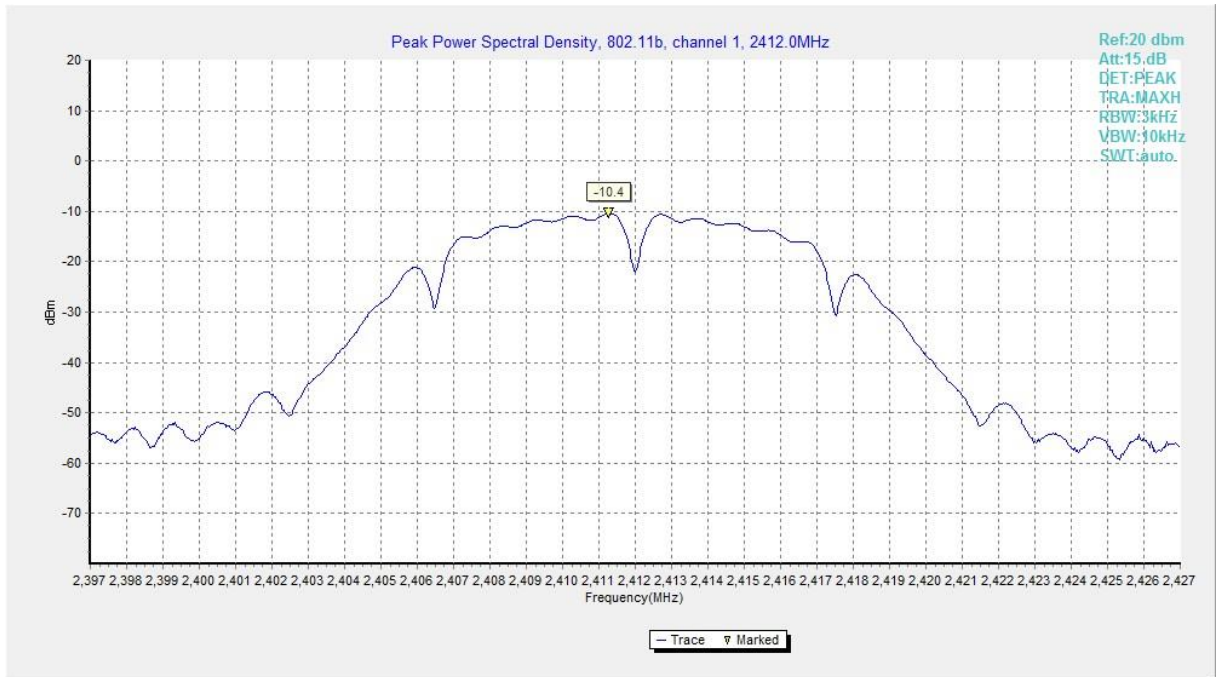


**Fig.A.3.1 Power Spectral Density(802.11b,Ch1)**

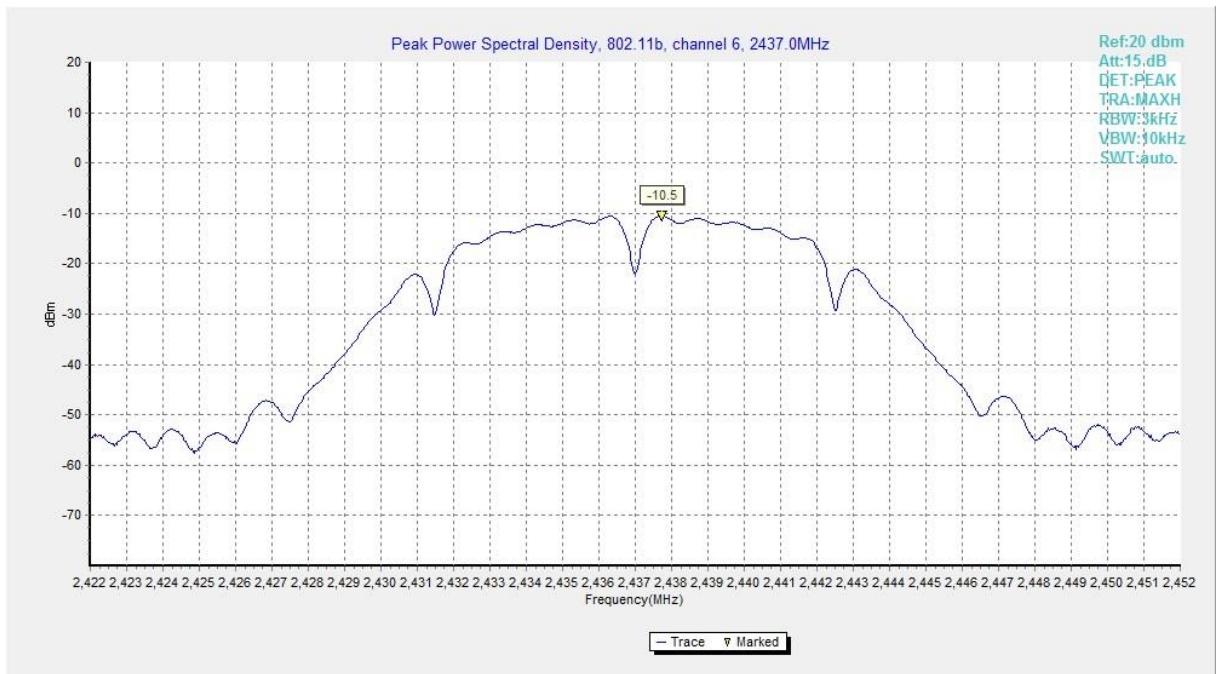


**Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)**




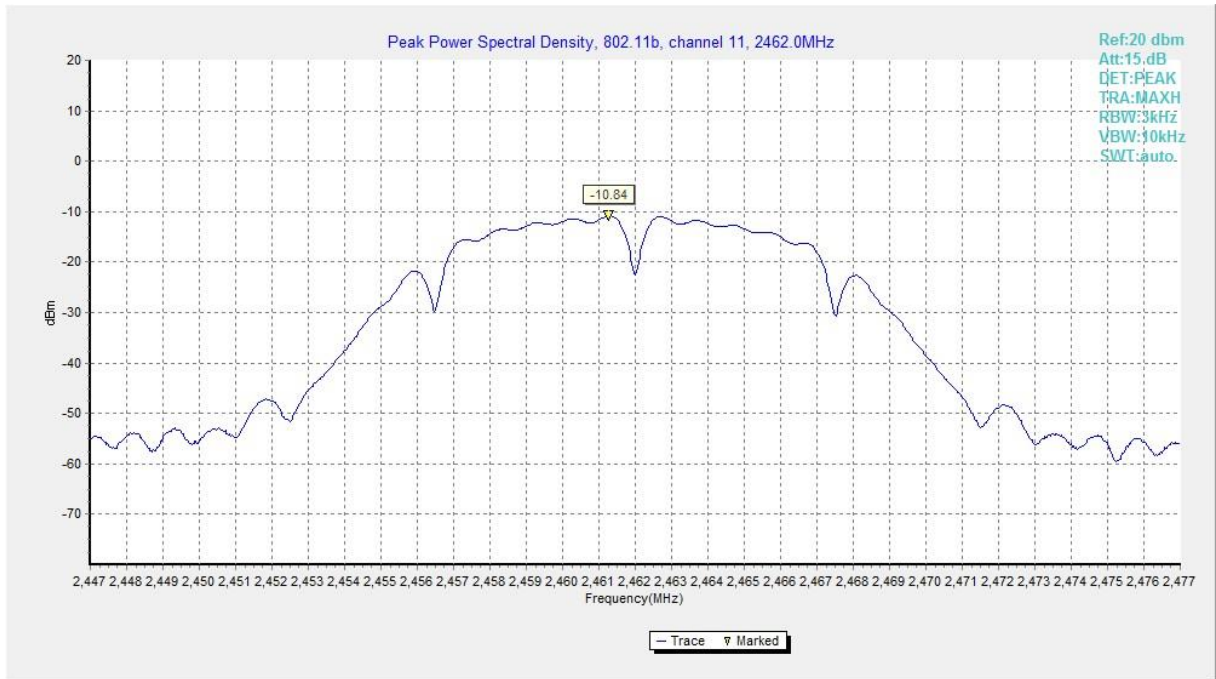

**Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)**

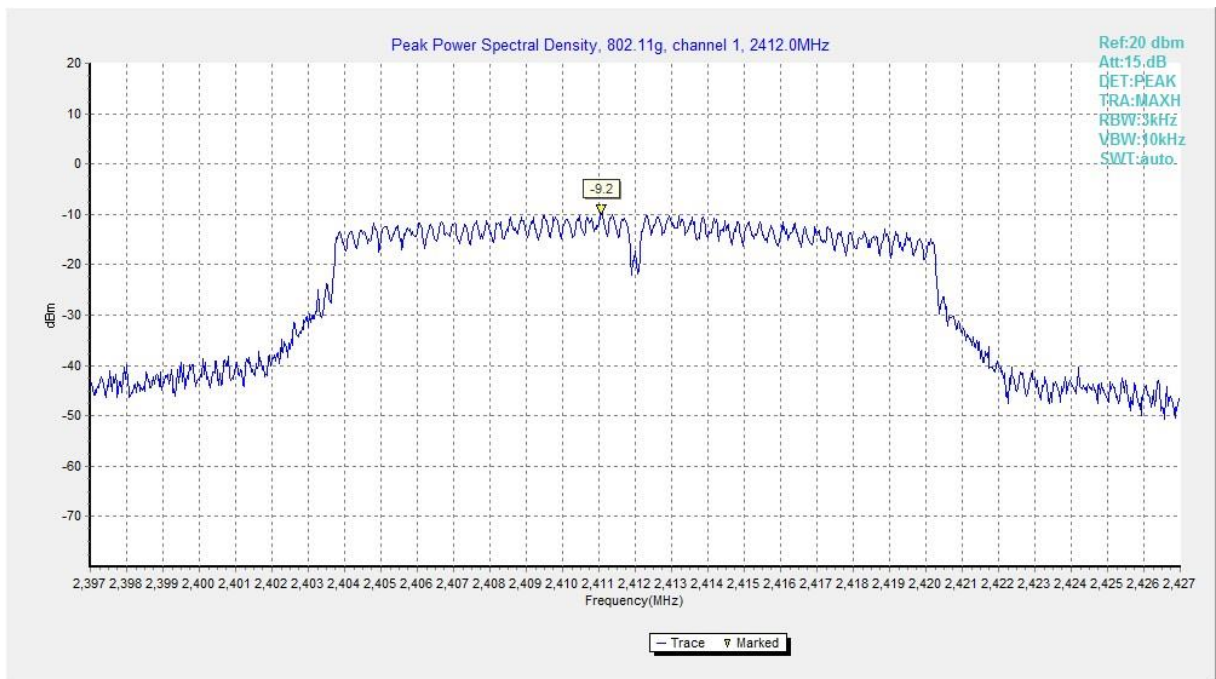


**Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)**

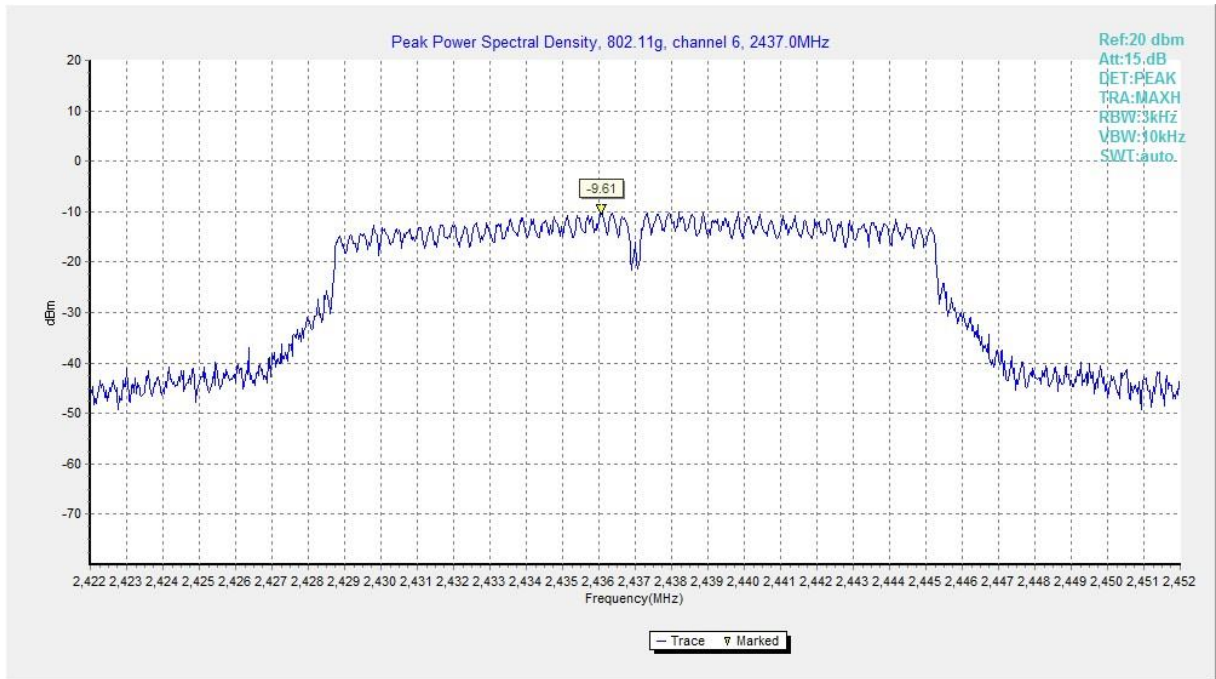


**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**



**Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)**

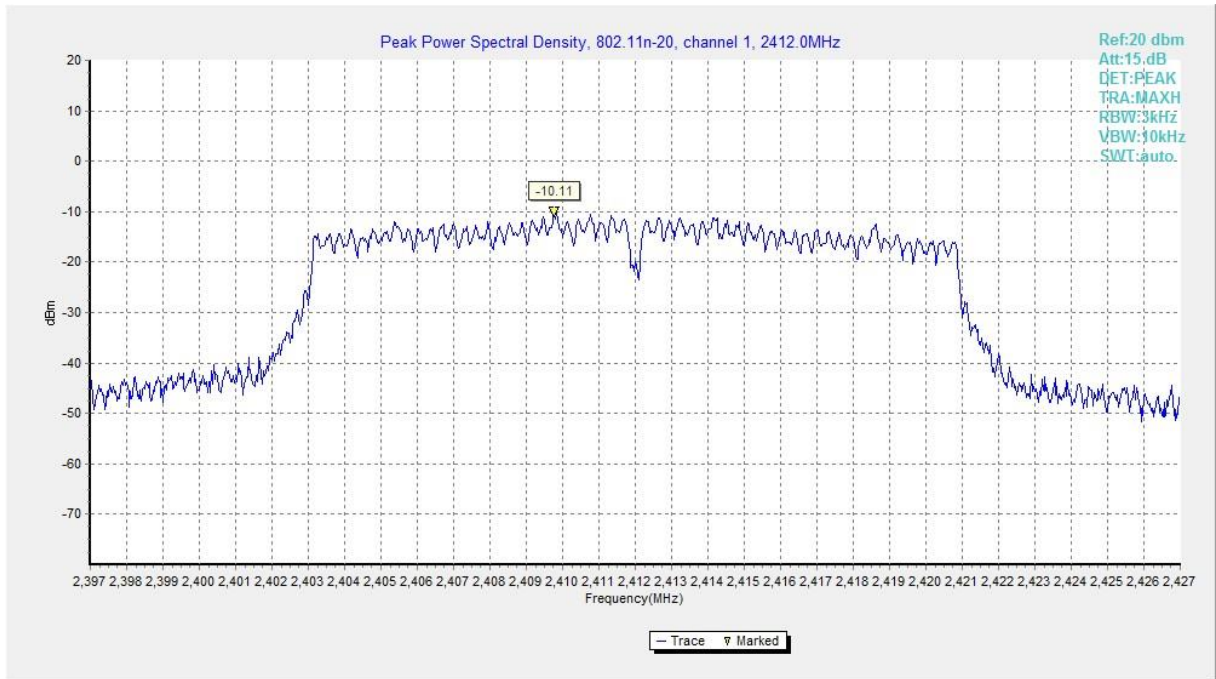

**Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)**

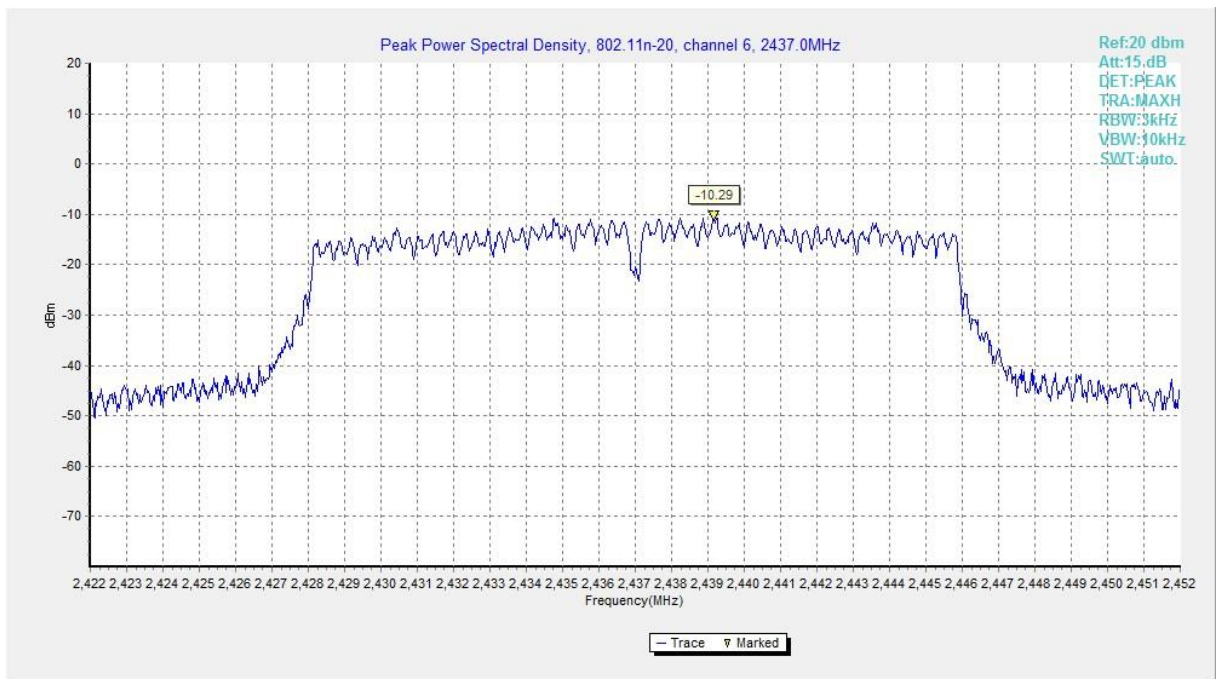

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

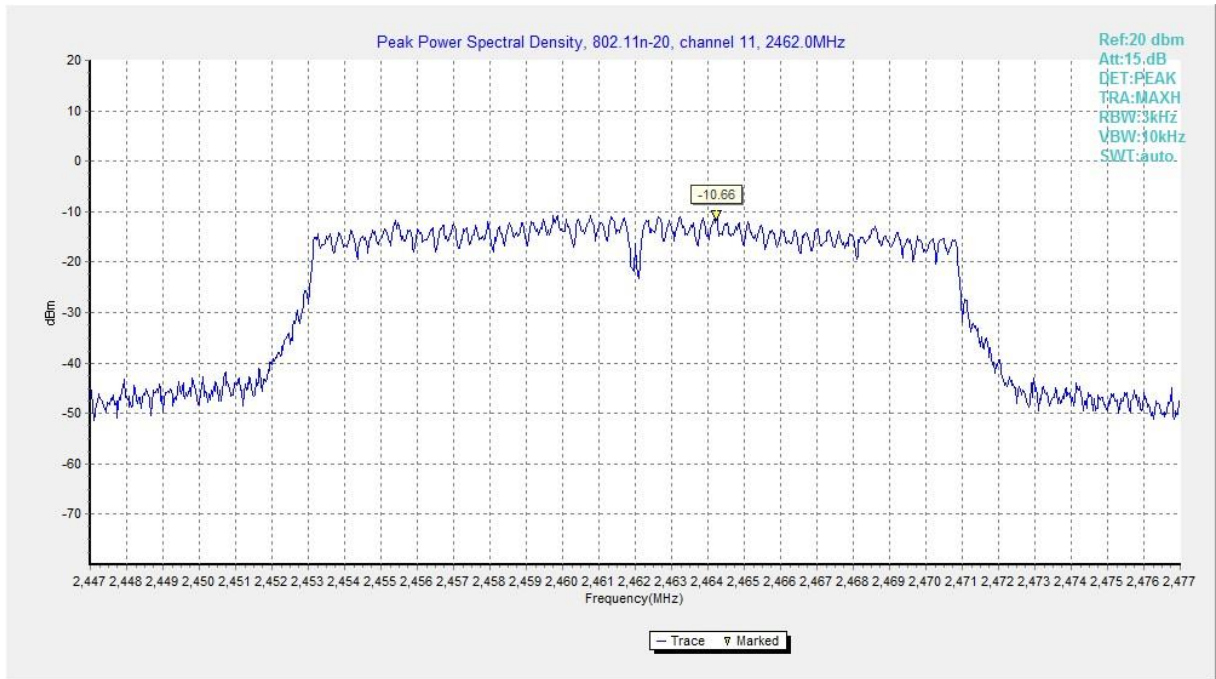


Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)



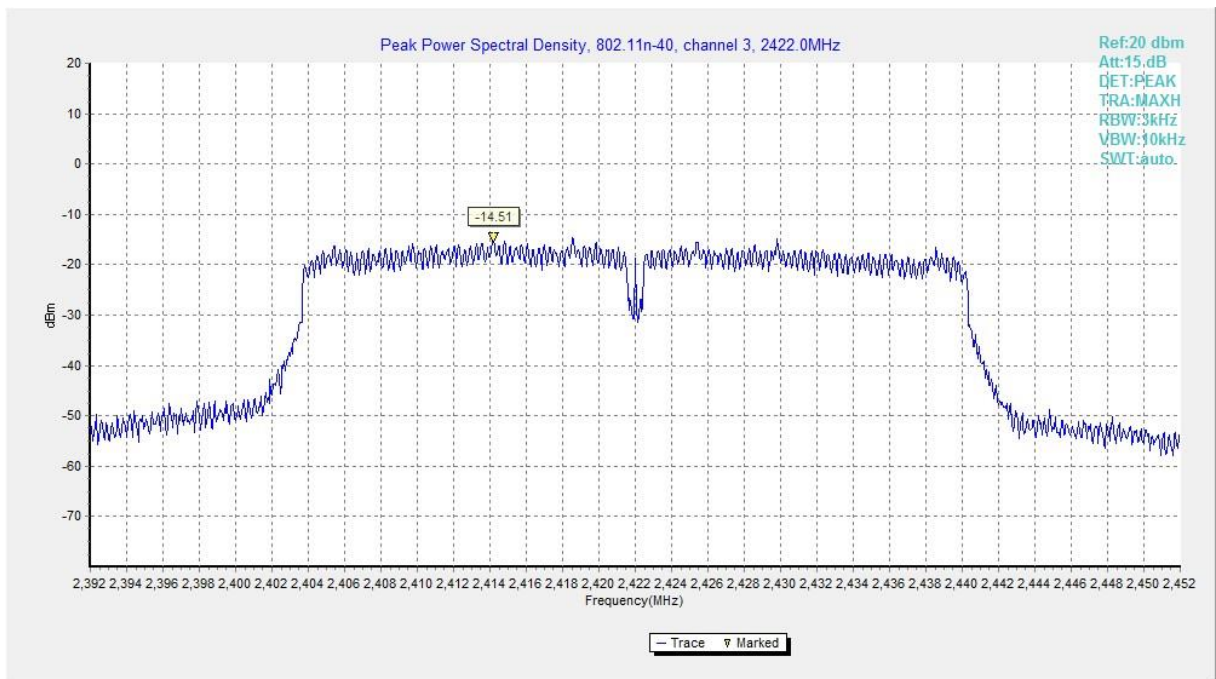


Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)

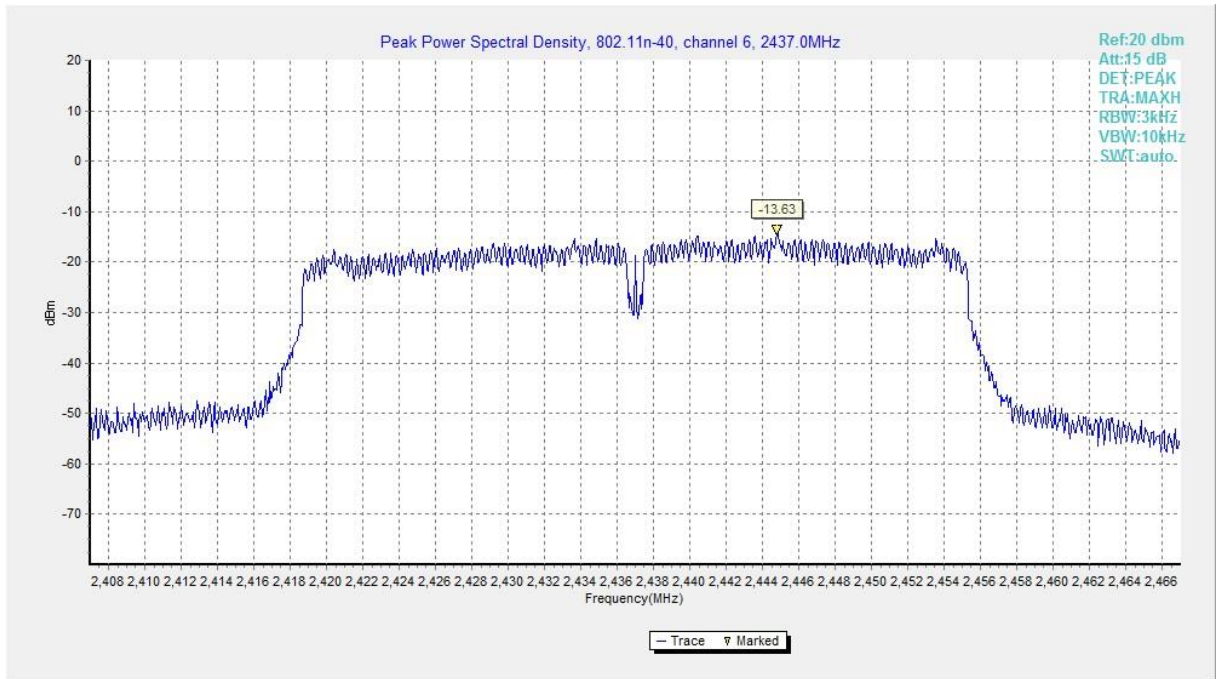

**Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)**

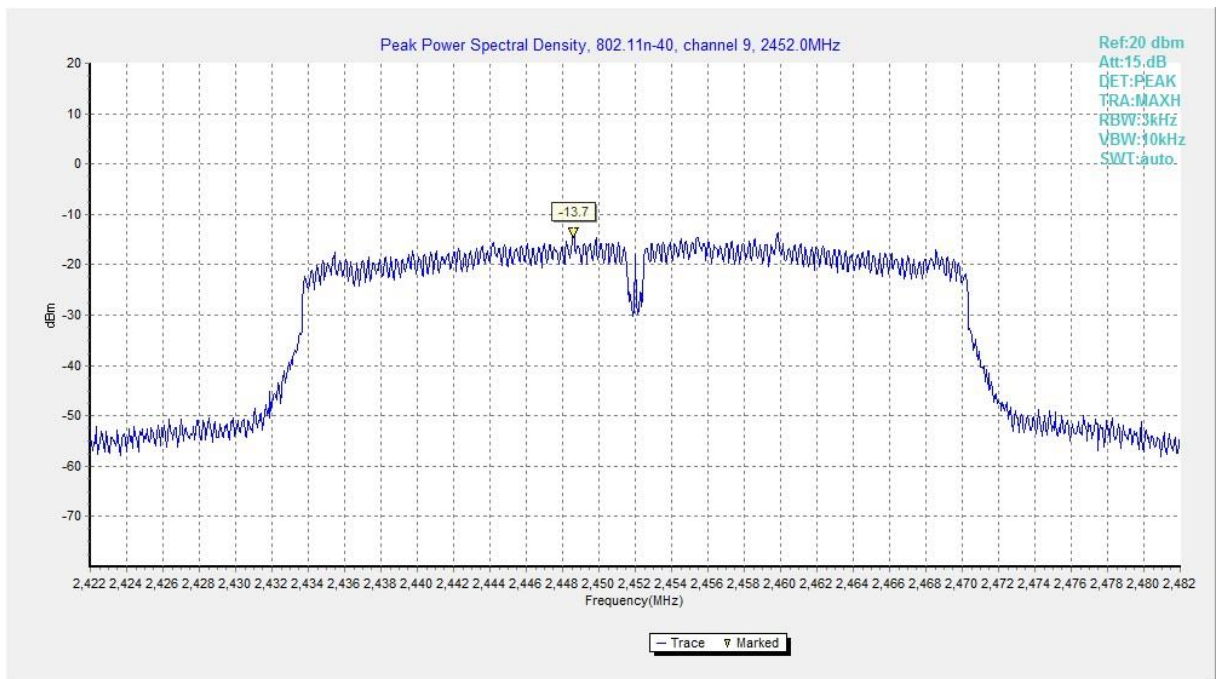

**Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)**

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: EUT2**

**Measurement Result:**

##### **802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11b	1	Fig.A.4.1	9.15	<b>P</b>
	6	Fig.A.4.2	9.10	<b>P</b>
	11	Fig.A.4.3	9.15	<b>P</b>
802.11g	1	Fig.A.4.4	16.35	<b>P</b>
	6	Fig.A.4.5	16.40	<b>P</b>
	11	Fig.A.4.6	16.35	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17.55	<b>P</b>
	6	Fig.A.4.8	17.60	<b>P</b>
	11	Fig.A.4.9	17.60	<b>P</b>

##### **802.11n-HT40 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11n (HT40)	3	Fig.A.4.10	36.40	<b>P</b>
	6	Fig.A.4.11	36.32	<b>P</b>
	9	Fig.A.4.12	36.00	<b>P</b>

Conclusion: Pass

Test graphs as below:



Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)

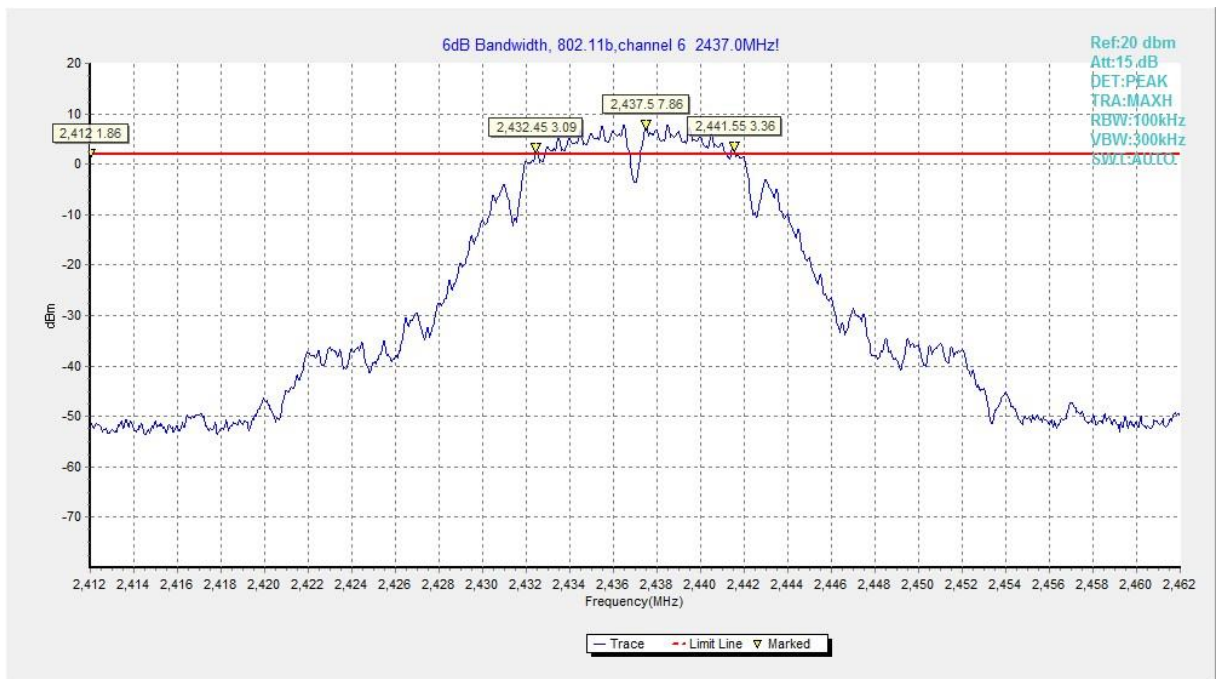


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)

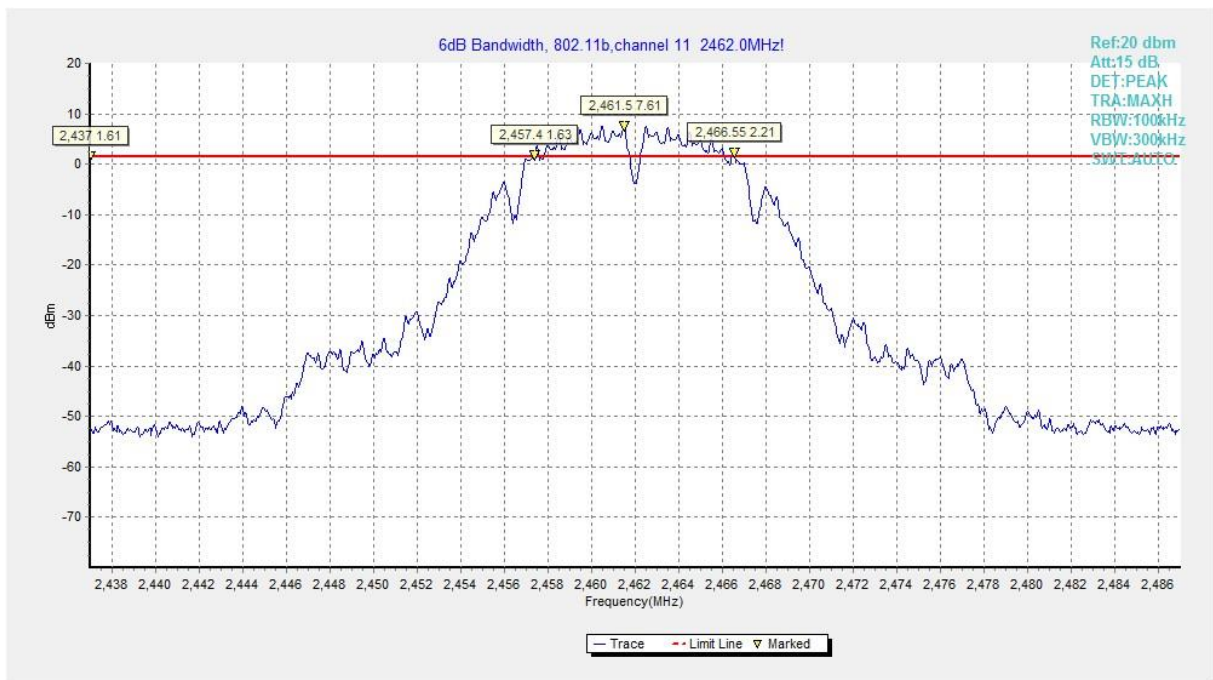


Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

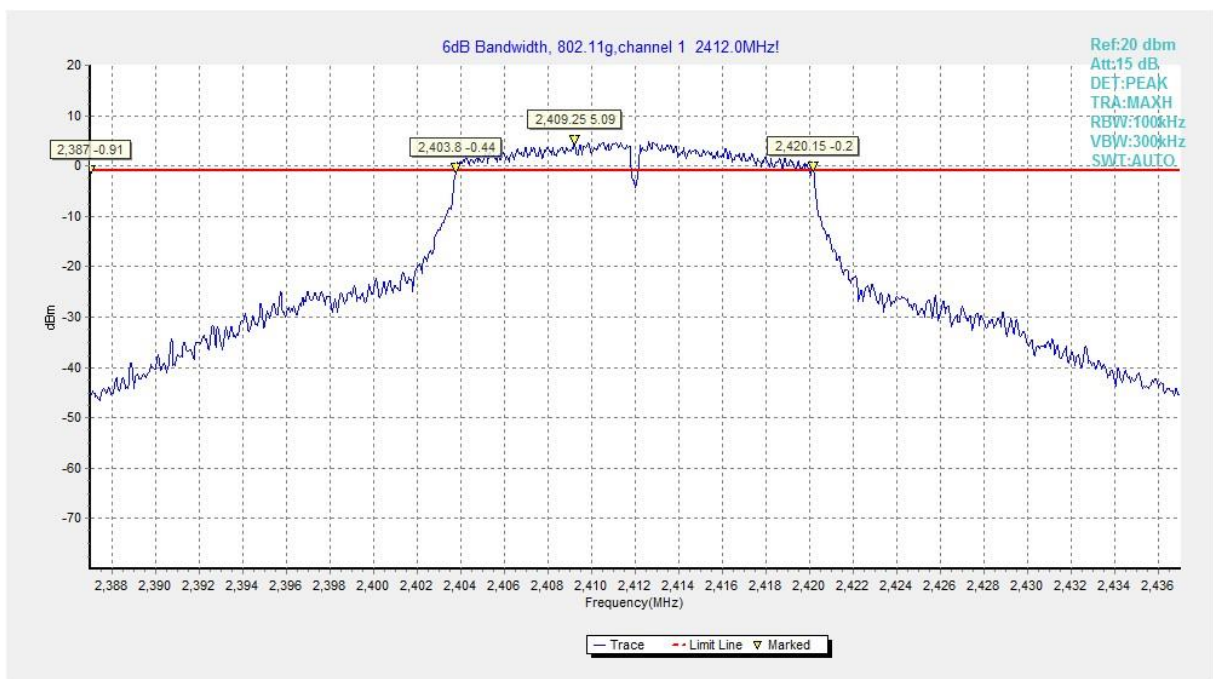


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)



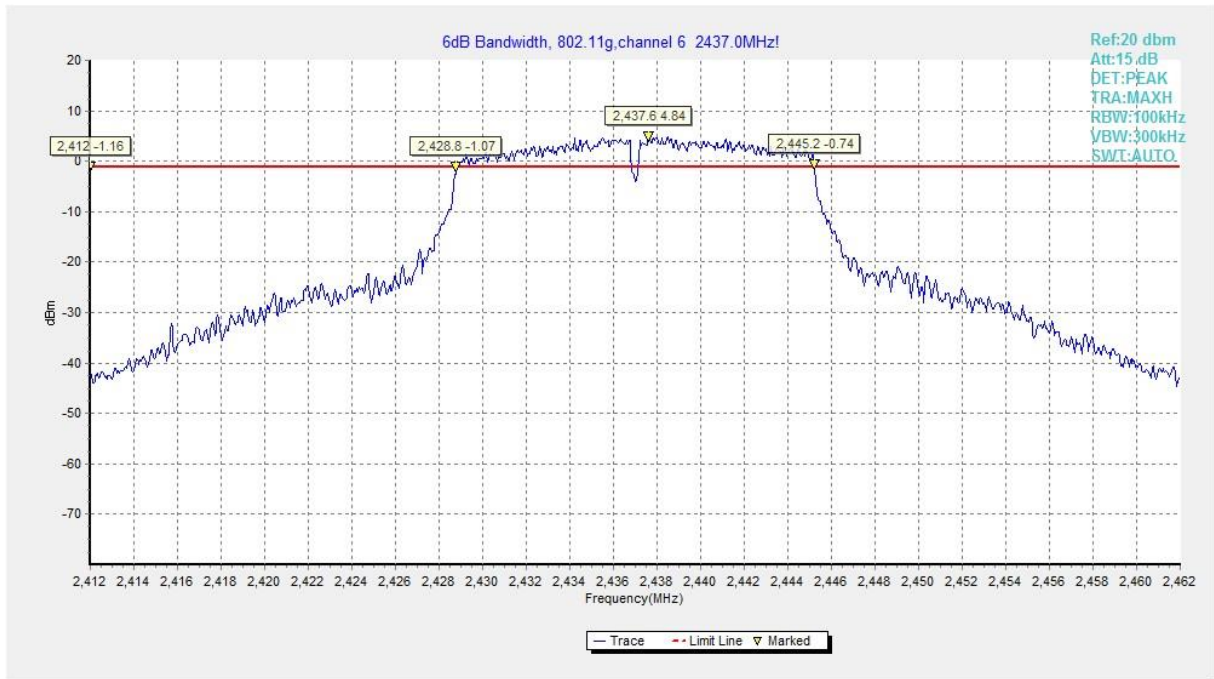


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

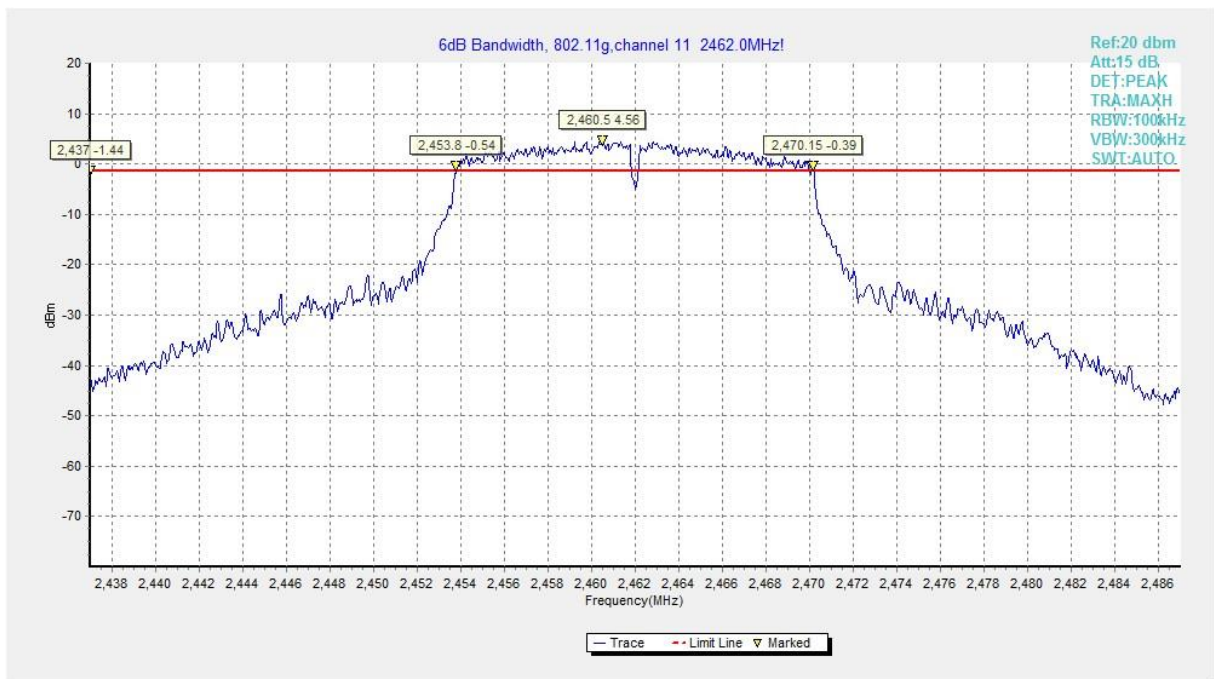


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

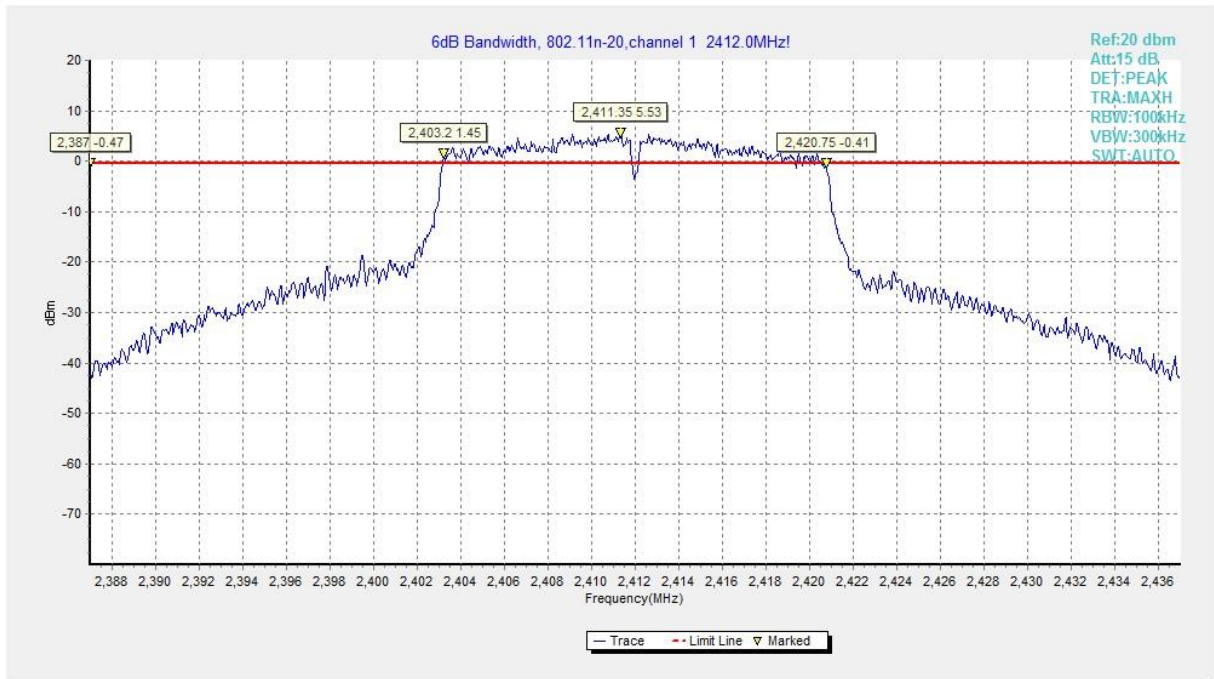


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

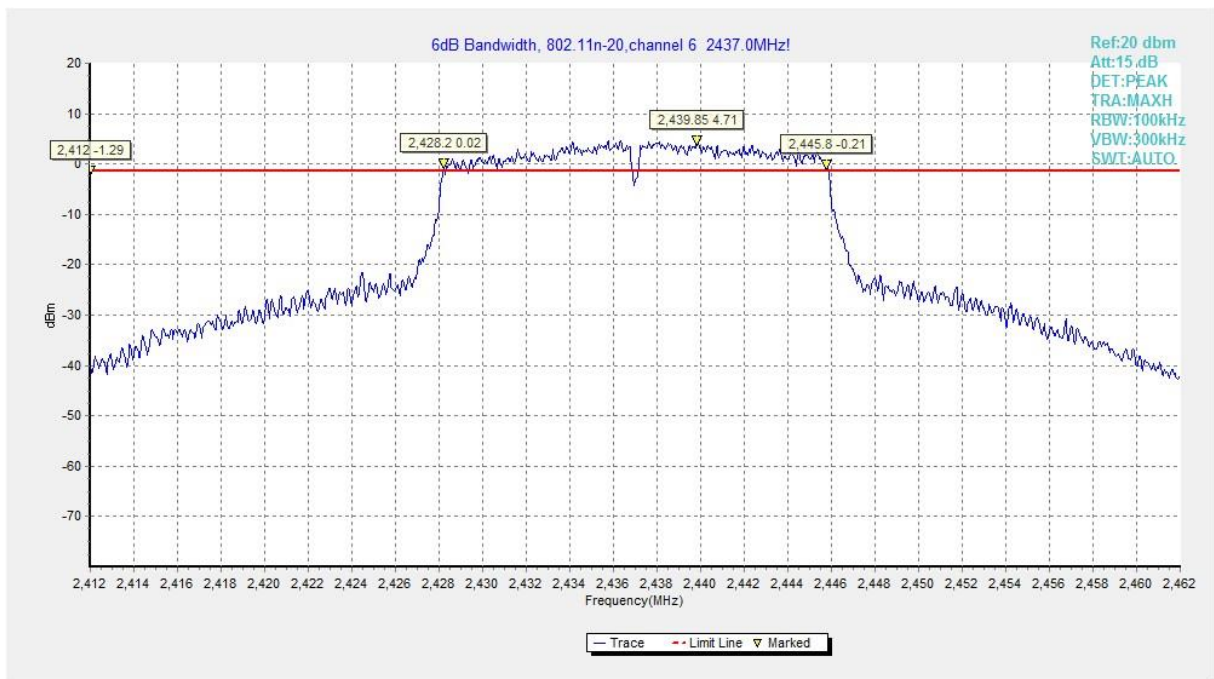


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

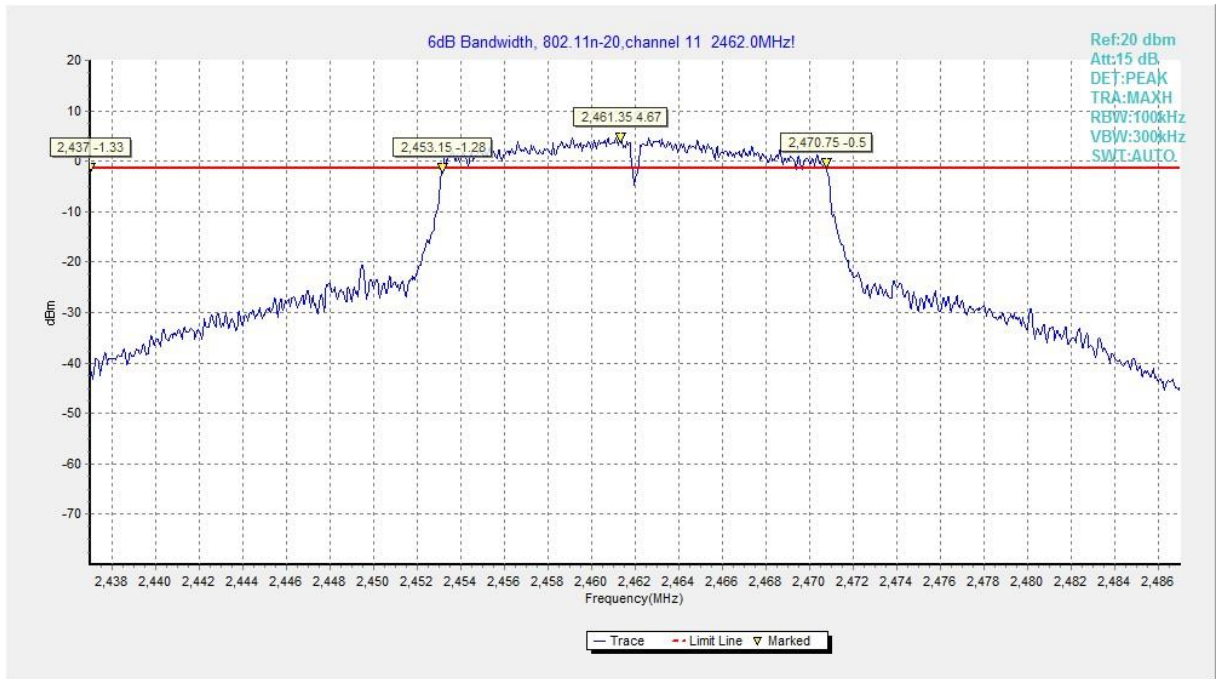


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

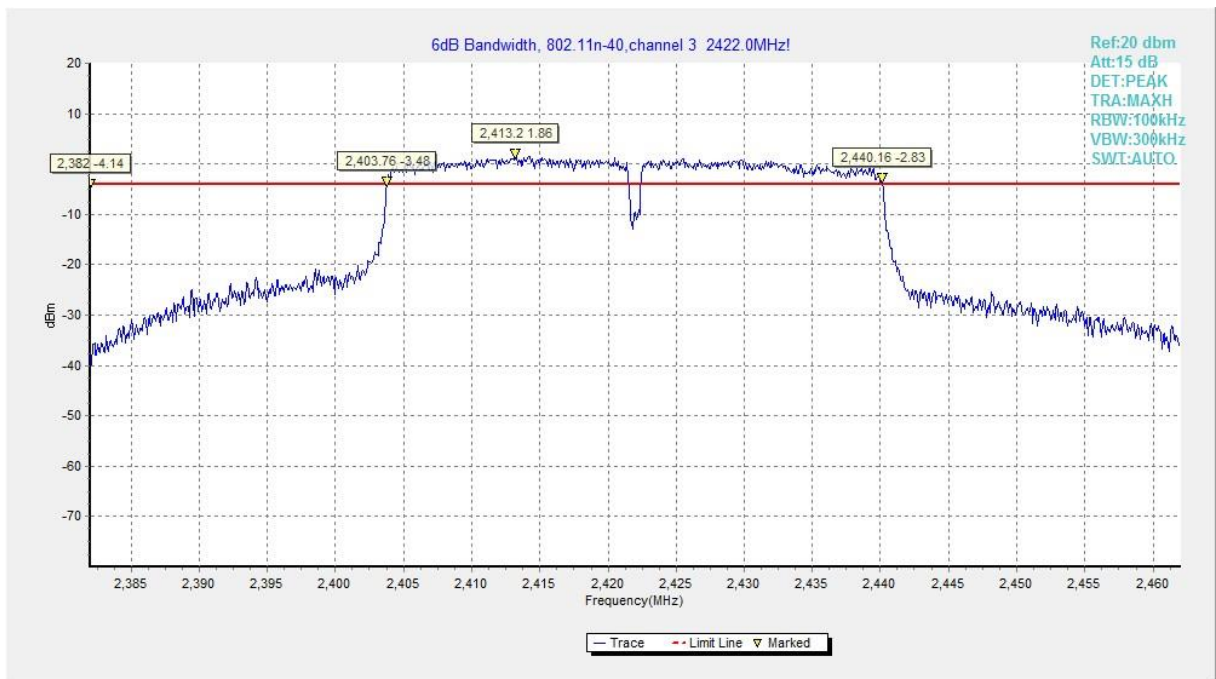


Fig.A.4.10 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 3)

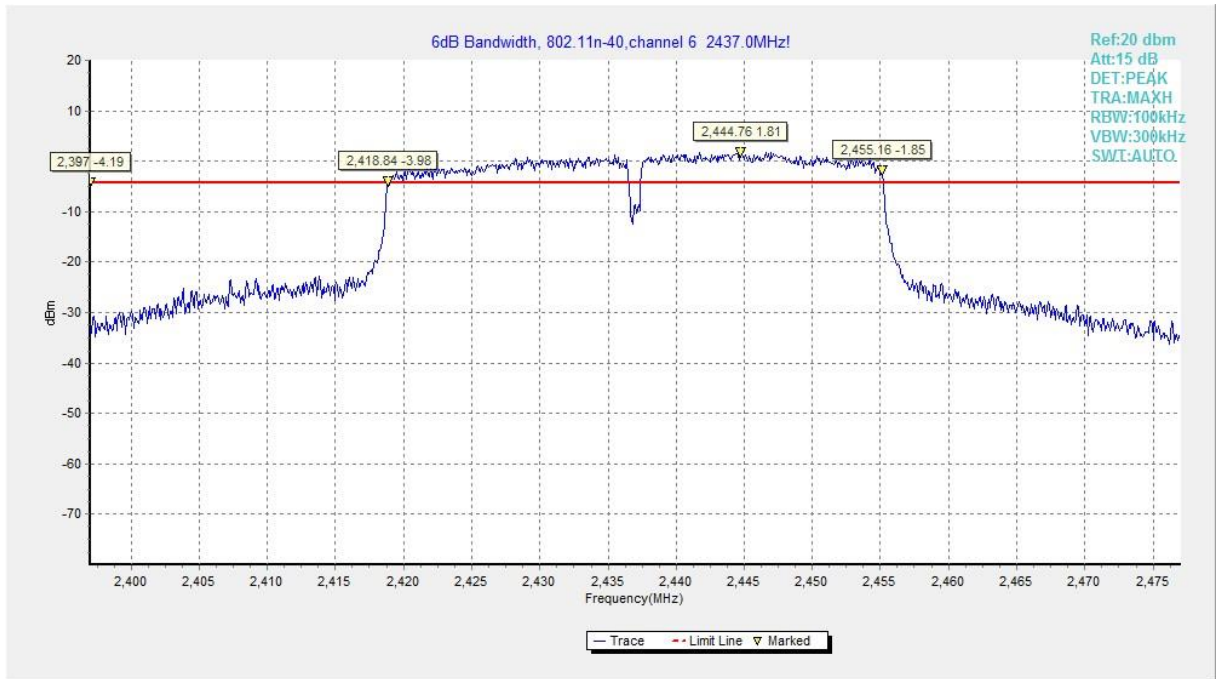


Fig.A.4.11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 6)

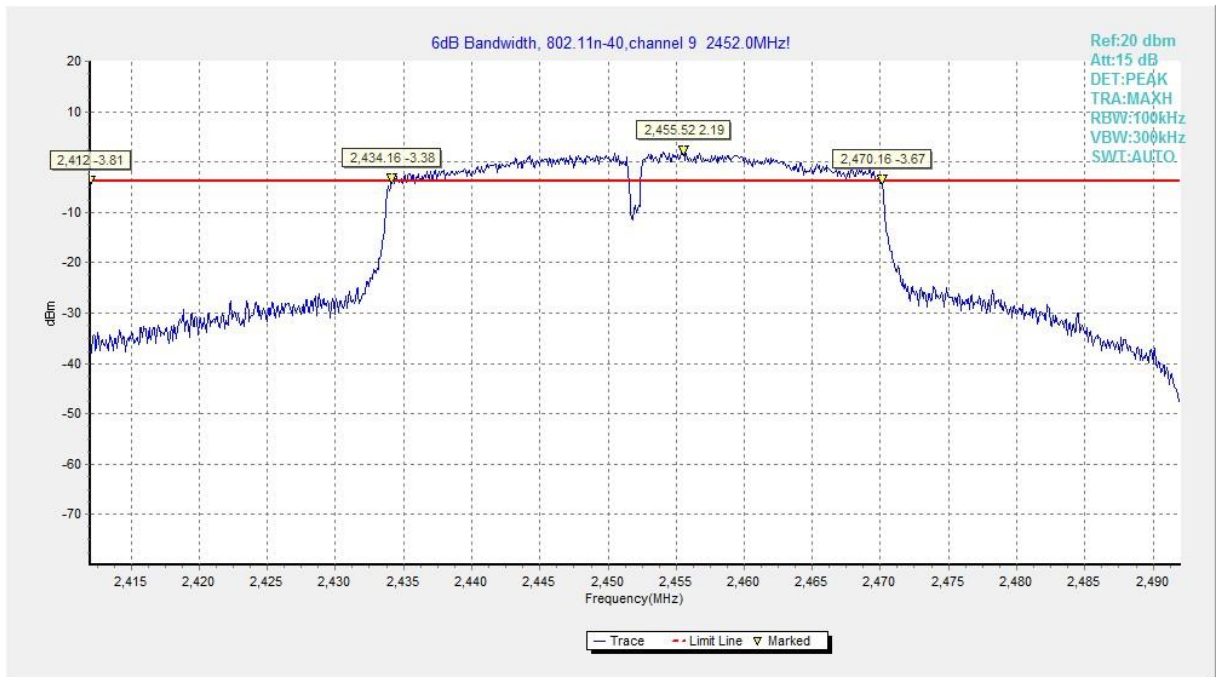


Fig.A.4.12 Occupied 6dB Bandwidth (802.11n-HT40, Ch 9)

## **A.5. Band Edges Compliance**

### **A.5.1 Band Edges Compliance(conducted)**

**Method of Measurement: See ANSI C63.10-2013-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

**EUT ID: EUT2**

**Measurement Result:**

#### **802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1.1	<b>P</b>
	11	Fig.A.5.1.2	<b>P</b>
802.11g	1	Fig.A.5.1.3	<b>P</b>
	11	Fig.A.5.1.4	<b>P</b>

#### **802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.1.5	<b>P</b>
	11	Fig.A.5.1.6	<b>P</b>

#### **802.11n-HT40 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.5.1.7	<b>P</b>
	9	Fig.A.5.1.8	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**

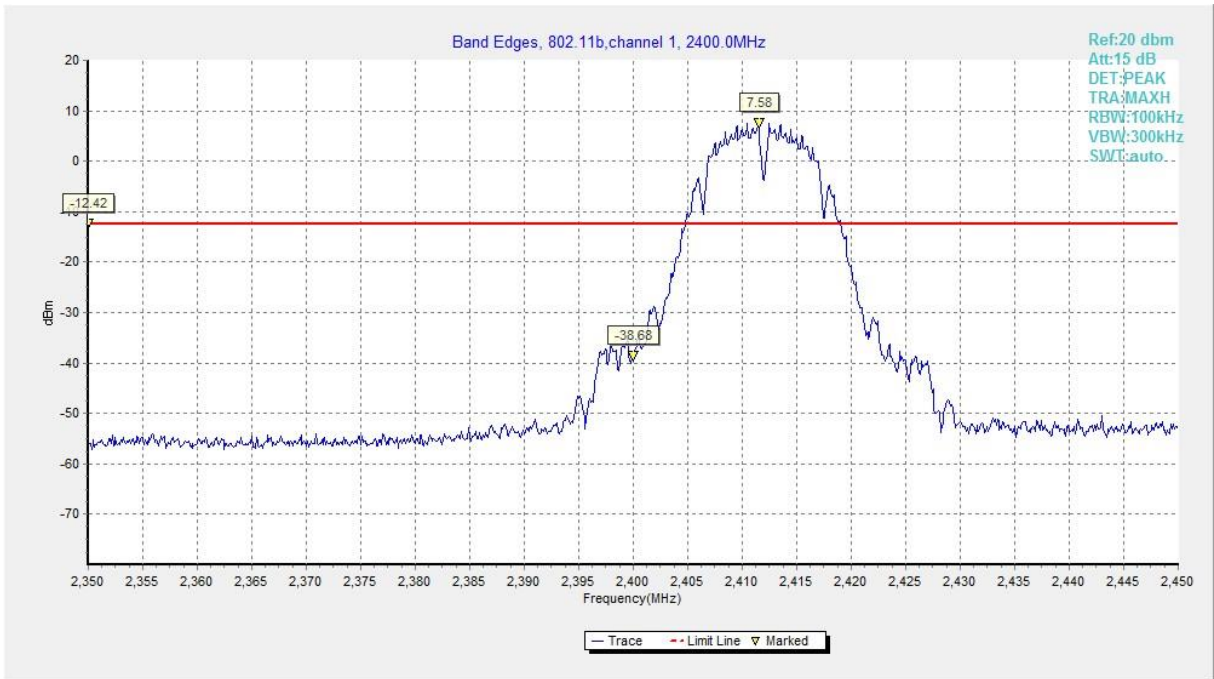


Fig.A.5.1.1 Band Edges (802.11b, Ch 1)



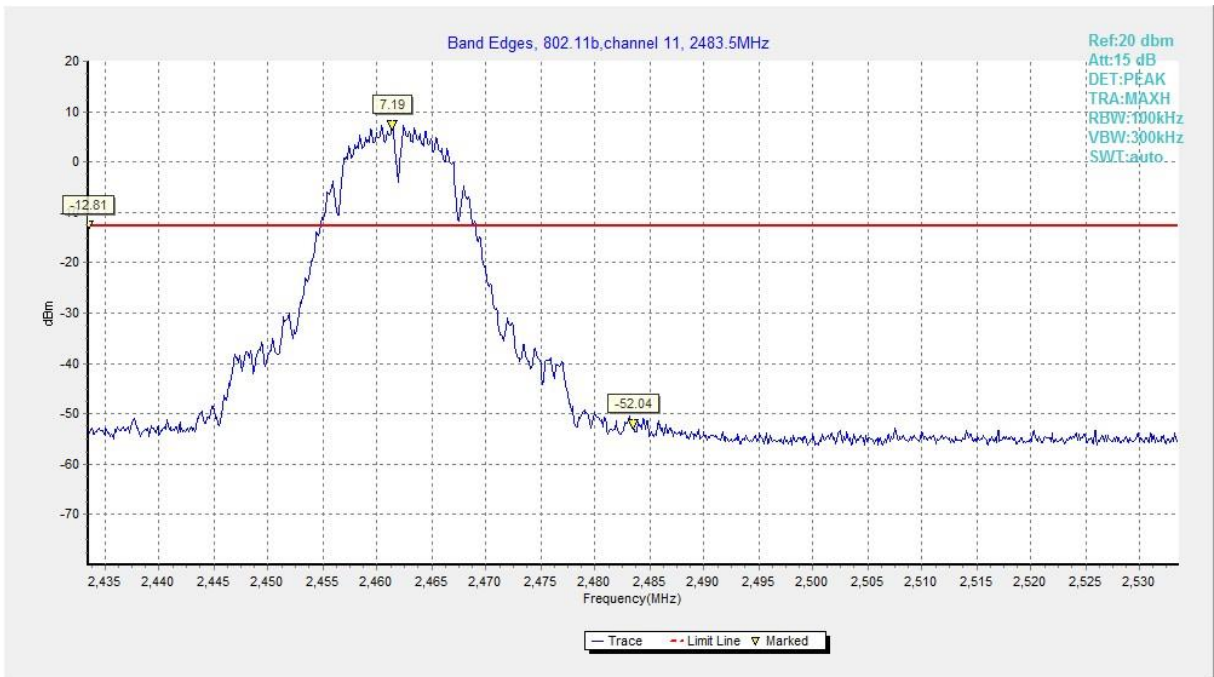


Fig.A.5.1.2 Band Edges (802.11b, Ch 11)

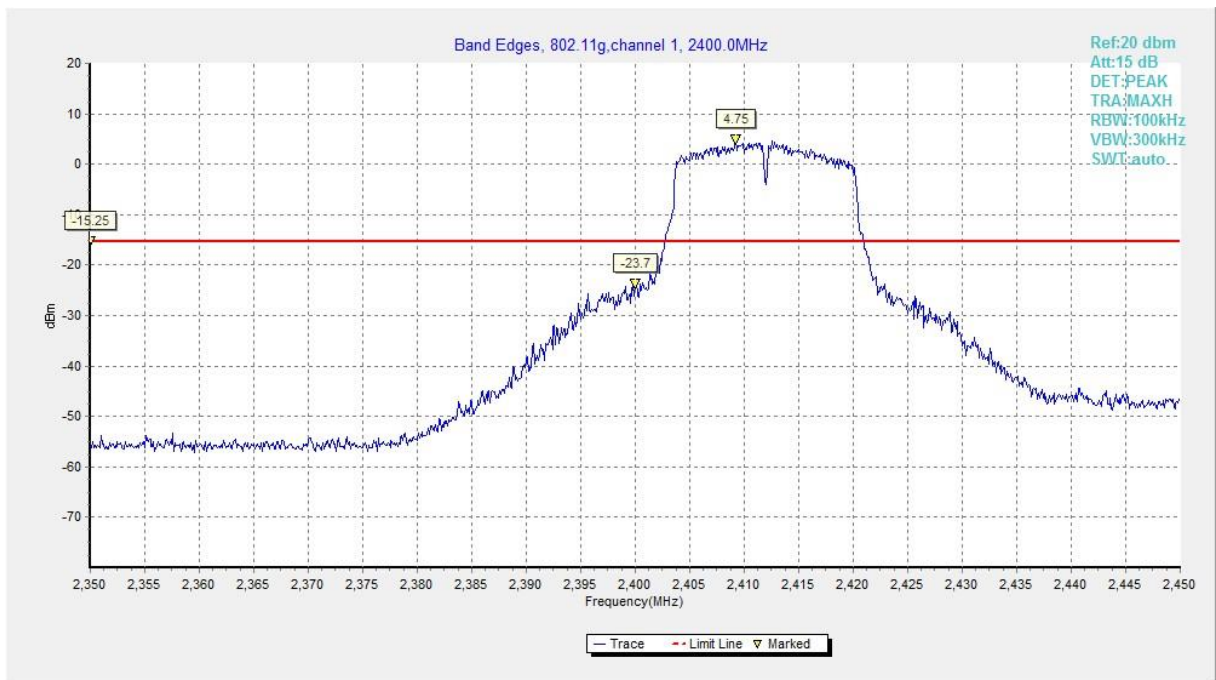

**Fig.A.5.1.3 Band Edges (802.11g, Ch 1)**

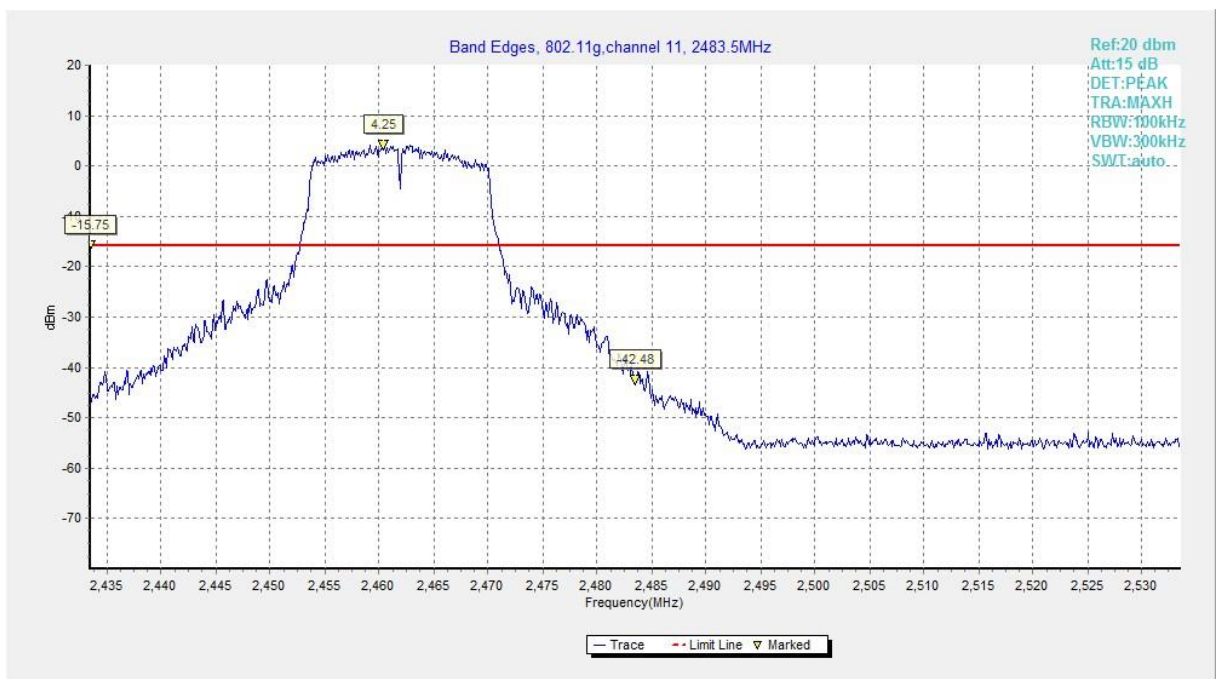

**Fig.A.5.1.4 Band Edges (802.11g, Ch 11)**

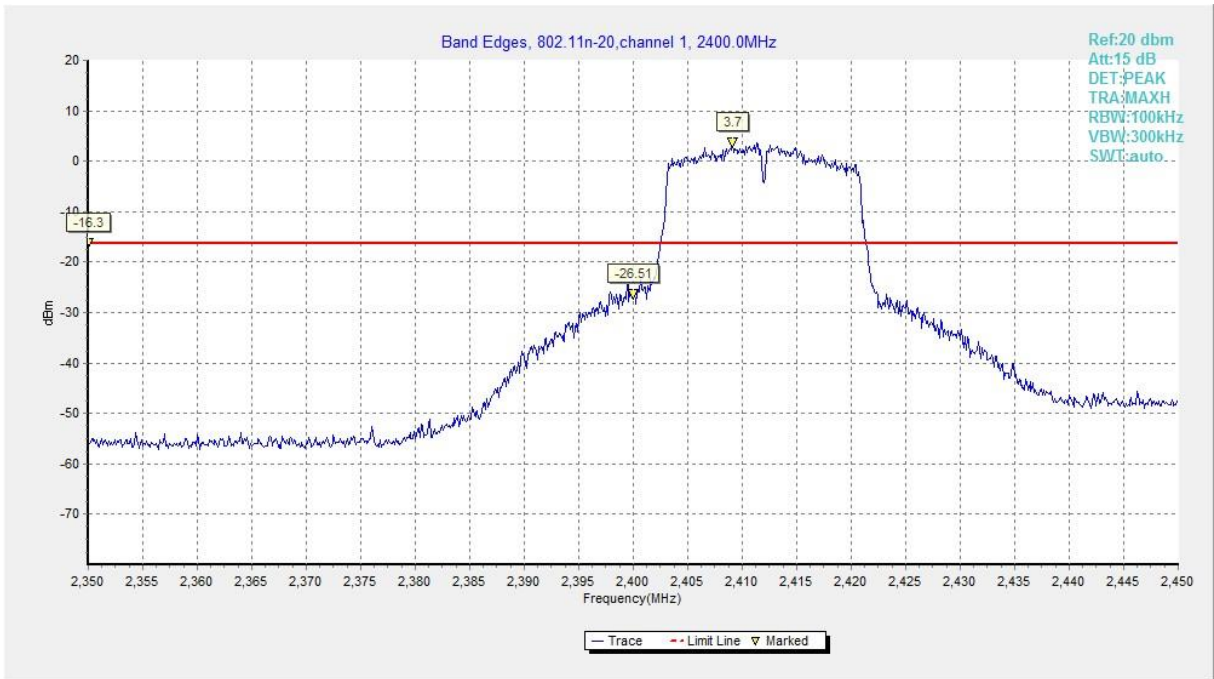
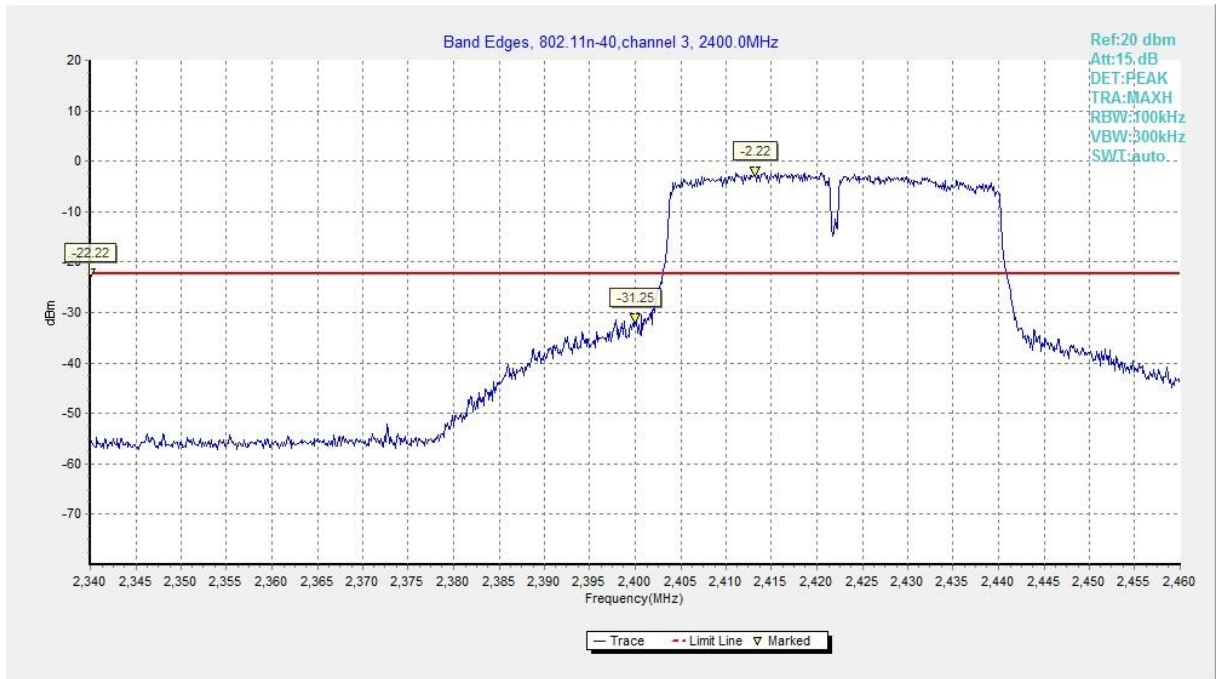


Fig.A.5.1.5 Band Edges (802.11n-HT20, Ch 1)

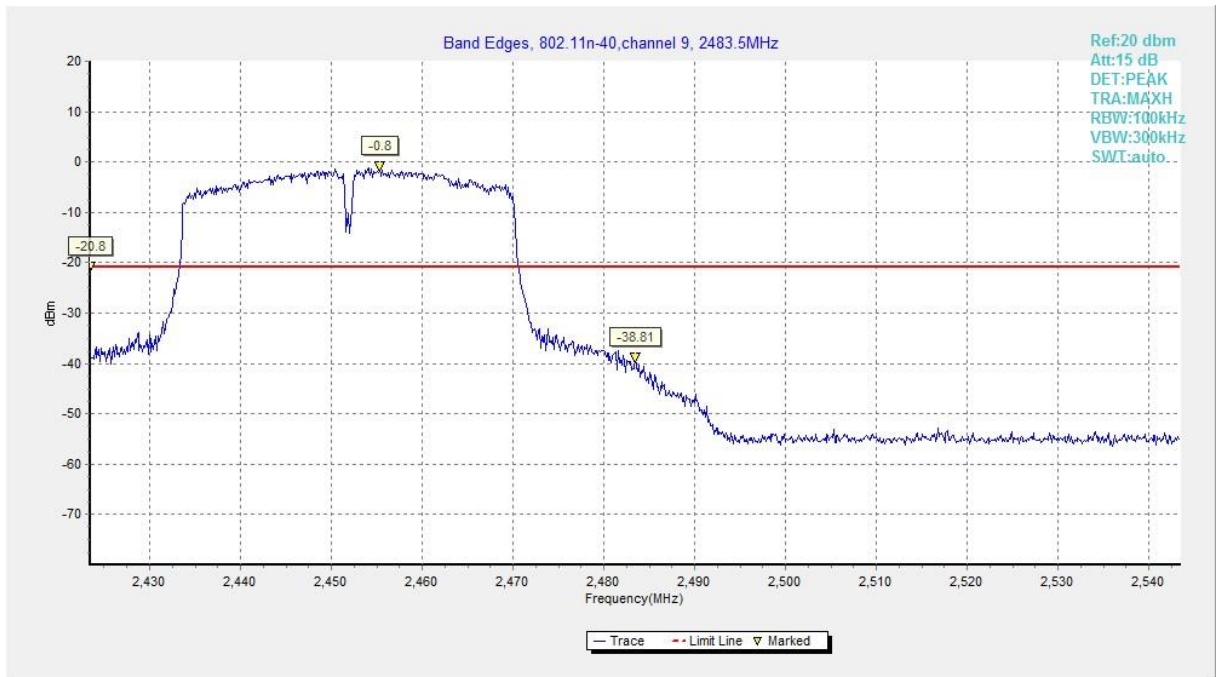


Fig.A.5.1.6 Band Edges (802.11n-HT20, Ch 11)





**Fig.A.5.1.7 Band Edges (802.11n-HT40, Ch 3)**



**Fig.A.5.1.8 Band Edges (802.11n-HT40, Ch 9)**

### A.5.2 Band Edges Compliance(radiated)

**Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6**

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency (MHz)	Field strength( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Set up:**

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

**Test Condition**

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

**Exploratory radiated emissions measurements**

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close

to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

#### **Final radiated emissions measurements**

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **Measurement Result:**

**EUT ID: UT37a**

##### **802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.2.1	<b>P</b>
	11	Fig.A.5.2.2	<b>P</b>
802.11g	1	Fig.A.5.2.3	<b>P</b>
	11	Fig.A.5.2.4	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.2.5	<b>P</b>
	11	Fig.A.5.2.6	<b>P</b>


**802.11n-HT40 mode**

Mode	Channel	Test Results	Conclusion
802.11n	3	Fig.A.5.2.7	P
(HT20)	9	Fig.A.5.2.8	P

**Conclusion: Pass**


**Test graphs as below:**

Full Spectrum

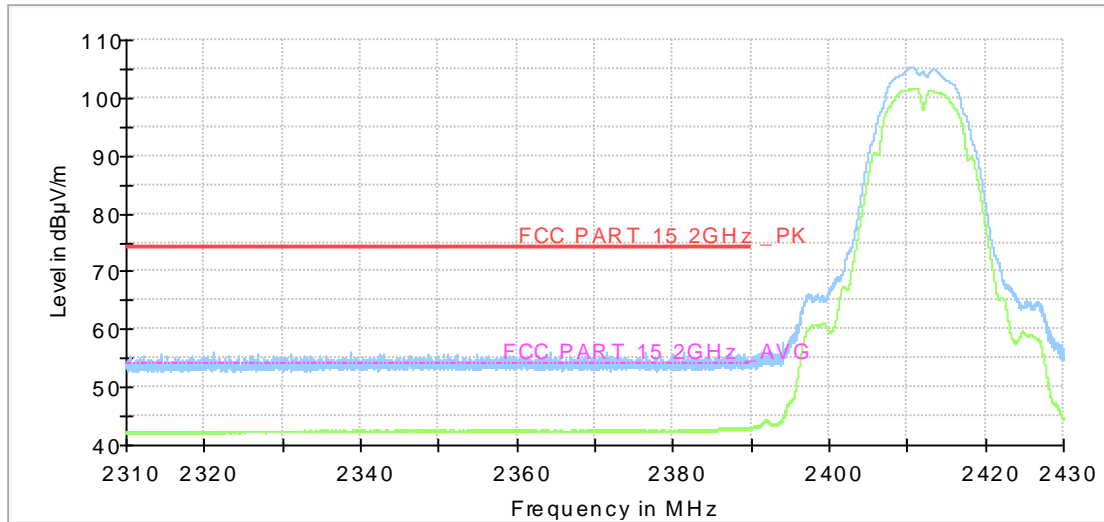


- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15 2GHz \_PK [..]
- FCC PART 15 2GHz \_AVG [..]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.1 Radiated band Edges (802.11b, Ch 1)**

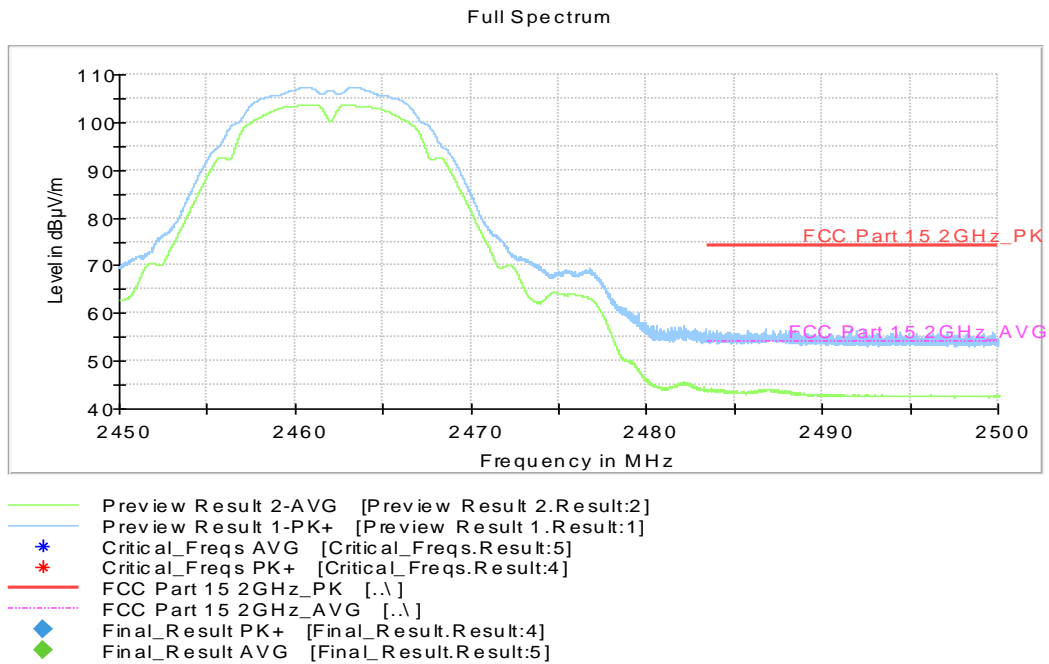


**Fig.A.5.2.2 Radiated band Edges (802.11b, Ch 11)**

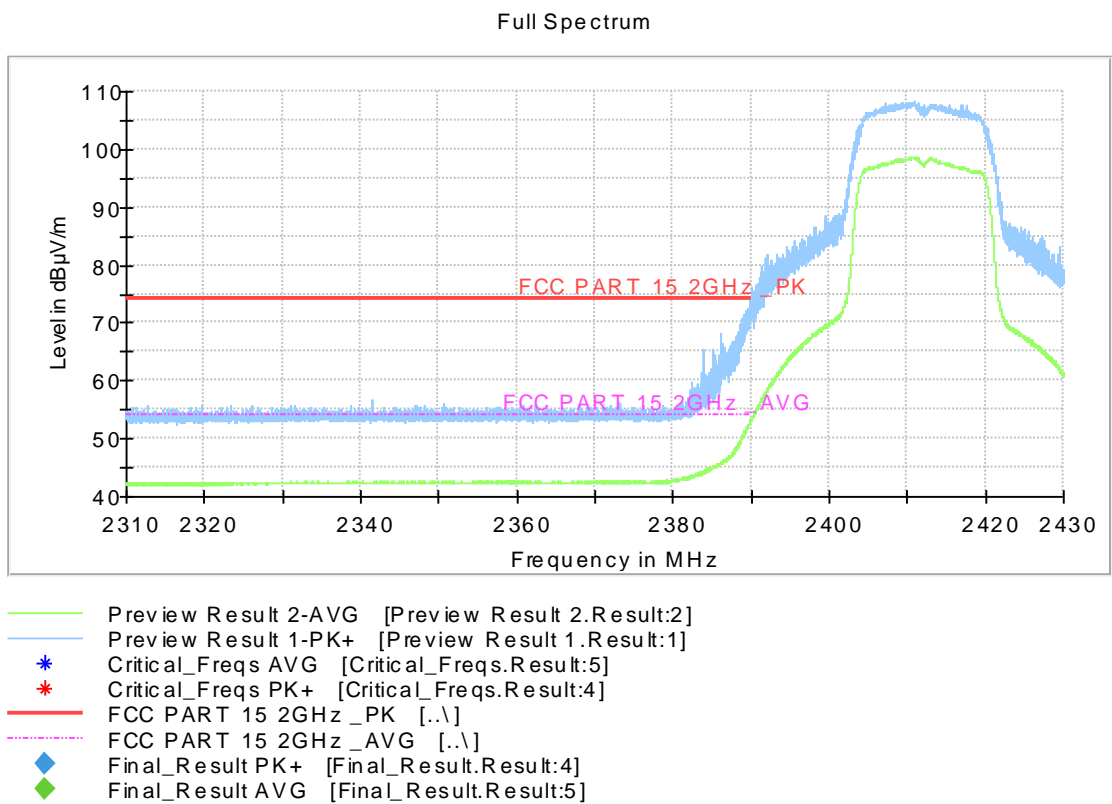

**Fig.A.5.2.3 Radiated band Edges (802.11g, Ch 1)**


Full Spectrum

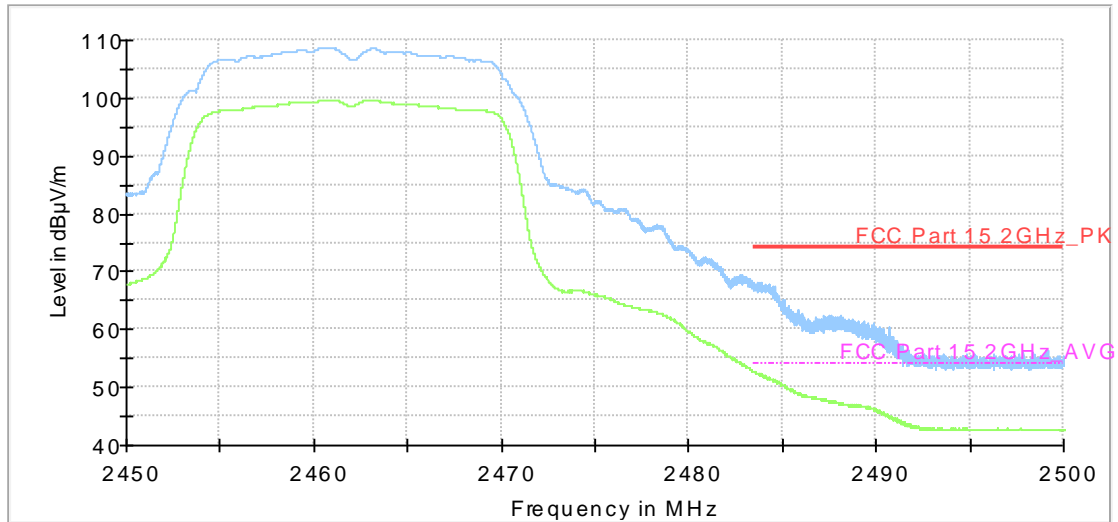

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC Part 15 2GHz\_PK [.\]
- - - FCC Part 15 2GHz\_AVG [.\]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.4 Radiated band Edges (802.11g, Ch 11)**


Full Spectrum

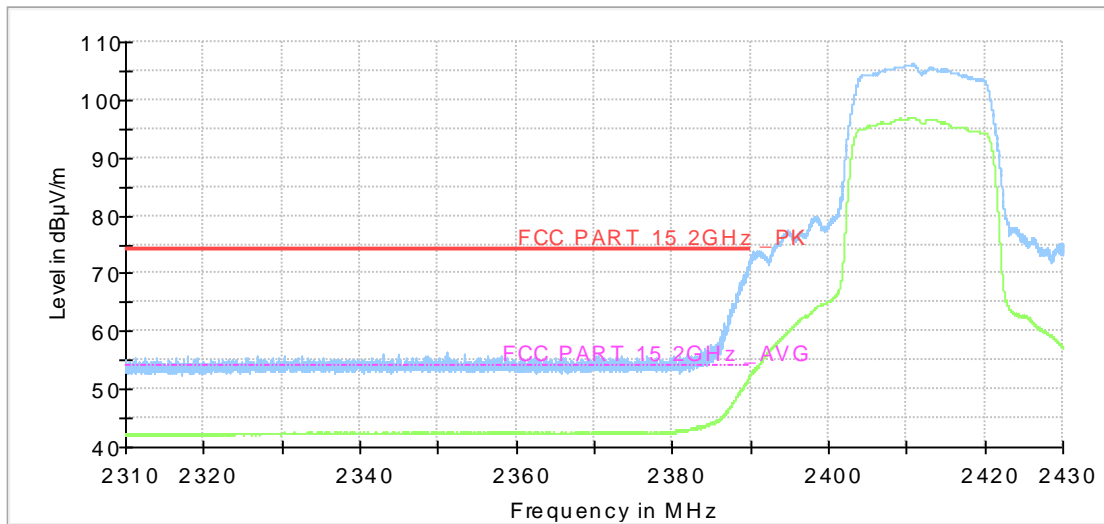

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15 2GHz\_PK [.\]
- - - FCC PART 15 2GHz\_AVG [.\]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.5 Radiated band Edges (802.11n-HT20, Ch 1)**


Full Spectrum

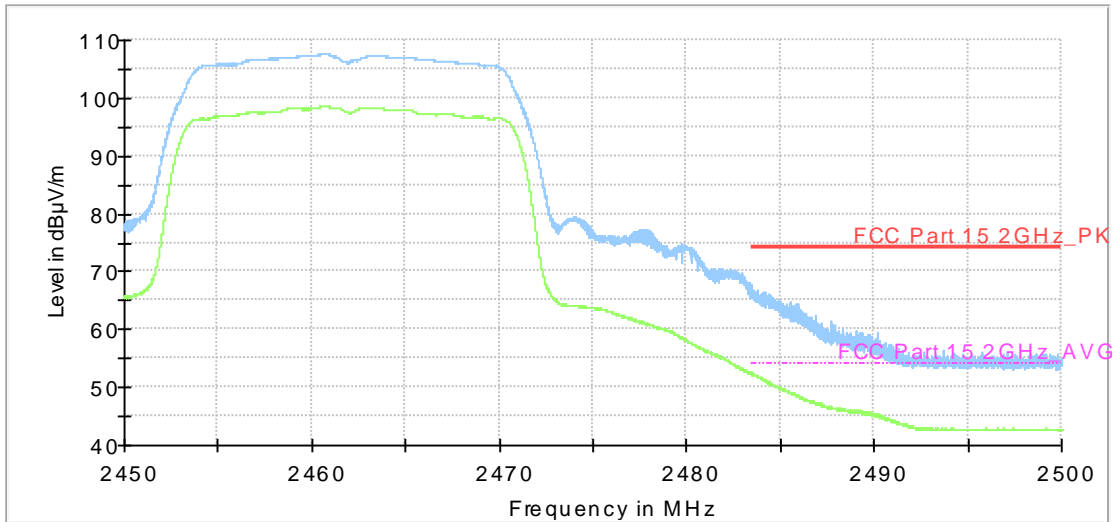

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC Part 15.2GHz\_PK [.\]
- - - FCC Part 15.2GHz\_AVG [.\]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.6 Radiated band Edges (802.11n-HT20, Ch 11)**


Full Spectrum

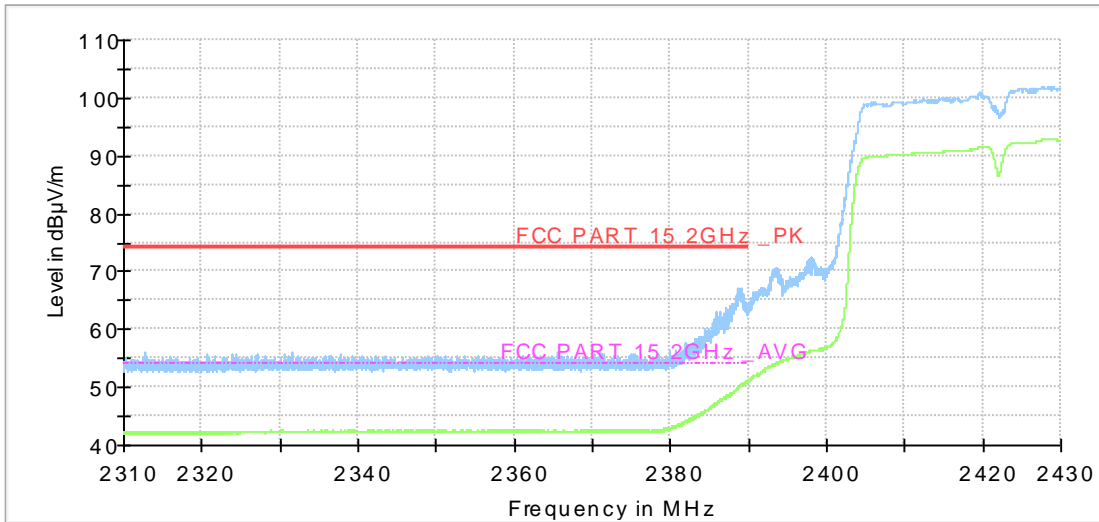

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15.2GHz\_PK [.\]
- - - FCC PART 15.2GHz\_AVG [.\]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.7 Radiated band Edges (802.11n-HT40, Ch 3)**

Full Spectrum

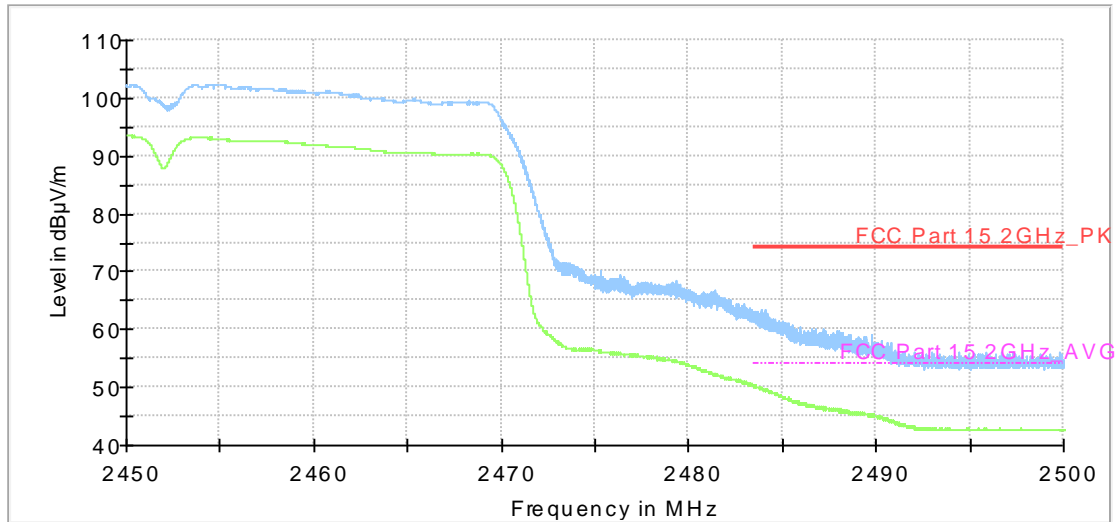

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC Part 15 2GHz\_PK [.\]
- - - - - FCC Part 15 2GHz\_AVG [.\]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Fig.A.5.2.8 Radiated band Edges (802.11n-HT40, Ch 9)**



## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

**Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### **Measurement Limit:**

<b>Standard</b>	<b>Limit</b>
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**EUT ID: EUT2**

**Measurement Results:**

**802.11b mode**

<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11b	1	2.412 GHz	Fig.A.6.1.1	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.2	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.3	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.4	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.5	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.6	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.7	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.8	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.9	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.10	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.11	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.12	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.13	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.14	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.15	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.16	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.17	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.18	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.19	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.20	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.21	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.22	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.23	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.24	<b>P</b>

**802.11g mode**

<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11g	1	2.412 GHz	Fig.A.6.1.25	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.26	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.27	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.28	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.29	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.30	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.31	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.32	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.33	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.34	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.35	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.36	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.37	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.38	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.39	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.40	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.41	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.42	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.43	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.44	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.45	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.46	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.47	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.48	<b>P</b>

**802.11n-HT20 mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.49	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.50	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.51	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.52	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.53	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.54	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.55	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.56	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.57	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.58	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.59	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.60	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.61	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.62	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.63	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.64	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.65	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.66	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.67	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.68	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.69	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.70	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.71	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.72	<b>P</b>

**802.11n-HT40 mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.422 GHz	Fig.A.6.1.73	P
		30 MHz ~ 1 GHz	Fig.A.6.1.74	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.75	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.76	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.77	P
		10 GHz ~ 15 GHz	Fig.A.6.1.78	P
		15 GHz ~ 20 GHz	Fig.A.6.1.79	P
		20 GHz ~ 26 GHz	Fig.A.6.1.80	P
	6	2.437 GHz	Fig.A.6.1.81	P
		30 MHz ~ 1 GHz	Fig.A.6.1.82	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.83	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.84	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.85	P
		10 GHz ~ 15 GHz	Fig.A.6.1.86	P
		15 GHz ~ 20 GHz	Fig.A.6.1.87	P
		20 GHz ~ 26 GHz	Fig.A.6.1.88	P
	9	2.452 GHz	Fig.A.6.1.89	P
		30 MHz ~ 1 GHz	Fig.A.6.1.90	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.91	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.92	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.93	P
		10 GHz ~ 15 GHz	Fig.A.6.1.94	P
		15 GHz ~ 20 GHz	Fig.A.6.1.95	P
		20 GHz ~ 26 GHz	Fig.A.6.1.96	P

**Conclusion: Pass**


**Test graphs as below:**

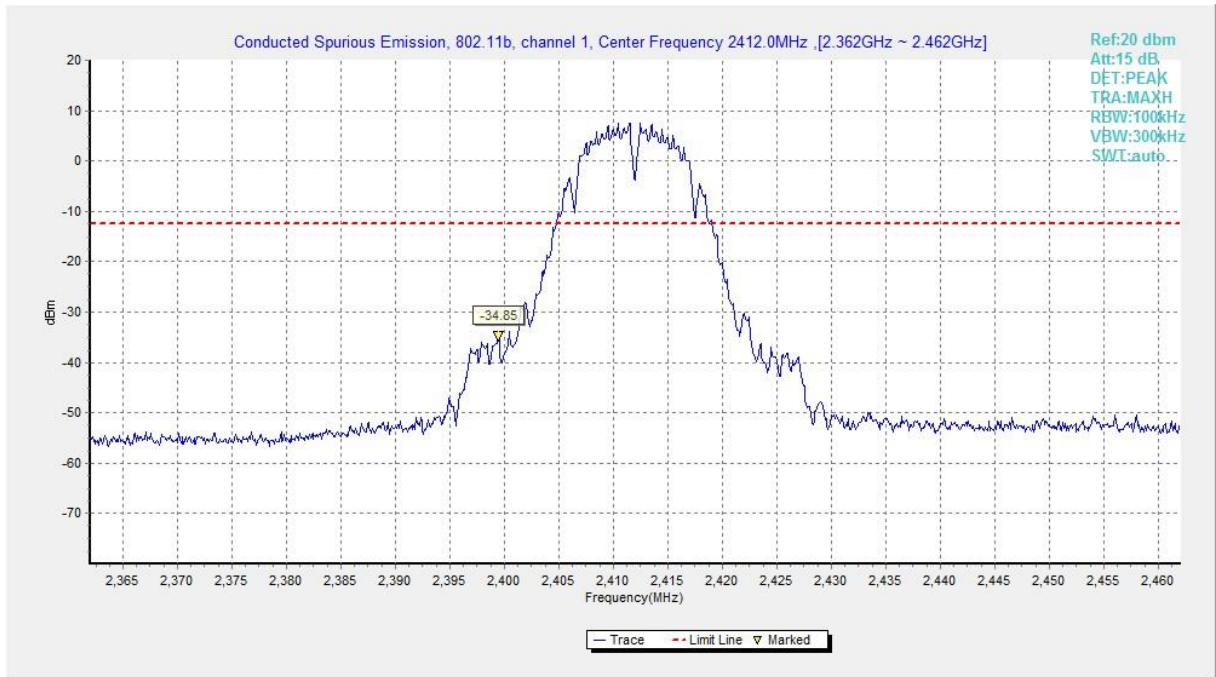


**Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)**

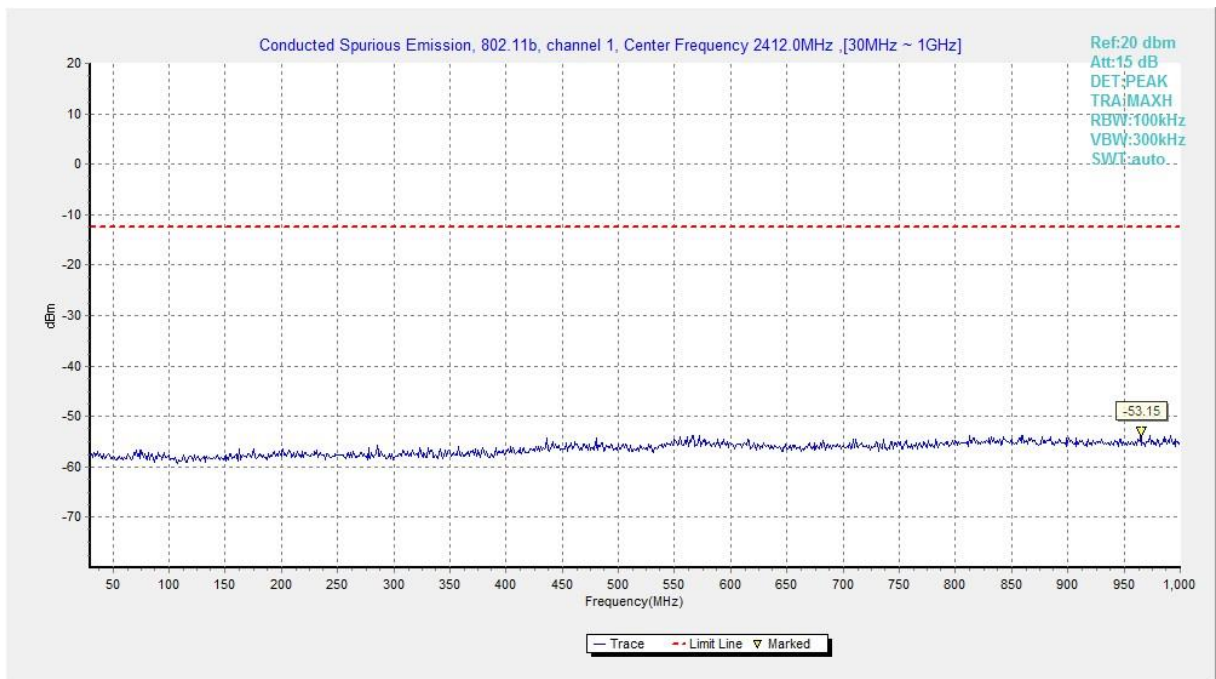


**Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)**

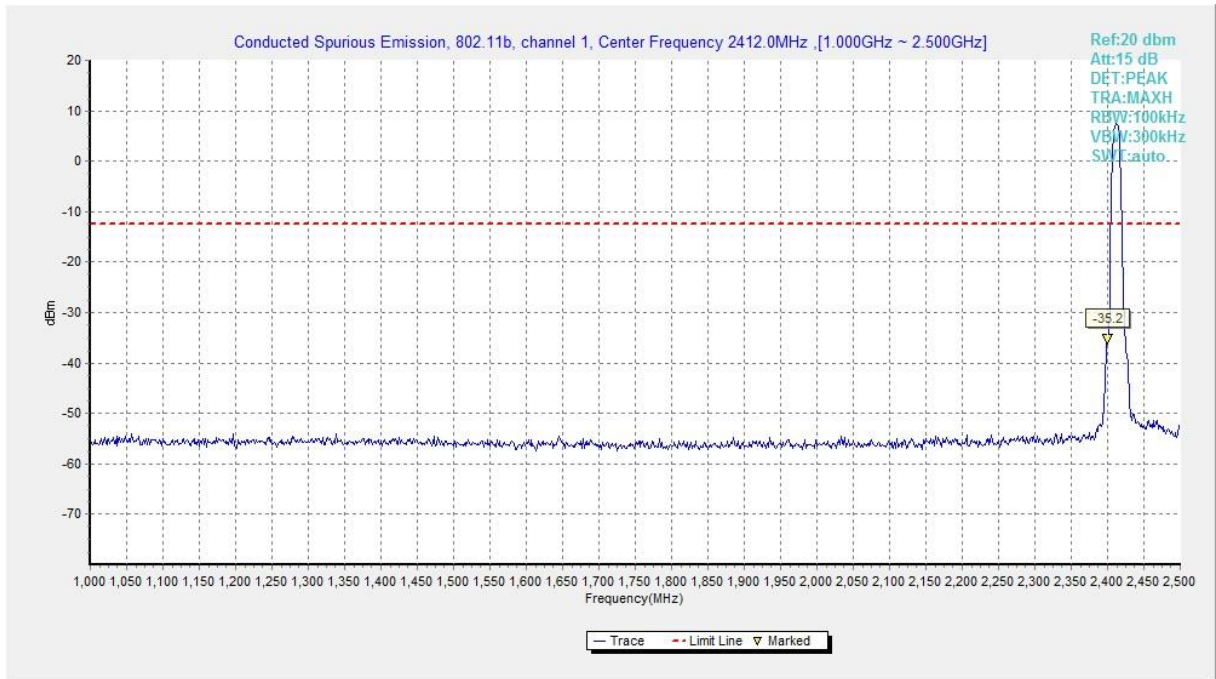


**Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-2.5 GHz)**

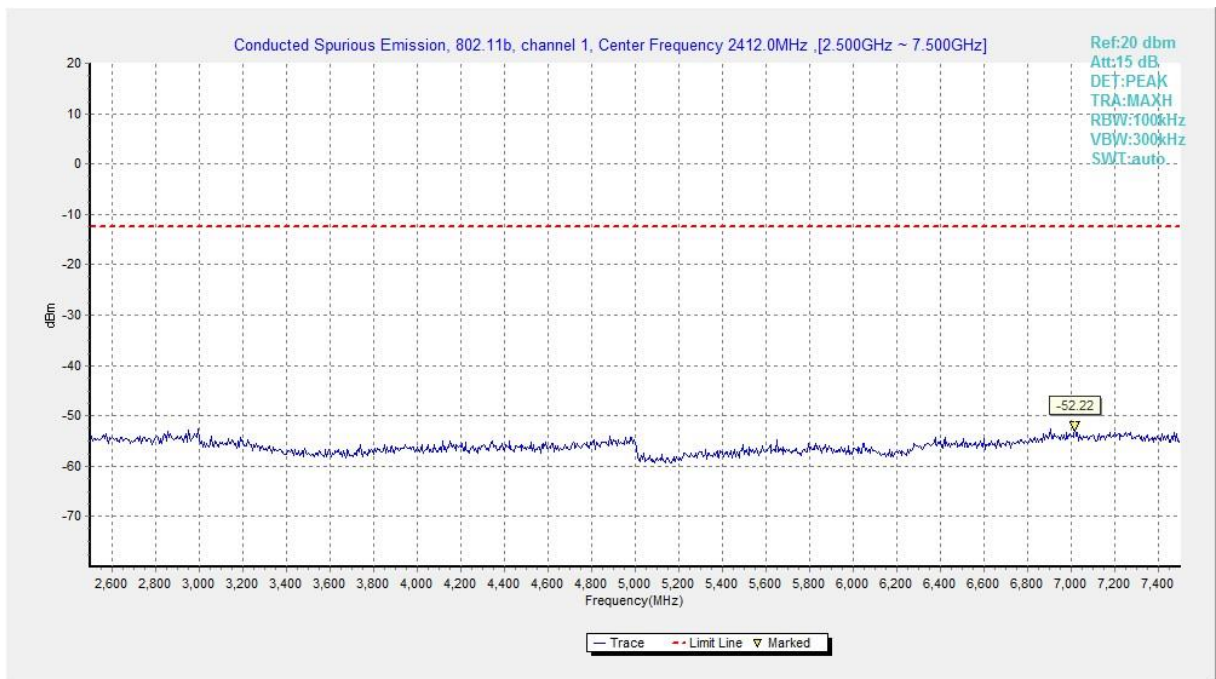

**Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 2.5 GHz-7.5 GHz)**

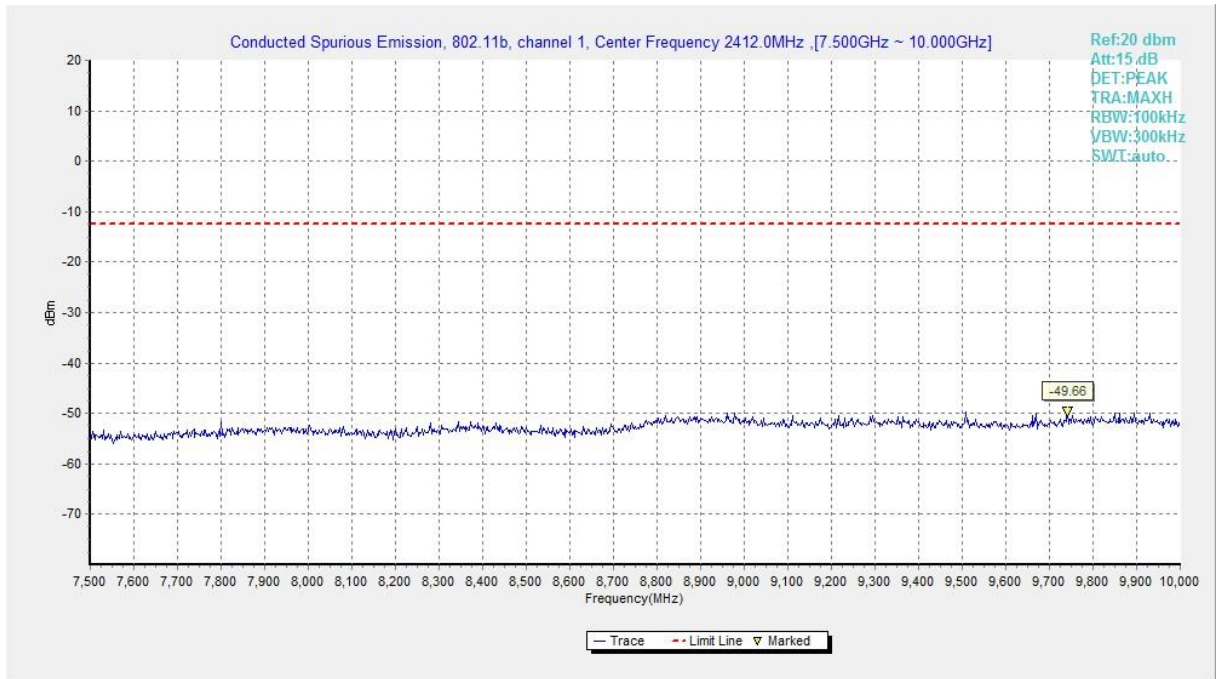


**Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 7.5 GHz-10 GHz)**

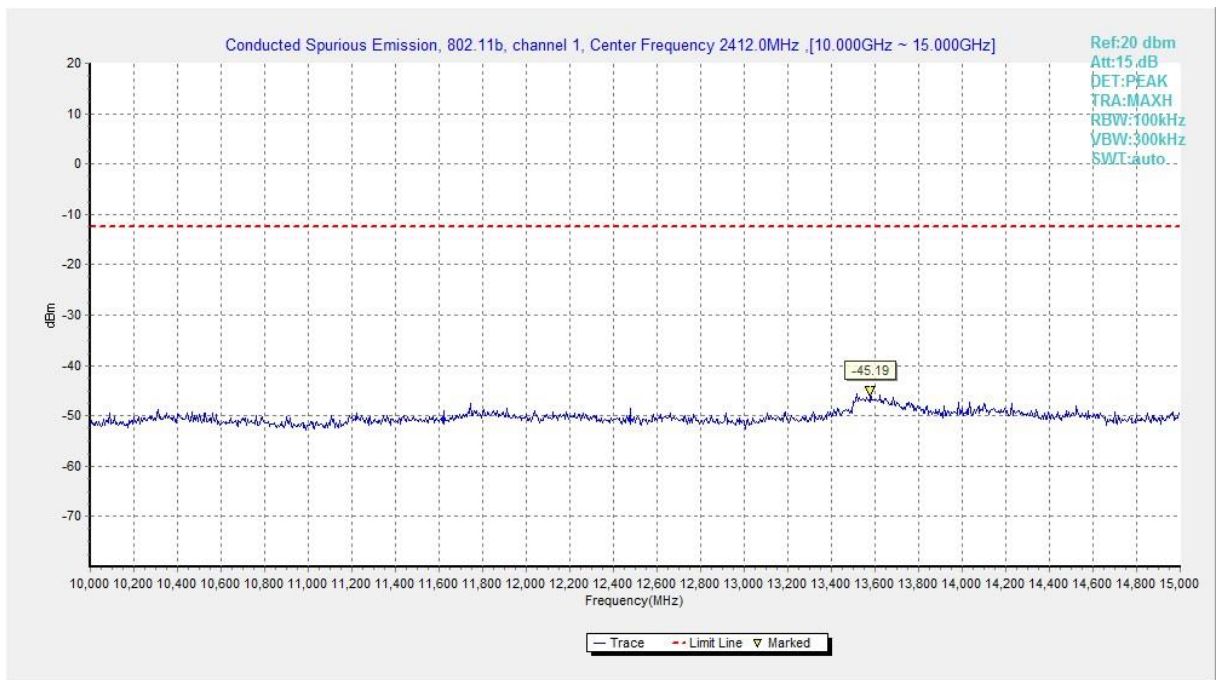


**Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 10 GHz-15 GHz)**




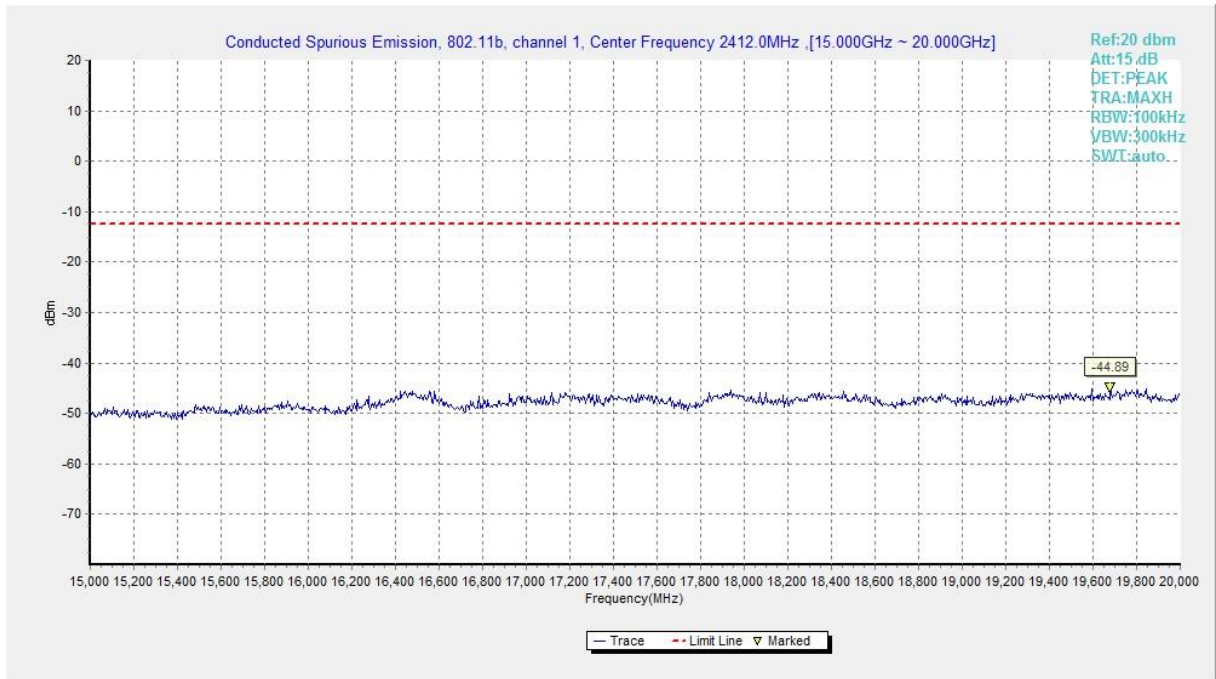


**Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 15 GHz-20 GHz)**

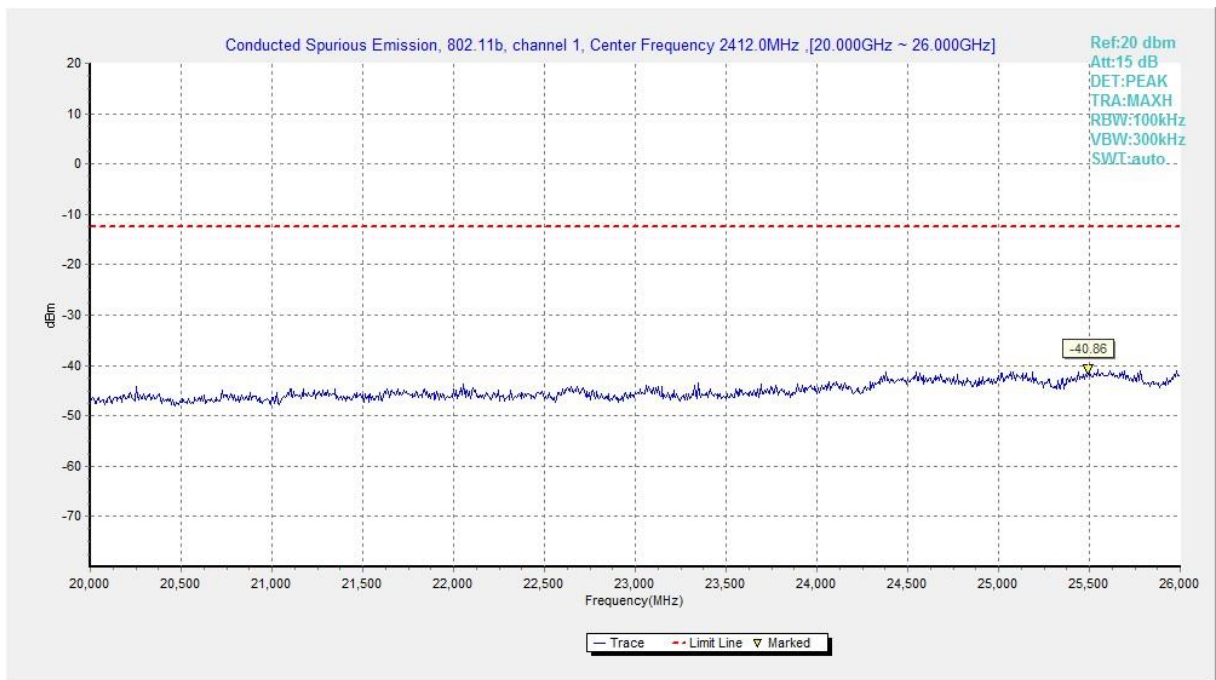

**Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 20 GHz-26 GHz)**

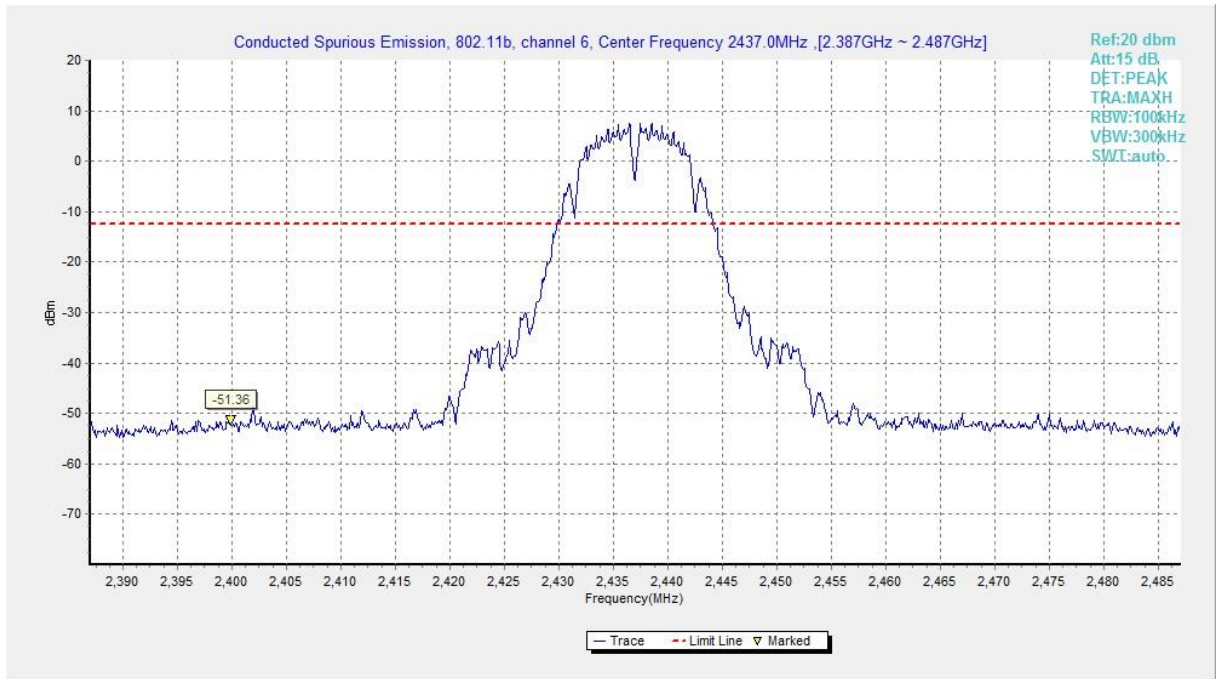

**Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)**

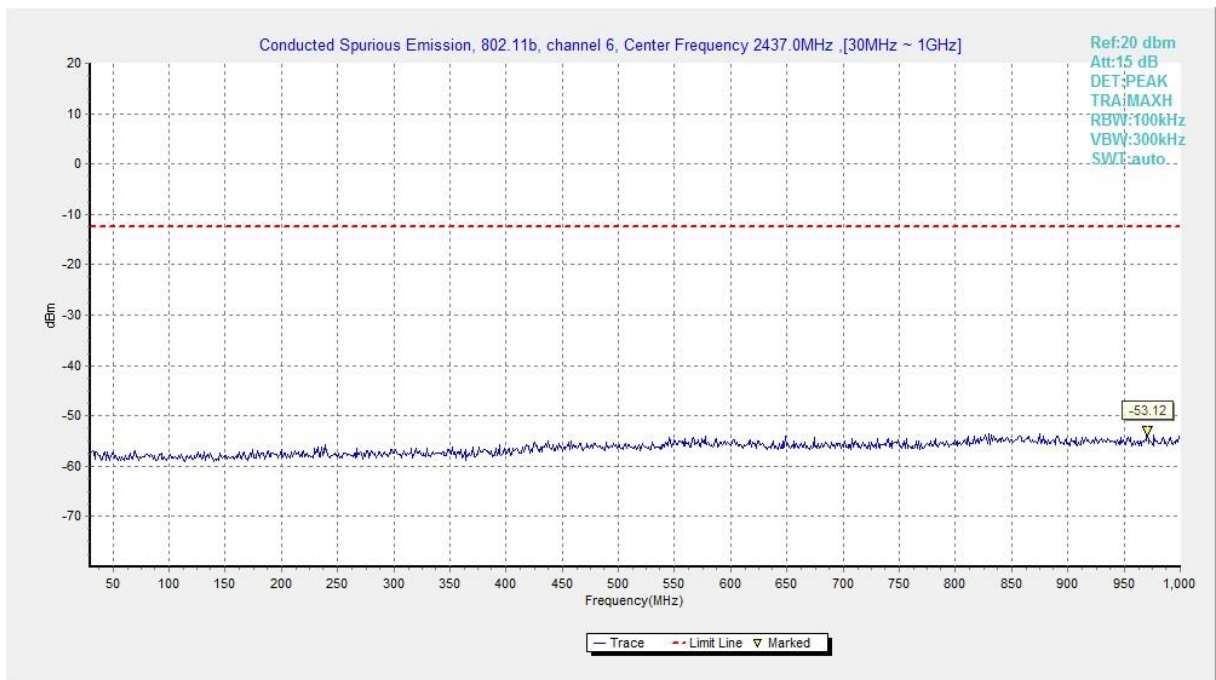

**Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)**

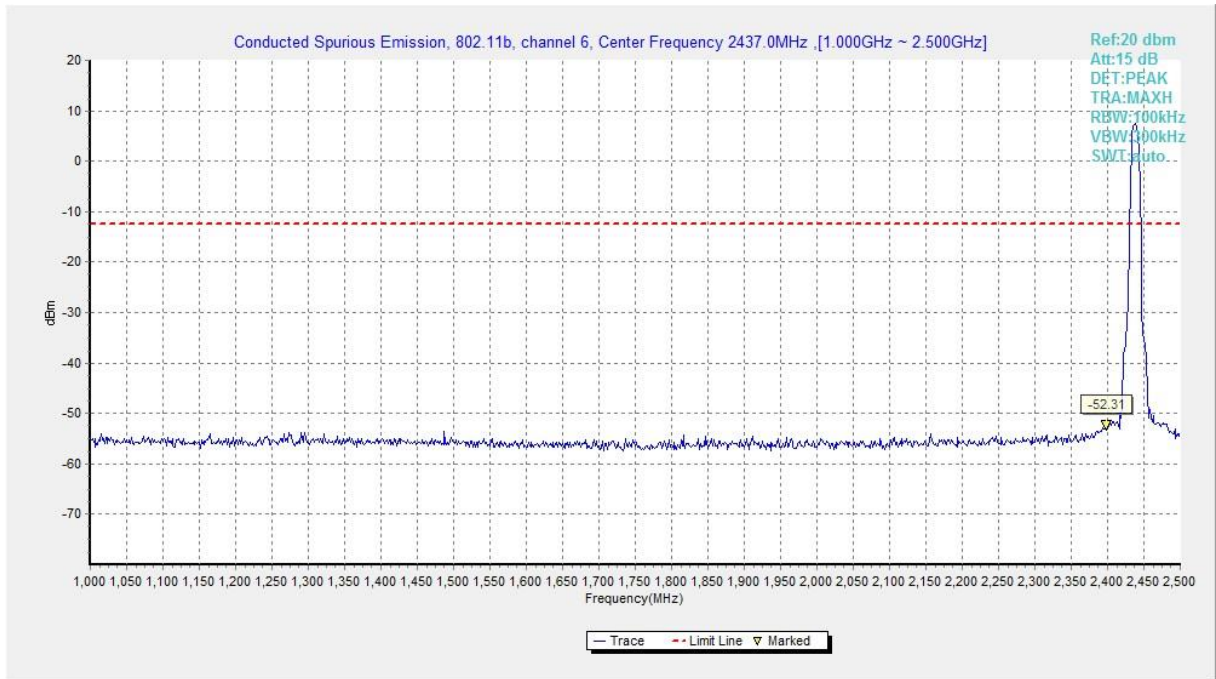


Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-2.5 GHz)



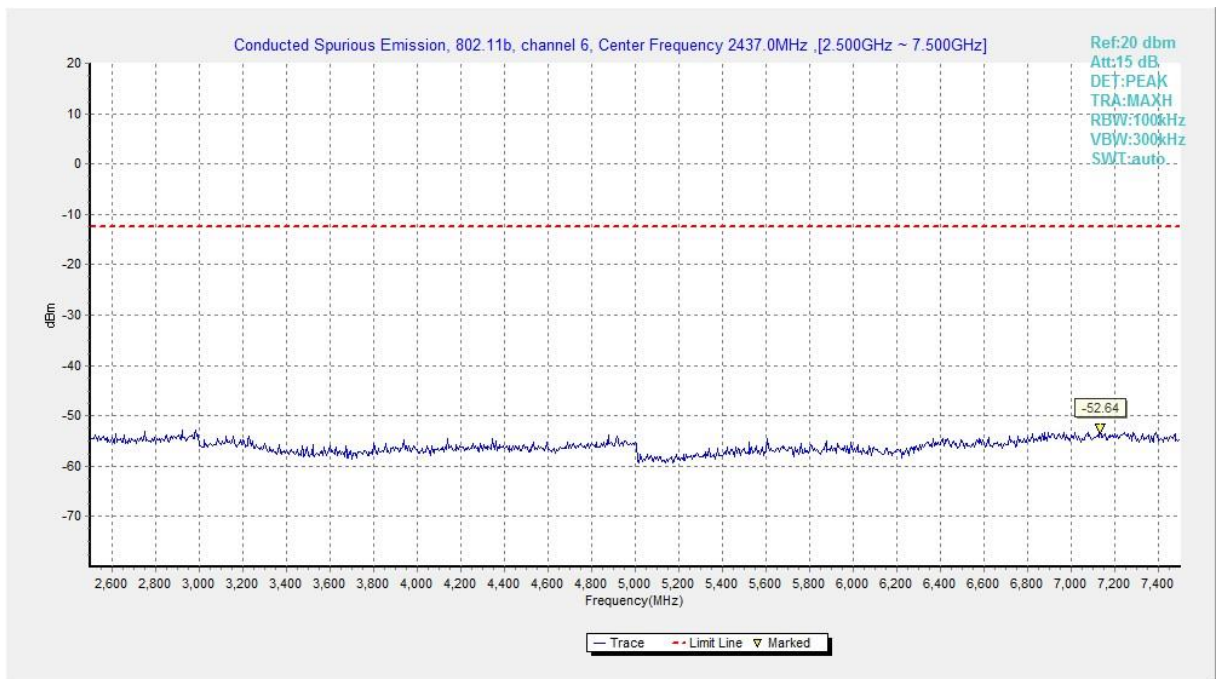


Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 2.5 GHz-7.5 GHz)

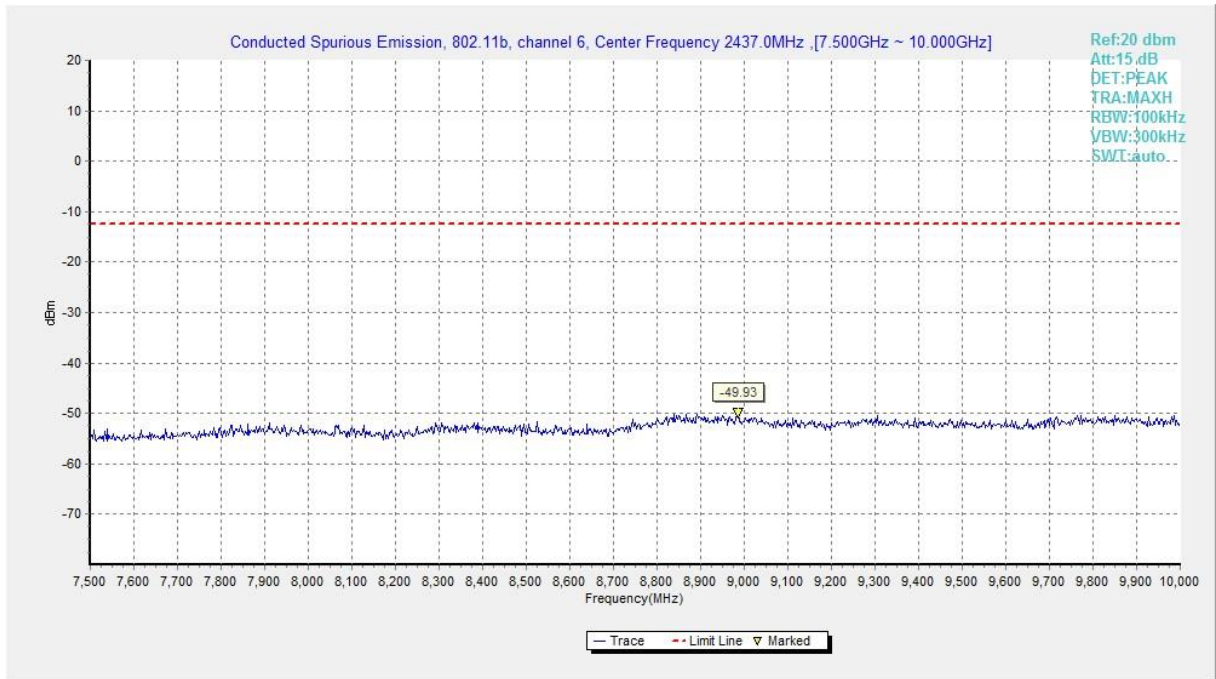

**Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 7.5 GHz-10 GHz)**

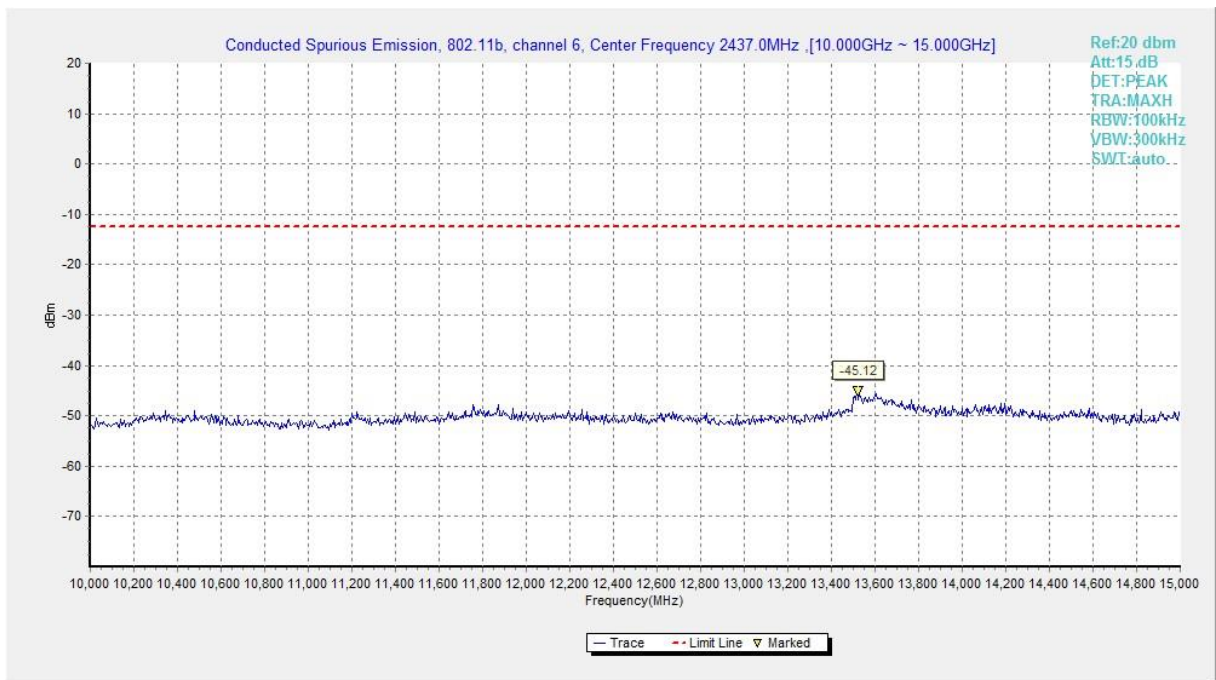

**Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 10 GHz-15 GHz)**