



# TEST REPORT

## No. I21Z62863-WMD01

for

**TCL Communication Ltd.**

**UMTS/LTE mobile phone**

**Model Name: 4058E**

**FCC ID: 2ACCJN063**

with

**Hardware Version: 03**

**Software Version: QK1F**

**Issued Date: 2022-02-23**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

| <b>Report Number</b> | <b>Revision</b> | <b>Description</b>      | <b>Issue Date</b> |
|----------------------|-----------------|-------------------------|-------------------|
| I21Z62863-WMD01      | Rev.0           | 1 <sup>st</sup> edition | 2022-02-23        |

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

|   |           |
|---|-----------|
| <b>1. TEST LABORATORY</b> .....   | <b>4</b>  |
| <b>1.1. INTRODUCTION &amp; ACCREDITATION</b> .....                      | <b>4</b>  |
| <b>1.2. TESTING LOCATION</b> .....                                      | <b>4</b>  |
| <b>1.3. TESTING ENVIRONMENT</b> .....                                   | <b>5</b>  |
| <b>1.4. PROJECT DATA</b> .....  | <b>5</b>  |
| <b>1.5. SIGNATURE</b> .....   | <b>5</b>  |
| <b>2. CLIENT INFORMATION</b> .....                                      | <b>6</b>  |
| <b>2.1. APPLICANT INFORMATION</b> .....                                 | <b>6</b>  |
| <b>2.2. MANUFACTURER INFORMATION</b> .....                              | <b>6</b>  |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> ..... | <b>7</b>  |
| <b>3.1. ABOUT EUT</b> .....   | <b>7</b>  |
| <b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST</b> .....   | <b>7</b>  |
| <b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST</b> .....    | <b>7</b>  |
| <b>4. REFERENCE DOCUMENTS</b> .....                                     | <b>8</b>  |
| <b>4.1. DOCUMENTS SUPPLIED BY APPLICANT</b> .....                       | <b>8</b>  |
| <b>4.2. REFERENCE DOCUMENTS FOR TESTING</b> .....                       | <b>8</b>  |
| <b>5. LABORATORY ENVIRONMENT</b> .....                                  | <b>9</b>  |
| <b>6. SUMMARY OF TEST RESULT</b> .....                                  | <b>10</b> |
| <b>7. TEST EQUIPMENT UTILIZED</b> .....                                 | <b>12</b> |
| <b>ANNEX A: MEASUREMENT RESULTS</b> .....                               | <b>13</b> |
| A.1 OUTPUT POWER.....   | 13        |
| A.2 EMISSION LIMIT.....   | 18        |
| A.3 FREQUENCY STABILITY.....  | 28        |
| A.4 OCCUPIED BANDWIDTH.....   | 31        |
| A.5 EMISSION BANDWIDTH.....   | 38        |
| A.6 BAND EDGE COMPLIANCE.....   | 45        |
| A.7 CONDUCTED SPURIOUS EMISSION.....                                    | 49        |
| A.8 PEAK-TO-AVERAGE POWER RATIO.....                                    | 56        |
| <b>ANNEX B: ACCREDITATION CERTIFICATE</b> .....                         | <b>57</b> |



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P.R. China 100191

Location 2: CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development  
Area, Beijing, P. R. China 100176

### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2022-01-04  
Testing End Date: 2022-01-30

### 1.5. Signature



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Peter yang  
Email: peter.yang@tcl.com  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Peter yang  
Email: peter.yang@tcl.com  
Telephone: +86 755 3664 5759  
Fax: +86 755 3661 2000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

|                         |   |
|-------------------------|---|
| Description             | UMTS/LTE mobile phone                           |
| Model Name              | 4058E   |
| FCC ID                  | 2ACCJN063                                       |
| Antenna                 | Embedded  |
| Output power            | 23.8dBm maximum EIRP measured for WCDMA Band II |
| Extreme vol. Limits     | 3.5VDC to 4.4VDC (nominal: 3.8VDC)              |
| Extreme temp. Tolerance | -10°C to +55°C                                  |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

| <b>EUT ID*</b> | <b>IMEI</b>     | <b>HW Version</b> | <b>SW Version</b> | <b>Date of receipt</b> |
|----------------|-----------------|-------------------|-------------------|------------------------|
| UT13a          | 016182000200665 | 03                | QK1F              | 2022-01-04             |

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

| <b>AE ID*</b> | <b>Description</b> |
|---------------|--------------------|
| AE1           | Battery            |
| AE1           |                    |
| Model         | TLi017C7           |
| Manufacturer  | veken              |
| Capacitance   | 1780mAh            |

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters are supplied by the client or manufacturer, which are the bases of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

| <b>Reference</b> | <b>Title</b>  | <b>Version</b>     |
|------------------|---|--------------------|
| FCC Part 24      | PERSONAL COMMUNICATIONS SERVICES  | 10-1-20<br>Edition |
| FCC Part 22      | PUBLIC MOBILE SERVICES  | 10-1-20<br>Edition |
| FCC Part 27      | MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES  | 10-1-20<br>Edition |
| ANSI/TIA-603-E   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards               | 2016               |
| ANSI C63.26      | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services | 2015               |
| KDB 971168 D01   | MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS                           | v03r01             |



## 5. Laboratory Environment

**Fully-anechoic chamber FAC-3** (9 meters × 6.5 meters × 4 meters) did not exceed following limits along the EMC testing:

|   |   |
|---|---|
| Temperature                                     | Min. = 15 °C, Max. = 35 °C                        |
| Relative humidity                               | Min. = 15 %, Max. = 75 %                          |
| Shielding effectiveness                         | 0.014MHz - 1MHz, >60dB;<br>1MHz - 1000MHz, >90dB. |
| Electrical insulation                           | > 2 M   |
| Ground system resistance                        | < 1   |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1GHz to 18GHz            |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 4000 MHz           |

## 6. Summary Of Test Result

### WCDMA Band II

| Items | Test Name                   | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1     | Output Power                | 24.232              | P       |
| 2     | Emission Limit              | 2.1051/24.238       | P       |
| 3     | Frequency Stability         | 2.1055              | BR      |
| 4     | Occupied Bandwidth          | 2.1049              | BR      |
| 5     | Emission Bandwidth          | 24.238              | BR      |
| 6     | Band Edge Compliance        | 24.238              | BR      |
| 7     | Conducted Spurious Emission | 24.238              | BR      |
| 8     | Peak-to-Average Power Ratio | 24.232              | BR      |

### WCDMA Band V

| Items | Test Name                   | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1     | Output Power                | 22.913              | P       |
| 2     | Emission Limit              | 2.1051/22.917       | P       |
| 3     | Frequency Stability         | 2.1055              | BR      |
| 4     | Occupied Bandwidth          | 2.1049              | BR      |
| 5     | Emission Bandwidth          | 22.917              | BR      |
| 6     | Band Edge Compliance        | 22.917              | BR      |
| 7     | Conducted Spurious Emission | 22.917              | BR      |

### WCDMA Band IV

| Items | Test Name                   | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1     | Output Power                | 27.50               | P       |
| 2     | Emission Limit              | 2.1051/27.53        | P       |
| 3     | Frequency Stability         | 2.1055              | BR      |
| 4     | Occupied Bandwidth          | 2.1049              | BR      |
| 5     | Emission Bandwidth          | 27.53               | BR      |
| 6     | Band Edge Compliance        | 27.53               | BR      |
| 7     | Conducted Spurious Emission | 27.53               | BR      |
| 8     | Peak-to-Average Power Ratio | 27.50               | BR      |

Terms used in Verdict column

|    |  |
|----|--|
| P  | Pass. The EUT complies with the essential requirements in the standard.        |
| NP | Not Performed. The test was not performed by CTTL.                             |
| NA | Not Applicable. The test was not applicable.                                   |
| BR | Re-use test data from basic model report.                                      |
| F  | Fail. The EUT does not comply with the essential requirements in the standard. |

All the test results are based on normal power.

Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. The test results shown in the following sections represent the worst case emission.

The Equipment Under Test (EUT) model 4058E (FCC ID: 2ACCJN063) is a variant product of T408DL,4058L,4058G (FCC ID: 2ACCJN059), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements were performed on this device, all the test results are derived from test report No. I21Z62522-WMD02. Please refer Annex A for detail spot check verification data and reference data. The spot check test results are consistent with basic model.

For detail differences between two models please refer the Declaration of Changes document.

## 7. Test Equipment Utilized

| Description                          | Type       | Series Number | Manufacture  | Cal Due Date | Calibration Interval |
|--------------------------------------|------------|---------------|--------------|--------------|----------------------|
| Universal Radio Communication Tester | CMU200     | 108646        | R&S          | 2023-01-17   | 25 months            |
| Spectrum Analyzer                    | FSU        | 200030        | R&S          | 2022-06-02   | 1 year               |
| Climate chamber                      | SH-242     | 93008556      | ESPEC        | 2023-12-23   | 3 years              |
| EMI Antenna                          | LB-7180-NF | 2030013000041 | A-info       | 2022-02-02   | 1 year               |
| EMI Antenna                          | 3117       | 00058889      | ETS-Lindgren | 2022-11-07   | 1 year               |
| Test Receiver                        | E4440A     | MY48250642    | Agilent      | 2022-03-04   | 1 year               |
| Universal Radio Communication Tester | CMW500     | 143008        | R&S          | 2022-12-01   | 1 year               |
| EMI Antenna                          | VULB9163   | 9163-235      | Schwarzbeck  | 2022-04-07   | 1 year               |
| Signal Generator                     | N5183A     | MY49060052    | Agilent      | 2022-07-11   | 1 year               |

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

##### **Spot Check Measurement Results:**

##### **WCDMA Band II**

##### **QPSK**

|                    | CH   | Frequency (MHz) | output power (dBm) |
|--------------------|------|-----------------|--------------------|
| WCDMA<br>(Band II) | 9262 | 1852.4          | 22.90              |
|                    | 9400 | 1880.0          | 23.00              |
|                    | 9538 | 1907.6          | 23.00              |

##### **WCDMA Band V**

##### **QPSK**

|                   | CH   | Frequency (MHz) | output power (dBm) |
|-------------------|------|-----------------|--------------------|
| WCDMA<br>(Band V) | 4132 | 826.4           | 23.20              |
|                   | 4183 | 836.6           | 23.20              |
|                   | 4233 | 846.6           | 23.10              |

##### **WCDMA Band IV**

##### **QPSK**

|                    | CH   | Frequency (MHz) | output power (dBm) |
|--------------------|------|-----------------|--------------------|
| WCDMA<br>(Band IV) | 1312 | 1712.4          | 22.90              |
|                    | 1412 | 1732.4          | 22.80              |
|                    | 1513 | 1752.6          | 22.80              |

**Reference Measurement Results from basic model:****WCDMA Band II****QPSK**

|                    | CH   | Frequency (MHz) | output power (dBm) |
|--------------------|------|-----------------|--------------------|
| WCDMA<br>(Band II) | 9262 | 1852.4          | 23.22              |
|                    | 9400 | 1880.0          | 23.41              |
|                    | 9538 | 1907.6          | 23.48              |

**WCDMA Band V****QPSK**

|                   | CH   | Frequency (MHz) | output power (dBm) |
|-------------------|------|-----------------|--------------------|
| WCDMA<br>(Band V) | 4132 | 826.4           | 23.39              |
|                   | 4183 | 836.6           | 23.49              |
|                   | 4233 | 846.6           | 23.52              |

**WCDMA Band IV****QPSK**

|                    | CH   | Frequency (MHz) | output power (dBm) |
|--------------------|------|-----------------|--------------------|
| WCDMA<br>(Band IV) | 1312 | 1712.4          | 23.33              |
|                    | 1412 | 1732.4          | 23.26              |
|                    | 1513 | 1752.6          | 23.25              |

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

**Band V:** Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

**Band II:** Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

**Band IV:** Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

#### A.1.3.2 Method of Measurement

NASI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Mea}} + G_{\text{T}}$$

Where

|                  |  |
|------------------|--|
| ERP or EIRP      | effective radiated power or equivalent isotropically radiated power,<br>respectively<br>(expressed in the same units as $P_{\text{Mea}}$ , e.g., dBm or dBW) |
| $P_{\text{Mea}}$ | measured transmitter output power or PSD, in dBm or dBW  |
| $G_{\text{T}}$   | gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)   |

**Measurement Results:**

**Spot Check Measurement Results:**

**WCDMA Band II**

**QPSK**

**Limit:  $\leq 33\text{dBm}(2\text{W})$**

| Frequency (MHz) | output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.8\text{dBi}$ |
|-----------------|--------------------|--|
| 1852.4          | 22.90              | 23.70  |
| 1880.0          | 23.00              | 23.80  |
| 1907.6          | 23.00              | 23.80  |

**WCDMA Band V**

**QPSK**

**Limit:  $\leq 38.45\text{dBm}(7\text{W})$**

| Frequency (MHz) | output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.5\text{dBi}$ |
|-----------------|--------------------|--|
| 826.4           | 23.20              | 21.55  |
| 836.6           | 23.20              | 21.55  |
| 846.6           | 23.10              | 21.45  |

**WCDMA Band IV**

**QPSK**

**Limit:  $\leq 30\text{dBm}(1\text{W})$**

| Frequency (MHz) | output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.8\text{dBi}$ |
|-----------------|--------------------|--|
| 1712.4          | 22.90              | 23.70  |
| 1732.4          | 22.80              | 23.60  |
| 1752.6          | 22.80              | 23.60  |



**Reference Measurement Results from basic model:**

**WCDMA Band II**

**QPSK**

**Limit:  $\leq 33\text{dBm}(2\text{W})$**

| Frequency (MHz) | Conducted output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.8\text{dBi}$ |
|-----------------|------------------------------|--|
| 1852.4          | 23.22                        | 24.02  |
| 1880.0          | 23.41                        | 24.21  |
| 1907.6          | 23.48                        | 24.28  |

**WCDMA Band V**

**QPSK**

**Limit:  $\leq 38.45\text{dBm}(7\text{W})$**

| Frequency (MHz) | Conducted output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.5\text{dBi}$ |
|-----------------|------------------------------|--|
| 826.4           | 23.39                        | 21.74  |
| 836.6           | 23.49                        | 21.84  |
| 846.6           | 23.52                        | 21.87  |

**WCDMA Band IV**

**QPSK**

**Limit:  $\leq 30\text{dBm}(1\text{W})$**

| Frequency (MHz) | Conducted output power (dBm) | Radiated output power (dBm)<br>$G_T = 0.8\text{dBi}$ |
|-----------------|------------------------------|--|
| 1712.4          | 23.33                        | 24.13  |
| 1732.4          | 23.26                        | 24.06  |
| 1752.6          | 23.25                        | 24.05  |

## **A.2 Emission Limit**


### **A.2.1 Measurement Method**


The measurements procedures in C63.26 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### **The procedure of radiated spurious emissions is as follows:**

Using the test configuration as follow, measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits.

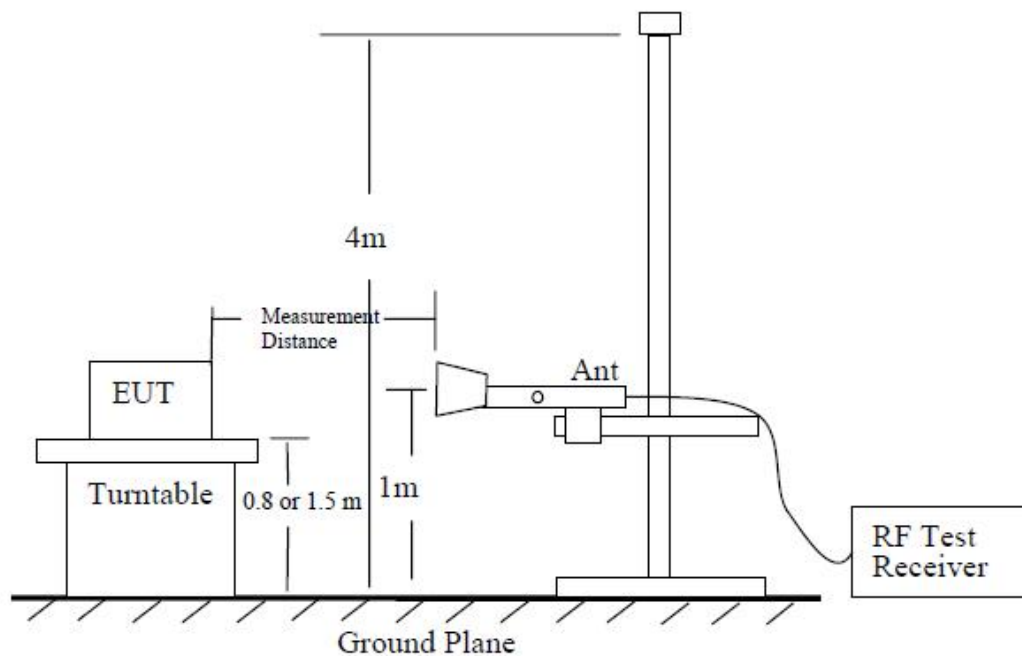

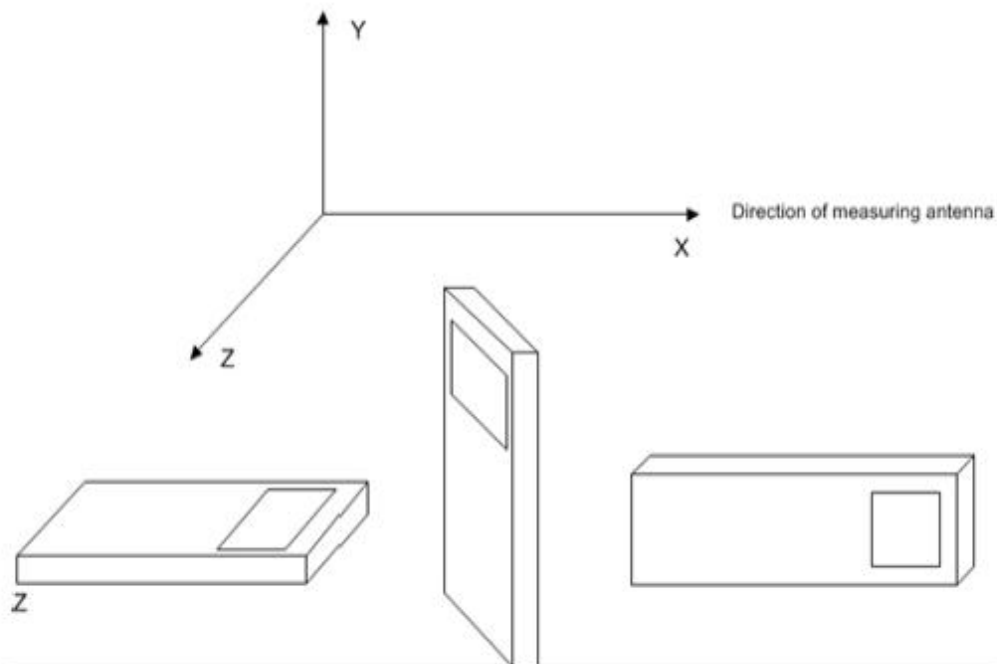

The emission characteristics of the EUT can be identified from the pre-scan measurement information.

Exploratory radiated measurements (pre-scans) may be performed to determine the general EUT radiated emissions characteristics and, when necessary, the EUT-to-measurement antenna orientation that produces the maximum emission amplitude. Pre-scans shall only be used to determine the emission frequencies (i.e., not amplitude levels). The information garnered from a pre-scan can then be used to perform final compliance measurements using either the substitution or direct field strength method.

For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80 cm above the reference ground plane. Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e., field strength or received power). When orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25 cm.

The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table or support at a nominal height of 1.5 m above the ground plane. When maximizing the emissions from the EUT for measurement, the EUT and its transmitting antenna(s) shall be rotated through 360°. For each mode of operation to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. Final measurements shall be performed for the worst case combination(s) of variable technical parameters that result in the maximum measured emission amplitude, record the frequency and amplitude of the highest fundamental emission (if applicable), and the frequency and amplitude data for the six highest-amplitude spurious emissions.

### A.2.2 Measurement Limit

**Band V:** Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

**Band II:** 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

**Band IV:** 27.53(m) specify that “For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.”

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

| Frequency     | Channel | Frequency Range | Result |
|---------------|---------|-----------------|--------|
| WCDMA Band V  | Low     | 30MHz-10GHz     | Pass   |
|               | Middle  | 30MHz-10GHz     | Pass   |
|               | High    | 30MHz-10GHz     | Pass   |
| WCDMA Band II | Low     | 30MHz-20GHz     | Pass   |
|               | Middle  | 30MHz-20GHz     | Pass   |
|               | High    | 30MHz-20GHz     | Pass   |
| WCDMA Band IV | Low     | 30MHz-20GHz     | Pass   |
|               | Middle  | 30MHz-20GHz     | Pass   |
|               | High    | 30MHz-20GHz     | Pass   |

#### A.2.5 Sweep Table

| Working Frequency | Subrange (GHz) | RBW    | VBW    | Sweep time (s) |
|-------------------|----------------|--------|--------|----------------|
| WCDMA Band V      | 0.03~1         | 100kHz | 300kHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~10           | 1 MHz  | 3 MHz  | 3              |
| WCDMA Band II     | 0.03~1         | 100kHz | 300kHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~11           | 1 MHz  | 3 MHz  | 3              |
|                   | 11~14          | 1 MHz  | 3 MHz  | 3              |
|                   | 14~18          | 1 MHz  | 3 MHz  | 3              |
| 18~20             | 1 MHz          | 3 MHz  | 2      |                |
| WCDMA Band IV     | 0.03~1         | 100kHz | 300kHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~11           | 1 MHz  | 3 MHz  | 3              |
|                   | 11~14          | 1 MHz  | 3 MHz  | 3              |
|                   | 14~18          | 1 MHz  | 3 MHz  | 3              |
|                   | 18~20          | 1 MHz  | 3 MHz  | 2              |

**Measurement Results:**
**Spot Check Measurement Results:**
**WCDMA BAND II Mode Channel 9262/1852.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3703.02         | -55.79                 | 6.42           | 8.48              | -53.73          | -13.00      | 40.73       | V            |
| 5560.02         | -56.92                 | 7.19           | 10.59             | -53.52          | -13.00      | 40.52       | V            |
| 7404.01         | -54.77                 | 8.13           | 12.08             | -50.82          | -13.00      | 37.82       | H            |
| 9264.01         | -52.83                 | 9.07           | 13.26             | -48.64          | -13.00      | 35.64       | H            |
| 11105.01        | -50.54                 | 9.81           | 13.18             | -47.17          | -13.00      | 34.17       | V            |
| 12951.01        | -48.37                 | 10.49          | 13.47             | -45.39          | -13.00      | 32.39       | H            |

**WCDMA BAND II Mode Channel 9400/1880MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3750.02         | -59.10                 | 6.29           | 8.55              | -56.84          | -13.00      | 43.84       | H            |
| 5642.02         | -58.08                 | 7.27           | 10.57             | -54.78          | -13.00      | 41.78       | H            |
| 7495.01         | -54.60                 | 8.38           | 12.19             | -50.79          | -13.00      | 37.79       | H            |
| 9380.01         | -54.31                 | 9.06           | 13.33             | -50.04          | -13.00      | 37.04       | H            |
| 11263.01        | -51.10                 | 9.78           | 13.15             | -47.73          | -13.00      | 34.73       | H            |
| 13141.01        | -45.42                 | 10.76          | 13.70             | -42.48          | -13.00      | 29.48       | V            |

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3818.02         | -60.28                 | 6.08           | 8.65              | -57.71          | -13.00      | 44.71       | V            |
| 5720.02         | -56.64                 | 7.30           | 10.56             | -53.38          | -13.00      | 40.38       | H            |
| 7661.01         | -54.98                 | 8.25           | 12.33             | -50.90          | -13.00      | 37.90       | H            |
| 9549.01         | -53.34                 | 9.36           | 13.35             | -49.35          | -13.00      | 36.35       | V            |
| 11463.01        | -50.54                 | 9.91           | 13.11             | -47.34          | -13.00      | 34.34       | V            |
| 13364.01        | -43.95                 | 10.57          | 14.01             | -40.51          | -13.00      | 27.51       | V            |

**WCDMA BAND V Mode Channel 4132/826.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1650.01         | -50.91                 | 3.57          | 5.23              | 2.15            | -51.40         | -13.00      | 38.40       | H            |
| 2459.00         | -23.49                 | 4.58          | 5.98              | 2.15            | -24.24         | -13.00      | 11.24       | H            |
| 3299.02         | -59.63                 | 5.29          | 7.72              | 2.15            | -59.35         | -13.00      | 46.35       | H            |
| 4136.02         | -53.66                 | 6.06          | 9.04              | 2.15            | -52.83         | -13.00      | 39.83       | H            |
| 4963.01         | -57.50                 | 6.67          | 9.86              | 2.15            | -56.46         | -13.00      | 43.46       | V            |
| 5767.01         | -56.34                 | 7.24          | 10.55             | 2.15            | -55.18         | -13.00      | 42.18       | H            |

**WCDMA BAND V Mode Channel 4183/836.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1664.01         | -54.05                 | 3.57          | 5.20              | 2.15            | -54.57         | -13.00      | 41.57       | H            |
| 2528.00         | -45.87                 | 4.65          | 6.15              | 2.15            | -46.52         | -13.00      | 33.52       | H            |
| 3364.02         | -60.28                 | 5.33          | 7.87              | 2.15            | -59.89         | -13.00      | 46.89       | H            |
| 4186.02         | -53.16                 | 6.17          | 9.09              | 2.15            | -52.39         | -13.00      | 39.39       | V            |
| 5011.01         | -57.57                 | 6.58          | 9.92              | 2.15            | -56.38         | -13.00      | 43.38       | V            |
| 5850.01         | -57.35                 | 7.23          | 10.53             | 2.15            | -56.20         | -13.00      | 43.20       | H            |

**WCDMA BAND V Mode Channel 4233/846.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1692.01         | -52.50                 | 3.59          | 5.15              | 2.15            | -53.09         | -13.00      | 40.09       | V            |
| 2552.00         | -46.08                 | 4.67          | 6.19              | 2.15            | -46.71         | -13.00      | 33.71       | H            |
| 3386.02         | -58.61                 | 5.35          | 7.93              | 2.15            | -58.18         | -13.00      | 45.18       | H            |
| 4230.02         | -46.73                 | 6.26          | 9.13              | 2.15            | -46.01         | -13.00      | 33.01       | V            |
| 5094.01         | -56.86                 | 6.76          | 10.03             | 2.15            | -55.74         | -13.00      | 42.74       | V            |
| 5928.01         | -55.85                 | 7.47          | 10.51             | 2.15            | -54.96         | -13.00      | 41.96       | V            |

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3423.02         | -48.03                 | 5.38          | 8.02              | -45.39          | -13.00      | 32.39       | V            |
| 5142.02         | -69.42                 | 6.87          | 10.10             | -66.19          | -13.00      | 53.19       | V            |
| 6852.01         | -65.45                 | 7.82          | 11.42             | -61.85          | -13.00      | 48.85       | H            |
| 8574.01         | -65.09                 | 8.54          | 13.01             | -60.62          | -13.00      | 47.62       | H            |
| 10253.01        | -63.34                 | 9.48          | 13.00             | -59.82          | -13.00      | 46.82       | V            |
| 11990.01        | -60.24                 | 10.10         | 13.00             | -57.34          | -13.00      | 44.34       | H            |

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3463.02         | -50.32                 | 5.45          | 8.11              | -47.66          | -13.00      | 34.66       | V            |
| 5201.02         | -69.60                 | 6.96          | 10.18             | -66.38          | -13.00      | 53.38       | H            |
| 6979.01         | -65.08                 | 8.14          | 11.57             | -61.65          | -13.00      | 48.65       | H            |
| 8718.01         | -65.07                 | 8.41          | 13.04             | -60.44          | -13.00      | 47.44       | H            |
| 10459.01        | -63.21                 | 9.71          | 13.08             | -59.84          | -13.00      | 46.84       | V            |
| 12198.01        | -60.55                 | 10.06         | 13.08             | -57.53          | -13.00      | 44.53       | H            |

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3504.02         | -56.31                 | 5.53          | 8.21              | -53.63          | -13.00      | 40.63       | V            |
| 5245.02         | -69.70                 | 7.00          | 10.24             | -66.46          | -13.00      | 53.46       | V            |
| 7013.01         | -64.92                 | 8.28          | 11.62             | -61.58          | -13.00      | 48.58       | H            |
| 8743.01         | -64.91                 | 8.49          | 13.05             | -60.35          | -13.00      | 47.35       | H            |
| 10525.01        | -63.05                 | 9.56          | 13.11             | -59.50          | -13.00      | 46.50       | H            |
| 12276.01        | -60.18                 | 10.01         | 13.11             | -57.08          | -13.00      | 44.08       | H            |

Note: Expanded measurement uncertainty is U = 5.16 dB, k = 2.



**Reference Measurement Results from basic model:**  
**WCDMA BAND II Mode Channel 9262/1852.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3703.02         | -53.56                 | 6.42           | 8.48              | -51.50          | -13.00      | 38.50       | H            |
| 5555.02         | -58.05                 | 7.19           | 10.59             | -54.65          | -13.00      | 41.65       | H            |
| 7403.01         | -54.83                 | 8.13           | 12.08             | -50.88          | -13.00      | 37.88       | H            |
| 9247.01         | -52.92                 | 9.03           | 13.25             | -48.70          | -13.00      | 35.70       | V            |
| 11108.01        | -51.53                 | 9.80           | 13.18             | -48.15          | -13.00      | 35.15       | V            |
| 12944.01        | -48.16                 | 10.49          | 13.47             | -45.18          | -13.00      | 32.18       | H            |

**WCDMA BAND II Mode Channel 9400/1880MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3758.02         | -55.43                 | 6.27           | 8.56              | -53.14          | -13.00      | 40.14       | H            |
| 5639.02         | -57.30                 | 7.27           | 10.57             | -54.00          | -13.00      | 41.00       | H            |
| 7501.01         | -54.50                 | 8.39           | 12.20             | -50.69          | -13.00      | 37.69       | H            |
| 9379.01         | -54.31                 | 9.06           | 13.33             | -50.04          | -13.00      | 37.04       | V            |
| 11300.01        | -50.58                 | 10.00          | 13.14             | -47.44          | -13.00      | 34.44       | V            |
| 13139.01        | -45.26                 | 10.76          | 13.69             | -42.33          | -13.00      | 29.33       | V            |

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss (dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------|-------------------|-----------------|-------------|-------------|--------------|
| 3817.02         | -52.90                 | 6.09           | 8.64              | -50.35          | -13.00      | 37.35       | H            |
| 5725.02         | -54.33                 | 7.30           | 10.55             | -51.08          | -13.00      | 38.08       | H            |
| 7636.01         | -54.59                 | 8.14           | 12.31             | -50.42          | -13.00      | 37.42       | H            |
| 9545.01         | -54.08                 | 9.38           | 13.35             | -50.11          | -13.00      | 37.11       | V            |
| 11476.01        | -50.68                 | 9.87           | 13.10             | -47.45          | -13.00      | 34.45       | V            |
| 13378.01        | -44.56                 | 10.57          | 14.03             | -41.10          | -13.00      | 28.10       | V            |

**WCDMA BAND V Mode Channel 4132/826.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1639.01         | -54.43                 | -3.56         | 5.25              | 2.15            | -54.89         | -13.00      | 41.89       | H            |
| 2459.00         | -30.21                 | -4.58         | 5.98              | 2.15            | -30.96         | -13.00      | 17.96       | V            |
| 3278.02         | -59.89                 | -5.28         | 7.67              | 2.15            | -59.65         | -13.00      | 46.65       | H            |
| 4112.02         | -56.50                 | -6.04         | 9.01              | 2.15            | -55.68         | -13.00      | 42.68       | H            |
| 4935.01         | -57.46                 | -6.72         | 9.84              | 2.15            | -56.49         | -13.00      | 43.49       | H            |
| 5767.01         | -56.54                 | -7.24         | 10.55             | 2.15            | -55.38         | -13.00      | 42.38       | H            |

**WCDMA BAND V Mode Channel 4183/836.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1684.01         | -54.66                 | -3.59         | 5.17              | 2.15            | -55.23         | -13.00      | 42.23       | H            |
| 2526.00         | -46.67                 | -4.65         | 6.15              | 2.15            | -47.32         | -13.00      | 34.32       | H            |
| 3337.02         | -60.54                 | -5.31         | 7.81              | 2.15            | -60.19         | -13.00      | 47.19       | H            |
| 4199.02         | -57.40                 | -6.20         | 9.10              | 2.15            | -56.65         | -13.00      | 43.65       | H            |
| 5002.01         | -57.40                 | -6.60         | 9.90              | 2.15            | -56.25         | -13.00      | 43.25       | V            |
| 5873.01         | -57.22                 | -7.31         | 10.53             | 2.15            | -56.15         | -13.00      | 43.15       | V            |

**WCDMA BAND V Mode Channel 4233/846.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1682.01         | -55.55                 | -3.59         | 5.17              | 2.15            | -56.12         | -13.00      | 43.12       | V            |
| 2532.00         | -47.08                 | -4.65         | 6.16              | 2.15            | -47.72         | -13.00      | 34.72       | H            |
| 3391.02         | -60.03                 | -5.35         | 7.94              | 2.15            | -59.59         | -13.00      | 46.59       | H            |
| 4248.02         | -57.86                 | -6.24         | 9.15              | 2.15            | -57.10         | -13.00      | 44.10       | H            |
| 5090.01         | -56.87                 | -6.74         | 10.03             | 2.15            | -55.73         | -13.00      | 42.73       | H            |
| 5935.01         | -56.73                 | -7.47         | 10.51             | 2.15            | -55.84         | -13.00      | 42.84       | H            |

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3423.02         | -46.42                 | -5.38         | 8.02              | -43.78          | -13.00      | 30.78       | V            |
| 5128.02         | -69.50                 | -6.85         | 10.08             | -66.27          | -13.00      | 53.27       | H            |
| 6851.01         | -65.61                 | -7.82         | 11.42             | -62.01          | -13.00      | 49.01       | H            |
| 8567.01         | -65.19                 | -8.55         | 13.01             | -60.73          | -13.00      | 47.73       | H            |
| 10285.01        | -63.31                 | -9.59         | 13.01             | -59.89          | -13.00      | 46.89       | V            |
| 11996.01        | -60.31                 | -10.07        | 13.00             | -57.38          | -13.00      | 44.38       | H            |

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3463.02         | -50.36                 | -5.45         | 8.11              | -47.70          | -13.00      | 34.70       | V            |
| 5201.02         | -69.68                 | -6.96         | 10.18             | -66.46          | -13.00      | 53.46       | H            |
| 6975.01         | -65.38                 | -8.11         | 11.57             | -61.92          | -13.00      | 48.92       | H            |
| 8710.01         | -64.78                 | -8.39         | 13.04             | -60.13          | -13.00      | 47.13       | H            |
| 10446.01        | -62.98                 | -9.73         | 13.08             | -59.63          | -13.00      | 46.63       | V            |
| 12177.01        | -60.49                 | -10.13        | 13.07             | -57.55          | -13.00      | 44.55       | H            |

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3507.02         | -57.50                 | -5.53         | 8.21              | -54.82          | -13.00      | 41.82       | V            |
| 5246.02         | -69.92                 | -7.00         | 10.24             | -66.68          | -13.00      | 53.68       | V            |
| 6995.01         | -65.08                 | -8.26         | 11.59             | -61.75          | -13.00      | 48.75       | H            |
| 8763.01         | -65.06                 | -8.55         | 13.05             | -60.56          | -13.00      | 47.56       | H            |
| 10513.01        | -62.95                 | -9.60         | 13.10             | -59.45          | -13.00      | 46.45       | V            |
| 12288.01        | -60.42                 | -10.00        | 13.12             | -57.30          | -13.00      | 44.30       | H            |

Sample: 3507.02MHz

Power (EIRP) = P<sub>Mea</sub> + P<sub>pl</sub> + G<sub>a</sub>

Power (-54.82dBm) = P<sub>Mea</sub> (-57.50dBm) + P<sub>pl</sub> (-5.53dB) + G<sub>a</sub>(8.21dBi)

Note: Expanded measurement uncertainty is U = 5.16 dB, k = 2.

Note: The measurement results showed here are worst cases

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II QPSK

##### Frequency Error vs Temperature

| Temperature(°C) | Voltage(V) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|-----------------|------------|----------------------|----------------------|------------|----------------------|
| 20              | 3.8        | 1850.128             | 1909.872             |            |                      |
| 50              |            |                      |                      | 1.74       | 0.0009               |
| 40              |            |                      |                      | 2.82       | 0.0015               |
| 30              |            |                      |                      | 4.64       | 0.0025               |
| 10              |            |                      |                      | 2.81       | 0.0015               |
| 0               |            |                      |                      | -0.72      | 0.0004               |
| -10             |            |                      |                      | 5.04       | 0.0027               |
| -20             |            |                      |                      | 1.51       | 0.0008               |
| -30             |            |                      |                      | 4.09       | 0.0022               |

##### Frequency Error vs Voltage

| Voltage(V) | Temperature(°C) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|------------|-----------------|----------------------|----------------------|------------|----------------------|
| 3.5        | 20              | 1850.128             | 1909.872             | -3.07      | 0.0016               |
| 4.4        |                 |                      |                      | 2.32       | 0.0012               |

#### WCDMA Band V QPSK

##### Frequency Error vs Temperature

| Temperature(°C) | Voltage(V) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|-----------------|------------|----------------------|----------------------|------------|----------------------|
| 20              | 3.8        | 824.128              | 848.856              |            |                      |
| 50              |            |                      |                      | 5.11       | 0.0061               |
| 40              |            |                      |                      | -0.44      | 0.0005               |
| 30              |            |                      |                      | 5.95       | 0.0071               |
| 10              |            |                      |                      | 4.47       | 0.0053               |
| 0               |            |                      |                      | 7.25       | 0.0087               |
| -10             |            |                      |                      | 4.58       | 0.0055               |
| -20             |            |                      |                      | 3.52       | 0.0042               |
| -30             |            |                      |                      | 11.05      | 0.0132               |

##### Frequency Error vs Voltage

| Voltage(V) | Temperature(°C) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|------------|-----------------|----------------------|----------------------|------------|----------------------|
| 3.5        | 20              | 824.128              | 848.856              | 3.78       | 0.0045               |
| 4.4        |                 |                      |                      | 4.84       | 0.0058               |

**WCDMA Band IV QPSK**
**Frequency Error vs Temperature**

| Temperature(°C) | Voltage(V) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|-----------------|------------|----------------------|----------------------|------------|----------------------|
| 20              | 3.8        | 1710.128             | 1754.896             |            |                      |
| 50              |            |                      |                      | 1.88       | 0.0011               |
| 40              |            |                      |                      | 4.23       | 0.0024               |
| 30              |            |                      |                      | 3.72       | 0.0021               |
| 10              |            |                      |                      | 5.04       | 0.0029               |
| 0               |            |                      |                      | 2.26       | 0.0013               |
| -10             |            |                      |                      | 5.31       | 0.0031               |
| -20             |            |                      |                      | 2.38       | 0.0014               |
| -30             |            |                      |                      | 3.59       | 0.0021               |

**Frequency Error vs Voltage**

| Voltage(V) | Temperature(°C) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|------------|-----------------|----------------------|----------------------|------------|----------------------|
| 3.5        | 20              | 1710.128             | 1754.896             | 3.43       | 0.0020               |
| 4.4        |                 |                      |                      | 1.42       | 0.0008               |

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

**WCDMA Band II (99%)-QPSK**

| Frequency (MHz) | Occupied Bandwidth (99%)(kHz) |
|-----------------|-------------------------------|
| 1852.4          | 4198.72                       |
| 1880.0          | 4182.69                       |
| 1907.6          | 4182.69                       |

**WCDMA Band II (99%)**


**Channel 9262-Occupied Bandwidth (99% BW)**

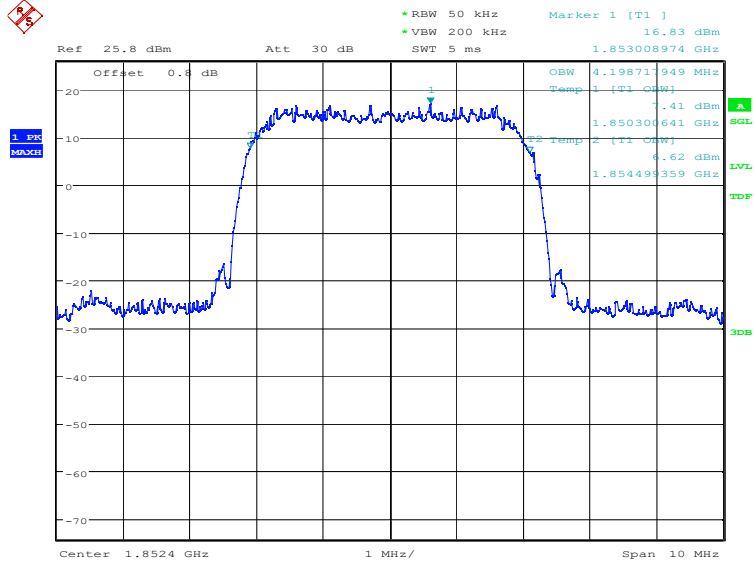

Date: 16.DEC.2021 08:41:41




### Channel 9400-Occupied Bandwidth (99% BW)

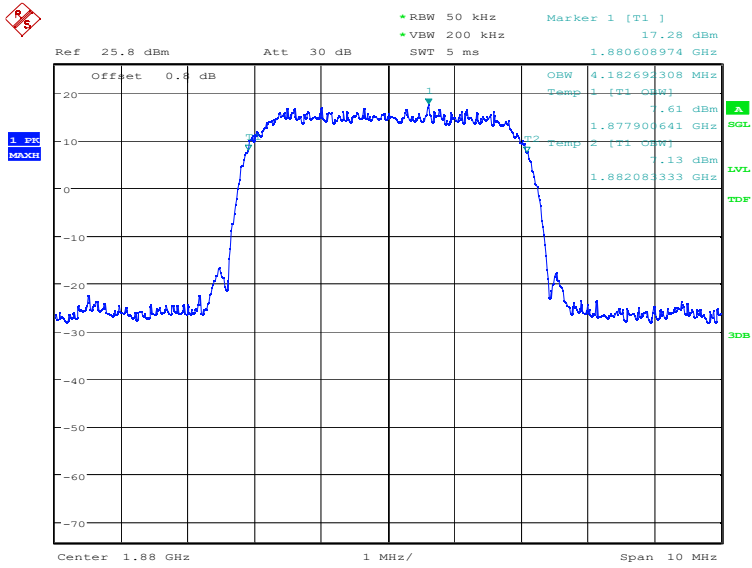

Date: 16.DEC.2021 08:42:08

### Channel 9538-Occupied Bandwidth (99% BW)

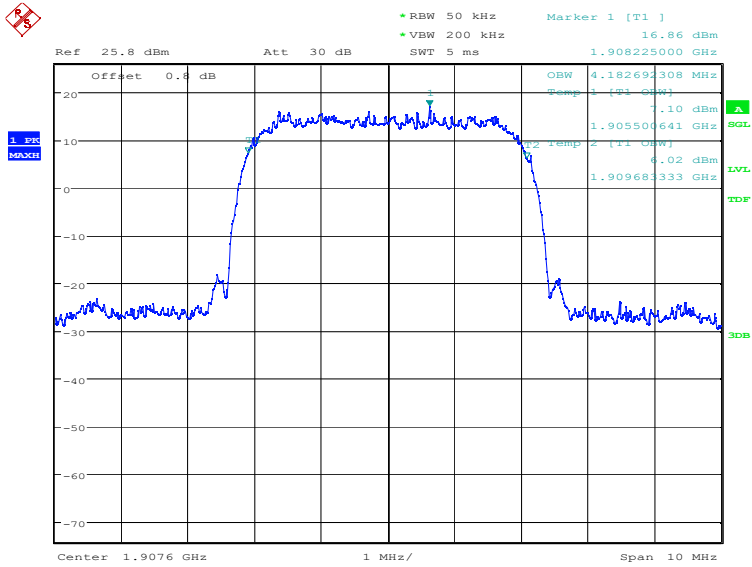


Date: 16.DEC.2021 08:42:35

**WCDMA Band V (99%)-QPSK**

| Frequency (MHz) | Occupied Bandwidth (99%)(kHz) |
|-----------------|-------------------------------|
| 826.4           | 4198.72                       |
| 836.6           | 4166.67                       |
| 846.6           | 4150.64                       |


**WCDMA Band V (99%)**

**Channel 4132-Occupied Bandwidth (99% BW)**

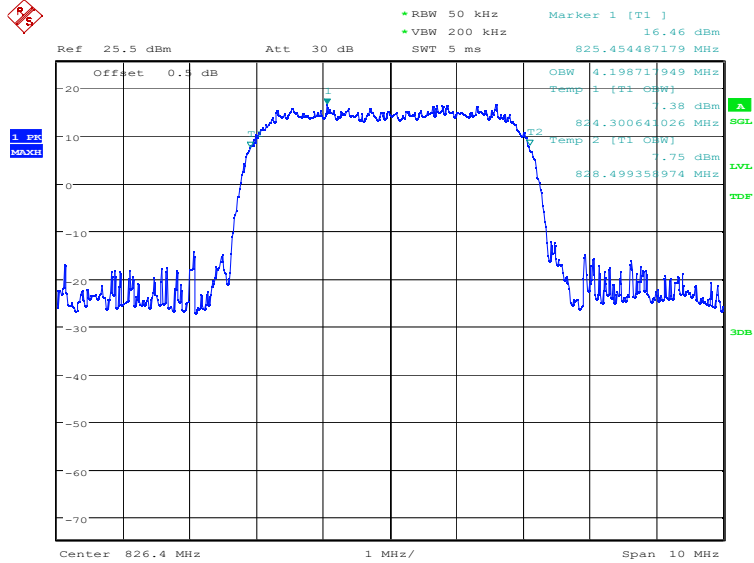


Date: 16.DEC.2021 08:48:18

### Channel 4183-Occupied Bandwidth (99% BW)

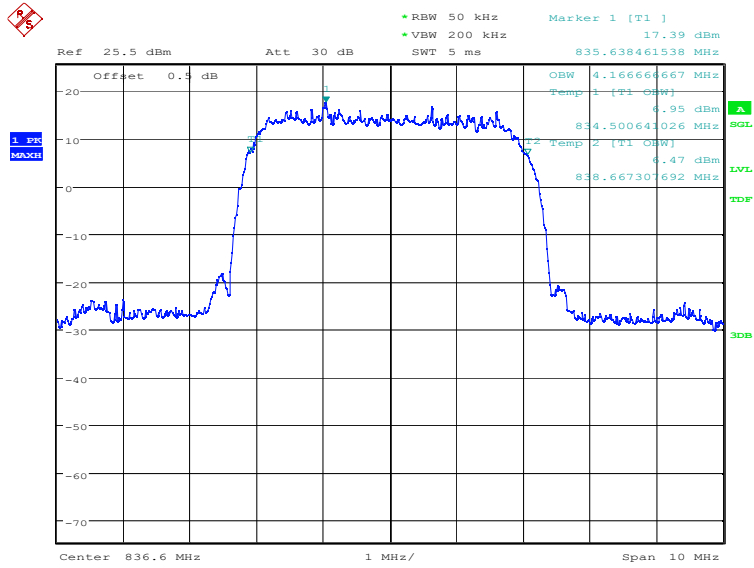

Date: 16.DEC.2021 08:48:45

### Channel 4233-Occupied Bandwidth (99% BW)

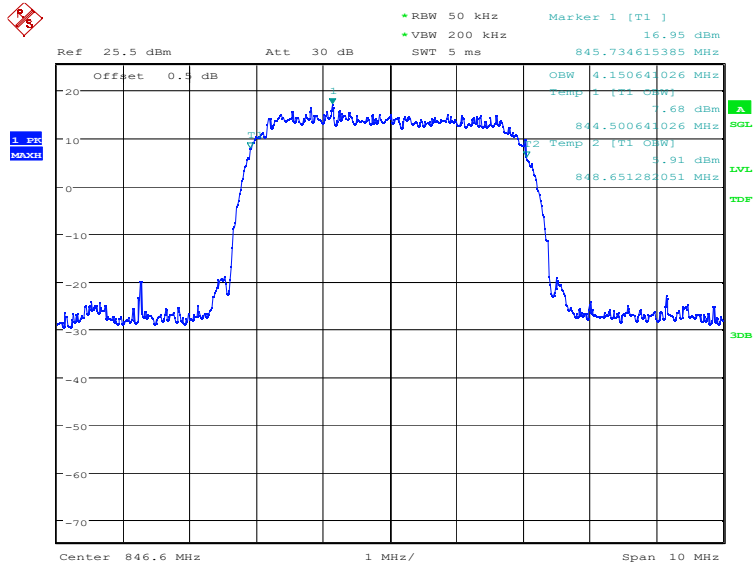


Date: 16.DEC.2021 08:49:12

### WCDMA Band IV (99%)-QPSK

| Frequency (MHz) | Occupied Bandwidth (99%)(kHz) |
|-----------------|-------------------------------|
| 1712.4          | 4182.69                       |
| 1732.4          | 4182.69                       |
| 1752.6          | 4182.69                       |


### WCDMA Band IV (99%)

#### Channel 1312-Occupied Bandwidth (99% BW)

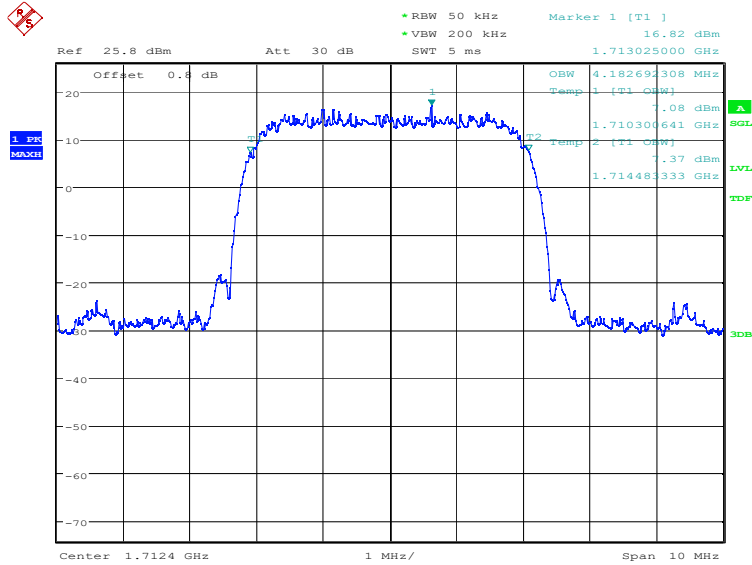


Date: 16.DEC.2021 08:45:01

### Channel 1412-Occupied Bandwidth (99% BW)

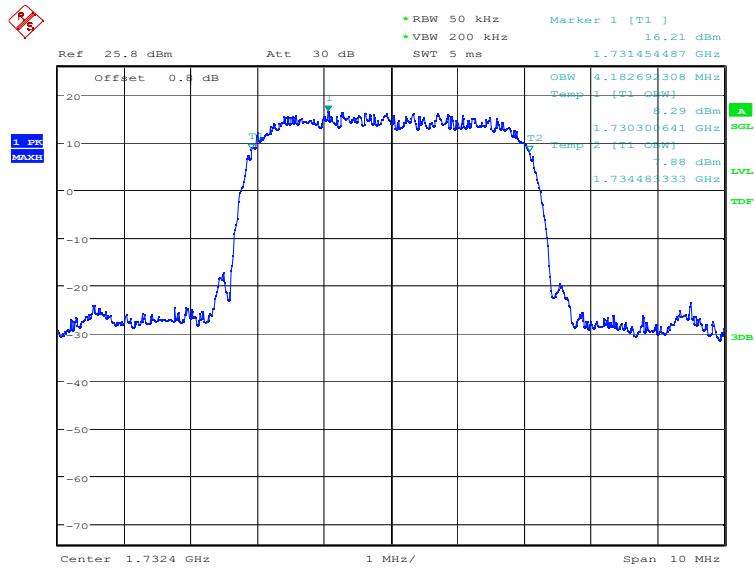

Date: 16.DEC.2021 08:45:28

### Channel 1513-Occupied Bandwidth (99% BW)

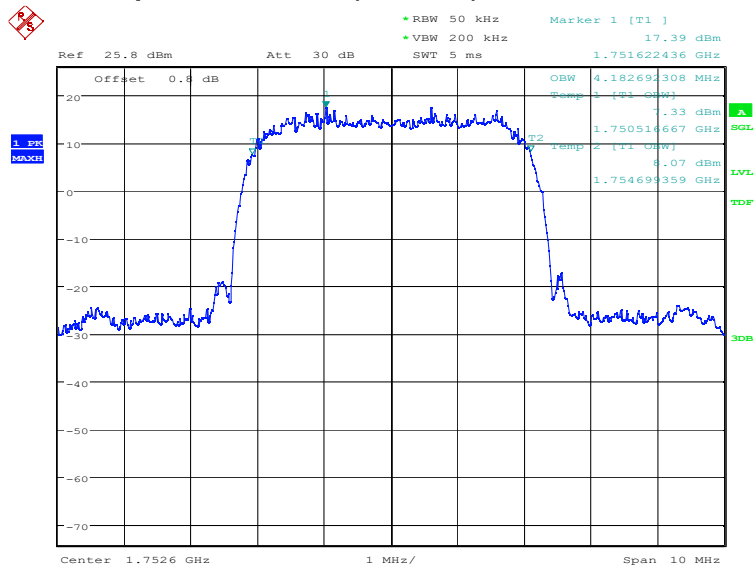

Date: 16.DEC.2021 08:45:55

## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

**WCDMA Band II-QPSK (-26dBc)**

| Frequency (MHz) | Emission Bandwidth (-26dBc)(kHz) |
|-----------------|----------------------------------|
| 1852.4          | 4679.49                          |
| 1880.0          | 4679.49                          |
| 1907.6          | 4711.54                          |


**WCDMA Band II (-26dBc)**

**Channel 9262-Emission Bandwidth (-26dBc BW)**

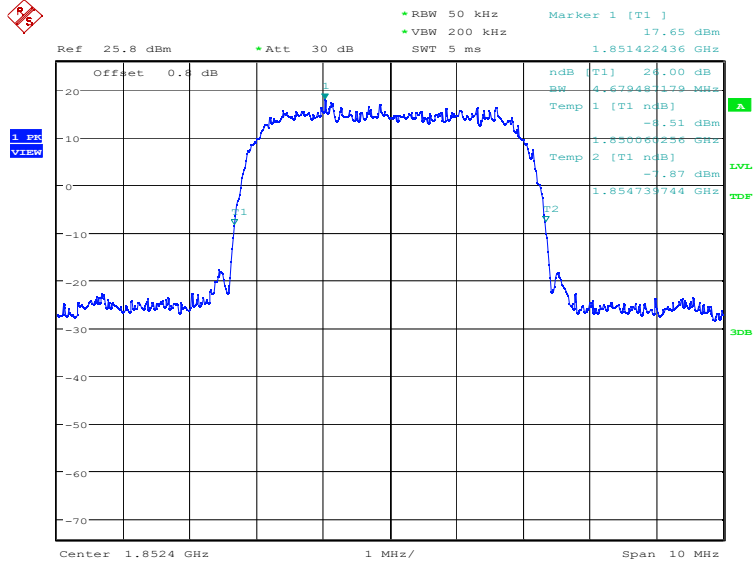


Date: 16.DEC.2021 08:50:29

### Channel 9400-Emission Bandwidth (-26dBc BW)

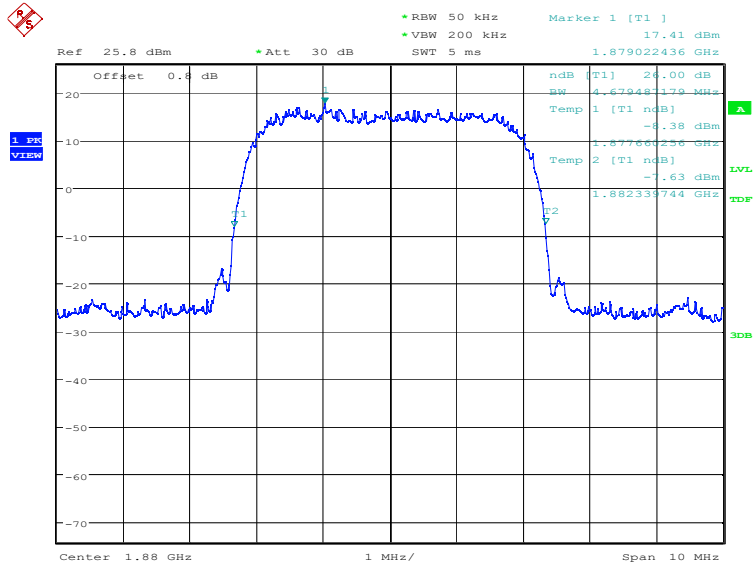

Date: 16.DEC.2021 08:50:56

### Channel 9538-Emission Bandwidth (-26dBc BW)

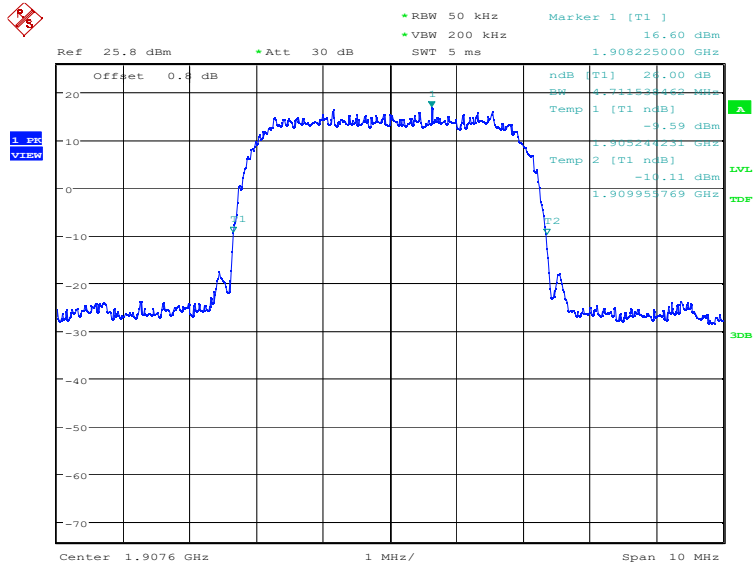

Date: 16.DEC.2021 08:51:23




### WCDMA Band V-QPSK (-26dBc)

| Frequency (MHz) | Emission Bandwidth (-26dBc)(kHz) |
|-----------------|----------------------------------|
| 826.40          | 4695.51                          |
| 836.60          | 4663.46                          |
| 846.60          | 4711.54                          |


### WCDMA Band V (-26dBc)

#### Channel 4132-Emission Bandwidth (-26dBc BW)

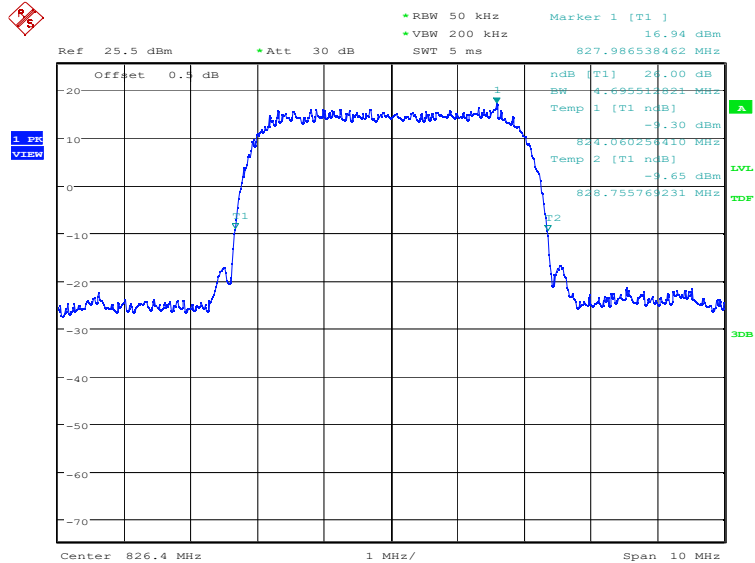


Date: 16.DEC.2021 08:54:28

### Channel 4183-Emission Bandwidth (-26dBc BW)

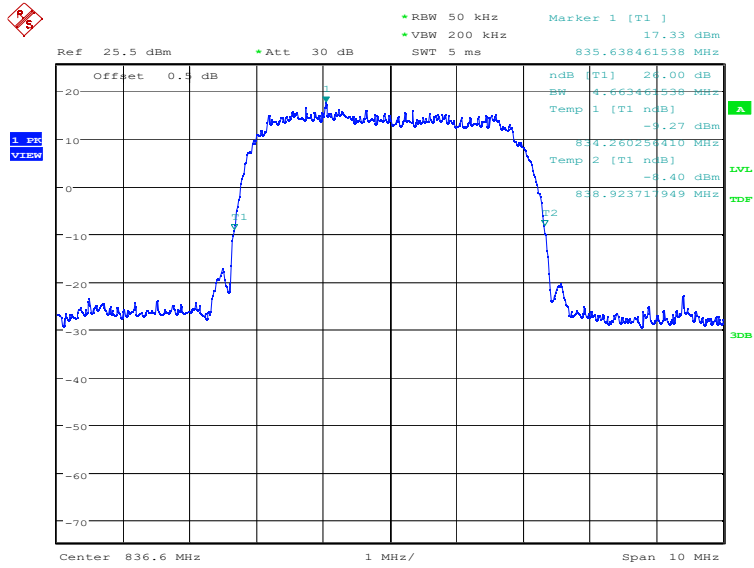

Date: 16.DEC.2021 08:54:55

### Channel 4233-Emission Bandwidth (-26dBc BW)

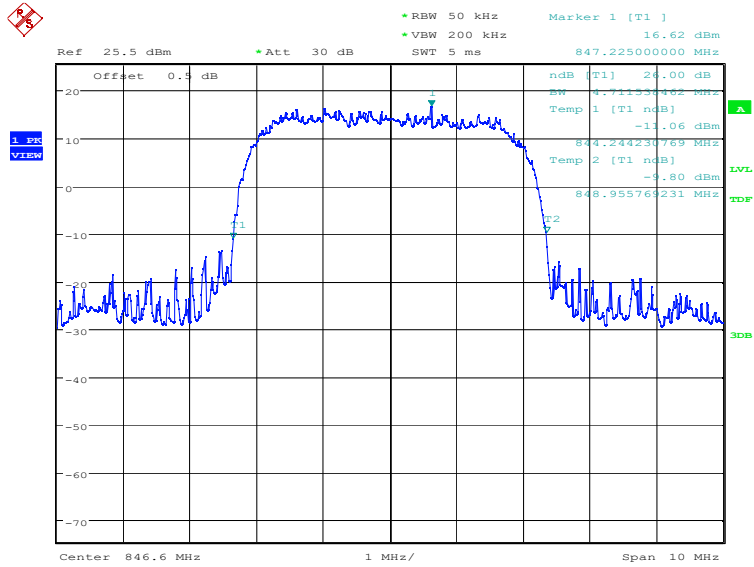


Date: 16.DEC.2021 08:55:22

### WCDMA Band IV-QPSK (-26dBc)

| Frequency (MHz) | Emission Bandwidth (-26dBc)(kHz) |
|-----------------|----------------------------------|
| 1712.4          | 4695.51                          |
| 1732.4          | 4679.49                          |
| 1752.6          | 4695.51                          |


### WCDMA Band IV (-26dBc)

#### Channel 1312-Emission Bandwidth (-26dBc BW)

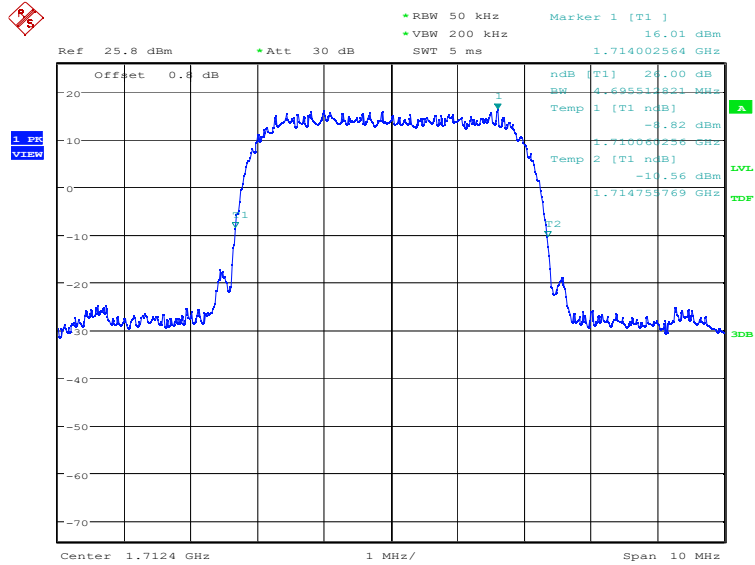


Date: 16.DEC.2021 08:52:28

### Channel 1412-Emission Bandwidth (-26dBc BW)

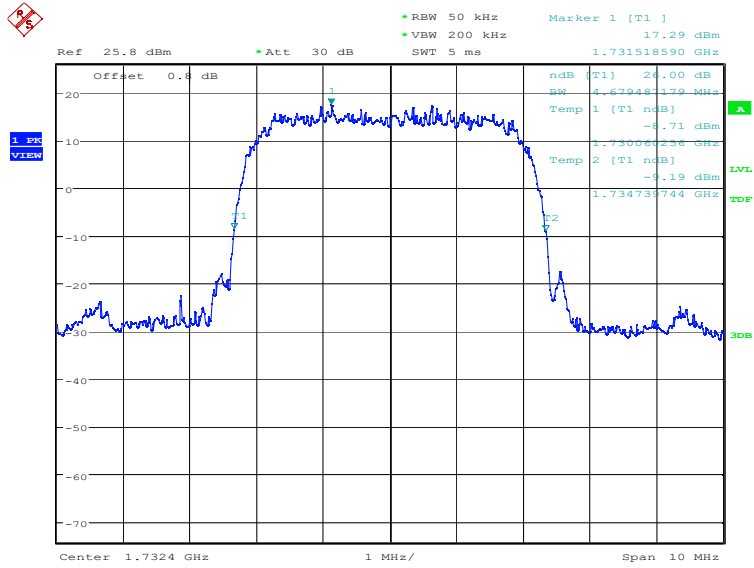

Date: 16.DEC.2021 08:52:55

### Channel 1513-Emission Bandwidth (-26dBc BW)

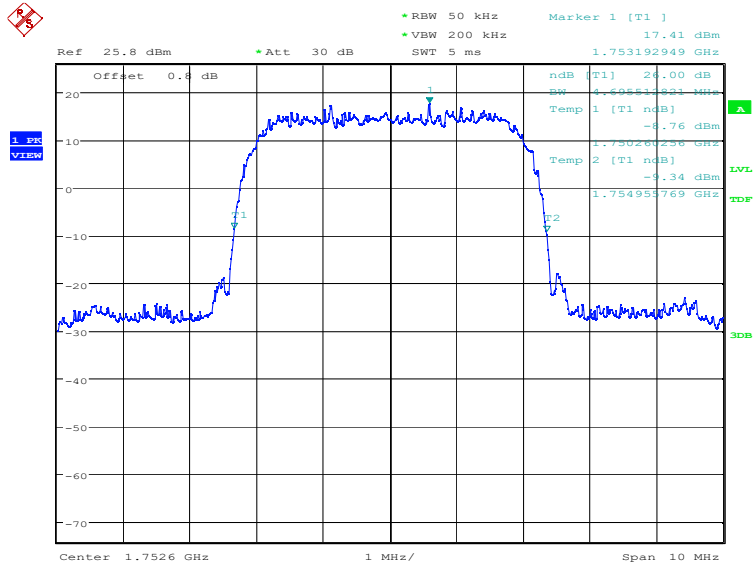

Date: 16.DEC.2021 08:53:23

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

### A.6.2 Measurement result


#### WCDMA Band II-QPSK

#### Channel 9262

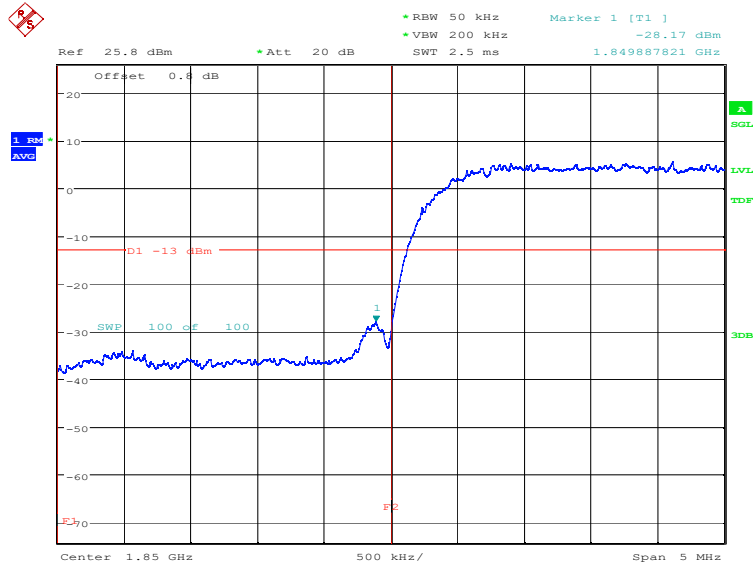


Date: 16.DEC.2021 08:56:29

#### Channel 9538

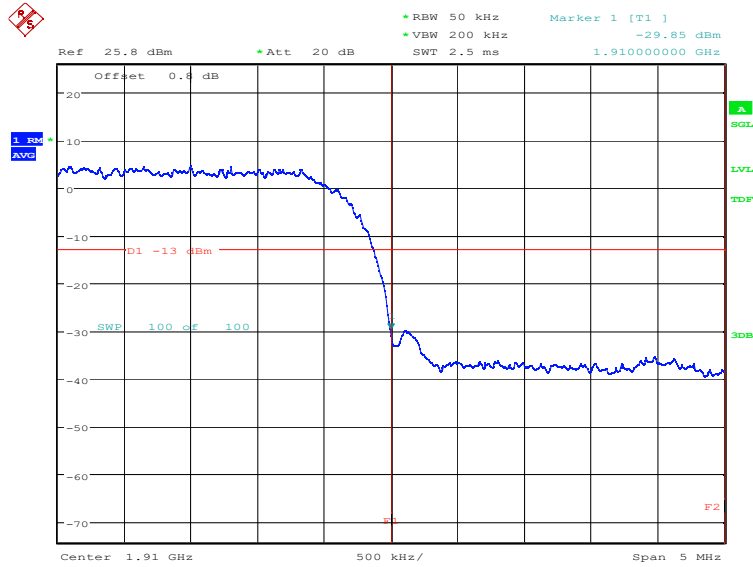


Date: 16.DEC.2021 08:57:44

WCDMA Band V-QPSK  
Channel 4132

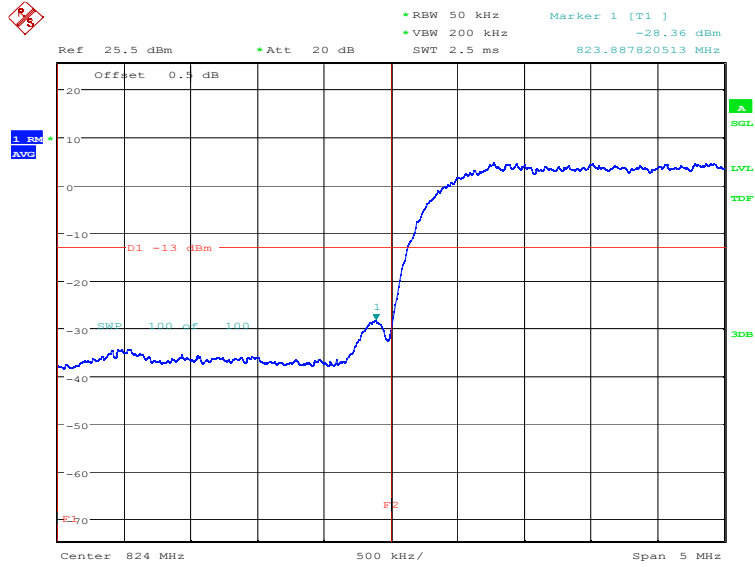


Date: 16.DEC.2021 09:02:45

Channel 4233

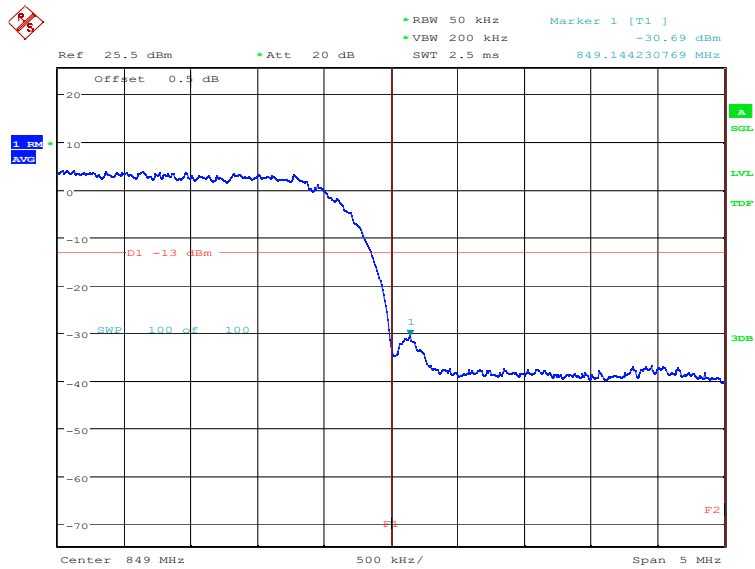


Date: 16.DEC.2021 09:04:00

**WCDMA Band IV-QPSK**  
**Channel 1312**

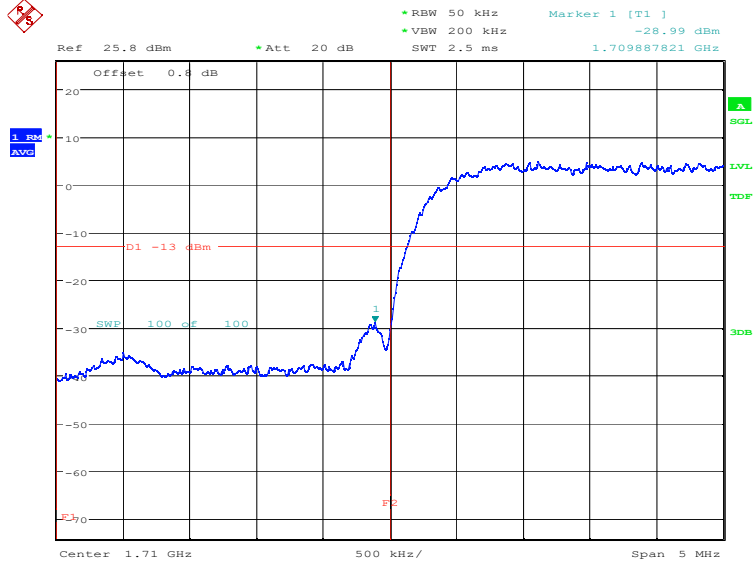

Date: 16.DEC.2021 08:59:37

**Channel 1513**

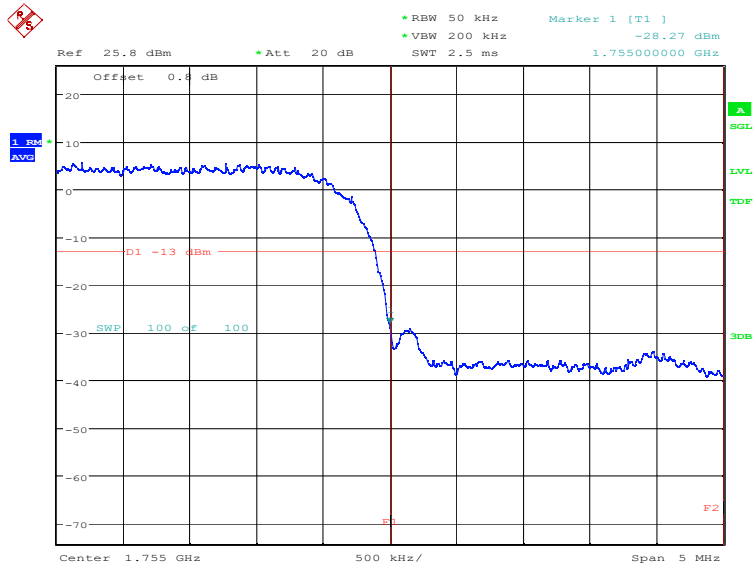

Date: 16.DEC.2021 09:00:52



## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span}/\text{RBW}$ .

### **A. 7.2 Measurement Limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.7.3 Measurement result

#### WCDMA Band II

#### Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

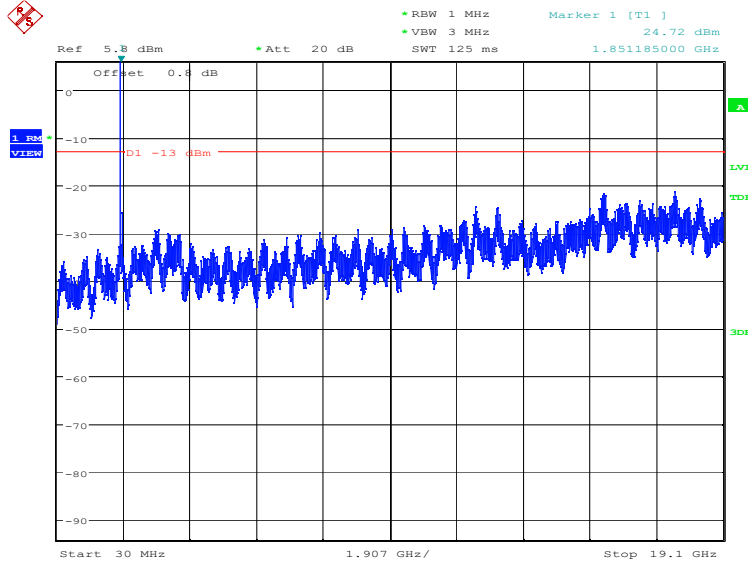

Date: 16.DEC.2021 09:06:17

#### Channel 9400: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

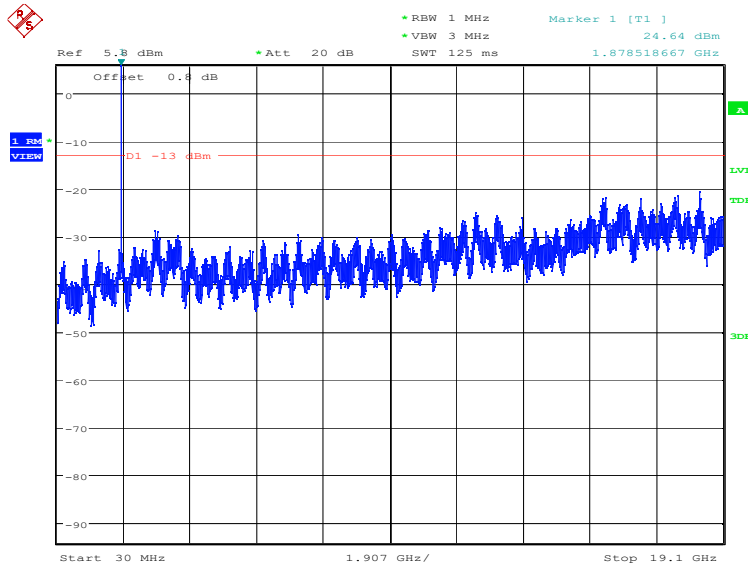

Date: 16.DEC.2021 09:06:48

### Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

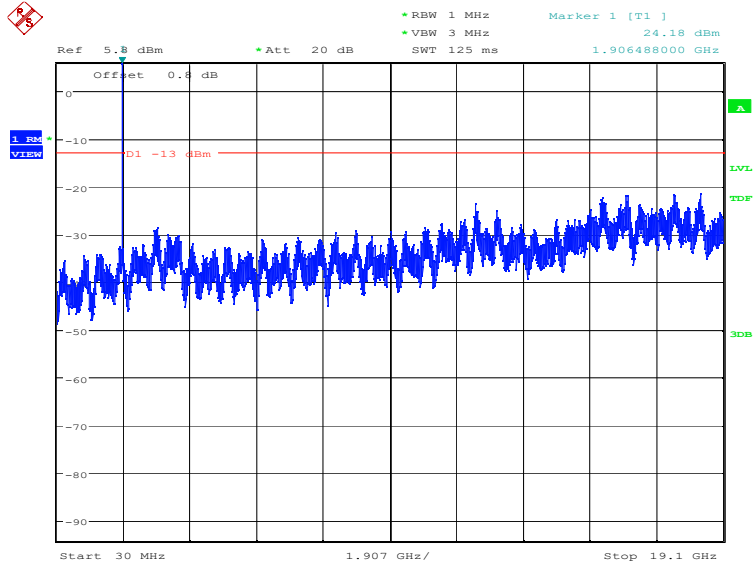


Date: 16.DEC.2021 09:07:18

**WCDMA Band V**

**Channel 4132: 30MHz –8.49GHz**


**NOTE: peak above the limit line is the carrier frequency.**

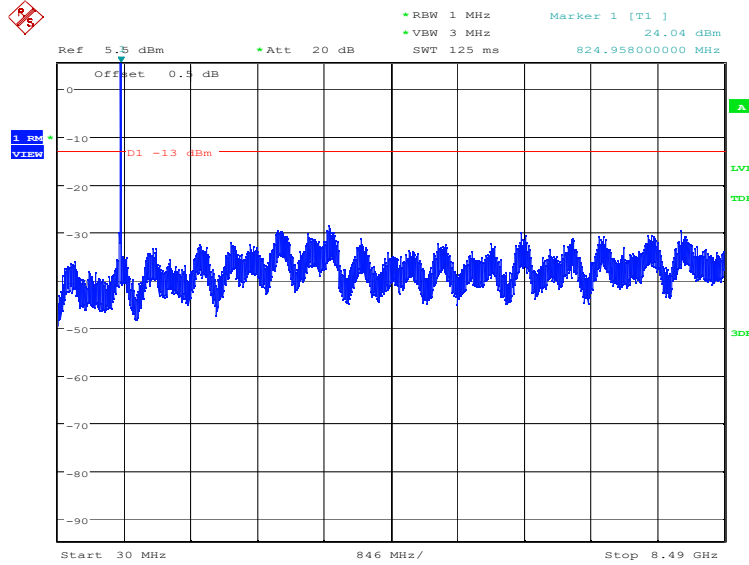

Date: 16.DEC.2021 09:10:35

**Channel 4183: 30MHz –8.49GHz**


**NOTE: peak above the limit line is the carrier frequency.**

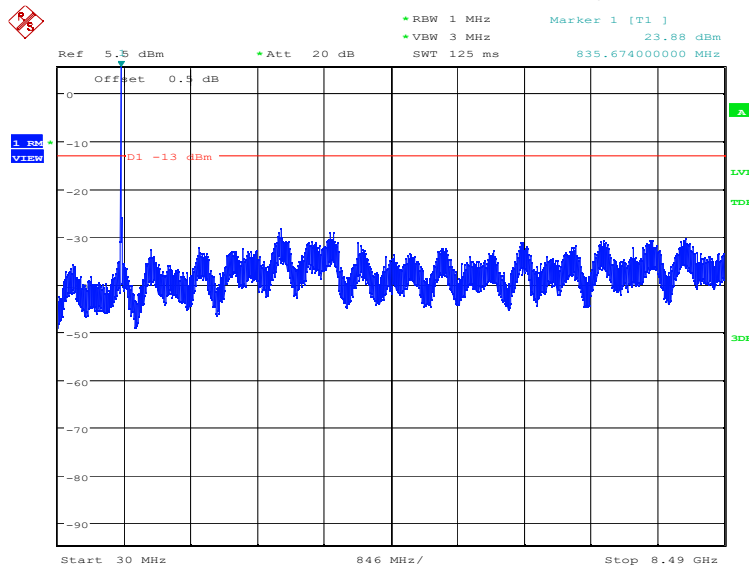

Date: 16.DEC.2021 09:11:05

### Channel 4233: 30MHz –8.49GHz

NOTE: peak above the limit line is the carrier frequency.

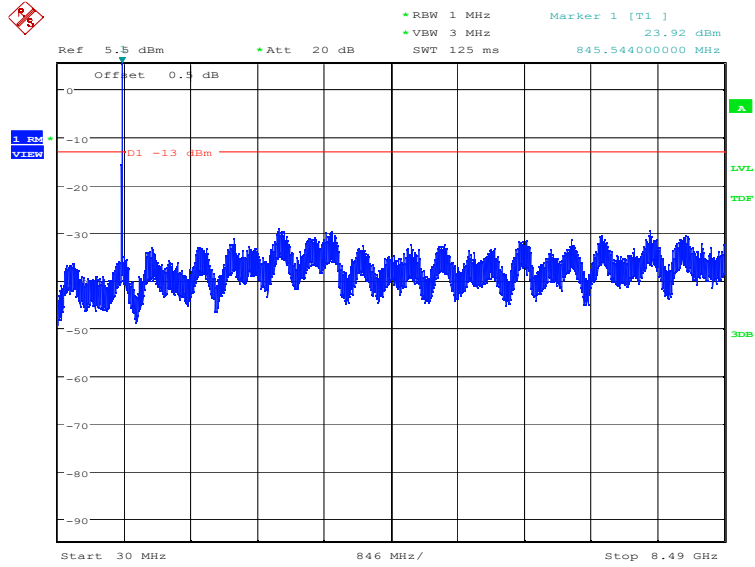


Date: 16.DEC.2021 09:11:35

**WCDMA Band IV**

**Channel 1312: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

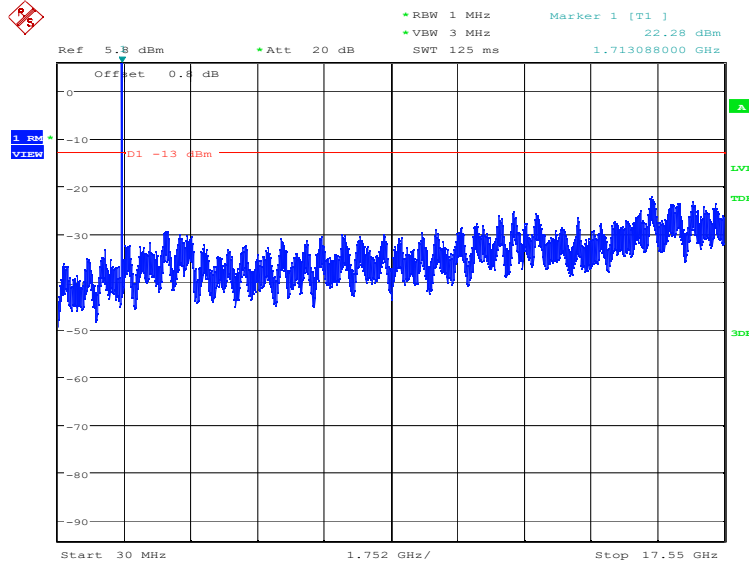


Date: 16.DEC.2021 09:08:26

**WCDMA Band IV**

**Channel 1412: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

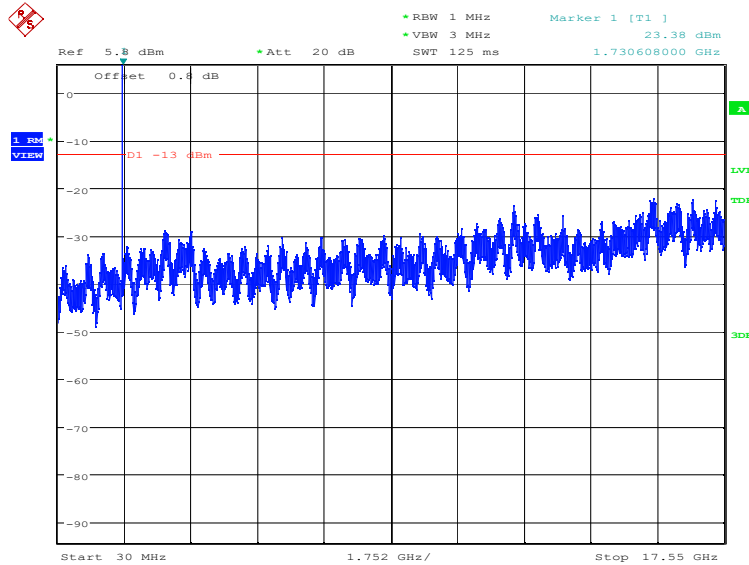


Date: 16.DEC.2021 09:08:56

### WCDMA Band IV

### Channel 1513: 30MHz –17.55GHz

**NOTE: peak above the limit line is the carrier frequency.**

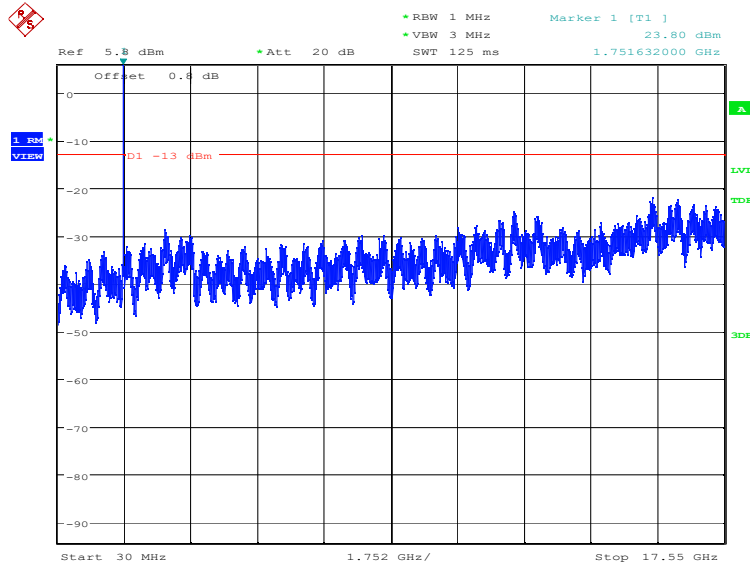

Date: 16.DEC.2021 09:09:27

## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

| CH   | Frequency (MHz) | PAPR (dB) |
|------|-----------------|-----------|
| 9400 | 1880.0          | 3.62      |

### **WCDMA Band IV-QPSK**

#### **Measurement result**

| CH   | Frequency (MHz) | PAPR (dB) |
|------|-----------------|-----------|
| 1412 | 1732.4          | 3.33      |



## Annex B: Accreditation Certificate

|   |   |
|---|---|
| <p>United States Department of Commerce<br/>National Institute of Standards and Technology</p>     |   |
| <hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>   |   |
| NVLAP LAB CODE: 600118-0  |   |
| <b>Telecommunication Technology Labs, CAICT</b><br>Beijing<br>China   |   |
| <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services,<br/>listed on the Scope of Accreditation, for:</i>   |   |
| <b>Electromagnetic Compatibility &amp; Telecommunications</b>   |   |
| <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.<br/>This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality<br/>management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i> |   |
| 2021-09-29 through 2022-09-30<br><i>Effective Dates</i>   | <br><br><i>For the National Voluntary Laboratory Accreditation Program</i> |

\*\*\*END OF REPORT\*\*\*