



# FCC PART 15C TEST REPORT No.I22Z60568-IOT09

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE mobile phone**

**4058P**

**With**

**FCC ID: 2ACCJN064**

**Hardware Version: 03**

**Software Version: RL3W**

**Issued Date: 2022-05-17**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z60568-IOT09	Rev.0	1st edition	2022-05-10
I22Z60568-IOT09	Rev.1	Remove the result of HT40.	2022-05-17

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE.....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
3.4. GENERAL DESCRIPTION.....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	9
<b>4. REFERENCE DOCUMENTS.....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF TEST RESULTS.....	10
5.2. STATEMENTS.....	10
5.3. TEST CONDITIONS .....	10
<b>6. TEST FACILITIES UTILIZED.....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. MAXIMUM OUTPUT POWER.....	12
7.2. PEAK POWER SPECTRAL DENSITY.....	12
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	12
7.4. BAND EDGES COMPLIANCE.....	12
7.5. TRANSMITTER SPURIOUS EMISSION .....	12
7.6. AC POWER-LINE CONDUCTED EMISSION.....	12
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>13</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>13</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>14</b>
A.2.1. PEAK OUTPUT POWER-CONDUCTED .....	14



**A.3. PEAK POWER SPECTRAL DENSITY..... 15**

**A.4. DTS 6-DB SIGNAL BANDWIDTH ..... 21**

**A.5. BAND EDGES COMPLIANCE ..... 27**

**A.6. TRANSMITTER SPURIOUS EMISSION ..... 31**

    A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED ..... 31

    A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED..... 71

**A.7. AC POWER-LINE CONDUCTED EMISSION ..... 84**

**ANNEX B: EUT PARAMETERS..... 88**

**ANNEX C: ACCREDITATION CERTIFICATE ..... 88**

## 1. Test Laboratory

### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2022-03-25


Testing End Date: 2022-05-10

### 1.5. Signature




---

Xie Xiuzhen  
(Prepared this test report)



---

Zheng Wei  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: 0086-755-36614 5759  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: 0086-755-36614 5759  
Fax: 0086-755-36612000-81722

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model name	4058P
FCC ID	2ACCJN064
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	25.77dBm
Power Supply	3.8V

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	016211000012935	03	RL3W
EUT2	016211000210638	03	RL3W

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description	SN	Note
AE1	Charger1	/	/
AE2	USB Cable	/	/
AE3	Battery	/	/
AE4	Charger2	/	/
AE5	USB Cable	/	/
AE6	Docking	/	/
AE7	Headset	/	/

AE1		
Model	UC11US	
Manufacturer	Chenyang	
AE2		
Model	CDA0000162C1	
Manufacturer	juwei	
Length of cable	80cm	
AE3		
Model	TLi017D1	
Manufacturer	BYD	
Capacity(mAh)	1780	



AE4	
Model	UC11US
Manufacturer	PUAN
AE5	
Model	CDA0000162C2
Manufacturer	shenhua
Length of cable	/
AE6	
Model	CBC0032A00C5
Manufacturer	PUAN
Length of cable	/
AE7	
Model	/
Manufacturer	/
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.



### 3.4. General Description

The Equipment under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### 3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor  $k=2$ .

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2018
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON	2013
KDB 558074 D01	DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

## 5. Test Results

### 5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

### 5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.8V
Humidity	H nom	20-75%

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	R&S	1 year	2022-05-30
3	Test Receiver	ESCI	100344	R&S	1 year	2023-02-18
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	Rohde & Schwarz	1 year	2022-10-28
2	BiLog Antenna	VULB 9163	9163-302	SCHWARZBECK	1 year	2022-12-28
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 Year	2022-07-01
4	EMI Antenna	3116	2663	ETS-Lindgren	1 Year	2022-08-01

## 7. Measurement Uncertainty

### 7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 7.5. Transmitter Spurious Emission

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.16
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.44
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

### 7.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.1dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

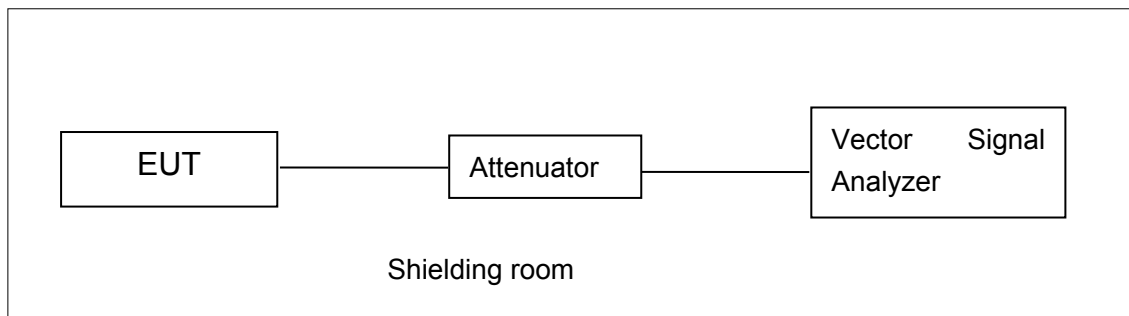


**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

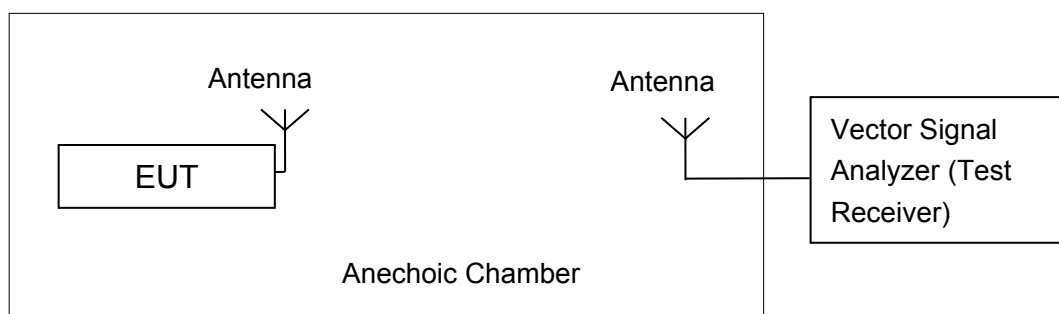

**Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements**

## **A.2. Maximum Output Power**

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.1**

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  [3  $\times$  RBW].
- c) Set span  $\geq$  [3  $\times$  RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**EUT ID: EUT2**

### **A.2.1. Peak Output Power-conducted**

**Measurement Results:**

#### **802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	21.43	21.60	21.74
802.11g	6	25.75	25.77	25.64

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

#### **802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n(20MHz)	MCS0	25.10	25.65	24.93

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

The duty cycle of all mode above 98%.

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**Measurement Results:**

**802.11b/g mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11b	1	Fig.A.3.1	-10.73	<b>P</b>
	6	Fig.A.3.2	-10.82	<b>P</b>
	11	Fig.A.3.3	-10.45	<b>P</b>
802.11g	1	Fig.A.3.4	-9.82	<b>P</b>
	6	Fig.A.3.5	-9.75	<b>P</b>
	11	Fig.A.3.6	-10.16	<b>P</b>

**802.11n-HT20 mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-10.93	<b>P</b>
	6	Fig.A.3.8	-10.61	<b>P</b>
	11	Fig.A.3.9	-10.80	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**

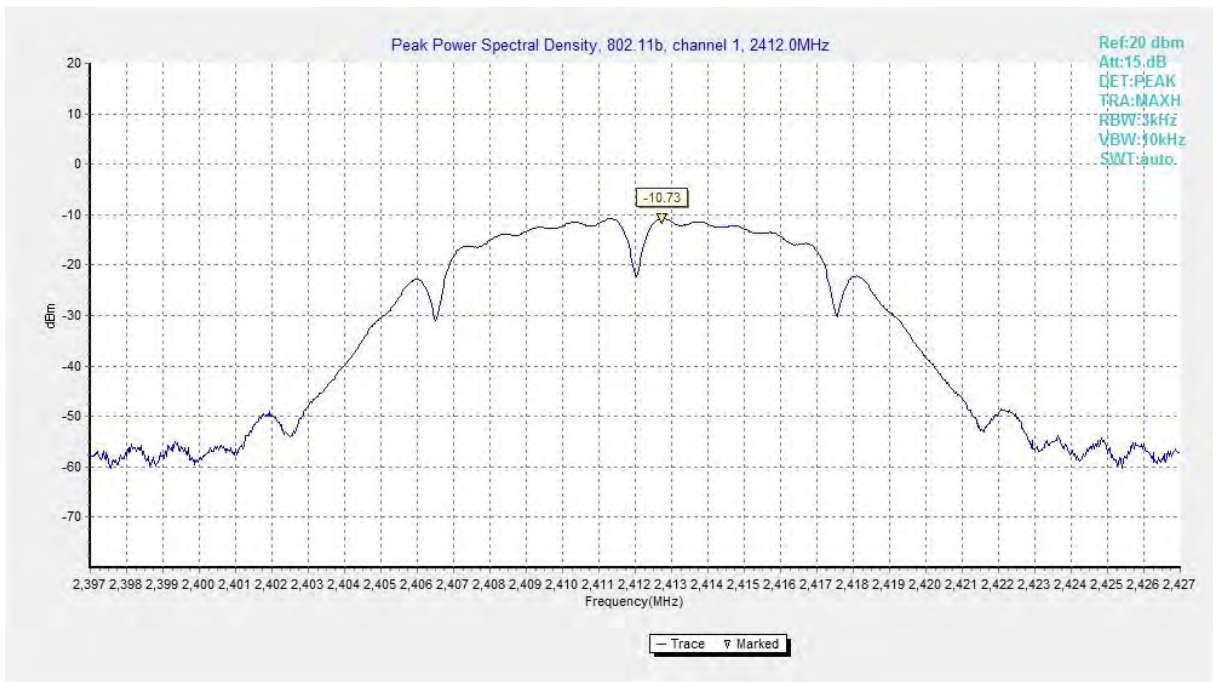


**Fig.A.3.1 Power Spectral Density(802.11b,Ch1)**

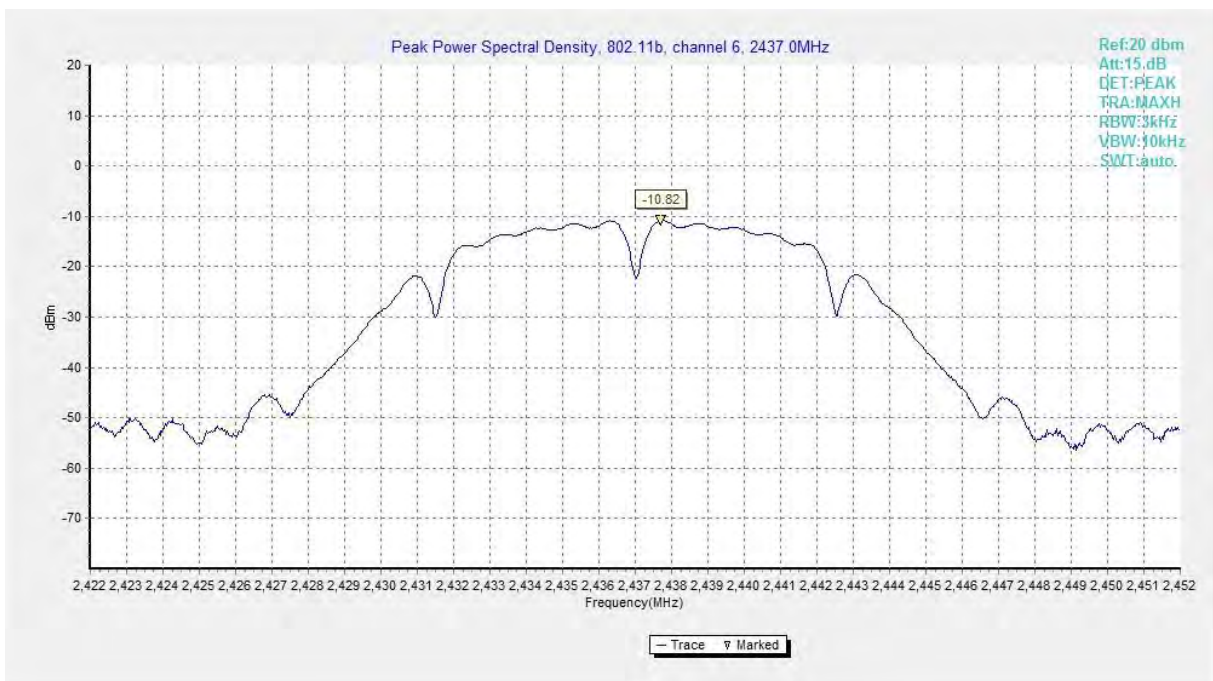


**Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)**




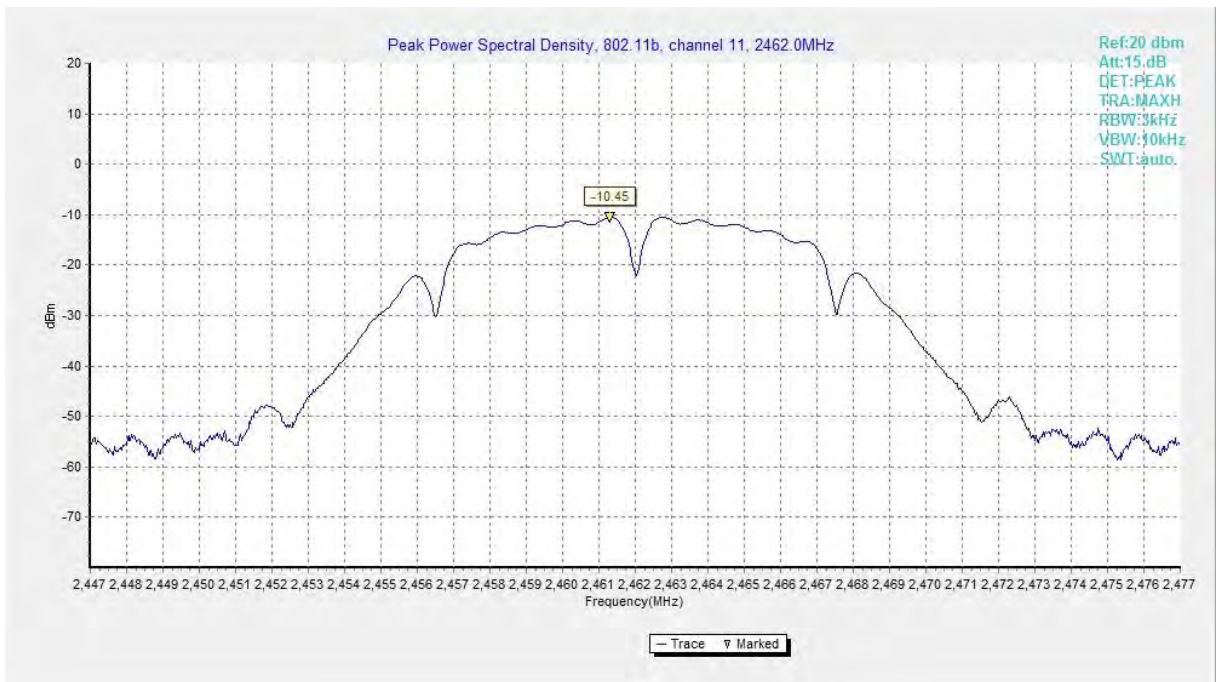


**Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)**

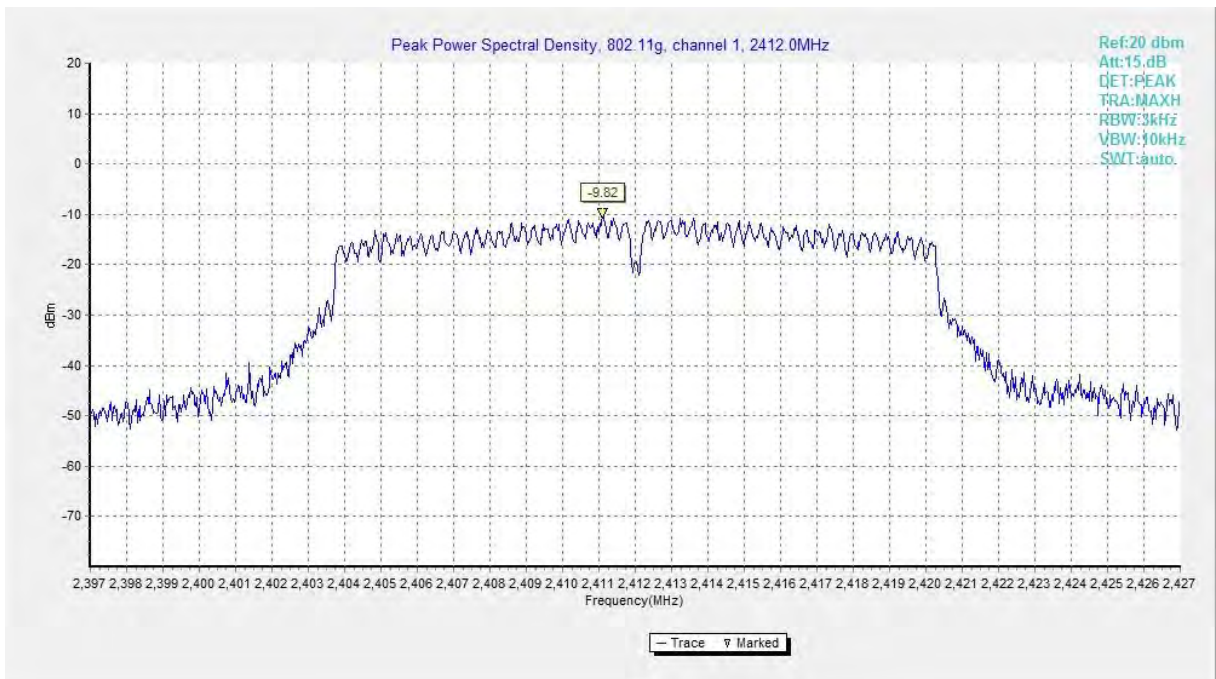


**Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)**

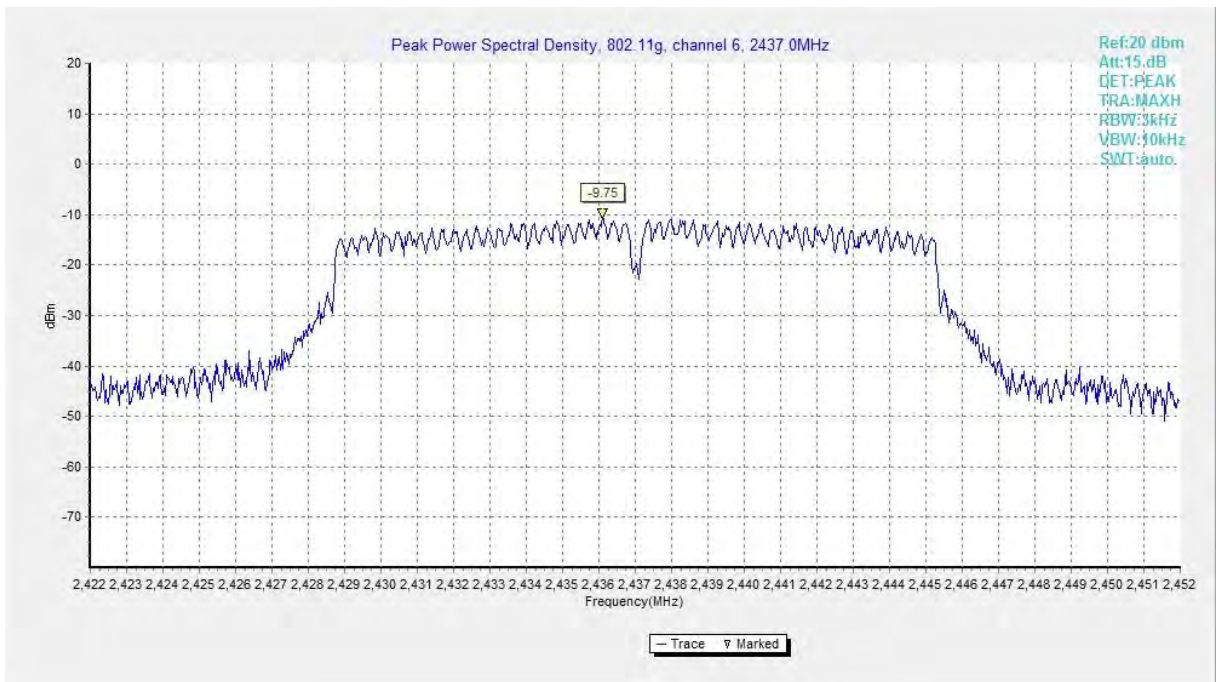


**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**

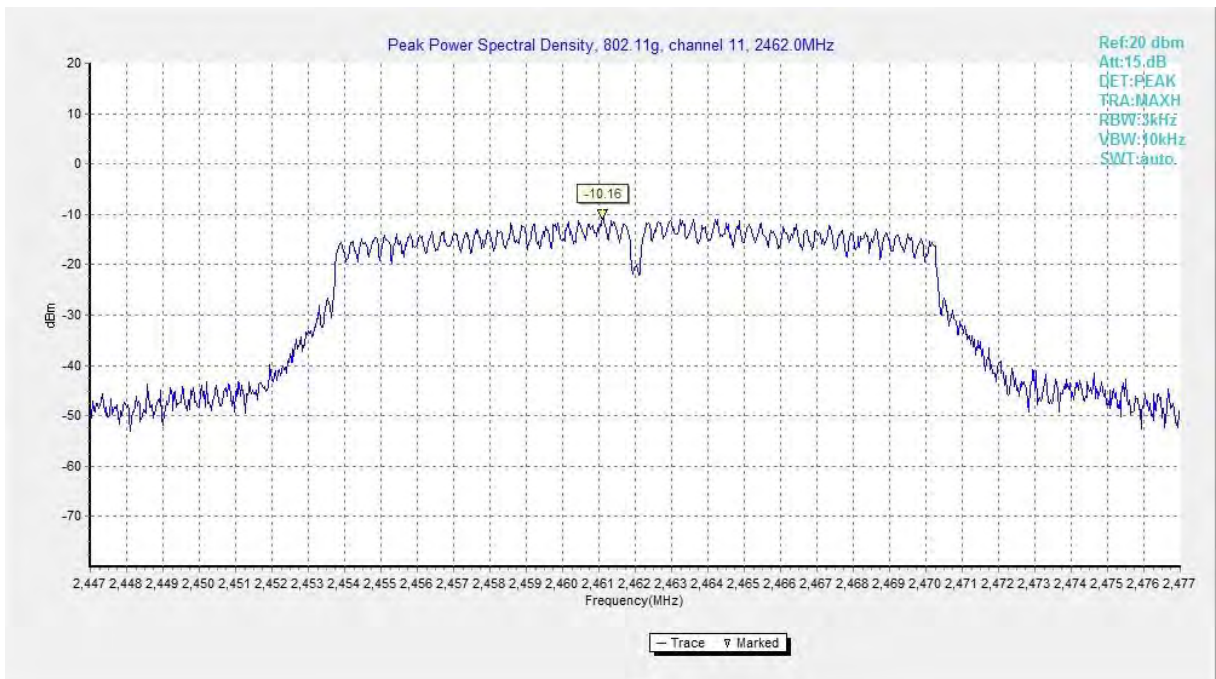


**Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)**

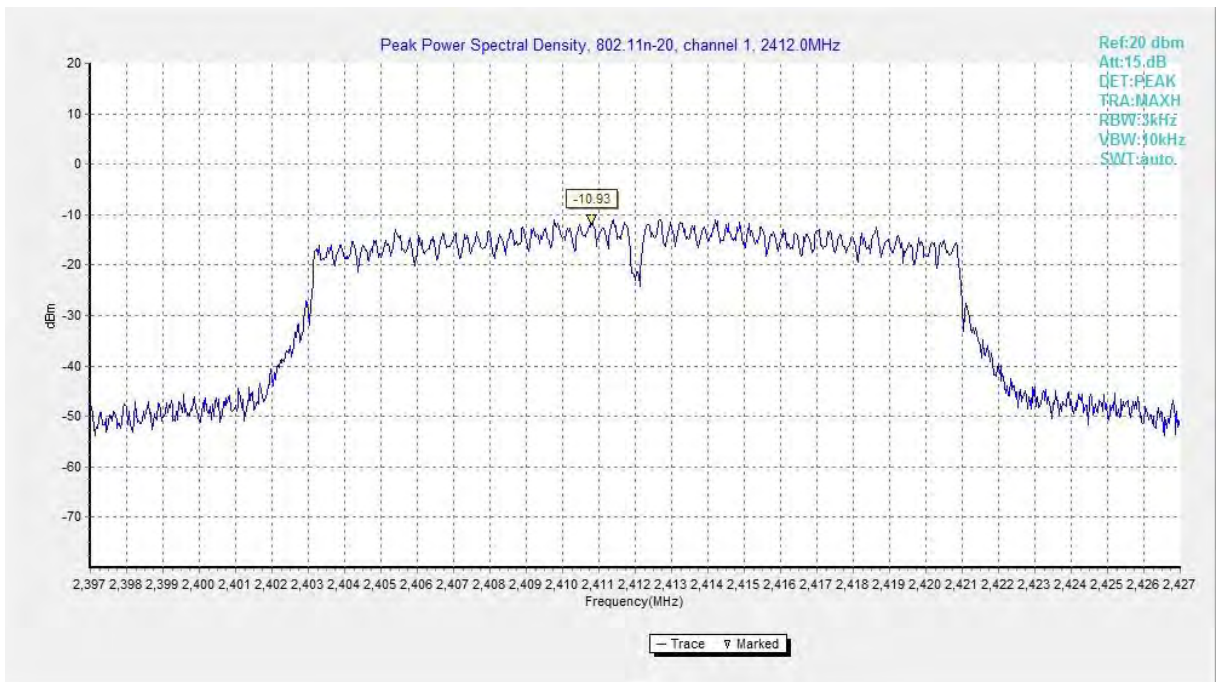

**Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)**

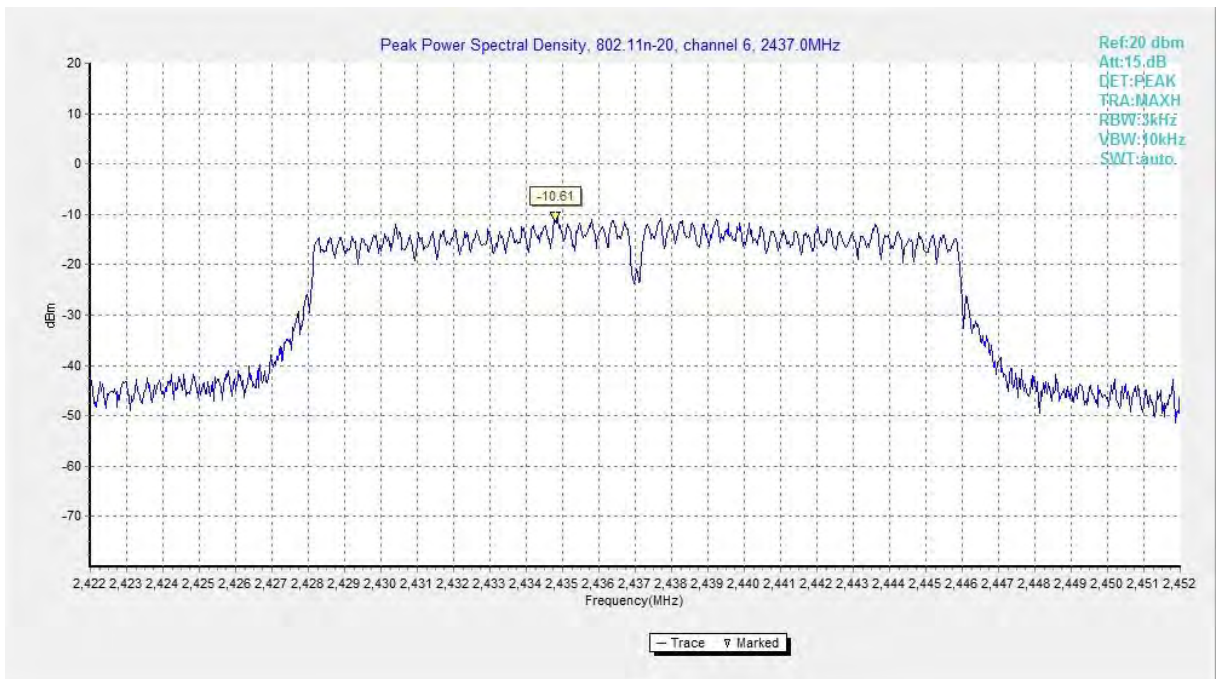

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

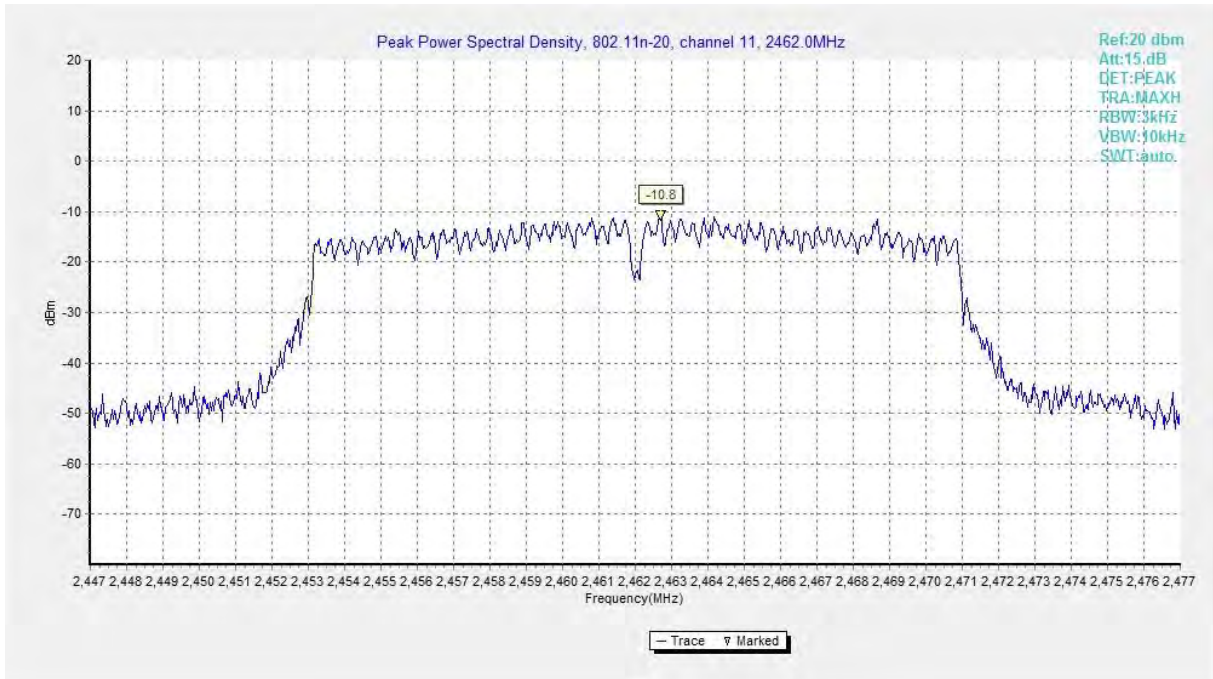

**Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)**

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: EUT2**

**Measurement Result:**

##### **802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11b	1	Fig.A.4.1	9.10	<b>P</b>
	6	Fig.A.4.2	9.15	<b>P</b>
	11	Fig.A.4.3	9.15	<b>P</b>
802.11g	1	Fig.A.4.4	16.30	<b>P</b>
	6	Fig.A.4.5	16.40	<b>P</b>
	11	Fig.A.4.6	16.35	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Occupied 6dB Bandwidth ( MHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17.60	<b>P</b>
	6	Fig.A.4.8	17.60	<b>P</b>
	11	Fig.A.4.9	17.55	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**



Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)

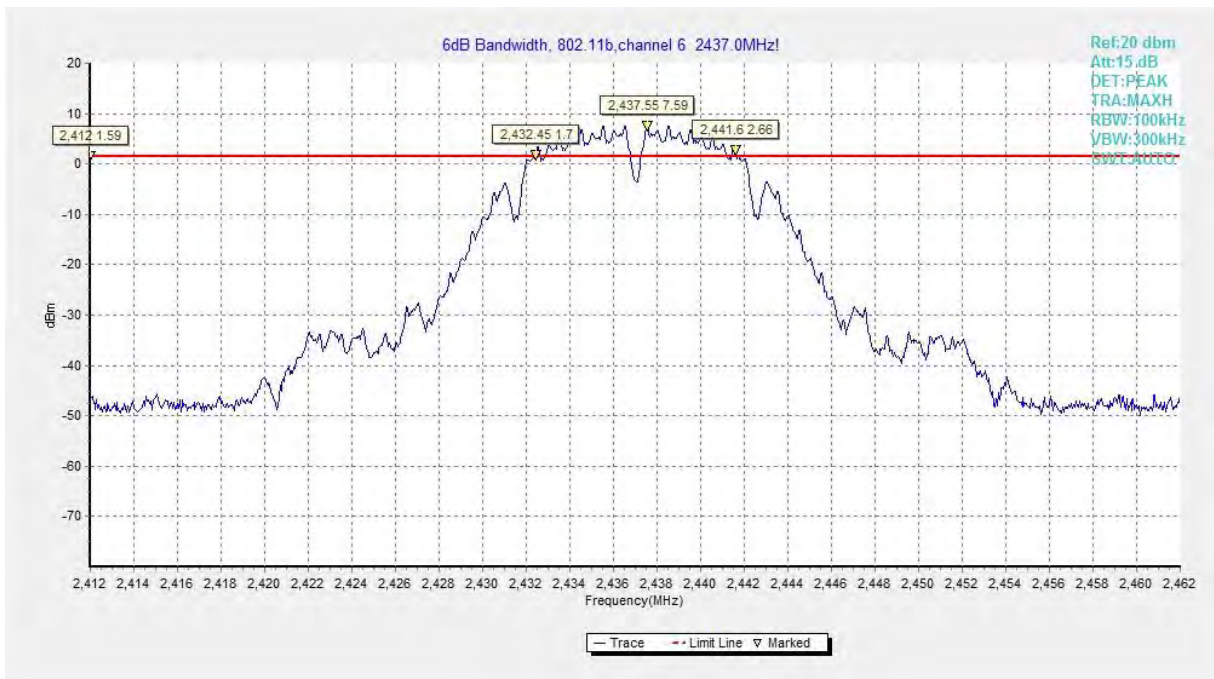


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)



Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

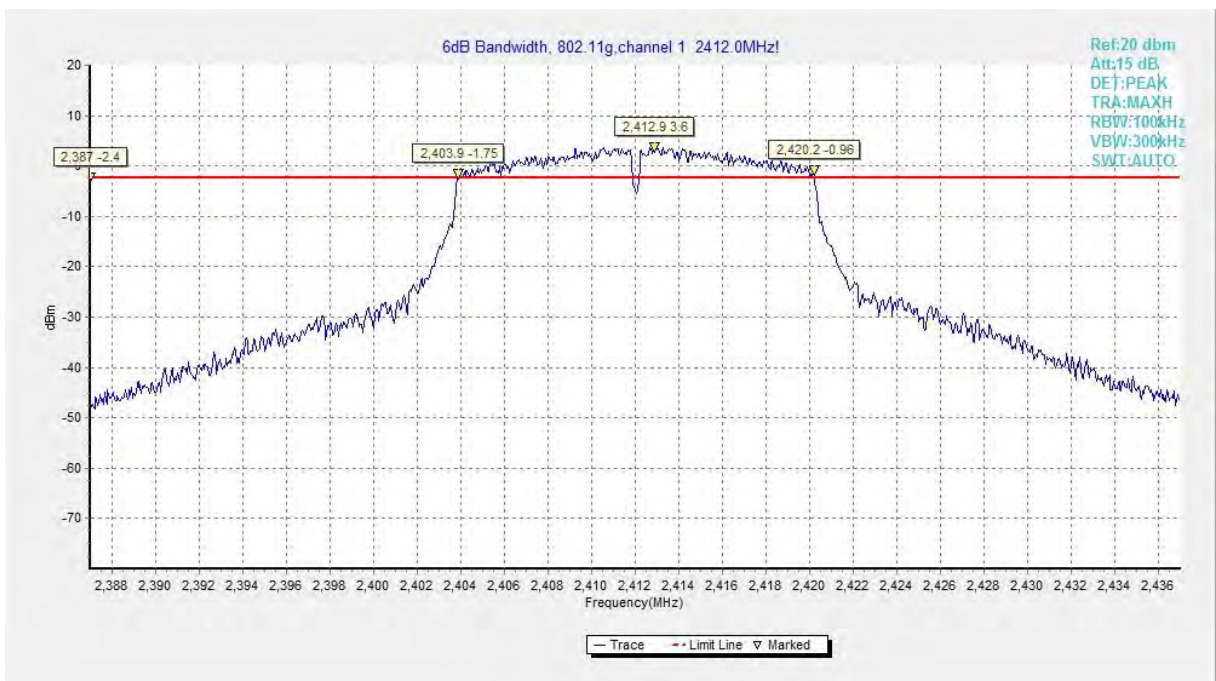


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

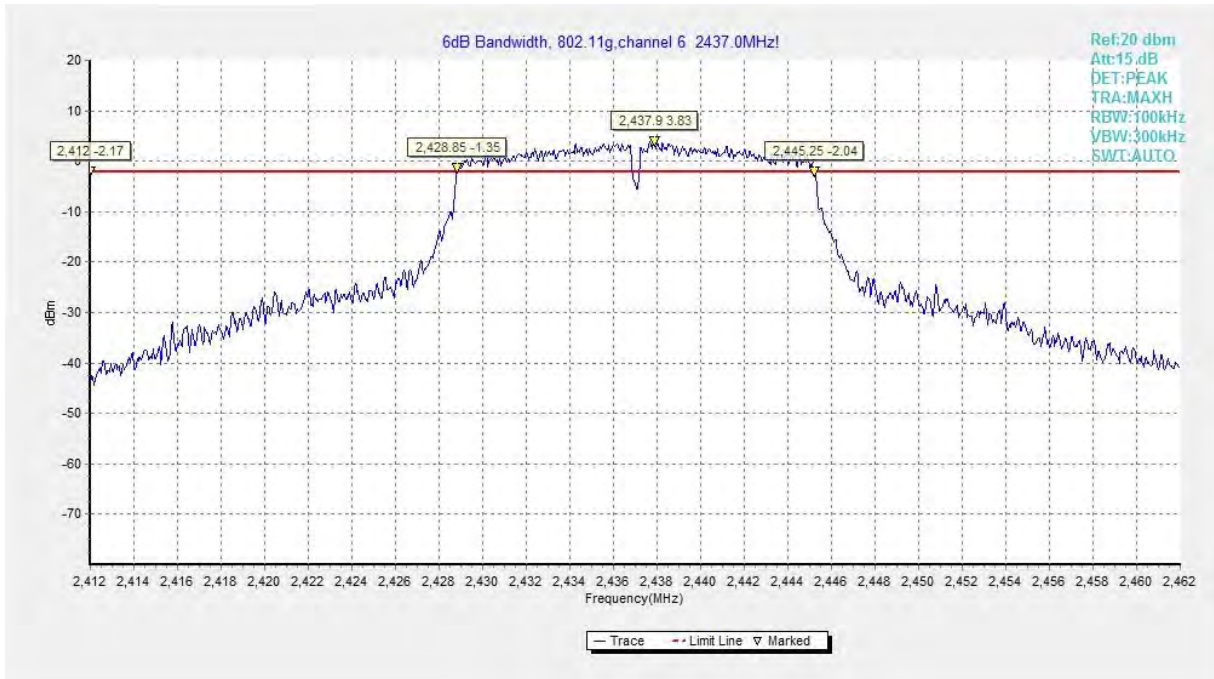


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)



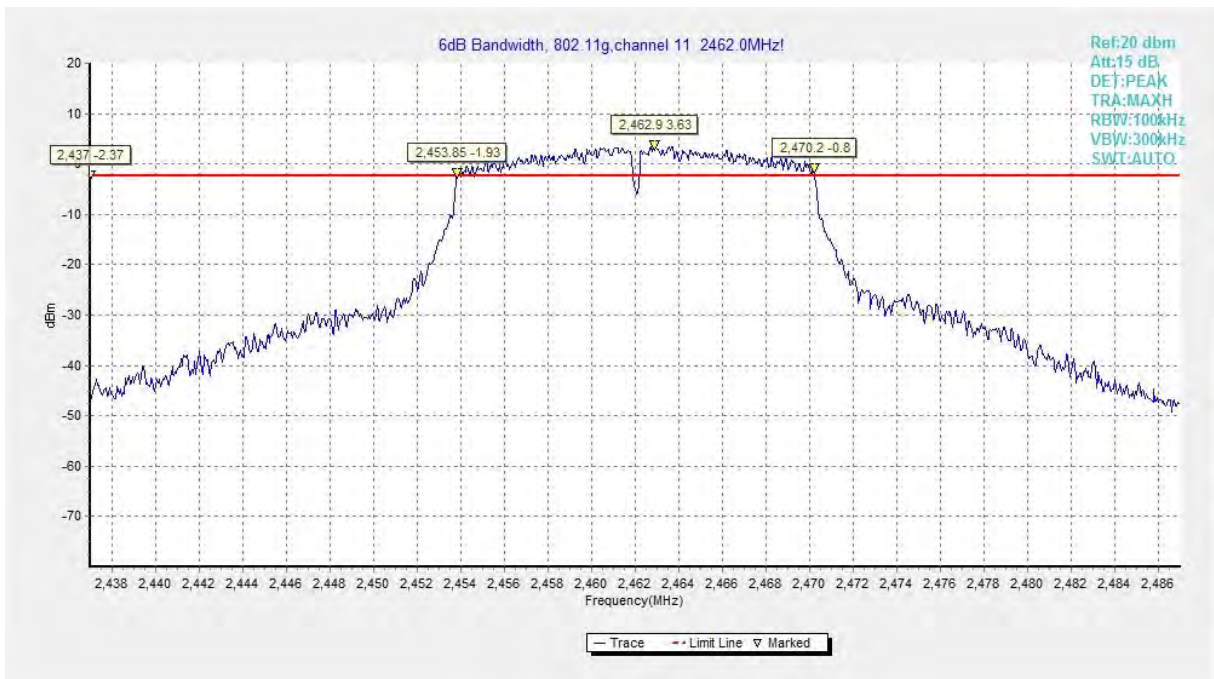


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)




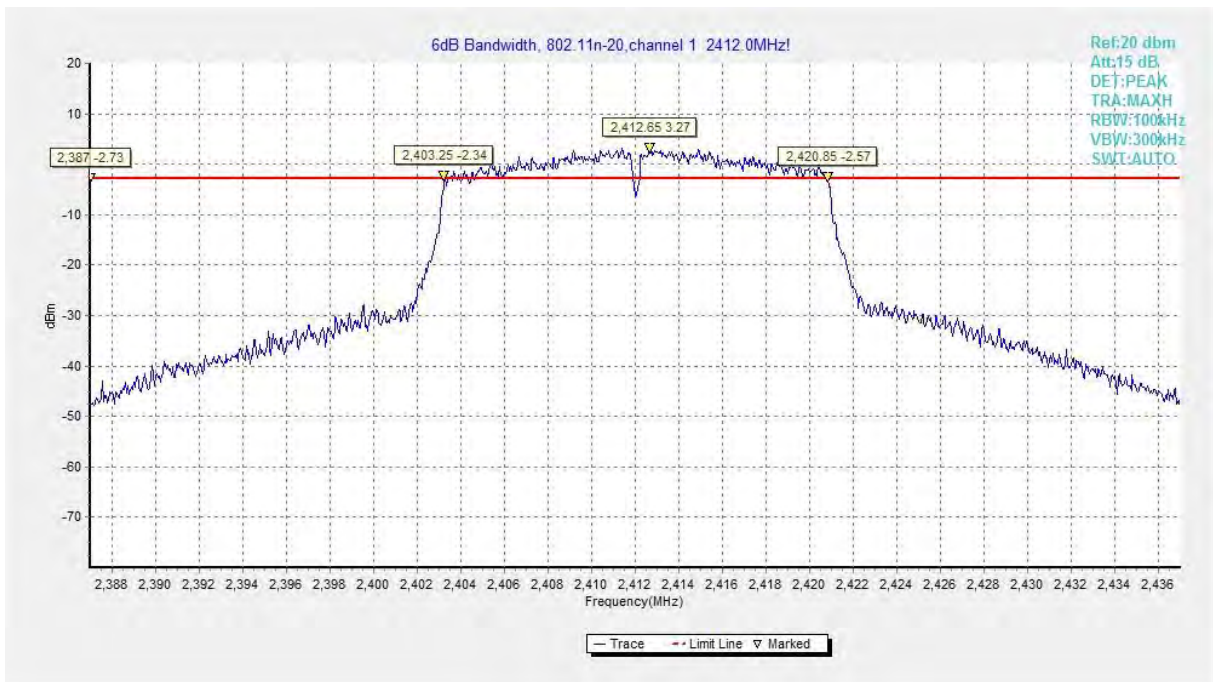

**Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)**

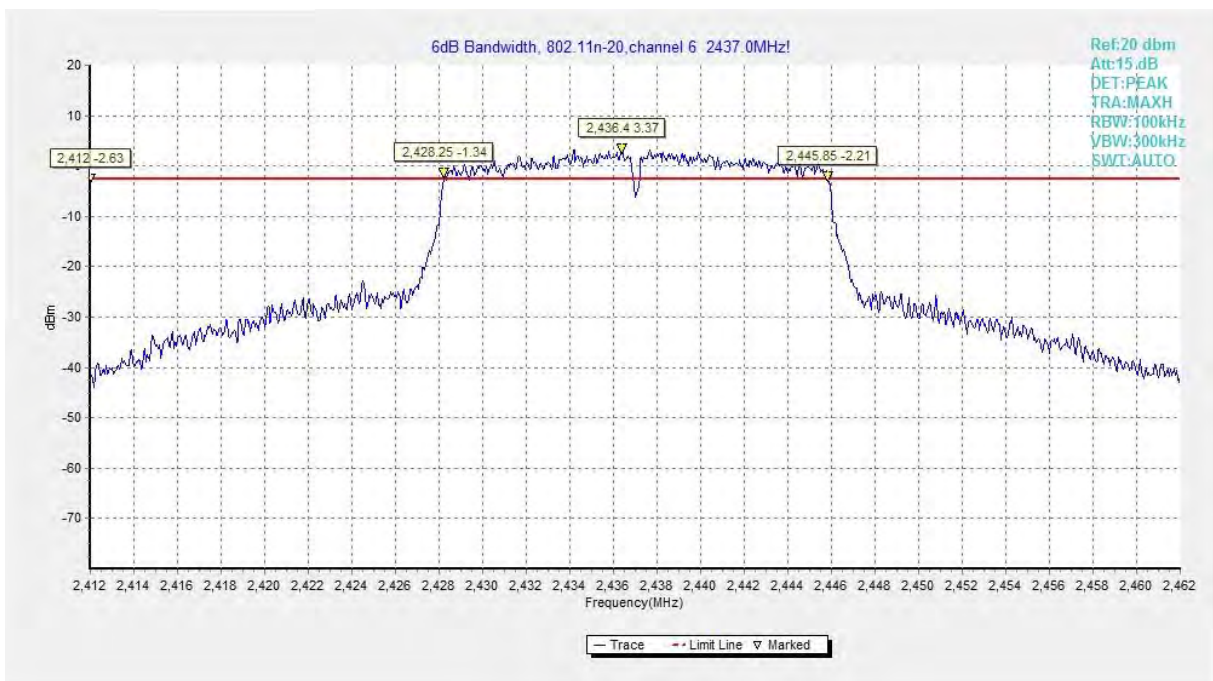

**Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)**

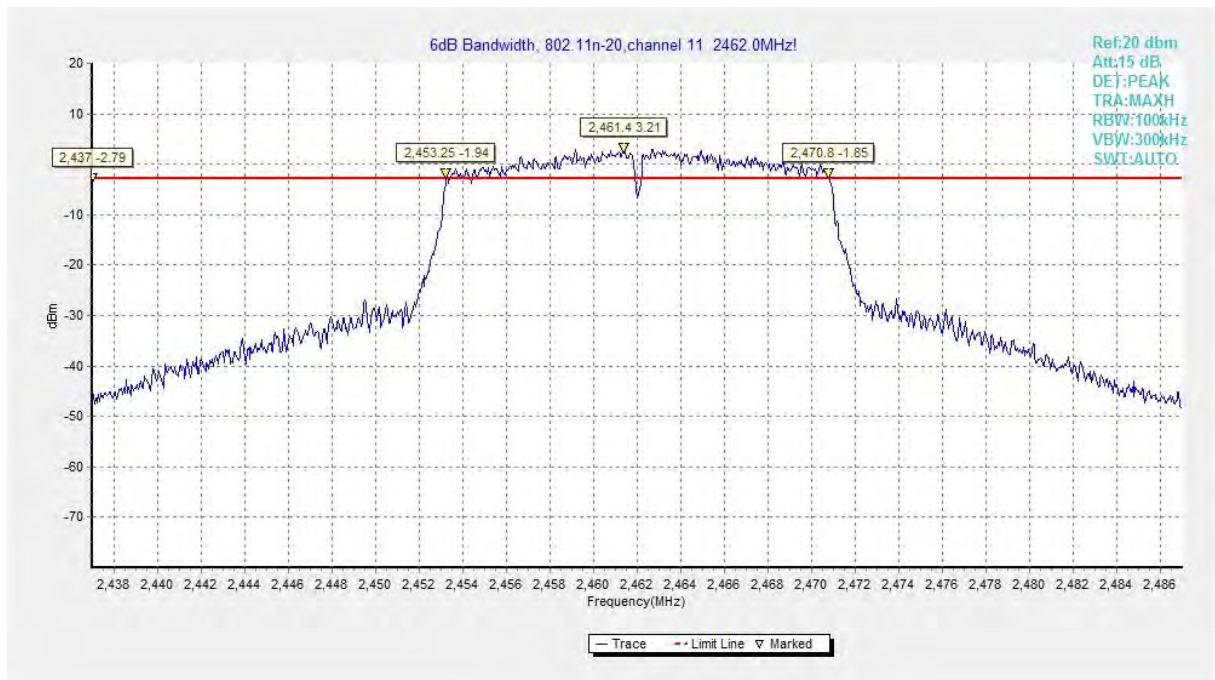

**Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)**

### **A.5. Band Edges Compliance**

**Method of Measurement: See ANSI C63.10-2013-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

**EUT ID: EUT2**

**Measurement Result:**

**802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	<b>P</b>
	11	Fig.A.5.2	<b>P</b>
802.11g	1	Fig.A.5.3	<b>P</b>
	11	Fig.A.5.4	<b>P</b>

**802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	<b>P</b>
	11	Fig.A.5.6	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**

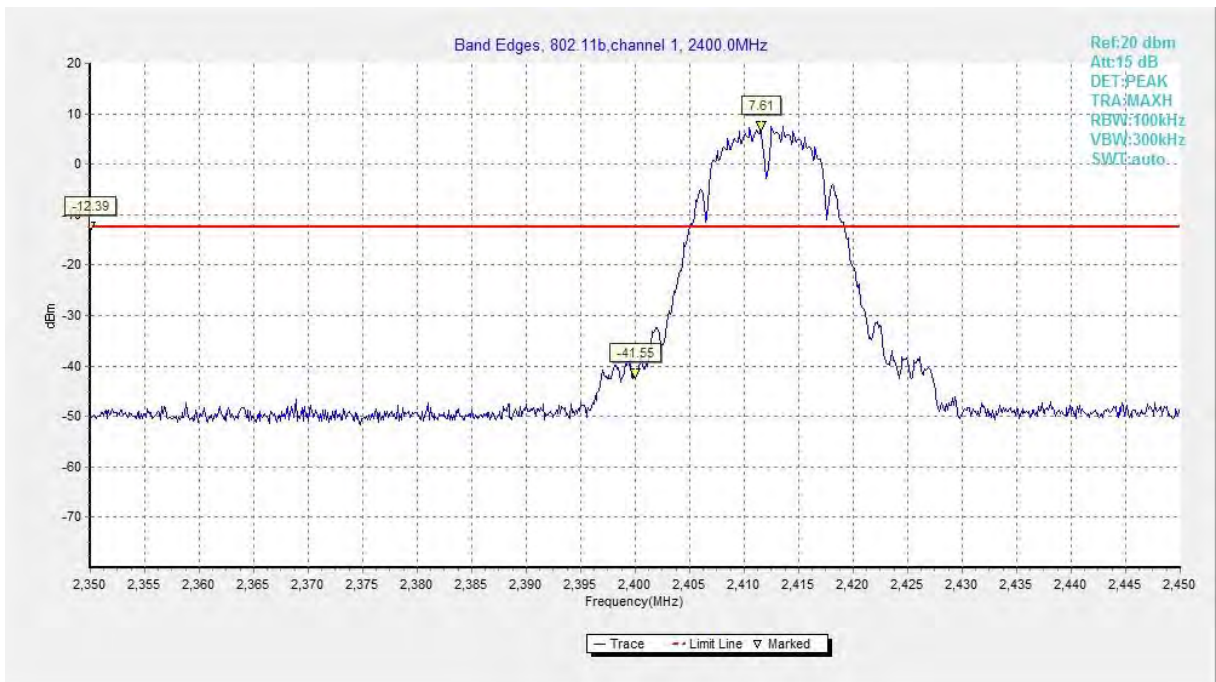


Fig.A.5.1 Band Edges (802.11b, Ch 1)

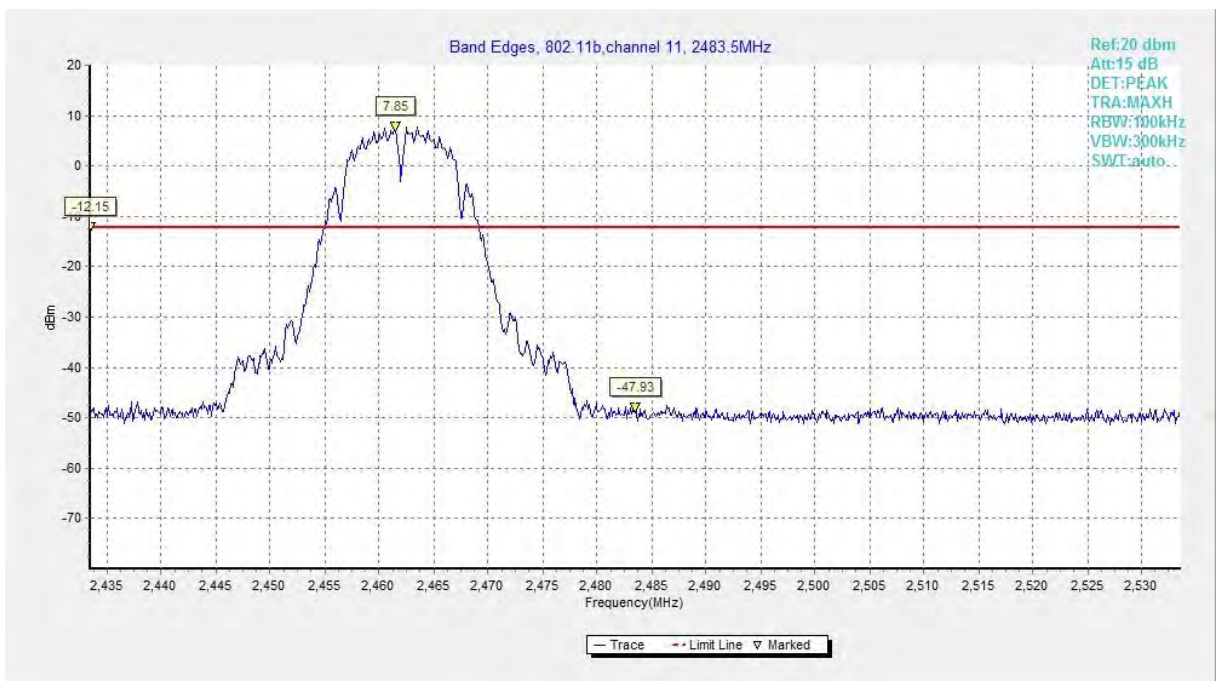


Fig.A.5.2 Band Edges (802.11b, Ch 11)

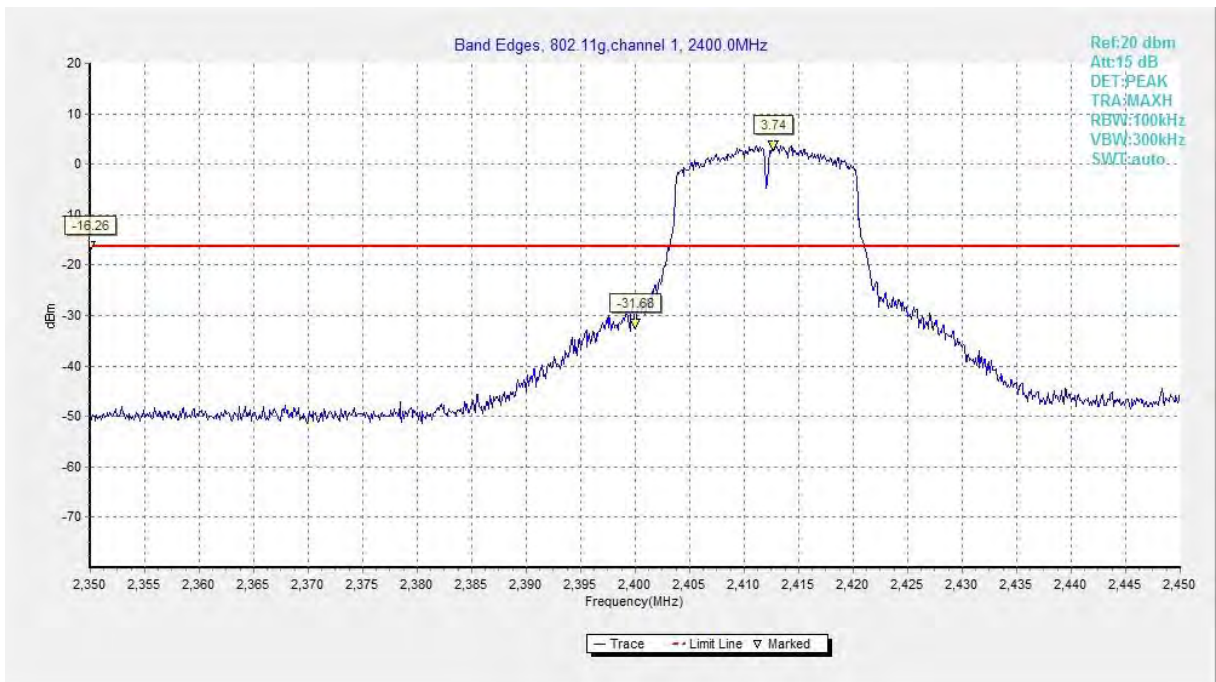


Fig.A.5.3 Band Edges (802.11g, Ch 1)



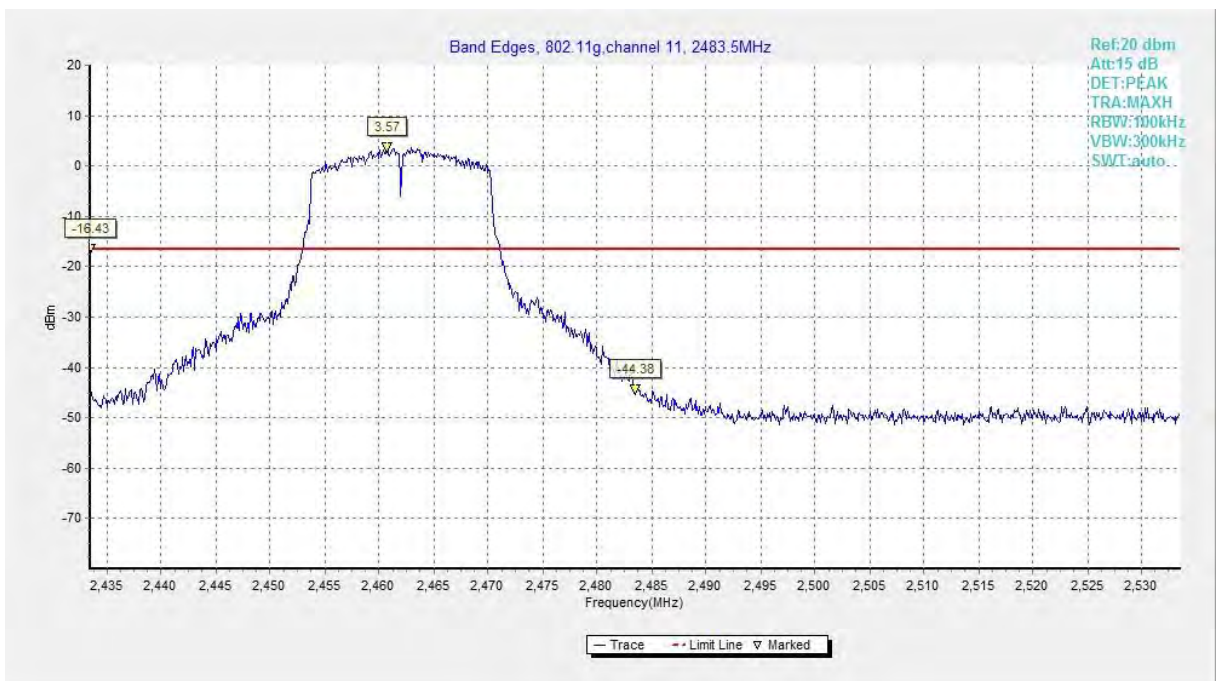


Fig.A.5.4 Band Edges (802.11g, Ch 11)

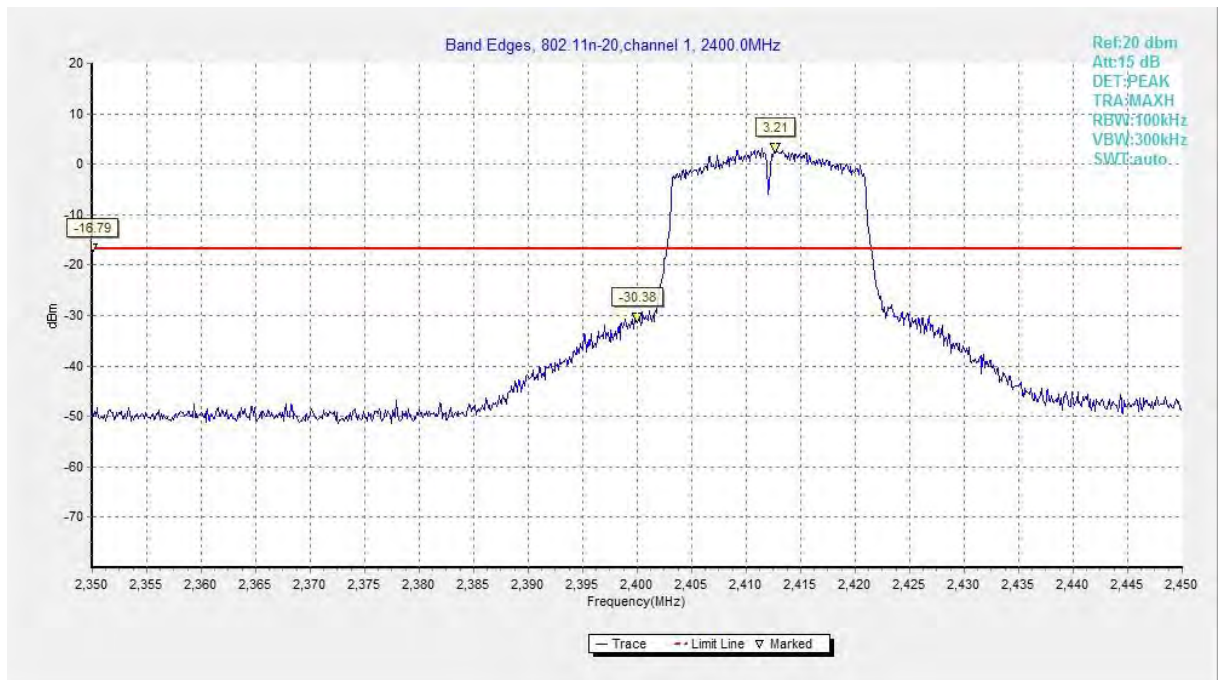

**Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)**

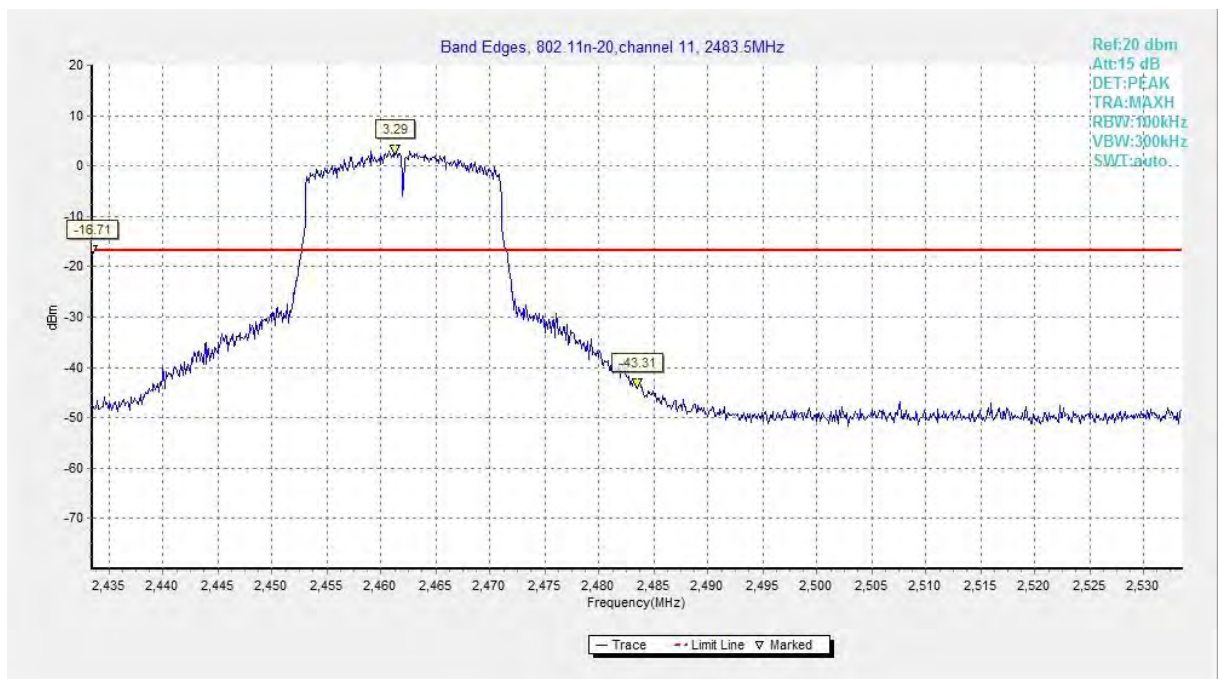

**Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)**

## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

**Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### **Measurement Limit:**

<b>Standard</b>	<b>Limit</b>
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**EUT ID: EUT2**

**Measurement Results:**

**802.11b mode**

<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11b	1	2.412 GHz	Fig.A.6.1.1	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.2	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.3	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.4	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.5	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.6	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.7	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.8	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.9	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.10	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.11	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.12	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.13	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.14	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.15	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.16	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.17	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.18	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.19	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.20	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.21	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.22	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.23	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.24	<b>P</b>



**802.11g mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.25	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.26	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.27	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.28	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.29	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.30	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.31	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.32	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.33	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.34	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.35	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.36	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.37	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.38	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.39	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.40	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.41	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.42	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.43	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.44	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.45	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.46	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.47	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.48	<b>P</b>

**802.11n-HT20 mode**


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.49	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.50	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.51	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.52	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.53	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.54	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.55	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.56	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.57	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.58	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.59	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.60	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.61	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.62	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.63	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.64	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.65	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.66	<b>P</b>
		1 GHz ~ 2.5 GHz	Fig.A.6.1.67	<b>P</b>
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.68	<b>P</b>
		7.5 GHz ~ 10 GHz	Fig.A.6.1.69	<b>P</b>
		10 GHz ~ 15 GHz	Fig.A.6.1.70	<b>P</b>
		15 GHz ~ 20 GHz	Fig.A.6.1.71	<b>P</b>
		20 GHz ~ 26 GHz	Fig.A.6.1.72	<b>P</b>

**Conclusion: Pass**


**Test graphs as below:**

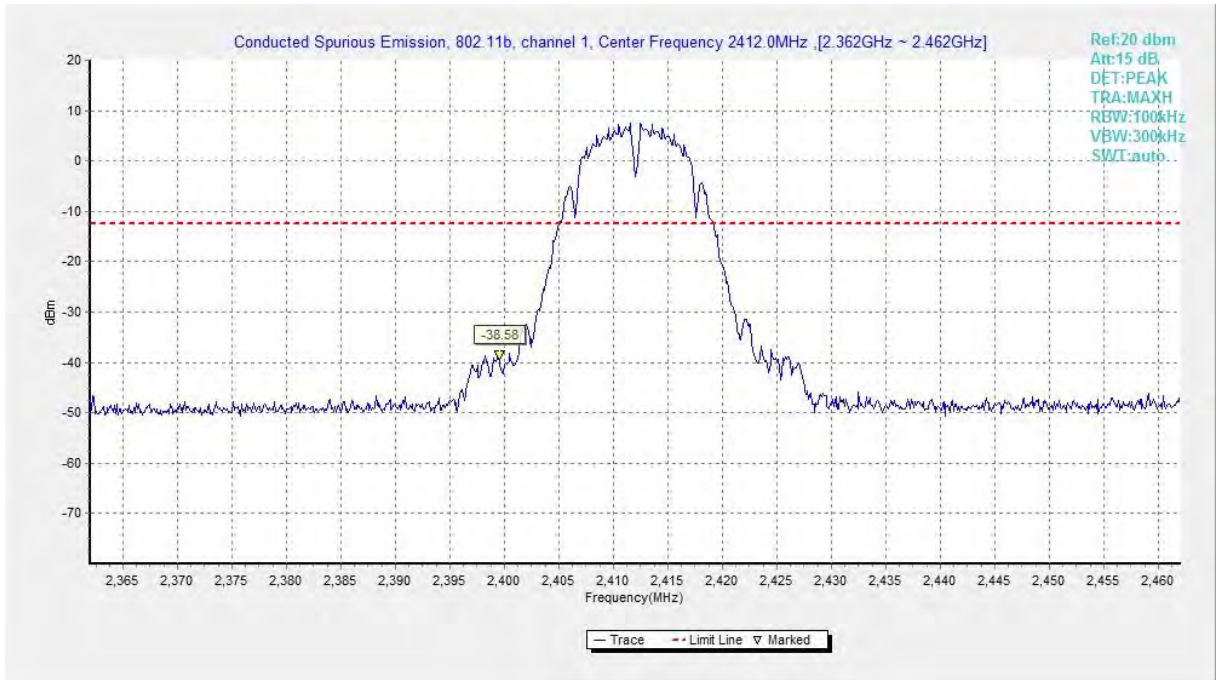


**Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)**

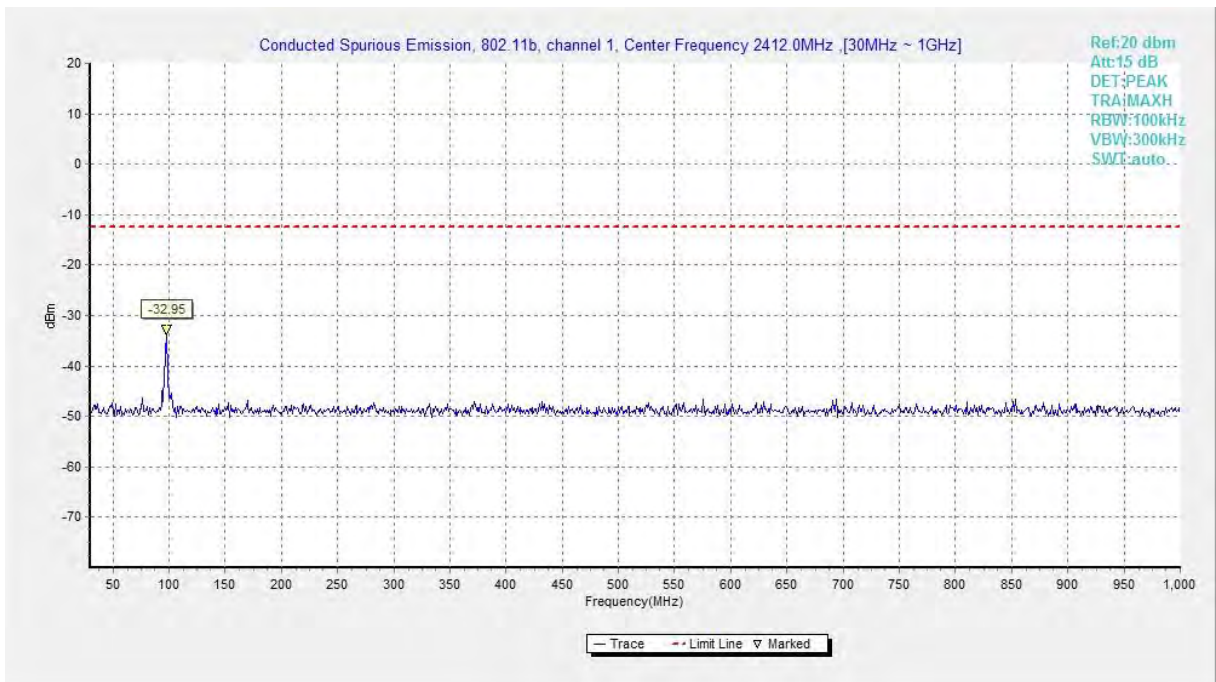


**Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)**

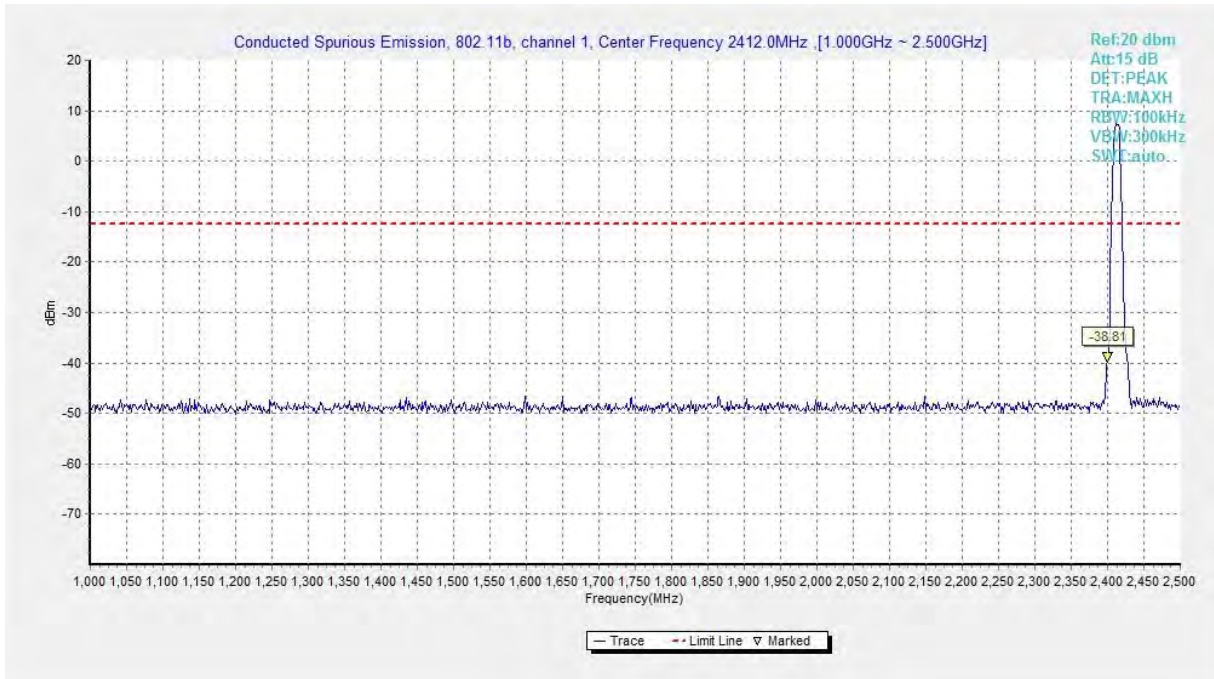


**Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-2.5 GHz)**

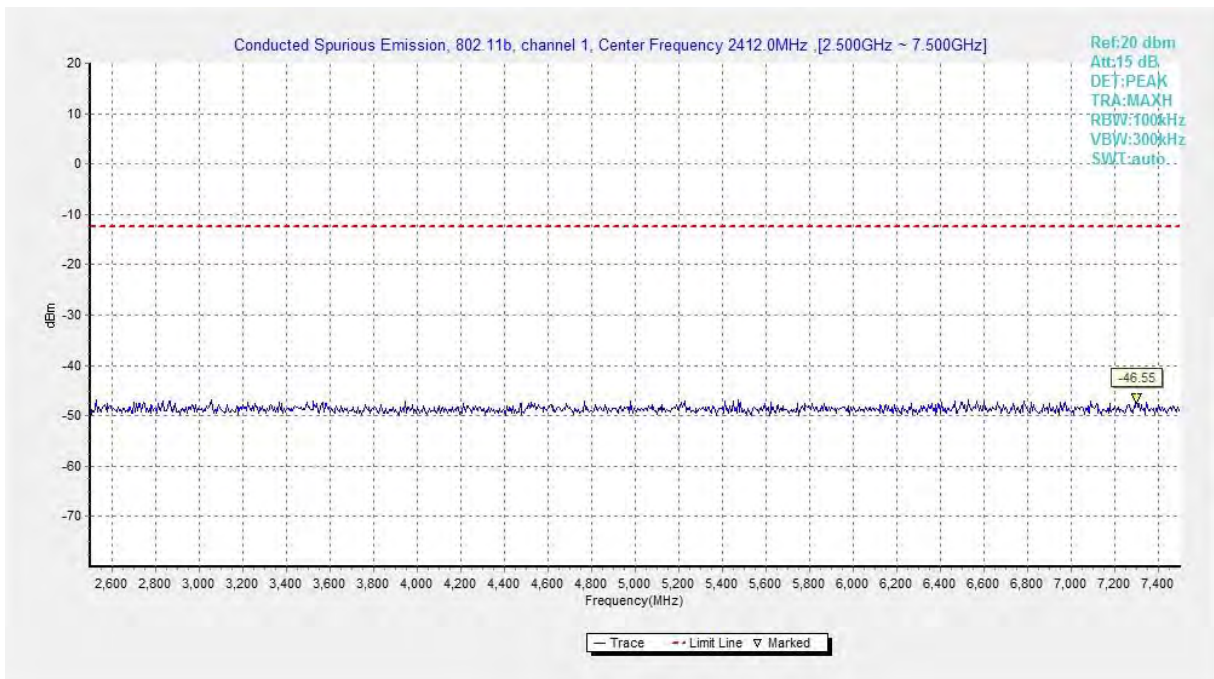


**Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 2.5 GHz-7.5 GHz)**

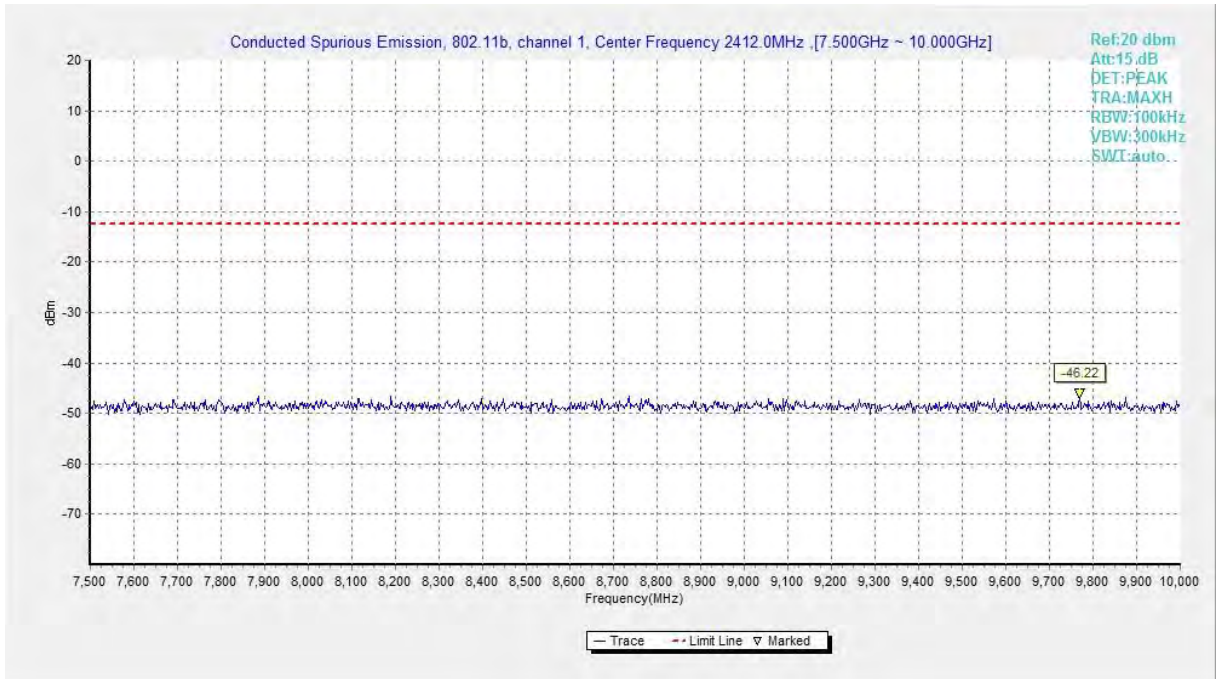


**Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 7.5 GHz-10 GHz)**

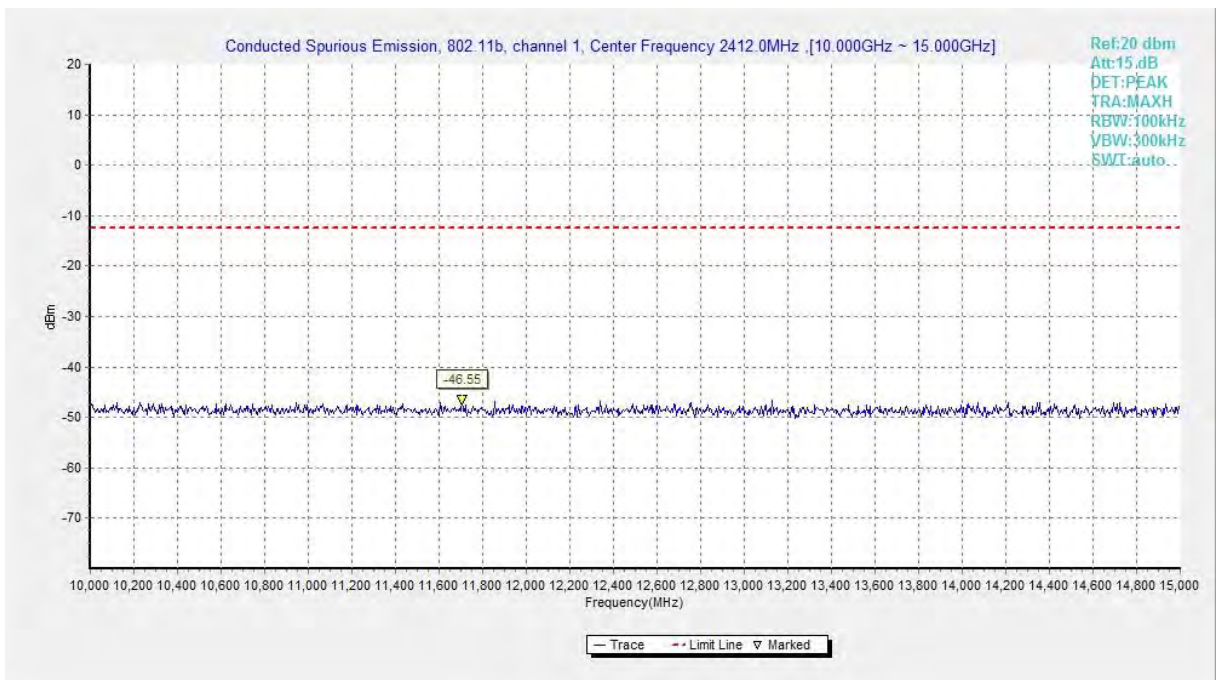


**Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 10 GHz-15 GHz)**

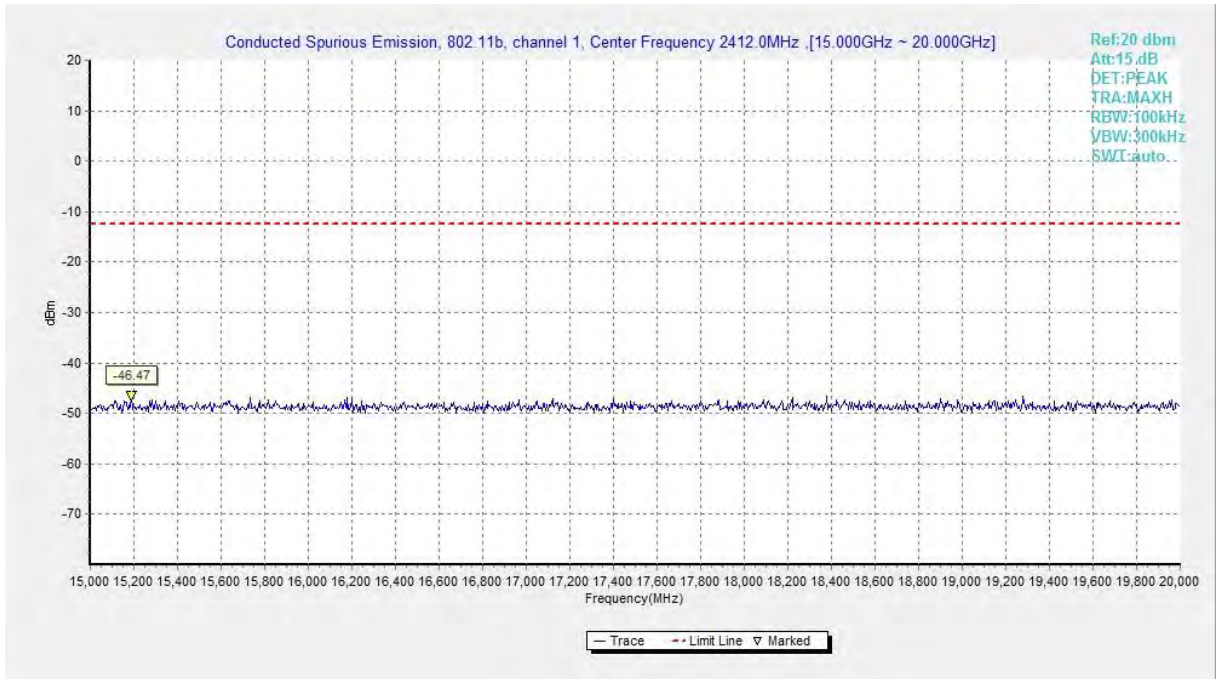


**Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 15 GHz-20 GHz)**

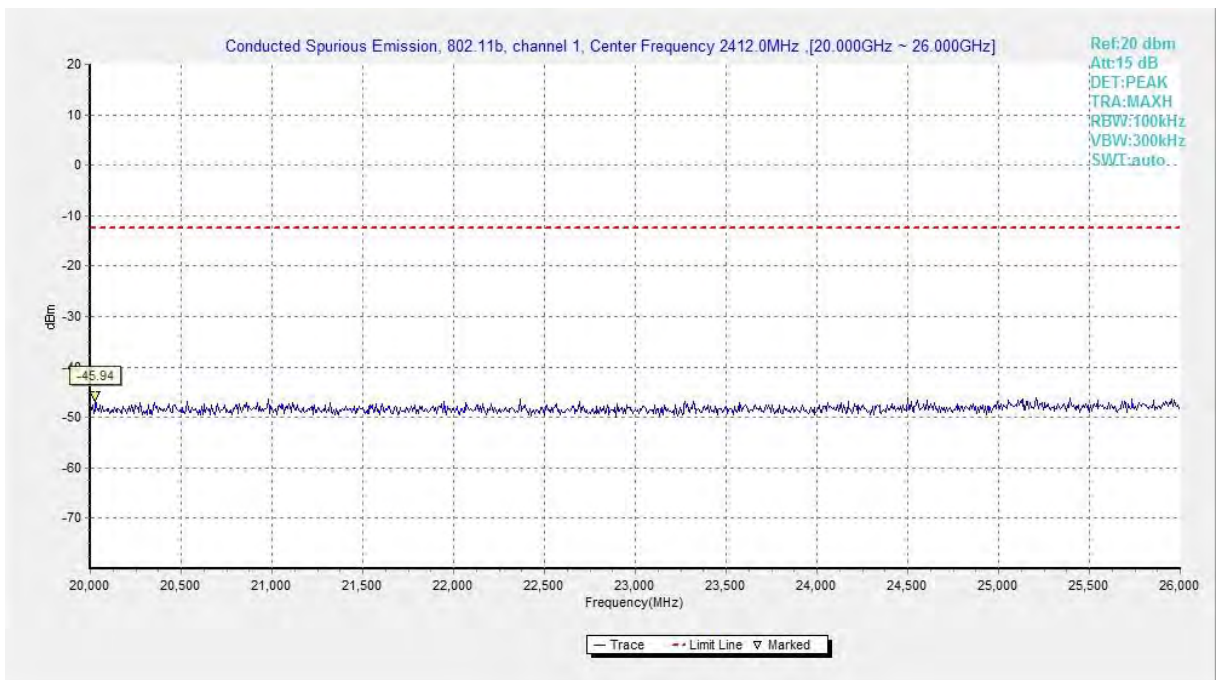

**Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 20 GHz-26 GHz)**

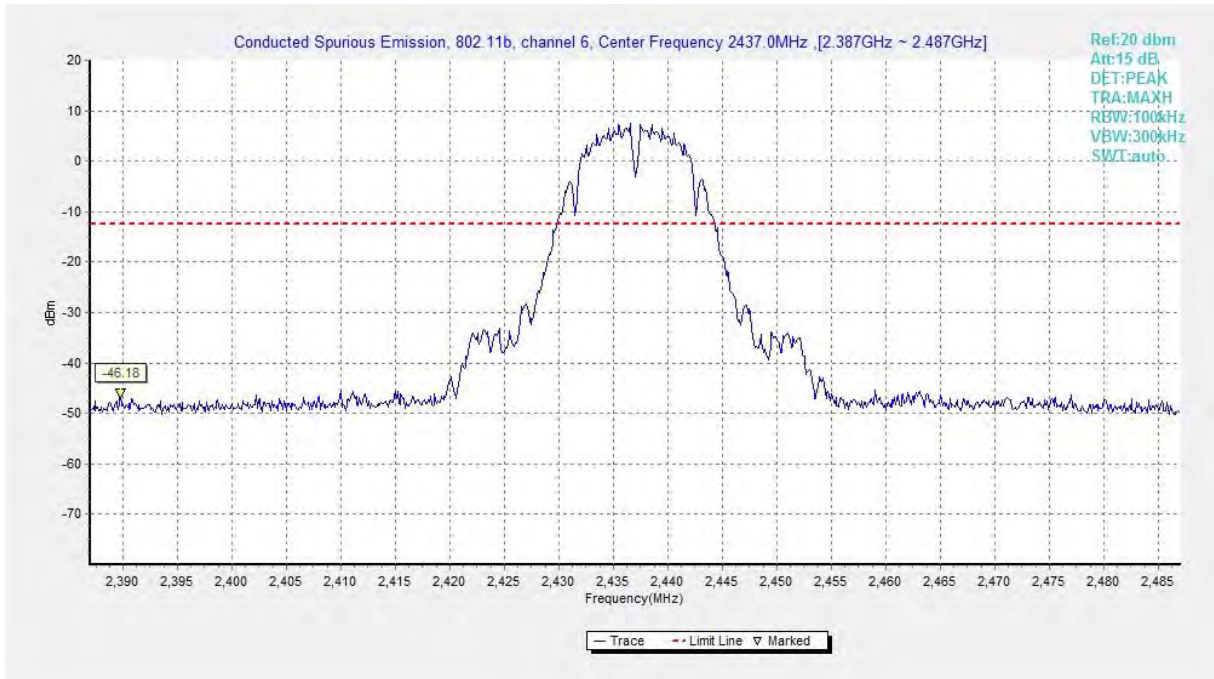

**Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)**

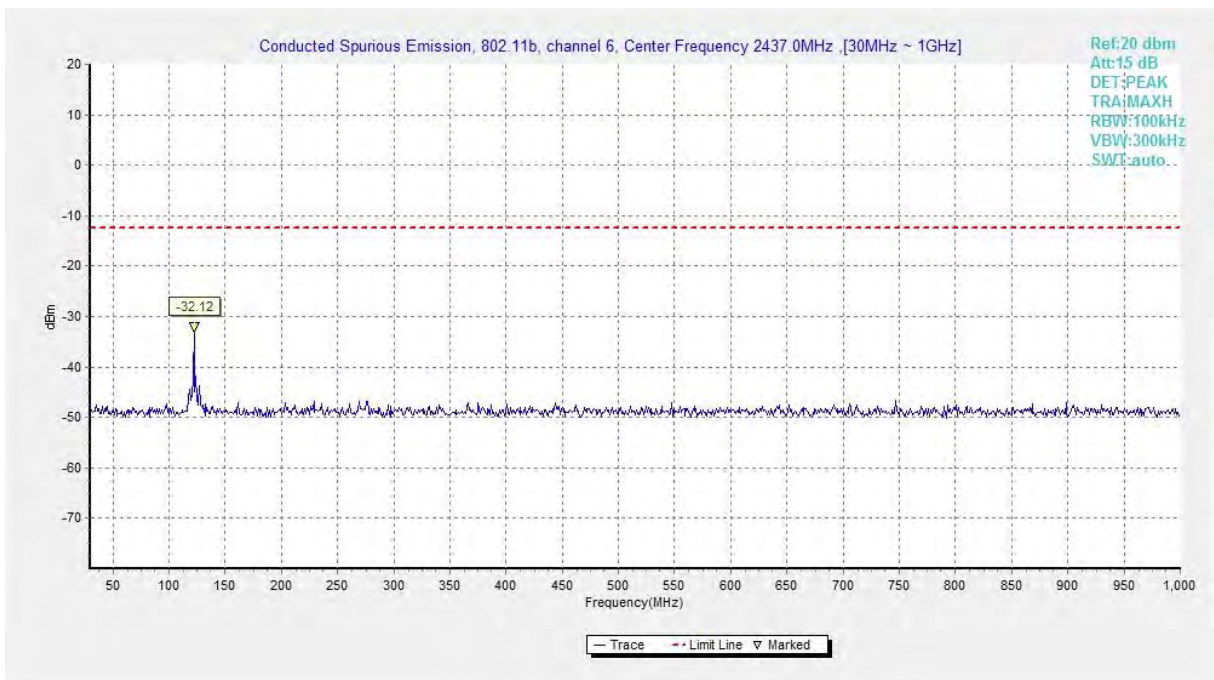

**Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)**

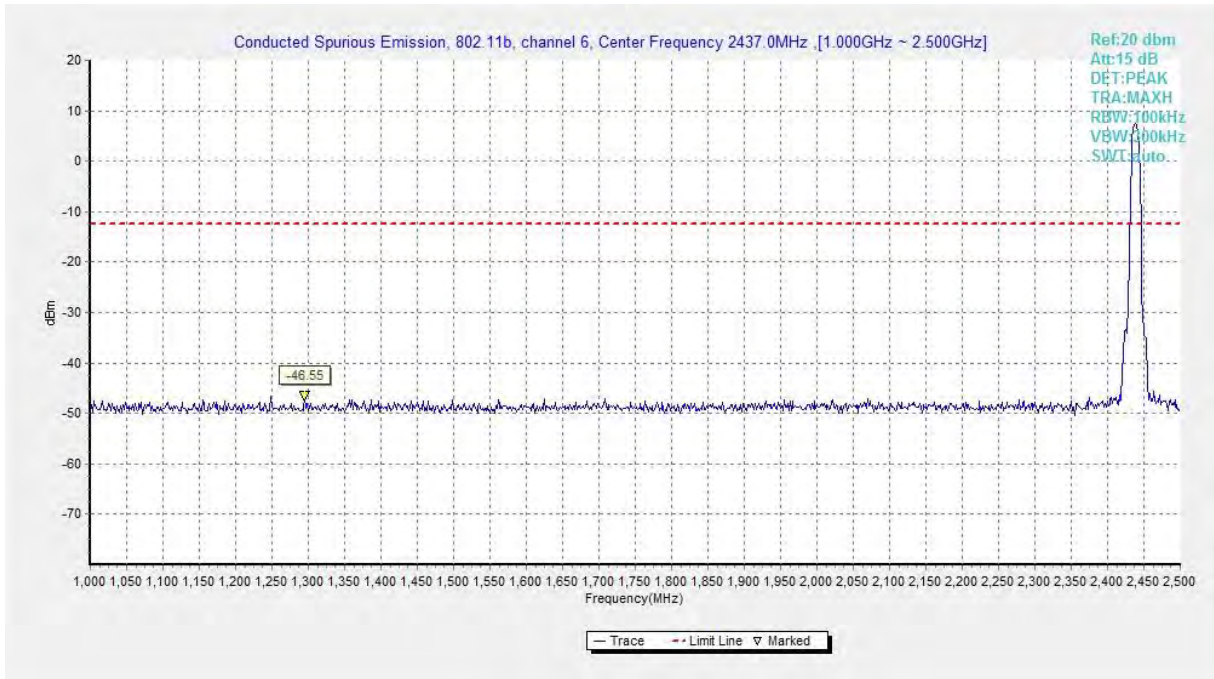


Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-2.5 GHz)



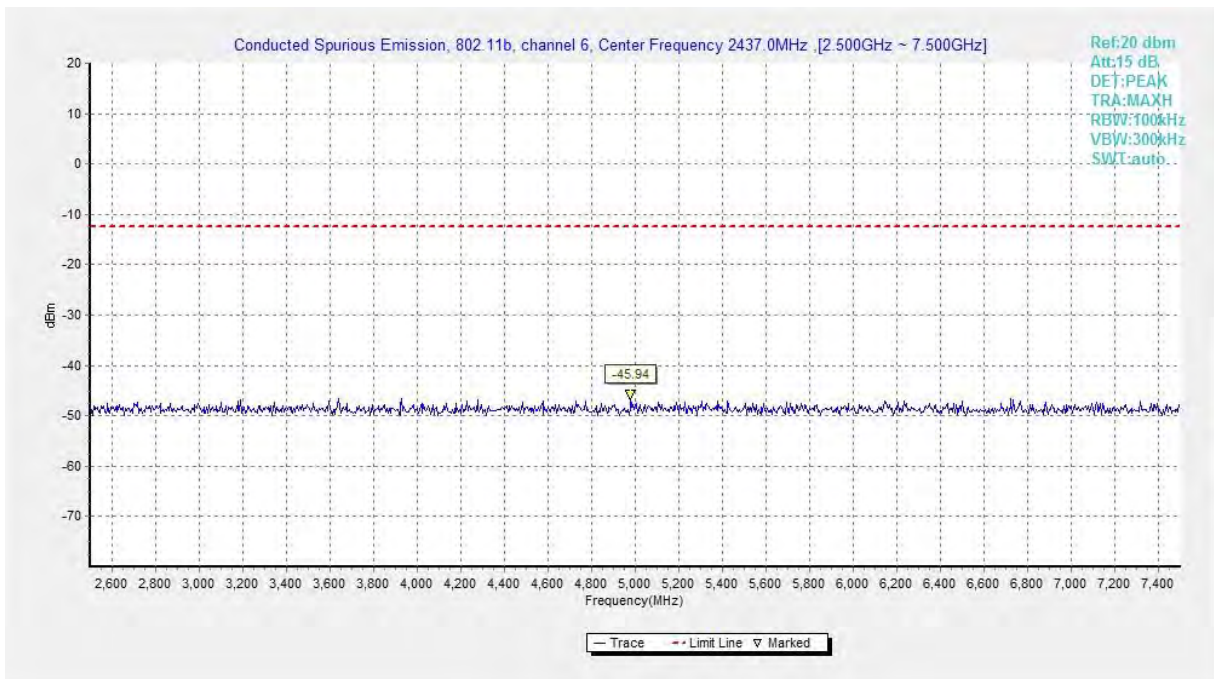


Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 2.5 GHz-7.5 GHz)




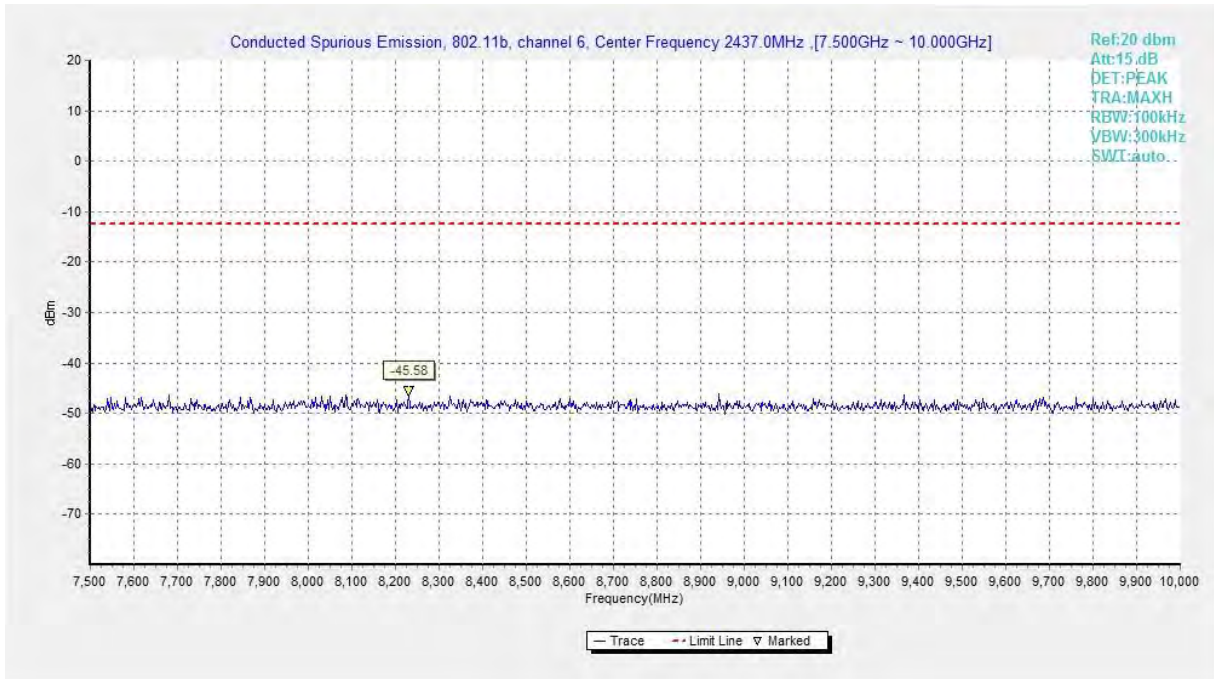


**Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 7.5 GHz-10 GHz)**

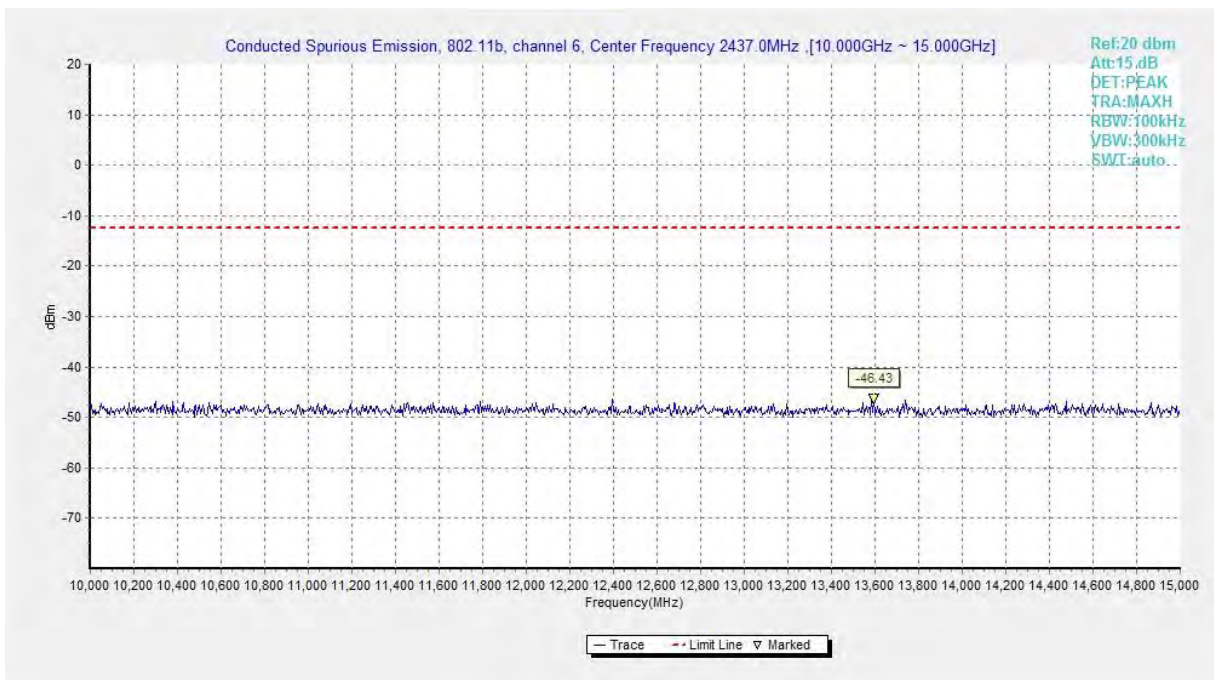


**Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 10 GHz-15 GHz)**

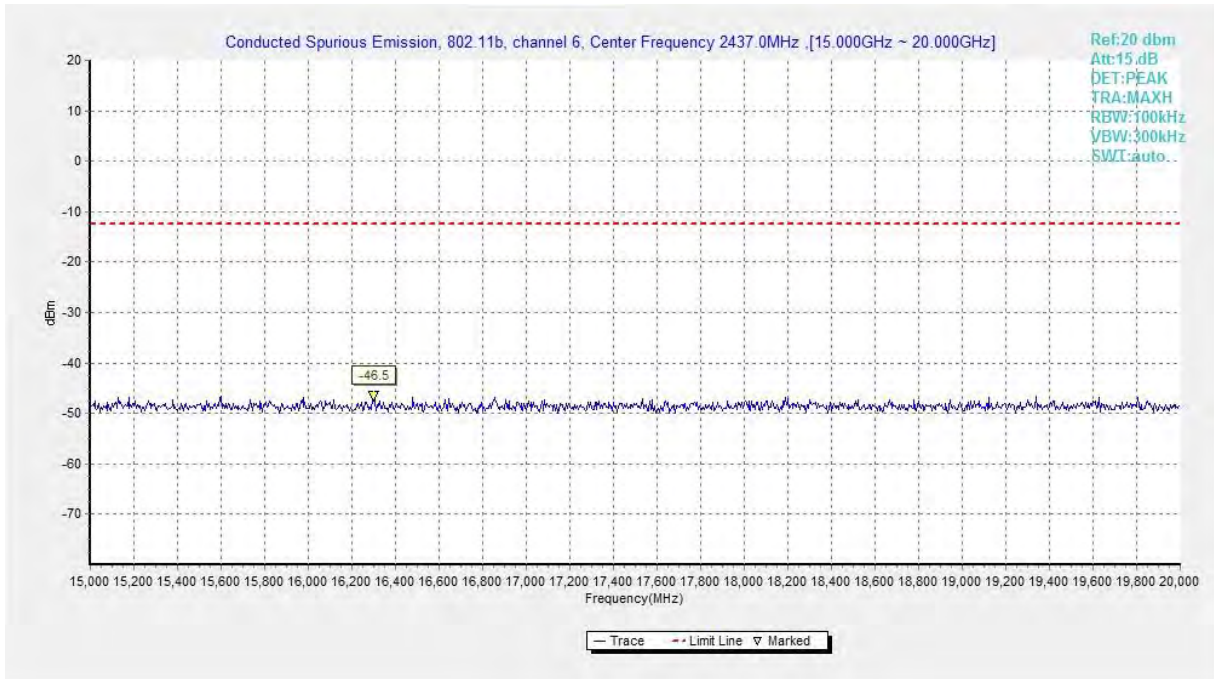


**Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 15 GHz-20 GHz)**

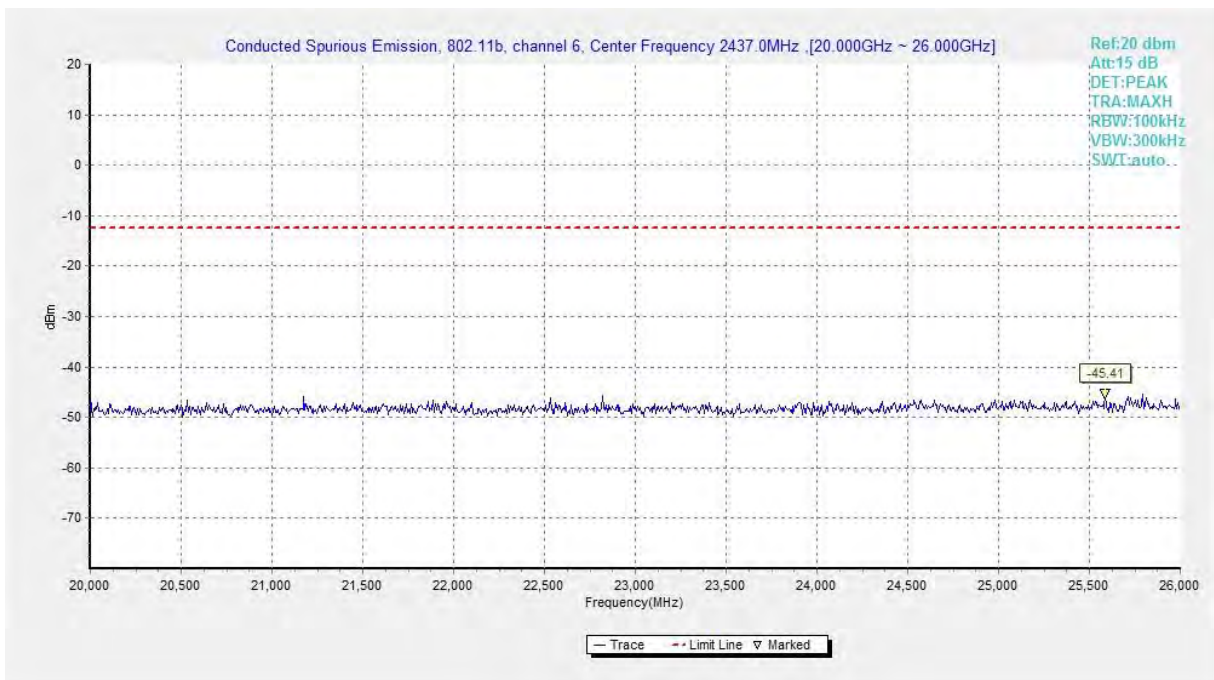


**Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 20 GHz-26 GHz)**

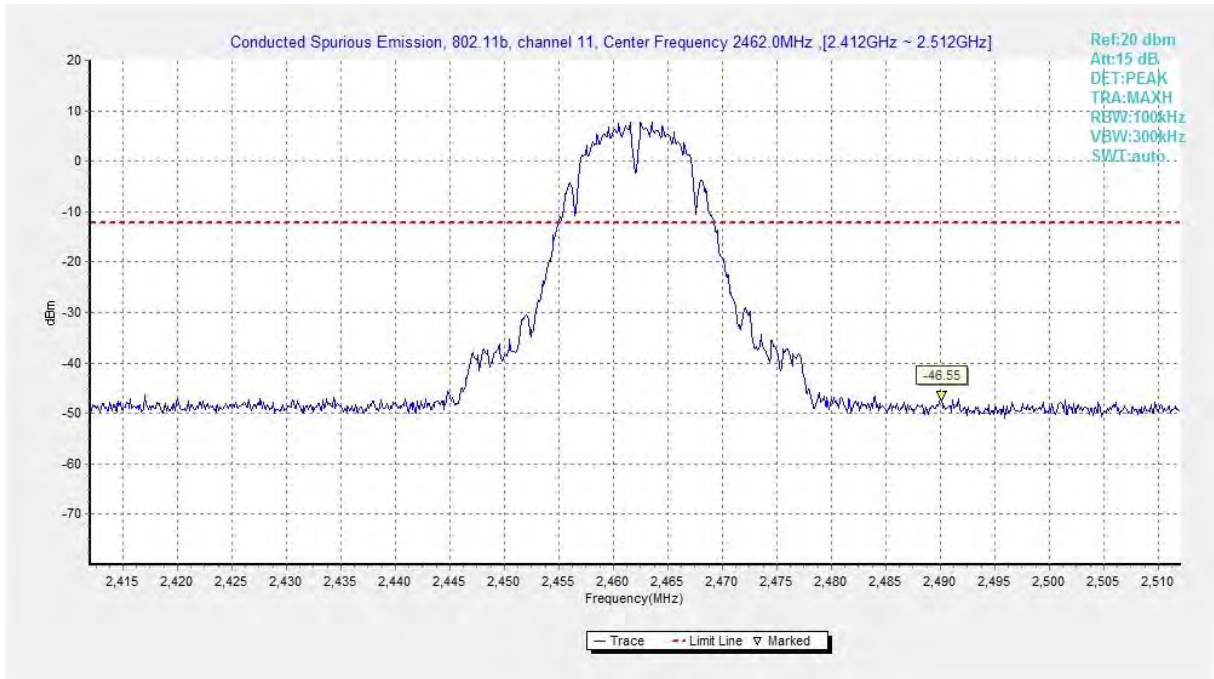


**Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)**

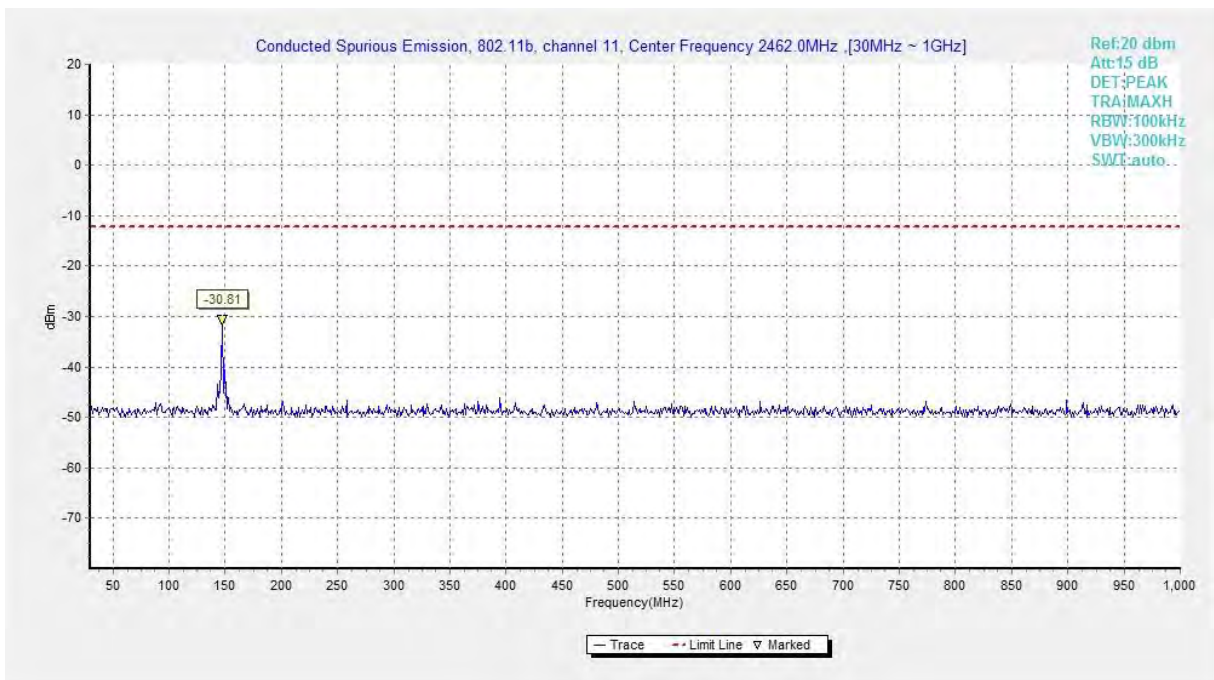


**Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-1 GHz)**

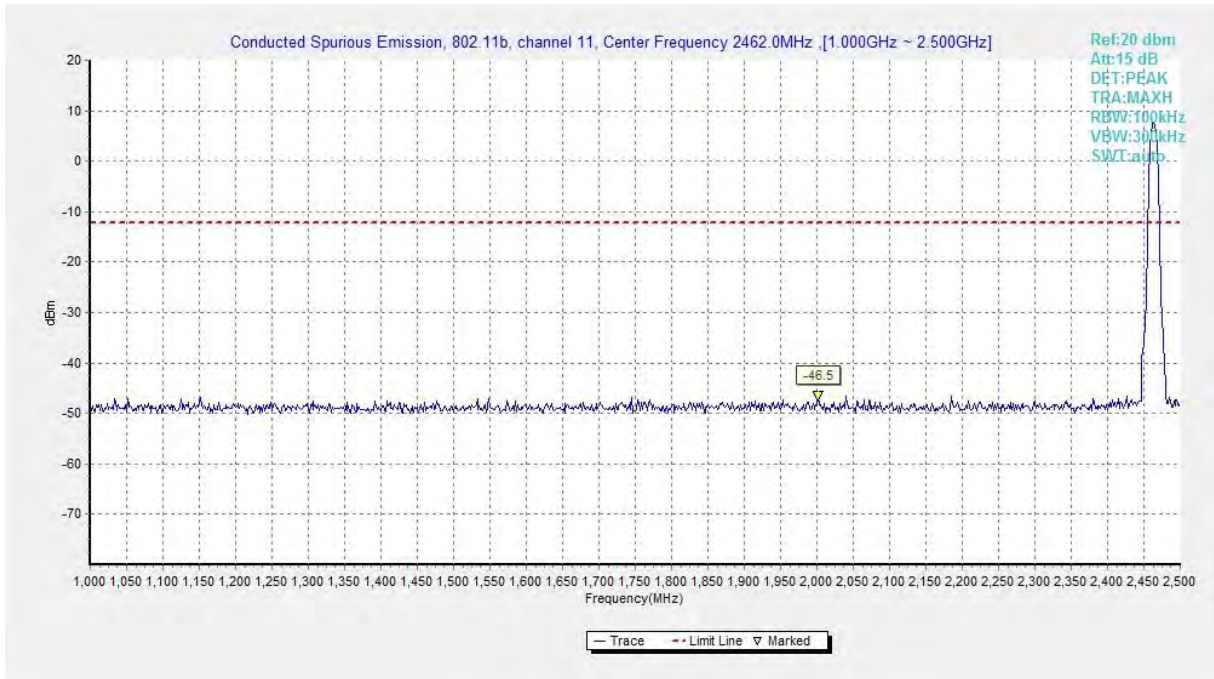


**Fig.A.6.1.19 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 1 GHz-2.5 GHz)**

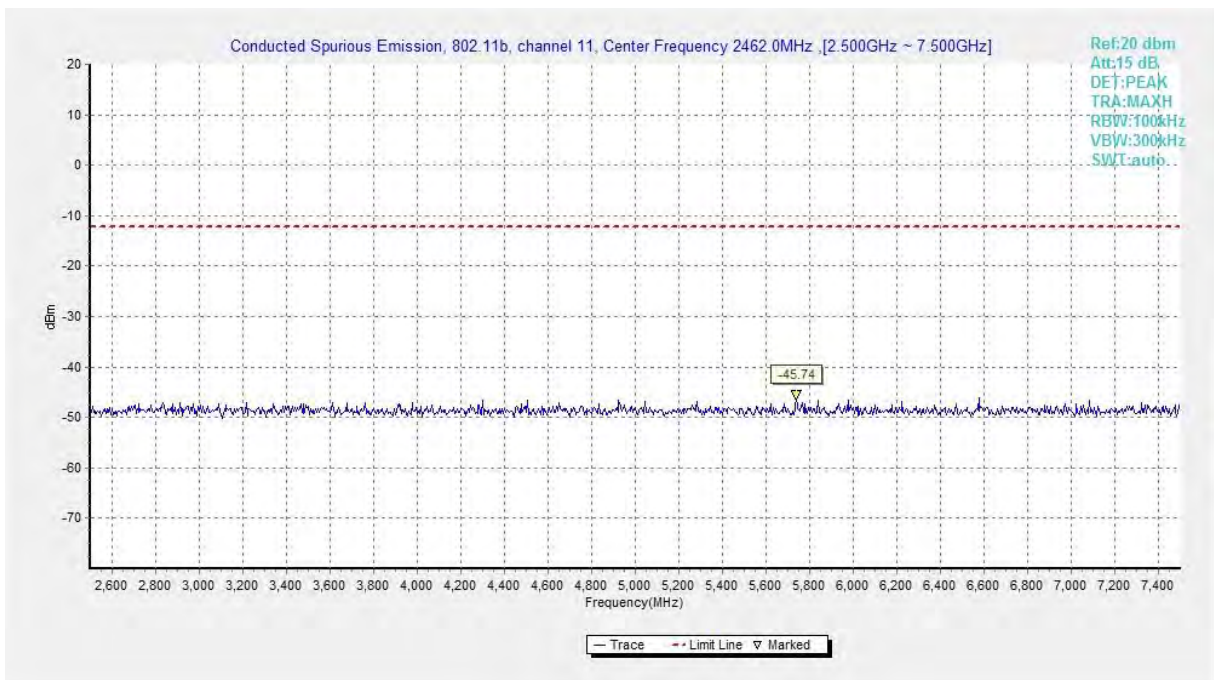


**Fig.A.6.1.20 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 2.5 GHz-7.5 GHz)**

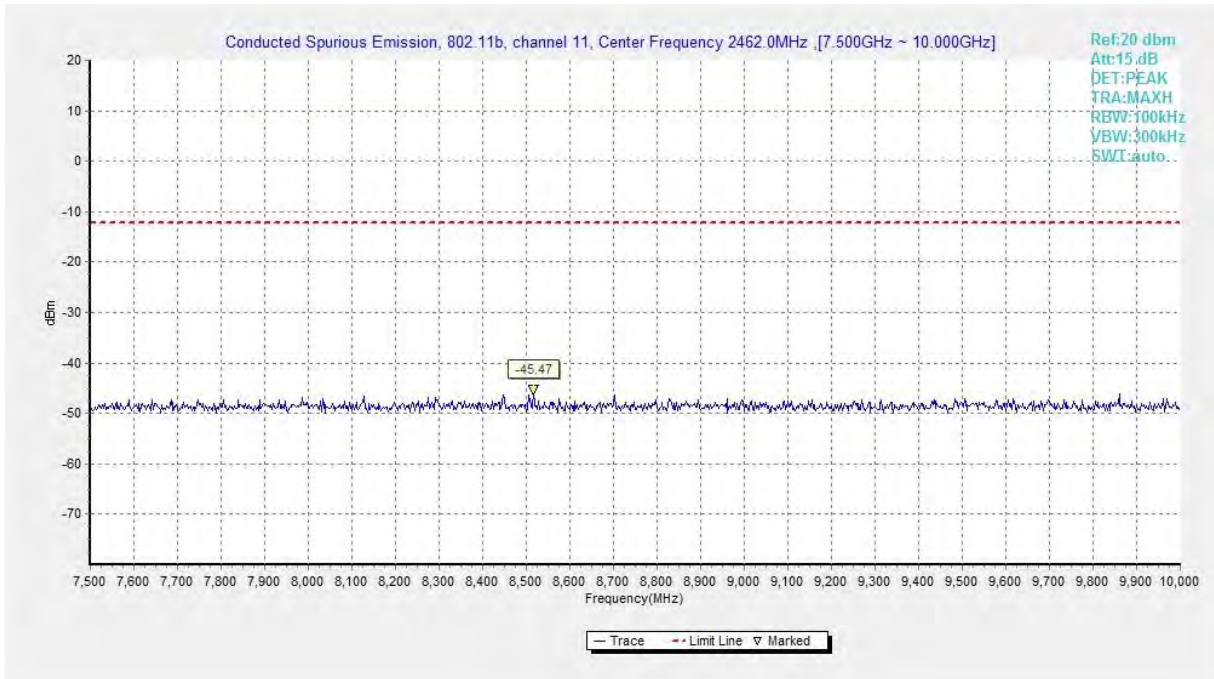


**Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 7.5 GHz-10 GHz)**

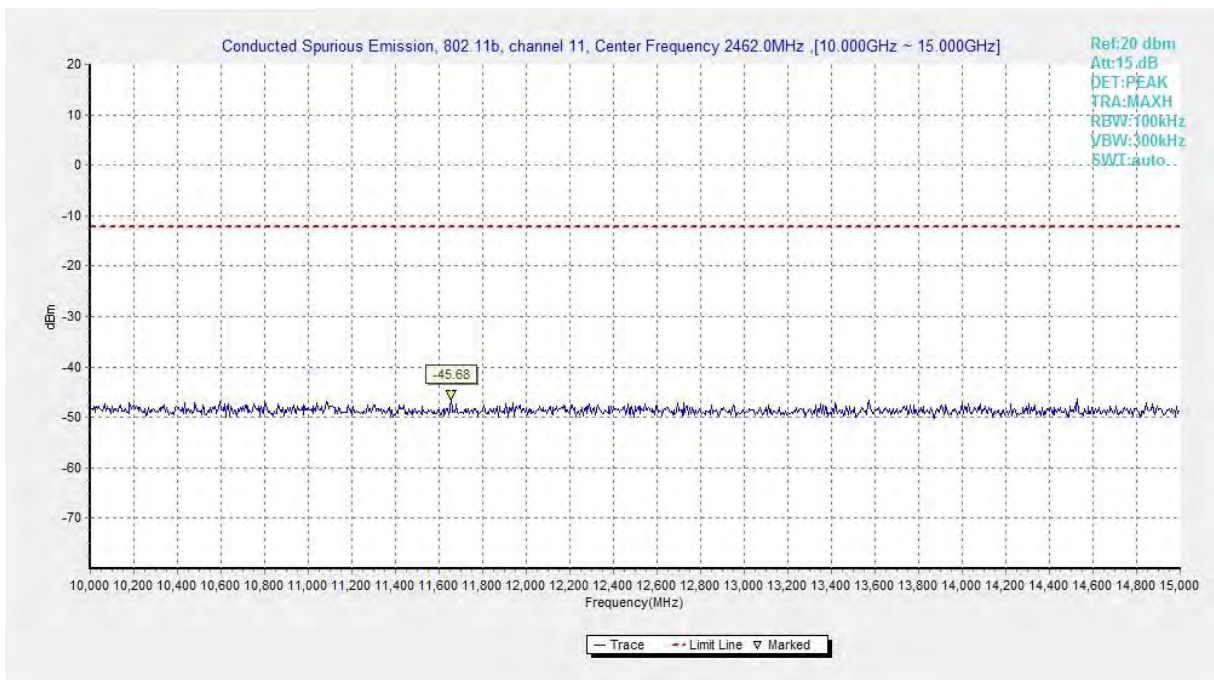


**Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 10 GHz-15 GHz)**

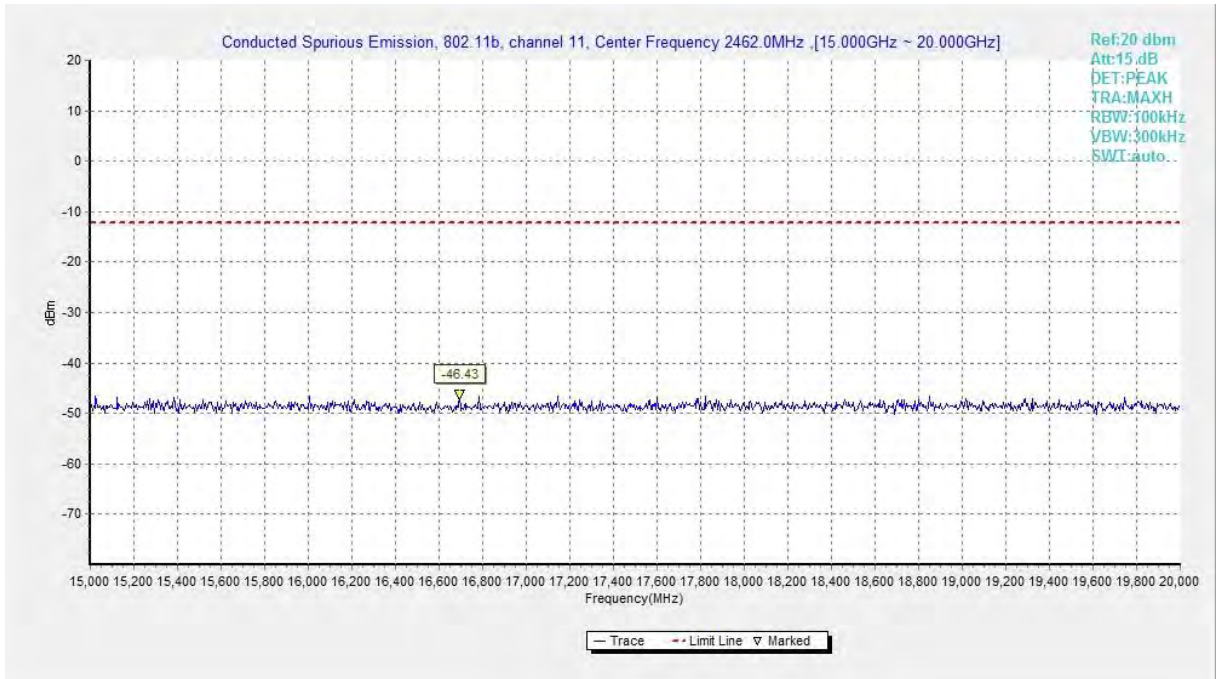


**Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 15 GHz-20 GHz)**

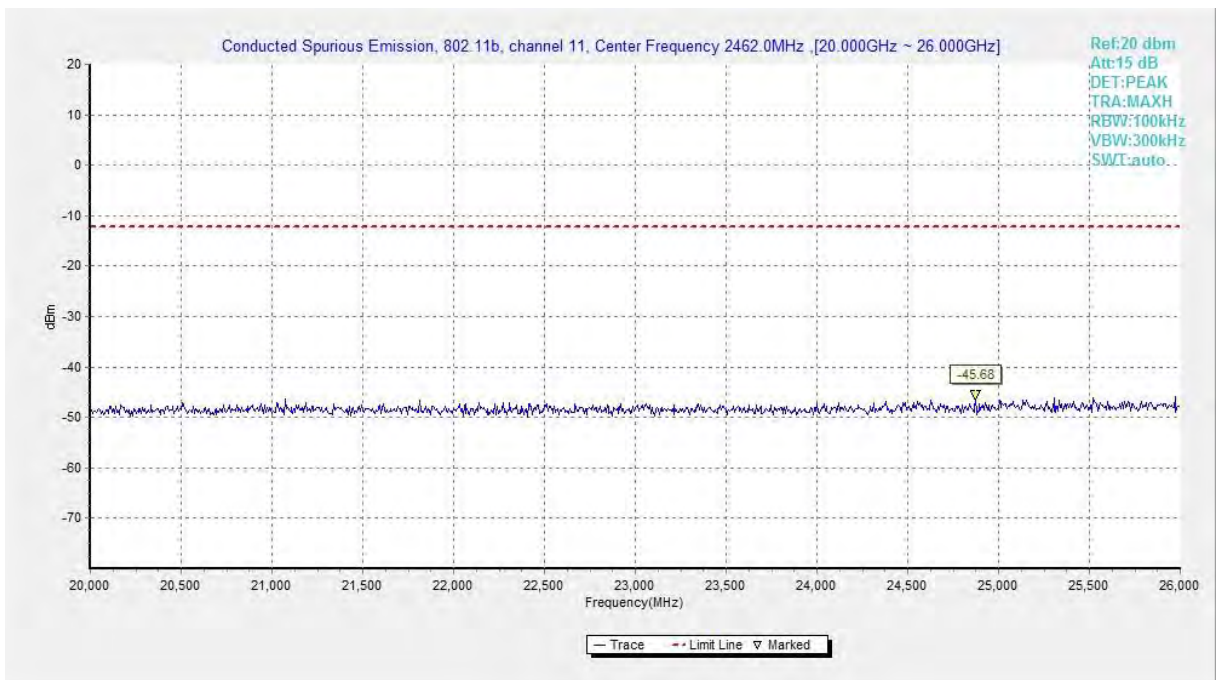


**Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 20 GHz-26 GHz)**

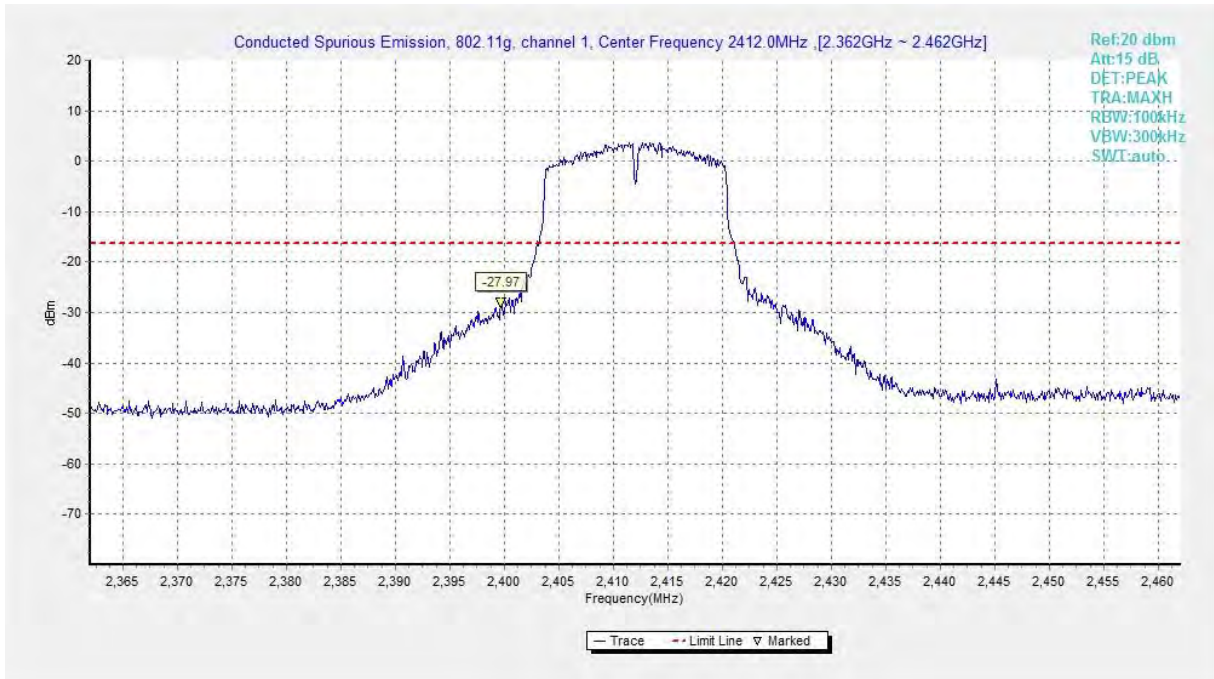


**Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)**

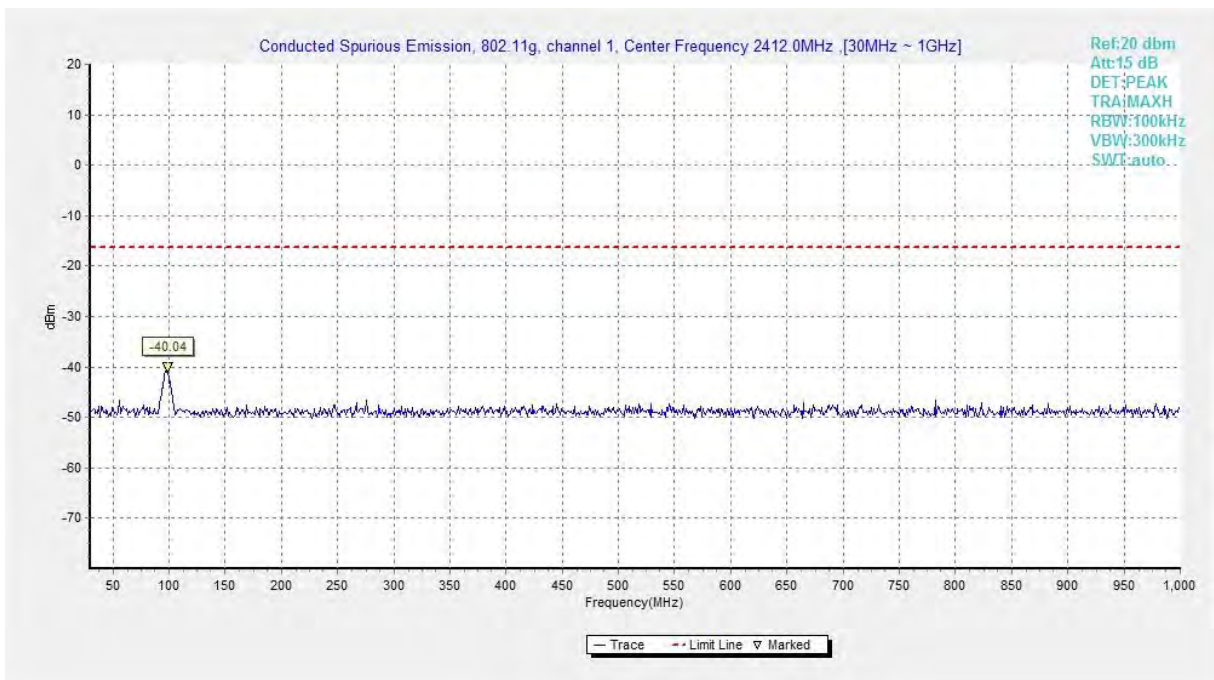

**Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)**

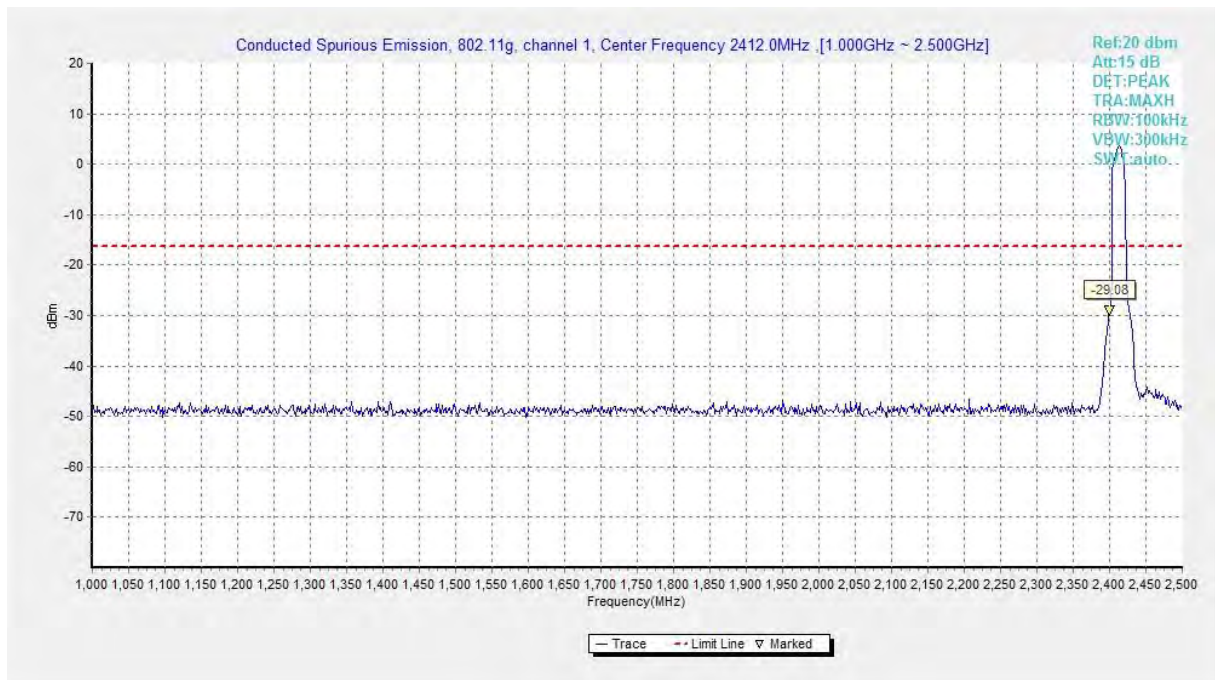


**Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-2.5 GHz)**

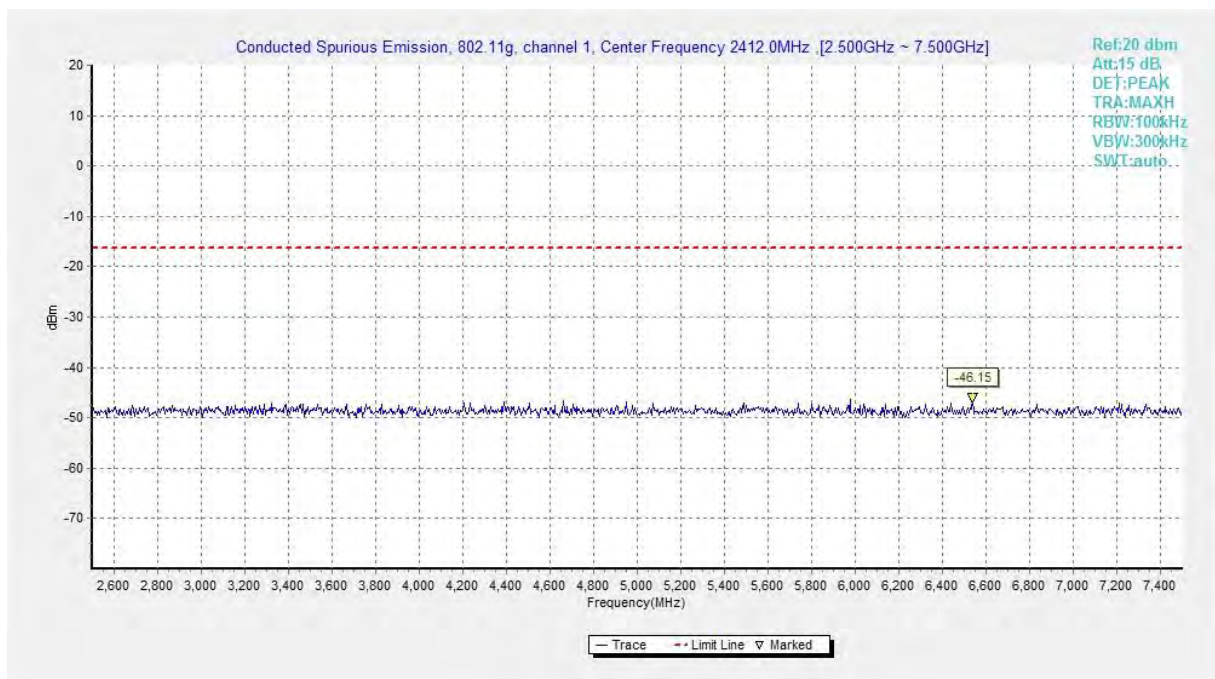


**Fig.A.6.1.28 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 2.5 GHz-7.5 GHz)**




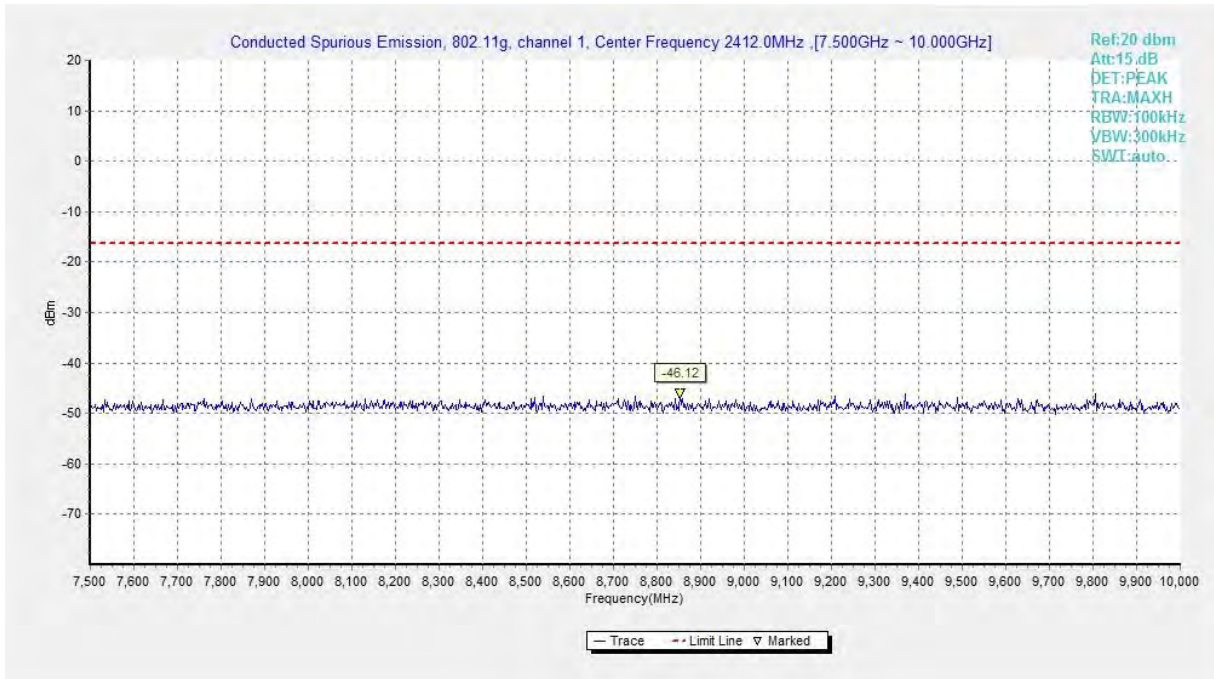


**Fig.A.6.1.29 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 7.5 GHz-10 GHz)**

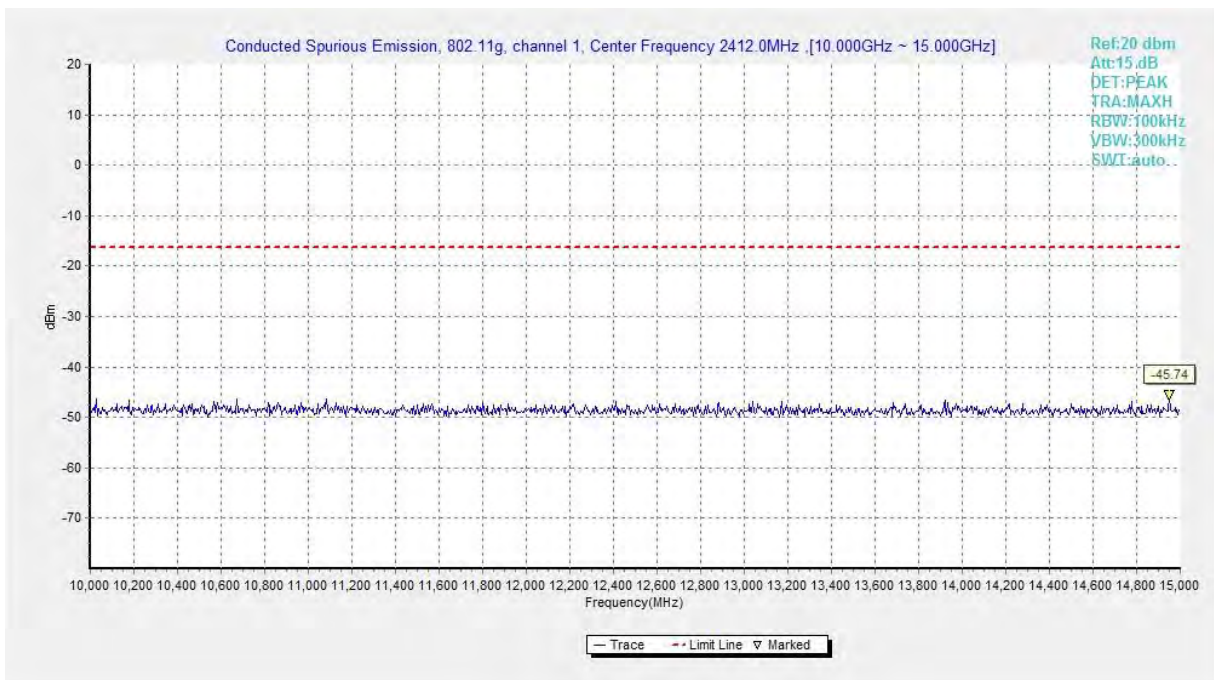


**Fig.A.6.1.30 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 10 GHz-15 GHz)**

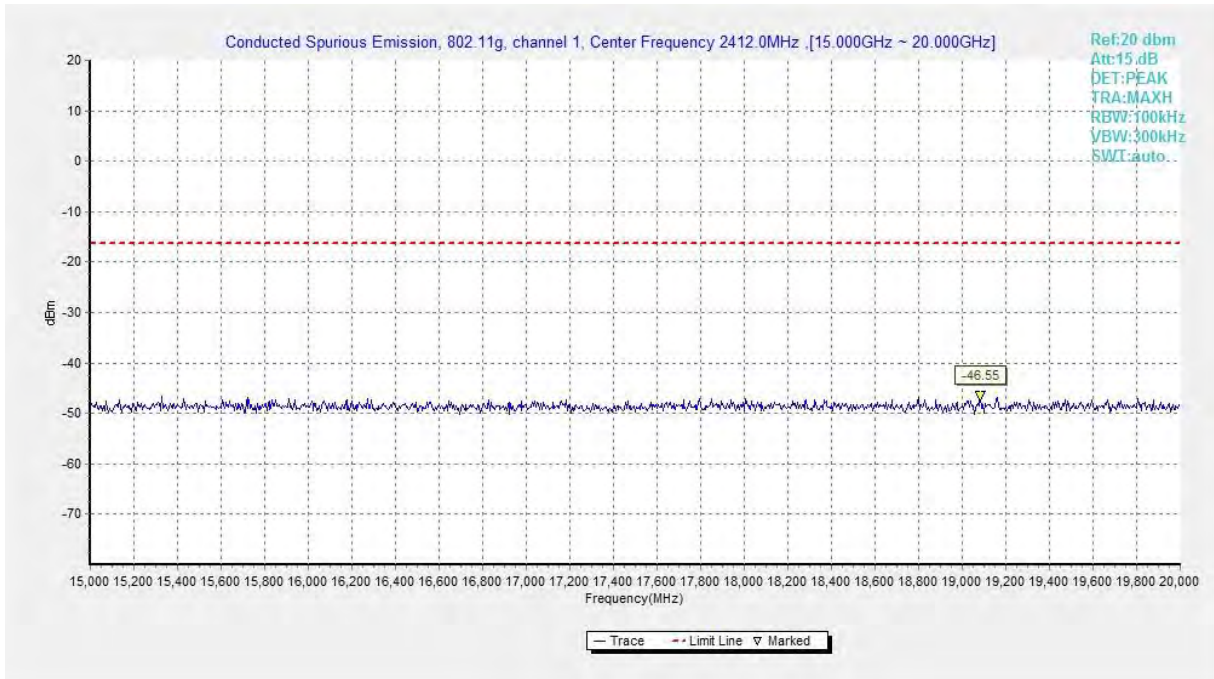


**Fig.A.6.1.31 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 15 GHz-20 GHz)**

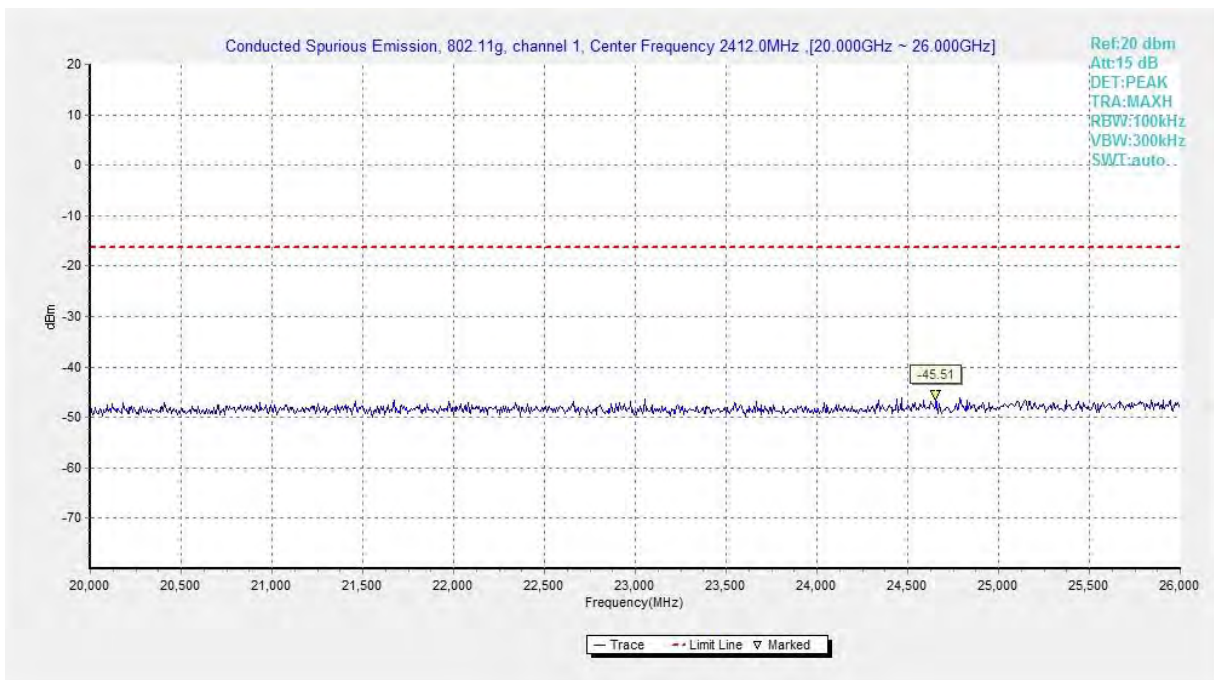

**Fig.A.6.1.32 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 20 GHz-26 GHz)**

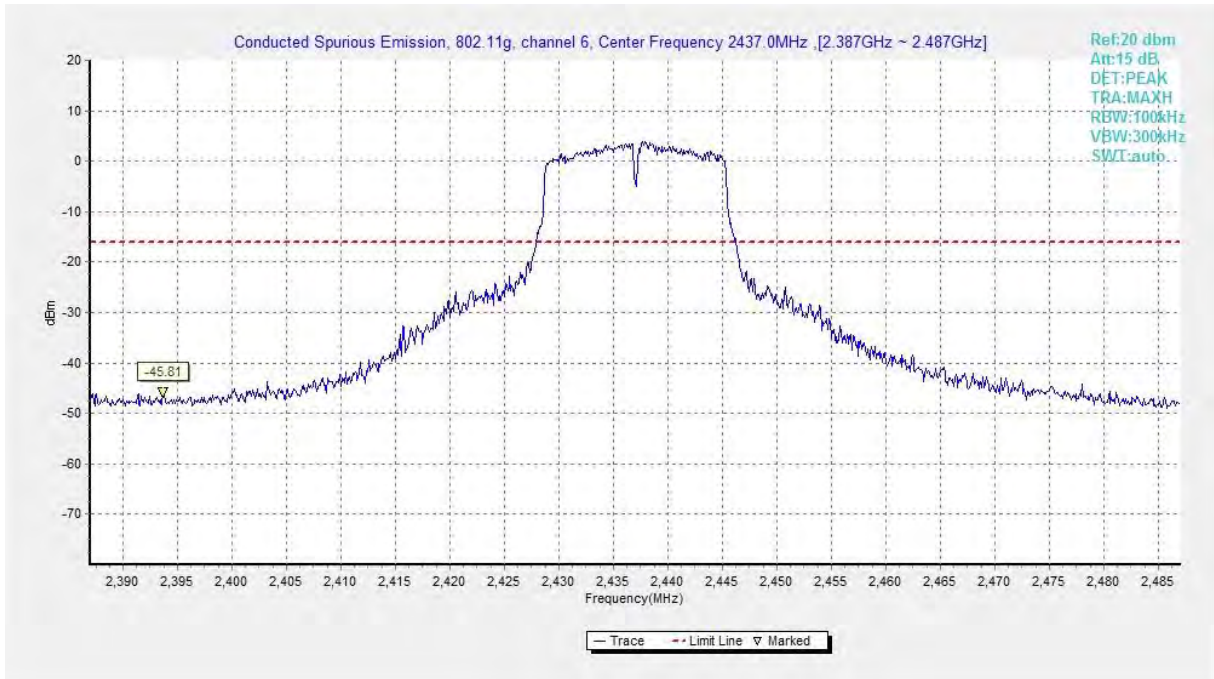

**Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)**

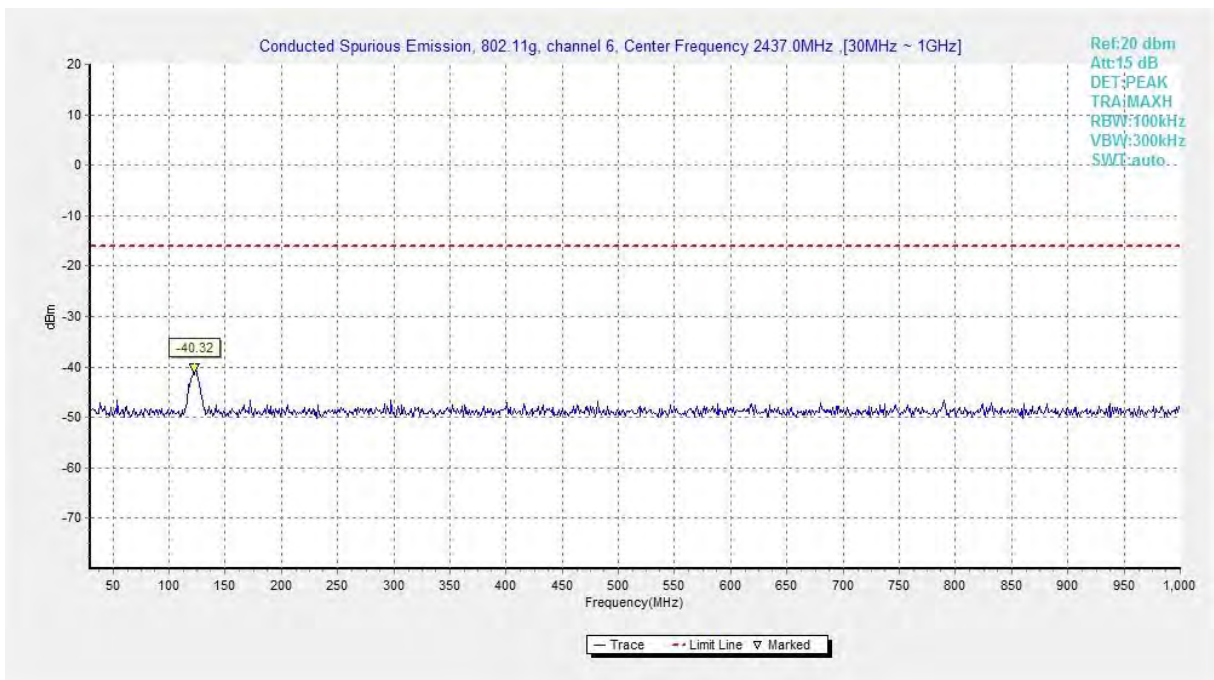

**Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)**

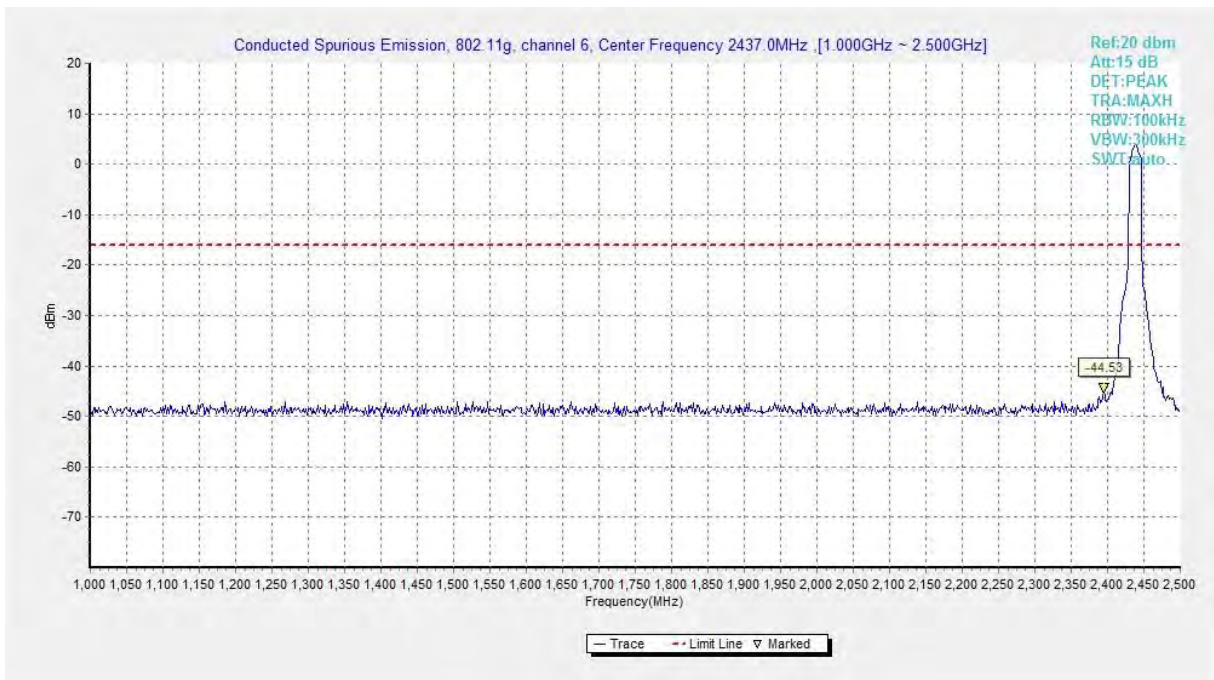


Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-2.5 GHz)



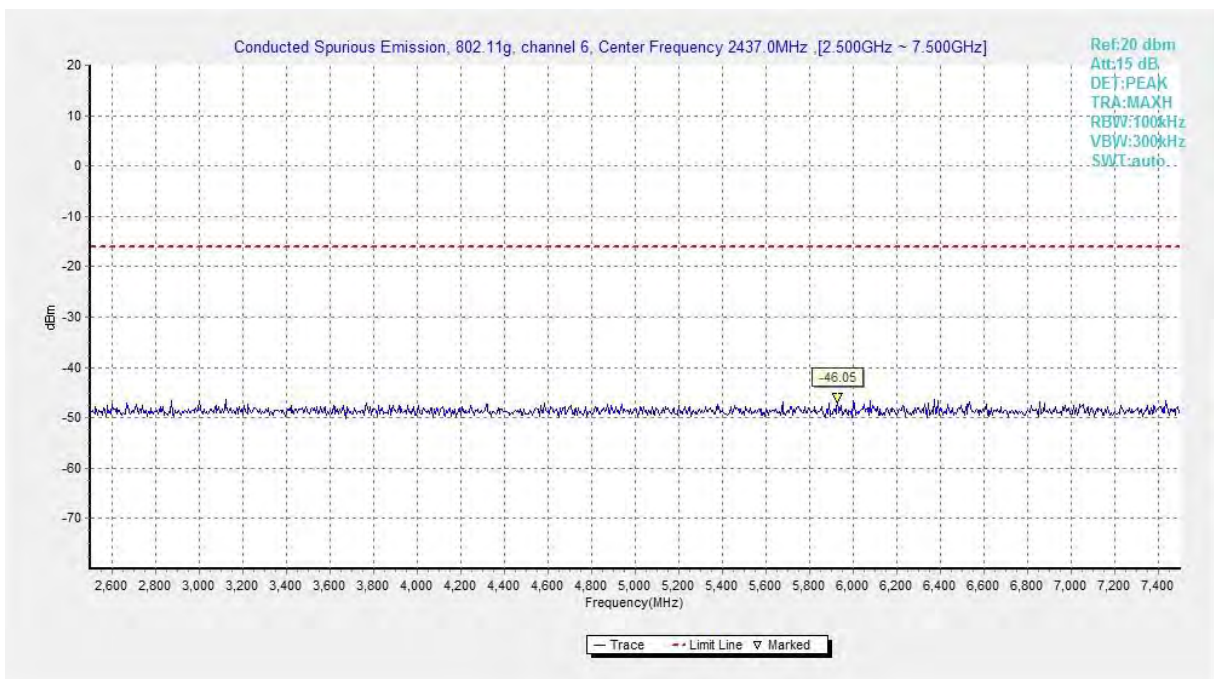



Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 2.5 GHz-7.5 GHz)

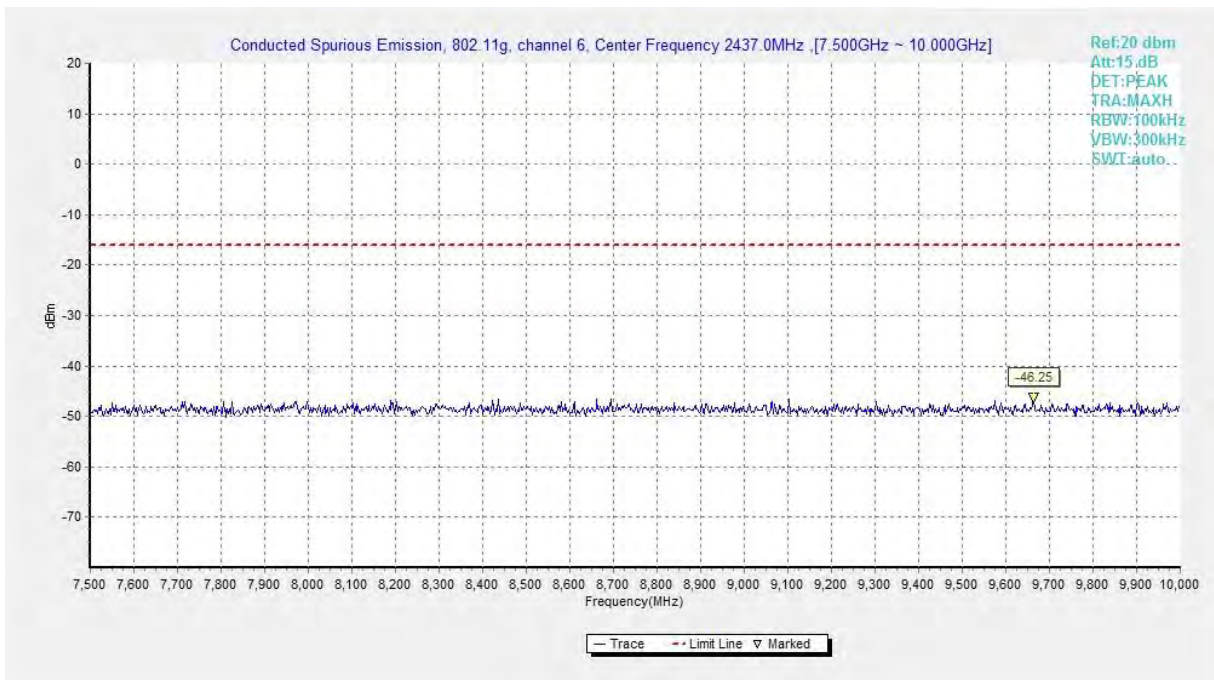


**Fig.A.6.1.37 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 7.5 GHz-10 GHz)**

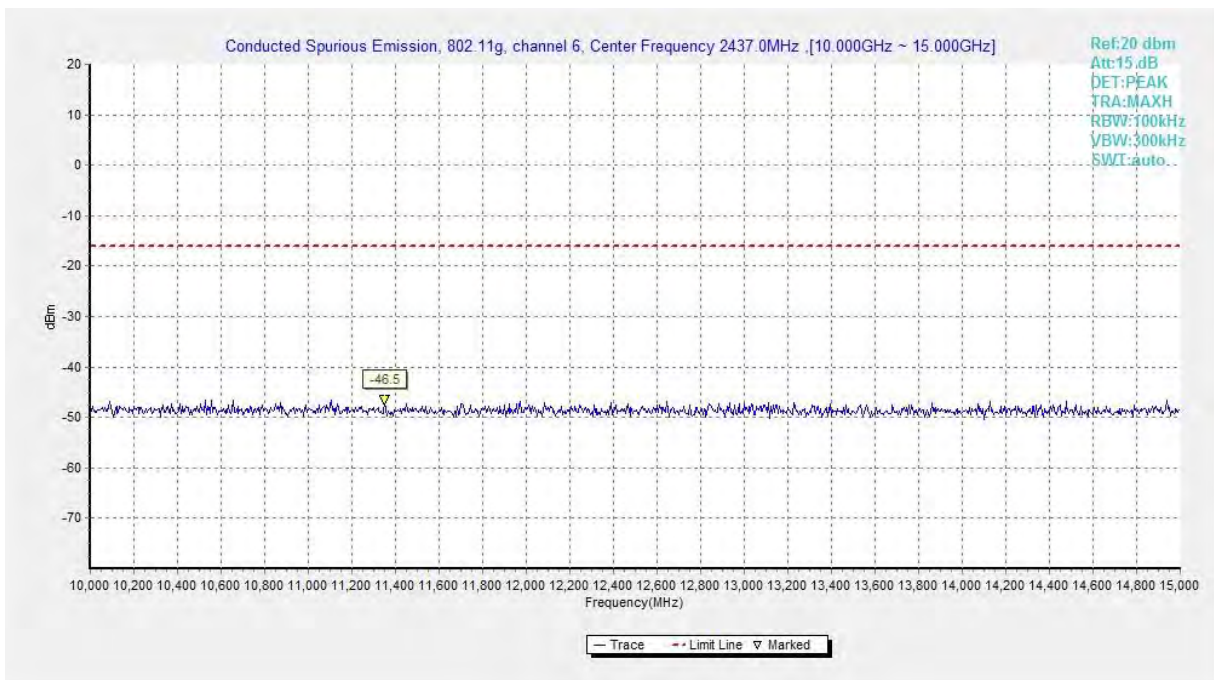


**Fig.A.6.1.38 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 10 GHz-15 GHz)**

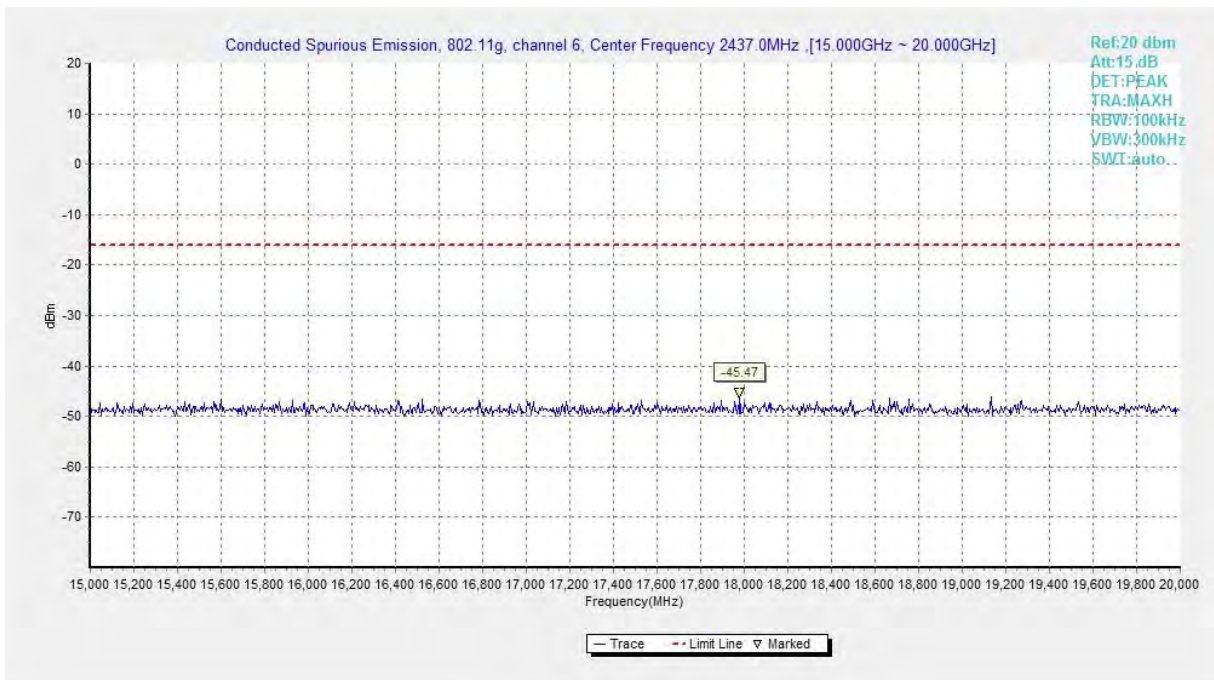


**Fig.A.6.1.39 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 15 GHz-20 GHz)**

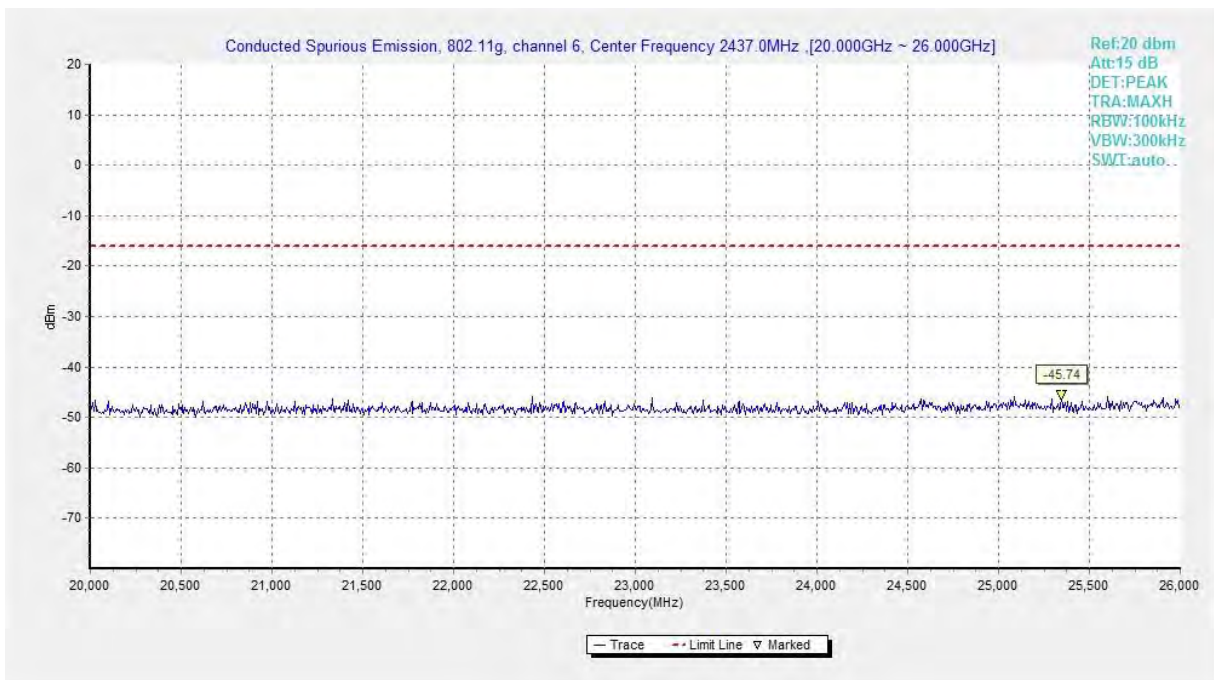


**Fig.A.6.1.40 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 20 GHz-26 GHz)**

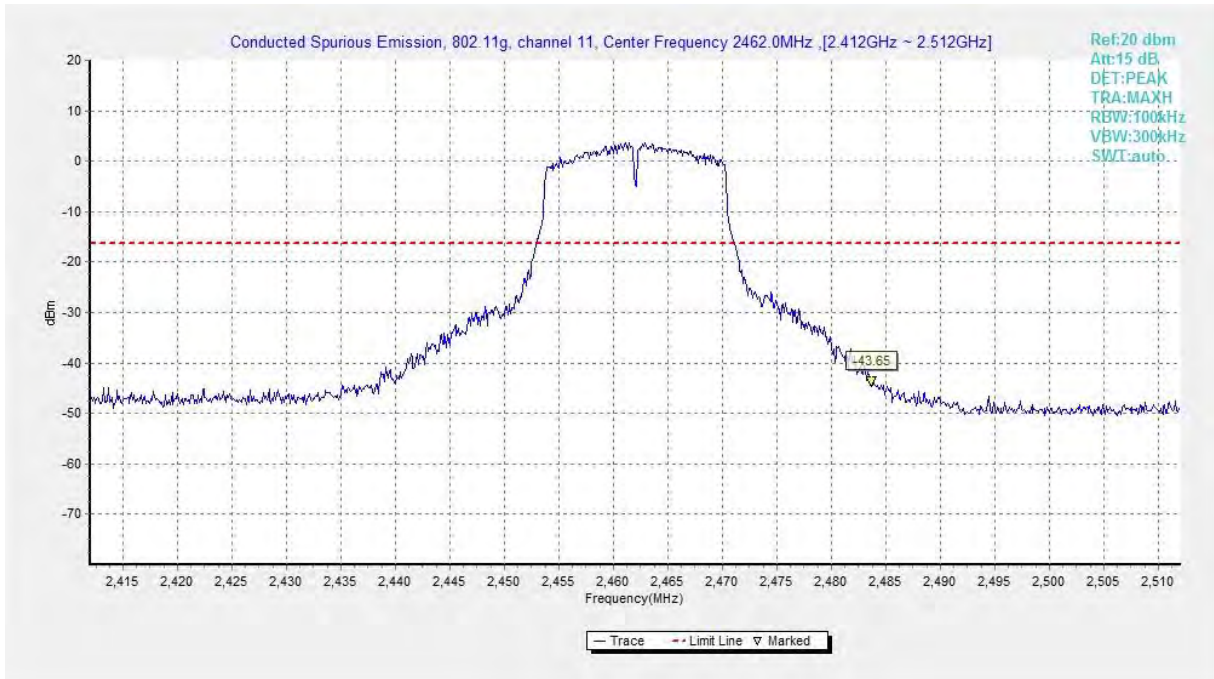


**Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)**

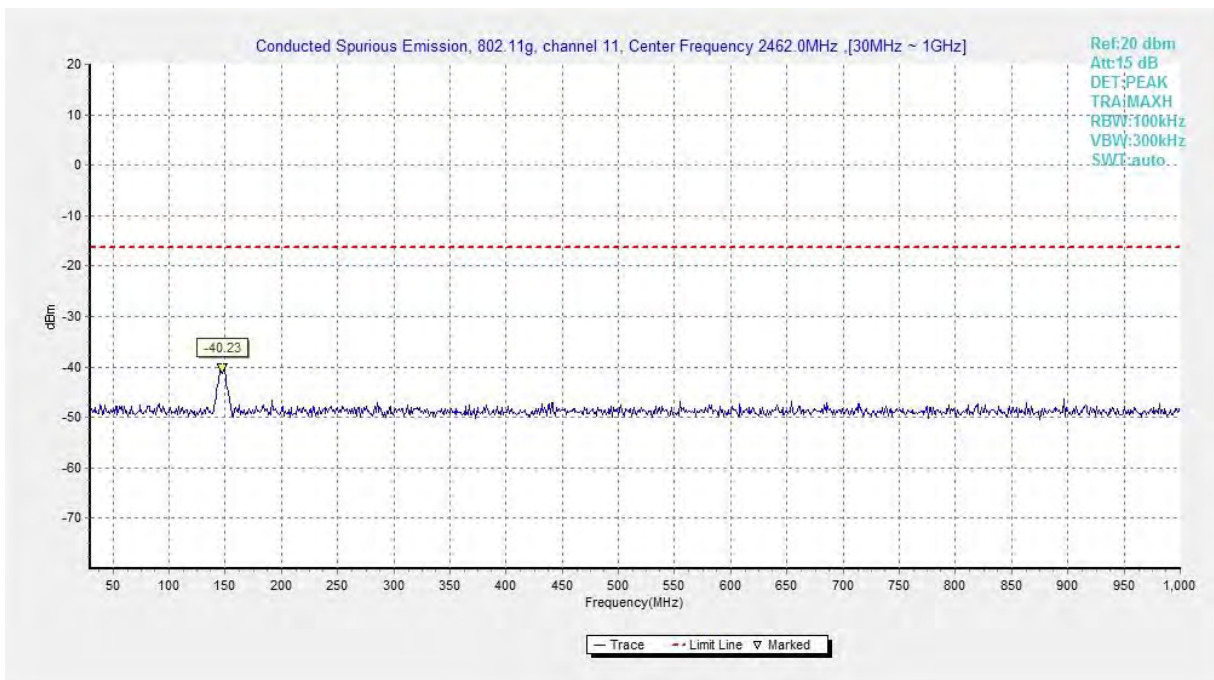

**Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)**

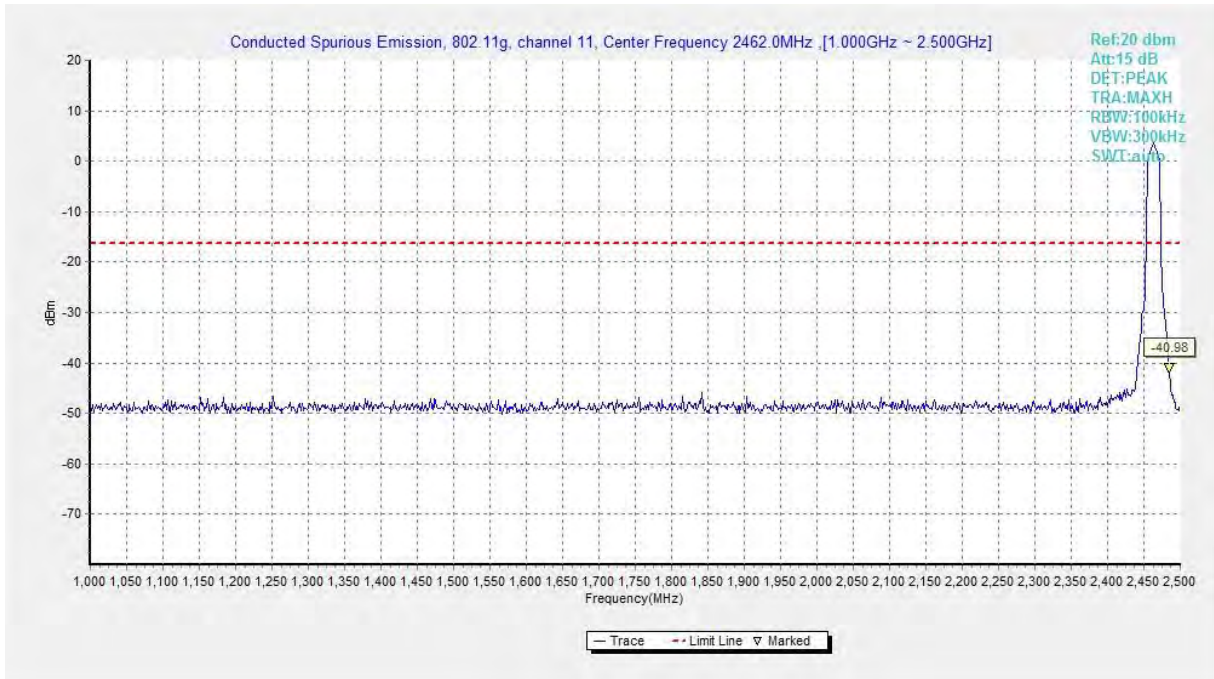


**Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)**

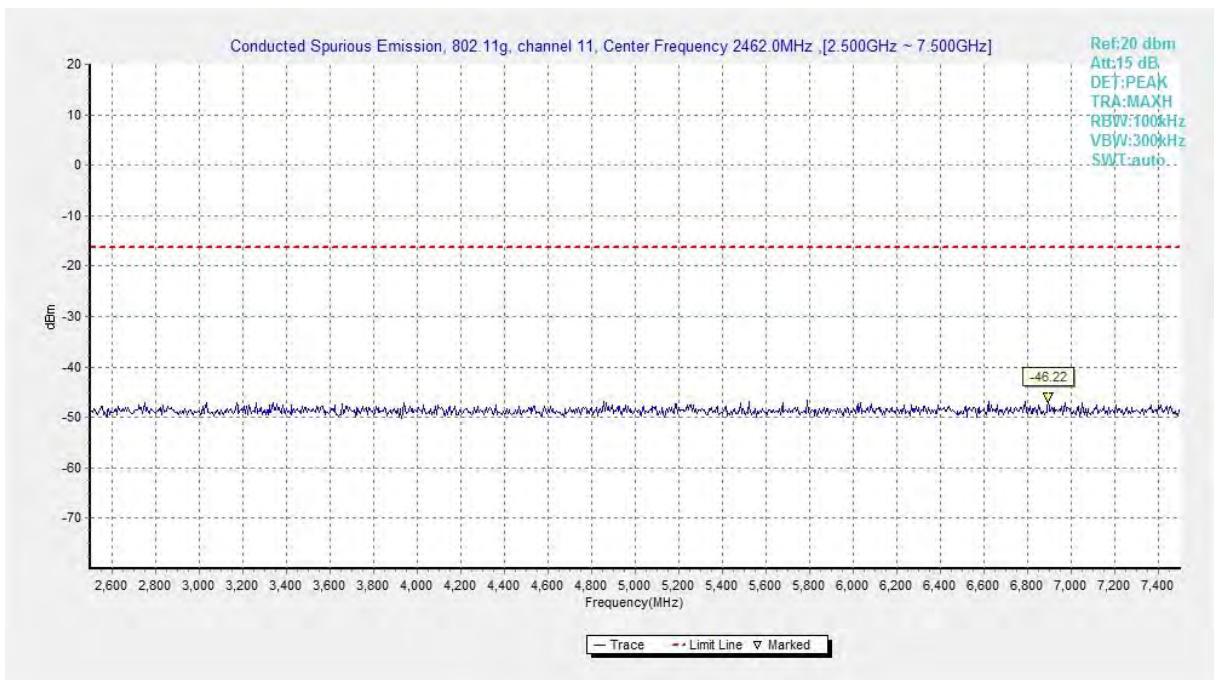


**Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)**




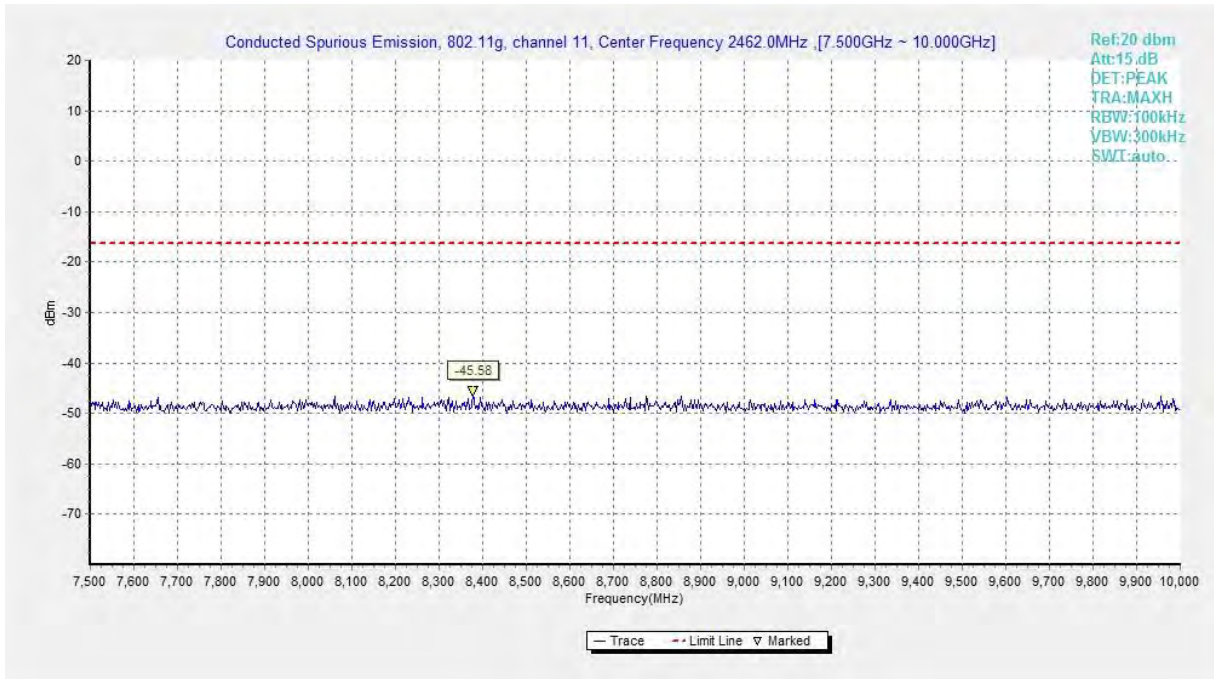


**Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)**

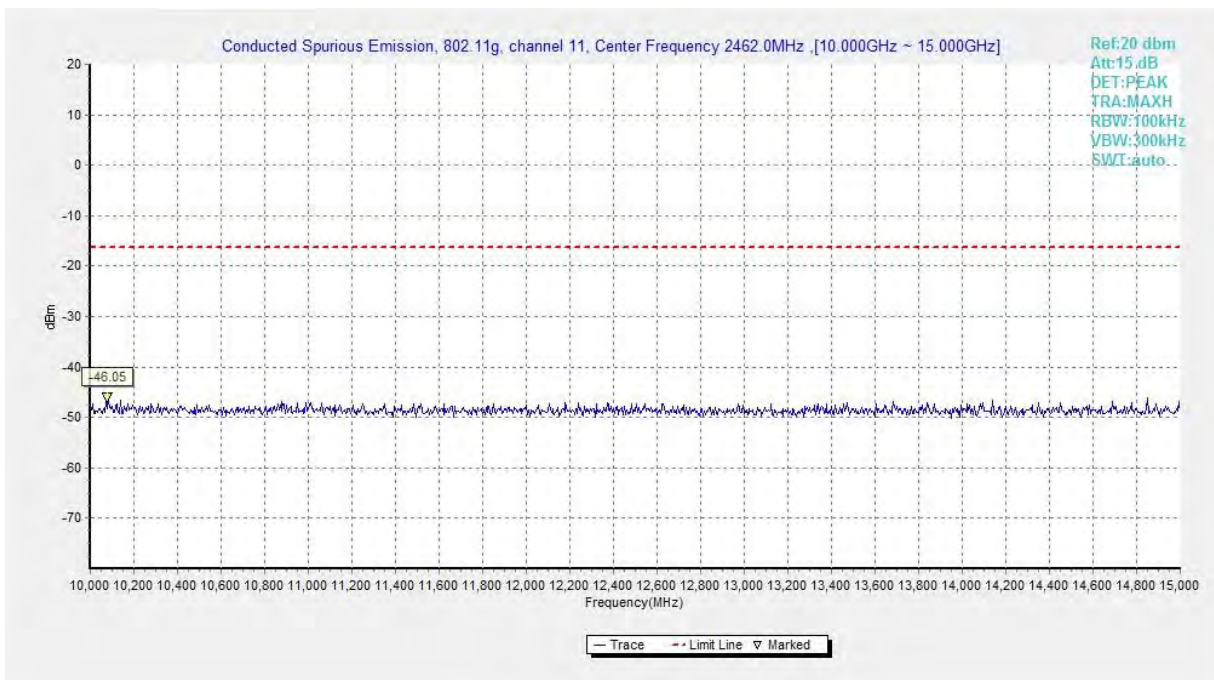


**Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)**

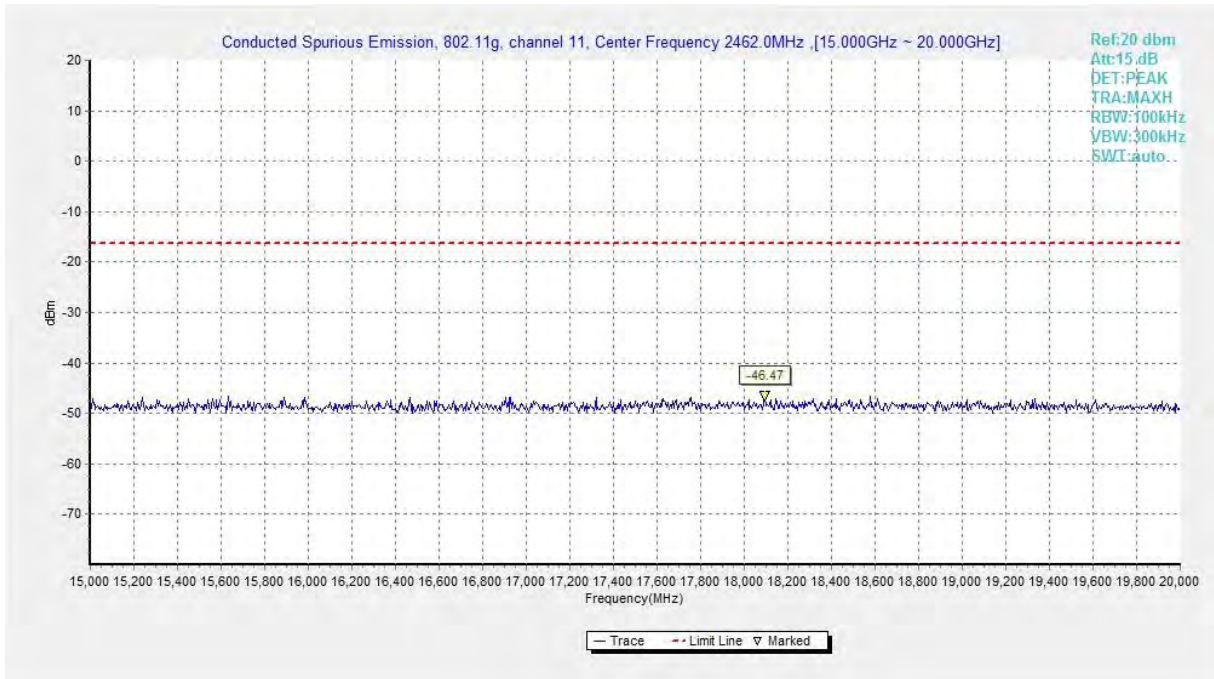


**Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)**

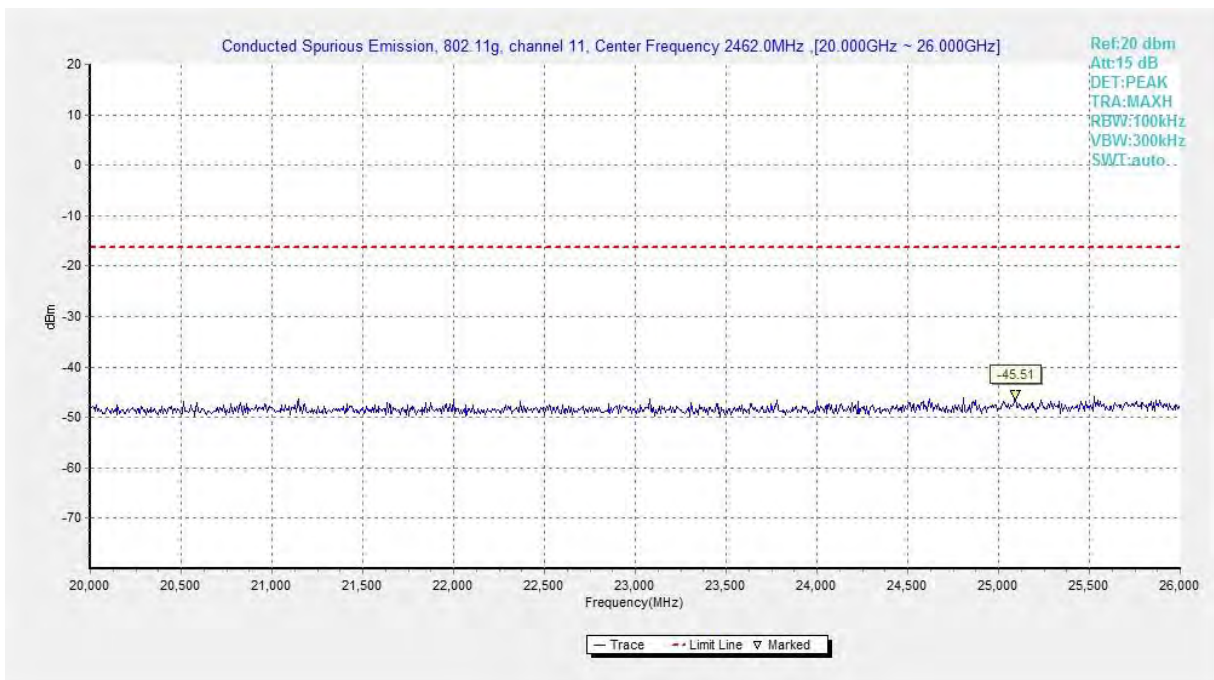


**Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)**

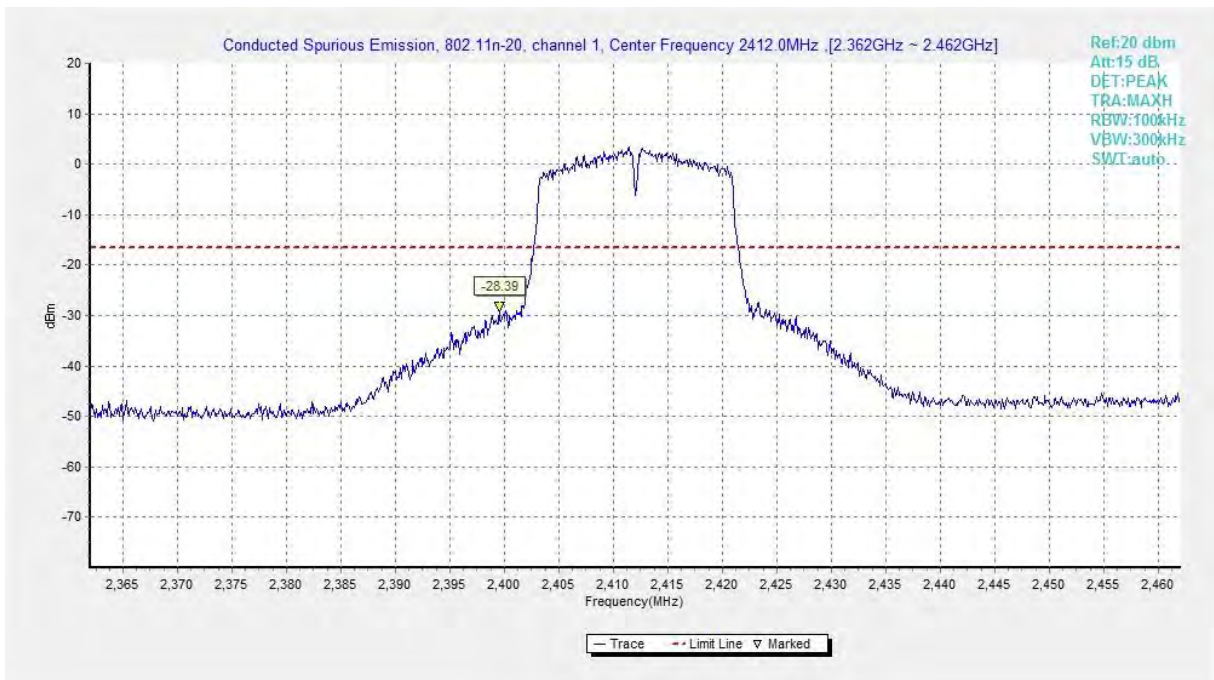


**Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)**

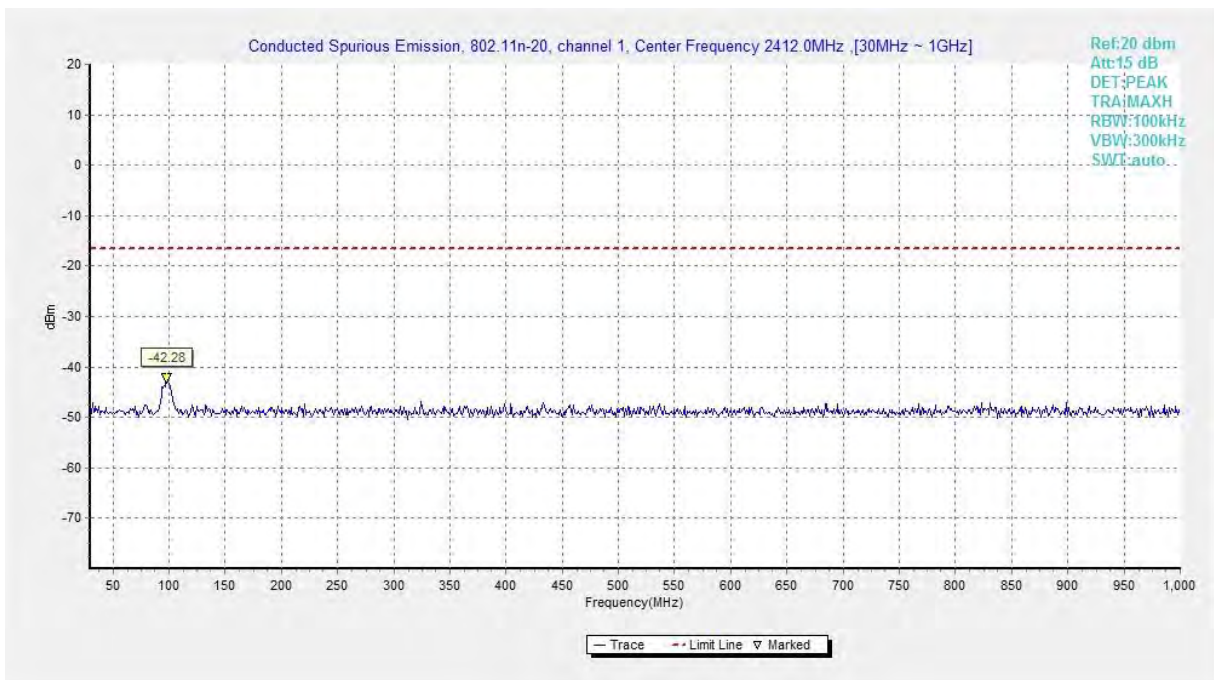


**Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)**

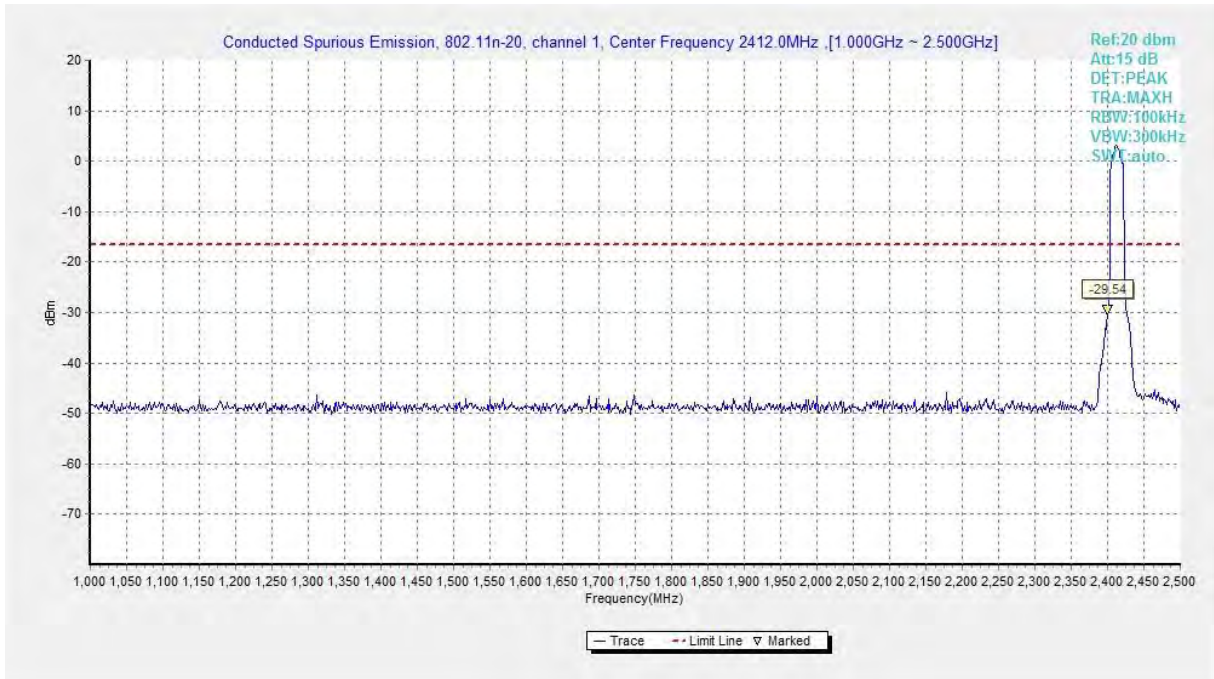


**Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)**

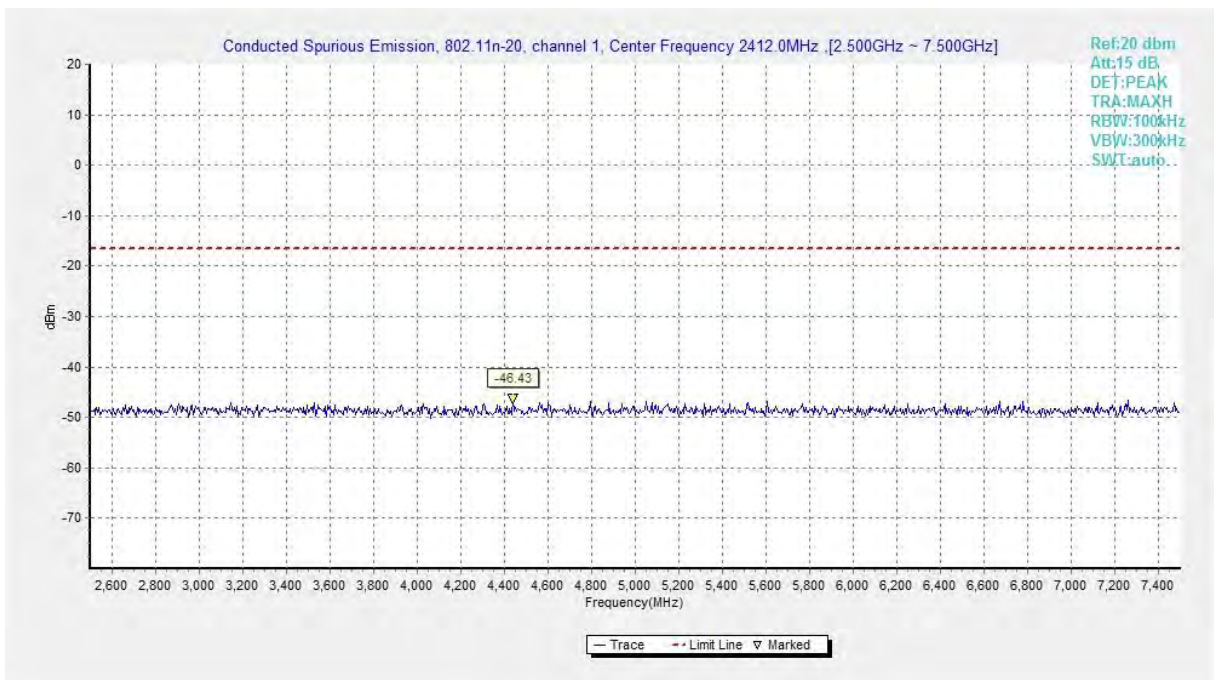

**Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)**

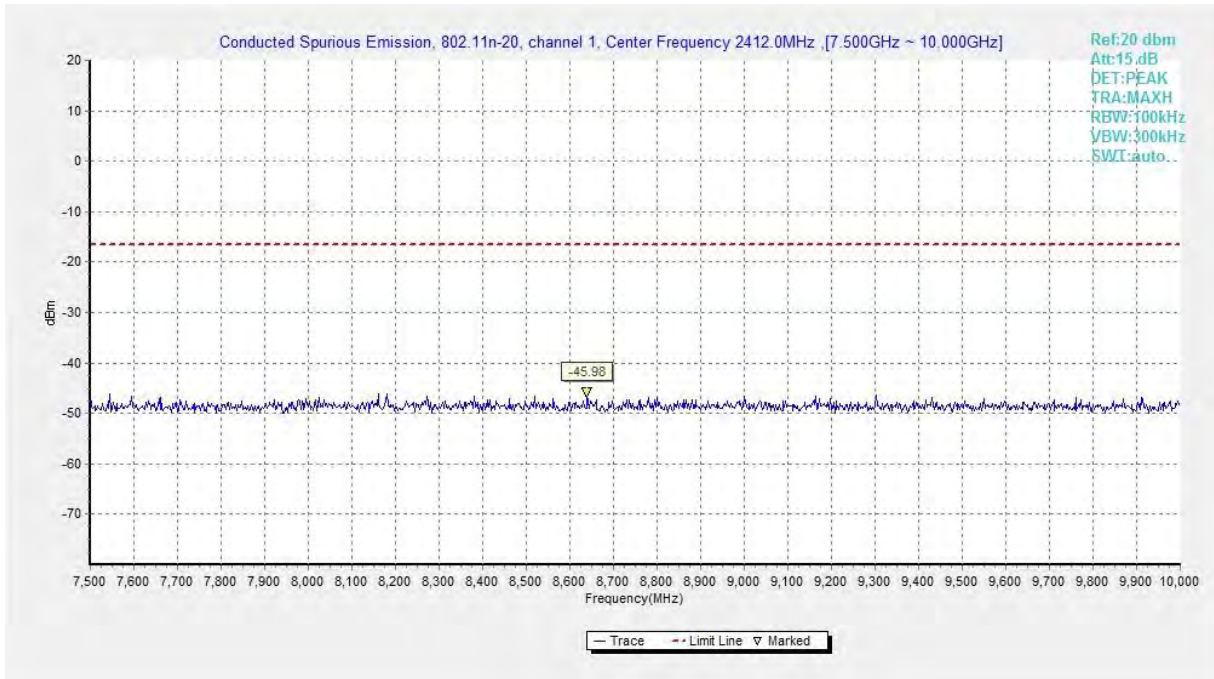


**Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)**

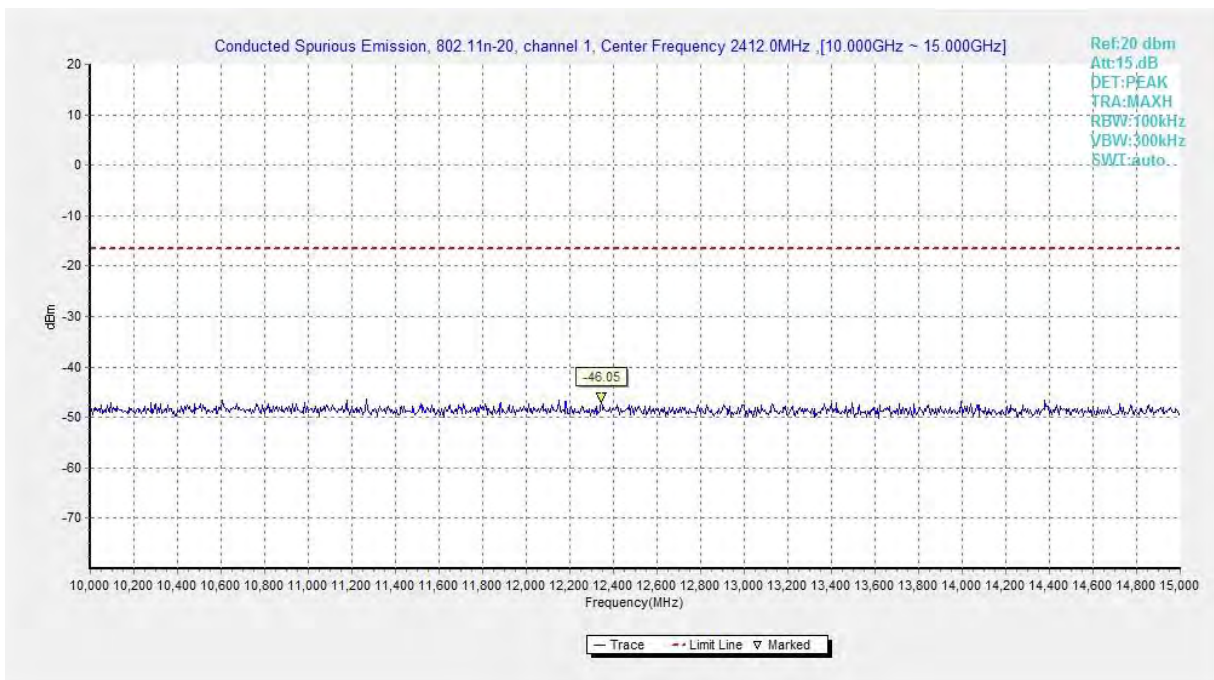


**Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)**




**Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)**

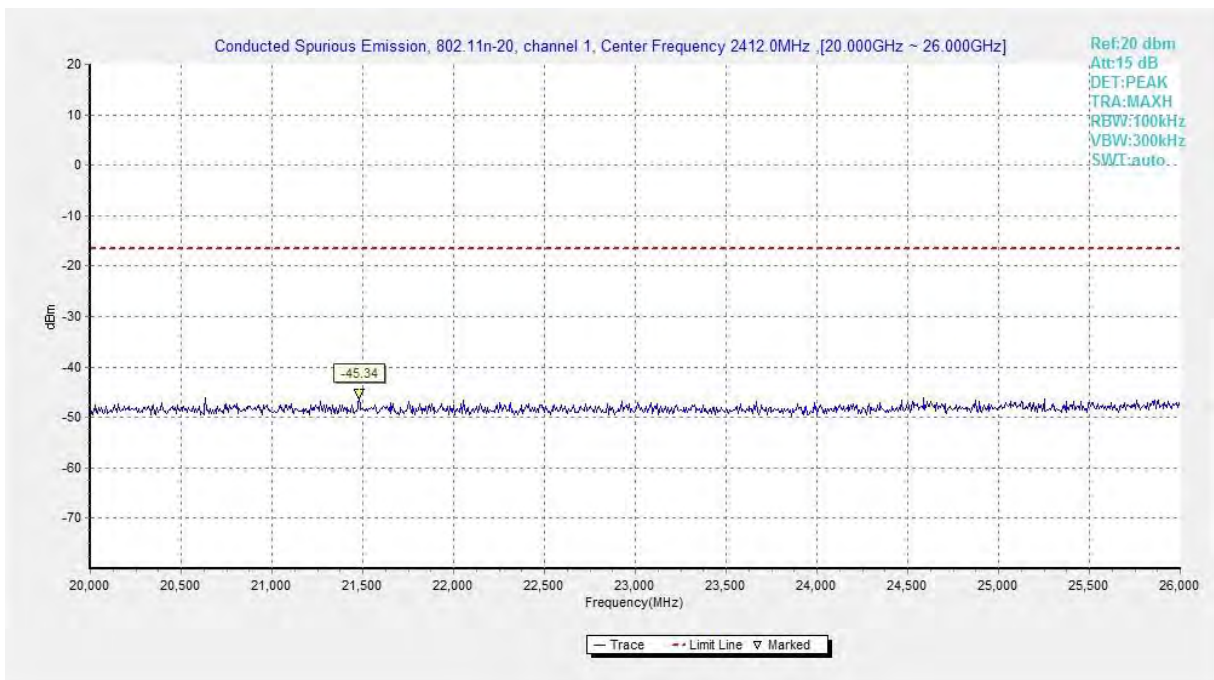


**Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)**

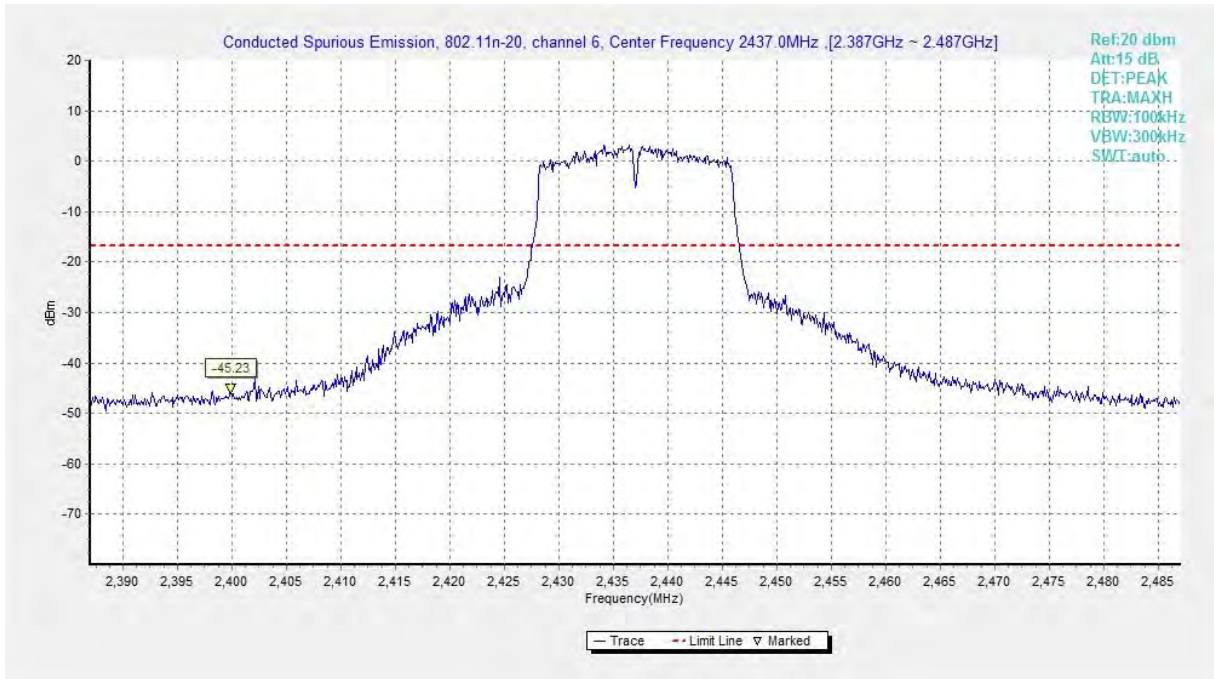


**Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)**

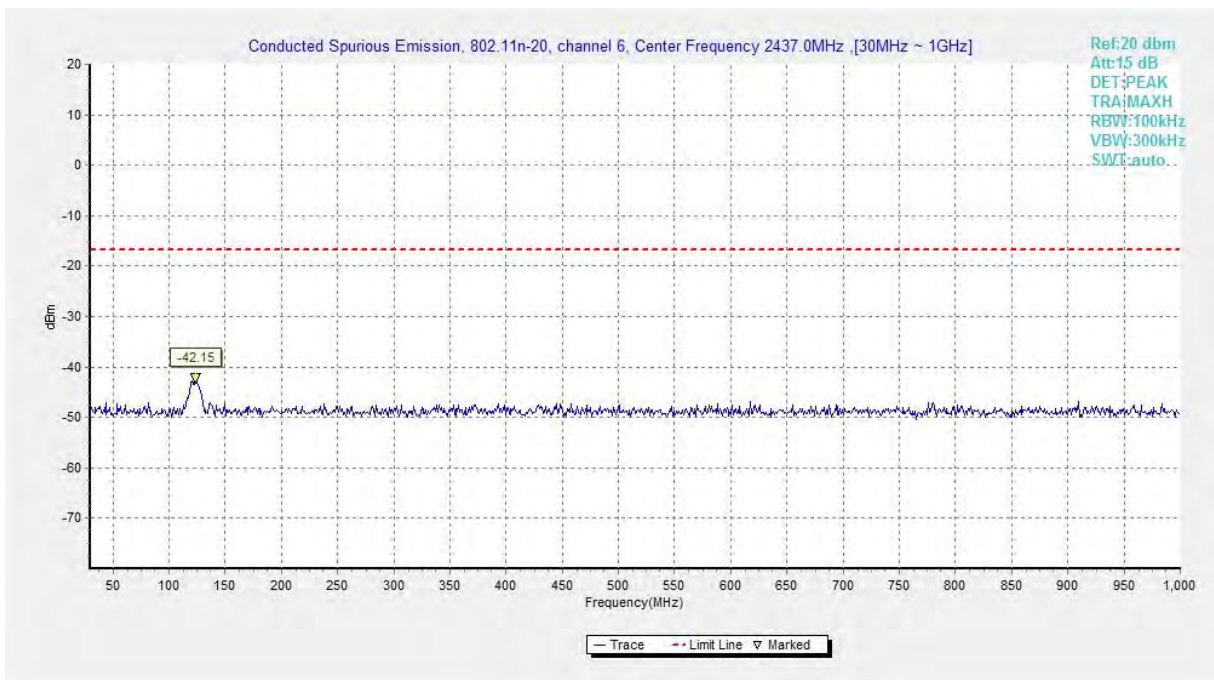

**Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)**

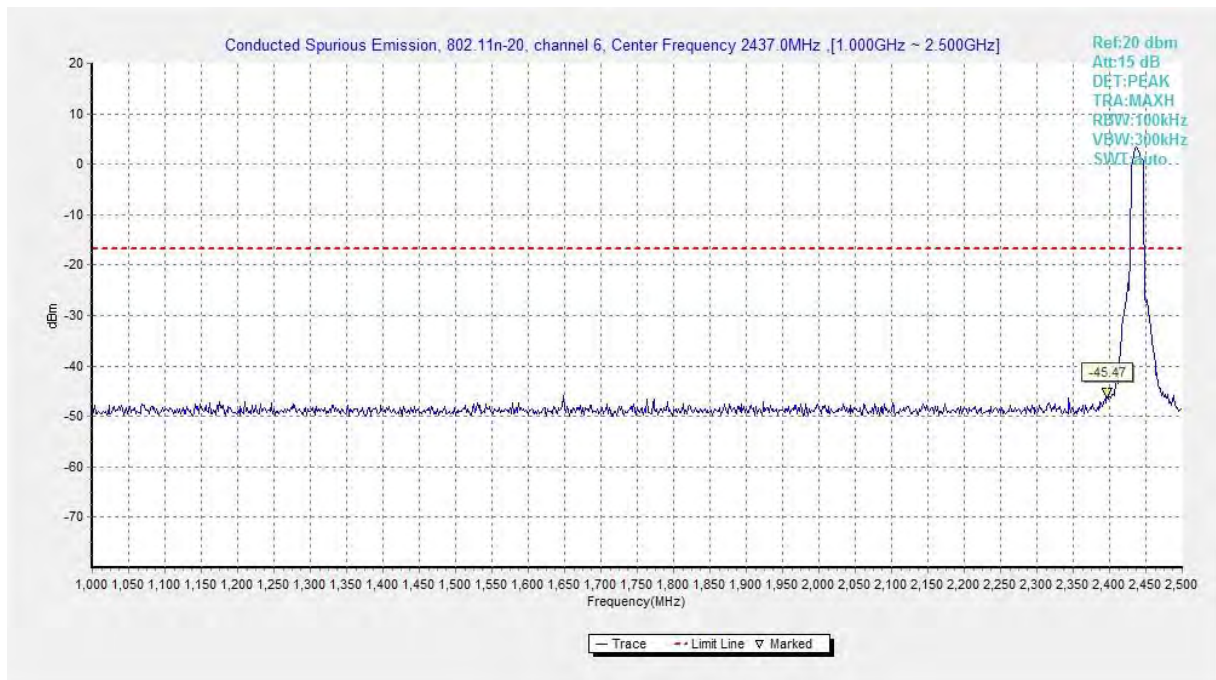


**Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)**

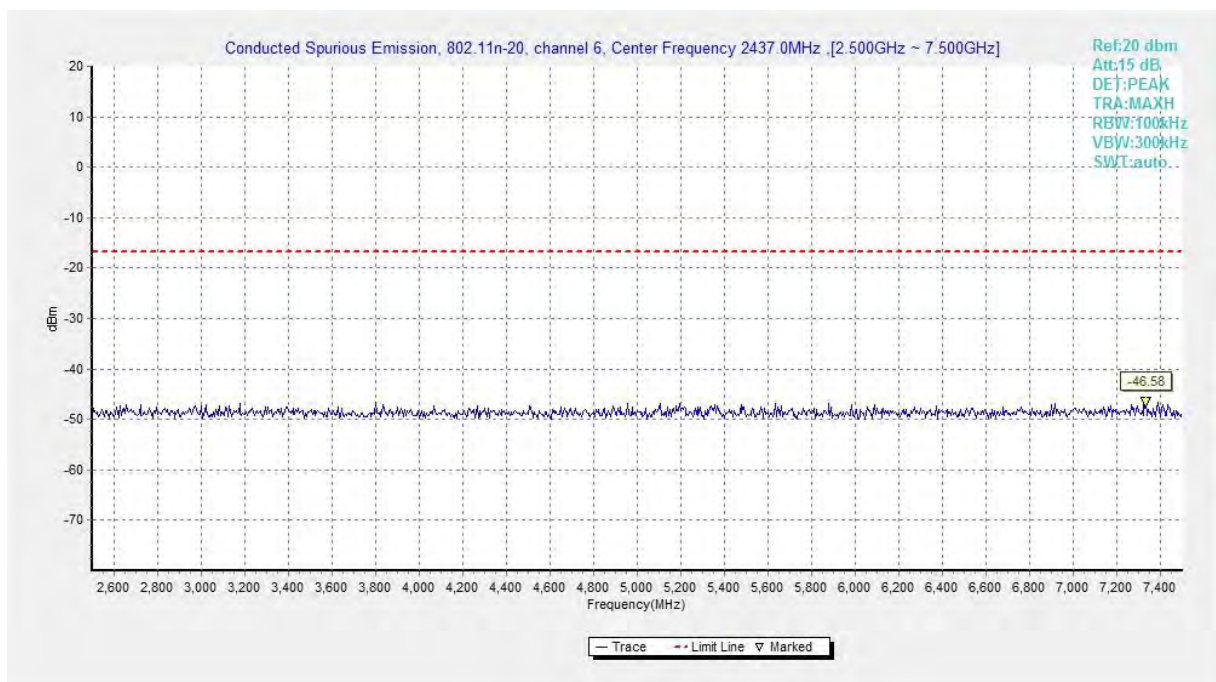


**Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)**




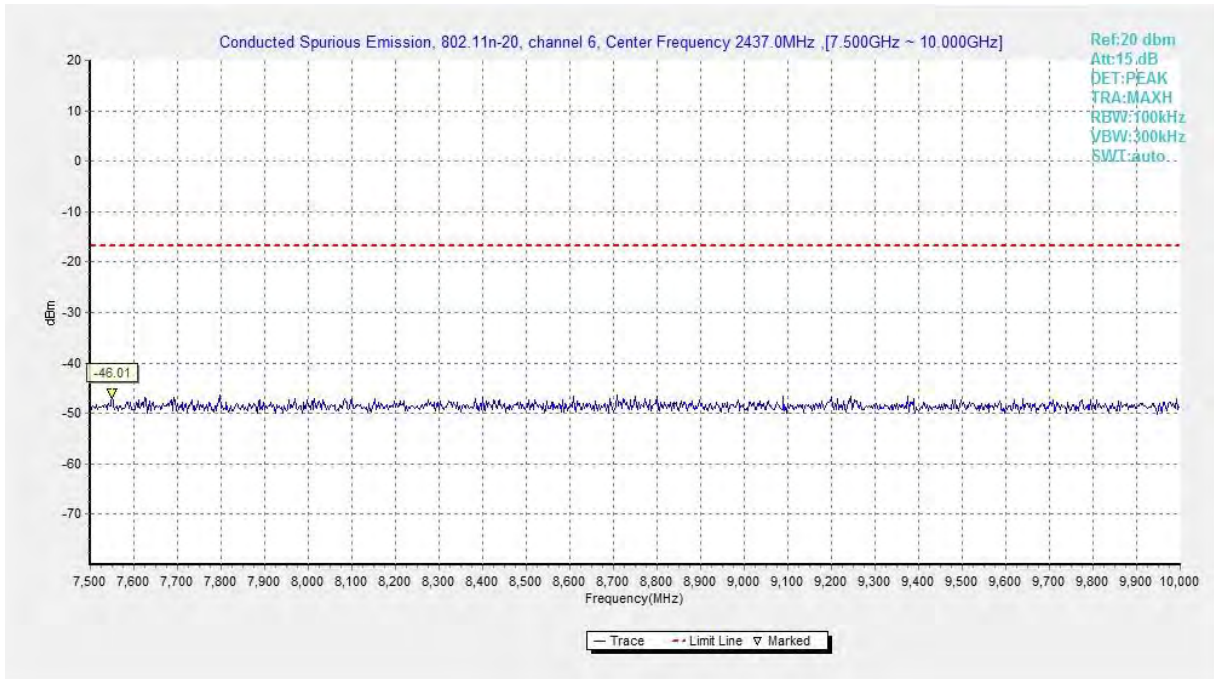


**Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)**

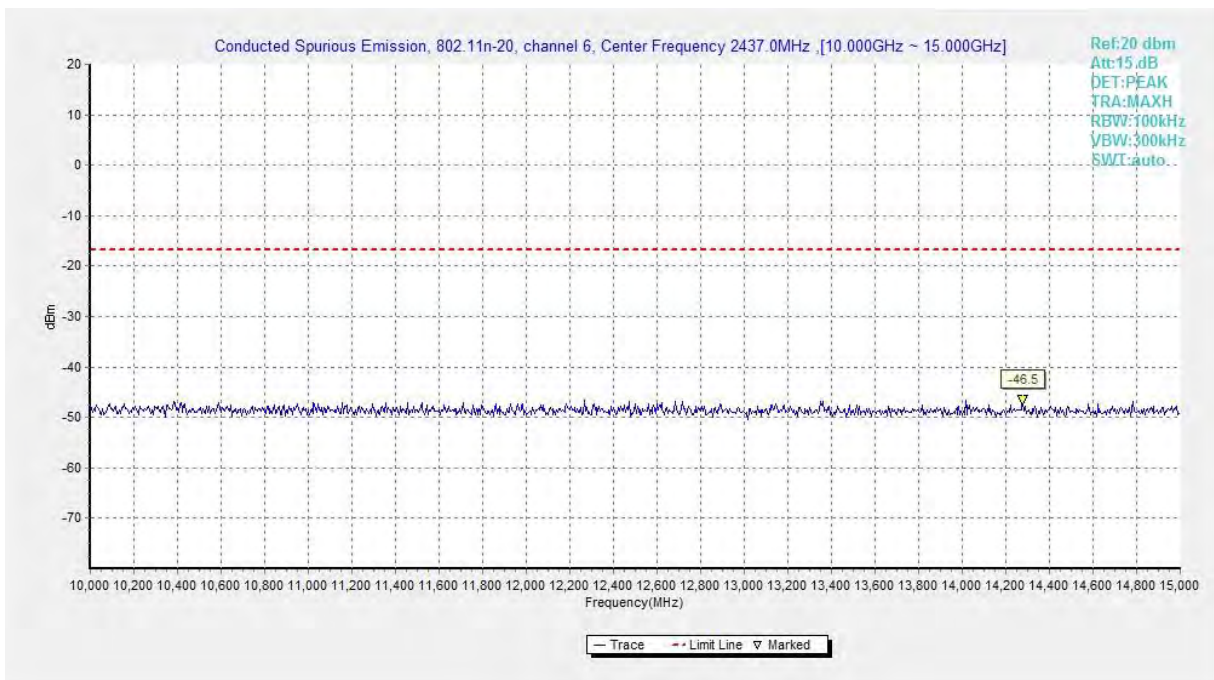


**Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)**

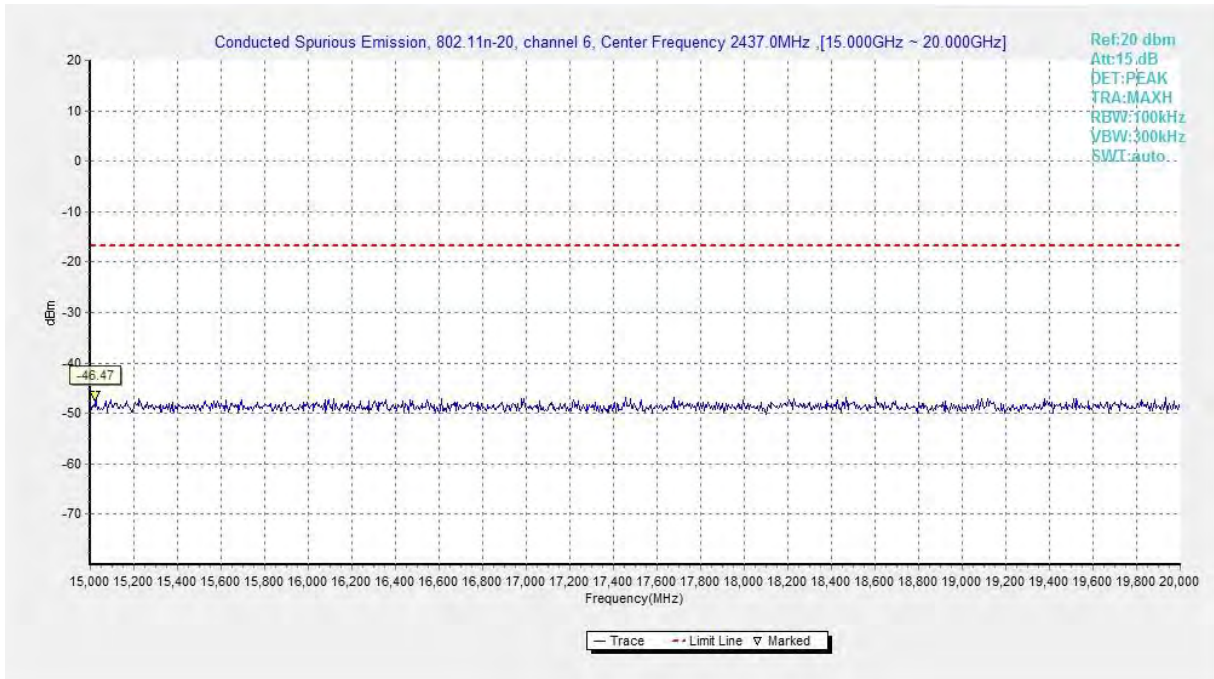


**Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)**

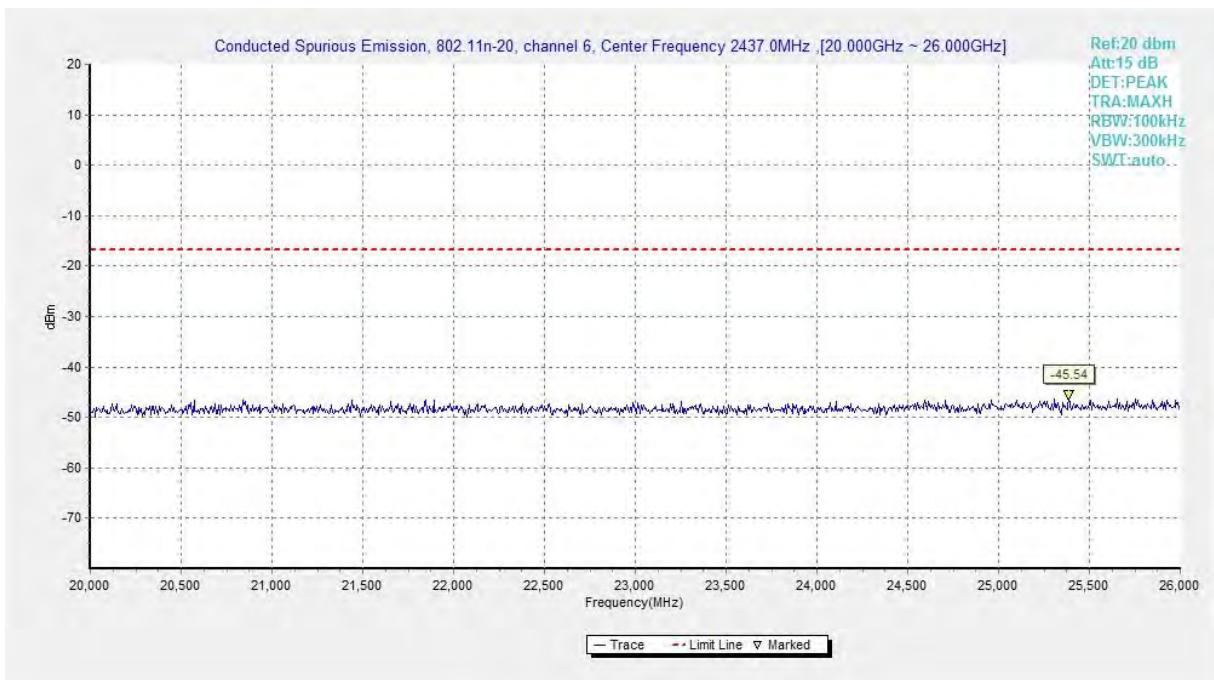


**Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)**

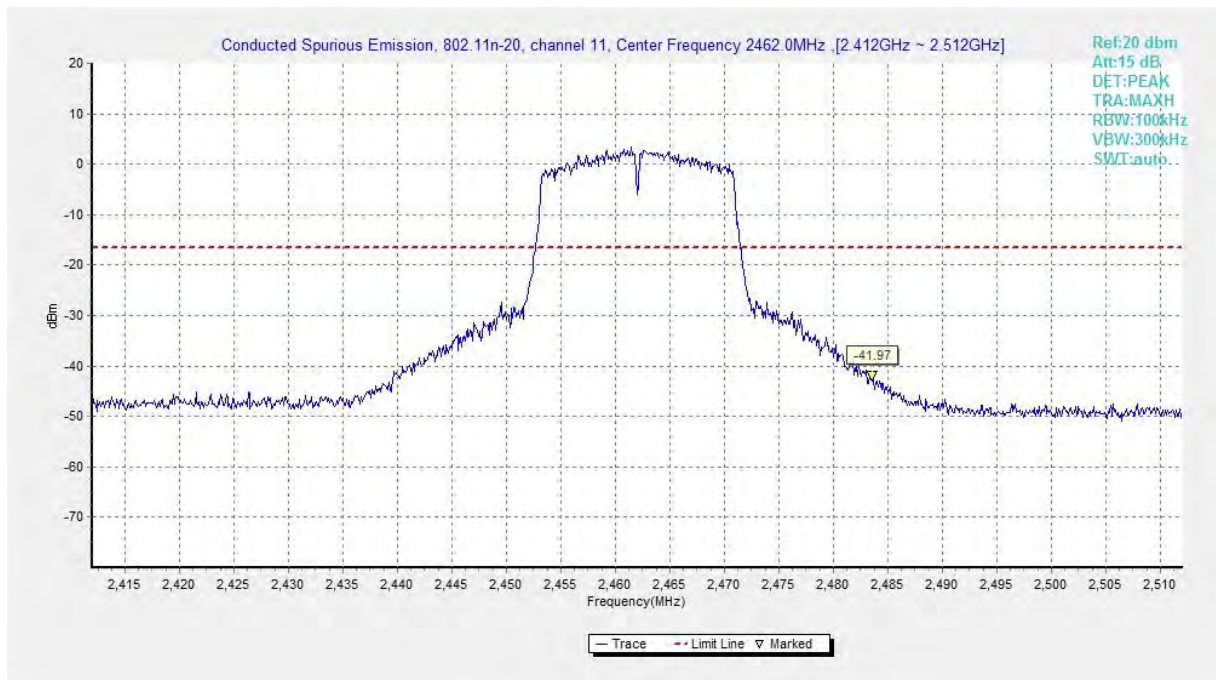


**Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)**

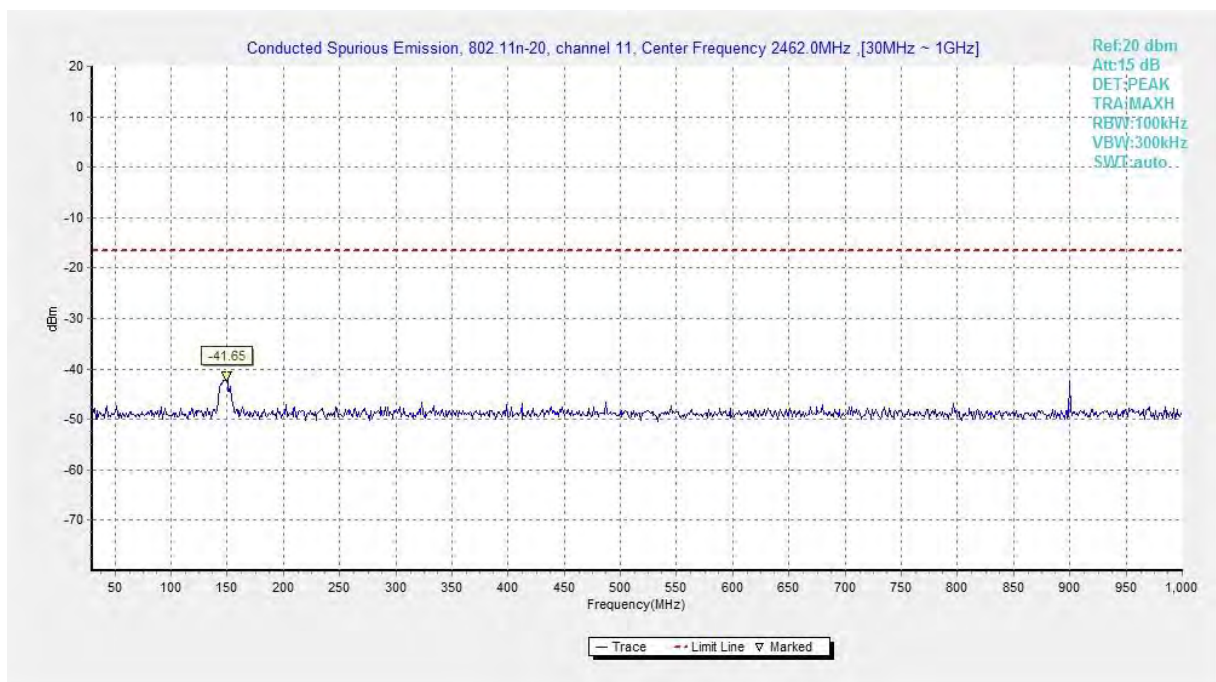


**Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)**

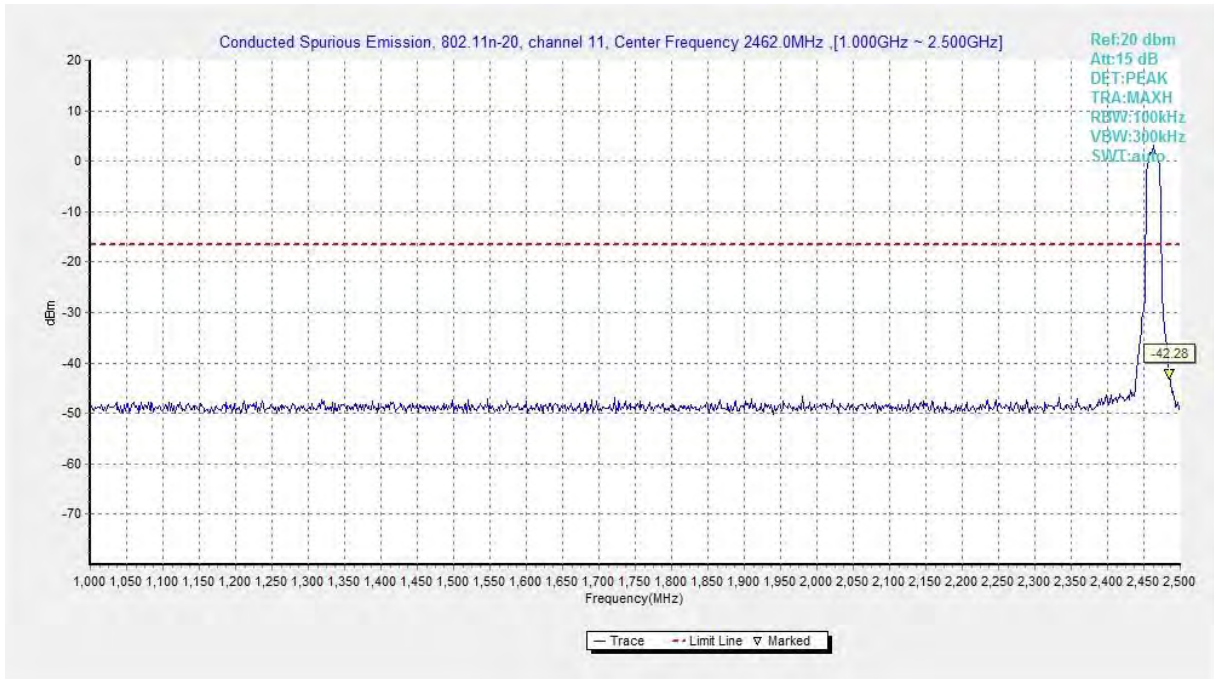


**Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)**

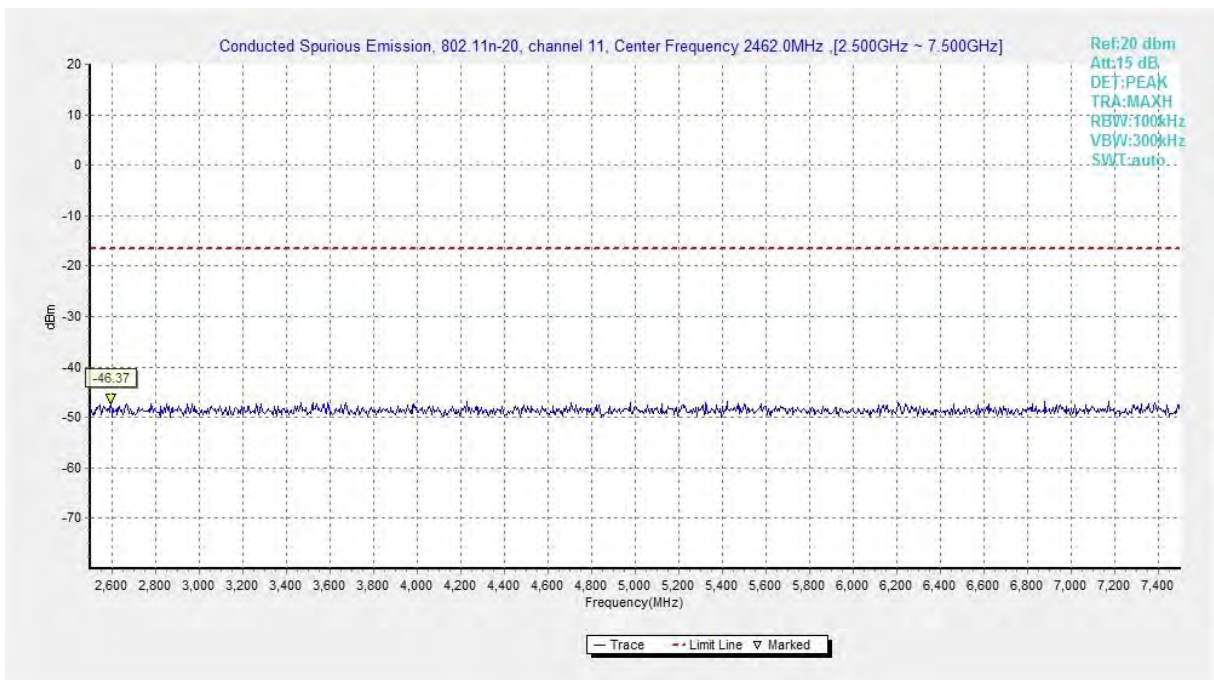


**Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)**

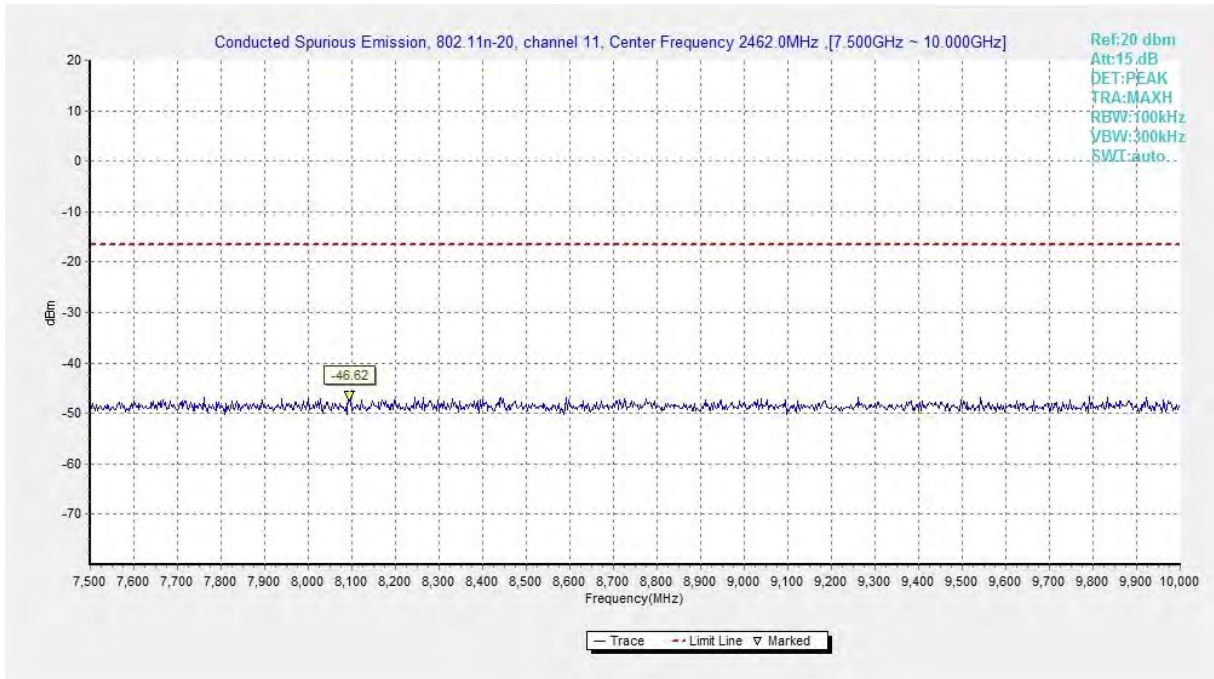


**Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)**

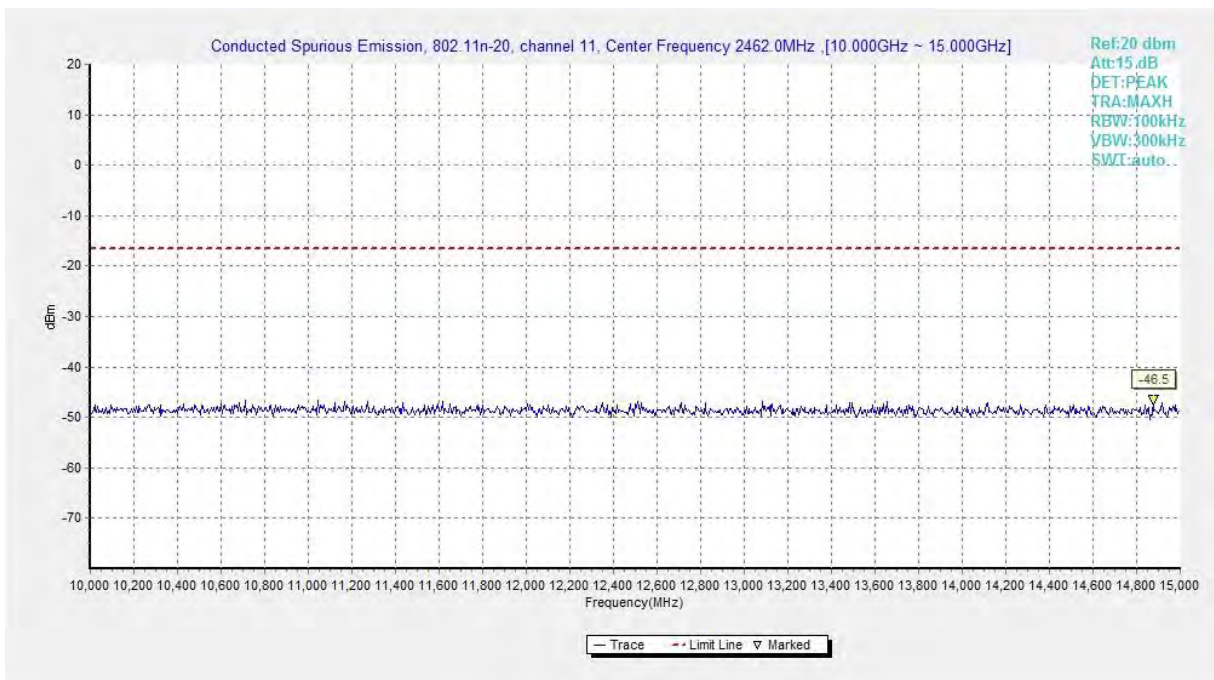

**Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)**

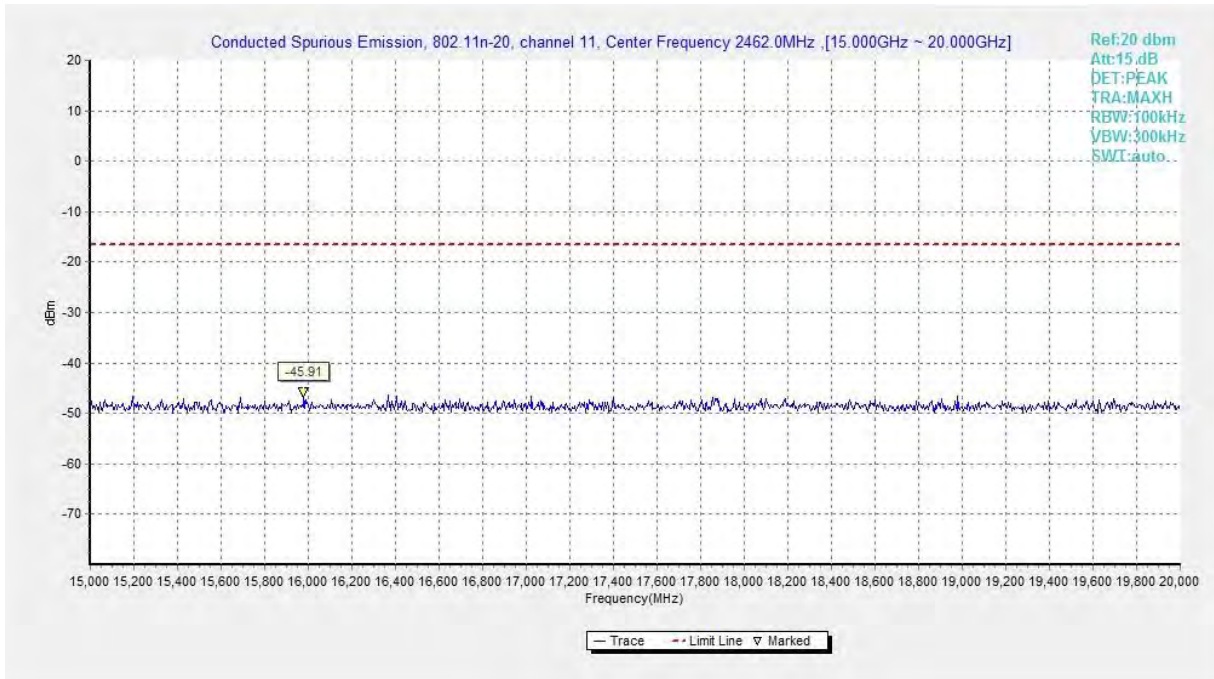

**Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)**

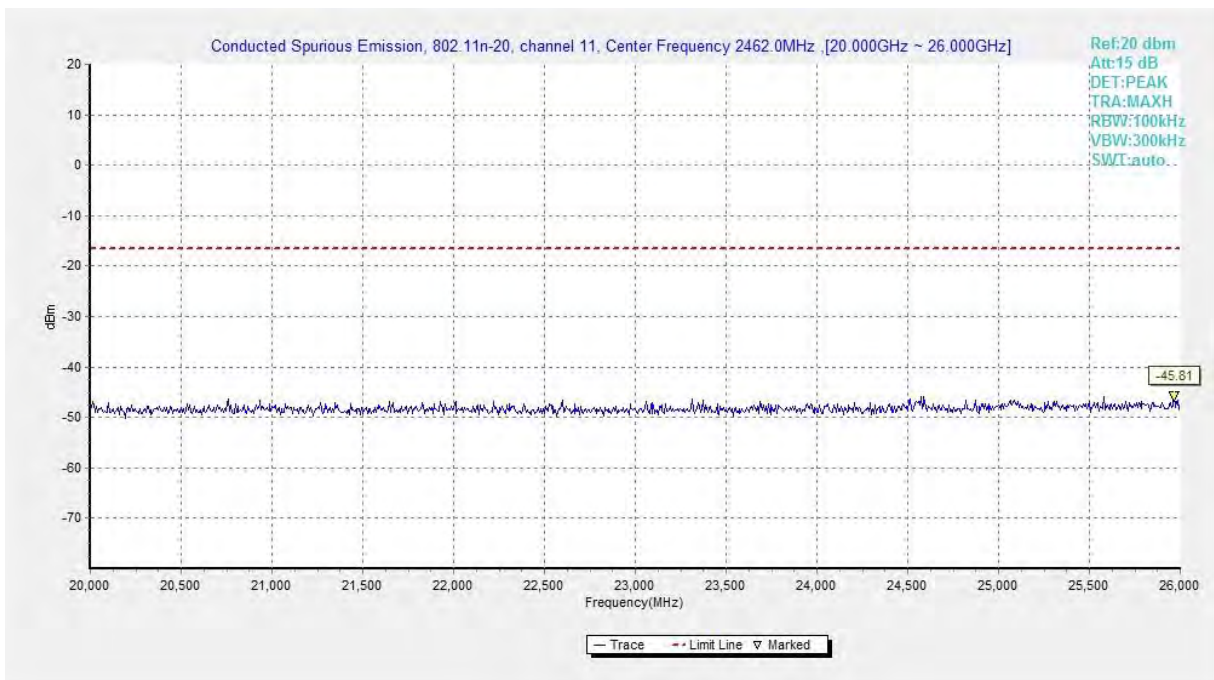

**Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)**

## A.6.2 Transmitter Spurious Emission - Radiated

**Method of Measurement:** See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

### Measurement Limit:

Transmitter Spurious Emission

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

Band Edges

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Limit in restricted band:

Frequency of emission (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Field strength( $\text{dB}\mu\text{V}/\text{m}$ )
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	3
0.490 - 1.705	24000/F(kHz)	3
1.705 – 30.0	30	3

### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW
30-1000	100KHz/300KHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz

**EUT ID: EUT1**

**Measurement Results:**
**Transmitter Spurious Emission**
**802.11b mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1(2412MHz) 6(2437MHz) 11(2462MHz)	9 kHz ~30 MHz	---	P
		30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P

**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1(2412MHz) 6(2437MHz) 11(2462MHz)	9 kHz ~30 MHz	---	P
		30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P

**802.11n HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	1(2412MHz) 6(2437MHz) 11(2462MHz)	9 kHz ~30 MHz	---	P
		30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P

Note: All combinations were tested and only the worst results are shown in this report



## Band Edges

### 802.11b mode

Mode	Channel	Conclusion
802.11b	1	P
	11	P

### 802.11g mode

Mode	Channel	Conclusion
802.11g	1	P
	11	P

### 802.11n HT20 mode

Mode	Channel	Conclusion
802.11n HT20	1	P
	11	P

Note: All combinations were tested and only the worst results are shown in this report.

## Transmitter Spurious Emission Measurement results:

### Note1:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss.

Receiver Reading is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=Receiver Reading+ $A_{Rpl}$ = Receiver Reading+Cable Loss+Antenna Factor

### Note2:

Note: All combinations were tested, and only the worst results are shown in this report.

**Peak**  
**802.11b**

Ch1

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17297.00	52.80	-25.90	44.40	34.40	74	21.20	V
13674.00	50.46	-29.50	40.40	39.56	74	23.54	H
12922.50	47.92	-30.50	39.20	39.22	74	26.08	H
9811.00	46.25	-33.50	38.00	41.75	74	27.75	V
7996.50	44.49	-34.80	37.10	42.19	74	29.51	V
2369.90	55.27	-20.10	28.00	47.27	74	18.73	H

Ch6

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17642.00	52.88	-25.70	46.00	32.68	74	21.12	V
13801.50	50.00	-29.10	40.90	38.20	74	24.00	H
12911.00	48.07	-30.50	39.20	39.37	74	25.93	V
8840.50	45.78	-33.50	38.10	41.18	74	28.22	H
7776.50	44.30	-35.10	37.00	42.40	74	29.70	V
4998.00	39.97	-36.60	33.40	43.17	74	34.03	V

Ch11

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17741.00	52.57	-25.50	46.70	31.37	74	21.43	V
13582.00	49.86	-29.50	40.40	38.96	74	24.14	V
12845.00	47.87	-30.70	39.10	39.37	74	26.13	V
9878.50	45.70	-33.50	38.10	41.10	74	28.30	V
7322.50	44.27	-35.10	36.60	42.77	74	29.73	V
2485.30	55.12	-20.00	28.30	46.82	74	18.88	H

**802.11g**

## Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17514.50	52.98	-26.90	45.20	34.58	74	21.02	V
13584.00	49.93	-29.50	40.40	39.03	74	24.07	V
12448.50	48.01	-31.20	38.90	40.31	74	25.99	H
8631.00	45.52	-34.40	37.90	41.92	74	28.48	V
7225.00	44.34	-35.50	36.40	43.44	74	29.66	H
2390.00	63.53	-20.00	28.10	55.53	74	10.47	H

## Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17849.00	52.53	-25.50	46.70	31.33	74	21.47	V
13647.50	50.28	-29.50	40.40	39.38	74	23.72	H
12982.00	48.25	-30.50	39.20	39.55	74	25.75	H
9874.50	45.53	-33.50	38.10	40.93	74	28.47	V
7420.00	45.03	-35.20	36.70	43.43	74	28.97	H
4750.50	38.78	-37.30	33.00	43.08	74	35.22	H

## Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17729.00	52.66	-25.70	46.00	32.46	74	21.34	H
13584.00	50.61	-29.50	40.40	39.71	74	23.39	H
12460.00	47.94	-31.20	38.90	40.24	74	26.06	H
9138.50	46.06	-33.80	38.10	41.86	74	27.94	V
7321.00	44.40	-35.10	36.60	42.90	74	29.60	H
2485.20	62.84	-20.00	28.30	54.54	74	11.16	H

**802.11n-HT20**

## Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17300.50	52.53	-25.90	44.40	34.13	74	21.47	V
14224.00	50.91	-29.00	42.00	37.91	74	23.09	H
12863.00	48.64	-30.70	39.10	40.14	74	25.36	H
9716.50	46.21	-33.00	38.00	41.21	74	27.79	V
7910.50	44.67	-34.90	37.10	42.47	74	29.33	H
2389.20	63.94	-20.00	28.10	55.94	74	10.06	H

## Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.50	52.85	-25.50	46.70	31.65	74	21.15	H
13640.50	49.74	-29.50	40.40	38.84	74	24.26	H
12938.50	47.57	-30.50	39.20	38.87	74	26.43	H
9154.50	45.87	-33.80	38.10	41.67	74	28.13	H
6822.50	44.58	-35.70	35.70	44.58	74	29.42	V
4946.50	39.57	-37.10	33.30	43.37	74	34.43	H

## Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17802.50	52.58	-25.50	46.70	31.38	74	21.42	V
13806.50	49.86	-29.10	40.90	38.06	74	24.14	H
12908.00	47.82	-30.50	39.20	39.12	74	26.18	H
9235.50	45.96	-33.70	38.00	41.66	74	28.04	H
7218.00	44.12	-35.50	36.40	43.22	74	29.88	V
2485.60	64.70	-20.00	28.30	56.40	74	9.30	H

**Average**
**802.11b**

## Ch1

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17784.00	41.30	-25.50	46.70	20.10	54	12.70	V
13585.00	39.04	-29.50	40.40	28.14	54	14.96	H
12850.00	36.89	-30.70	39.10	28.39	54	17.11	V
9137.50	34.57	-33.80	38.10	30.37	54	19.43	H
7997.50	33.47	-34.80	37.10	31.17	54	20.53	H
2386.90	43.75	-20.00	28.10	35.75	54	10.25	H

## Ch6

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17298.50	41.31	-25.90	44.40	22.91	54	12.69	V
13673.50	38.95	-29.50	40.40	28.05	54	15.05	V
12843.50	36.73	-30.70	39.10	28.23	54	17.27	H
9125.00	34.81	-33.80	38.10	30.61	54	19.19	V
7417.50	33.16	-35.20	36.70	31.56	54	20.84	H
4856.50	27.96	-37.50	33.10	32.26	54	26.04	V

## Ch11

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17886.00	41.06	-25.50	46.70	19.86	54	12.94	V
13661.00	38.87	-29.50	40.40	27.97	54	15.13	V
12861.50	36.87	-30.70	39.10	28.37	54	17.13	H
9128.00	34.20	-33.80	38.10	30.00	54	19.80	V
7998.50	33.64	-34.80	37.10	31.34	54	20.36	V
2485.80	44.91	-20.00	28.30	36.61	54	9.09	H

**802.11g**

## Ch1

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17780.00	41.27	-25.50	46.70	20.07	54	12.73	V
13589.00	39.00	-29.50	40.40	28.10	54	15.00	V
12866.50	36.71	-30.70	39.10	28.21	54	17.29	V
9128.00	34.58	-33.80	38.10	30.38	54	19.42	V
7989.00	33.42	-34.80	37.10	31.12	54	20.58	H
2389.80	47.32	-20.00	28.10	39.32	54	6.68	H

## Ch6

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17986.00	41.31	-25.50	46.70	20.11	54	12.69	V
13589.00	39.15	-29.50	40.40	28.25	54	14.85	H
12934.00	36.91	-30.50	39.20	28.21	54	17.09	H
9124.50	34.39	-33.80	38.10	30.19	54	19.61	V
7223.50	33.65	-35.50	36.40	32.75	54	20.35	V
4778.50	28.07	-37.30	33.00	32.27	54	25.93	H

## Ch11

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17788.00	41.43	-25.50	46.70	20.23	54	12.57	V
13578.50	39.02	-29.50	40.40	28.12	54	14.98	V
12842.00	36.89	-30.70	39.10	28.39	54	17.11	H
8649.00	34.29	-34.40	37.90	30.69	54	19.71	H
7998.50	33.11	-34.80	37.10	30.81	54	20.89	V
2485.00	47.57	-20.00	28.30	39.27	54	6.43	H

**802.11n-HT20**

## Ch1

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17726.50	41.70	-25.70	46.00	21.50	54	12.30	H
13741.00	38.65	-29.10	40.90	26.85	54	15.35	H
12839.00	36.61	-30.70	39.10	28.11	54	17.39	H
8720.00	34.26	-34.40	38.00	30.66	54	19.74	H
7220.50	32.99	-35.50	36.40	32.09	54	21.01	V
2390.00	48.03	-20.00	28.10	40.03	54	5.97	H

## Ch6

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17800.00	41.30	-25.50	46.70	20.10	54	12.70	V
13586.50	38.74	-29.50	40.40	27.84	54	15.26	V
12848.50	36.85	-30.70	39.10	28.35	54	17.15	H
9124.00	34.48	-33.80	38.10	30.28	54	19.52	H
7419.00	33.50	-35.20	36.70	31.90	54	20.50	H
4929.50	28.01	-37.10	33.30	31.81	54	25.99	H

## Ch11

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17766.50	41.35	-25.50	46.70	20.15	54	12.65	H
13645.00	38.97	-29.50	40.40	28.07	54	15.03	V
12842.00	36.97	-30.70	39.10	28.47	54	17.03	H
9134.50	34.26	-33.80	38.10	30.06	54	19.74	H
7217.00	33.09	-35.50	36.40	32.19	54	20.91	H
2485.00	48.55	-20.00	28.30	40.25	54	5.45	H

**Conclusion: Pass**

No emissions were found within 20dB of the limit below 1GHz.

Note: the spurious emission above 18G is base noise only.

**Band Edges Measurement results:****802.11b mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.6.2.1	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	<b>P</b>

**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.6.2.3	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	<b>P</b>


**802.11n-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	1	2.31GHz~2.43GHz---L	Fig.A.6.2.5	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.6	<b>P</b>


**Conclusion: Pass**




Test graphs as below:

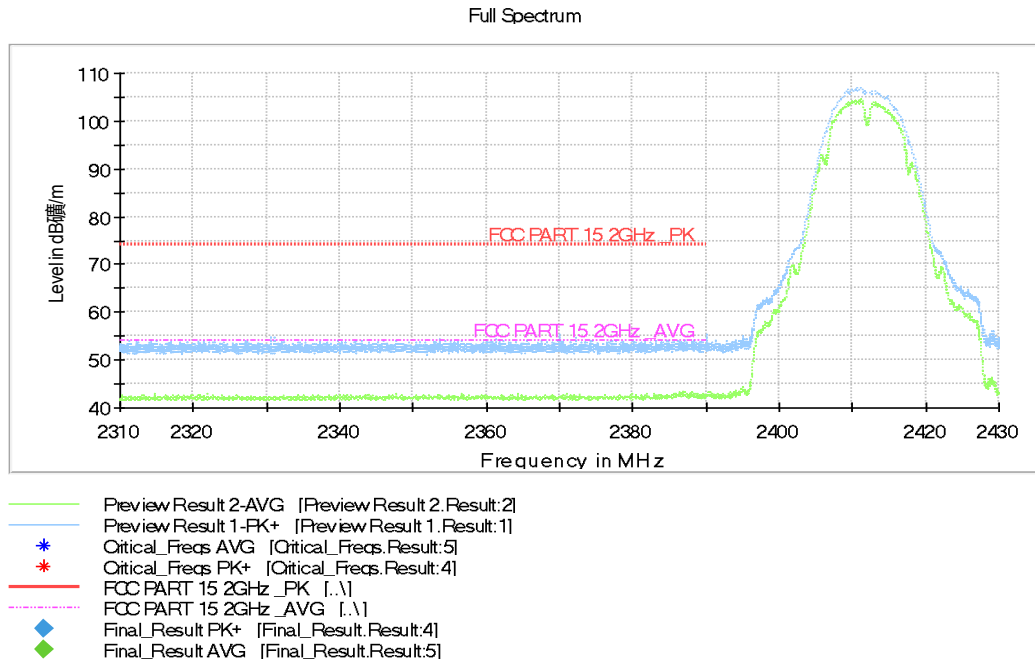


**Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz**

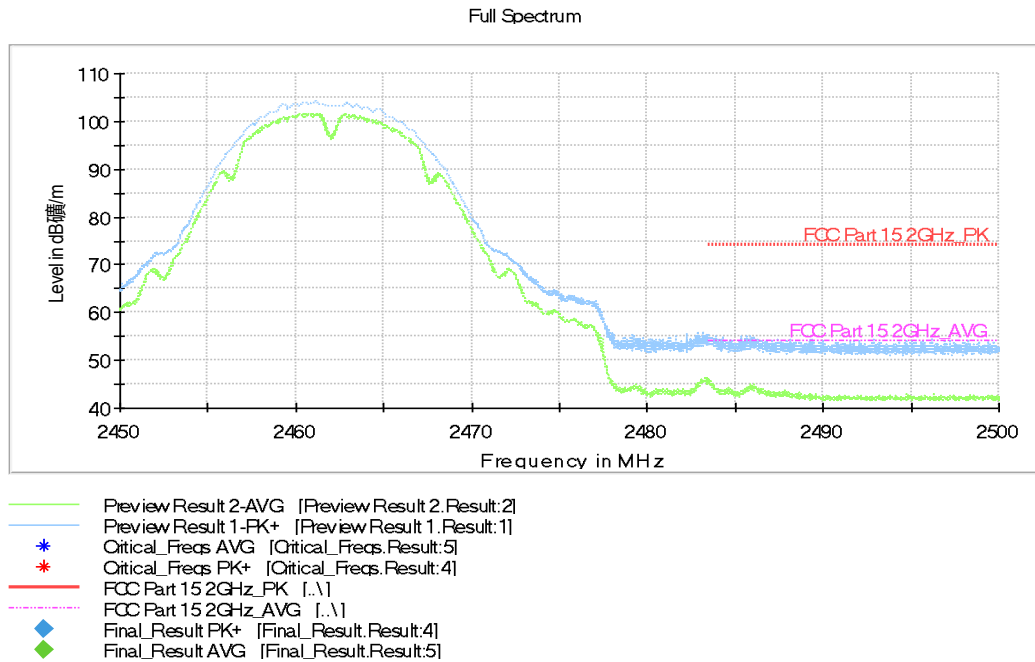


**Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**

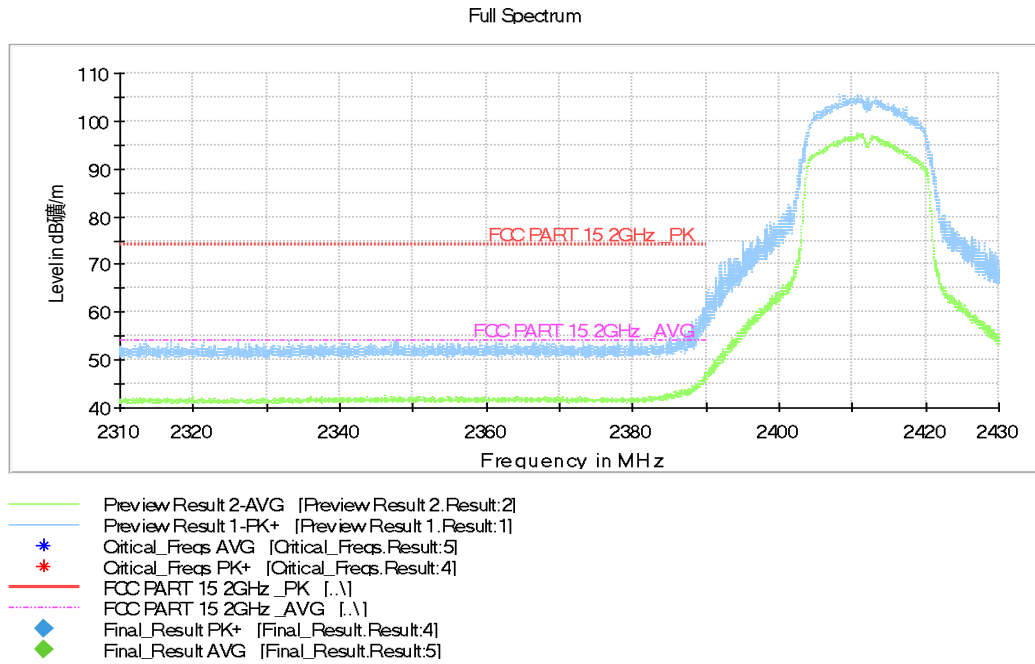


**Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz**

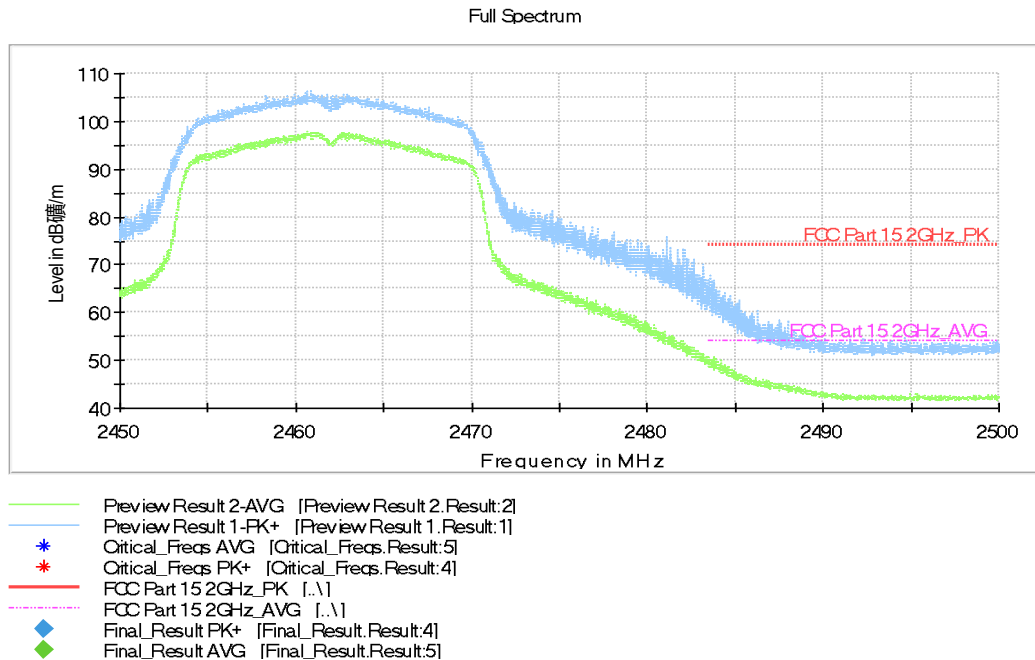

**Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

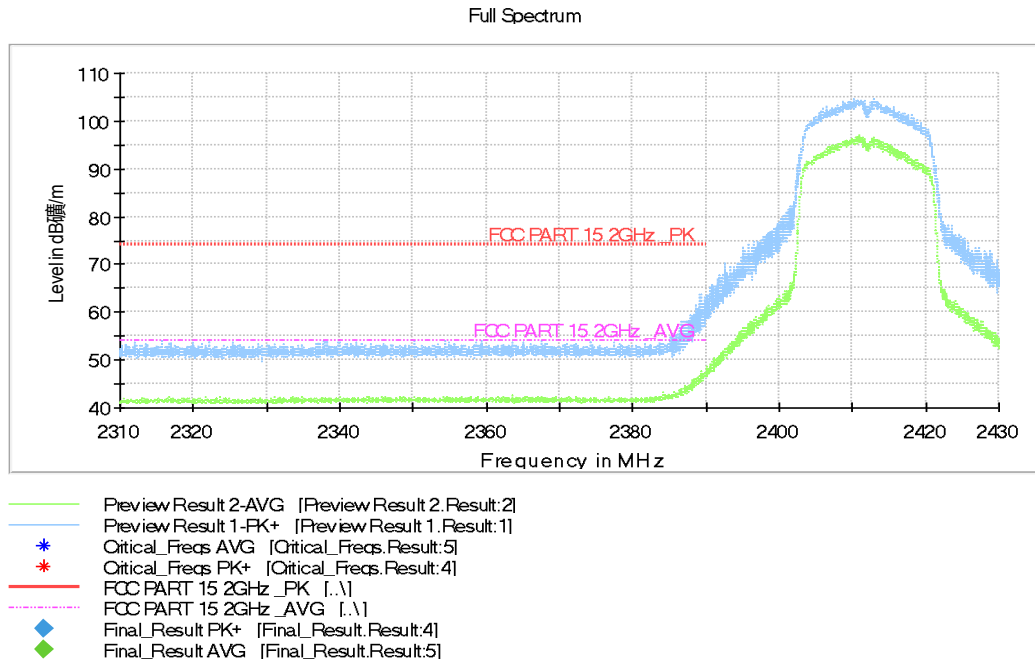

**Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz**

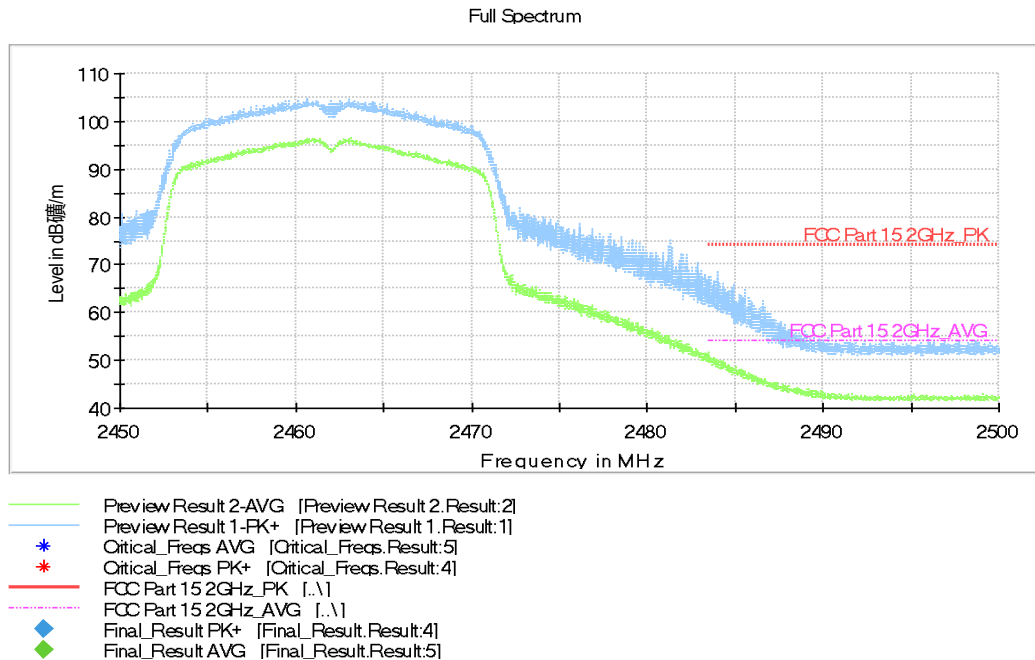

**Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz**

## **A.7. AC Power-line Conducted Emission**

### **Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### **Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

Measurement Result = Receiver Reading + Voltage deviation factor + Cable loss

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+AE1+AE2+AE3	EUT1+Charger1

Note: All combinations were tested, and only the worst results are shown in this report.

**WLAN (Quasi-peak Limit)**

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Set.1		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**WLAN (Average Limit)**

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Set.1		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


**Conclusion: Pass**

Note: The measurement results showed here are worst cases.

**Test graphs as below:**

**Measurement results for Set.1:**

**Result for Traffic:**

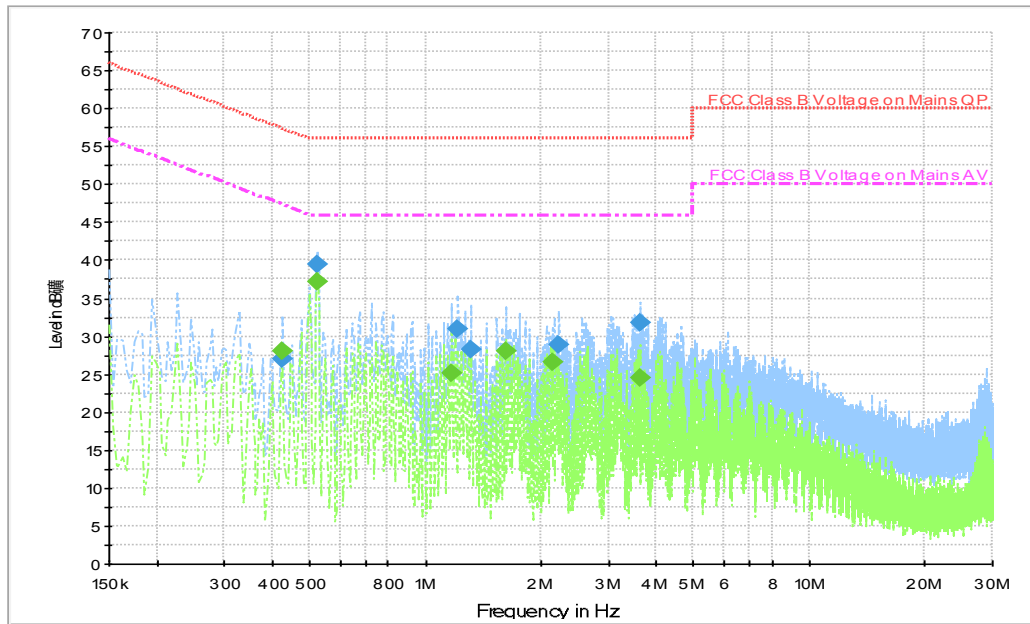

**Fig.A.7.1 AC Powerline Conducted Emission-802.11b**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line

**Final Result 1/QP**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.426000	26.9	5000.0	9.000	On	N	19.9	30.4	57.3
0.522000	39.4	5000.0	9.000	On	L1	19.9	16.6	56.0
1.218000	31.0	5000.0	9.000	On	N	19.8	25.0	56.0
1.318000	28.3	5000.0	9.000	On	N	19.8	27.7	56.0
2.234000	28.9	5000.0	9.000	On	N	19.7	27.1	56.0
3.626000	31.8	5000.0	9.000	On	N	19.7	24.2	56.0


**Final Result 2/AV**

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422000	28.0	5000.0	9.000	On	L1	19.9	19.5	47.4
0.522000	37.1	5000.0	9.000	On	L1	19.9	8.9	46.0
1.170000	25.1	5000.0	9.000	On	N	19.8	20.9	46.0
1.614000	28.1	5000.0	9.000	On	L1	19.5	17.9	46.0
2.138000	26.7	5000.0	9.000	On	L1	19.5	19.3	46.0
3.626000	24.5	5000.0	9.000	On	N	19.7	21.5	46.0

Note2: The measurement results showed here are worst cases.

**Measurement results for Set.1:**

**Result for Idle:**

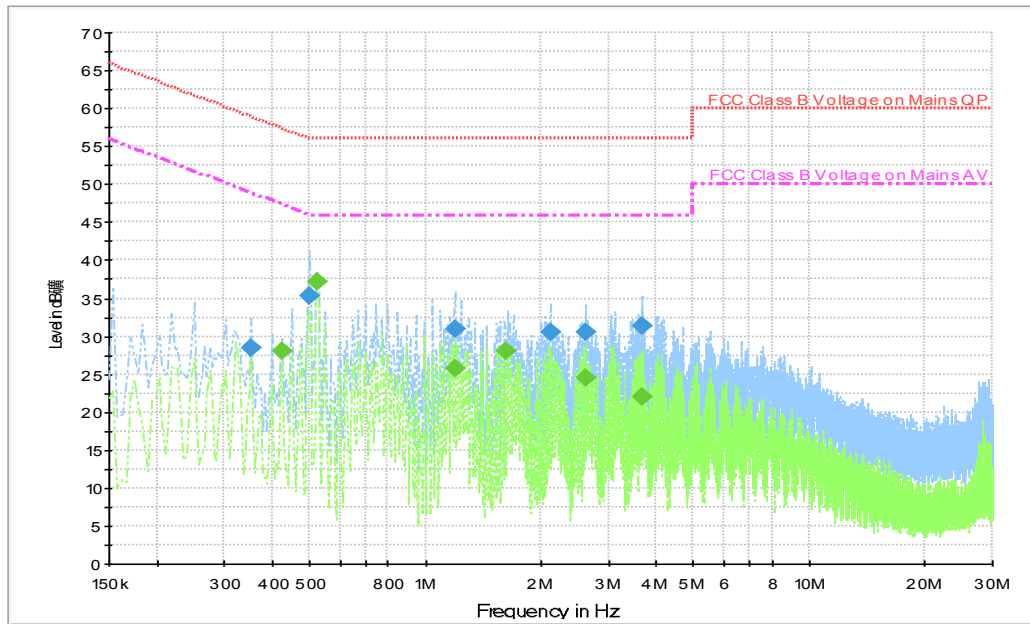

**Fig.A.7.2 AC Powerline Conducted Emission-Idle**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line

**Final Result 1/QP**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.350000	28.5	5000.0	9.000	On	N	19.9	30.4	59.0
0.498000	35.3	5000.0	9.000	On	N	20.0	20.7	56.0
1.194000	31.0	5000.0	9.000	On	N	19.8	25.0	56.0
2.110000	30.6	5000.0	9.000	On	N	19.8	25.4	56.0
2.606000	30.6	5000.0	9.000	On	N	19.7	25.4	56.0
3.650000	31.4	5000.0	9.000	On	N	19.7	24.6	56.0

**Final Result 2/AV**

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422000	28.0	5000.0	9.000	On	L1	19.9	19.4	47.4
0.522000	37.2	5000.0	9.000	On	L1	19.9	8.8	46.0
1.194000	25.7	5000.0	9.000	On	N	19.8	20.3	46.0
1.614000	28.0	5000.0	9.000	On	L1	19.5	18.0	46.0
2.606000	24.6	5000.0	9.000	On	N	19.7	21.4	46.0
3.678000	22.0	5000.0	9.000	On	N	19.7	24.0	46.0

Note2: The measurement results showed here are worst cases.

## ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX C: Accreditation Certificate



\*\*\*END OF REPORT\*\*\*