



FCC PART 15.247
TEST REPORT

For

PreSonus Audio Electronics, Inc.

18011 Grand Bay Court Baton Rouge, LA 70809

FCC ID: 2ACCU-SLAR0516

Report Type: Original Report	Product Type: Mixer
Test Engineer: <u>Costa Dong</u>	<i>Costa Dong</i>
Report Number: <u>RDG160225001-00</u>	
Report Date: <u>2016-05-12</u>	
Reviewed By: <u>Ivan Cao EMC Vice Manager</u>	<i>Ivan Cao</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
MEASUREMENT UNCERTAINTY.....	20
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST RESULTS SUMMARY	22
TEST DATA	22
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....32
 APPLICABLE STANDARD32
 TEST PROCEDURE32
 TEST EQUIPMENT LIST AND DETAILS.....32
 TEST DATA32

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST38
 APPLICABLE STANDARD38
 TEST PROCEDURE38
 TEST EQUIPMENT LIST AND DETAILS.....38
 TEST DATA38

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....42
 APPLICABLE STANDARD42
 TEST PROCEDURE42
 TEST EQUIPMENT LIST AND DETAILS.....42
 TEST DATA42

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT58
 APPLICABLE STANDARD58
 TEST PROCEDURE58
 TEST EQUIPMENT LIST AND DETAILS.....58
 TEST DATA58

FCC §15.247(d) - BAND EDGES TESTING64
 APPLICABLE STANDARD64
 TEST PROCEDURE64
 TEST EQUIPMENT LIST AND DETAILS.....64
 TEST DATA65

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *PreSonus Audio Electronics, Inc.*'s product, model number: *StudioLive AR16 USB and StudioLive AR12 USB, StudioLive AR8 USB (FCC ID: 2ACCU-SLAR0516)* (the "EUT") in this report was a *Mixer*, which was measured approximately:

No.	Description	Serial Number	Length (mm)	Width (mm)	High (mm)
1	StudioLive AR16 USB	160225001-1	397	480	106
2	StudioLive AR12 USB	160225001-2	397	380	106
3	StudioLive AR8 USB	160225001-3	312.8	283.8	106

rated input voltage: AC 100~240V .

Note: The series product, model StudioLive AR16 USB and StudioLive AR12 USB, StudioLive AR8 USB are electrically identical, the difference details between them was explained in the declaration letter, we selected sample serial number: 160225001-1 for fully testing, and other model for AC Line conducted emission and radiation emission testing

Objective

This report is prepared on behalf of *PreSonus Audio Electronics, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software 'ISRT_Ver2.1.26.4422' was used during testing, the system configured maximum output power as default setting. The software is only for changing channel and modes.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

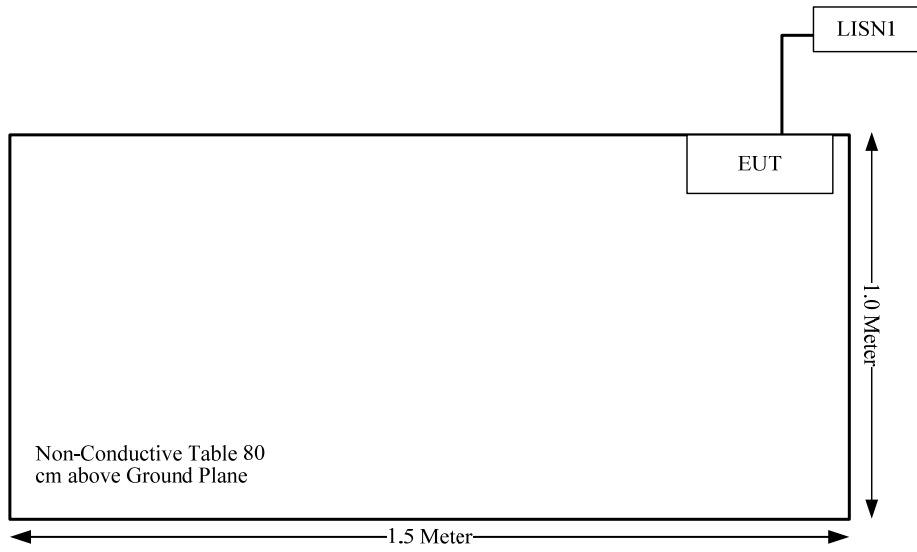

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The tune-up power is 6.0dBm (3.98 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 3.98/5 \cdot (\sqrt{2.480}) = 1.3 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for buletooth and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

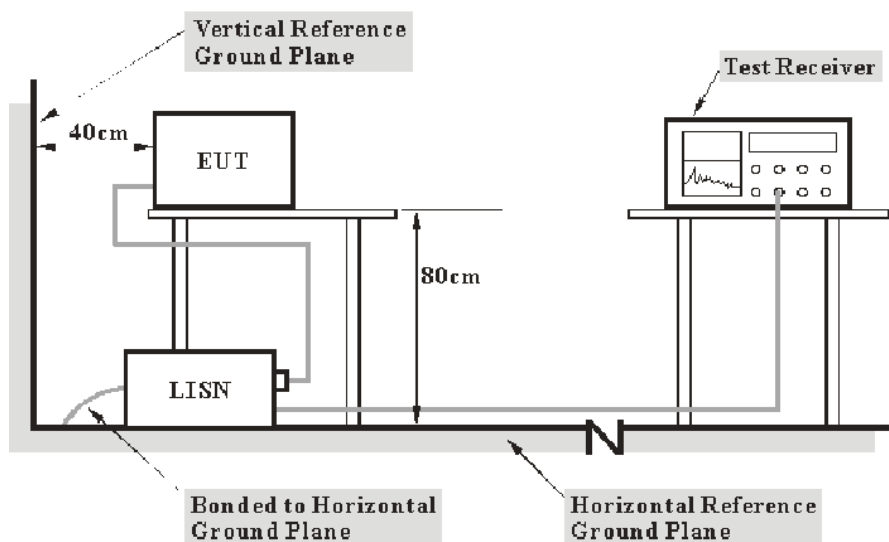

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

11.6 dB at 0.156097 MHz in the Line conducted mode

Test Data

Environmental Conditions


Temperature:	22.9°C
Relative Humidity:	35 %
ATM Pressure:	101.9 kPa

The testing was performed by Costa Dong on 2016-03-02.

Test Mode: Transmitting

Model: StudioLive AR16 USB


AC120 V, 60 Hz, Line:

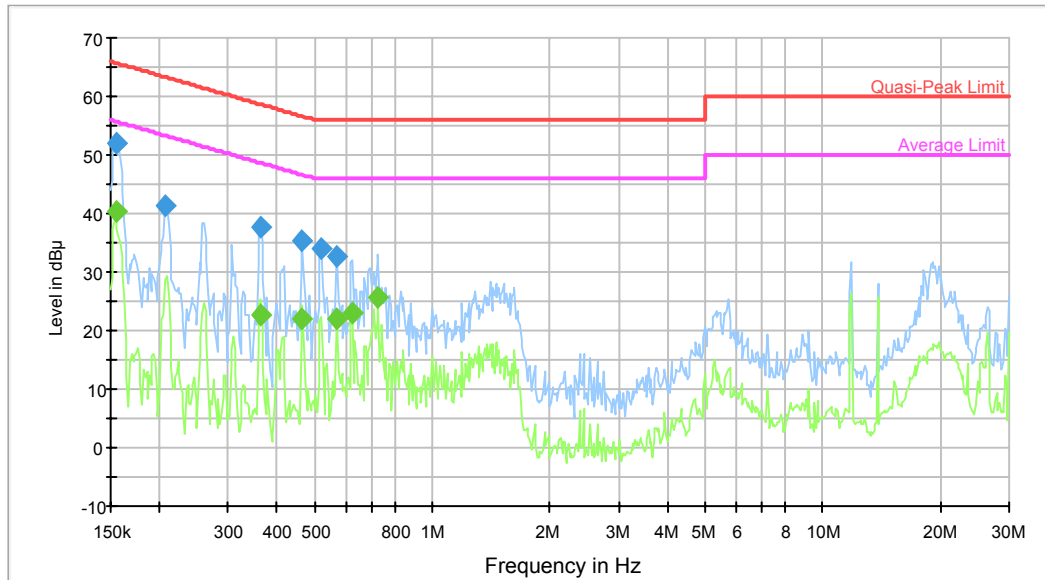

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.156097	52.0	9.000	L1	9.7	13.7	65.7	Compliance
0.207957	41.3	9.000	L1	9.7	22.0	63.3	Compliance
0.363254	37.7	9.000	L1	9.7	21.0	58.7	Compliance
0.465037	35.5	9.000	L1	9.8	21.1	56.6	Compliance
0.519918	33.9	9.000	L1	9.8	22.1	56.0	Compliance
0.572086	32.8	9.000	L1	9.8	23.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154858	40.4	9.000	L1	9.8	15.3	55.7	Compliance
0.363254	22.6	9.000	L1	9.7	26.1	48.7	Compliance
0.465037	22.1	9.000	L1	9.8	24.5	46.6	Compliance
0.572086	21.9	9.000	L1	9.8	24.1	46.0	Compliance
0.624492	23.1	9.000	L1	9.8	22.9	46.0	Compliance
0.726569	25.7	9.000	L1	9.8	20.3	46.0	Compliance

AC120 V, 60 Hz, Neutral:

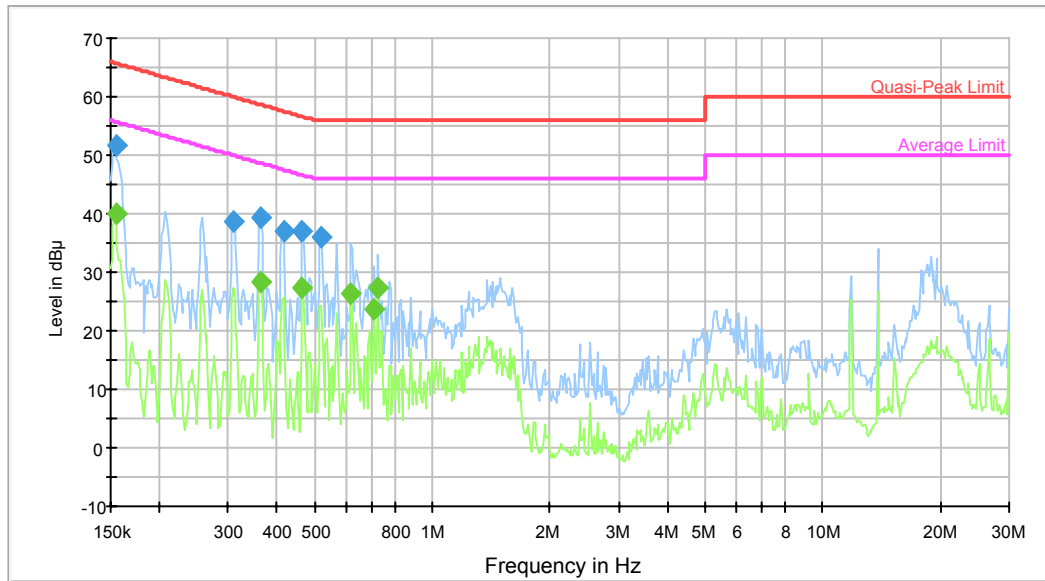


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	51.7	9.000	N	9.7	14.0	65.7	Compliance
0.309742	38.8	9.000	N	9.7	21.2	60.0	Compliance
0.363254	39.3	9.000	N	9.7	19.4	58.7	Compliance
0.415949	37.1	9.000	N	9.7	20.4	57.5	Compliance
0.465037	37.2	9.000	N	9.7	19.4	56.6	Compliance
0.519918	36.0	9.000	N	9.7	20.0	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	40.1	9.000	N	9.7	15.6	55.7	Compliance
0.363254	28.5	9.000	N	9.7	20.2	48.7	Compliance
0.465037	27.5	9.000	N	9.7	19.1	46.6	Compliance
0.619536	26.4	9.000	N	9.7	19.6	46.0	Compliance
0.709407	23.6	9.000	N	9.7	22.4	46.0	Compliance
0.726569	27.4	9.000	N	9.7	18.6	46.0	Compliance

Model: StudioLive AR12 USB


AC120 V, 60 Hz, Line:

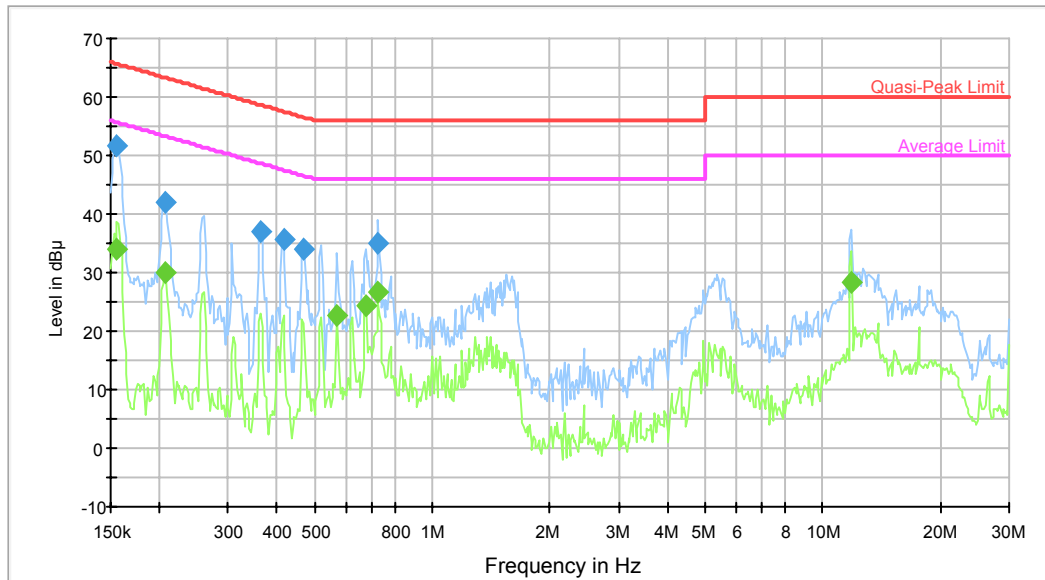

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	51.7	9.000	L1	9.7	14.0	65.7	Compliance
0.207957	41.9	9.000	L1	9.7	21.4	63.3	Compliance
0.363254	37.2	9.000	L1	9.7	21.5	58.7	Compliance
0.415949	35.5	9.000	L1	9.8	22.0	57.5	Compliance
0.468757	34.0	9.000	L1	9.8	22.5	56.5	Compliance
0.726569	34.9	9.000	L1	9.8	21.1	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	34.0	9.000	L1	9.7	21.7	55.7	Compliance
0.206306	30.2	9.000	L1	9.7	23.2	53.4	Compliance
0.572086	22.7	9.000	L1	9.8	23.3	46.0	Compliance
0.676289	24.4	9.000	L1	9.8	21.6	46.0	Compliance
0.726569	26.6	9.000	L1	9.8	19.4	46.0	Compliance
11.815800	28.5	9.000	L1	10.0	21.5	50.0	Compliance

AC120 V, 60 Hz, Neutral:

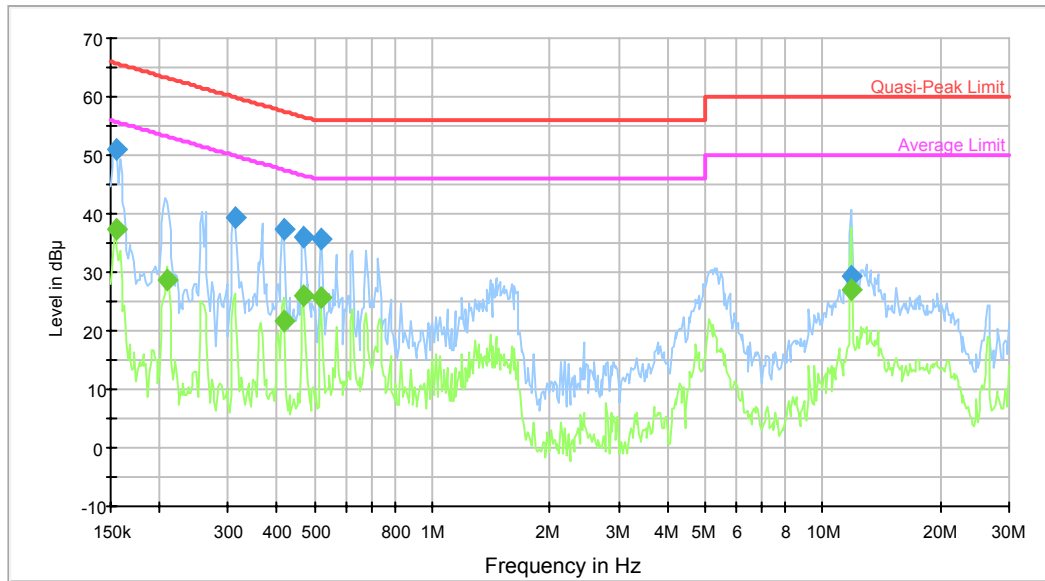


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	51.1	9.000	N	9.7	14.6	65.7	Compliance
0.312220	39.2	9.000	N	9.7	20.7	59.9	Compliance
0.415949	37.2	9.000	N	9.7	20.3	57.5	Compliance
0.468757	36.1	9.000	N	9.7	20.4	56.5	Compliance
0.519918	35.5	9.000	N	9.7	20.5	56.0	Compliance
11.815800	29.4	9.000	N	10.0	30.6	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	37.4	9.000	N	9.7	18.3	55.7	Compliance
0.209621	28.5	9.000	N	9.7	24.7	53.2	Compliance
0.415949	21.6	9.000	N	9.7	25.9	47.5	Compliance
0.468757	26.1	9.000	N	9.7	20.4	46.5	Compliance
0.519918	25.8	9.000	N	9.7	20.2	46.0	Compliance
11.815800	26.9	9.000	N	10.0	23.1	50.0	Compliance

Model: StudioLive AR8 USB


AC120 V, 60 Hz, Line:

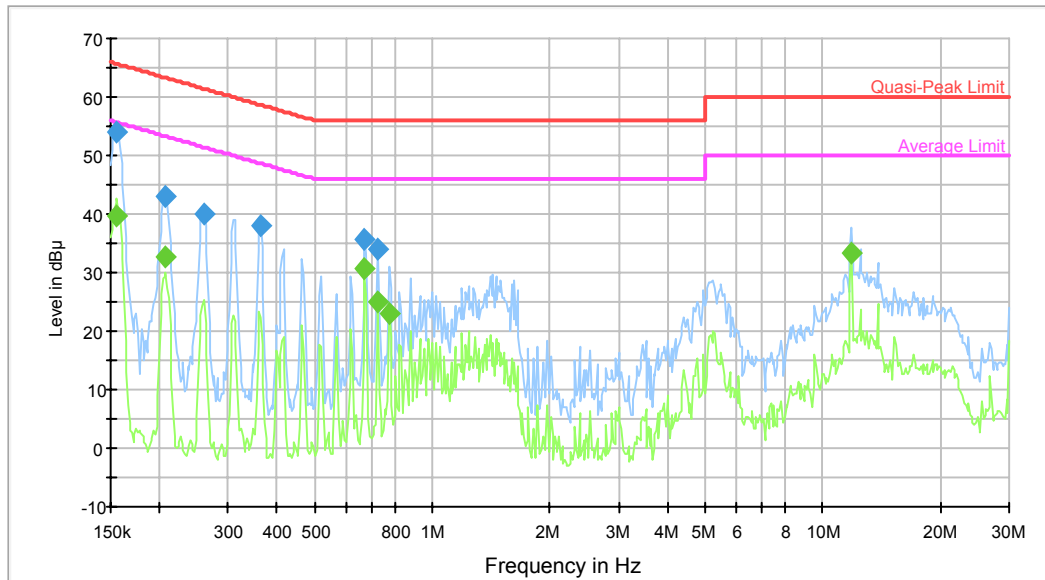

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	54.1	9.000	L1	9.7	11.6	65.7	Compliance
0.207957	43.0	9.000	L1	9.7	20.3	63.3	Compliance
0.259937	40.1	9.000	L1	9.7	21.3	61.4	Compliance
0.363254	38.0	9.000	L1	9.7	20.7	58.7	Compliance
0.670921	35.6	9.000	L1	9.8	20.4	56.0	Compliance
0.726569	34.1	9.000	L1	9.8	21.9	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	39.7	9.000	L1	9.7	16.0	55.7	Compliance
0.207957	32.6	9.000	L1	9.7	20.7	53.3	Compliance
0.670921	30.5	9.000	L1	9.8	15.5	46.0	Compliance
0.726569	25.2	9.000	L1	9.8	20.8	46.0	Compliance
0.774393	23.0	9.000	L1	9.8	23.0	46.0	Compliance
11.815800	33.4	9.000	L1	10.0	16.6	50.0	Compliance

AC120 V, 60 Hz, Neutral:

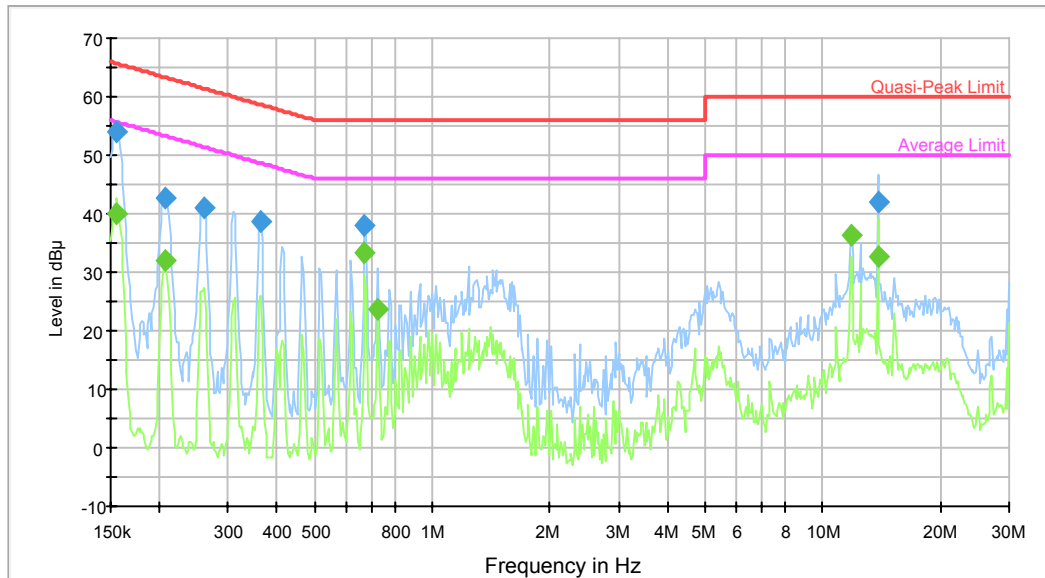

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	54.1	9.000	N	9.7	11.6	65.7	Compliance
0.207957	42.8	9.000	N	9.7	20.5	63.3	Compliance
0.259937	41.0	9.000	N	9.7	20.4	61.4	Compliance
0.363254	38.7	9.000	N	9.7	20.0	58.7	Compliance
0.670921	38.1	9.000	N	9.7	17.9	56.0	Compliance
13.857146	42.0	9.000	N	10.1	18.0	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	39.9	9.000	N	9.7	15.8	55.7	Compliance
0.206306	32.0	9.000	N	9.7	21.4	53.4	Compliance
0.670921	33.2	9.000	N	9.7	12.8	46.0	Compliance
0.726569	23.6	9.000	N	9.7	22.4	46.0	Compliance
11.815800	36.4	9.000	N	10.0	13.6	50.0	Compliance
13.857146	32.7	9.000	N	10.1	17.3	50.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

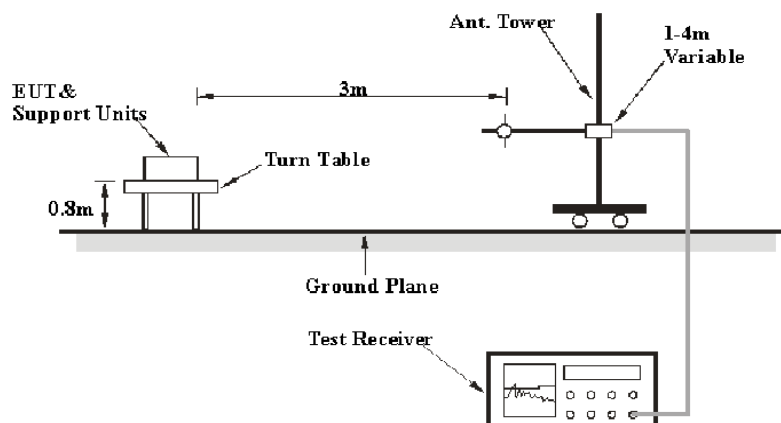

Above 1GHz:

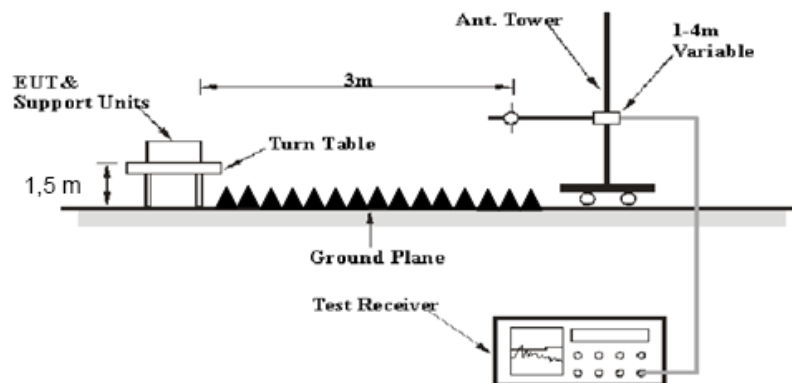

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

5.66 dB at 2400 MHZ in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	25.8°C
Relative Humidity:	72 %
ATM Pressure:	100.3kPa

* The testing was performed by Costa Dong on 2016-05-11.

Test Mode: Transmitting(all the 3 models was pretest, the worst was StudioLive AR16 USB, the data recored as below:)

BDR Mode (GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	66.15	PK	H	25.65	3.66	0.00	95.46	N/A	N/A
2402	55.74	AV	H	25.65	3.66	0.00	85.05	N/A	N/A
2402	59.23	PK	V	25.65	3.66	0.00	88.54	N/A	N/A
2402	48.73	AV	V	25.65	3.66	0.00	78.04	N/A	N/A
2400	30.44	PK	H	25.64	3.65	0.00	59.73	74.00	14.27
2400	15.17	AV	H	25.64	3.65	0.00	44.46	54.00	9.54
4804	36.82	PK	H	30.59	5.06	27.41	45.06	74.00	28.94
4804	24.52	AV	H	30.59	5.06	27.41	32.76	54.00	21.24
7206	31.59	PK	H	34.09	6.61	25.91	46.38	74.00	27.62
7206	18.46	AV	H	34.09	6.61	25.91	33.25	54.00	20.75
9608	29.24	PK	H	35.96	8.53	27.55	46.18	74.00	27.82
9608	15.72	AV	H	35.96	8.53	27.55	32.66	54.00	21.34
3867	32.06	PK	H	29.61	4.52	27.32	38.87	74.00	35.13
3867	19.84	AV	H	29.61	4.52	27.32	26.65	54.00	27.35
181.32	37.3	QP	H	11.37	1.57	21.45	28.79	43.50	14.71
Middle Channel: 2441 MHz									
2441	66.4	PK	H	25.75	3.76	0.00	95.91	N/A	N/A
2441	55.98	AV	H	25.75	3.76	0.00	85.49	N/A	N/A
2441	59.6	PK	V	25.75	3.76	0.00	89.11	N/A	N/A
2441	49.07	AV	V	25.75	3.76	0.00	78.58	N/A	N/A
4882	36.97	PK	H	30.79	5.19	27.42	45.53	74.00	28.47
4882	24.69	AV	H	30.79	5.19	27.42	33.25	54.00	20.75
7323	31.87	PK	H	34.38	6.75	25.88	47.12	74.00	26.88
7323	18.55	AV	H	34.38	6.75	25.88	33.80	54.00	20.20
9764	29.59	PK	H	36.33	8.62	27.20	47.34	74.00	26.66
9764	15.86	AV	H	36.33	8.62	27.20	33.61	54.00	20.39
3867	32.28	PK	H	29.61	4.52	27.32	39.09	74.00	34.91
3867	19.6	AV	H	29.61	4.52	27.32	26.41	54.00	27.59
3090	31.35	PK	H	27.49	6.80	27.46	38.18	74.00	35.82
3090	19.09	AV	H	27.49	6.80	27.46	25.92	54.00	28.08
181.32	37.5	QP	H	11.37	1.57	21.45	28.99	43.50	14.51
High Channel: 2480 MHz									
2480	66.62	PK	H	25.85	3.68	0.00	96.15	N/A	N/A
2480	56.12	AV	H	25.85	3.68	0.00	85.65	N/A	N/A
2480	59.7	PK	V	25.85	3.68	0.00	89.23	N/A	N/A
2480	49.04	AV	V	25.85	3.68	0.00	78.57	N/A	N/A
2483.5	27.46	PK	H	25.86	3.67	0.00	56.99	74.00	17.01
2483.5	13.46	AV	H	25.86	3.67	0.00	42.99	54.00	11.01
4960	37.14	PK	H	31.00	5.34	27.43	46.05	74.00	27.95
4960	25.12	AV	H	31.00	5.34	27.43	34.03	54.00	19.97
7440	31.93	PK	H	34.66	6.89	25.97	47.51	74.00	26.49
7440	18.62	AV	H	34.66	6.89	25.97	34.20	54.00	19.80
9920	29.93	PK	H	36.71	8.71	26.66	48.69	74.00	25.31
9920	16.21	AV	H	36.71	8.71	26.66	34.97	54.00	19.03
3867	31.9	PK	H	29.61	4.52	27.32	38.71	74.00	35.29
3867	19.69	AV	H	29.61	4.52	27.32	26.50	54.00	27.50
181.32	37.8	QP	H	11.37	1.57	21.45	29.29	43.50	14.21

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	66.46	PK	H	25.65	3.66	0.00	95.77	N/A	N/A
2402	54.81	AV	H	25.65	3.66	0.00	84.12	N/A	N/A
2402	59.35	PK	V	25.65	3.66	0.00	88.66	N/A	N/A
2402	58.23	AV	V	25.65	3.66	0.00	87.54	N/A	N/A
2400	39.05	PK	H	25.64	3.65	0.00	68.34	74.00	5.66
2400	14.84	AV	H	25.64	3.65	0.00	44.13	54.00	9.87
4804	37.03	PK	H	30.59	5.06	27.41	45.27	74.00	28.73
4804	24.76	AV	H	30.59	5.06	27.41	33.00	54.00	21.00
7206	31.9	PK	H	34.09	6.61	25.91	46.69	74.00	27.31
7206	18.62	AV	H	34.09	6.61	25.91	33.41	54.00	20.59
9608	29.61	PK	H	35.96	8.53	27.55	46.55	74.00	27.45
9608	15.95	AV	H	35.96	8.53	27.55	32.89	54.00	21.11
3867	32.23	PK	H	29.61	4.52	27.32	39.04	74.00	34.96
3867	19.8	AV	H	29.61	4.52	27.32	26.61	54.00	27.39
181.32	36.3	QP	H	11.37	1.57	21.45	27.79	43.50	15.71
Middle Channel: 2441 MHz									
2441	66.72	PK	H	25.75	3.76	0.00	96.23	N/A	N/A
2441	55.18	AV	H	25.75	3.76	0.00	84.69	N/A	N/A
2441	59.59	PK	V	25.75	3.76	0.00	89.10	N/A	N/A
2441	58.39	AV	V	25.75	3.76	0.00	87.90	N/A	N/A
4882	37.32	PK	H	30.79	5.19	27.42	45.88	74.00	28.12
4882	25.3	AV	H	30.79	5.19	27.42	33.86	54.00	20.14
7323	32.11	PK	H	34.38	6.75	25.88	47.36	74.00	26.64
7323	18.67	AV	H	34.38	6.75	25.88	33.92	54.00	20.08
9764	29.96	PK	H	36.33	8.62	27.20	47.71	74.00	26.29
9764	16.24	AV	H	36.33	8.62	27.20	33.99	54.00	20.01
3867	32.03	PK	H	29.61	4.52	27.32	38.84	74.00	35.16
3867	19.72	AV	H	29.61	4.52	27.32	26.53	54.00	27.47
3090	31.12	PK	H	27.49	6.80	27.46	37.95	74.00	36.05
3090	18.97	AV	H	27.49	6.80	27.46	25.80	54.00	28.20
181.32	36.4	QP	H	11.37	1.57	21.45	27.89	43.50	15.61
High Channel: 2480 MHz									
2480	66.83	PK	H	25.85	3.68	0.00	96.36	N/A	N/A
2480	55.42	AV	H	25.85	3.68	0.00	84.95	N/A	N/A
2480	59.71	PK	V	25.85	3.68	0.00	89.24	N/A	N/A
2480	58.27	AV	V	25.85	3.68	0.00	87.80	N/A	N/A
2483.5	26.1	PK	H	25.86	3.67	0.00	55.63	74.00	18.37
2483.5	13.43	AV	H	25.86	3.67	0.00	42.96	54.00	11.04
4960	37.48	PK	H	31.00	5.34	27.43	46.39	74.00	27.61
4960	25.47	AV	H	31.00	5.34	27.43	34.38	54.00	19.62
7440	32.28	PK	H	34.66	6.89	25.97	47.86	74.00	26.14
7440	18.75	AV	H	34.66	6.89	25.97	34.33	54.00	19.67
9920	30.05	PK	H	36.71	8.71	26.66	48.81	74.00	25.19
9920	16.26	AV	H	36.71	8.71	26.66	35.02	54.00	18.98
3867	32.28	PK	H	29.61	4.52	27.32	39.09	74.00	34.91
3867	19.8	AV	H	29.61	4.52	27.32	26.61	54.00	27.39
181.32	36.2	QP	H	11.37	1.57	21.45	27.69	43.50	15.81

EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	66.06	PK	H	25.65	3.66	0.00	95.37	N/A	N/A
2402	54.78	AV	H	25.65	3.66	0.00	84.09	N/A	N/A
2402	58.97	PK	V	25.65	3.66	0.00	88.28	N/A	N/A
2402	47.78	AV	V	25.65	3.66	0.00	77.09	N/A	N/A
2400	38.79	PK	H	25.64	3.65	0.00	68.08	74.00	5.92
2400	15.22	AV	H	25.64	3.65	0.00	44.51	54.00	9.49
4804	36.67	PK	H	30.59	5.06	27.41	44.91	74.00	29.09
4804	24.5	AV	H	30.59	5.06	27.41	32.74	54.00	21.26
7206	31.54	PK	H	34.09	6.61	25.91	46.33	74.00	27.67
7206	18.44	AV	H	34.09	6.61	25.91	33.23	54.00	20.77
9608	29.2	PK	H	35.96	8.53	27.55	46.14	74.00	27.86
9608	15.66	AV	H	35.96	8.53	27.55	32.60	54.00	21.40
3867	32.09	PK	H	29.61	4.52	27.32	38.90	74.00	35.10
3867	19.62	AV	H	29.61	4.52	27.32	26.43	54.00	27.57
181.32	36.4	QP	H	11.37	1.57	21.45	27.89	43.50	15.61
Middle Channel: 2441 MHz									
2441	66.25	PK	H	25.75	3.76	0.00	95.76	N/A	N/A
2441	55.07	AV	H	25.75	3.76	0.00	84.58	N/A	N/A
2441	59.17	PK	V	25.75	3.76	0.00	88.68	N/A	N/A
2441	48.05	AV	V	25.75	3.76	0.00	77.56	N/A	N/A
4882	36.95	PK	H	30.79	5.19	27.42	45.51	74.00	28.49
4882	24.65	AV	H	30.79	5.19	27.42	33.21	54.00	20.79
7323	31.65	PK	H	34.38	6.75	25.88	46.90	74.00	27.10
7323	18.5	AV	H	34.38	6.75	25.88	33.75	54.00	20.25
9764	29.31	PK	H	36.33	8.62	27.20	47.06	74.00	26.94
9764	15.79	AV	H	36.33	8.62	27.20	33.54	54.00	20.46
3867	32.14	PK	H	29.61	4.52	27.32	38.95	74.00	35.05
3867	19.95	AV	H	29.61	4.52	27.32	26.76	54.00	27.24
3090	31.41	PK	H	27.49	6.80	27.46	38.24	74.00	35.76
3090	18.87	AV	H	27.49	6.80	27.46	25.70	54.00	28.30
181.32	36.3	QP	H	11.37	1.57	21.45	27.79	43.50	15.71
High Channel: 2480 MHz									
2480	66.4	PK	H	25.85	3.68	0.00	95.93	N/A	N/A
2480	55.25	AV	H	25.85	3.68	0.00	84.78	N/A	N/A
2480	59.3	PK	V	25.85	3.68	0.00	88.83	N/A	N/A
2480	48.09	AV	V	25.85	3.68	0.00	77.62	N/A	N/A
2483.5	27.27	PK	H	25.86	3.67	0.00	56.80	74.00	17.20
2483.5	13.42	AV	H	25.86	3.67	0.00	42.95	54.00	11.05
4960	36.91	PK	H	31.00	5.34	27.43	45.82	74.00	28.18
4960	24.77	AV	H	31.00	5.34	27.43	33.68	54.00	20.32
7440	31.7	PK	H	34.66	6.89	25.97	47.28	74.00	26.72
7440	18.44	AV	H	34.66	6.89	25.97	34.02	54.00	19.98
9920	29.7	PK	H	36.71	8.71	26.66	48.46	74.00	25.54
9920	15.74	AV	H	36.71	8.71	26.66	34.50	54.00	19.50
3867	32.05	PK	H	29.61	4.52	27.32	38.86	74.00	35.14
3867	19.66	AV	H	29.61	4.52	27.32	26.47	54.00	27.53
181.32	36.8	QP	H	11.37	1.57	21.45	28.29	43.50	15.21

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* The testing was performed by Costa Dong on 2016-02-28.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency	Channel Separation	Limit	Result
		MHz	MHz	MHz	
BDR (GFSK)	Low	2402	1.002	0.59	Compliance
	Middle	2441	1.002	0.58	
	High	2480	1.002	0.58	
EDR ($\pi/4$ -DQPSK)	Low	2402	1.002	0.83	Compliance
	Middle	2441	1.002	0.83	
	High	2480	1.002	0.83	
EDR (8DPSK)	Low	2402	1.006	0.82	Compliance
	Middle	2441	1.002	0.82	
	High	2480	1.006	0.82	

Note: Limit= (2/3) × 20dB bandwidth

BDR Mode (GFSK):

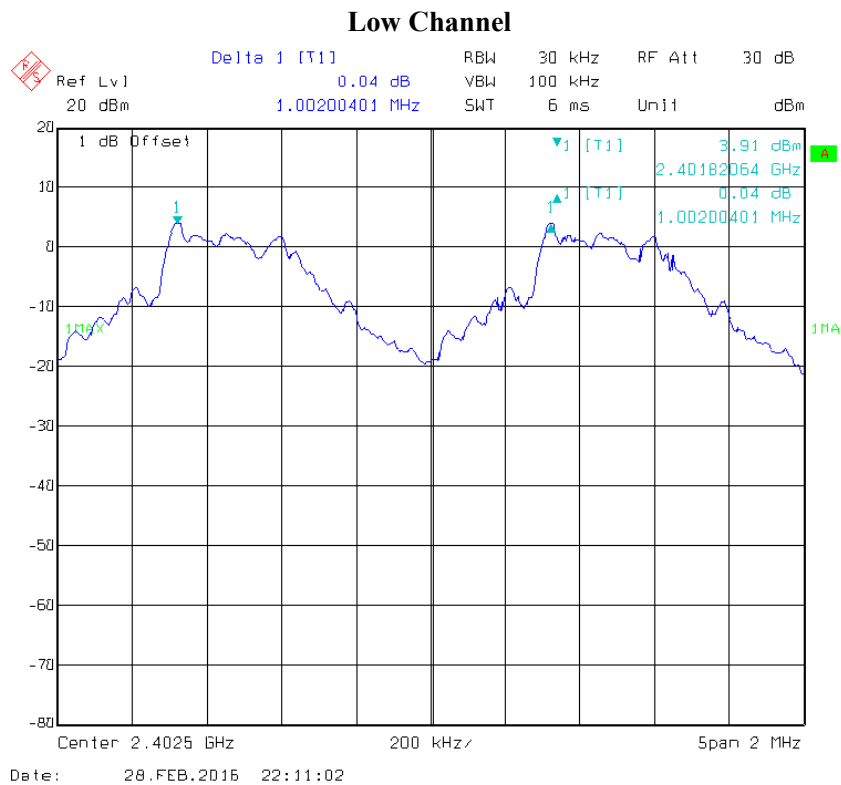


Middle Channel

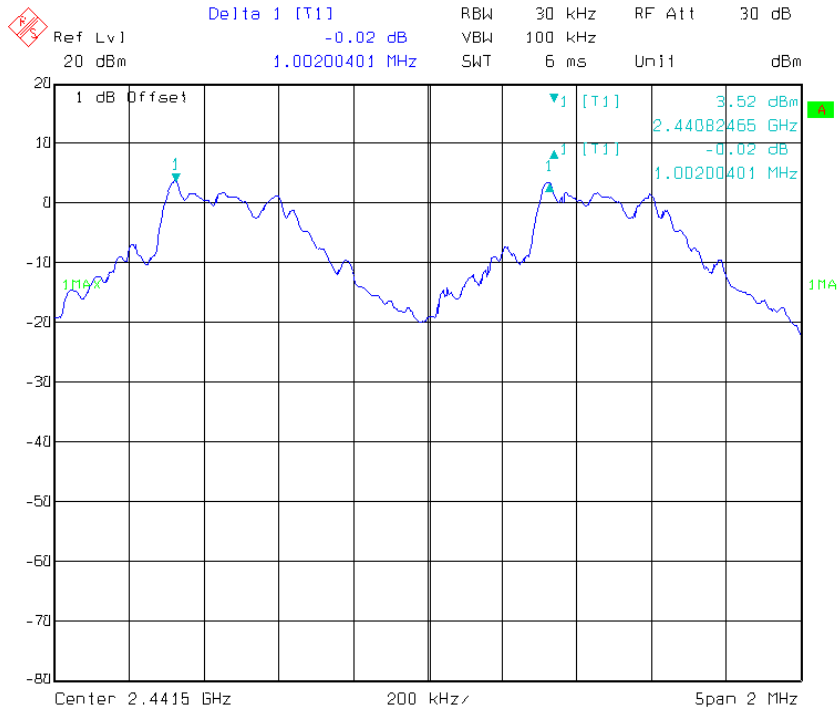

Date: 28.FEB.2016 22:13:25


High Channel

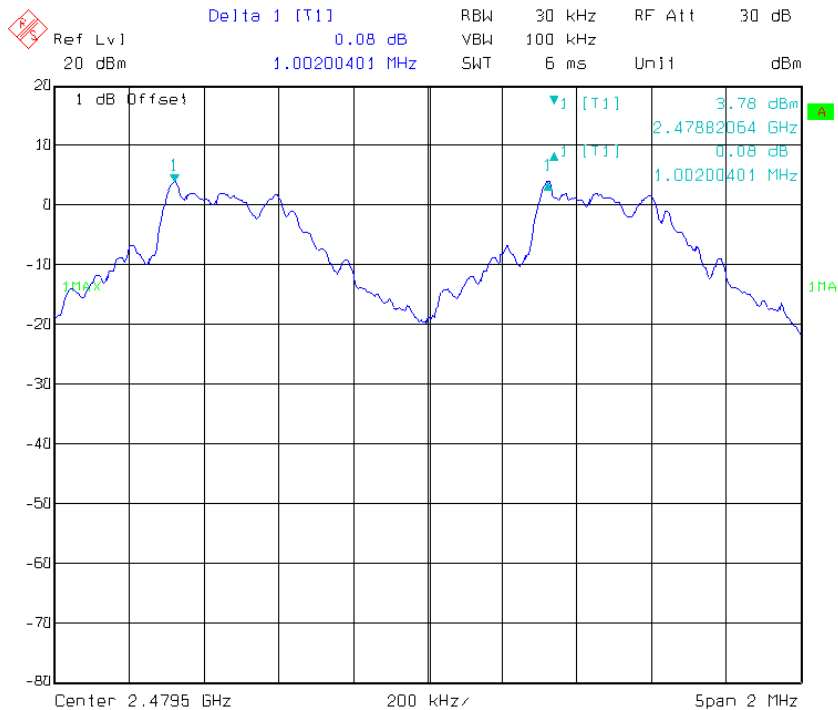


Date: 28.FEB.2016 22:15:53

EDR Mode ($\pi/4$ -DQPSK):


Low Channel

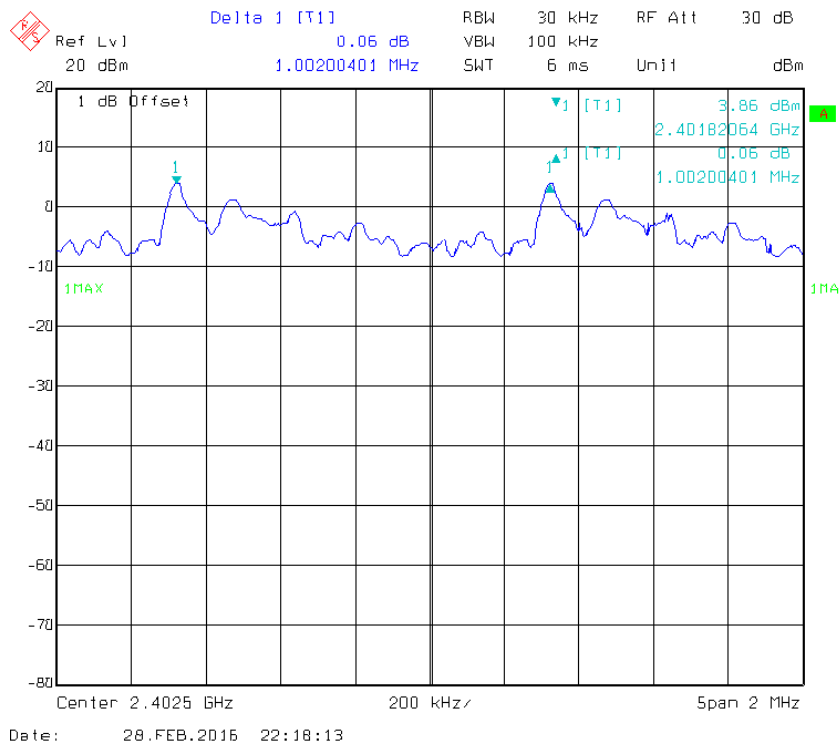

Middle Channel

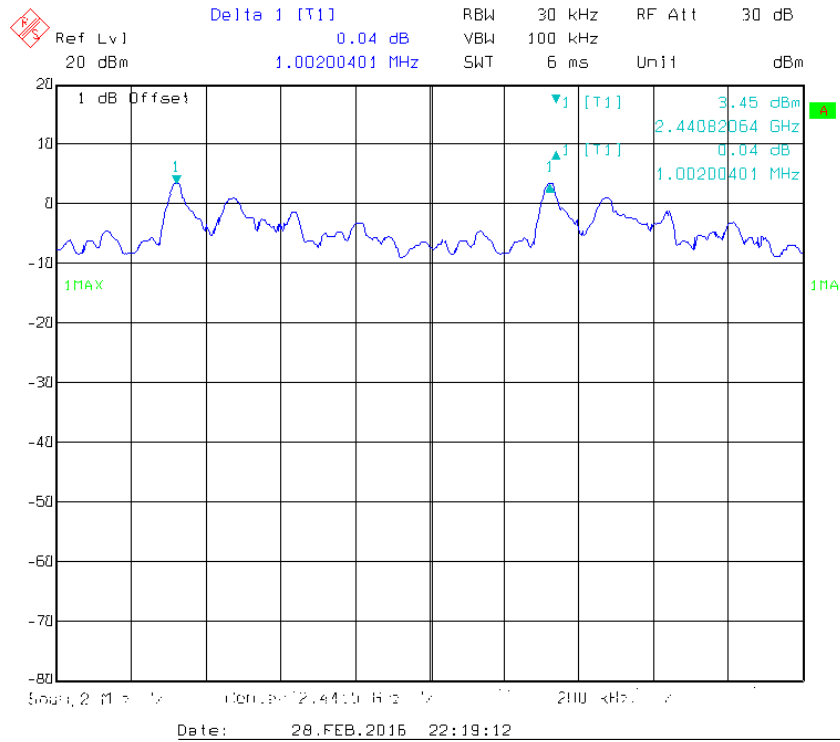


High Channel

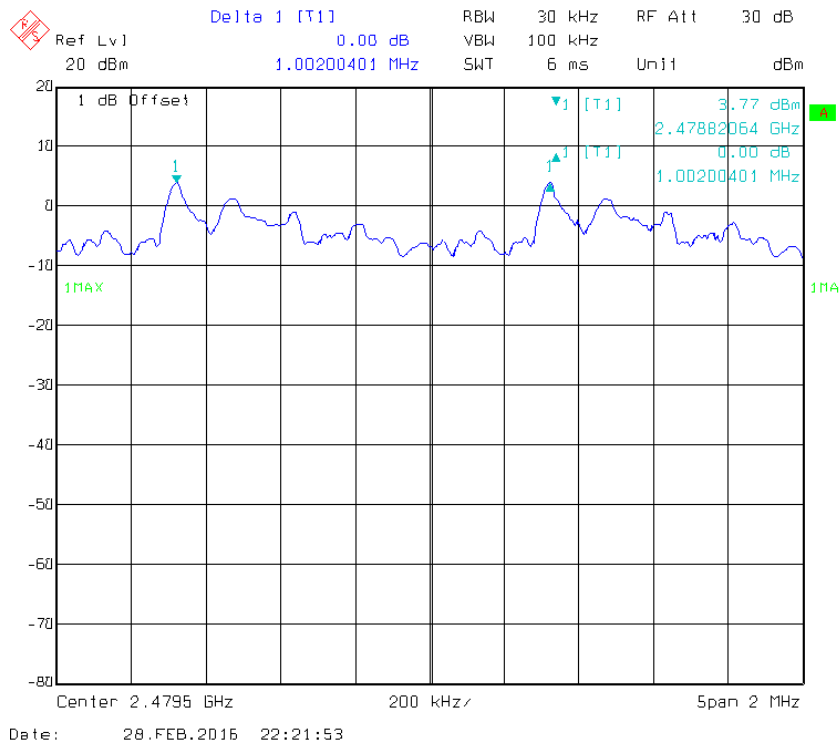


EDR Mode (8-DPSK):


Low Channel

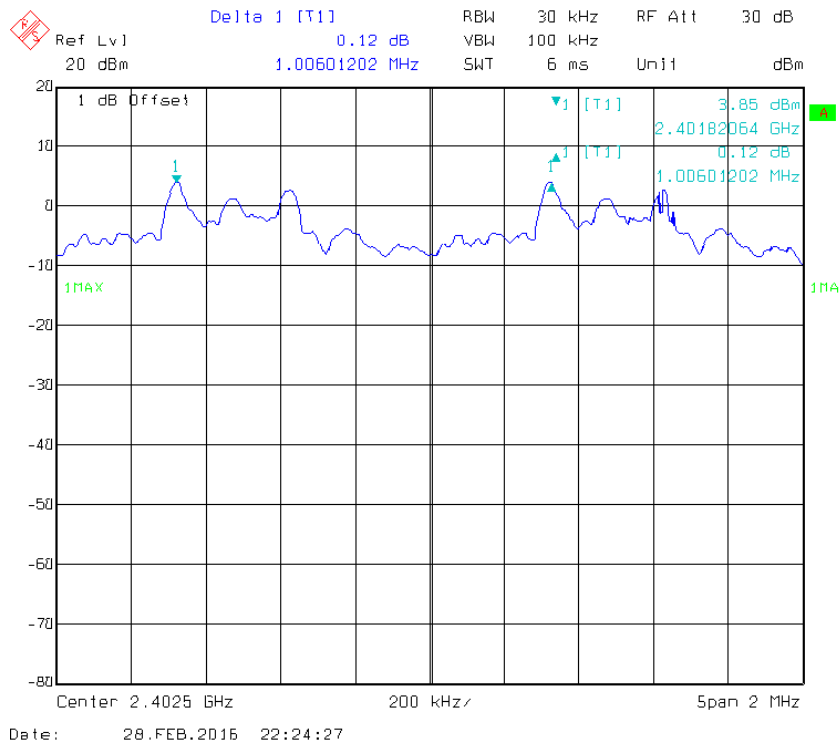

Middle Channel

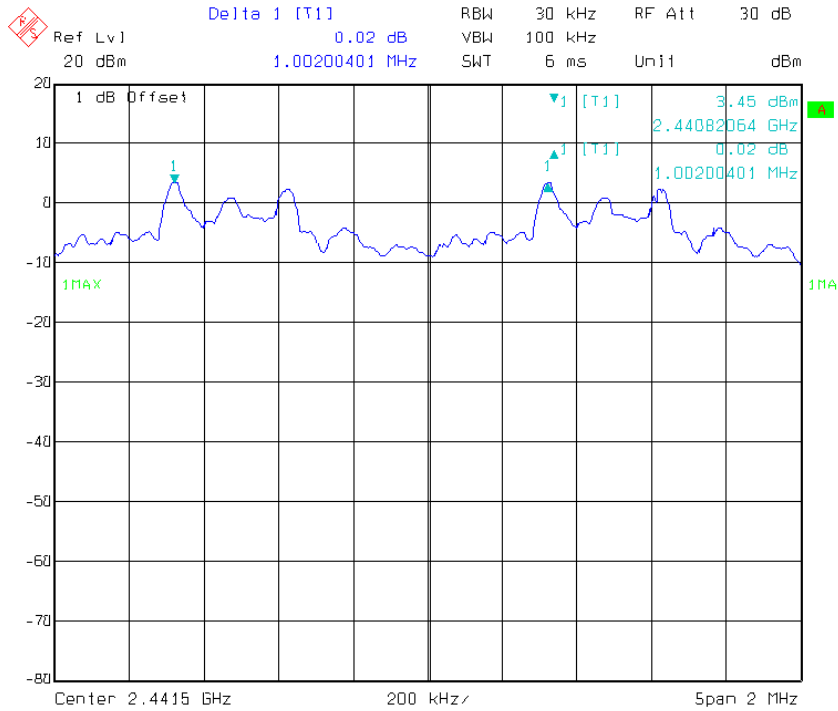

High Channel

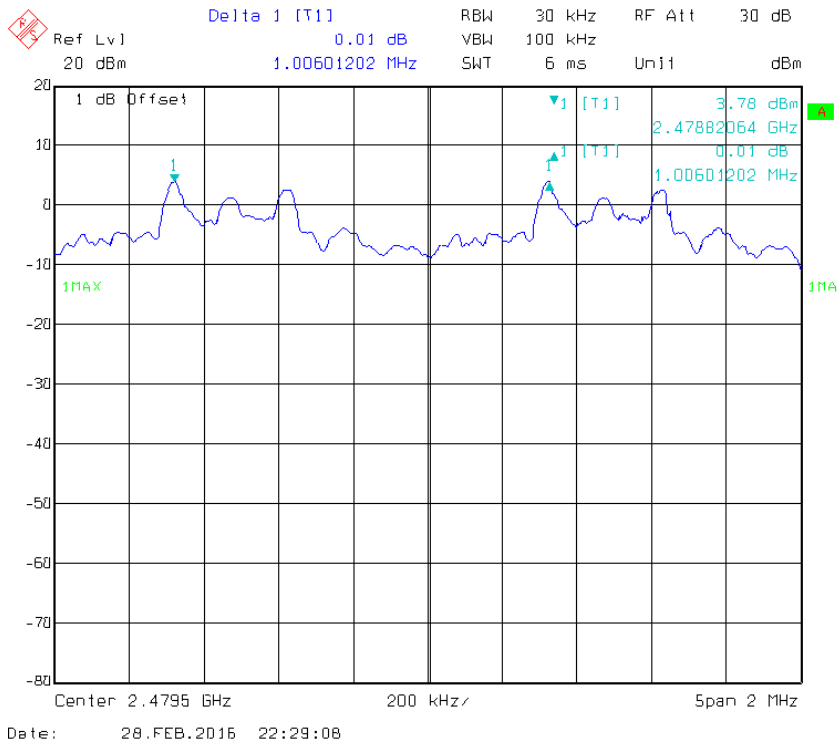

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* The testing was performed by Costa Dong on 2016-02-28.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.88
	Middle	2441	0.87
	High	2480	0.87
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.24
	Middle	2441	1.24
	High	2480	1.25
EDR Mode (8-DPSK):	Low	2402	1.23
	Middle	2441	1.23
	High	2480	1.23


BDR Mode (GFSK):

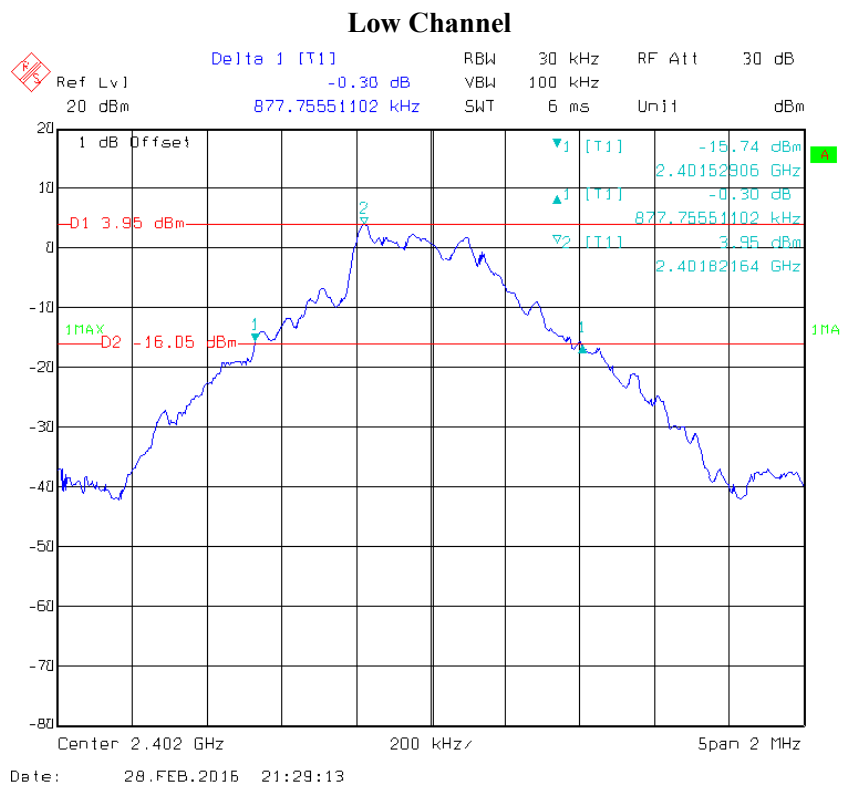

Middle Channel

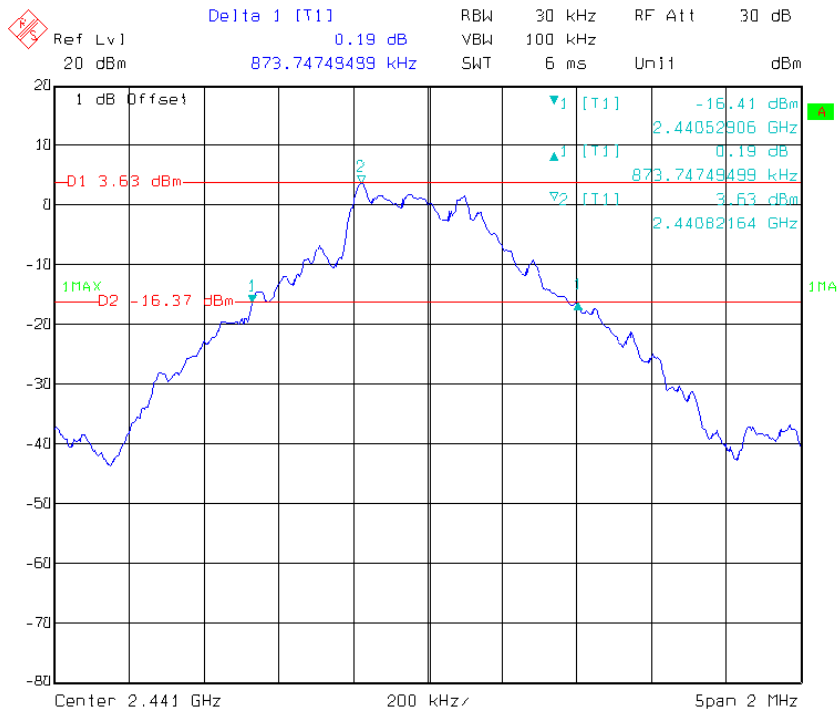


High Channel

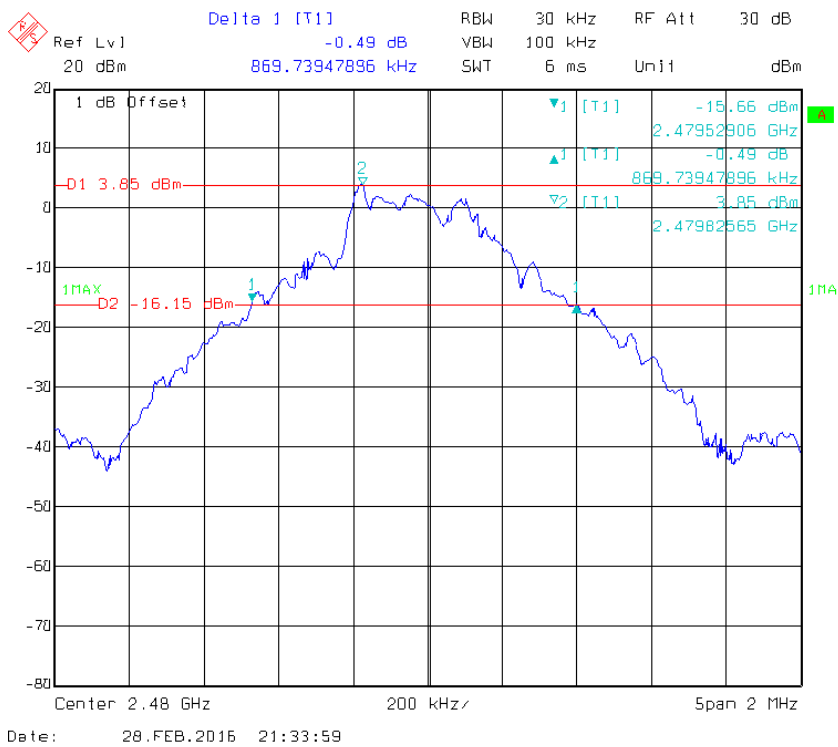


EDR Mode ($\pi/4$ -DQPSK):


Low Channel

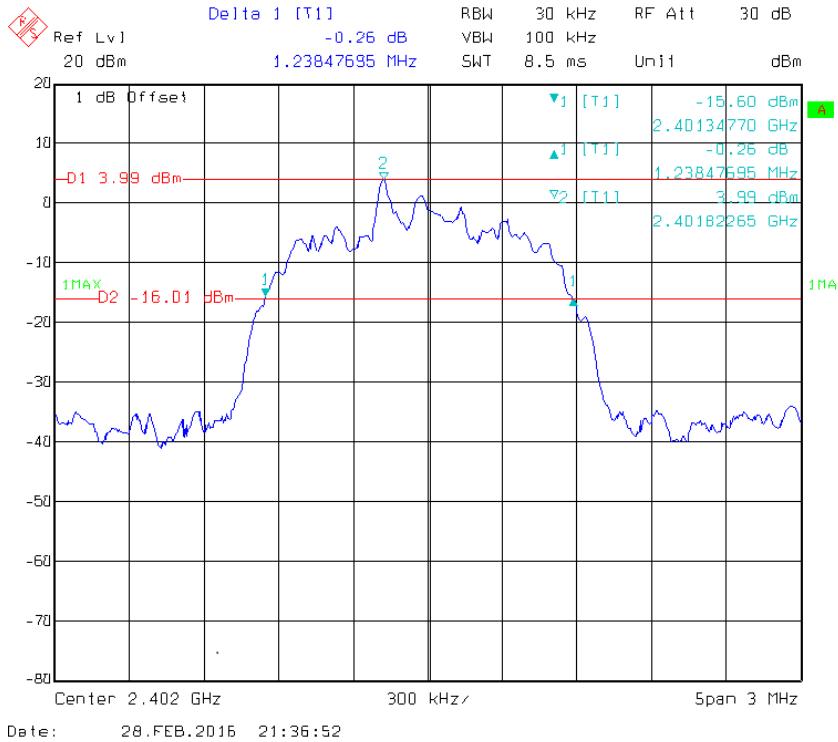

Middle Channel

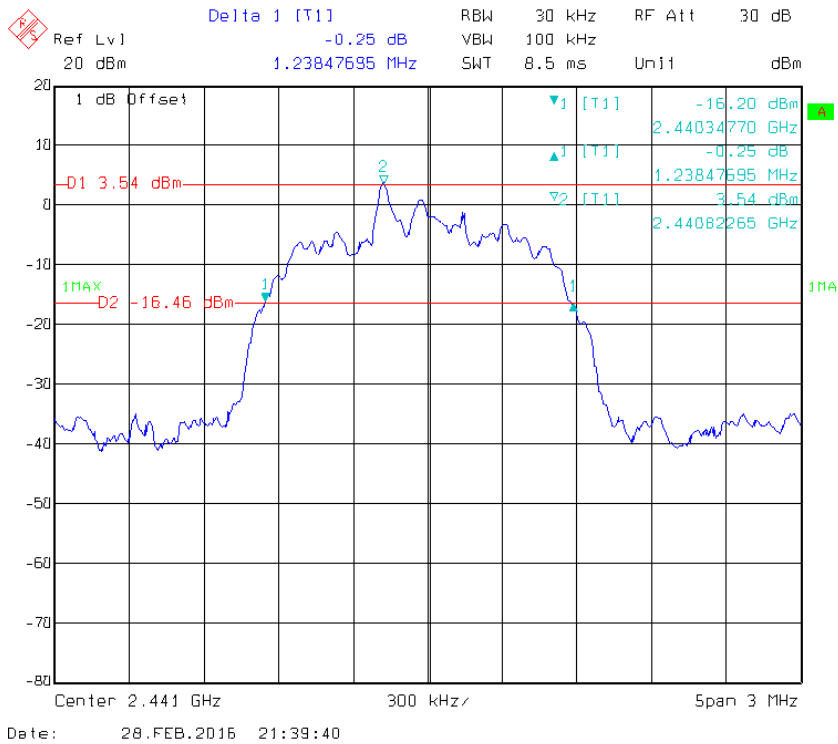


High Channel

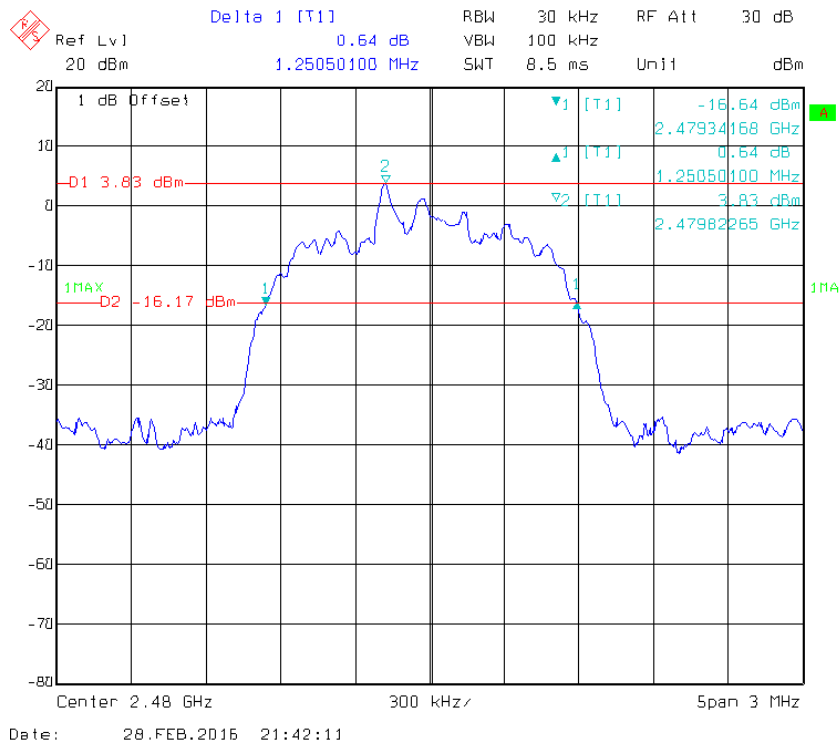


EDR Mode (8-DPSK):


Low Channel

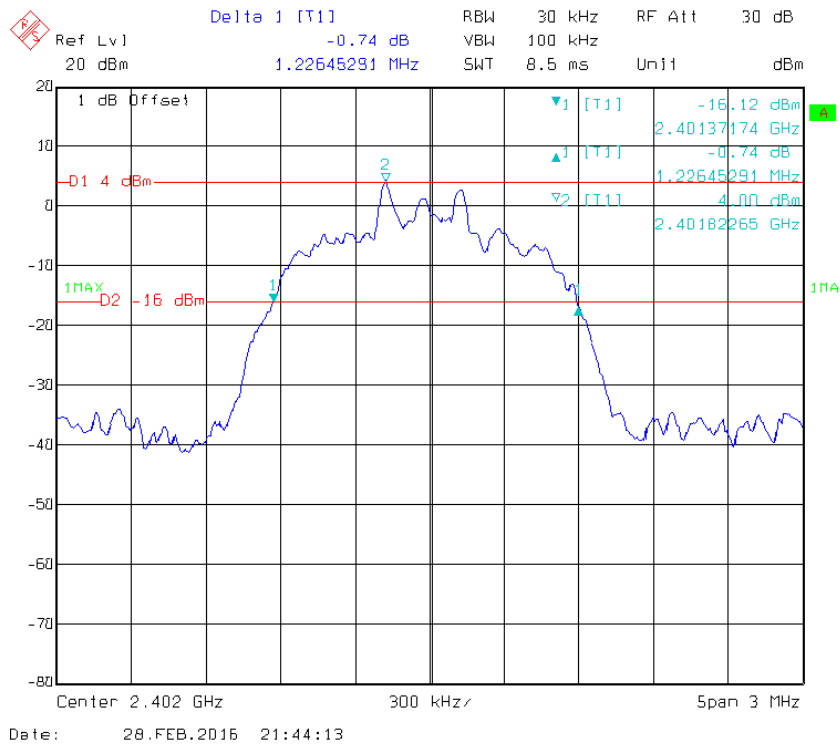

Middle Channel

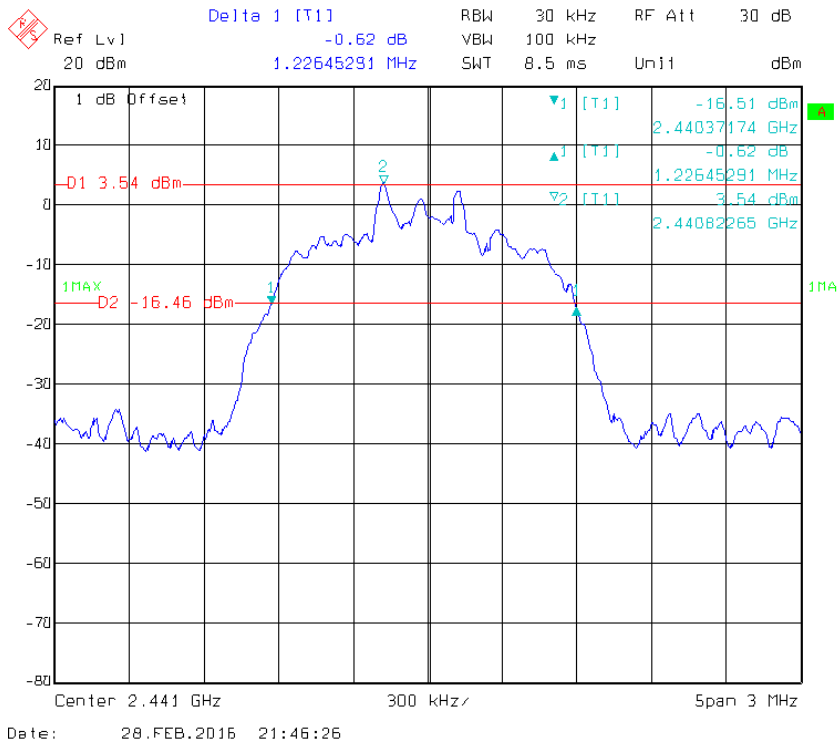

High Channel

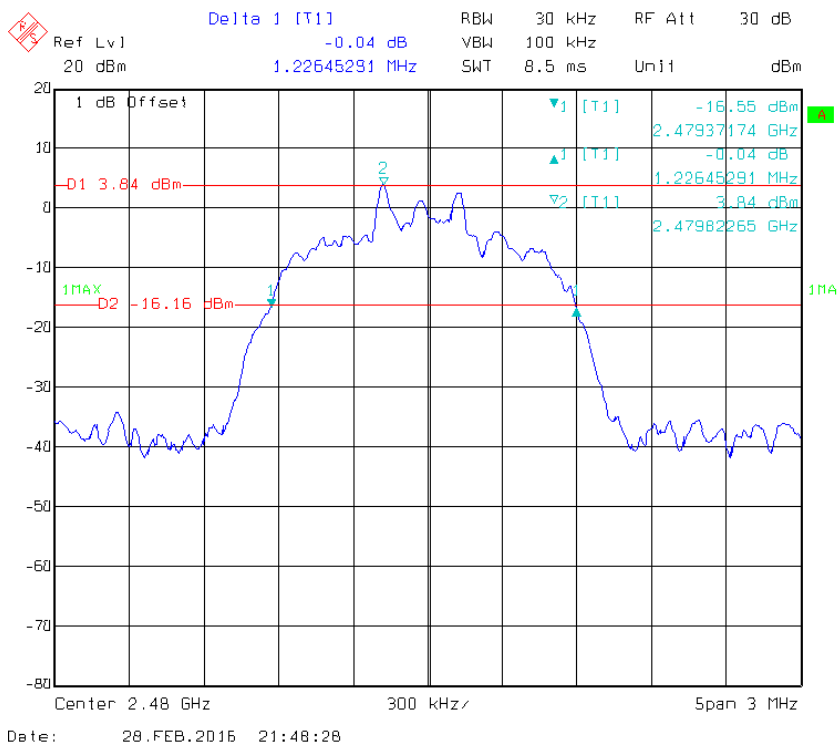

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* *The testing was performed by Costa Dong on 2016-02-28.*

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15


Number of Hopping Channels

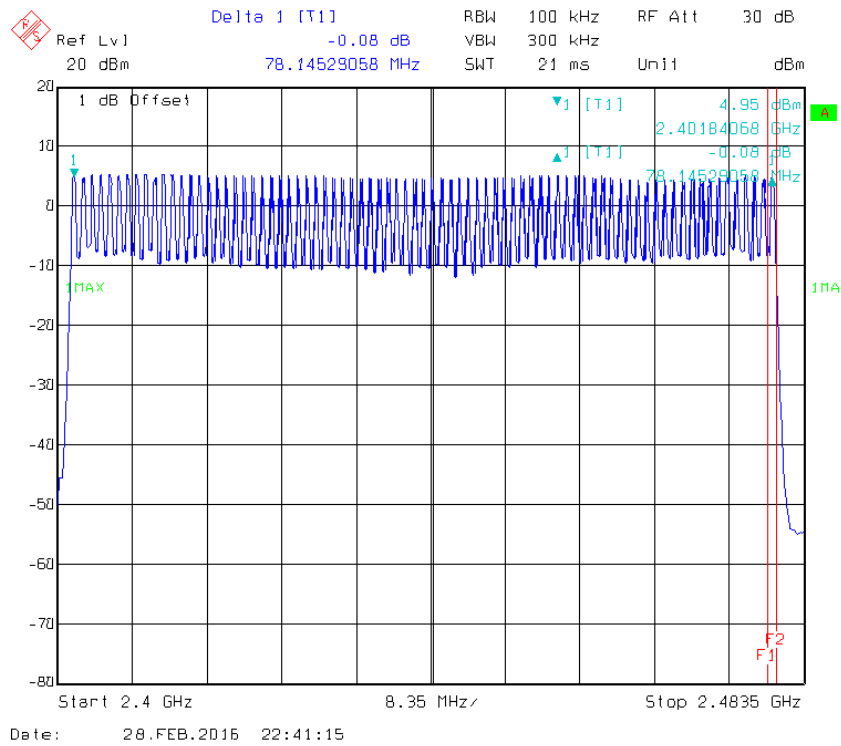

EDR Mode ($\pi/4$ -DQPSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

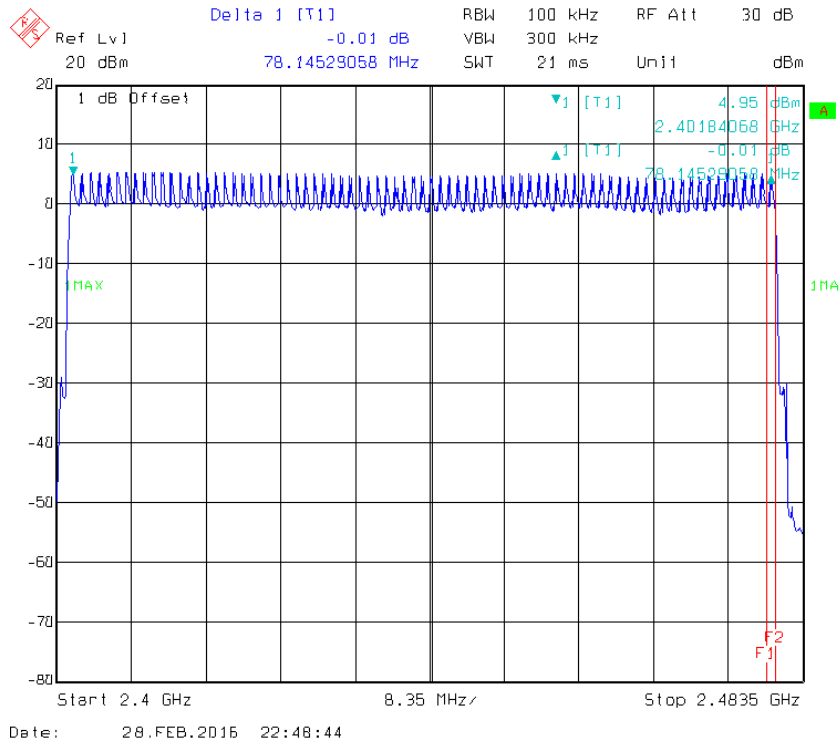

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

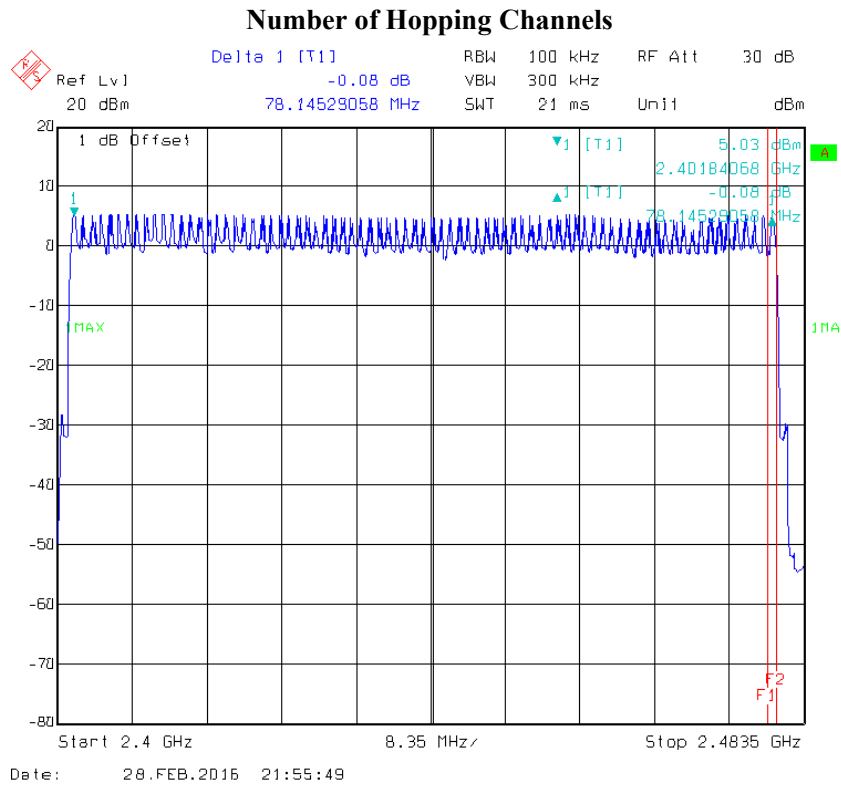

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* The testing was performed by Costa Dong on 2016-02-28.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.391	0.125	0.4	Compliance
	Middle	0.391	0.125	0.4	Compliance
	High	0.391	0.125	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s				
DH3	Low	1.659	0.265	0.4	Compliance
	Middle	1.653	0.264	0.4	Compliance
	High	1.659	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s				
DH5	Low	2.916	0.311	0.4	Compliance
	Middle	2.906	0.310	0.4	Compliance
	High	2.916	0.311	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s				


DH1: Low Channel

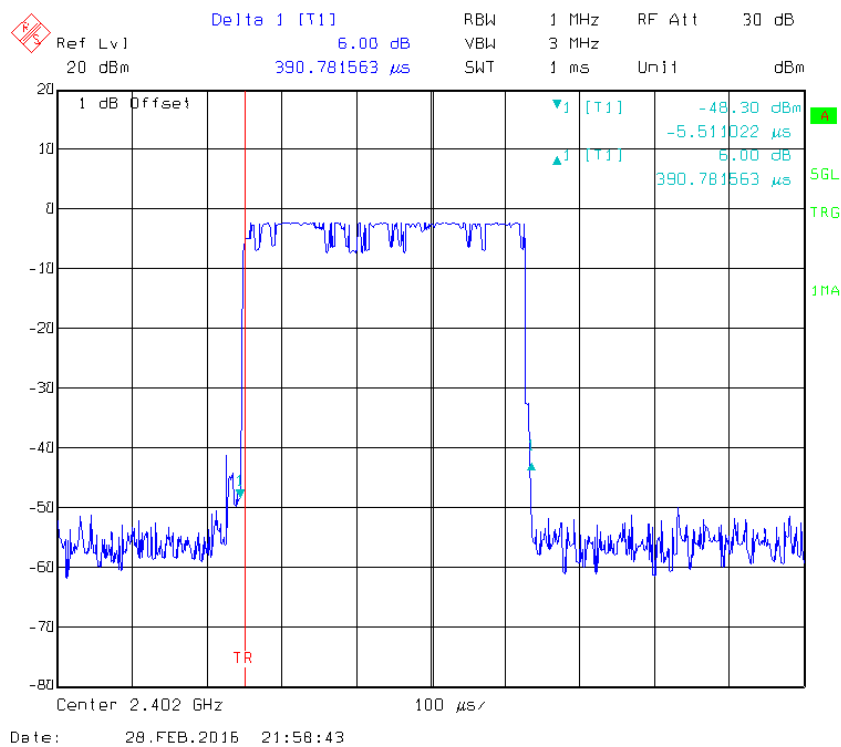


DH1: Middle Channel

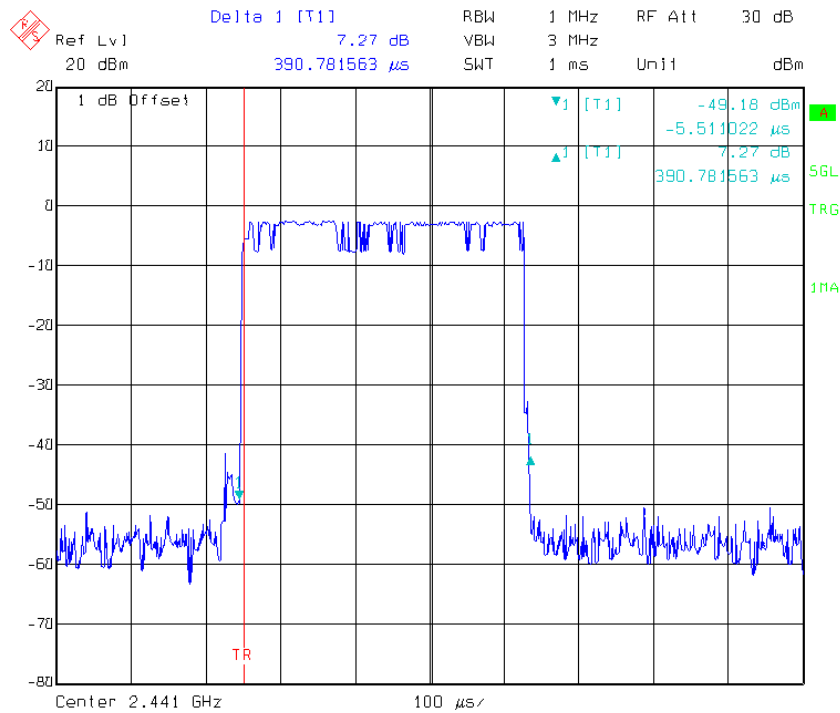


DH1: High Channel

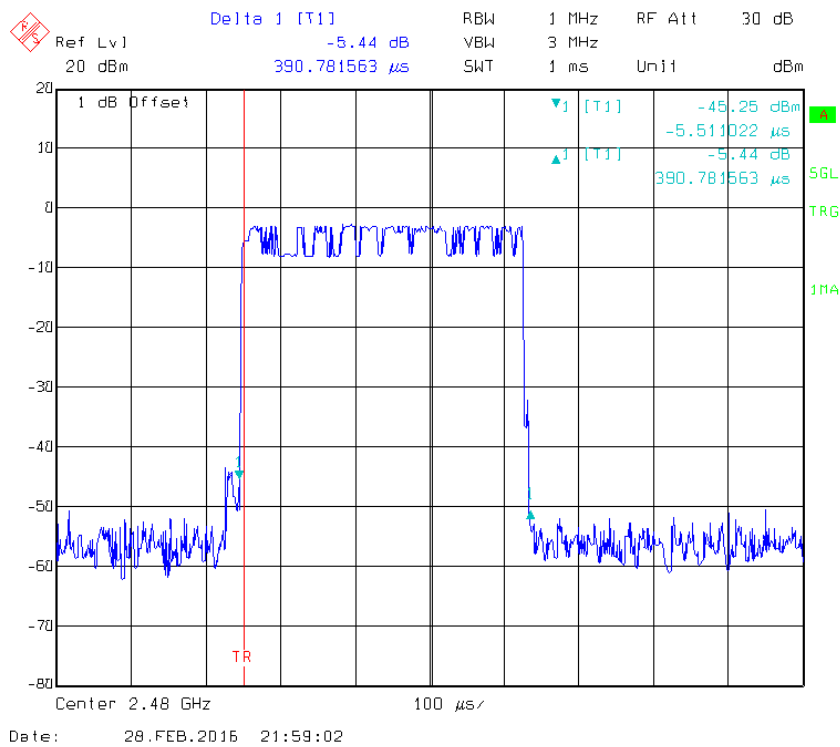


DH3: Low Channel

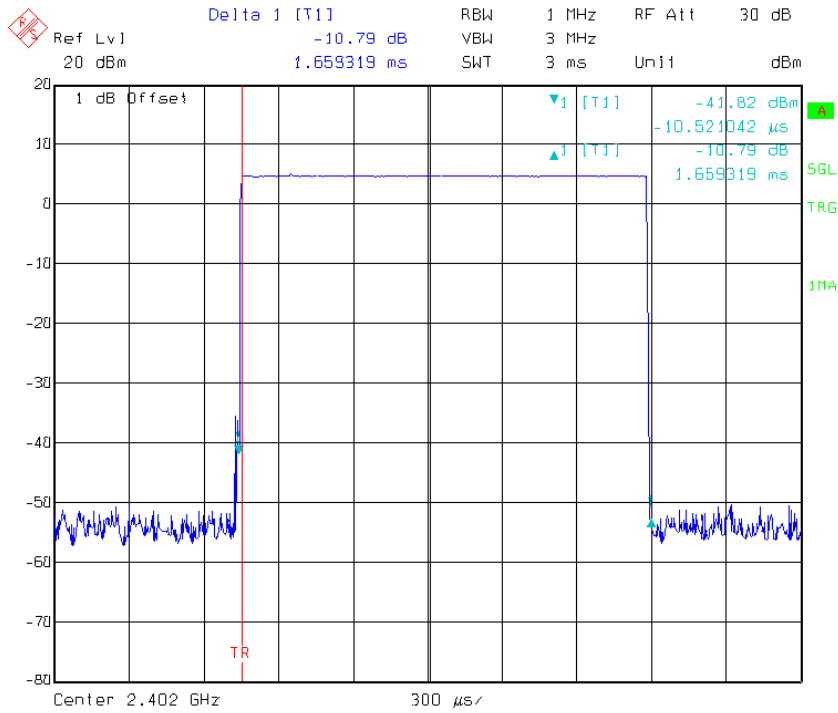

DH3: Middle Channel

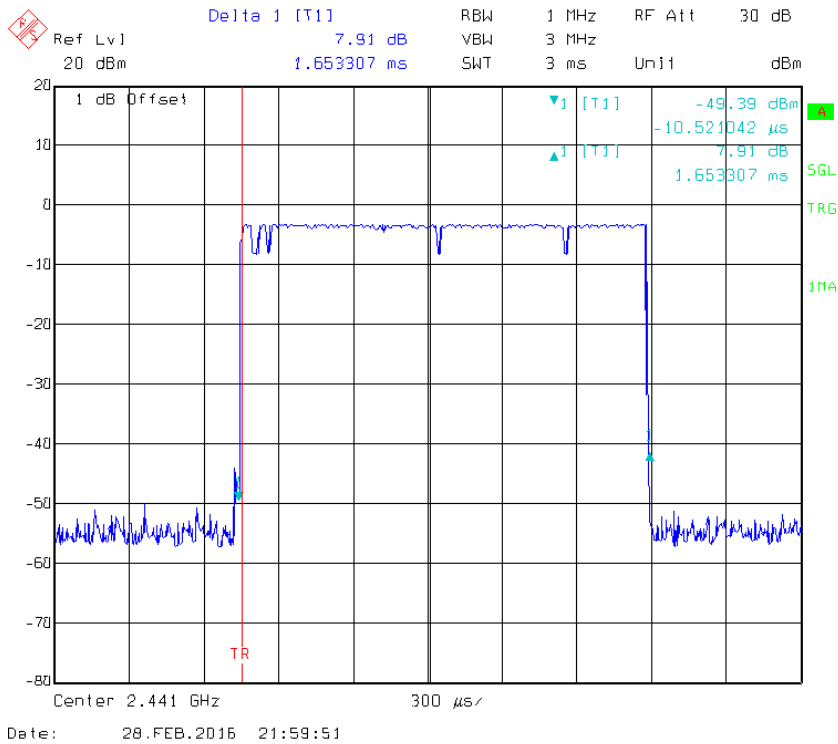


DH3: High Channel

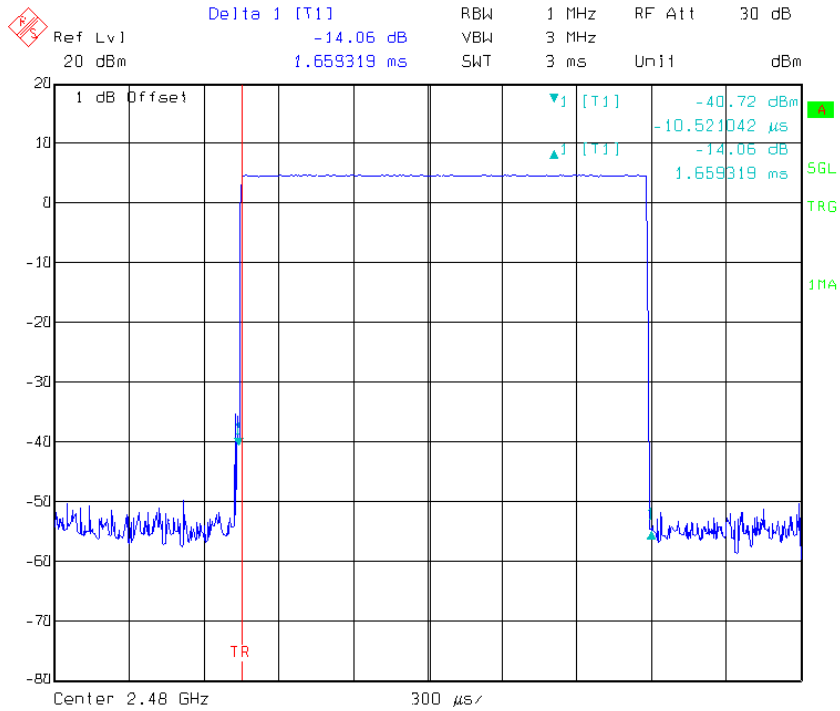


Date: 28.FEB.2016 22:00:01

DH5: Low Channel

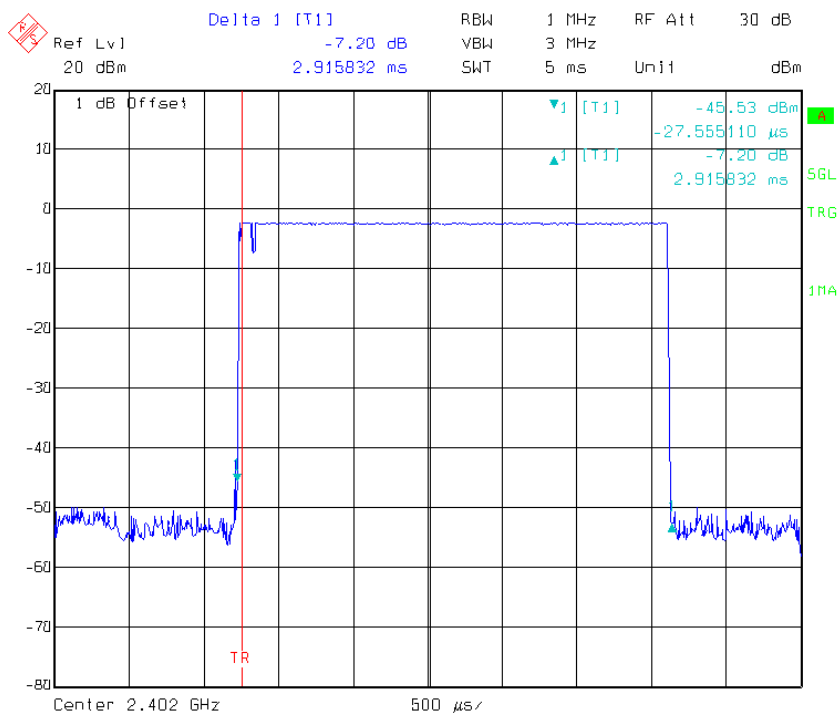


Date: 28.FEB.2016 22:01:25

DH5: Middle Channel

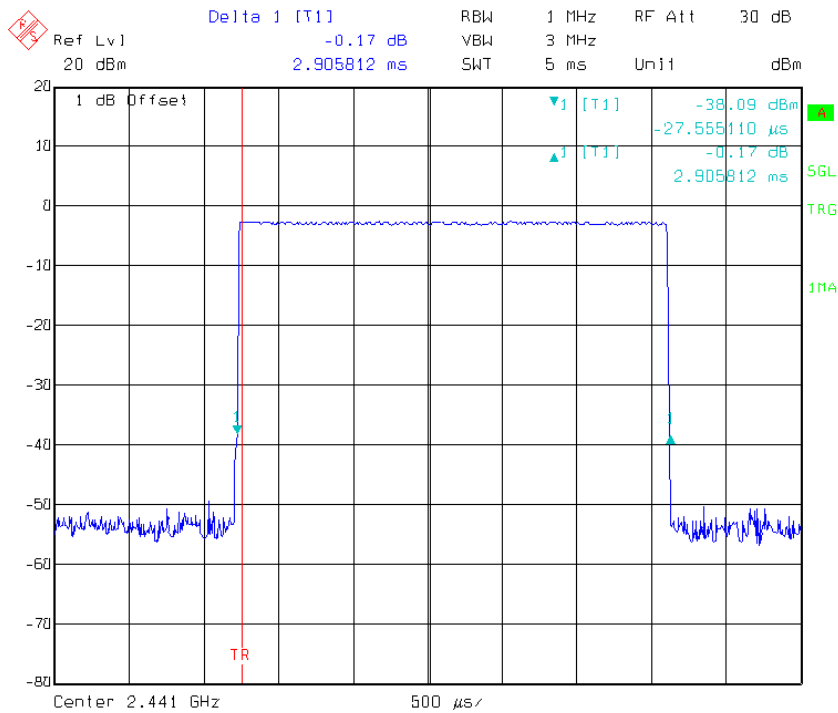


DH5: High Channel

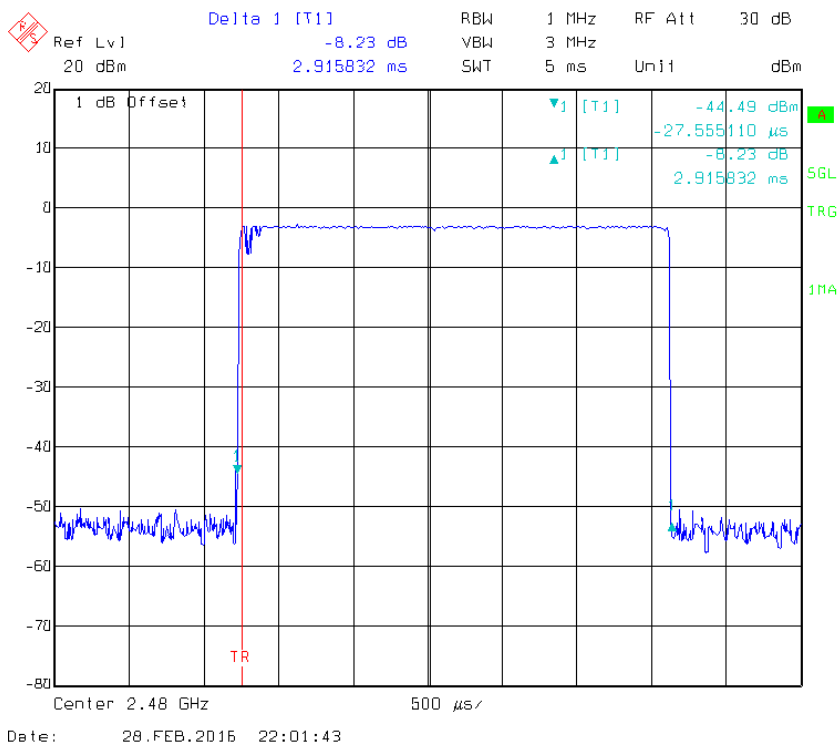


EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.403	0.129	0.4	Compliance
	Middle	0.397	0.127	0.4	Compliance
	High	0.399	0.128	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s				
2DH3	Low	1.659	0.265	0.4	Compliance
	Middle	1.659	0.265	0.4	Compliance
	High	1.659	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s				
2DH5	Low	2.916	0.311	0.4	Compliance
	Middle	2.916	0.311	0.4	Compliance
	High	2.916	0.311 </td <td>0.4</td> <td>Compliance</td>	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s				


2DH1: Low Channel

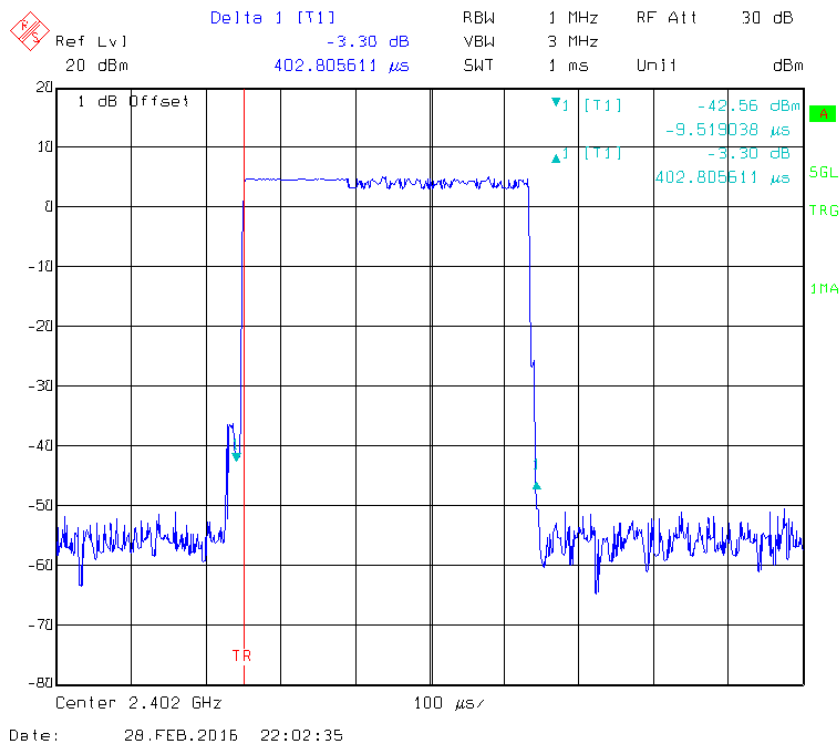


2DH1: Middle Channel

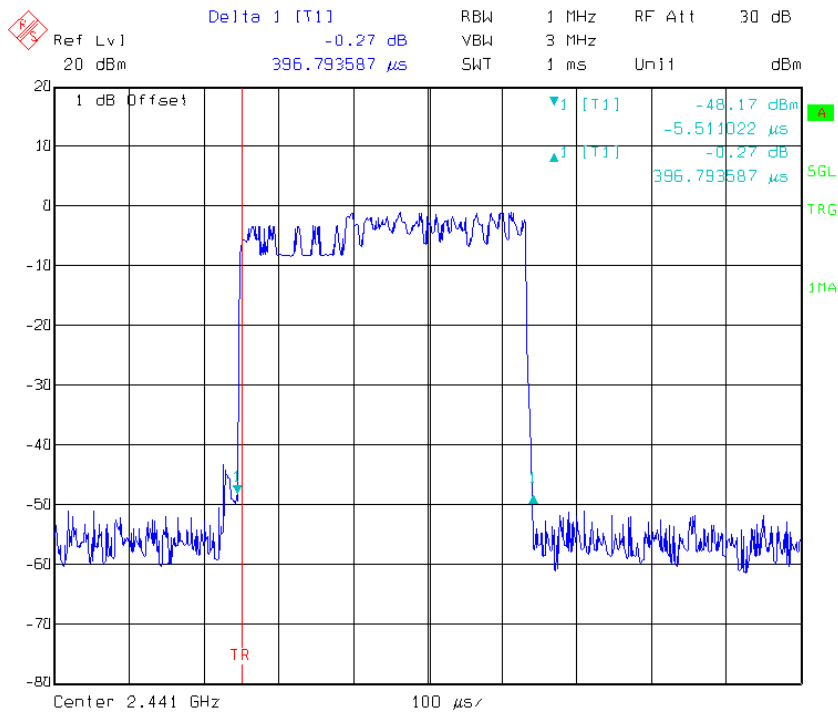

2DH1: High Channel

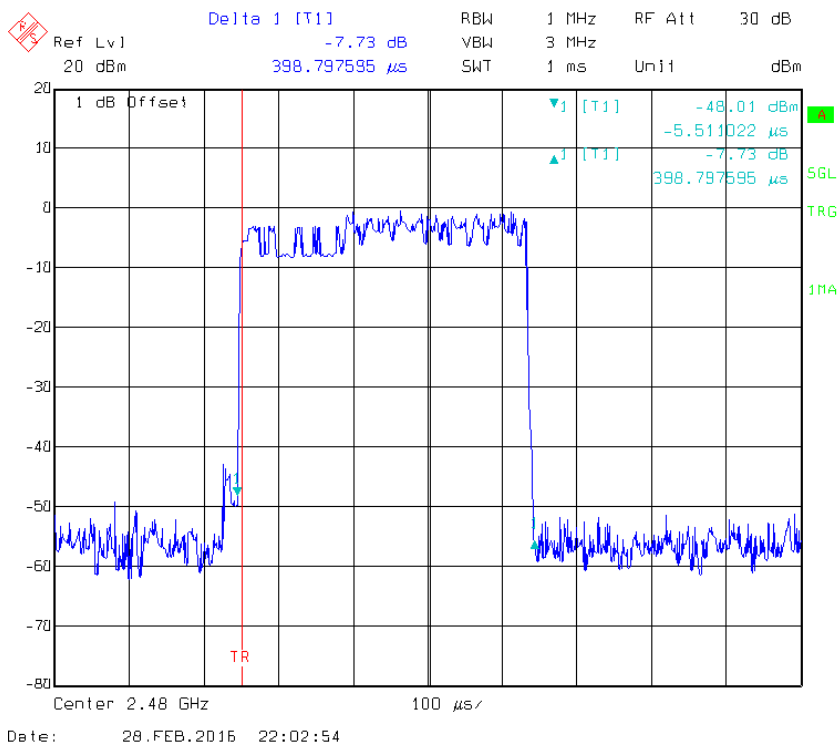


2DH3: Low Channel

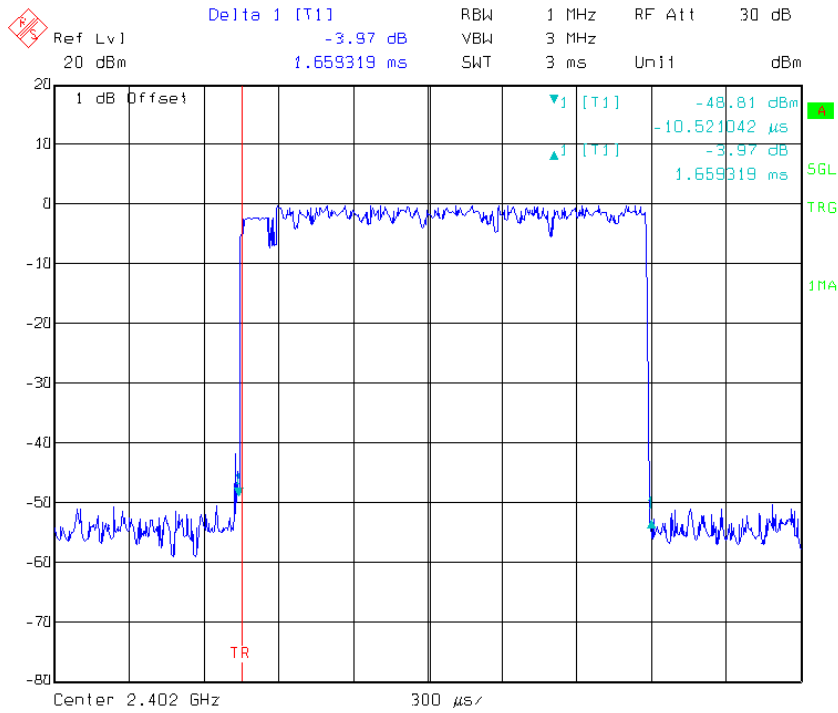


Date: 28.FEB.2016 22:03:29

2DH3: Middle Channel

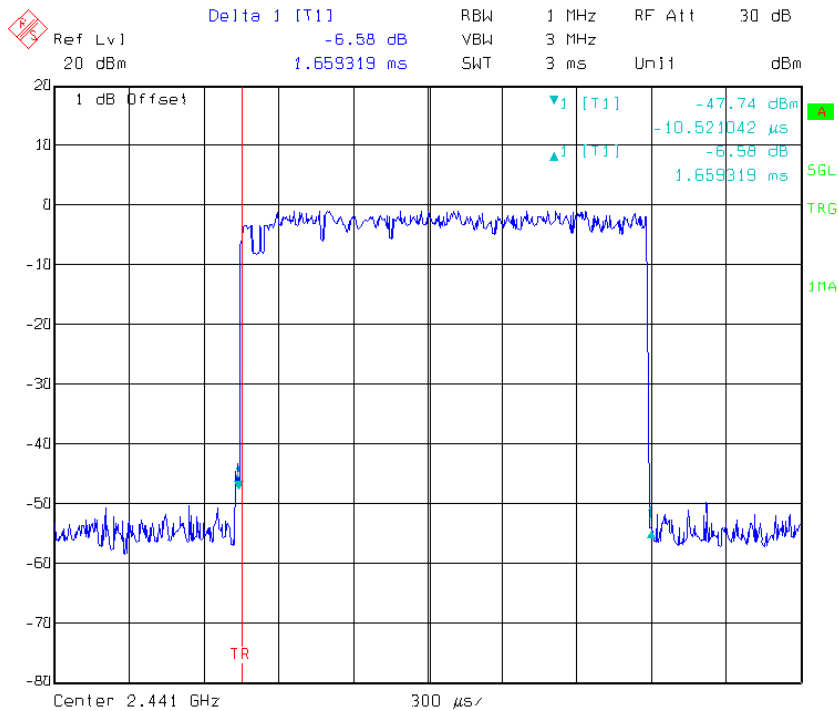


Date: 28.FEB.2016 22:03:38

2DH3: High Channel

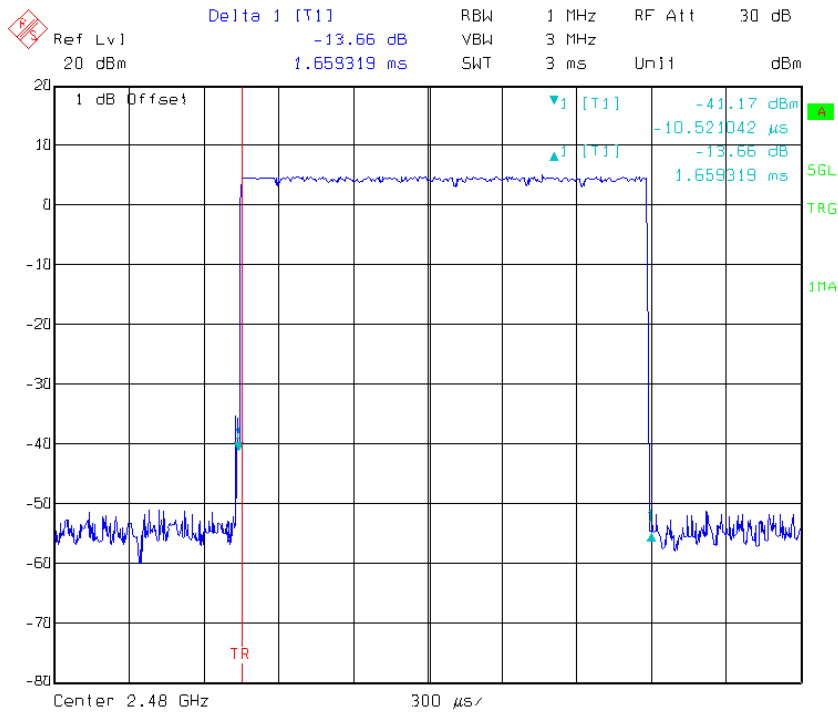


Date: 28.FEB.2016 22:03:47

2DH5: Low Channel

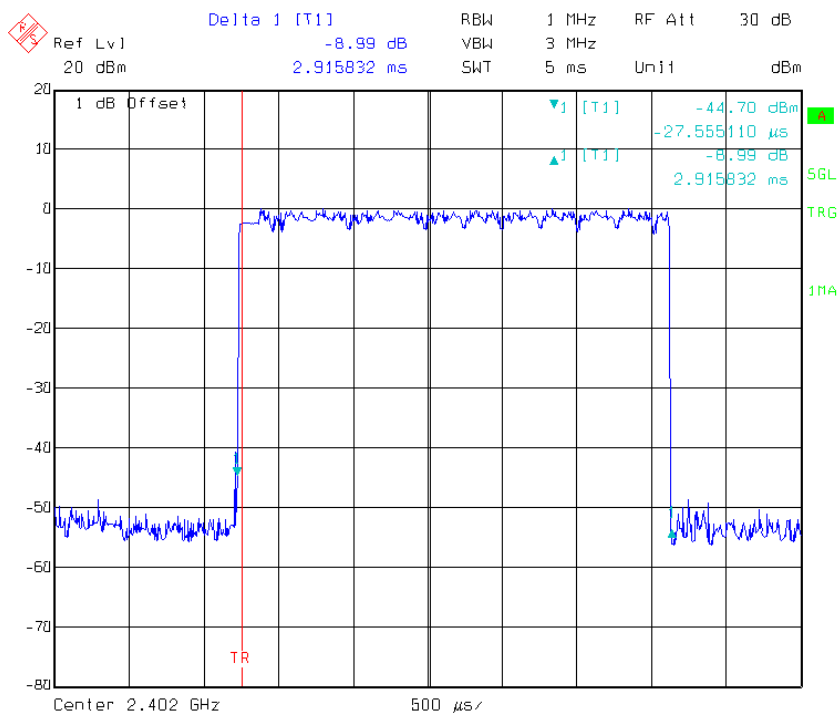


Date: 28.FEB.2016 22:04:30

2DH5: Middle Channel

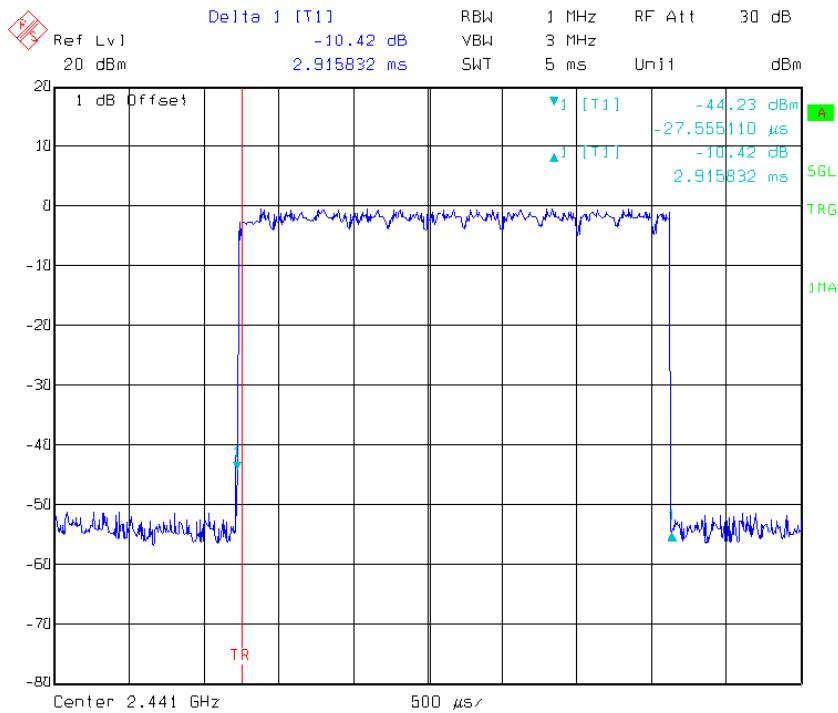


2DH5: High Channel

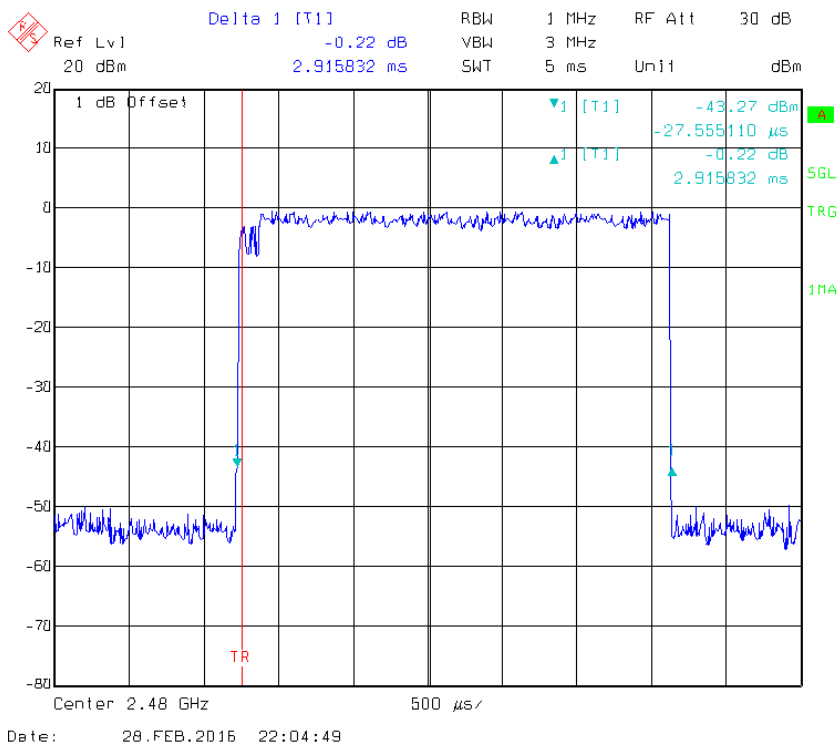


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.417	0.133	0.4	Compliance
	Middle	0.397	0.127	0.4	Compliance
	High	0.401	0.128	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s				
3DH3	Low	1.659	0.265	0.4	Compliance
	Middle	1.659	0.265	0.4	Compliance
	High	1.659	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s				
3DH5	Low	2.916	0.311	0.4	Compliance
	Middle	2.916	0.311	0.4	Compliance
	High	2.916	0.311	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s				


3DH1: Low Channel

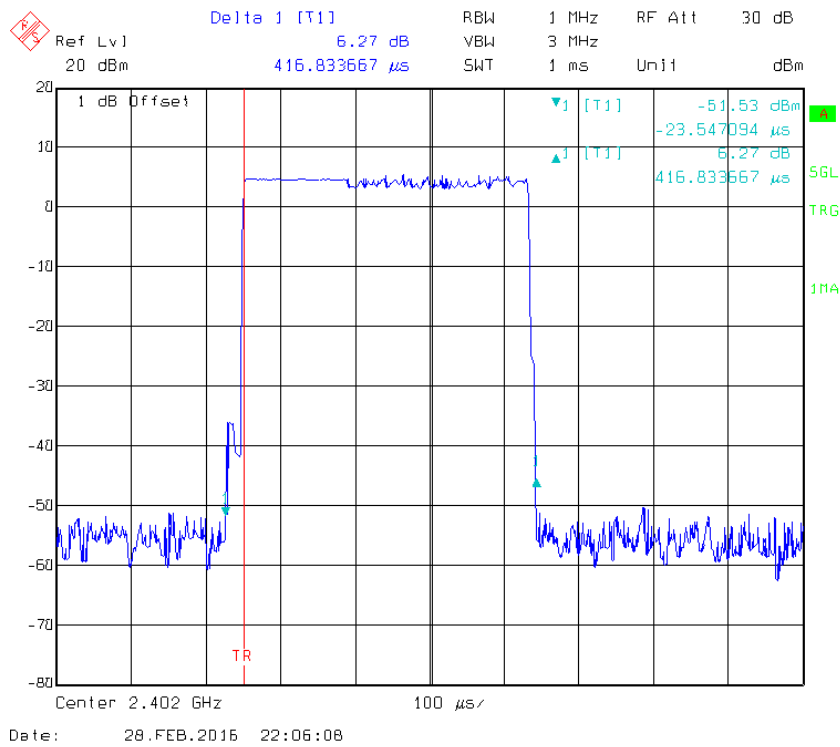


3DH1: Middle Channel

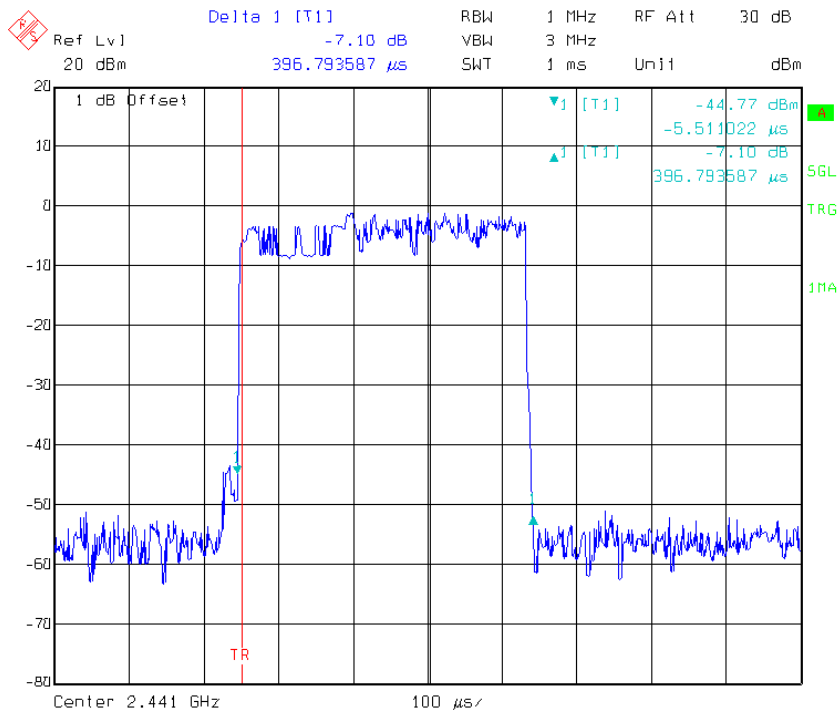


3DH1: High Channel

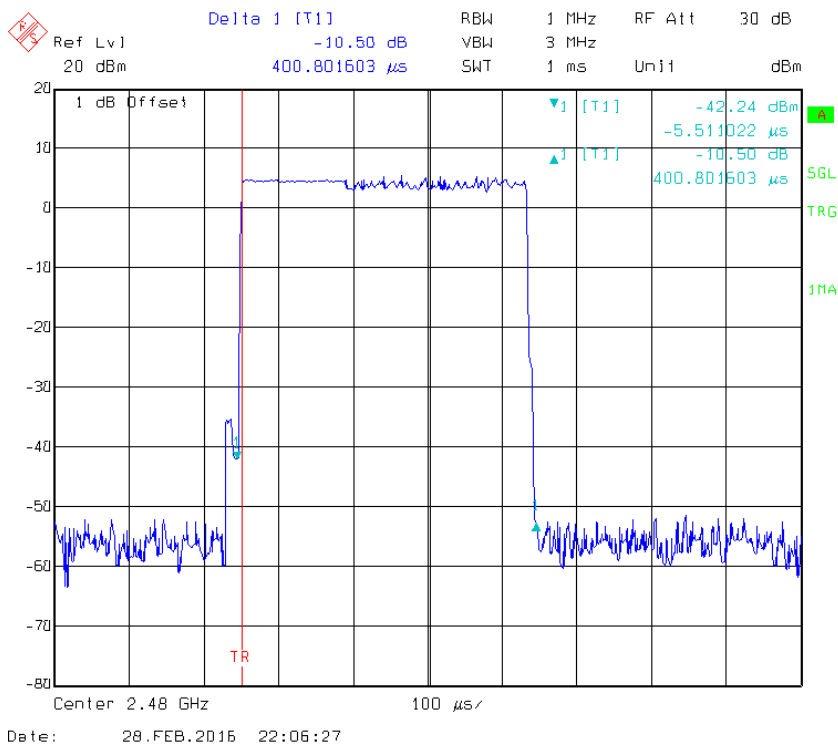


3DH3: Low Channel

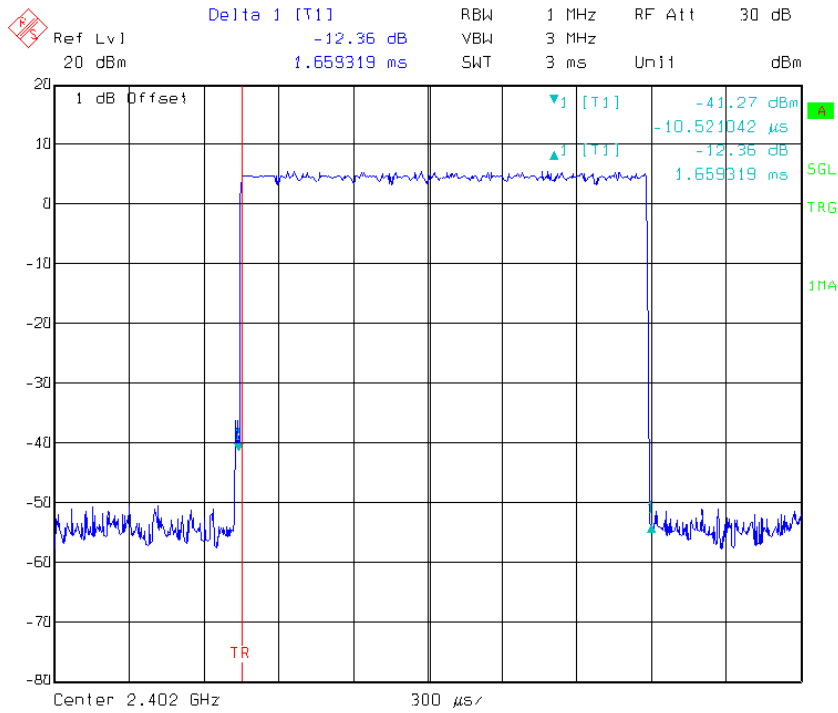

3DH3: Middle Channel

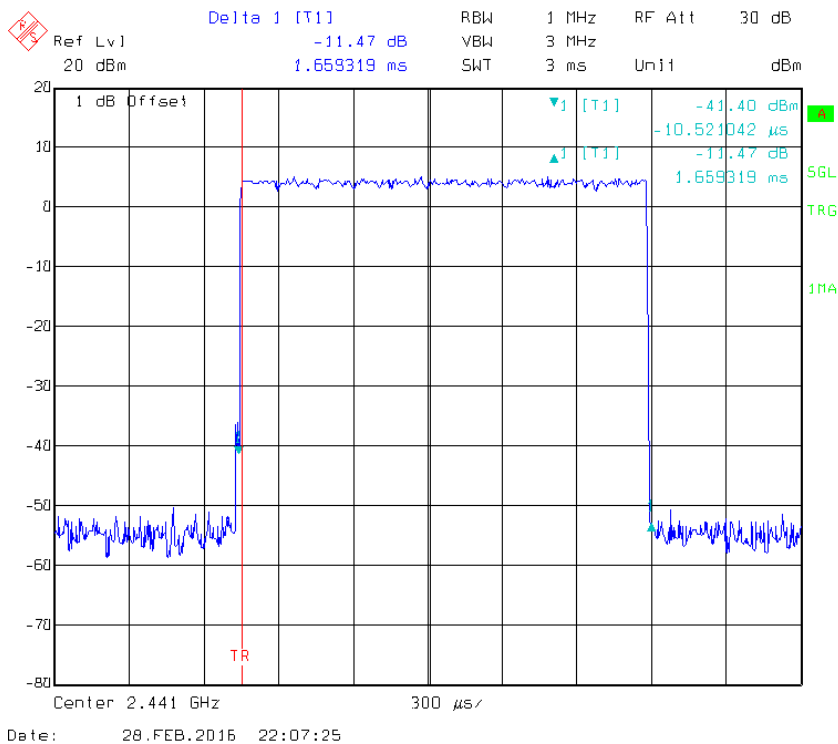


3DH3: High Channel

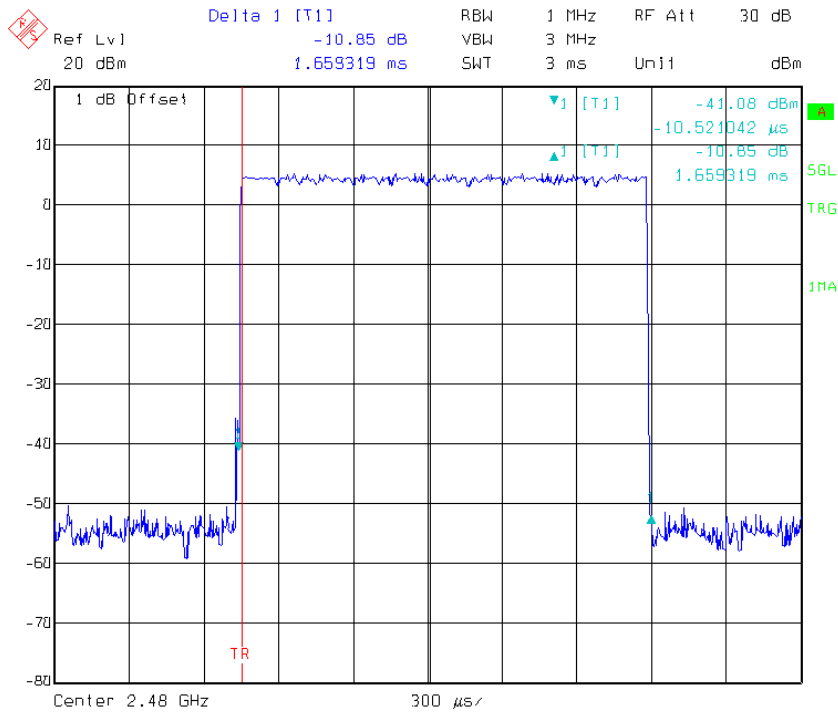


Date: 28.FEB.2016 22:07:34

3DH5: Low Channel

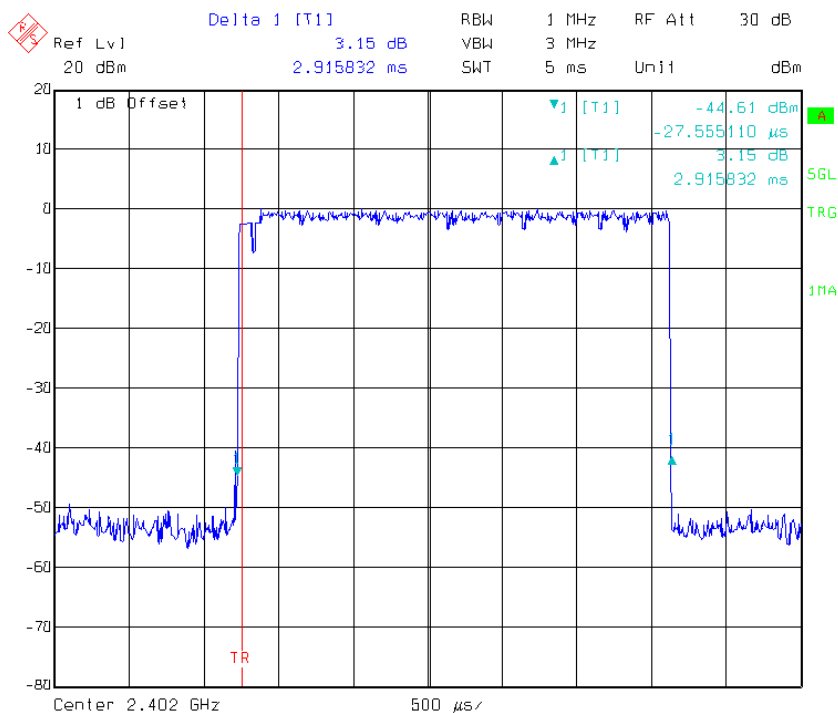


Date: 28.FEB.2016 22:08:30

3DH5: Middle Channel

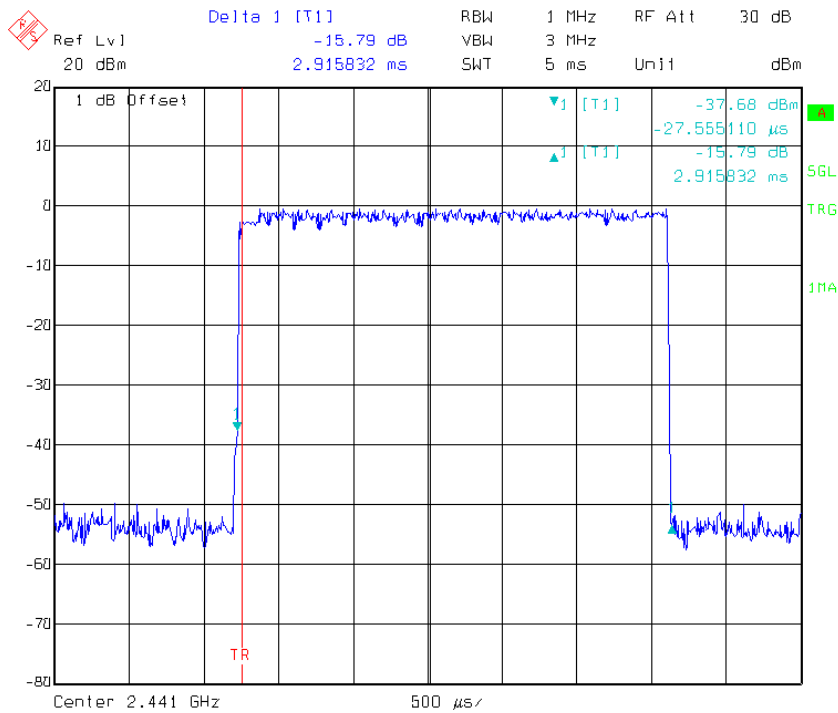

3DH5: High Channel

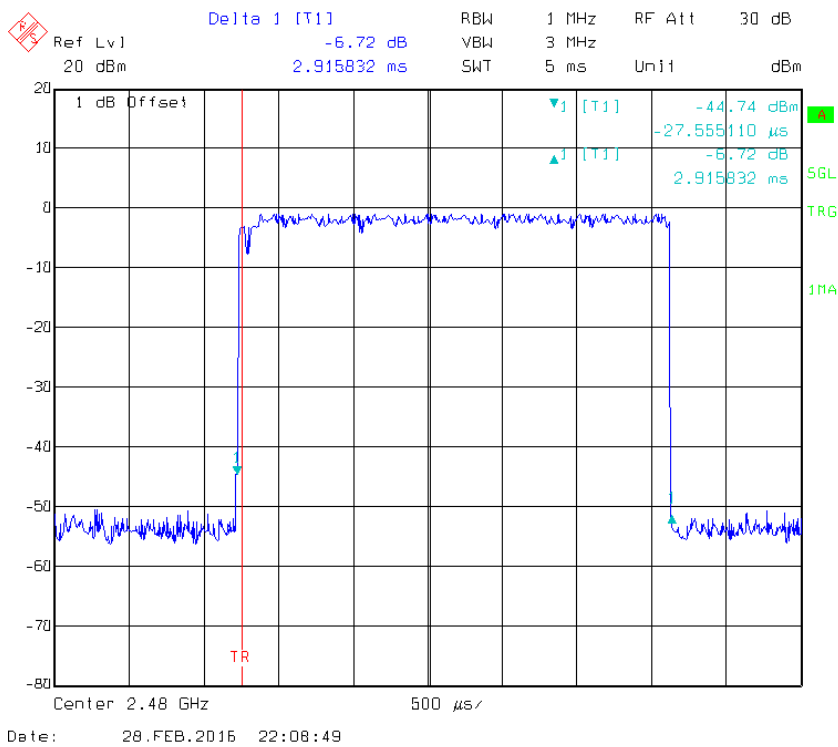

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* The testing was performed by Costa Dong on 2016-02-28.


Test Result: Compliance.

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	5.19	30
	Middle	2441	4.72	30
	High	2480	4.96	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	5.55	30
	Middle	2441	5.19	30
	High	2480	5.55	30
EDR Mode (8-DPSK)	Low	2402	5.93	30
	Middle	2441	5.55	30
	High	2480	5.93	30

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

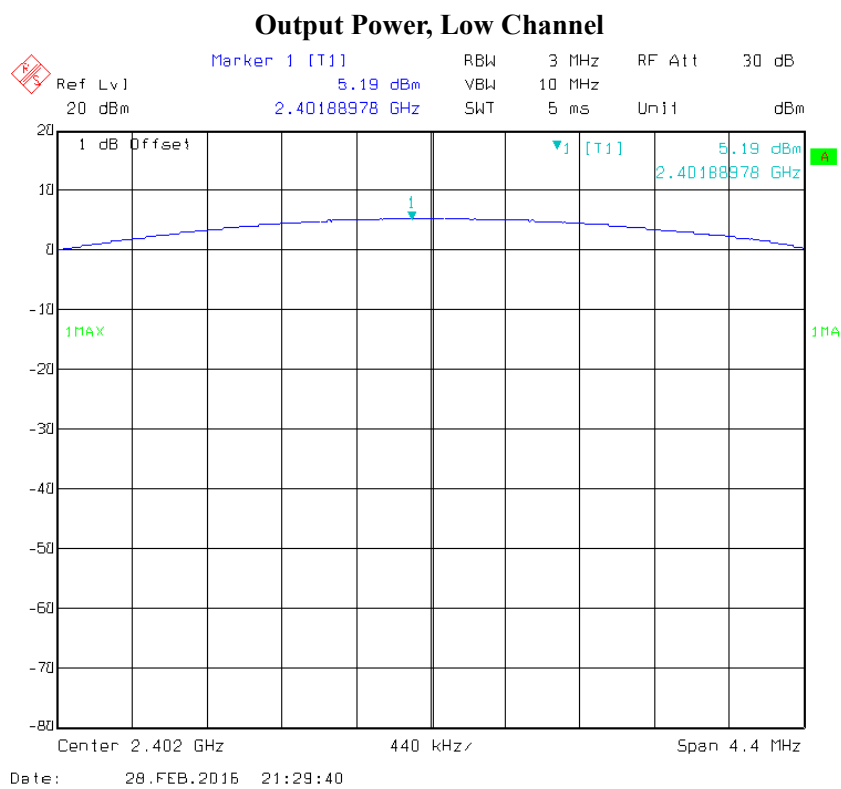

Output Power, Middle Channel

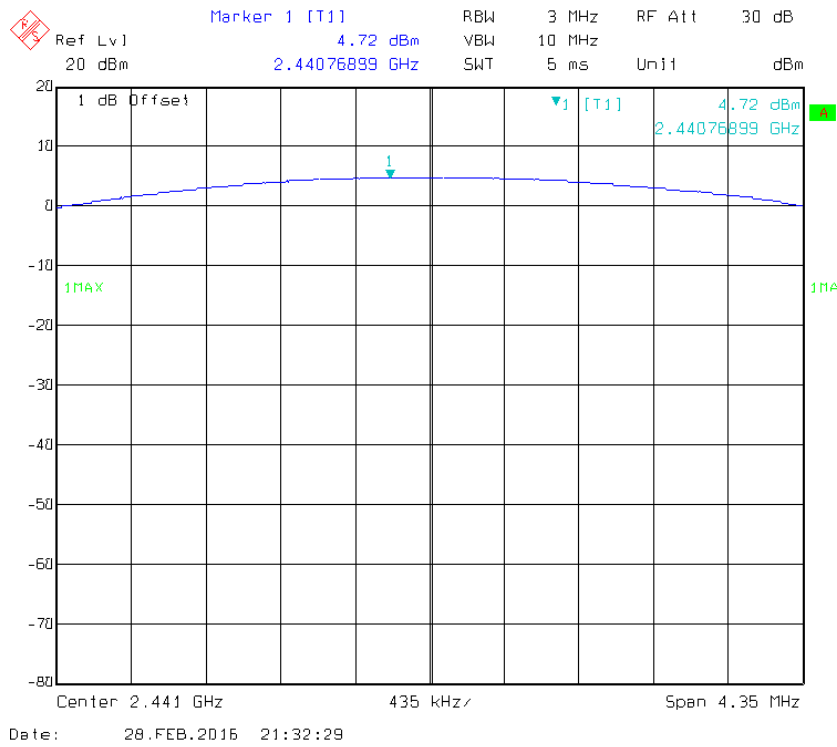


Output Power, High Channel

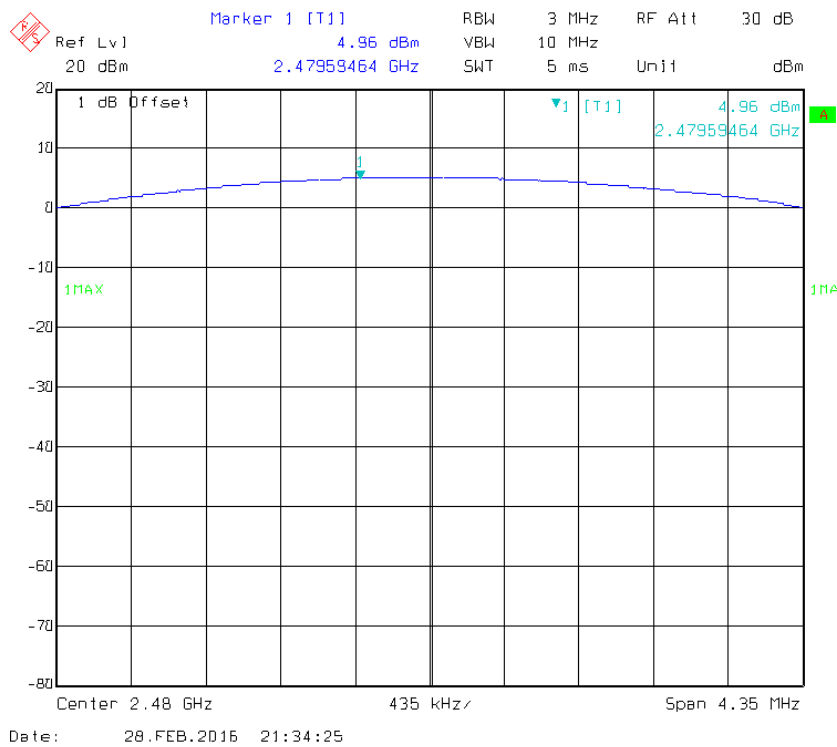


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low Channel

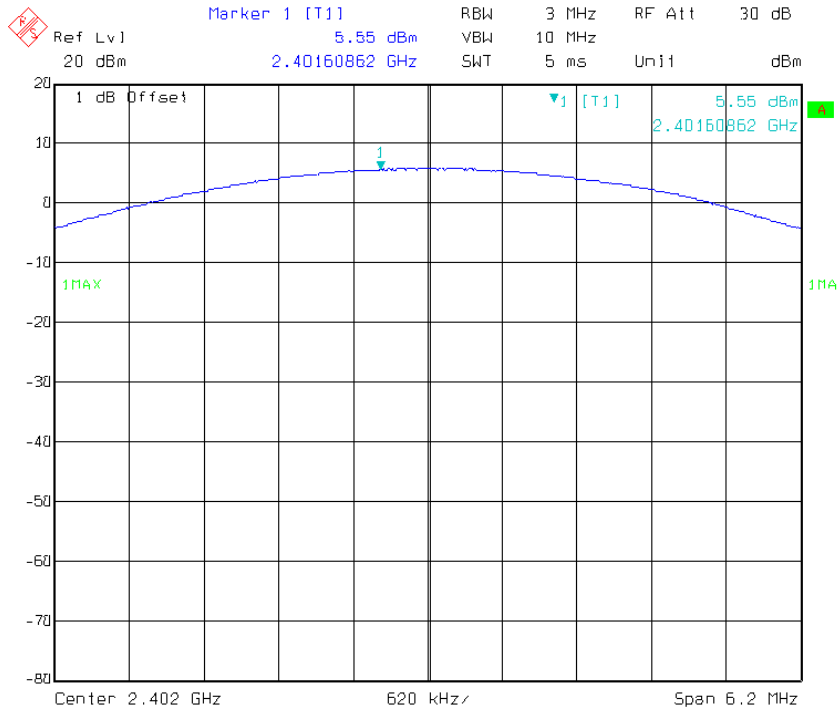


Date: 28.FEB.2016 21:37:20

Output Power, Middle Channel

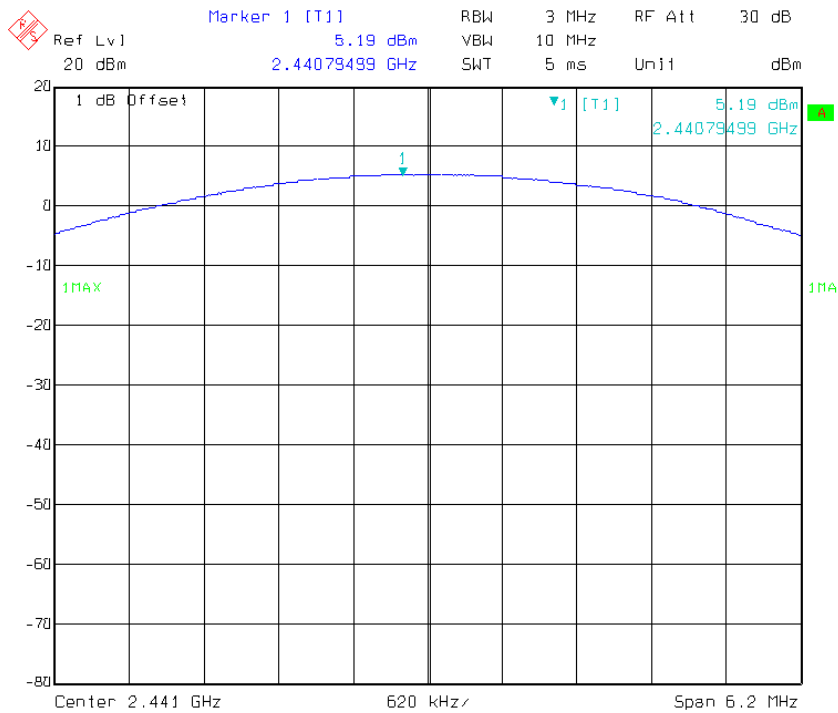


Date: 28.FEB.2016 21:40:07

Output Power, High Channel

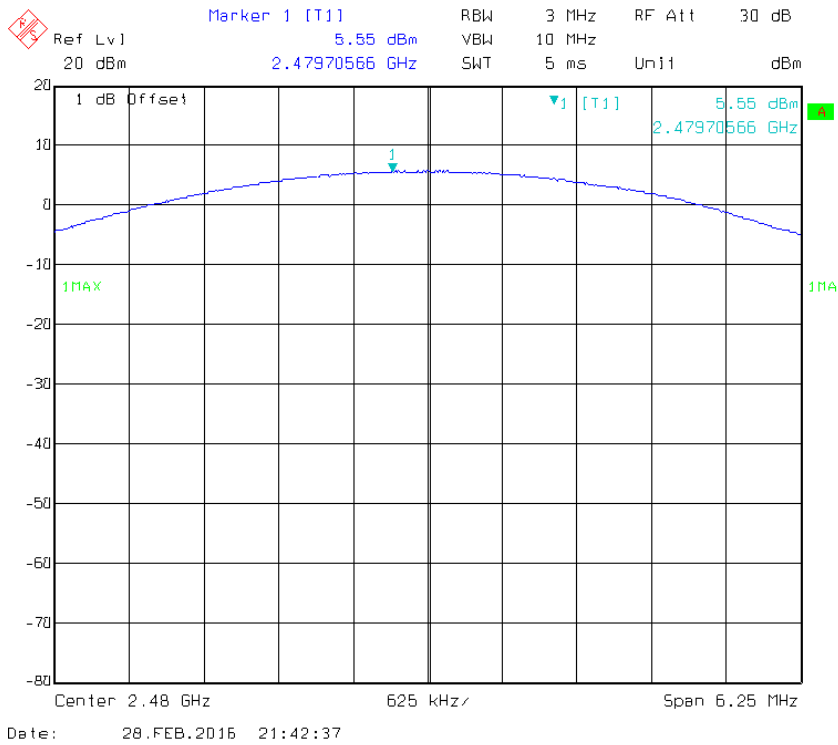


EDR Mode (8-DPSK):


Output Power, Low Channel

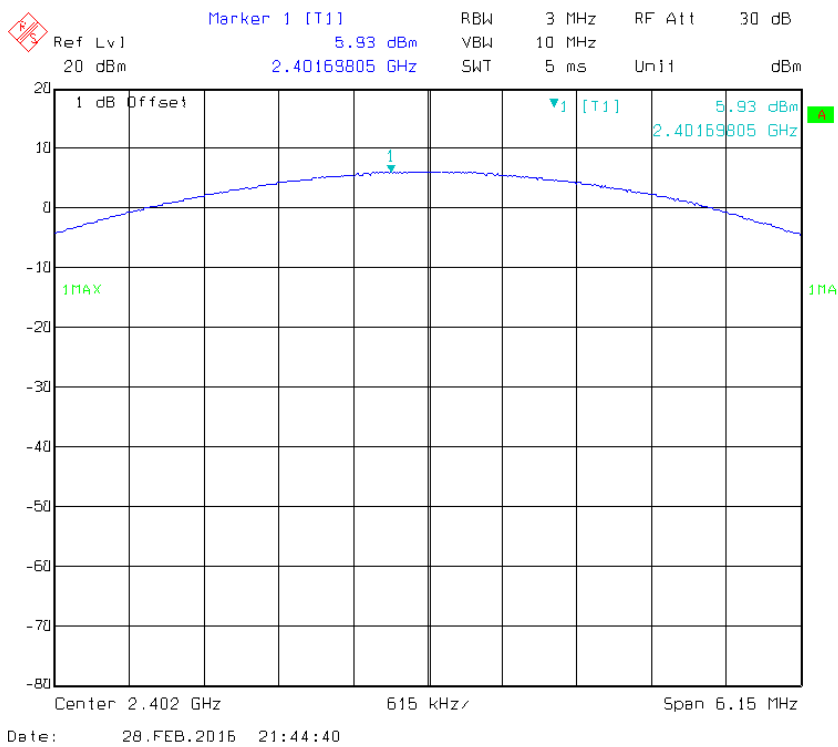

Output Power, Middle Channel

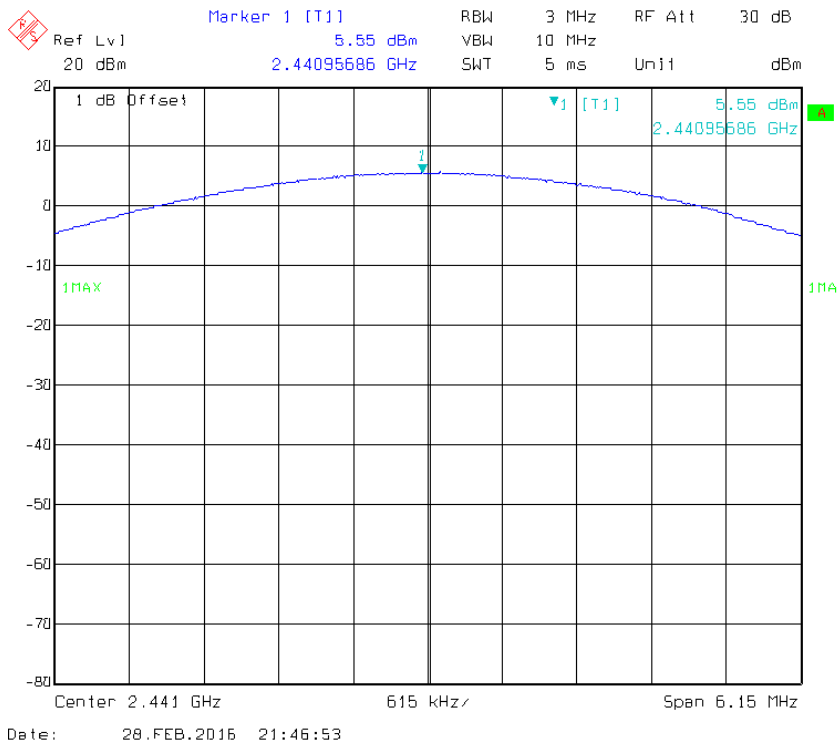

Output Power, High Channel

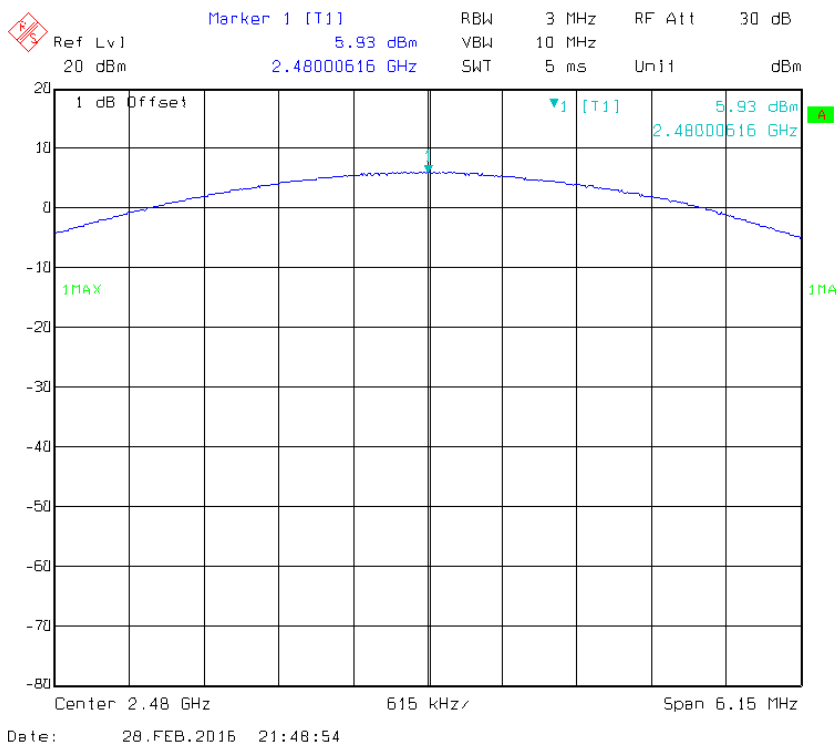

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	21.5 °C
Relative Humidity:	40 %
ATM Pressure:	102.4 kPa

* The testing was performed by Costa Dong on 2016-02-28.


Test Result: Compliance

BDR Mode (GFSK):


Band Edge, Left Side

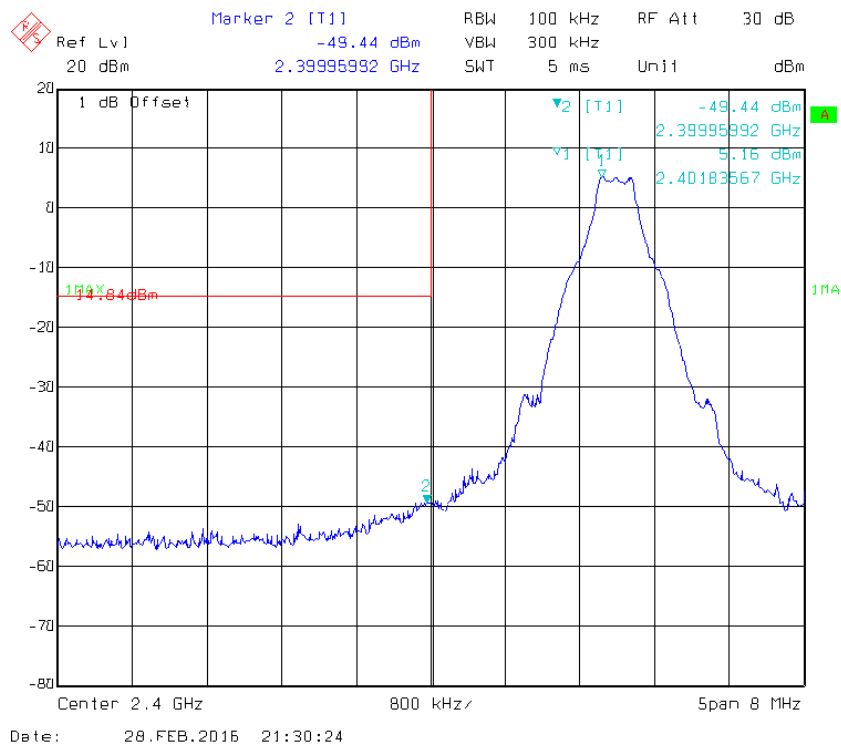


Band Edge, Right Side

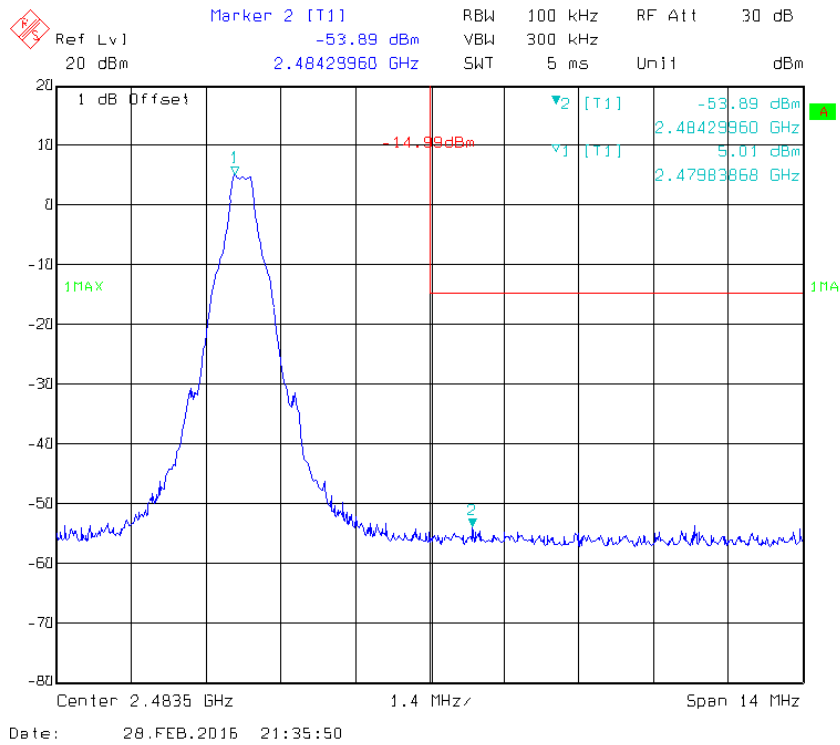

EDR Mode ($\pi/4$ -DQPSK):

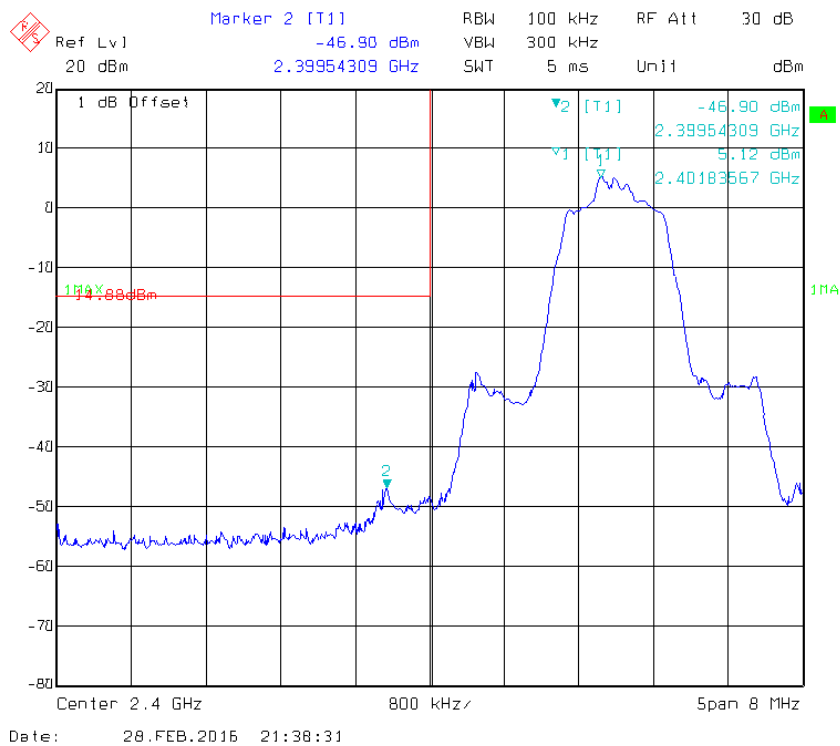


Band Edge, Right Side

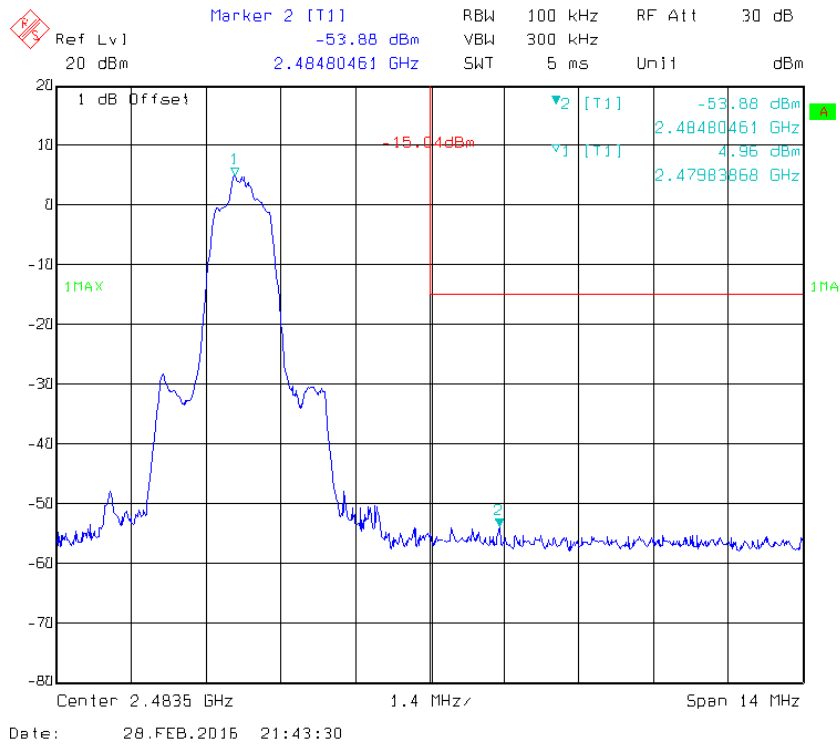


EDR Mode (8-DPSK):

Band Edge, Left Side

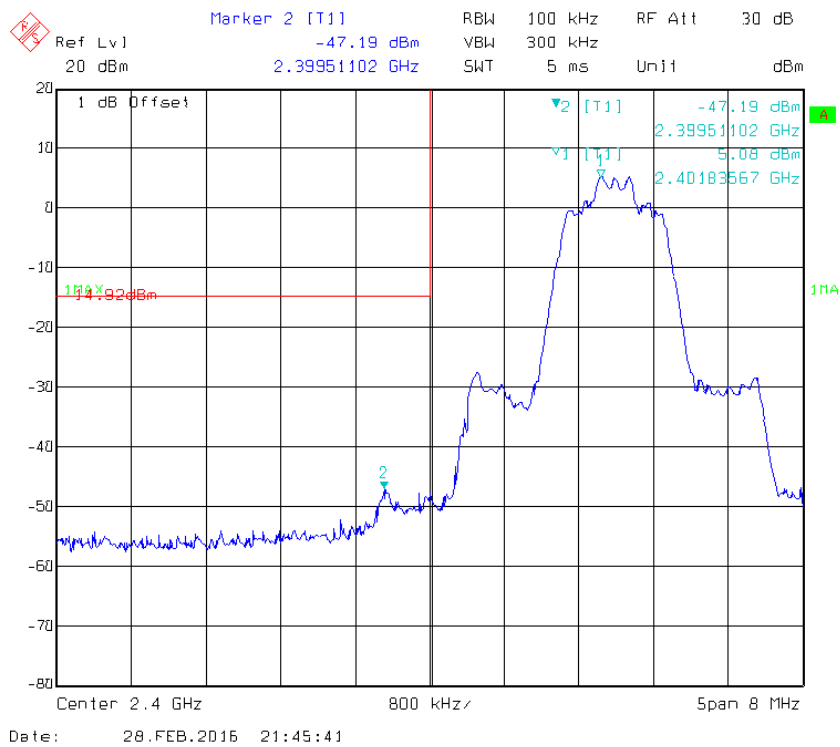

Band Edge, Right Side

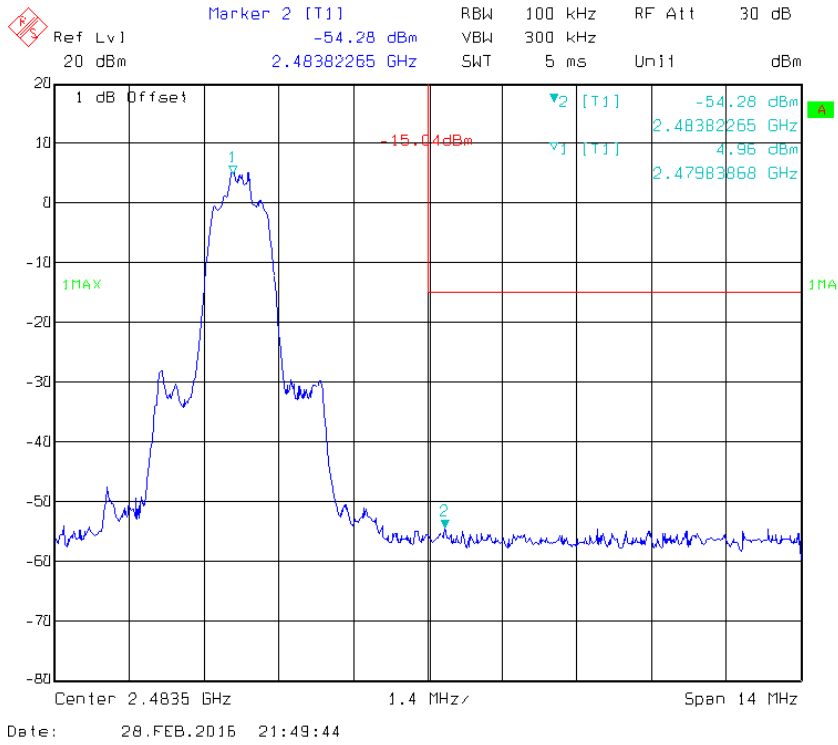

*****END OF REPORT*****