

# FCC TEST REPORT



Issued to

SGP Technologies S.A.

For

Smartphone

Model Name: BP1  
Trade Name: N/A  
Brand Name: blackphone  
FCC ID : 2ACDKBP1  
Standard: 47 CFR Part 22 Subpart H  
47 CFR Part 24 Subpart E  
47 CFR Part 27 Subpart L  
Test date: 2014-6-24 to 2014-7-14  
Issue date: 2014-7-17

By

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District,  
ShenZhen, GuangDong Province P. R. China 518101

Tested by Liu Zhisen  
Liu Zhisen  
(Test Engineer)

Date 2014.7.17



Approved by Zeng Dexin  
Zeng Dexin  
(Chief Engineer)

Date

2014.7.17

Reviewed by Peng Huarui  
Peng Huarui  
(Dept. Manager)

Date 2014.7.17

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



## TABLE OF CONTENTS

|                                                                   |          |
|-------------------------------------------------------------------|----------|
| <b>1. GENERAL INFORMATION .....</b>                               | <b>3</b> |
| 1.1 EUT DESCRIPTION.....                                          | 3        |
| 1.2 TEST STANDARDS AND RESULTS .....                              | 5        |
| 1.3 FACILITIES AND ACCREDITATIONS .....                           | 6        |
| <b>2. 47 CFR PART 2, PART 22H &amp; 24E 27L REQUIREMENTS.....</b> | <b>7</b> |
| 2.1 CONDUCTED RF OUTPUT POWER .....                               | 7        |
| 2.2 PEAK TO AVERAGE RADIO .....                                   | 19       |
| 2.3 99% OCCUPIED BANDWIDTH .....                                  | 26       |
| 2.4 FREQUENCY STABILITY .....                                     | 55       |
| 2.5 CONDUCTED OUT OF BAND EMISSIONS .....                         | 64       |
| 2.6 BAND EDGE.....                                                | 114      |
| 2.7 TRANSMITTER RADIATED POWER (EIRP/ERP) .....                   | 132      |
| 2.8 RADIATED OUT OF BAND EMISSIONS .....                          | 146      |

| Change History |               |                   |
|----------------|---------------|-------------------|
| Issue          | Date          | Reason for change |
| 1.0            | July 17, 2014 | First edition     |
|                |               |                   |

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type..... : Smartphone  
Serial No..... : (n.a, marked #1 by test site)  
Hardware Version ..... : 1.0  
Software Version ..... : V07  
Applicant..... : SGP Technologies S.A.  
Rue du 31 Decembre, 47, Geneva, Switzerland.  
Manufacturer ..... : Tinno Mobile Technology Corp.  
4/F.,H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East  
Road.,Nan Shan District,Shenzhen,P.R.China.  
Frequency Range ..... : GSM 850MHz:  
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);  
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)  
GSM 1900MHz:  
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);  
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)  
WCDMA 850MHz  
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);  
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)  
WCDMA 1900MHz  
Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);  
Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)  
WCDMA 1700MHz  
Tx: 1712.4 - 1752.6MHz (at intervals of 200kHz);  
Rx: 2112.4 - 2152.6MHz (at intervals of 200kHz)  
Modulation Type ..... : GSM,GPRS Mode with GMSK Modulation  
EDGE Mode with 8PSK Modulation  
WCDMA Mode with QPSK Modulation  
HSDPA Mode with QPSK Modulation  
HSUPA Mode with QPSK Modulation  
HSPA+ Mode with QPSK Modulation  
Multislot Class ..... : GPRS: Multislot Class 12,EGPRS: Multislot Class 12  
Antenna Type ..... : PIFA Antenna  
Emission Designators..... : GSM 850:243KGXW,GSM 1900:245KGXW  
EGPRS850:251KG7W, EGPRS1900:245KG7W,  
WCDMA 850:4M15F9W ,WCDMA1900:4M19F9W  
WCDMA1700:4M17F9W

**Note 1:** The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula  $F(n)=824.2+0.2*(n-128)$ ,  $128 \leq n \leq 251$ ; the lowest, middle,

highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

**Note 2:** The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula  $F(n)=1850.2+0.2*(n-512)$ ,  $512 \leq n \leq 810$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

**Note 3:** The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula  $F(n)=826.4+0.2*(n-4132)$ ,  $4132 \leq n \leq 4233$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175 (835MHz) and 4233 (846.6MHz).

**Note 4:** The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula  $F(n)=1852.4+0.2*(n-9262)$ ,  $9262 \leq n \leq 9538$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

**Note 5:** The transmitter (Tx) frequency arrangement of the WCDMA 1700MHz band used by the EUT can be represented with the formula  $F(n)=1712.4+0.2*(n-1312)$ ,  $1312 \leq n \leq 1513$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1412 (1732.4MHz) and 1513 (1752.6MHz).

**Note 6:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24, 27 for the EUT FCC ID Certification:

| No. | Identity                            | Document Title                                                                |
|-----|-------------------------------------|-------------------------------------------------------------------------------|
| 1   | 47 CFR Part 2<br>(10-1-13 Edition)  | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| 2   | 47 CFR Part 22<br>(10-1-13 Edition) | Public Mobile Services                                                        |
| 3   | 47 CFR Part 24<br>(10-1-13 Edition) | Personal Communications Services                                              |
| 4   | 47 CFR Part 27<br>(10-1-13 Edition) | Miscellaneous Wireless Communications Services                                |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section                                       | Description                           | Result |
|-----|-----------------------------------------------|---------------------------------------|--------|
| 1   | 2.1046                                        | Conducted RF Output Power             | PASS   |
| 2.  | 24.232(d) ,27.50(d)(5)                        | Peak to average radio                 | PASS   |
| 2   | 2.1049,22.917<br>24.238, 27.53(g)             | 99% Occupied Bandwidth                | PASS   |
| 3   | 2.1055,22.355<br>24.235,27.54                 | Frequency Stability                   | PASS   |
| 4   | 2.1051,2.1057<br>22.917,24.238,<br>27.53(g)   | Conducted Out of Band Emissions       | PASS   |
| 5   | 2.1051,2.1057<br>22.917,24.238<br>27.53(g)(h) | Band Edge                             | PASS   |
| 6   | 22.913,24.232<br>27.50(d)(4)                  | Transmitter Radiated Power (EIPR/ERP) | PASS   |
| 7   | 2.1053,2.1057<br>22.917,24.238<br>27.53(g)    | Radiated Out of Band Emissions        | PASS   |

**NOTE:** Measurement method according to TIA/EIA 603.D-2010

## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District, ShenZhen, GuangDong Province,P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |         |
|-----------------------------|---------|
| Temperature (°C):           | 15 - 35 |
| Relative Humidity (%):      | 30 -60  |
| Atmospheric Pressure (kPa): | 86-106  |

## 2. 47 CFR PART 2, PART 22H & 24E 27L REQUIREMENTS


### 2.1 Conducted RF Output Power

#### 2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 2.1.2 Test Description

##### 1. Test Setup:

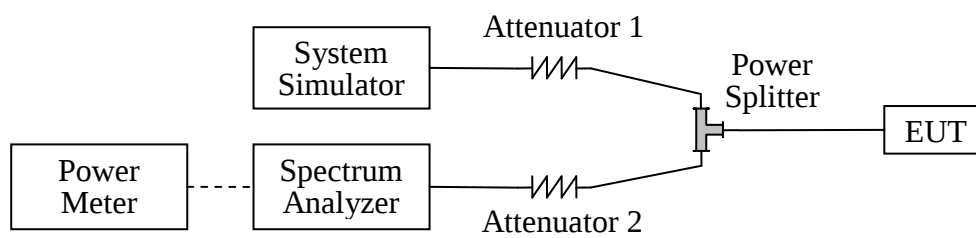

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

##### 2. Equipments List:

| Description       | Manufacturer | Model  | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|--------|------------|------------|------------|
| System Simulator  | Agilent      | E5515C | GB43130131 | 2014.02.26 | 2015.02.25 |
| Spectrum Analyzer | Agilent      | E7405A | US44210471 | 2014.02.26 | 2015.02.25 |
| Power Meter       | Agilent      | E4418B | GB43318055 | 2014.02.26 | 2015.02.25 |
| Power Sensor      | Agilent      | 8482A  | MY41091706 | 2014.02.26 | 2015.02.25 |
| Power Splitter    | Weinschel    | 1506A  | NW521      | 2014.02.26 | 2015.02.25 |
| Attenuator 1      | Resnet       | 20dB   | (n.a.)     | 2014.02.26 | 2015.02.25 |
| Attenuator 2      | Resnet       | 3dB    | (n.a.)     | 2014.02.26 | 2015.02.25 |

### 2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

#### 1. GSM Model Test Verdict:

| Band          | Channel | Frequency (MHz) | Measured Output Power |                                 | Limit dBm | Verdict     |
|---------------|---------|-----------------|-----------------------|---------------------------------|-----------|-------------|
|               |         |                 | dBm                   | Refer to Plot                   |           |             |
| GSM 850MHz    | 128     | 824.2           | 33.24                 | Plot A1 to A3                   | 35        | <u>PASS</u> |
|               | 190     | 836.6           | 33.20                 |                                 |           | <u>PASS</u> |
|               | 251     | 848.8           | 33.20                 |                                 |           | <u>PASS</u> |
| GSM 1900MHz   | 512     | 1850.2          | 29.45                 | Plot B1 to B3                   | 32        | <u>PASS</u> |
|               | 661     | 1880.0          | 29.69                 |                                 |           | <u>PASS</u> |
|               | 810     | 1909.8          | 29.60                 |                                 |           | <u>PASS</u> |
| GPRS 850MHz   | 128     | 824.2           | 29.85                 | Plot C1 to C3 <sup>Note 1</sup> | 35        | <u>PASS</u> |
|               | 190     | 836.6           | 29.98                 |                                 |           | <u>PASS</u> |
|               | 251     | 848.8           | 30.04                 |                                 |           | <u>PASS</u> |
| GPRS 1900MHz  | 512     | 1850.2          | 26.37                 | Plot D1 to D3 <sup>Note 1</sup> | 32        | <u>PASS</u> |
|               | 661     | 1880.0          | 26.50                 |                                 |           | <u>PASS</u> |
|               | 810     | 1909.8          | 26.27                 |                                 |           | <u>PASS</u> |
| EGPRS 850MHz  | 128     | 824.2           | 30.08                 | Plot E1 to E3 <sup>Note 1</sup> | 35        | <u>PASS</u> |
|               | 190     | 836.6           | 30.18                 |                                 |           | <u>PASS</u> |
|               | 251     | 848.8           | 30.23                 |                                 |           | <u>PASS</u> |
| EGPRS 1900MHz | 512     | 1850.2          | 26.41                 | Plot F1 to F3 <sup>Note 1</sup> | 32        | <u>PASS</u> |
|               | 661     | 1880.0          | 26.56                 |                                 |           | <u>PASS</u> |
|               | 810     | 1909.8          | 26.31                 |                                 |           | <u>PASS</u> |


**Note 1:** For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.

## 2. WCDMA Model Test Verdict:


| Item       | band                                                                                        | WCDMA 850 |       |       | WCDMA 1900 |       |       |
|------------|---------------------------------------------------------------------------------------------|-----------|-------|-------|------------|-------|-------|
|            | ARFCN                                                                                       | 4132      | 4175  | 4233  | 9262       | 9400  | 9538  |
|            | subtest                                                                                     | dBm       |       |       | dBm        |       |       |
| 5.2(WCDMA) | non                                                                                         | 24.23     | 23.83 | 24.12 | 23.28      | 23.65 | 23.37 |
| HSDPA      | 1                                                                                           | 23.88     | 23.45 | 23.72 | 23.32      | 23.68 | 23.51 |
|            | 2                                                                                           | 23.87     | 23.46 | 23.71 | 23.31      | 23.67 | 23.49 |
|            | 3                                                                                           | 23.36     | 22.96 | 23.21 | 22.81      | 23.16 | 23.00 |
|            | 4                                                                                           | 23.38     | 22.95 | 23.20 | 22.82      | 23.17 | 23.01 |
| HSUPA      | 1                                                                                           | 24.22     | 23.93 | 24.16 | 23.34      | 23.66 | 23.38 |
|            | 2                                                                                           | 22.21     | 21.94 | 22.15 | 21.34      | 21.65 | 21.36 |
|            | 3                                                                                           | 23.23     | 22.93 | 23.17 | 22.33      | 22.64 | 22.37 |
|            | 4                                                                                           | 22.22     | 21.93 | 22.16 | 21.35      | 21.66 | 21.37 |
|            | 5                                                                                           | 24.21     | 23.91 | 24.15 | 23.33      | 23.66 | 23.37 |
| HSPA+      | 1                                                                                           | 23.82     | 23.43 | 23.75 | 23.22      | 23.67 | 23.36 |
| Note:      | The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter. |           |       |       |            |       |       |

| Item       | band                                                                                        | WCDMA 1700 |       |       |
|------------|---------------------------------------------------------------------------------------------|------------|-------|-------|
|            | ARFCN                                                                                       | 1312       | 1412  | 1513  |
|            | subtest                                                                                     | dBm        |       |       |
| 5.2(WCDMA) | non                                                                                         | 23.69      | 23.75 | 23.52 |
| HSDPA      | 1                                                                                           | 23.69      | 23.80 | 23.52 |
|            | 2                                                                                           | 23.67      | 23.77 | 23.50 |
|            | 3                                                                                           | 23.18      | 23.29 | 23.02 |
|            | 4                                                                                           | 23.19      | 23.30 | 23.03 |
| HSUPA      | 1                                                                                           | 23.69      | 23.78 | 23.55 |
|            | 2                                                                                           | 21.68      | 21.77 | 21.53 |
|            | 3                                                                                           | 22.69      | 22.79 | 22.54 |
|            | 4                                                                                           | 21.70      | 21.78 | 21.55 |
|            | 5                                                                                           | 23.38      | 23.77 | 23.54 |
| HSPA+      | 1                                                                                           | 23.66      | 23.71 | 23.50 |
| Note       | The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter. |            |       |       |


### 3. GSM Model Test Plots:

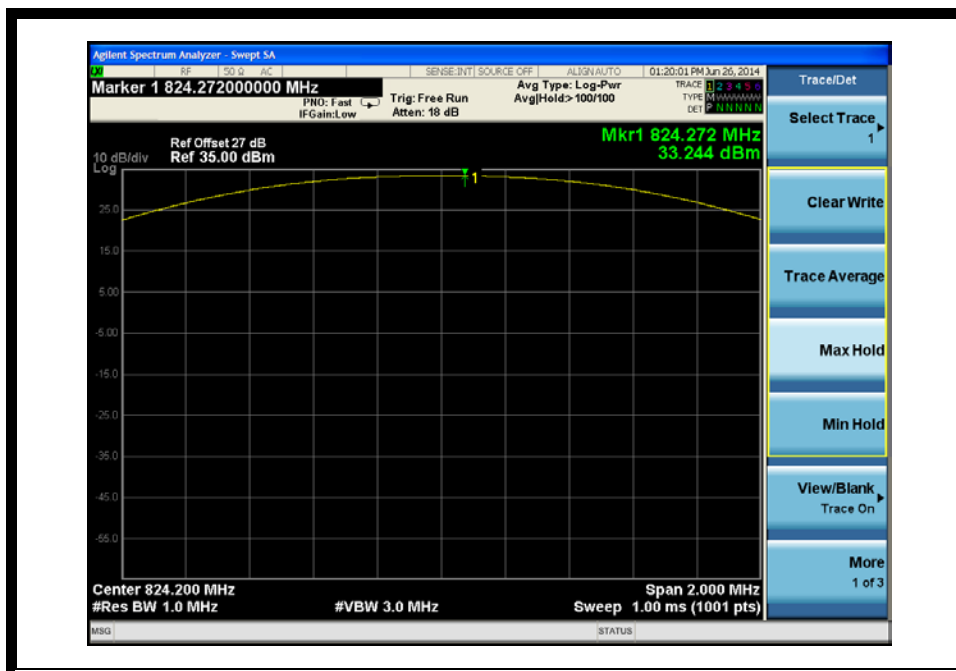


(Plot A1:GSM 850MHz Channel = 128)

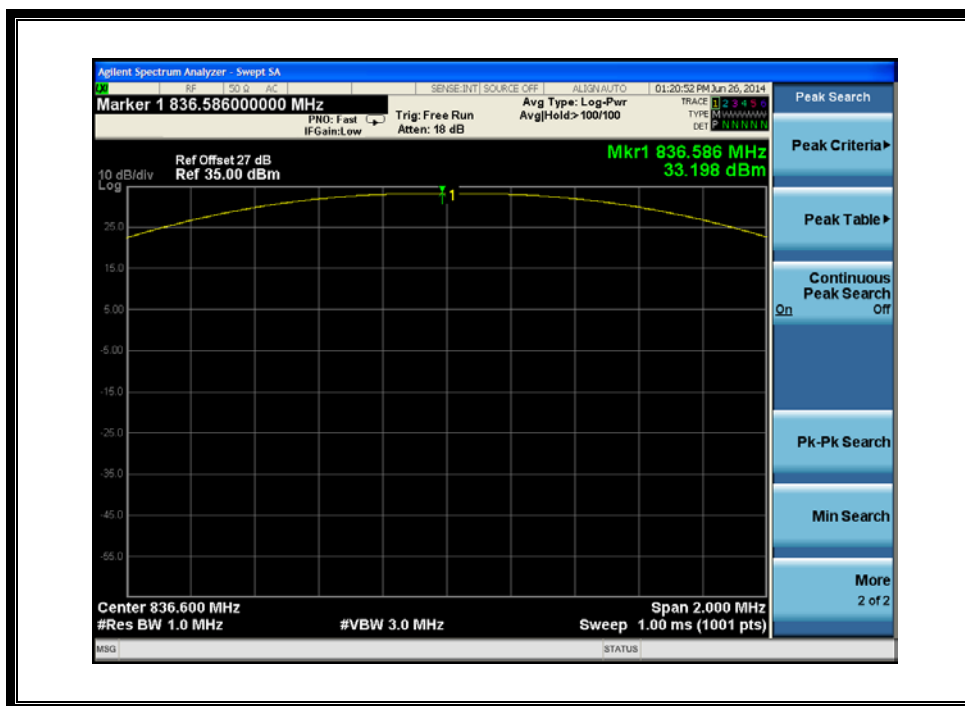


(Plot A2:GSM 850MHz Channel = 190)

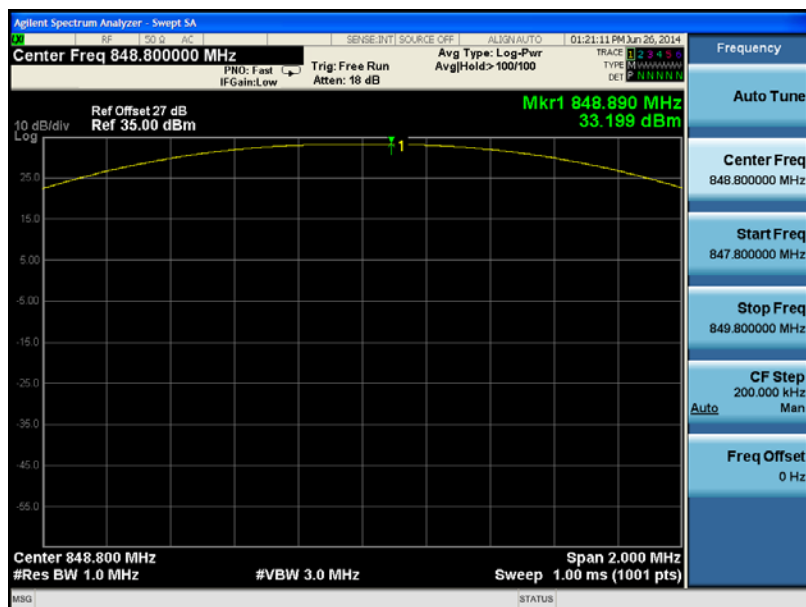


(Plot A3:GSM 850MHz Channel = 251)

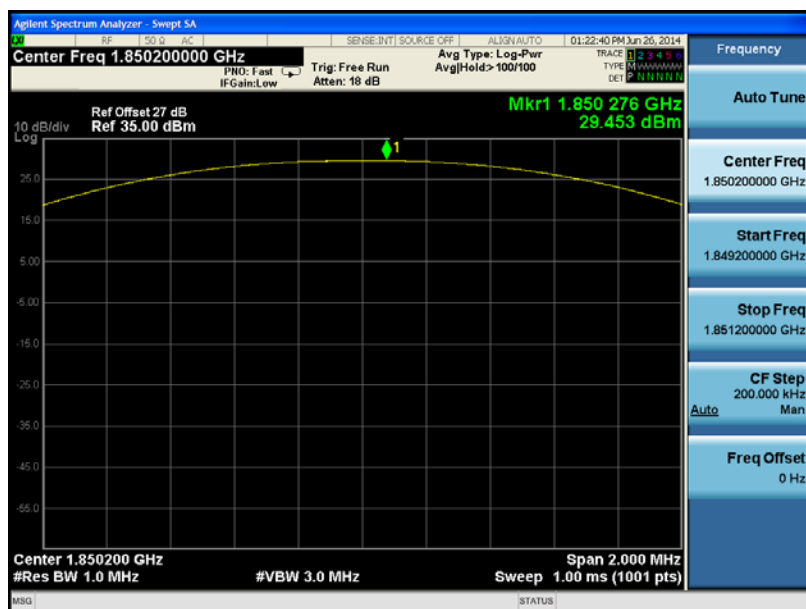


(Plot B1: GSM 1900MHz Channel = 512)

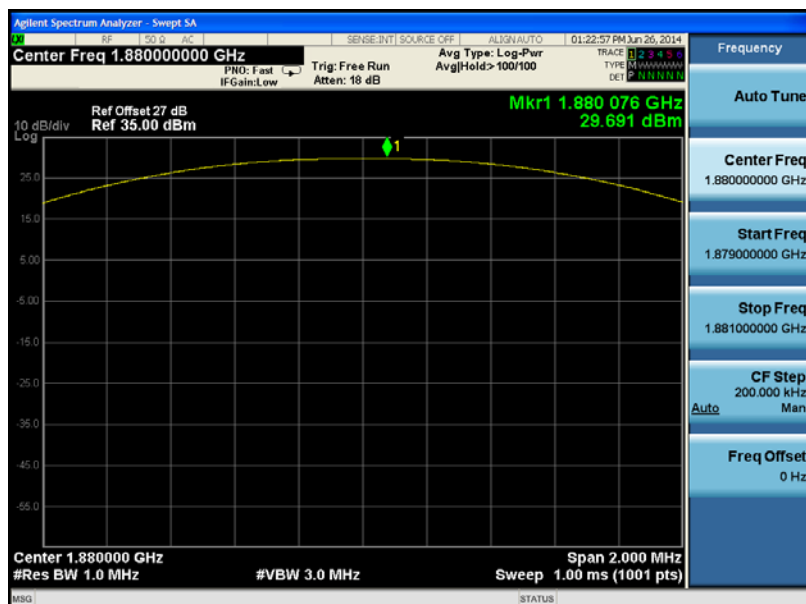


(Plot B2: GSM 1900MHz Channel = 661)

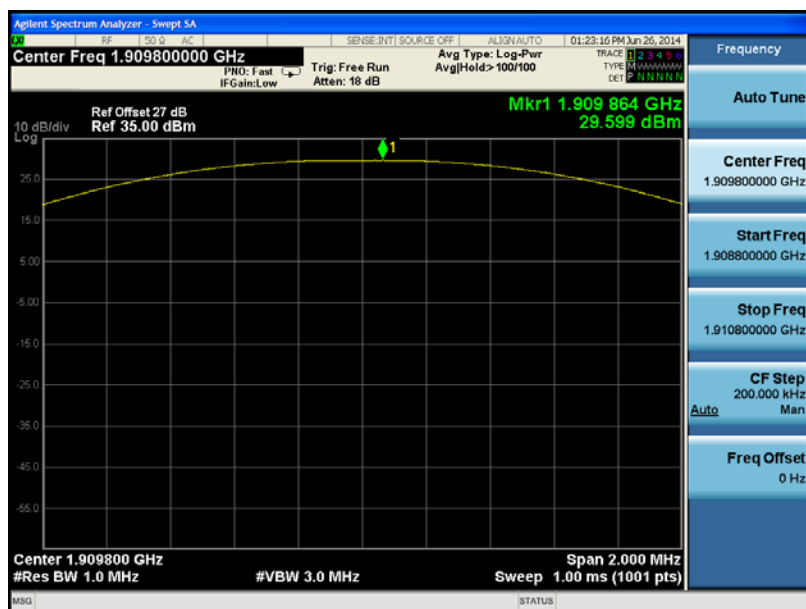


(Plot B3: GSM 1900Hz Channel = 810)

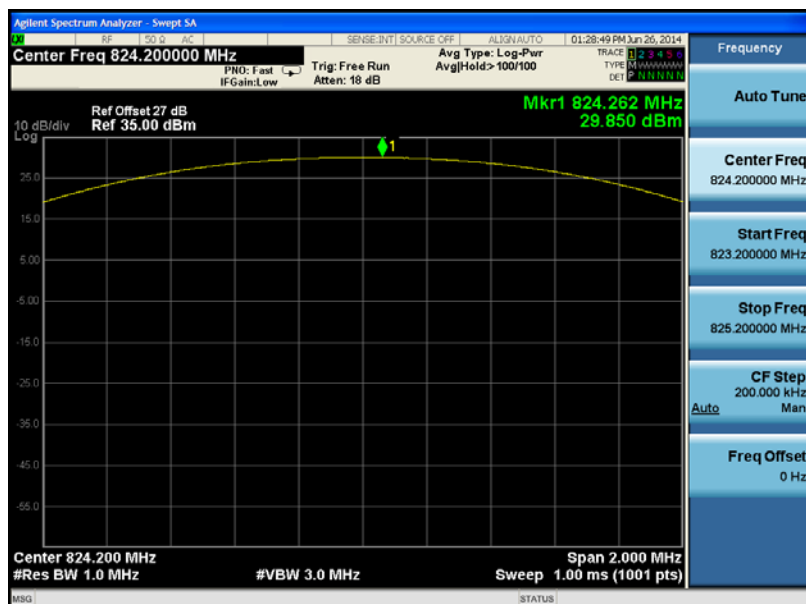


(Plot C 1: GPRS 850MHz Channel = 128)

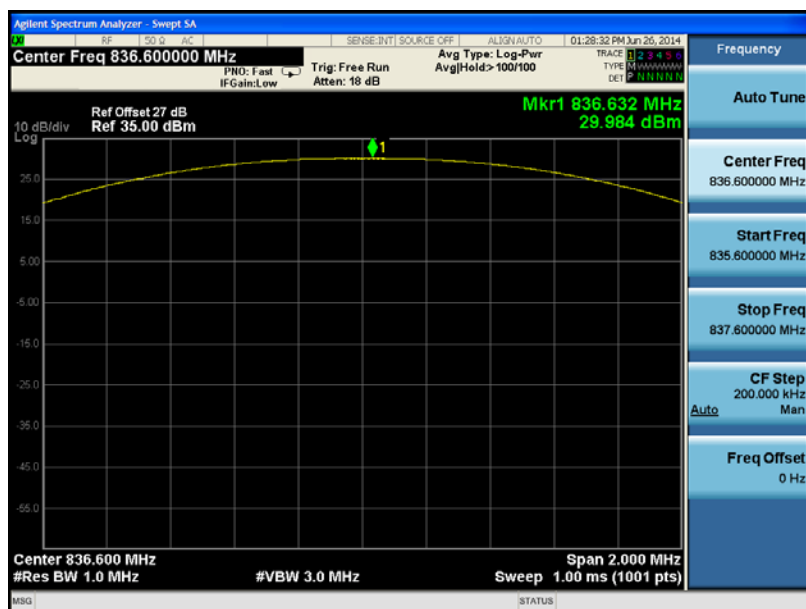


(Plot C 2: GPRS 850MHz Channel = 190)

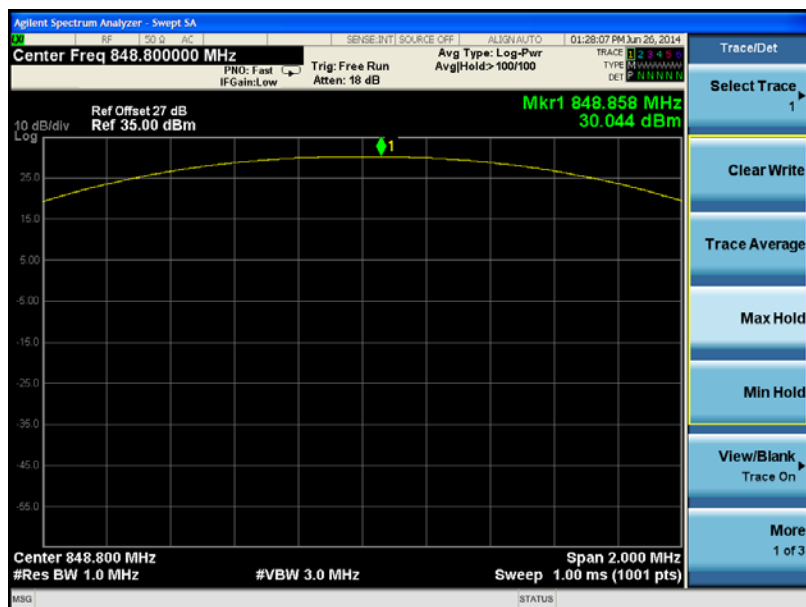


(Plot C 3: GPRS 850MHz Channel = 251)

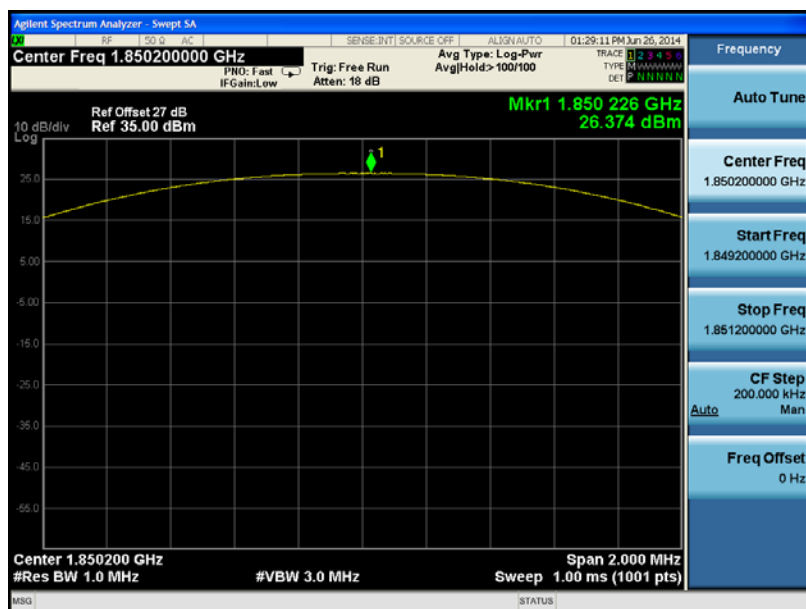


(Plot D 1: GPRS 1900MHz Channel = 512)

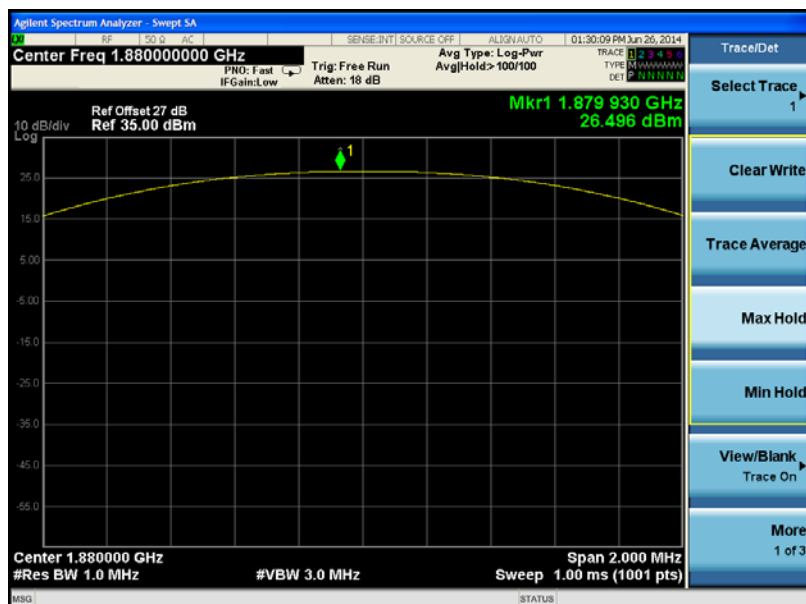


(Plot D 2: GPRS 1900MHz Channel = 661)

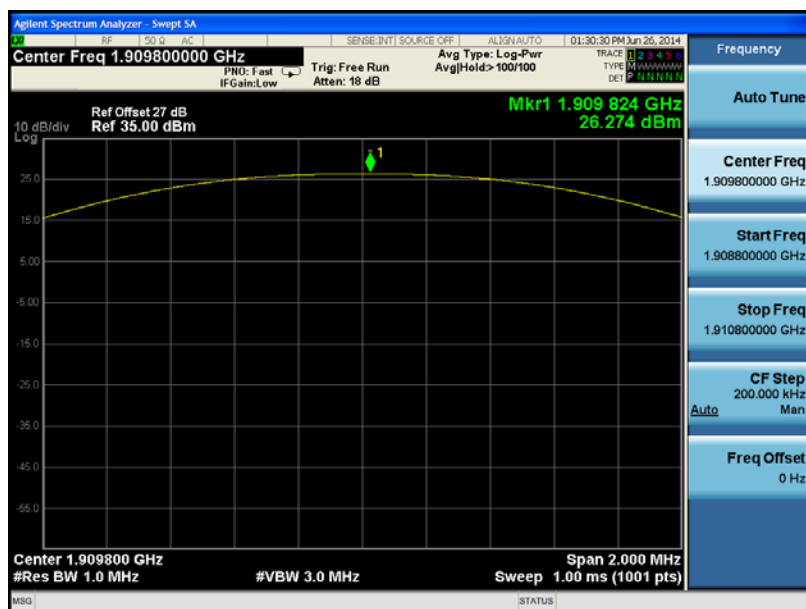


(Plot D 3: GPRS 1900MHz Channel = 810)

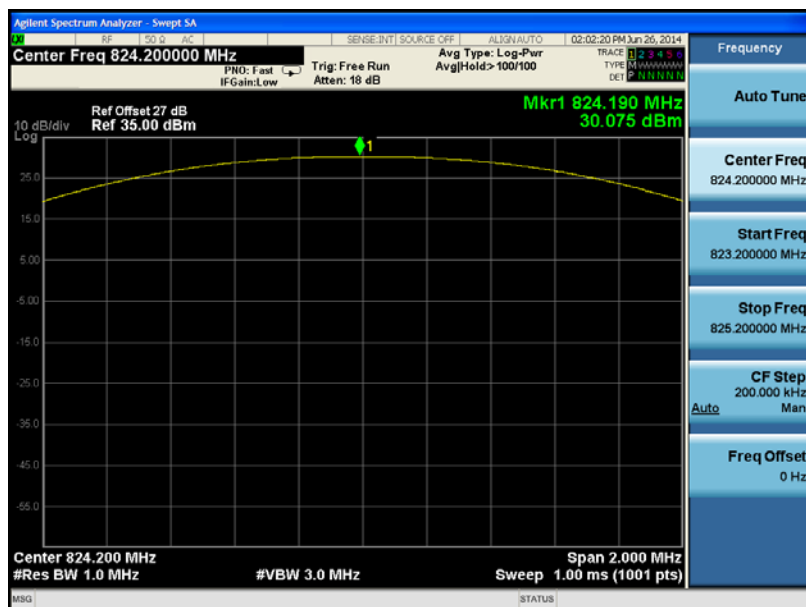


(Plot E1: EGPRS 850MHz Channel = 128)

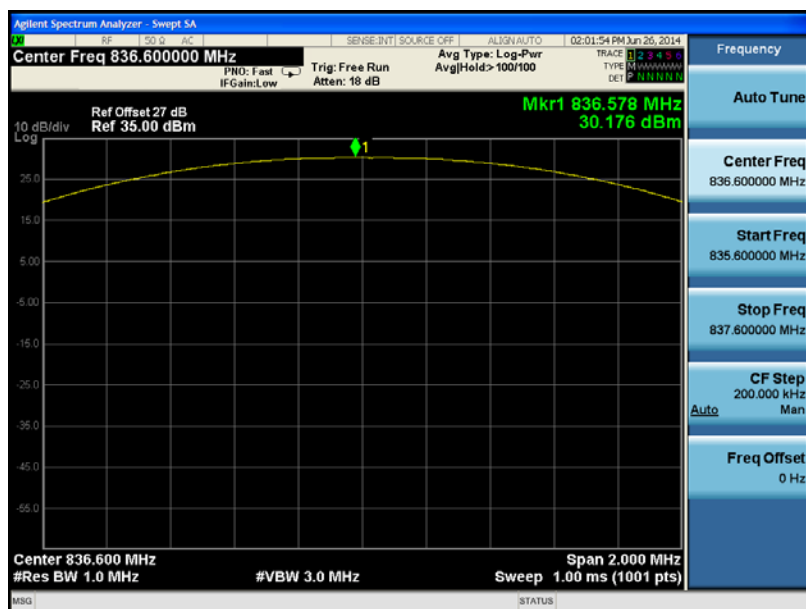


(Plot E2: EGPRS 850MHz Channel = 190)

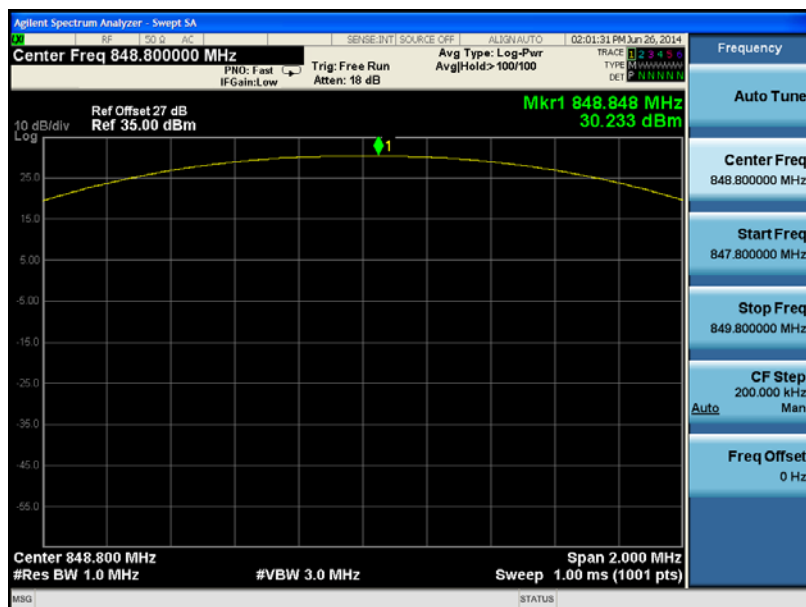


(Plot E3: EGPRS 850MHz Channel = 251)

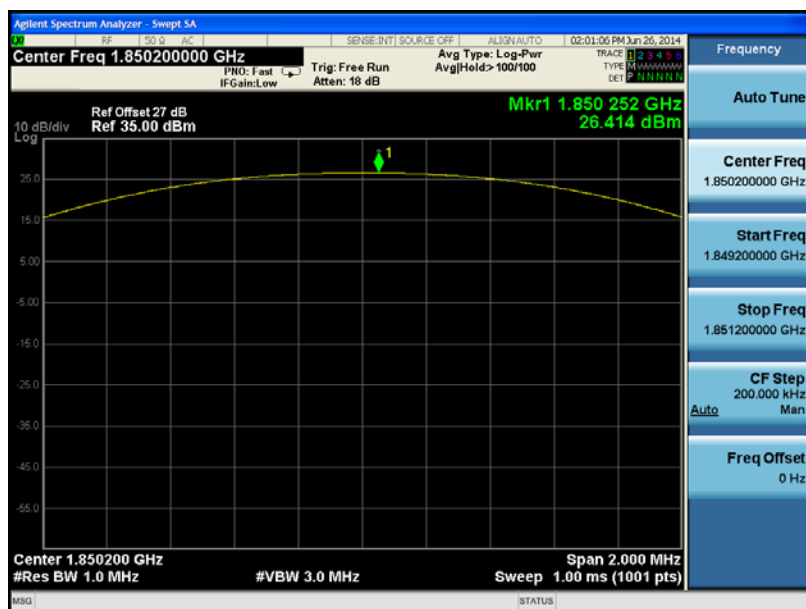

(Plot F1:EGPRS 1900MHz Channel = 512)

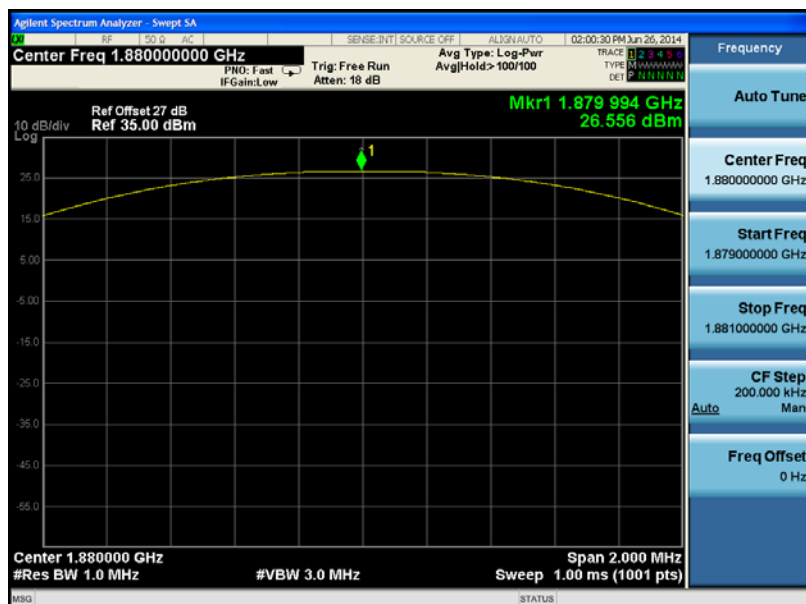

(Plot F2:EGPRS 1900MHz Channel = 661)

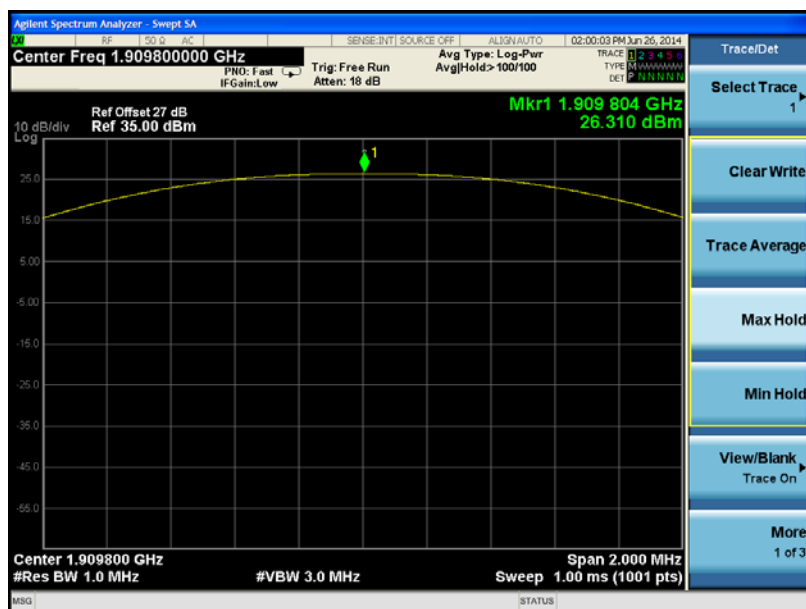

(Plot F3:EGPRS 1900Hz Channel = 810)

## 2.2 Peak to Average Ratio

### 2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), 27.50(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 2.2.2 Test Description

See section 2.1.2 of this report.

### 2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM/EGPRS operating mode:


- Set RBW=1MHz, VBW=1MHz, peak detector in spectrum analyzer.
- Set EUT in maximum output power, and triggered the bust signal.
- Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average radio.

B. For UMTS operating mode:


- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

1. Test Verdict:


| Band             | Channel | Frequency (MHz) | Peak to Average radio |               | Limit | Verdict |
|------------------|---------|-----------------|-----------------------|---------------|-------|---------|
|                  |         |                 | dBm                   | Refer to Plot | dBm   |         |
| GSM<br>1900MHz   | 512     | 1850.2          | 0.08                  | Plot A1 to A3 | 13    | PASS    |
|                  | 661     | 1880.0          | 0.08                  |               |       | PASS    |
|                  | 810     | 1909.8          | 0.11                  |               |       | PASS    |
| EGPRS<br>1900MHz | 512     | 1850.2          | 0.04                  | Plot B1 to B3 | 13    | PASS    |
|                  | 661     | 1880.0          | 0.06                  |               |       | PASS    |
|                  | 810     | 1909.8          | 0.04                  |               |       | PASS    |
| WCDMA<br>1900MHz | 9262    | 1852.4          | 2.50                  | Plot C1 toC3  | 13    | PASS    |
|                  | 9400    | 1880            | 2.71                  |               |       | PASS    |
|                  | 9538    | 1907.6          | 2.66                  |               |       | PASS    |
| WCDMA<br>1700MHz | 1312    | 1712.4          | 2.71                  | Plot D1 toD3  | 13    | PASS    |
|                  | 1412    | 1732.4          | 2.79                  |               |       | PASS    |
|                  | 1513    | 1752.6          | 2.64                  |               |       | PASS    |

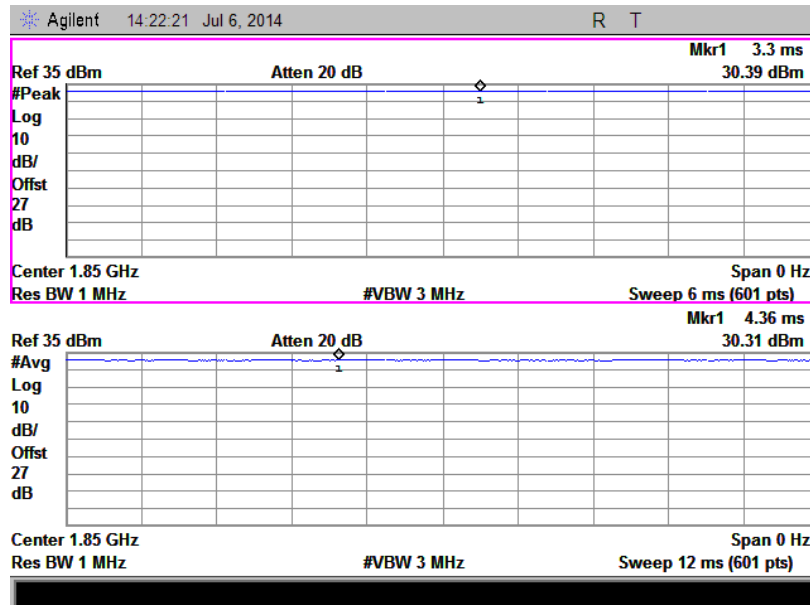


(Plot A1:GSM 1900 MHz Channel = 512)

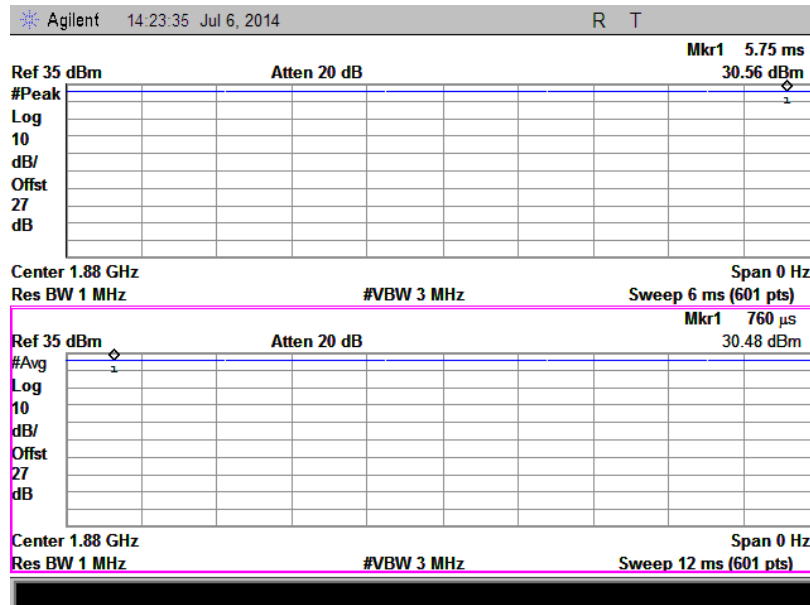


(Plot A2:GSM 1900 MHz Channel = 661)

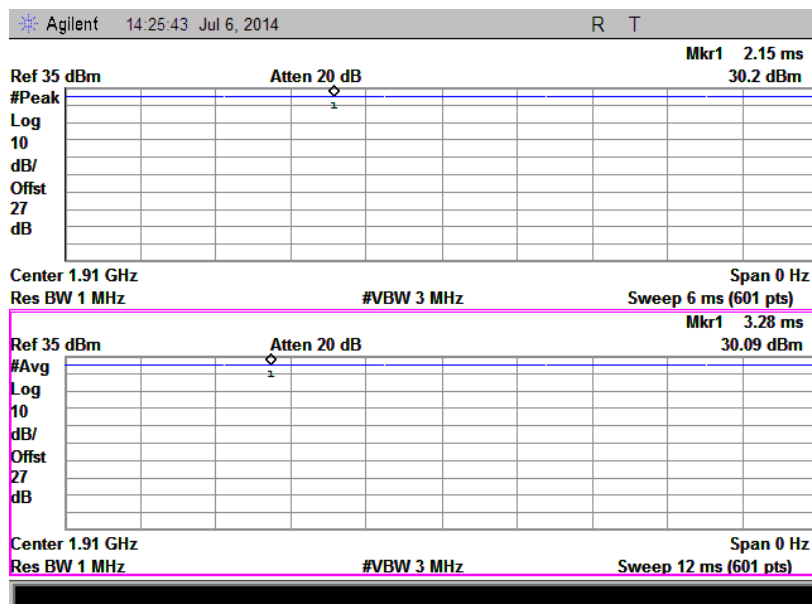


(Plot A3:GSM 1900MHz Channel = 810)

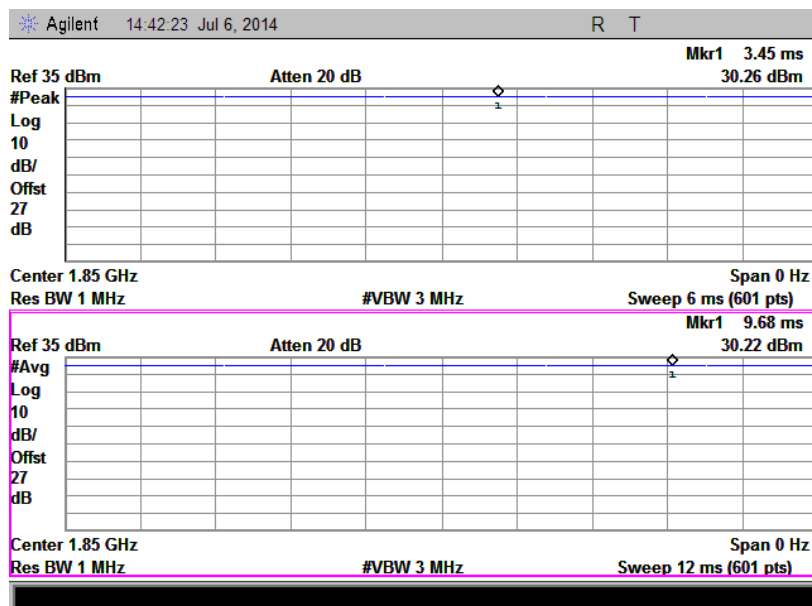


(Plot B1: EGPRS 1900MHz Channel = 512)

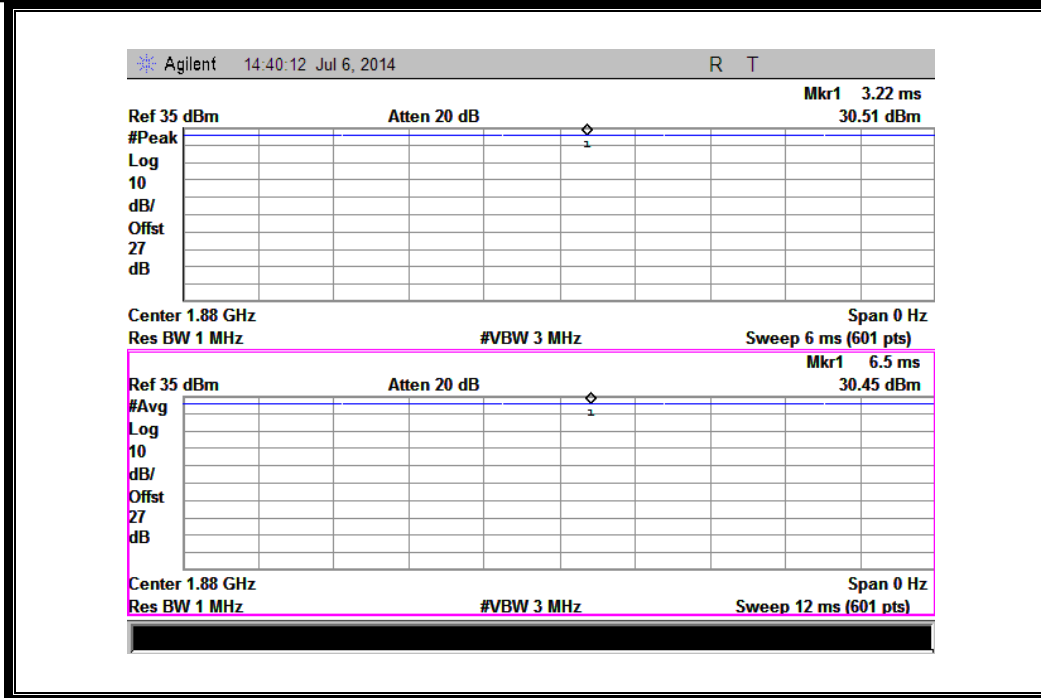


(Plot B2: EGPRS 1900MHz Channel = 661)

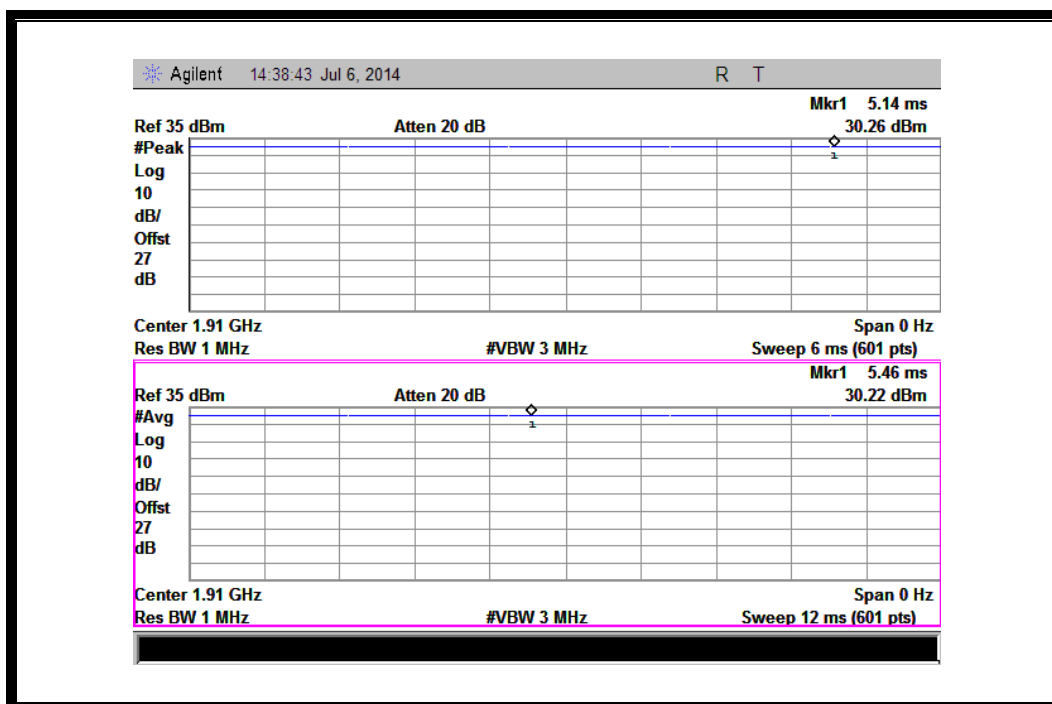


(Plot B3: EGPRS 1900MHz Channel = 810)

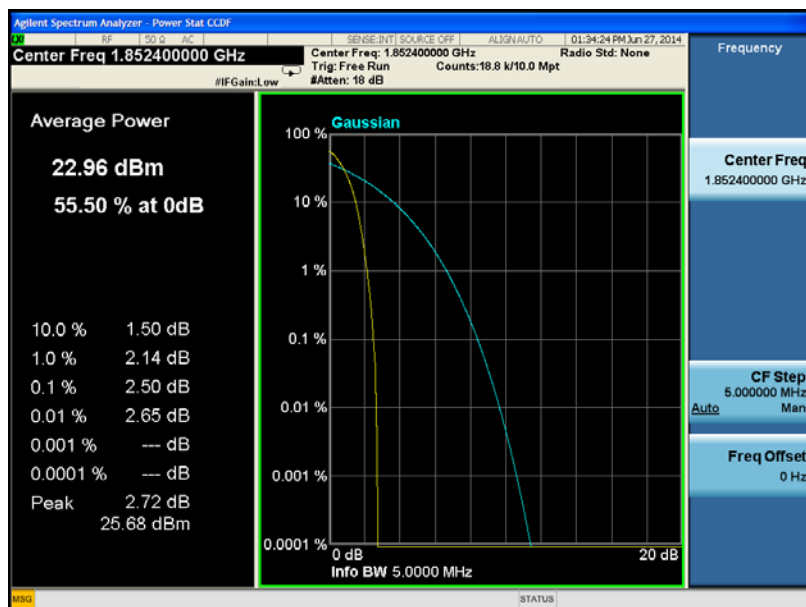


(Plot C1: WCDMA 1900MHz Channel = 9262)

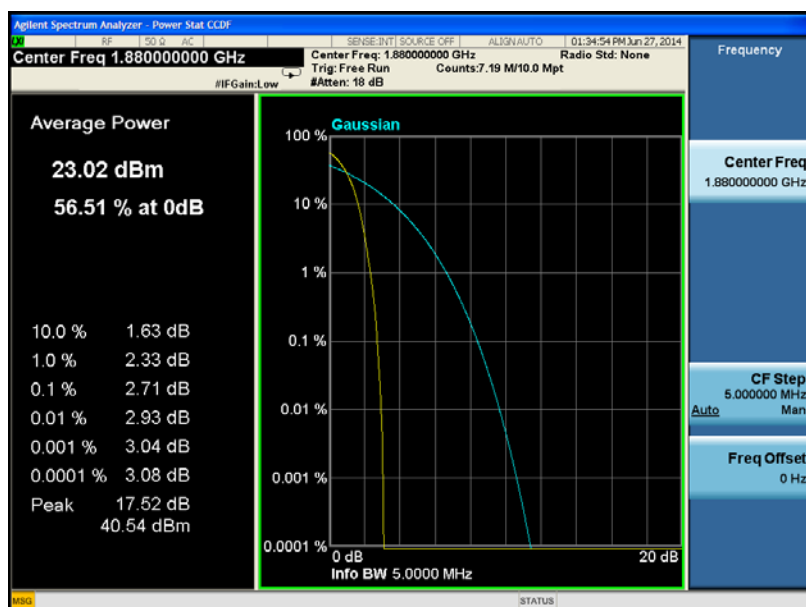


(Plot C2: WCDMA 1900MHz Channel = 9400)

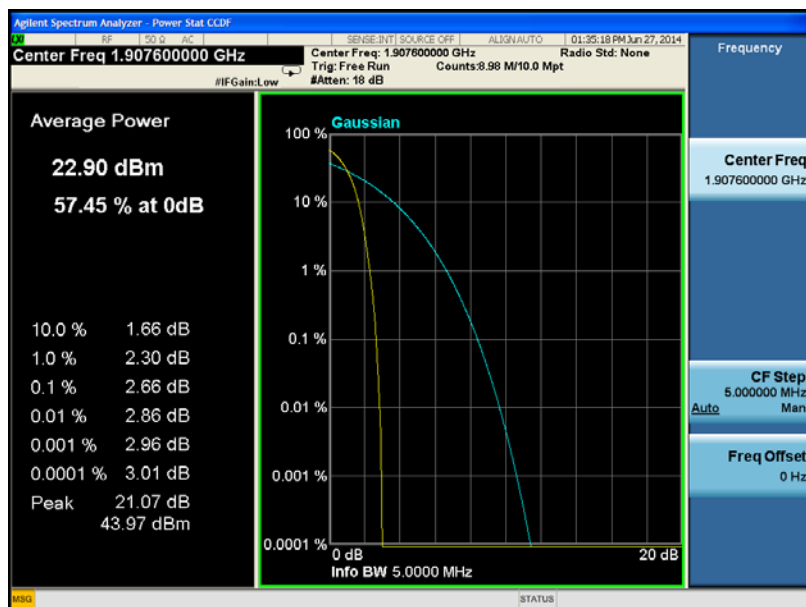


(Plot C3: WCDMA 1900MHz Channel = 9538)

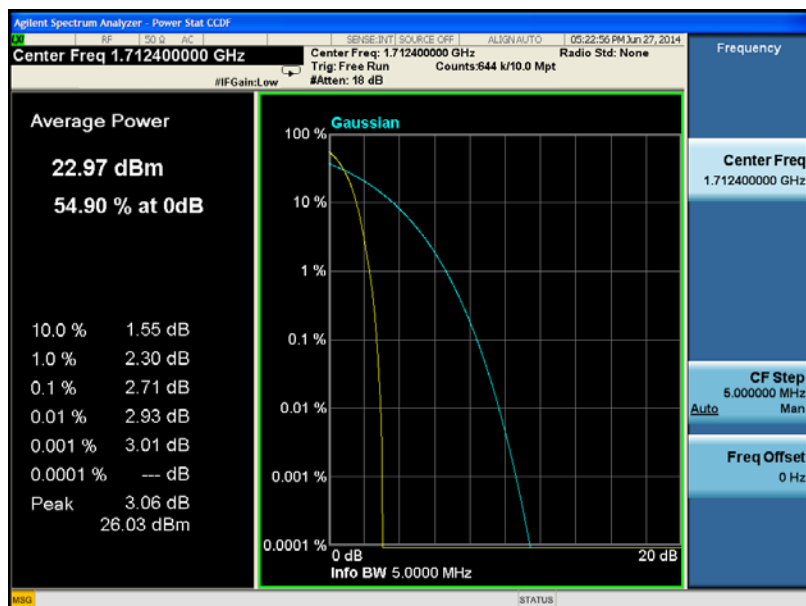

(Plot D1: WCDMA 1700MHz Channel = 1312)

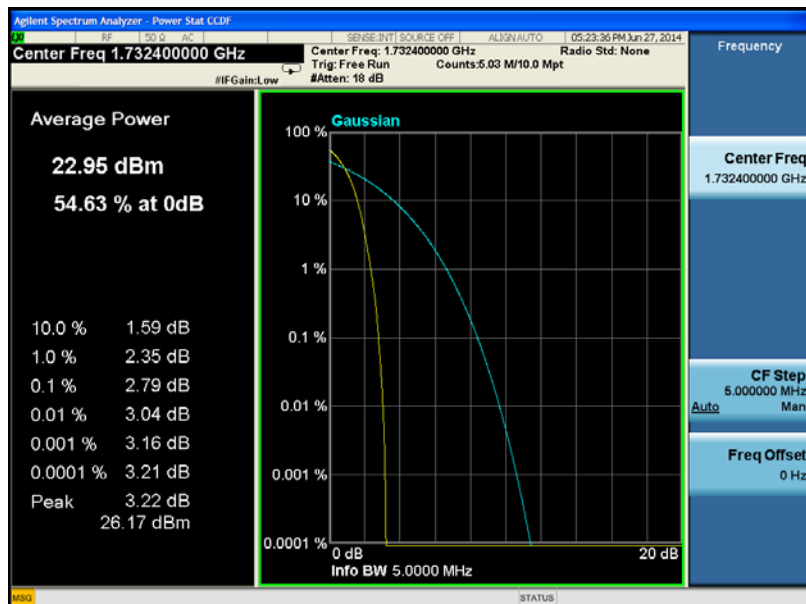

(Plot D2: WCDMA 1700MHz Channel = 1412)

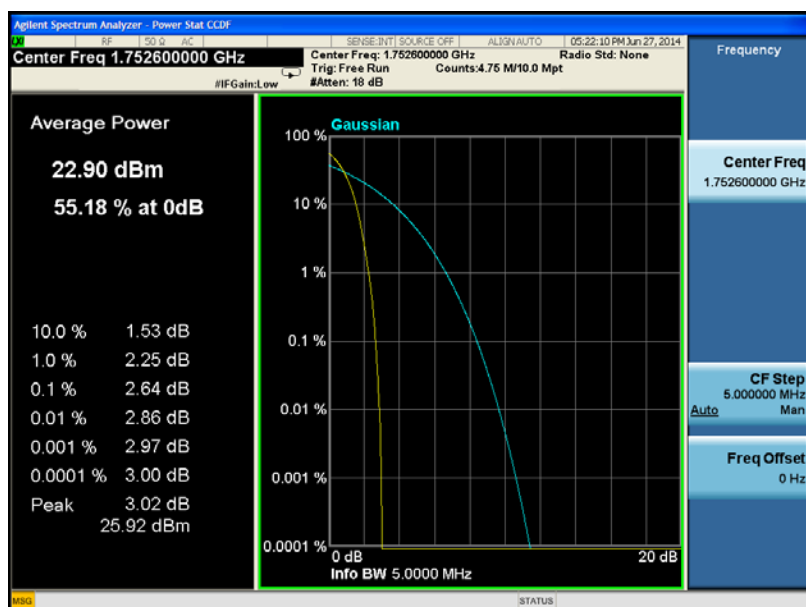

(Plot D3: WCDMA 1700MHz Channel = 1513)