

# Test report

**258627-1R1TRFWL**

Date of issue: February 21, 2017

Applicant:

**Kongsberg Automotive**

Product:

**Radio Frequency Digitally Encoded Security System (RF DESS)**

Model:

**M01456**

FCC ID:

**2ACERM01456**

IC Reg. Number

**12006A-M01456**

Specifications:

**FCC 47 CFR Part 15 Subpart C, §15.225**

Operation within the band 13.110–14.010 MHz


**RSS-210 Issue 9, August 2016**

Annex B.6 Devices operating in 13.110–14.010 MHz frequency band for any application

#### Test location

---

Company name	Nemko Canada Inc.
Address	303 River Road
City	Ottawa
Province	Ontario
Postal code	K1V 1H2
Country	Canada
Telephone	+1 613 737 9680
Facsimile	+1 613 737 9691
Toll free	+1 800 563 6336
Website	www.nemko.com
Site number	FCC test site registration number: 176392, IC: 2040A-4 (3 m semi anechoic chamber)

Tested by	Andrey Adelberg, Senior Wireless/EMC Specialist
Reviewed by	Kevin Rose, Wireless/EMC Specialist
Date	February 21, 2017
Signature	

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of contents

<b>Table of contents</b> .....	<b>3</b>
<b>Section 1. Report summary</b> .....	<b>4</b>
1.1 Applicant and manufacturer .....	4
1.2 Test specifications .....	4
1.3 Test methods.....	4
1.4 Statement of compliance .....	4
1.5 Exclusions.....	4
1.6 Test report revision history .....	4
<b>Section 2. Summary of test results</b> .....	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 FCC Part 15 Subpart C, intentional radiators test results.....	5
2.3 IC RSS-GEN, Issue 4, test results .....	5
2.4 IC RSS-210, Issue 9, test results .....	5
<b>Section 3. Equipment under test (EUT) details</b> .....	<b>6</b>
3.1 Sample information.....	6
3.2 EUT information .....	6
3.3 Technical information .....	6
3.4 Product description and theory of operation .....	6
3.5 EUT exercise details.....	6
3.6 EUT setup diagram .....	6
<b>Section 4. Engineering considerations</b> .....	<b>7</b>
4.1 Modifications incorporated in the EUT.....	7
4.2 Technical judgment .....	7
4.3 Deviations from laboratory tests procedures .....	7
<b>Section 5. Test conditions</b> .....	<b>8</b>
5.1 Atmospheric conditions .....	8
5.2 Power supply range.....	8
<b>Section 6. Measurement uncertainty</b> .....	<b>9</b>
6.1 Uncertainty of measurement .....	9
<b>Section 7. Test equipment</b> .....	<b>10</b>
7.1 Test equipment list.....	10
<b>Section 8. Testing data</b> .....	<b>11</b>
8.1 FCC 15.215(c) 20 dB bandwidth .....	11
8.2 RSS-Gen 4.6.1 Occupied bandwidth .....	13
8.3 FCC 15.225(a–c) and RSS-210 A2.6 (a–c) Field strength within the 13.110–14.010 MHz band .....	15
8.4 FCC 15.225(d) and RSS-210 A2.6(d) Field strength of emissions outside 13.110–14.010 MHz band.....	18
8.5 FCC 15.225(e) and RSS-210 A2.6 Frequency tolerance of the carrier signal .....	21
<b>Section 9. Block diagrams of test set-ups</b> .....	<b>22</b>
9.1 Radiated emissions set-up.....	22

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Company name	Kongsberg Automotive
Address	90, 28th street CP10034
City	Grand-Mere
Province/State	Quebec
Postal/Zip code	G9T 5K7
Country	Canada

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart C, Clause 15.225	Operation in the 13.110–14.010 MHz
RSS-210 Issue 9, August 2016, Annex B.6	Devices operating in 13.110–14.010 MHz frequency band for any application

### 1.3 Test methods

---

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	--

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued
R1TRF	Report has been refreshed with the updated standard

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable
§15.31(e)	Variation of power source	Pass <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>
§15.215(c)	20 dB bandwidth	Pass

Notes: <sup>1</sup> EUT uses a car battery as a main power supply. The testing was performed using a fully charged battery

<sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.

### 2.2 FCC Part 15 Subpart C, intentional radiators test results

Part	Test description	Verdict
§15.225(a)	Field strength within 13.553–13.567 MHz band	Pass
§15.225(b)	Field strength within 13.410–13.553 MHz and 13.567–13.710 MHz bands	Pass
§15.225(c)	Field strength within 13.110–13.410 MHz and 13.710–14.010 MHz bands	Pass
§15.225(d)	Field strength outside 13.110–14.010 MHz band	Pass
§15.225(e)	Frequency tolerance of carrier signal	Pass

Notes: None

### 2.3 IC RSS-GEN, Issue 4, test results

Part	Test description	Verdict
6.6	Occupied bandwidth	Pass
6.11	Transmitter frequency stability	Pass <sup>1</sup>
7.1.2	Receiver radiated emission limits	Not applicable <sup>2</sup>
7.1.3	Receiver conducted emission limits	Not applicable <sup>2</sup>
8.8	Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus	Not applicable <sup>3</sup>

Notes: <sup>1</sup> Frequency stability covered in RSS-210.

<sup>2</sup> According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

<sup>3</sup> EUT is a car battery powered

### 2.4 IC RSS-210, Issue 9, test results

Part	Test description	Verdict
A B.6 (a)	The field strength within the band 13.553–13.567 MHz.	Pass
A B.6 (b)	The field strength within the bands 13.410–13.553 MHz and 13.567–13.710 MHz	Pass
A B.6 (c)	The field strength within the bands 13.110–13.410 MHz and 13.710–14.010 MHz.	Pass
A B.6 (d)	The field strength outside the band 13.110–14.010 MHz.	Pass
A B.6	Carrier frequency stability shall be maintained to $\pm 0.01\%$ ( $\pm 100$ ppm)	Pass

Notes: None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

Receipt date	May 8, 2014
Nemko sample ID number	1

### 3.2 EUT information

---

Product name	Radio Frequency Digitally Encoded Security System (RF DESS)
Model	M01456
Serial number	458A11914075

### 3.3 Technical information

---

Operating band	13.553–13.567 MHz
Operating frequency	13.56 MHz
Modulation type	ASK/AM
Occupied bandwidth (99 %)	79 kHz
Power requirements	Standard 12 V <sub>DC</sub> car battery
Emission designator	79K0M1D
Antenna information	The EUT has an integrated, non-detachable and not-user-accessible loop antenna.

### 3.4 Product description and theory of operation

---

The product uses a magnetic sensing technology as a Kill-safe device and NFCv RFID signal (ISO15693) to identify the driver of the vehicle. The driver of the vehicle should snap a key-like device that uses a passive RFID tag device (ISO15693). During the starting process, the RFID reader will read the tag and give the authorization to the vehicle to start the ignition system.


### 3.5 EUT exercise details

---

The EUT was set to transmit continuously within the vicinity of the ignition key

### 3.6 EUT setup diagram

---

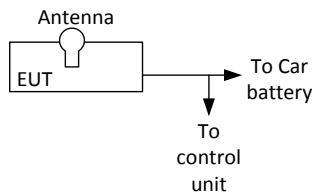

**Figure 3.6-1:** Setup diagram

## Section 4. Engineering considerations

---

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

---

This is to confirm that Kongsberg Automotive product model M01456 for certification under IC: 12006A-M01456 is identical to the product that was tested by Nemko Canada on May 8, 2014 in test report No. 258627-1R1TRFWL. There have been no antenna changes, no part substitutions, no PCB changes, no change in radio parameters, no enclosure changes, no software changes.

### 4.3 Deviations from laboratory tests procedures

---

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.



## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 7. Test equipment

---

### 7.1 Test equipment list

---

*Table 7.1-1: Equipment list*

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Mar. 18/15
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	Oct. 24/14
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	Mar. 12/15
Active loop antenna (0.01–30 MHz)	EMCO	6502	FA001686	1 year	Sept. 27/14
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Jan. 27/15
Temperature chamber	Thermotron	SM-16C	FA001030	1 year	NCR
Multimeter	Fluke	16	FA001831	1 year	Jan. 30/14

Note: NCR - no calibration required

## Section 8. Testing data

### 8.1 FCC 15.215(c) 20 dB bandwidth

#### 8.1.1 Definitions and limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

#### 8.1.2 Test summary

Test date	May 8, 2014	Temperature	21 °C
Test engineer	Andrey Adelberg	Air pressure	1006 mbar
Verdict	Pass	Relative humidity	33 %

#### 8.1.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	≥1 % of span
Video bandwidth	RBW × 3
Trace mode	Max Hold

#### 8.1.4 Test data


*Table 8.1-1: Lower 20 dBc frequency cross result*

Fundamental frequency, MHz	Lower 20 dBc frequency cross, MHz	Limit, MHz	Margin, kHz
13.560	13.556	13.553	3.0

*Table 8.1-2: Upper 20 dBc frequency cross result*

Fundamental frequency, MHz	Upper 20 dBc frequency cross, MHz	Limit, MHz	Margin, kHz
13.560	13.564	13.567	3.0

8.1.4 Test data, continued

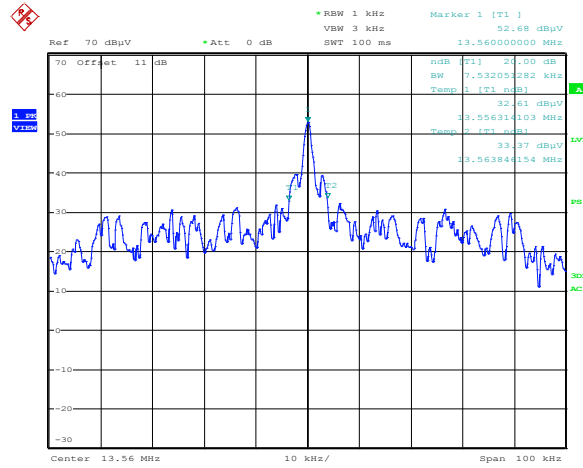

Date: 8.MAY.2014 11:08:27

Figure 8.1-1: 20 dB bandwidth spectrum plot

## 8.2 RSS-Gen 6.6 Occupied bandwidth

---

### 8.2.1 Definitions and limits

---

The emission bandwidth (×dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated × dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3× the resolution bandwidth.

### 8.2.2 Test summary

---

Test date	May 8, 2014	Temperature	21 °C
Test engineer	Andrey Adelberg	Air pressure	1006 mbar
Verdict	Pass	Relative humidity	33 %

### 8.2.3 Observations, settings and special notes

---

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	≥1 % of span
Video bandwidth	RBW × 3
Trace mode	Max Hold


### 8.2.4 Test data

---

**Table 8.2-1:** 99 % occupied bandwidth result

Fundamental frequency, MHz	99 % occupied bandwidth, kHz
13.560	79.0

8.2.5 Test data, continued

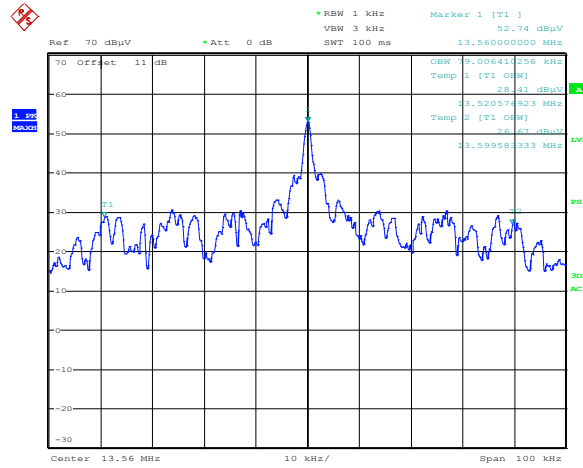


Date: 8.MAY.2014 11:12:25

Figure 8.2-1: 99 % occupied bandwidth

### 8.3 FCC 15.225(a-c) and RSS-210 A B.6 (a-c) Field strength within the 13.110–14.010 MHz band

#### 8.3.1 Definitions and limits

- a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15848  $\mu\text{V/m}$  (84 dB $\mu\text{V/m}$ ) at 30 m.
- b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334  $\mu\text{V/m}$  (50.5 dB $\mu\text{V/m}$ ) at 30 m.
- c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106  $\mu\text{V/m}$  (40.5 dB $\mu\text{V/m}$ ) at 30 m.

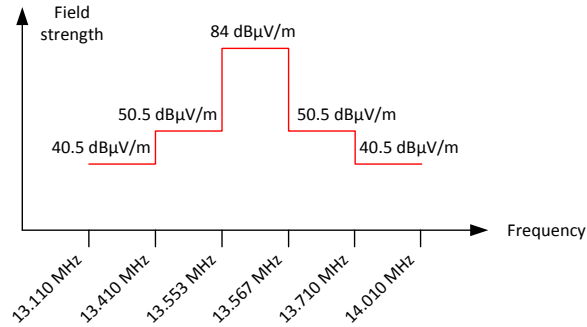

**Figure 8.3-1:** In-band spurious emissions limit

#### 8.3.2 Test summary

Test date	May 8, 2014	Temperature	21 °C
Test engineer	Andrey Adelberg	Air pressure	1006 mbar
Verdict	Pass	Relative humidity	33 %

#### 8.3.3 Observations/special notes

The measurements were performed at the distance of 3 m. 40 dB distance correction factor\* was applied to the measurement result in order to comply with 30 m limits.

\* 30 m to 3 m distance correction factor calculation (for 13 MHz band):

$$40 \times \text{Log}_{10} (3 \text{ m}/30 \text{ m}) = 40 \times \text{Log}_{10} (0.1) = -40 \text{ dB}$$

Spectrum analyzer settings:


Detector mode	Peak
Resolution bandwidth	10 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold

8.3.4 Test data

Table 8.3-1: Field strength measurements results


Frequency range, MHz	Frequency, MHz	Field strength at 3 m, dBμV/m	Calculated field strength at 30 m, dBμV/m	Limit, dBμV/m	Margin, dB
13.553–13.567	13.559	54.11	14.11	84.00	69.89
13.410–13.553	13.552	49.66	9.66	50.50	40.84
13.567–13.710	13.567	49.77	9.77	50.50	40.73
13.110–13.410	13.398	27.00	-13.00	40.50	53.50
13.710–14.010	13.719	25.50	-14.50	40.50	55.00

Note: Calculated field strength at 30 m = Measured field strength at 3 m – 40 dB

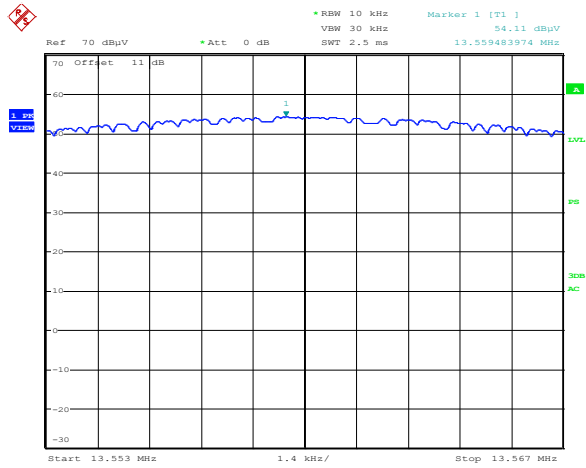

Date: 8.MAY.2014 11:15:36

Figure 8.3-2: Field strength within 13.553–13.567 MHz band

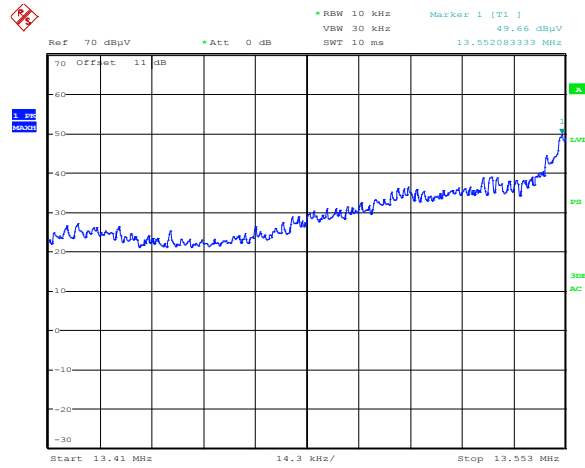


Date: 8.MAY.2014 11:17:28

Figure 8.3-3: Field strength within 13.410–13.553 MHz band




8.3.4 Test data, continued

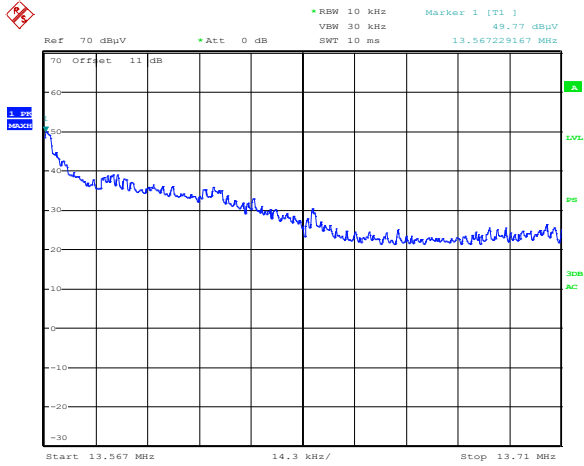


Date: 8.MAY.2014 11:19:27

Figure 8.3-4: Field strength within 13.567–13.710 MHz band

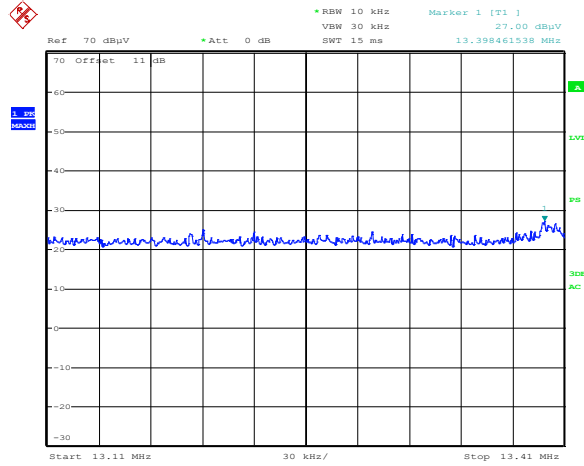

Date: 8.MAY.2014 11:21:43

Figure 8.3-5: Field strength within 13.110–13.410 MHz band

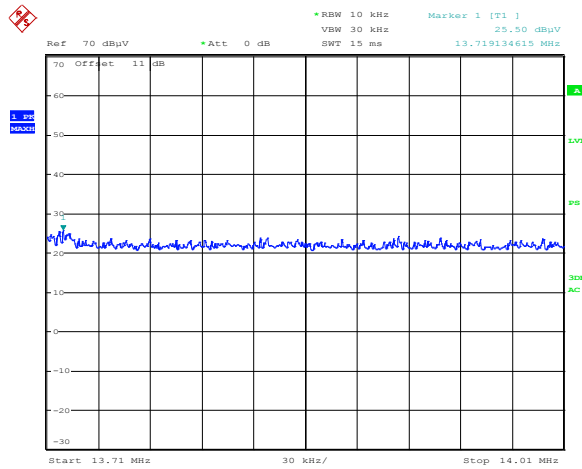

Date: 8.MAY.2014 11:23:04

Figure 8.3-6: Field strength within 13.710–14.010 MHz band

## 8.4 FCC 15.225(d) and RSS-210 A B.6(d) Field strength of emissions outside 13.110–14.010 MHz band

### 8.4.1 Definitions and limits

FCC: The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209. The field strength of emissions appearing within restricted bands (as specified in §15.205) shall not exceed the limits from §15.209.  
IC: The field strength of any emission outside the band 13.110–14.010 MHz shall not exceed the 30  $\mu\text{V}/\text{m}$  (29.5  $\text{dB}\mu\text{V}/\text{m}$ ) limit.

**Table 8.4-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

**Table 8.4-2: Restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

### 8.4.2 Test summary

Test date	May 8, 2014	Temperature	21 °C
Test engineer	Andrey Adelberg	Air pressure	1006 mbar
Verdict	Pass	Relative humidity	33 %

### 8.4.3 Observations, settings and special notes

The spectrum was searched from 9 kHz to 1 GHz.  
 Radiated measurements were performed at a distance of 3 m.


Spectrum analyzer settings for frequencies below 30 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms

Spectrum analyzer settings for frequencies above 30 MHz:

Detector mode	Peak
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Trace mode	Max Hold
Measurement time	100 ms

### 8.4.4 Test data

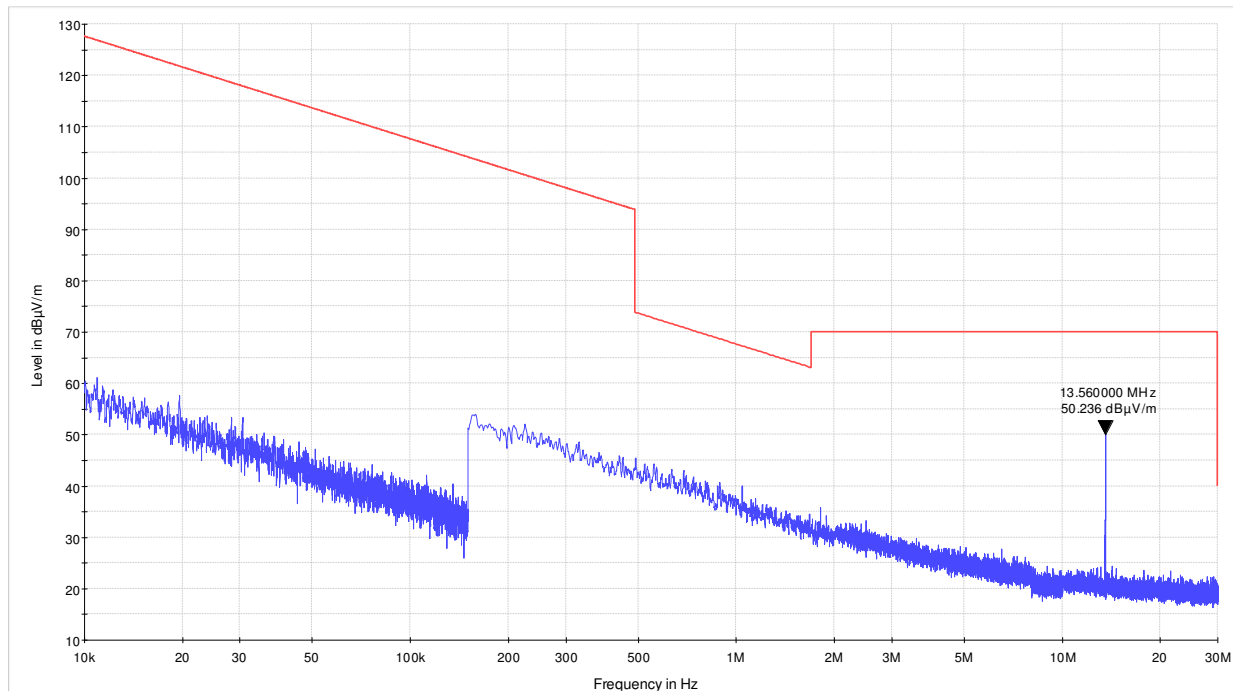

**Figure 8.4-1:** Field strength of spurious emissions below 30 MHz

8.4.4 Test data, continued

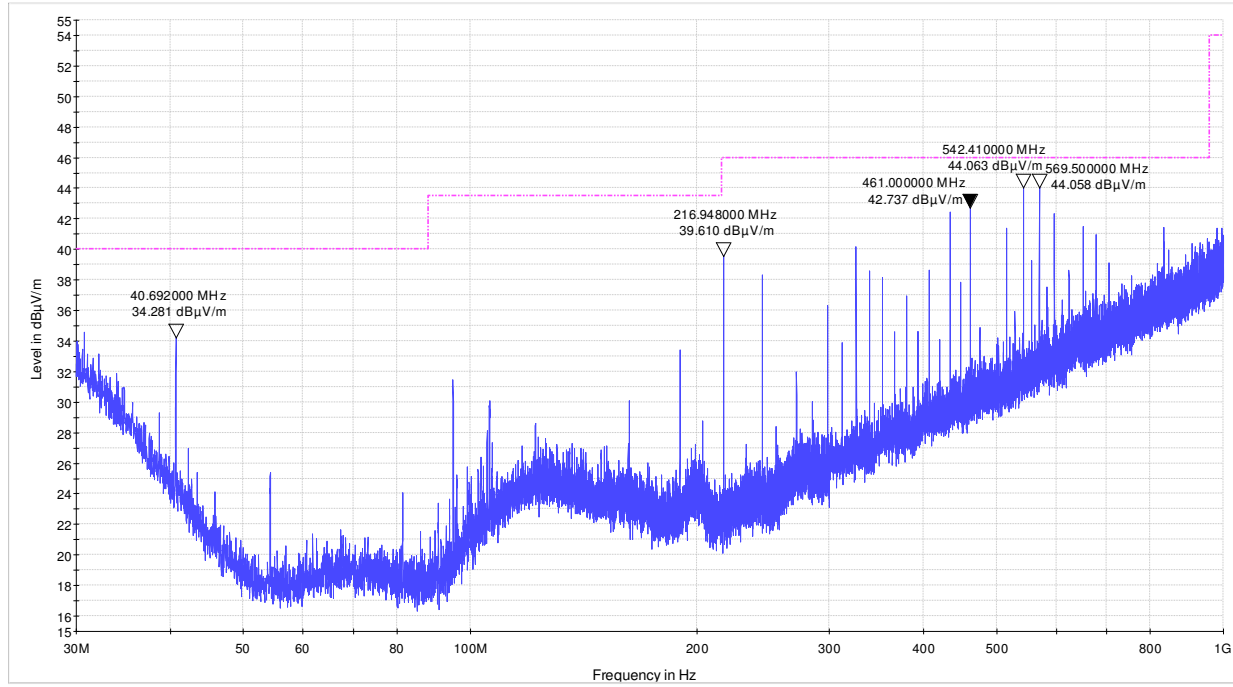


Figure 8.4-2: Field strength of spurious emissions above 30 MHz

Note: all measurement results indicated in the plot were taken with a peak detector, which is more stringent measurement, and still comply with quasi-peak limit.

## 8.5 FCC 15.225(e) and RSS-210 A B.6 Frequency tolerance of the carrier signal

### 8.5.1 Definitions and limits

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  ( $\pm 100$  ppm) of the operating frequency over a temperature variation of  $-20^\circ\text{C}$  to  $+50^\circ\text{C}$  at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of  $20^\circ\text{C}$ . For battery operated equipment, the equipment tests shall be performed using a new battery.

### 8.5.2 Test summary

Test date	May 8, 2014	Temperature	21 °C
Test engineer	Andrey Adelberg	Air pressure	1006 mbar
Verdict	Pass	Relative humidity	33 %

### 8.5.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	$\geq 1\%$ of emission bandwidth
Video bandwidth	RBW $\times 3$
Trace mode	Max Hold

### 8.5.4 Test data

**Table 8.5-1: Frequency drift measurements results**

Test conditions	Frequency, MHz	Frequency drift, $\pm$ ppm	Limit, $\pm$ ppm	Margin, ppm
+50 °C, Nominal	13.55998	13.275	100	86.725
+20 °C, +15 %	13.55999	14.012	100	85.988
+20 °C, Nominal	13.55980	Reference	Reference	Reference
+20 °C, -15 %	13.56001	15.487	100	84.513
-20 °C, Nominal	13.55997	12.537	100	87.463

Note: frequency drift was calculated as follows:

$$\text{Frequency drift (ppm)} = ((F_{\text{measured}} - F_{\text{reference}}) \div F_{\text{reference}}) \times 1 \times 10^6$$

## Section 9. Block diagrams of test set-ups

### 9.1 Radiated emissions set-up

