


FCC Test Report

FCC ID : 2ACG2DVWW0001
Equipment : WIFI Module
Model No. : Mini PCIe 11agn
Brand Name : Delta
Applicant : Delta Electronics, Inc.
Address : No.31-1, Shien Pan Rd., Taoyuan Hsien,
Taoyuan County 33370, Taiwan
Standard : 47 CFR FCC Part 15.407
Received Date : May 07, 2014
Tested Date : Jun. 21 ~ Jul. 07, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

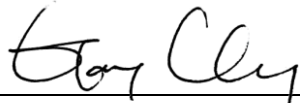

Gary Chang / Manager



Testing Laboratory
2732

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	Emission Bandwidth	17
3.3	RF Output Power	20
3.4	Peak Power Spectral Density	22
3.5	Transmitter Radiated and Band Edge Emissions	26
3.6	Frequency Stability.....	65
4	TEST LABORATORY INFORMATION	67

Release Record

Report No.	Version	Description	Issued Date
FR450701AN	Rev. 01	Initial issue	Jul. 28, 2014

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.189MHz 52.56 (Margin -11.53dB) - QP	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5150.00MHz 73.00 (Margin -1.00dB) - PK	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 21.40 5725-5850MHz: 21.02	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
a	5150-5250	5180-5240	36-48 [4]	3	6-54 Mbps
n (HT20)	5150-5250	5180-5240	36-48 [4]	3	MCS 0-23
n (HT40)	5150-5250	5190-5230	38-46 [2]	3	MCS 0-23

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

RF General Information					
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
a	5725-5850	5745-5825	149-165 [5]	3	6-54 Mbps
n (HT20)	5725-5850	5745-5825	149-165 [5]	3	MCS 0-23
n (HT40)	5725-5850	5755-5795	151-159 [2]	3	MCS 0-23

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Dipole	2	RSMA	Connector of EUT is UFL. A cable is used to connect EUT and Antenna.

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
--------------------------	------------------

1.1.4 Accessories

N/A

1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	---	---
48	5240	---	---

For Frequency band 5725~5850 MHz			
802.11 a / HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	---	---
161	5805	---	---
165	5825	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, Version 2.3		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	98.60%	0.06
	HT20	98.50%	0.07
	HT40	98.21%	0.08

1.1.7 Power Setting


For Frequency band 5150-5250 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	17
11a	5200	17
11a	5240	17
HT20	5180	16
HT20	5200	16
HT20	5240	16
HT40	5190	12.5
HT40	5230	16

For Frequency band 5725~5850 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	13
11a	5200	17
11a	5240	13.5
HT20	5180	13
HT20	5200	16
HT20	5240	13.5
HT40	5190	13
HT40	5795	16

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	DoC	---

1.3 Test Setup Chart

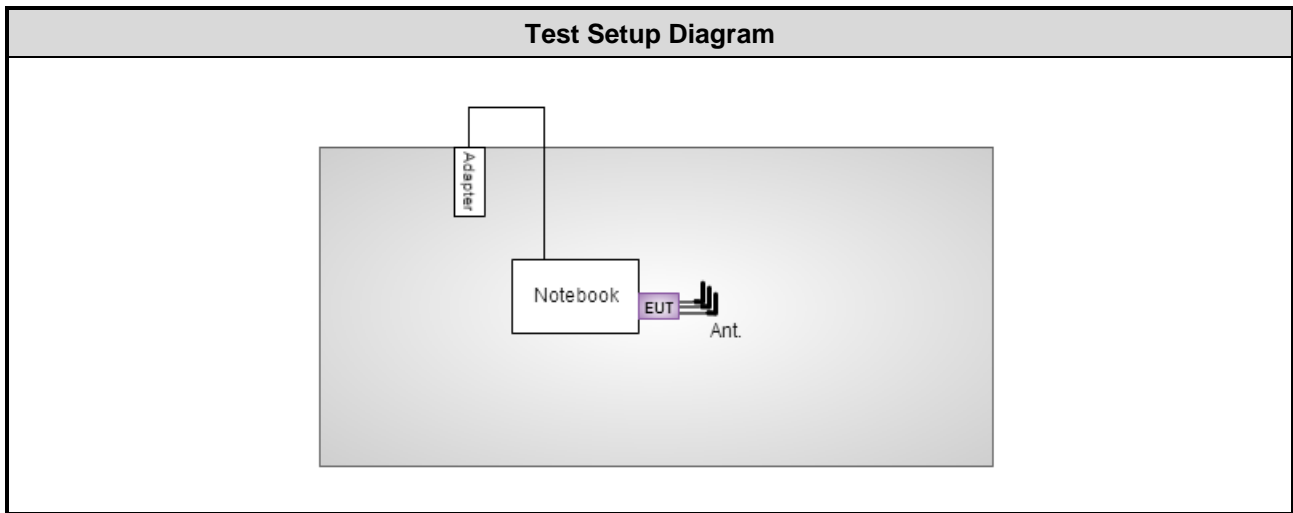

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014

Note: Calibration Interval of instruments listed above is one year.

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
--------------	-----	---------	--------	---------------	---------------

Note: Calibration Interval of instruments listed above is two year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014

Note: Calibration Interval of instruments listed above is one year.

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz
Temperature	±0.6 °C
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.26 dB
Radiated emission > 1GHz	±4.94 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 66%	Skys Huang
Radiated Emissions	03CH02-WS	25°C / 64-66%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	24°C / 64%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5180	6 Mbps	---
Radiated Emissions ≤ 1 GHz	11a	5180	6 Mbps	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	---
	HT40	5190 / 5230	MCS 0	---
Radiated Emissions > 1 GHz	11a	5180 / 5200 / 5240	6 Mbps	---
Emission Bandwidth	HT20	5180 / 5200 / 5240	MCS 0	---
Peak Power Spectral Density	HT40	5190 / 5230	MCS 0	---
Frequency Stability	Un-modulation	5200	---	---

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5785	6 Mbps	---
Radiated Emissions ≤ 1 GHz	11a	5785	6 Mbps	---
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	---
	HT40	5755 / 5795	MCS 0	---
Radiated Emissions > 1 GHz	11a	5745 / 5785 / 5825	6 Mbps	---
Emission Bandwidth	HT20	5745 / 5785 / 5825	MCS 0	---
6dB bandwidth	HT20	5745 / 5785 / 5825	MCS 0	---
Peak Power Spectral Density	HT40	5755 / 5795	MCS 0	---

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

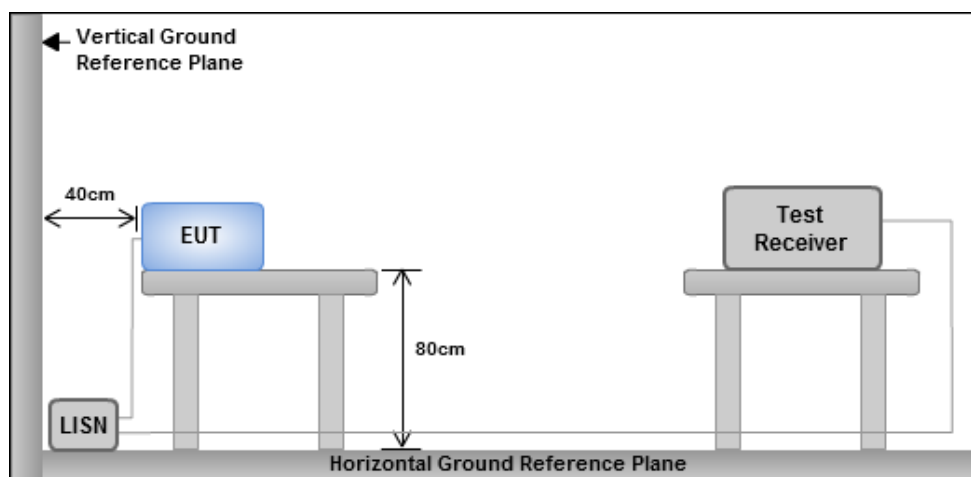


Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation	11a	Test Freq. (MHz)	5180
Power Phase	Line		

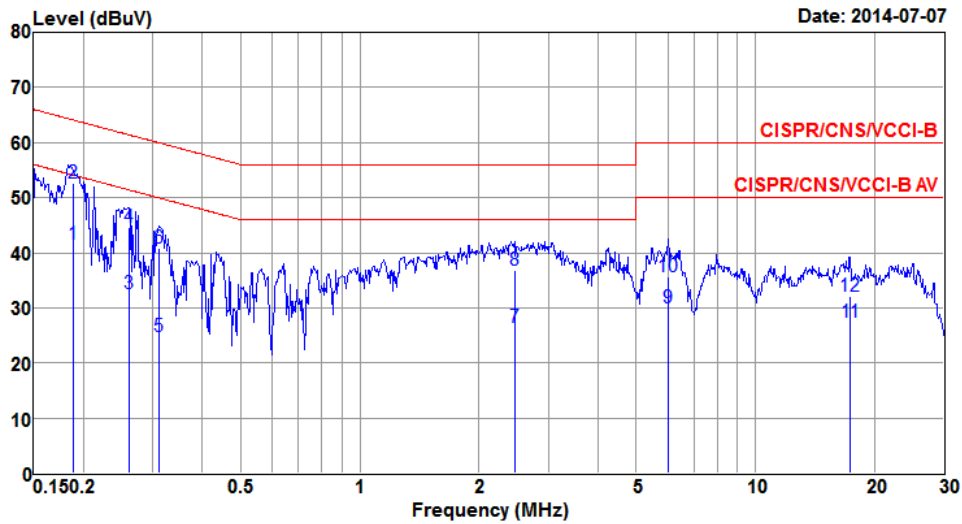

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.189	41.54	54.09	-12.55	41.14	0.39	0.01	Average
2*	0.189	52.56	64.09	-11.53	52.16	0.39	0.01	QP
3	0.260	32.51	51.42	-18.91	32.11	0.39	0.01	Average
4	0.260	44.62	61.42	-16.80	44.22	0.39	0.01	QP
5	0.310	24.80	49.97	-25.17	24.39	0.39	0.02	Average
6	0.310	40.82	59.97	-19.15	40.41	0.39	0.02	QP
7	2.461	26.50	46.00	-19.50	26.00	0.44	0.06	Average
8	2.461	36.91	56.00	-19.09	36.41	0.44	0.06	QP
9	6.024	30.07	50.00	-19.93	29.38	0.50	0.19	Average
10	6.024	35.62	60.00	-24.38	34.93	0.50	0.19	QP
11	17.383	27.30	50.00	-22.70	26.39	0.55	0.36	Average
12	17.383	32.08	60.00	-27.92	31.17	0.55	0.36	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation	11a	Test Freq. (MHz)	5180
Power Phase	Neutral		

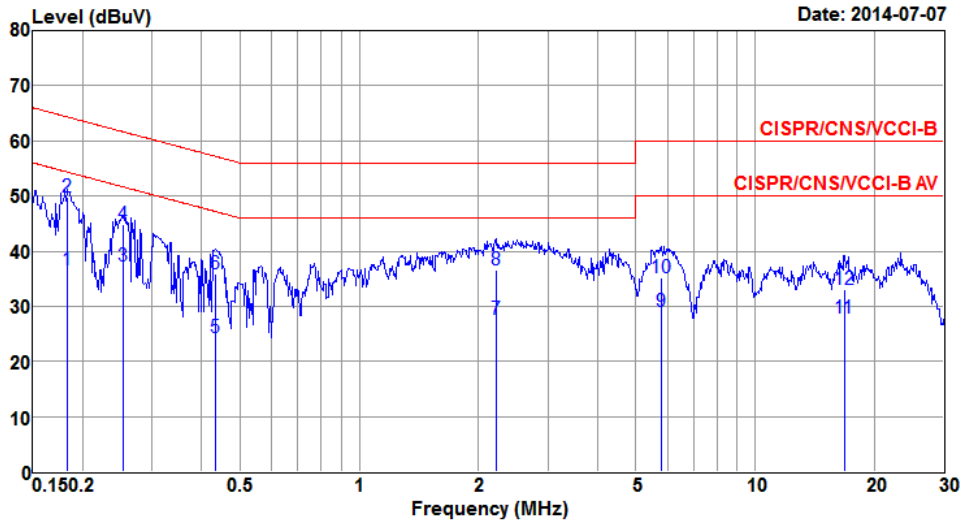

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.182	36.64	54.37	-17.73	36.15	0.48	0.01	Average
2	0.182	49.82	64.37	-14.55	49.33	0.48	0.01	QP
3*	0.253	37.29	51.64	-14.35	36.80	0.48	0.01	Average
4	0.253	44.88	61.64	-16.76	44.39	0.48	0.01	QP
5	0.433	24.32	47.20	-22.88	23.82	0.47	0.03	Average
6	0.433	35.84	57.20	-21.36	35.34	0.47	0.03	QP
7	2.225	27.52	46.00	-18.48	26.98	0.50	0.04	Average
8	2.225	36.58	56.00	-19.42	36.04	0.50	0.04	QP
9	5.805	29.14	50.00	-20.86	28.41	0.54	0.19	Average
10	5.805	35.21	60.00	-24.79	34.48	0.54	0.19	QP
11	16.839	27.85	50.00	-22.15	26.94	0.56	0.35	Average
12	16.839	33.12	60.00	-26.88	32.21	0.56	0.35	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation	11a	Test Freq. (MHz)	5785
Power Phase	Line		

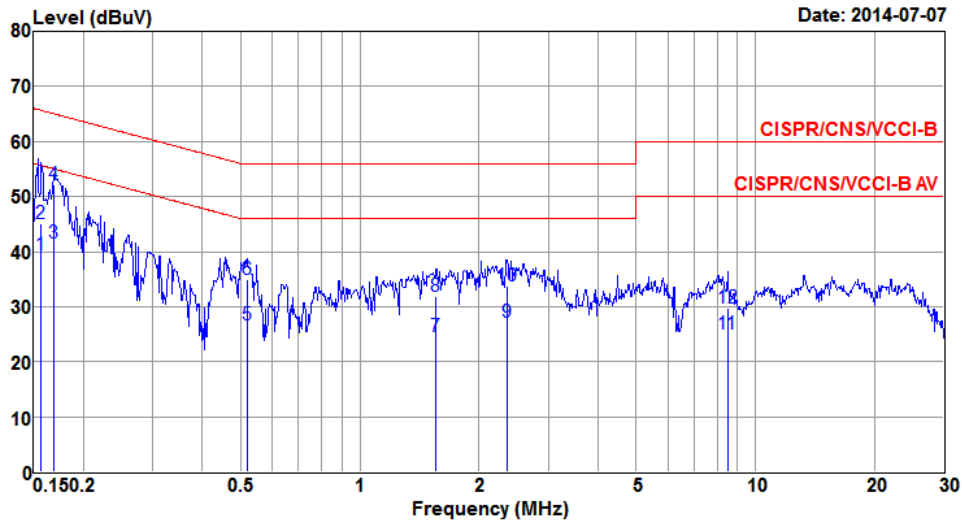

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	39.54	55.65	-16.11	39.12	0.40	0.02	Average
2	0.156	45.02	65.65	-20.63	44.60	0.40	0.02	QP
3	0.169	41.49	55.03	-13.54	41.07	0.40	0.02	Average
4*	0.169	52.23	65.03	-12.80	51.81	0.40	0.02	QP
5	0.518	26.72	46.00	-19.28	26.25	0.40	0.07	Average
6	0.518	35.00	56.00	-21.00	34.53	0.40	0.07	QP
7	1.560	24.56	46.00	-21.44	24.06	0.42	0.08	Average
8	1.560	31.93	56.00	-24.07	31.43	0.42	0.08	QP
9	2.358	27.17	46.00	-18.83	26.68	0.44	0.05	Average
10	2.358	33.70	56.00	-22.30	33.21	0.44	0.05	QP
11	8.501	24.97	50.00	-25.03	24.21	0.53	0.23	Average
12	8.501	29.84	60.00	-30.16	29.08	0.53	0.23	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	11a	Test Freq. (MHz)	5785
Power Phase	Neutral		

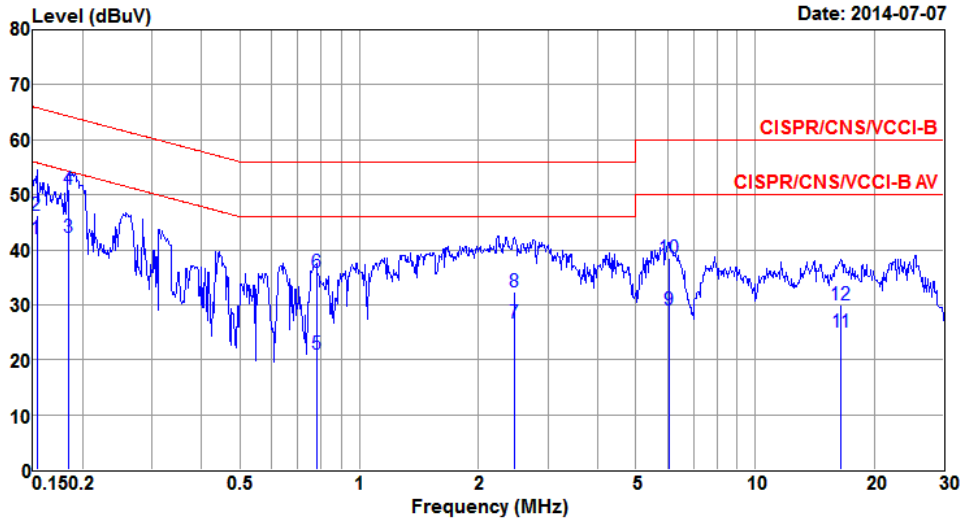

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.153	41.90	55.82	-13.92	41.40	0.48	0.02	Average
2	0.153	46.23	65.82	-19.59	45.73	0.48	0.02	QP
3*	0.184	42.17	54.28	-12.11	41.68	0.48	0.01	Average
4	0.184	51.04	64.28	-13.24	50.55	0.48	0.01	QP
5	0.779	21.12	46.00	-24.88	20.49	0.48	0.15	Average
6	0.779	35.87	56.00	-20.13	35.24	0.48	0.15	QP
7	2.474	26.71	46.00	-19.29	26.14	0.51	0.06	Average
8	2.474	32.41	56.00	-23.59	31.84	0.51	0.06	QP
9	6.056	28.96	50.00	-21.04	28.22	0.54	0.20	Average
10	6.056	38.54	60.00	-21.46	37.80	0.54	0.20	QP
11	16.486	25.09	50.00	-24.91	24.19	0.56	0.34	Average
12	16.486	30.06	60.00	-29.94	29.16	0.56	0.34	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Emission Bandwidth

3.2.1 Limit of Emission bandwidth

Minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW \geq 3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

6dB Bandwidth


1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.2.3 Test Setup




3.2.4 Test Result of Emission Bandwidth

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	3	5180	40.00	35.51	27.54	---	20.12	18.67	17.66	---
11a	3	5200	38.19	32.61	33.99	---	19.83	18.38	17.87	---
11a	3	5240	41.38	38.19	34.13	---	22.21	18.81	18.02	---
HT20	3	5180	39.86	33.48	26.38	---	19.61	18.81	18.45	---
HT20	3	5200	40.00	33.19	30.65	---	19.46	18.81	18.52	---
HT20	3	5240	42.46	29.20	32.75	---	19.97	19.03	19.03	---
HT40	3	5190	51.01	47.19	48.58	---	37.74	37.51	37.40	---
HT40	3	5230	72.70	74.44	72.93	---	38.44	38.55	38.21	---

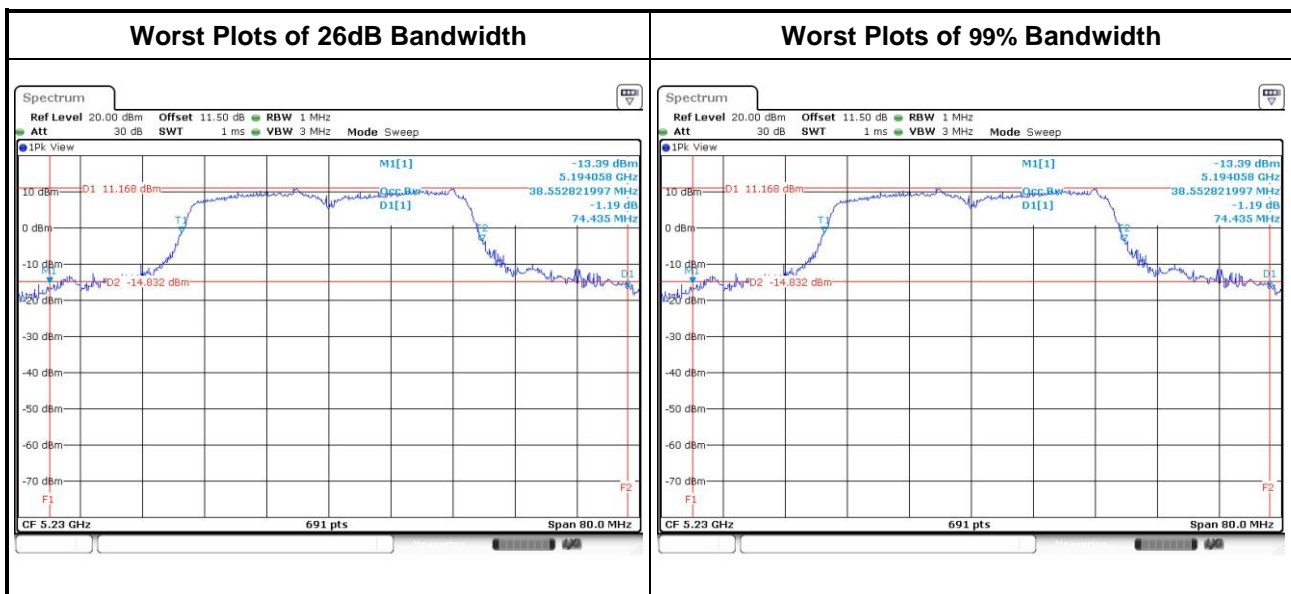

For Frequency band 5725-5850 MHz											
Emission Bandwidth											
Mode	N _{TX}	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	3	5745	23.30	22.32	22.55	---	16.46	16.41	16.46	---	0.5
11a	3	5785	40.51	37.61	34.86	---	15.71	15.42	16.29	---	0.5
11a	3	5825	23.77	23.48	22.84	---	16.06	16.29	15.88	---	0.5
HT20	3	5745	23.71	23.30	23.19	---	16.64	16.00	16.29	---	0.5
HT20	3	5785	41.59	31.88	31.45	---	16.29	15.71	16.29	---	0.5
HT20	3	5825	24.06	23.59	23.59	---	16.29	16.93	16.35	---	0.5
HT40	3	5755	50.20	49.28	48.70	---	35.71	35.48	35.71	---	0.5
HT40	3	5795	71.54	59.36	53.68	---	35.36	35.25	35.48	---	0.5

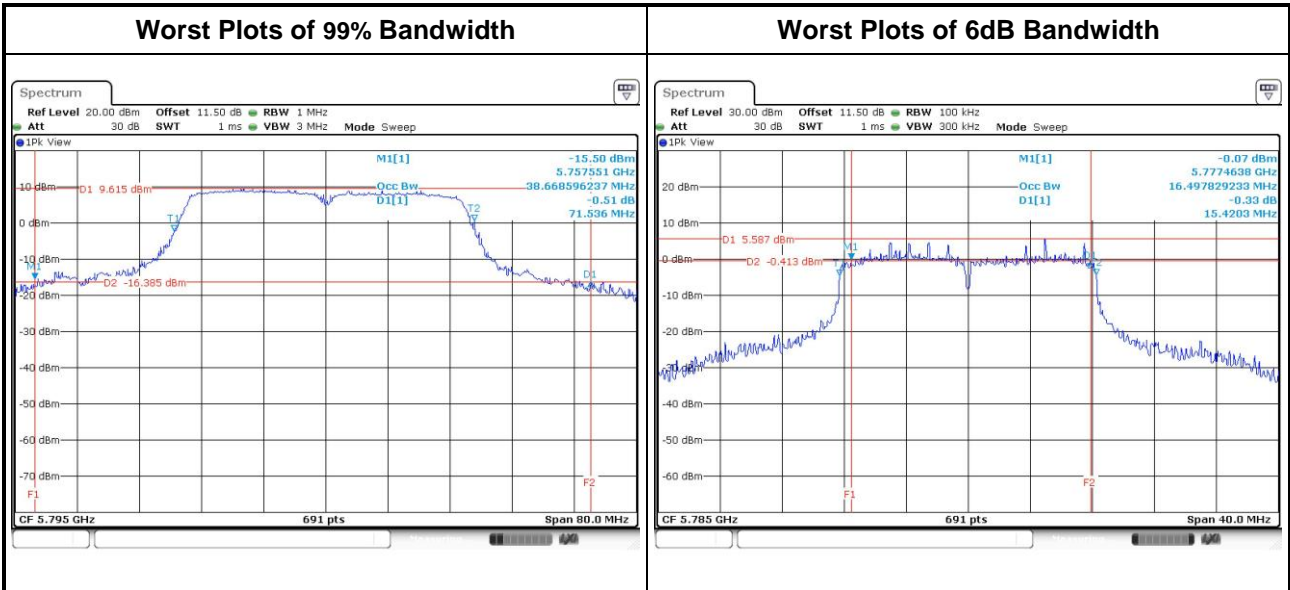

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input checked="" type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/> Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- Method PM-G (Measurement using a gated RF average power meter)**
 - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Conducted Output Power

For Frequency band 5150-5250 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	3	5180	16.82	17.13	15.82	---	137.920	21.40	30.00
11a	3	5200	16.71	16.38	15.84	---	128.703	21.10	30.00
11a	3	5240	16.65	15.13	15.72	---	116.147	20.65	30.00
HT20	3	5180	15.77	16.02	15.21	---	110.941	20.45	30.00
HT20	3	5200	15.75	15.67	15.22	---	107.747	20.32	30.00
HT20	3	5240	15.96	14.67	15.28	---	102.483	20.11	30.00
HT40	3	5190	12.07	11.79	12.04	---	47.203	16.74	30.00
HT40	3	5230	15.02	15.03	15.03	---	95.453	19.80	30.00

For Frequency band 5725-5850 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	3	5745	13.05	11.52	11.79	---	49.475	16.94	30.00
11a	3	5785	16.54	16.16	16.04	---	126.566	21.02	30.00
11a	3	5825	12.71	12.05	12.62	---	52.977	17.24	30.00
HT20	3	5745	12.97	11.42	11.72	---	48.542	16.86	30.00
HT20	3	5785	15.56	15.11	15.06	---	100.472	20.02	30.00
HT20	3	5825	12.69	11.94	12.55	---	52.198	17.18	30.00
HT40	3	5755	12.01	10.93	10.39	---	39.213	15.93	30.00
HT40	3	5795	15.76	15.11	15.04	---	102.020	20.09	30.00

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm / 500 kHz

3.4.2 Test Procedures

For 5150 ~ 5250 MHz

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz


Method SA-1

1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup




3.4.4 Test Result of Peak Power Spectral Density

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm)	Duty Factor (dB)	PPSD with D.F (dBm)	PPSD Limit (dBm)
11a	3	5180	8.44	0.00	8.44	16.23
11a	3	5200	8.41	0.00	8.41	16.23
11a	3	5240	8.20	0.00	8.20	16.23
HT20	3	5180	7.30	0.00	7.30	16.23
HT20	3	5200	7.43	0.00	7.43	16.23
HT20	3	5240	7.13	0.00	7.13	16.23
HT40	3	5190	1.10	0.00	1.10	16.23
HT40	3	5230	4.26	0.00	4.26	16.23

Note:


1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $2 + 10 \cdot \log(3/1) = 6.77 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $17 \text{ dBm} - (6.77 \text{ dBi} - 6 \text{ dBi}) = 16.23 \text{ dBm}$.

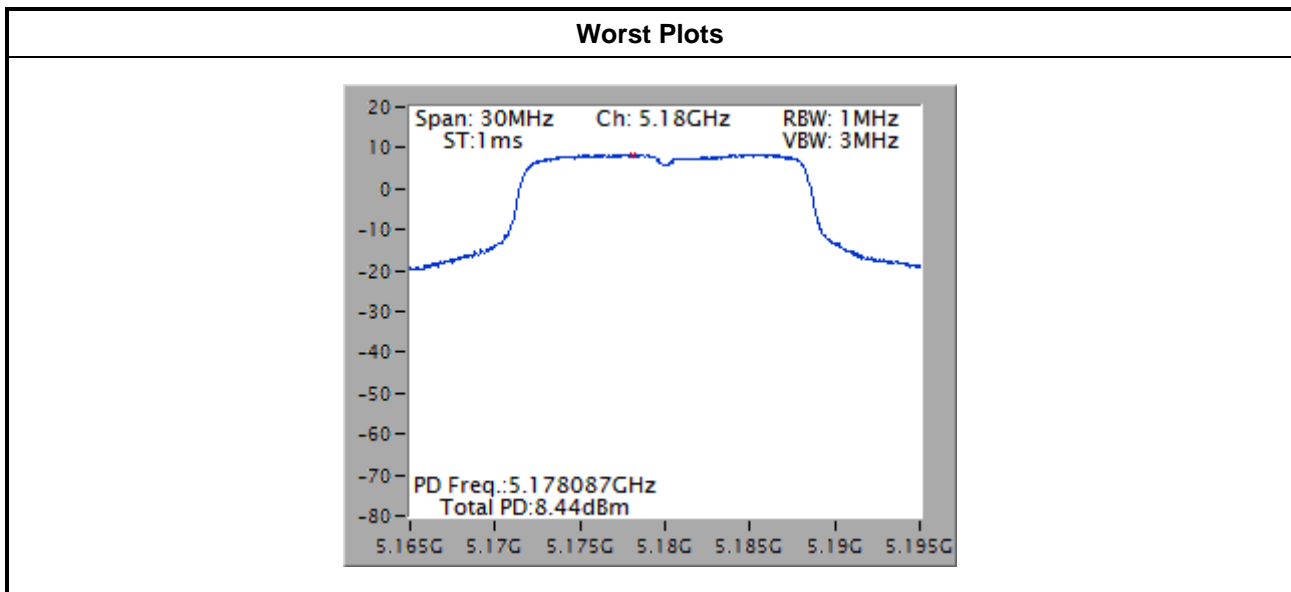

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm)	Duty Factor (dB)	PPSD with D.F (dBm)	PPSD Limit (dBm)
11a	3	5745	2.90	0.00	2.90	29.23
11a	3	5785	6.09	0.00	6.09	29.23
11a	3	5825	3.09	0.00	3.09	29.23
HT20	3	5745	2.22	0.00	2.22	29.23
HT20	3	5785	4.83	0.00	4.83	29.23
HT20	3	5825	2.62	0.00	2.62	29.23
HT40	3	5755	-1.10	0.00	-1.10	29.23
HT40	3	5795	1.82	0.00	1.82	29.23

Note:

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $2 + 10 \cdot \log(3/1) = 6.77 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (6.77 \text{ dBi} - 6 \text{ dBi}) = 29.23 \text{ dBm}$.

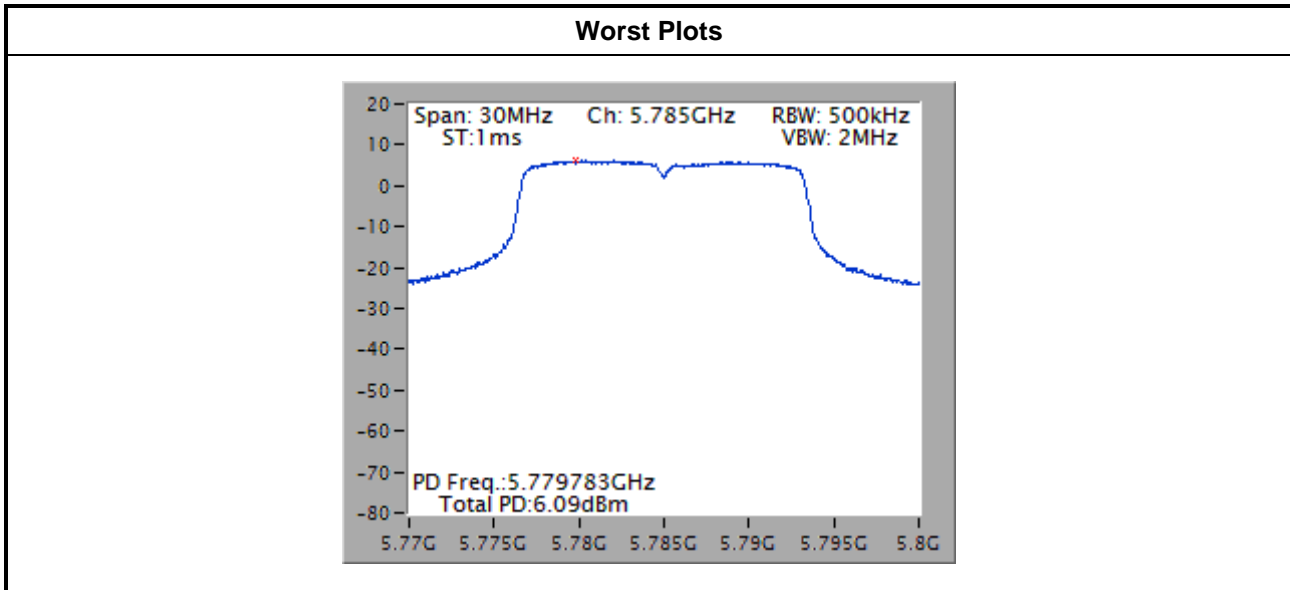

3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

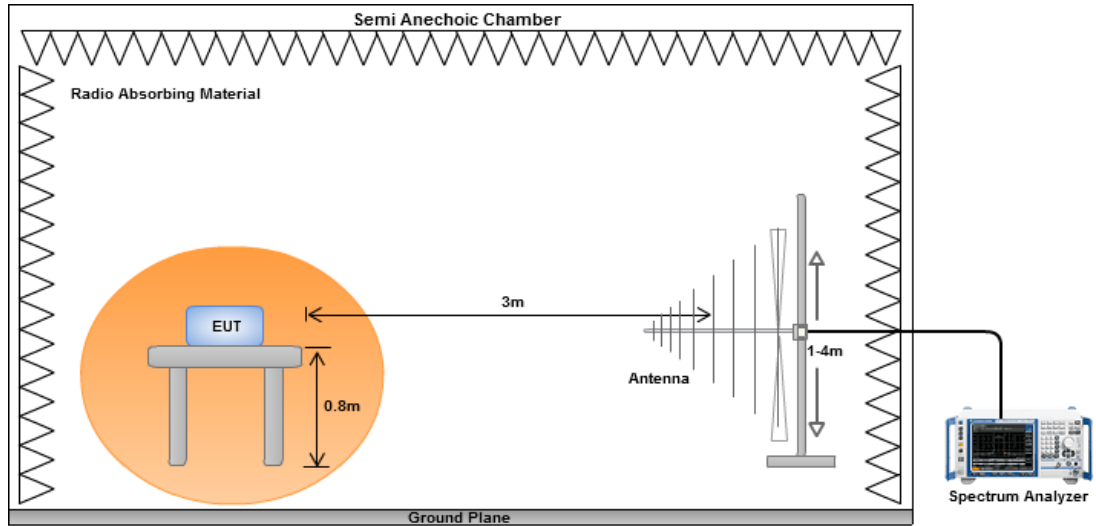


Radiated Emissions above 1 GHz

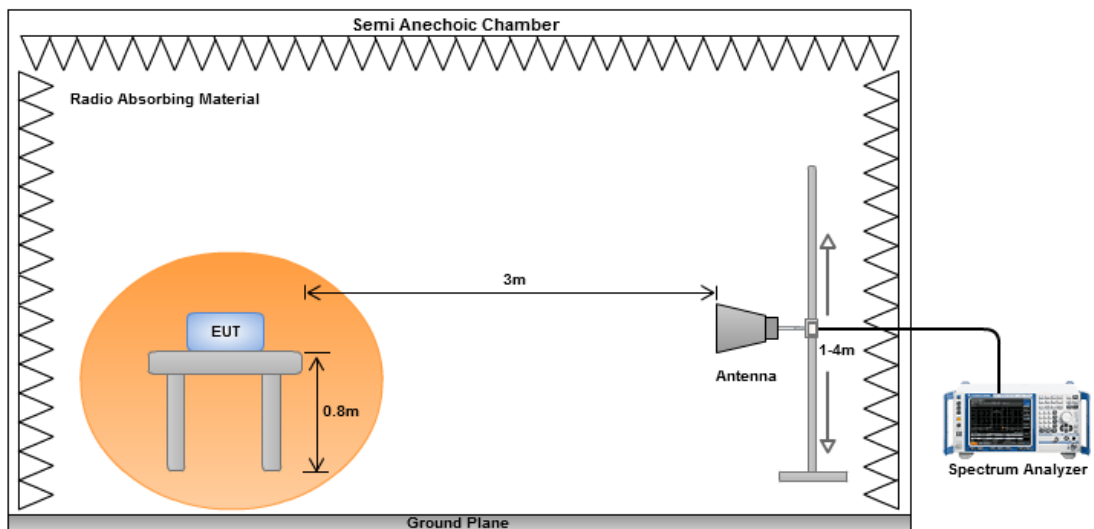

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

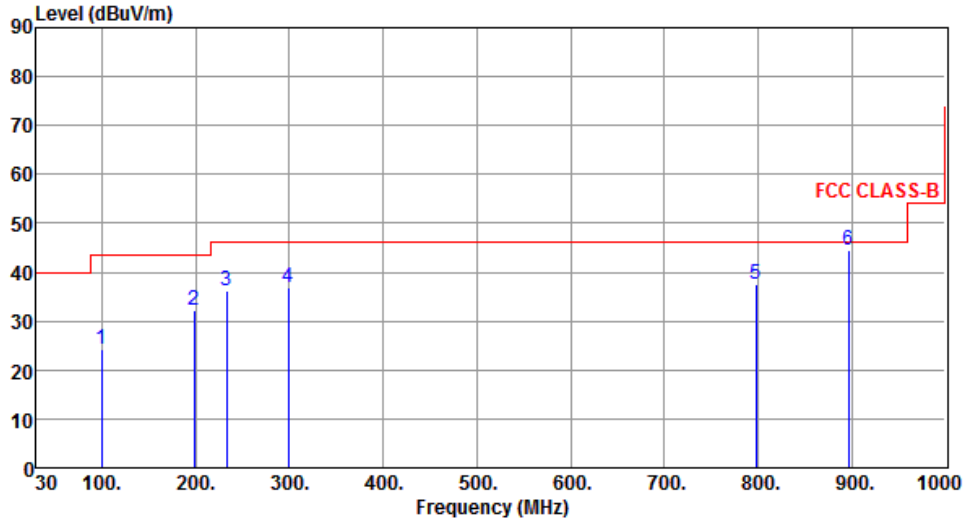Modulation	11a	Test Freq. (MHz)	5180																																																																								
Polarization	Horizontal																																																																										
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, and 55 dBuV/m from 300 to 1000 MHz. Six blue vertical lines represent emission peaks at 99.84, 198.78, 232.73, 298.69, 798.24, and 896.21 MHz, labeled 1 through 6 respectively.</p>																																																																											
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>99.84</td> <td>24.12</td> <td>43.50</td> <td>-19.38</td> <td>45.78</td> <td>-21.66</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>198.78</td> <td>32.36</td> <td>43.50</td> <td>-11.14</td> <td>52.19</td> <td>-19.83</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>232.73</td> <td>36.26</td> <td>46.00</td> <td>-9.74</td> <td>54.85</td> <td>-18.59</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>298.69</td> <td>36.79</td> <td>46.00</td> <td>-9.21</td> <td>53.04</td> <td>-16.25</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>798.24</td> <td>37.47</td> <td>46.00</td> <td>-8.53</td> <td>44.17</td> <td>-6.70</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>896.21</td> <td>44.38</td> <td>46.00</td> <td>-1.62</td> <td>49.96</td> <td>-5.58</td> <td>QP</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	99.84	24.12	43.50	-19.38	45.78	-21.66	Peak	---	2	198.78	32.36	43.50	-11.14	52.19	-19.83	Peak	---	3	232.73	36.26	46.00	-9.74	54.85	-18.59	Peak	---	4	298.69	36.79	46.00	-9.21	53.04	-16.25	Peak	---	5	798.24	37.47	46.00	-8.53	44.17	-6.70	Peak	---	6	896.21	44.38	46.00	-1.62	49.96	-5.58	QP	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																			
1	99.84	24.12	43.50	-19.38	45.78	-21.66	Peak	---																																																																			
2	198.78	32.36	43.50	-11.14	52.19	-19.83	Peak	---																																																																			
3	232.73	36.26	46.00	-9.74	54.85	-18.59	Peak	---																																																																			
4	298.69	36.79	46.00	-9.21	53.04	-16.25	Peak	---																																																																			
5	798.24	37.47	46.00	-8.53	44.17	-6.70	Peak	---																																																																			
6	896.21	44.38	46.00	-1.62	49.96	-5.58	QP	---																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																											

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

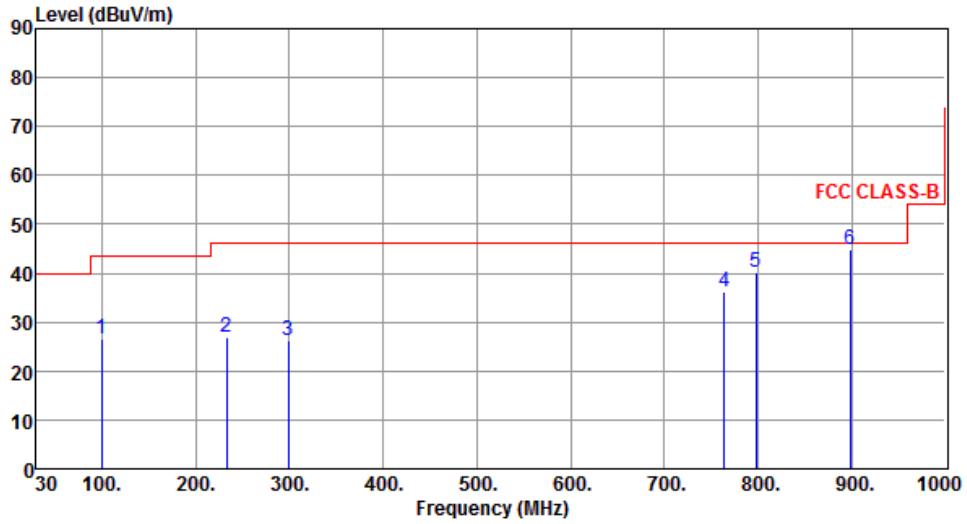

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	99.84	26.64	43.50	-16.86	48.30	-21.66	Peak	---	---
2	232.73	26.77	46.00	-19.23	45.36	-18.59	Peak	---	---
3	298.69	26.12	46.00	-19.88	42.37	-16.25	Peak	---	---
4	764.29	36.13	46.00	-9.87	43.33	-7.20	Peak	---	---
5	798.24	40.20	46.00	-5.80	46.90	-6.70	Peak	---	---
6	898.15	44.80	46.00	-1.20	50.36	-5.56	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

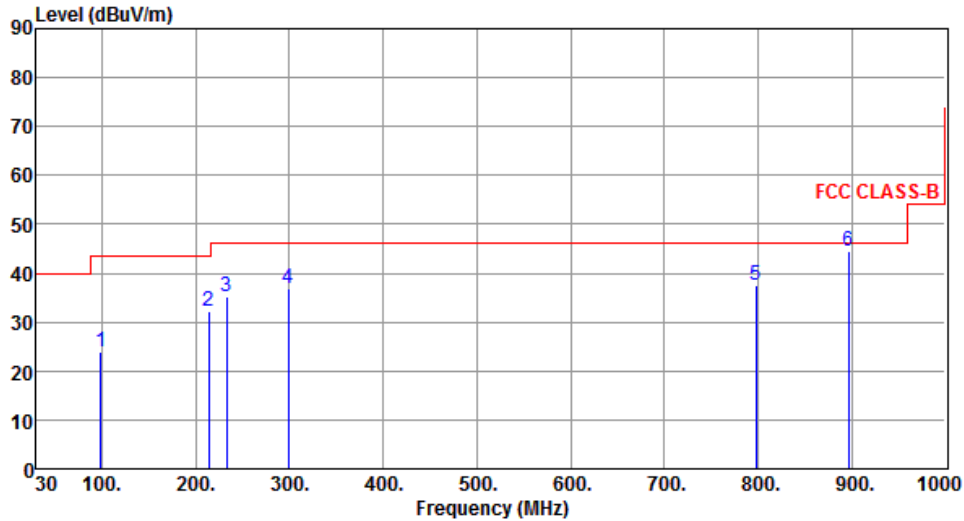

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.87	23.95	43.50	-19.55	45.75	-21.80	Peak	---	---
2	214.30	32.27	43.50	-11.23	51.78	-19.51	Peak	---	---
3	232.73	35.23	46.00	-10.77	53.82	-18.59	Peak	---	---
4	298.69	36.90	46.00	-9.10	53.15	-16.25	Peak	---	---
5	798.24	37.42	46.00	-8.58	44.12	-6.70	Peak	---	---
6	896.21	44.36	46.00	-1.64	49.94	-5.58	QP	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

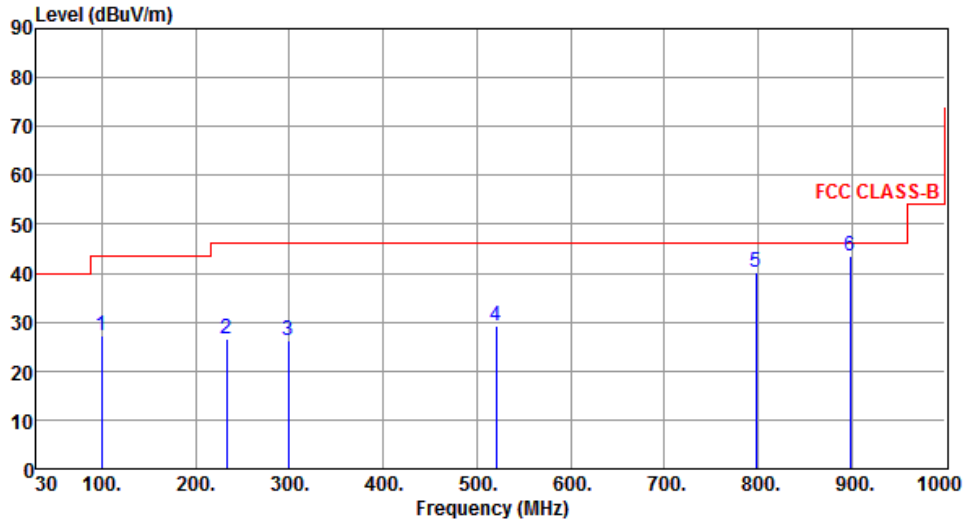

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	99.84	27.18	43.50	-16.32	48.84	-21.66	Peak	---	---
2	232.73	26.68	46.00	-19.32	45.27	-18.59	Peak	---	---
3	298.69	26.28	46.00	-19.72	42.53	-16.25	Peak	---	---
4	520.82	29.17	46.00	-16.83	40.41	-11.24	Peak	---	---
5	798.24	40.05	46.00	-5.95	46.75	-6.70	Peak	---	---
6	898.15	43.53	46.00	-2.47	49.09	-5.56	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

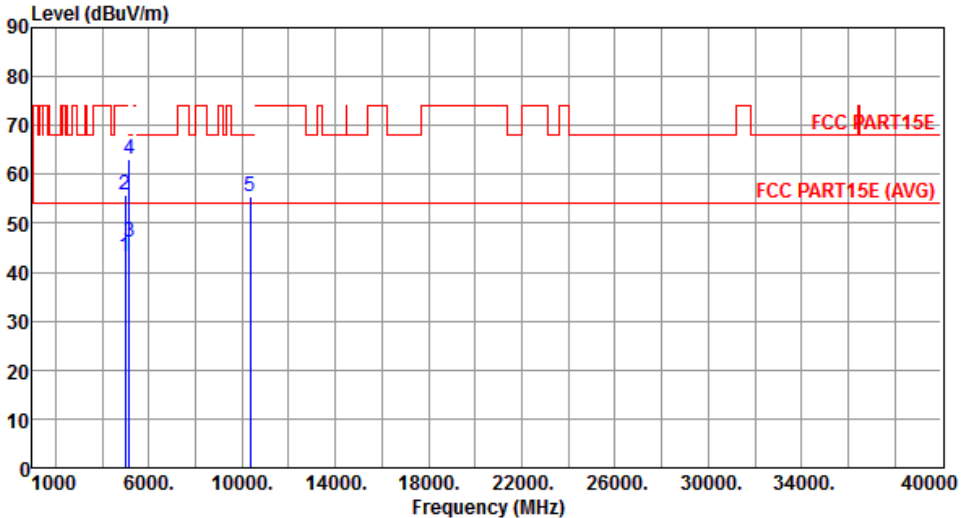Modulation	11a	Test Freq. (MHz)	5180																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5000.00</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>37.64</td> <td>5.42</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5000.00</td> <td>55.77</td> <td>74.00</td> <td>-18.23</td> <td>50.35</td> <td>5.42</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>46.03</td> <td>54.00</td> <td>-7.97</td> <td>40.32</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>63.22</td> <td>74.00</td> <td>-10.78</td> <td>57.51</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>10360.00</td> <td>55.56</td> <td>68.20</td> <td>-12.64</td> <td>41.12</td> <td>14.44</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5000.00	43.06	54.00	-10.94	37.64	5.42	Average	---	2	5000.00	55.77	74.00	-18.23	50.35	5.42	Peak	---	3	5150.00	46.03	54.00	-7.97	40.32	5.71	Average	---	4	5150.00	63.22	74.00	-10.78	57.51	5.71	Peak	---	5	10360.00	55.56	68.20	-12.64	41.12	14.44	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5000.00	43.06	54.00	-10.94	37.64	5.42	Average	---																																																											
2	5000.00	55.77	74.00	-18.23	50.35	5.42	Peak	---																																																											
3	5150.00	46.03	54.00	-7.97	40.32	5.71	Average	---																																																											
4	5150.00	63.22	74.00	-10.78	57.51	5.71	Peak	---																																																											
5	10360.00	55.56	68.20	-12.64	41.12	14.44	Peak	---																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

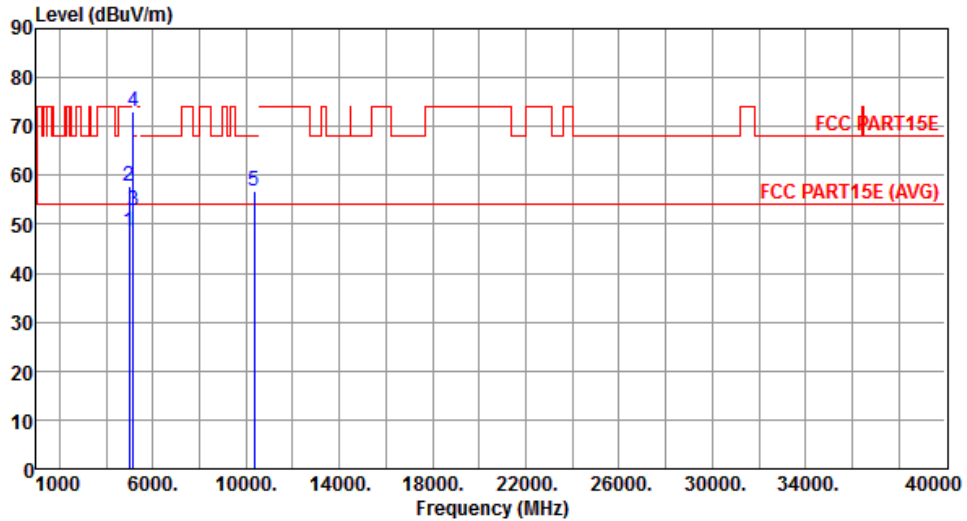


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	48.33	54.00	-5.67	42.91	5.42	Average	---	---
2	5000.00	57.72	74.00	-16.28	52.30	5.42	Peak	---	---
3	5150.00	52.65	54.00	-1.35	46.94	5.71	Average	---	---
4	5150.00	73.00	74.00	-1.00	67.29	5.71	Peak	---	---
5	10360.00	56.86	68.20	-11.34	42.42	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

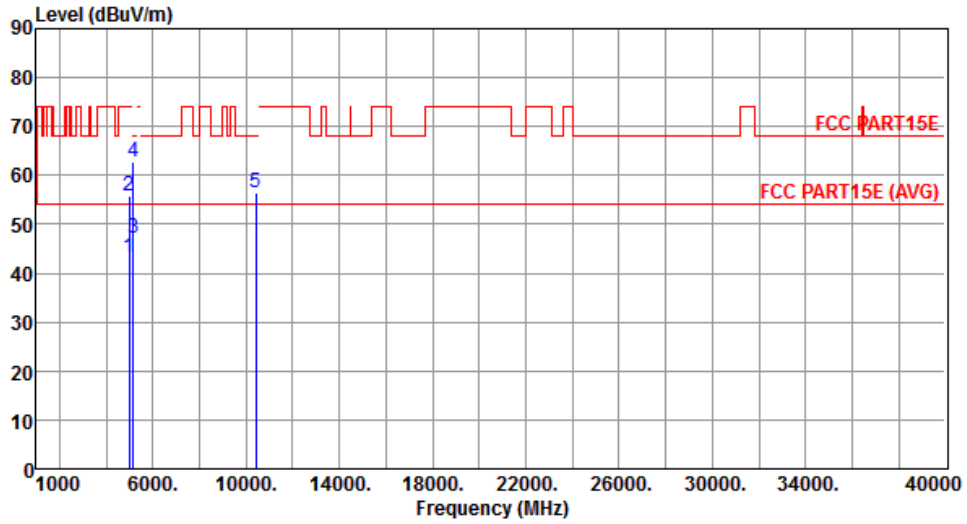


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	43.17	54.00	-10.83	37.75	5.42	Average	---	---
2	5000.00	55.91	74.00	-18.09	50.49	5.42	Peak	---	---
3	5150.00	47.01	54.00	-6.99	41.30	5.71	Average	---	---
4	5150.00	62.60	74.00	-11.40	56.89	5.71	Peak	---	---
5	10400.00	56.40	68.20	-11.80	41.90	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

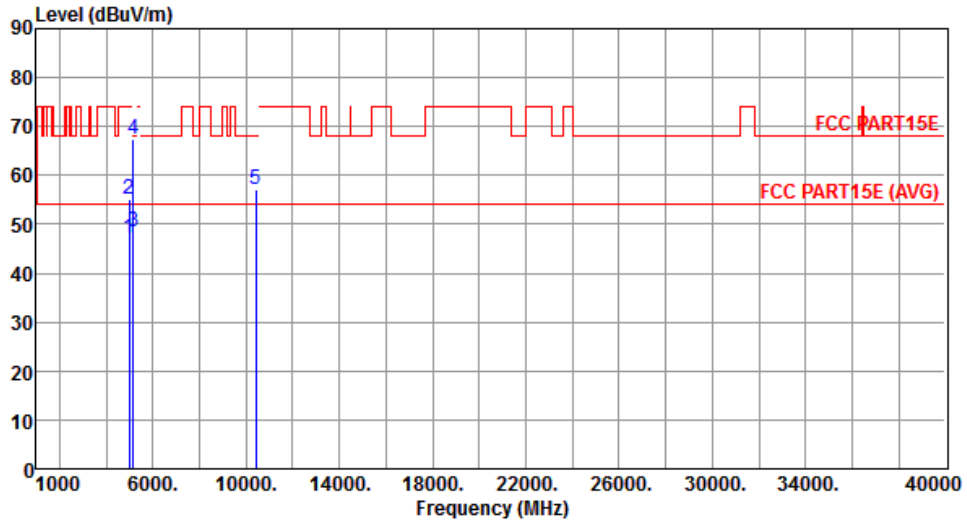


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	47.10	54.00	-6.90	41.68	5.42	Average	---	---
2	5000.00	55.13	74.00	-18.87	49.71	5.42	Peak	---	---
3	5150.00	48.58	54.00	-5.42	42.87	5.71	Average	---	---
4	5150.00	67.29	74.00	-6.71	61.58	5.71	Peak	---	---
5	10400.00	57.06	68.20	-11.14	42.56	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

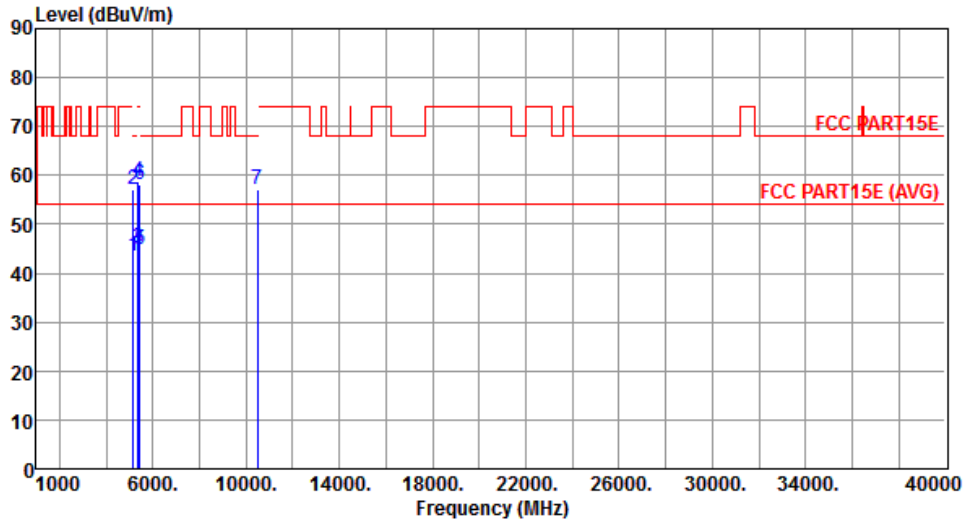


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.64	54.00	-10.36	37.93	5.71	Average	---	---
2	5150.00	57.14	74.00	-16.86	51.43	5.71	Peak	---	---
3	5350.00	45.03	54.00	-8.97	39.04	5.99	Average	---	---
4	5350.00	58.65	74.00	-15.35	52.66	5.99	Peak	---	---
5	5440.00	44.91	54.00	-9.09	38.81	6.10	Average	---	---
6	5440.00	58.05	74.00	-15.95	51.95	6.10	Peak	---	---
7	10480.00	57.03	68.20	-11.17	42.40	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

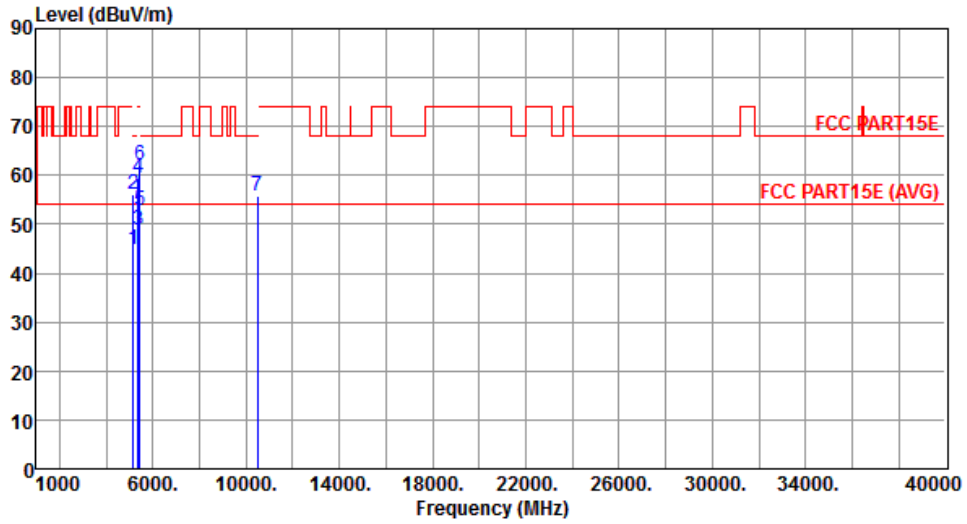


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.85	54.00	-9.15	39.14	5.71	Average	---	---
2	5150.00	55.99	74.00	-18.01	50.28	5.71	Peak	---	---
3	5350.00	48.98	54.00	-5.02	42.99	5.99	Average	---	---
4	5350.00	59.51	74.00	-14.49	53.52	5.99	Peak	---	---
5	5440.00	52.92	54.00	-1.08	46.82	6.10	Average	---	---
6	5440.00	62.19	74.00	-11.81	56.09	6.10	Peak	---	---
7	10480.00	55.84	68.20	-12.36	41.21	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

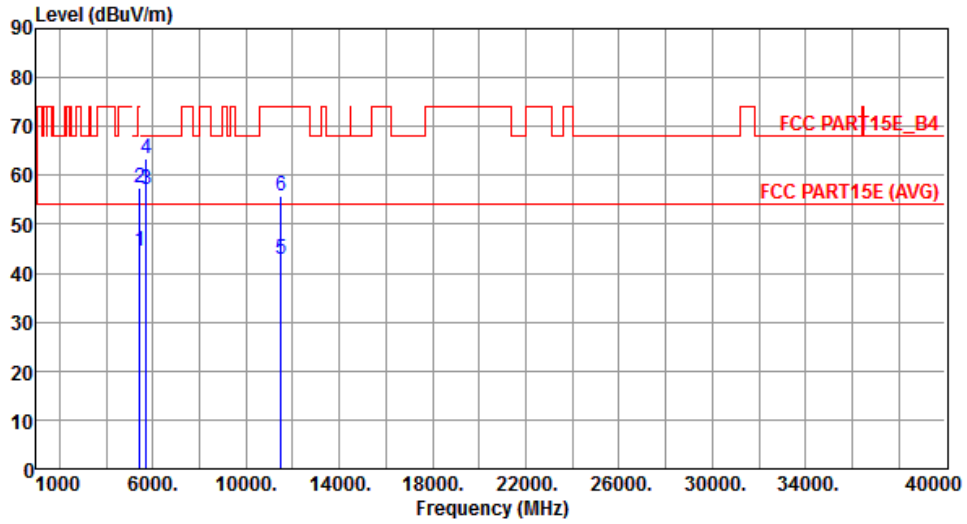


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.55	54.00	-9.45	38.45	6.10	Average	---	---
2	5440.00	57.38	74.00	-16.62	51.28	6.10	Peak	---	---
3	5715.00	57.21	68.20	-10.99	50.63	6.58	Peak	---	---
4	5725.00	63.59	78.20	-14.61	57.00	6.59	Peak	---	---
5	11490.00	42.85	54.00	-11.15	27.65	15.20	Average	---	---
6	11490.00	55.74	74.00	-18.26	40.54	15.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

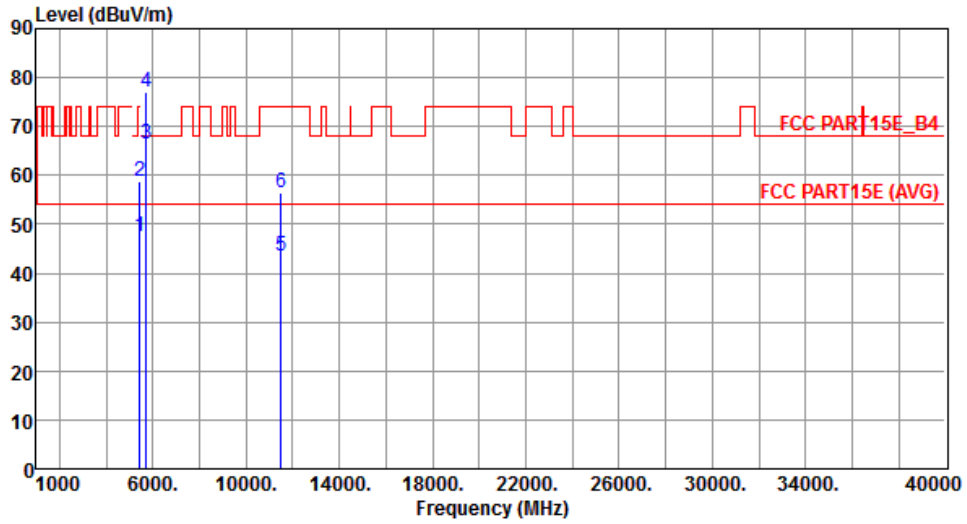


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	47.41	54.00	-6.59	41.31	6.10	Average	---	---
2	5440.00	58.78	74.00	-15.22	52.68	6.10	Peak	---	---
3	5715.00	66.54	68.20	-1.66	59.96	6.58	Peak	---	---
4	5725.00	77.14	78.20	-1.06	70.55	6.59	Peak	---	---
5	11490.00	43.41	54.00	-10.59	28.21	15.20	Average	---	---
6	11490.00	56.53	74.00	-17.47	41.33	15.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

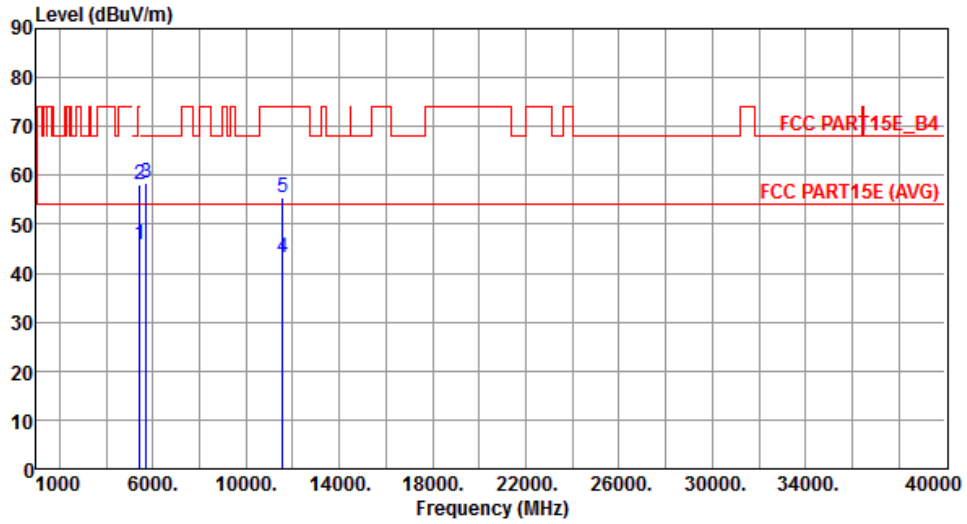


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	45.70	54.00	-8.30	39.60	6.10	Average	---	---
2	5440.00	58.16	74.00	-15.84	52.06	6.10	Peak	---	---
3	5725.00	58.49	78.20	-19.71	51.90	6.59	Peak	---	---
4	11570.00	43.27	54.00	-10.73	28.12	15.15	Average	---	---
5	11570.00	55.46	74.00	-18.54	40.31	15.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

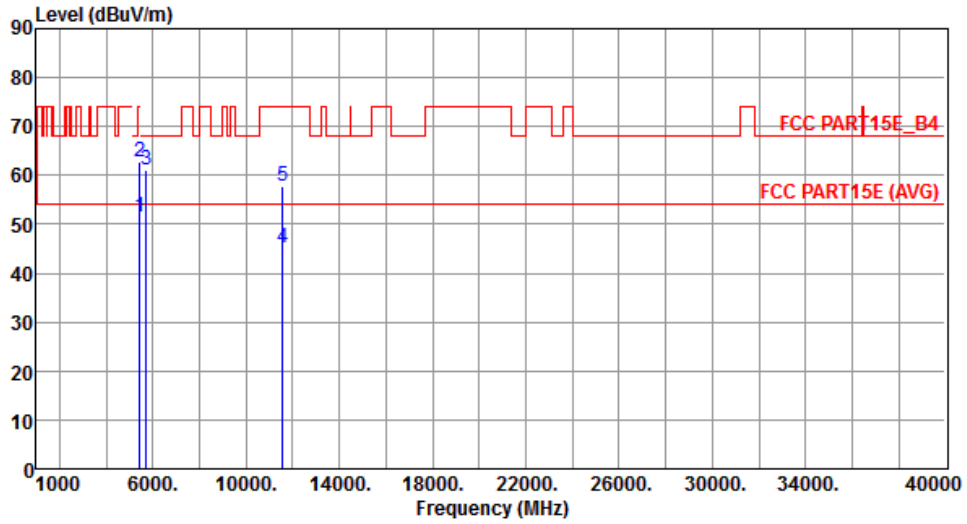


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	51.47	54.00	-2.53	45.37	6.10	Average	---	---
2	5440.00	62.82	74.00	-11.18	56.72	6.10	Peak	---	---
3	5725.00	61.24	78.20	-16.96	54.65	6.59	Peak	---	---
4	11570.00	45.23	54.00	-8.77	30.08	15.15	Average	---	---
5	11570.00	57.64	74.00	-16.36	42.49	15.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

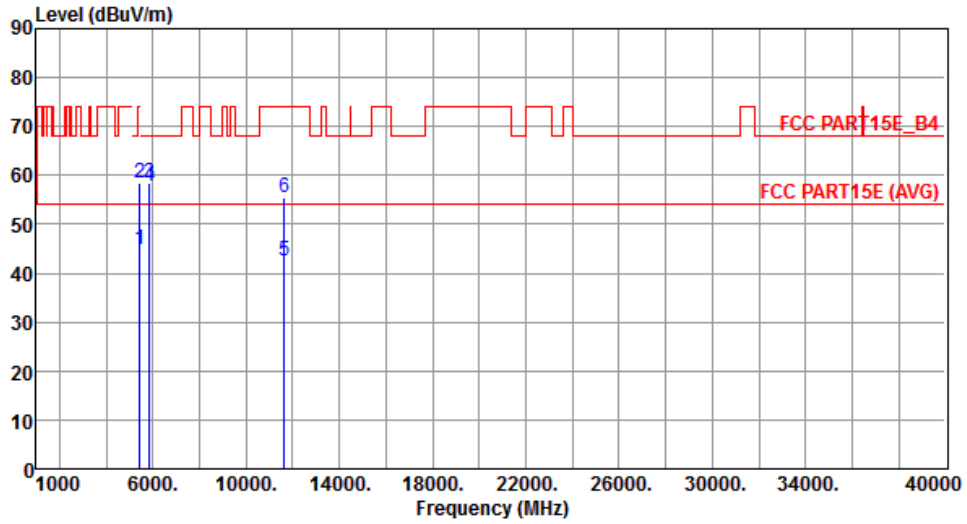


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.89	54.00	-9.11	38.79	6.10	Average	---	---
2	5440.00	58.46	74.00	-15.54	52.36	6.10	Peak	---	---
3	5850.00	58.29	78.20	-19.91	51.50	6.79	Peak	---	---
4	5860.00	57.77	68.20	-10.43	50.99	6.78	Peak	---	---
5	11650.00	42.36	54.00	-11.64	27.25	15.11	Average	---	---
6	11650.00	55.46	74.00	-18.54	40.35	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

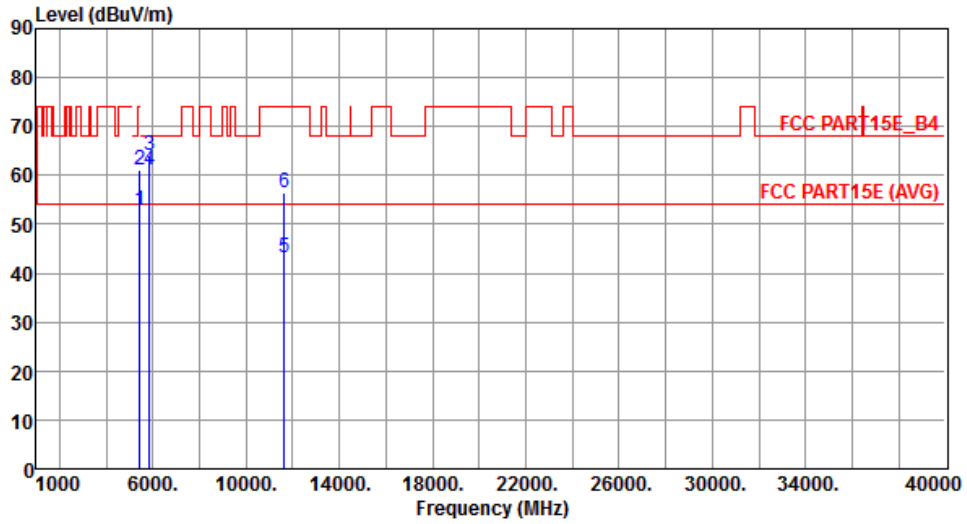


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	52.74	54.00	-1.26	46.64	6.10	Average	---	---
2	5440.00	61.26	74.00	-12.74	55.16	6.10	Peak	---	---
3	5850.00	63.95	78.20	-14.25	57.16	6.79	Peak	---	---
4	5860.00	61.10	68.20	-7.10	54.32	6.78	Peak	---	---
5	11650.00	43.07	54.00	-10.93	27.96	15.11	Average	---	---
6	11650.00	56.49	74.00	-17.51	41.38	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

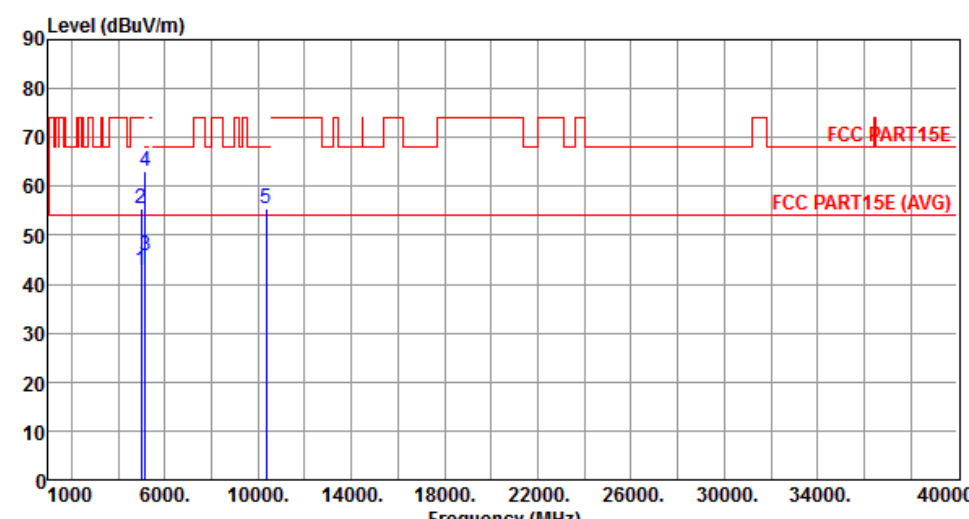Modulation	HT20	Test Freq. (MHz)	5180																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5000.00</td> <td>43.00</td> <td>54.00</td> <td>-11.00</td> <td>37.58</td> <td>5.42</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5000.00</td> <td>55.57</td> <td>74.00</td> <td>-18.43</td> <td>50.15</td> <td>5.42</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>40.18</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>63.19</td> <td>74.00</td> <td>-10.81</td> <td>57.48</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>10360.00</td> <td>55.30</td> <td>68.20</td> <td>-12.90</td> <td>40.86</td> <td>14.44</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5000.00	43.00	54.00	-11.00	37.58	5.42	Average	---	2	5000.00	55.57	74.00	-18.43	50.15	5.42	Peak	---	3	5150.00	45.89	54.00	-8.11	40.18	5.71	Average	---	4	5150.00	63.19	74.00	-10.81	57.48	5.71	Peak	---	5	10360.00	55.30	68.20	-12.90	40.86	14.44	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5000.00	43.00	54.00	-11.00	37.58	5.42	Average	---																																																											
2	5000.00	55.57	74.00	-18.43	50.15	5.42	Peak	---																																																											
3	5150.00	45.89	54.00	-8.11	40.18	5.71	Average	---																																																											
4	5150.00	63.19	74.00	-10.81	57.48	5.71	Peak	---																																																											
5	10360.00	55.30	68.20	-12.90	40.86	14.44	Peak	---																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		

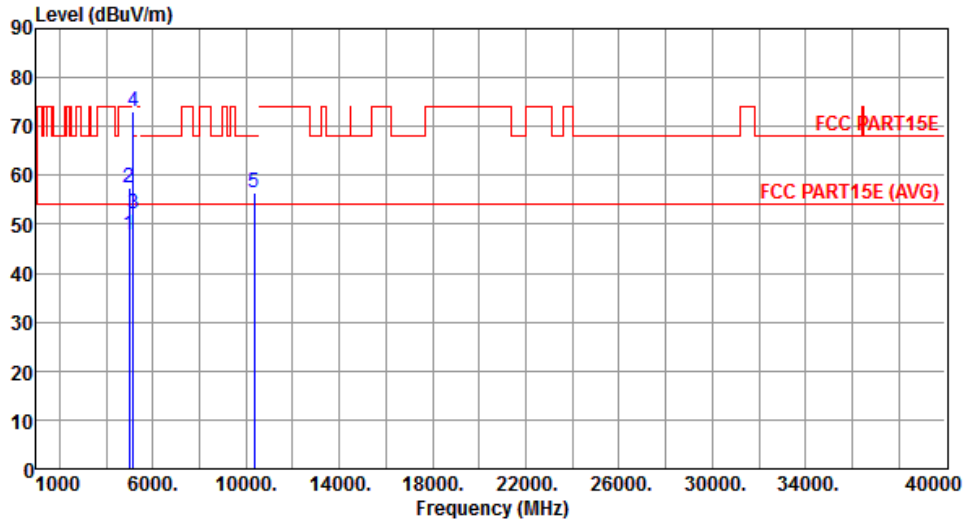


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	47.75	54.00	-6.25	42.33	5.42	Average	---	---
2	5000.00	57.40	74.00	-16.60	51.98	5.42	Peak	---	---
3	5150.00	51.98	54.00	-2.02	46.27	5.71	Average	---	---
4	5150.00	72.99	74.00	-1.01	67.28	5.71	Peak	---	---
5	10360.00	56.39	68.20	-11.81	41.95	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

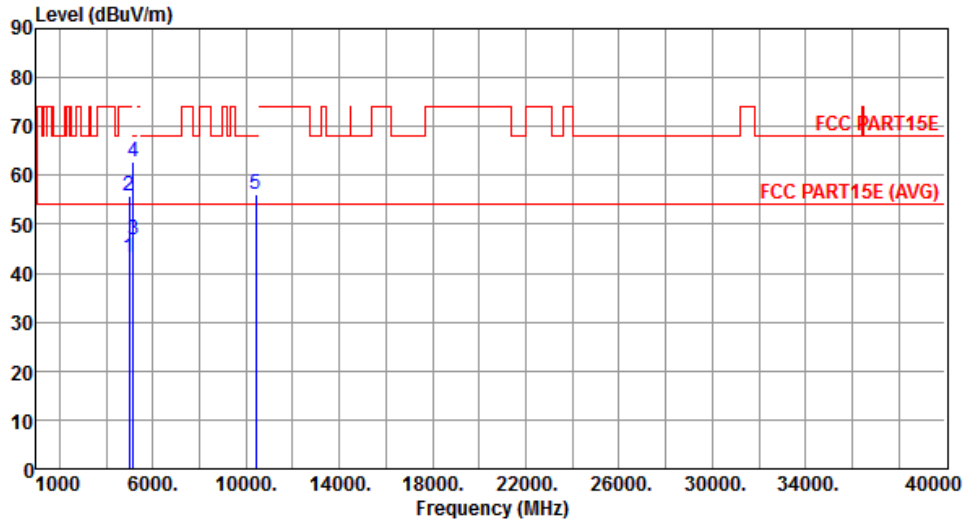


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	43.01	54.00	-10.99	37.59	5.42	Average	---	---
2	5000.00	55.65	74.00	-18.35	50.23	5.42	Peak	---	---
3	5150.00	46.97	54.00	-7.03	41.26	5.71	Average	---	---
4	5150.00	62.83	74.00	-11.17	57.12	5.71	Peak	---	---
5	10400.00	56.26	68.20	-11.94	41.76	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5200
Polarization	Vertical		

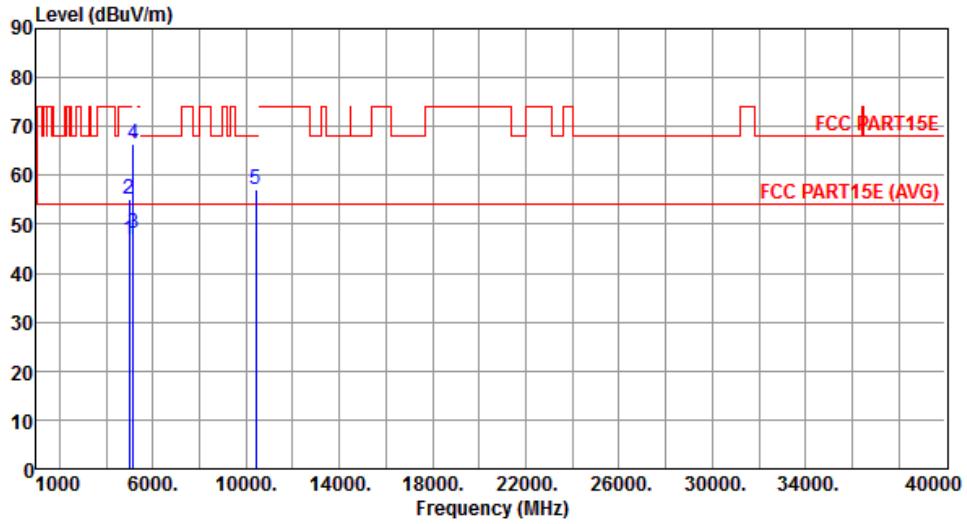


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	46.91	54.00	-7.09	41.49	5.42	Average	---	---
2	5000.00	55.28	74.00	-18.72	49.86	5.42	Peak	---	---
3	5150.00	48.01	54.00	-5.99	42.30	5.71	Average	---	---
4	5150.00	66.35	74.00	-7.65	60.64	5.71	Peak	---	---
5	10400.00	57.18	68.20	-11.02	42.68	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

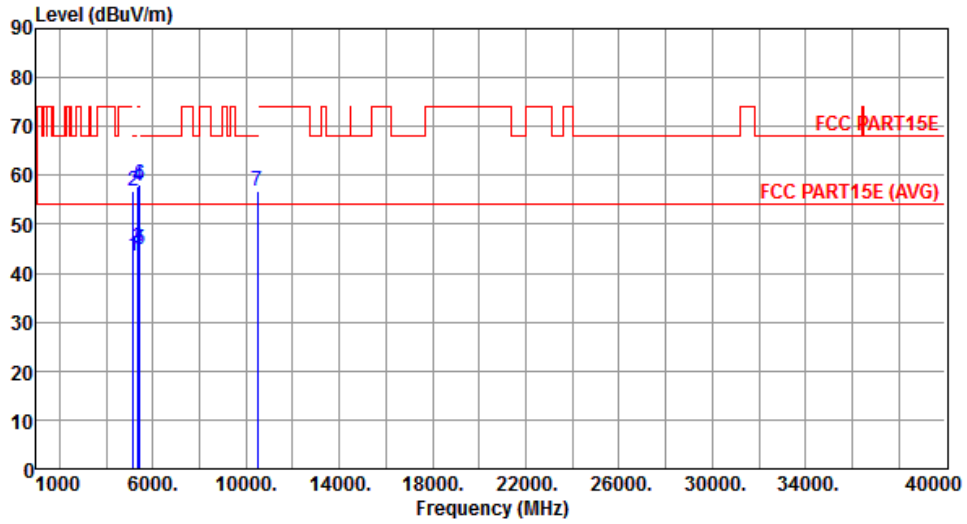


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.58	54.00	-10.42	37.87	5.71	Average	---	---
2	5150.00	56.69	74.00	-17.31	50.98	5.71	Peak	---	---
3	5350.00	45.20	54.00	-8.80	39.21	5.99	Average	---	---
4	5350.00	57.78	74.00	-16.22	51.79	5.99	Peak	---	---
5	5440.00	44.83	54.00	-9.17	38.73	6.10	Average	---	---
6	5440.00	57.98	74.00	-16.02	51.88	6.10	Peak	---	---
7	10480.00	56.94	68.20	-11.26	42.31	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5240
Polarization	Vertical		

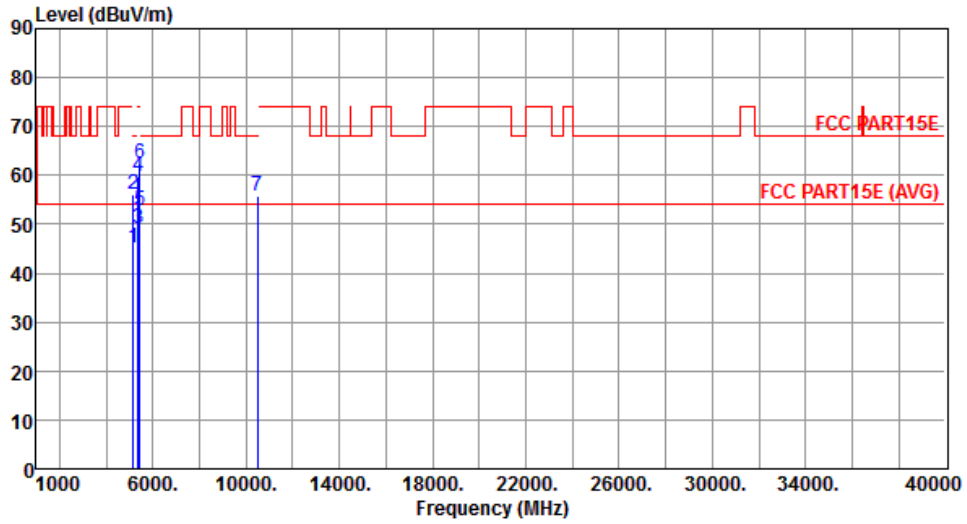


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.23	54.00	-8.77	39.52	5.71	Average	---	---
2	5150.00	56.14	74.00	-17.86	50.43	5.71	Peak	---	---
3	5350.00	49.14	54.00	-4.86	43.15	5.99	Average	---	---
4	5350.00	59.67	74.00	-14.33	53.68	5.99	Peak	---	---
5	5440.00	52.86	54.00	-1.14	46.76	6.10	Average	---	---
6	5440.00	62.41	74.00	-11.59	56.31	6.10	Peak	---	---
7	10480.00	55.88	68.20	-12.32	41.25	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

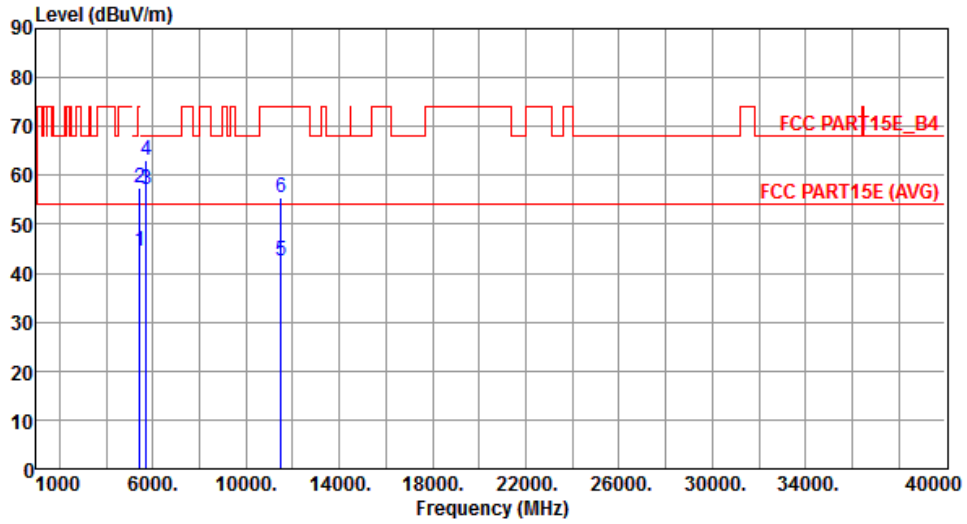


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.34	54.00	-9.66	38.24	6.10	Average	---	---
2	5440.00	57.57	74.00	-16.43	51.47	6.10	Peak	---	---
3	5715.00	57.06	68.20	-11.14	50.48	6.58	Peak	---	---
4	5725.00	63.17	78.20	-15.03	56.58	6.59	Peak	---	---
5	11490.00	42.62	54.00	-11.38	27.42	15.20	Average	---	---
6	11490.00	55.58	74.00	-18.42	40.38	15.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5745
Polarization	Vertical		

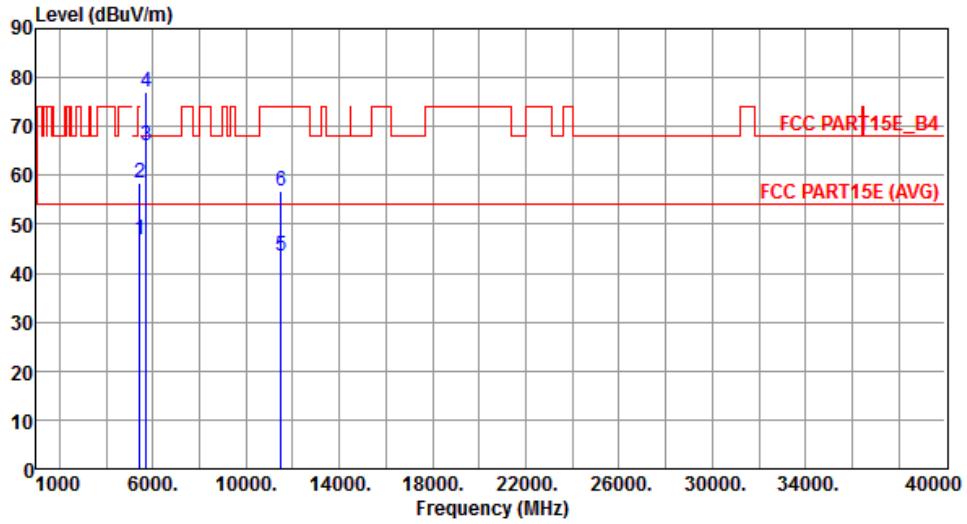


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	46.69	54.00	-7.31	40.59	6.10	Average	---	---
2	5440.00	58.42	74.00	-15.58	52.32	6.10	Peak	---	---
3	5715.00	65.99	68.20	-2.21	59.41	6.58	Peak	---	---
4	5725.00	77.14	78.20	-1.06	70.55	6.59	Peak	---	---
5	11490.00	43.40	54.00	-10.60	28.20	15.20	Average	---	---
6	11490.00	56.88	74.00	-17.12	41.68	15.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

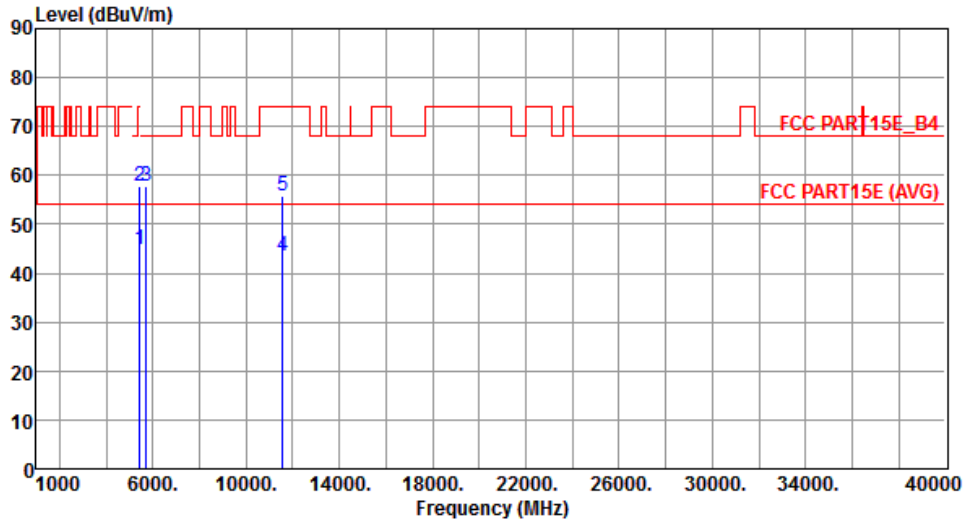


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.78	54.00	-9.22	38.68	6.10	Average	---	---
2	5440.00	57.64	74.00	-16.36	51.54	6.10	Peak	---	---
3	5725.00	57.84	78.20	-20.36	51.25	6.59	Peak	---	---
4	11570.00	43.46	54.00	-10.54	28.31	15.15	Average	---	---
5	11570.00	55.72	74.00	-18.28	40.57	15.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5785
Polarization	Vertical		

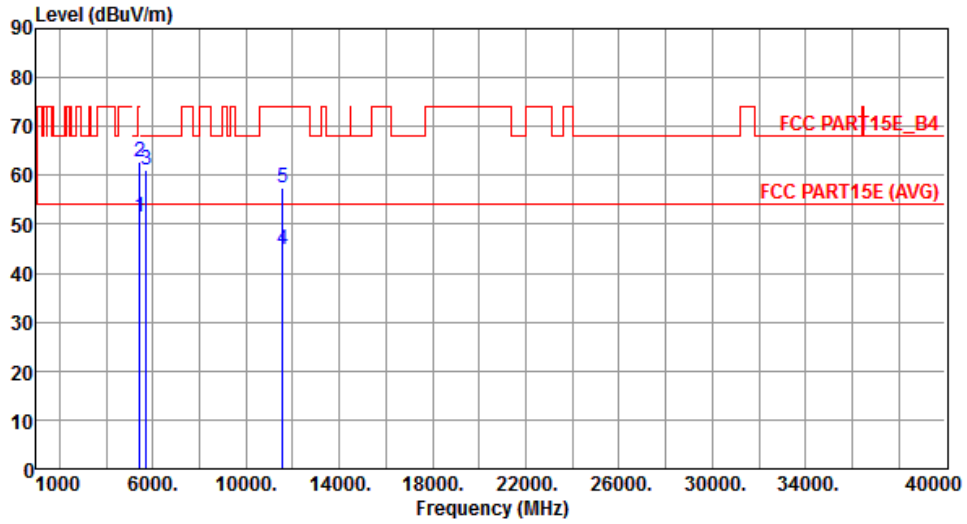


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	51.38	54.00	-2.62	45.28	6.10	Average	---	---
2	5440.00	62.69	74.00	-11.31	56.59	6.10	Peak	---	---
3	5725.00	60.95	78.20	-17.25	54.36	6.59	Peak	---	---
4	11570.00	44.69	54.00	-9.31	29.54	15.15	Average	---	---
5	11570.00	57.43	74.00	-16.57	42.28	15.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

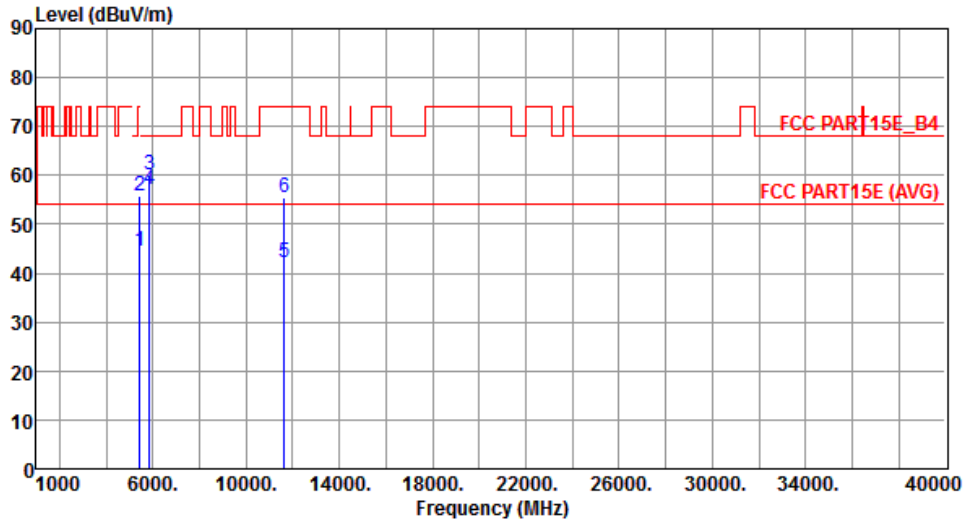


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.45	54.00	-9.55	38.35	6.10	Average	---	---
2	5440.00	55.74	74.00	-18.26	49.64	6.10	Peak	---	---
3	5850.00	59.98	78.20	-18.22	53.19	6.79	Peak	---	---
4	5860.00	57.00	68.20	-11.20	50.22	6.78	Peak	---	---
5	11650.00	42.32	54.00	-11.68	27.21	15.11	Average	---	---
6	11650.00	55.49	74.00	-18.51	40.38	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	5825
Polarization	Vertical		

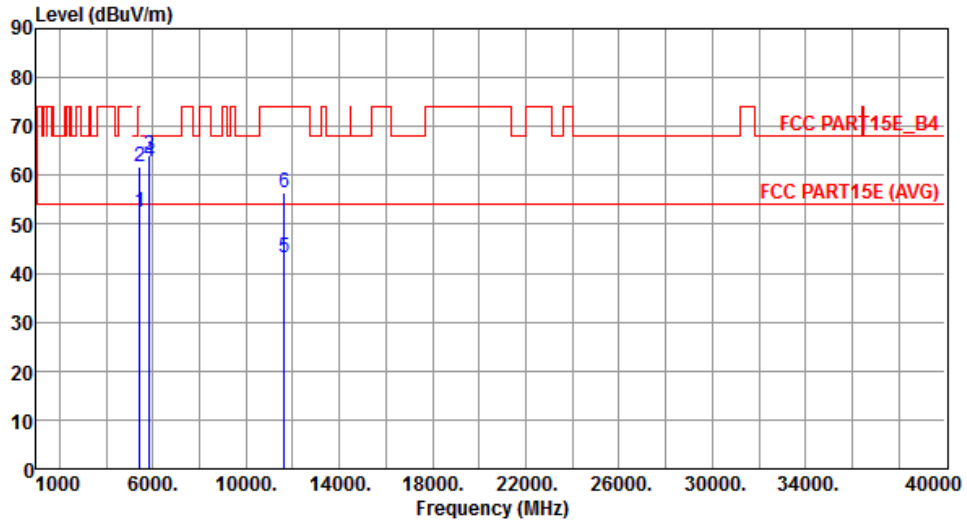


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	52.35	54.00	-1.65	46.25	6.10	Average	---	---
2	5440.00	61.86	74.00	-12.14	55.76	6.10	Peak	---	---
3	5850.00	64.14	78.20	-14.06	57.35	6.79	Peak	---	---
4	5860.00	62.63	68.20	-5.57	55.85	6.78	Peak	---	---
5	11650.00	43.32	54.00	-10.68	28.21	15.11	Average	---	---
6	11650.00	56.56	74.00	-17.44	41.45	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

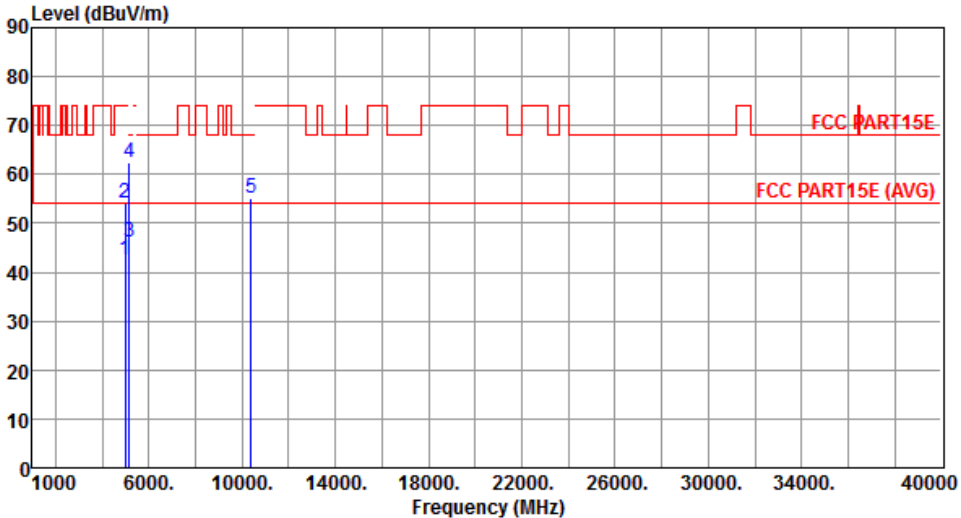Modulation	HT40	Test Freq. (MHz)	5190																																																																
Polarization	Horizontal																																																																		
																																																																			
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5000.00</td> <td>42.63</td> <td>54.00</td> <td>-11.37</td> <td>37.21</td> <td>5.42</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5000.00</td> <td>54.28</td> <td>74.00</td> <td>-19.72</td> <td>48.86</td> <td>5.42</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>46.08</td> <td>54.00</td> <td>-7.92</td> <td>40.37</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>62.44</td> <td>74.00</td> <td>-11.56</td> <td>56.73</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>10380.00</td> <td>55.06</td> <td>68.20</td> <td>-13.14</td> <td>40.60</td> <td>14.46</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5000.00	42.63	54.00	-11.37	37.21	5.42	Average	---	2	5000.00	54.28	74.00	-19.72	48.86	5.42	Peak	---	3	5150.00	46.08	54.00	-7.92	40.37	5.71	Average	---	4	5150.00	62.44	74.00	-11.56	56.73	5.71	Peak	---	5	10380.00	55.06	68.20	-13.14	40.60	14.46	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5000.00	42.63	54.00	-11.37	37.21	5.42	Average	---																																																											
2	5000.00	54.28	74.00	-19.72	48.86	5.42	Peak	---																																																											
3	5150.00	46.08	54.00	-7.92	40.37	5.71	Average	---																																																											
4	5150.00	62.44	74.00	-11.56	56.73	5.71	Peak	---																																																											
5	10380.00	55.06	68.20	-13.14	40.60	14.46	Peak	---																																																											
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																			

Modulation	HT40	Test Freq. (MHz)	5190
Polarization	Vertical		

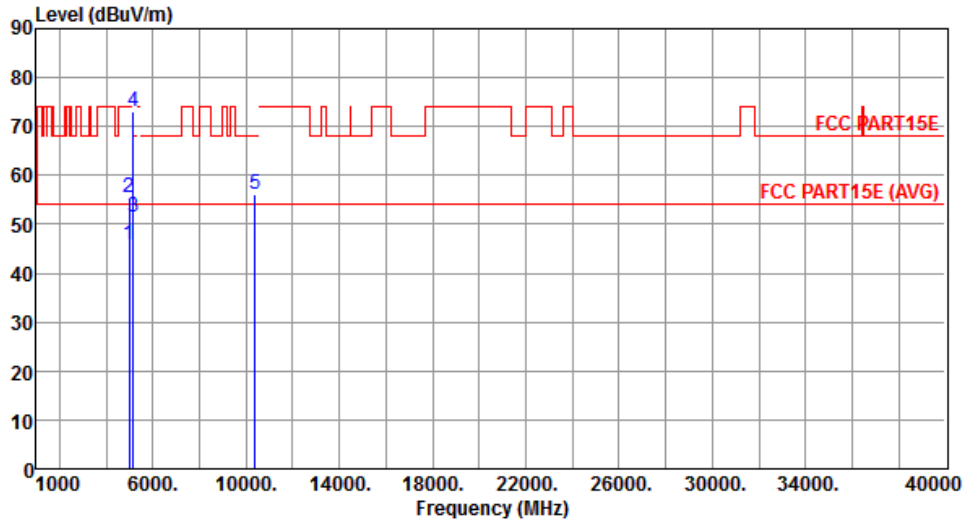


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5000.00	45.99	54.00	-8.01	40.57	5.42	Average	---	---
2	5000.00	55.58	74.00	-18.42	50.16	5.42	Peak	---	---
3	5150.00	51.33	54.00	-2.67	45.62	5.71	Average	---	---
4	5150.00	72.92	74.00	-1.08	67.21	5.71	Peak	---	---
5	10380.00	56.13	68.20	-12.07	41.67	14.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

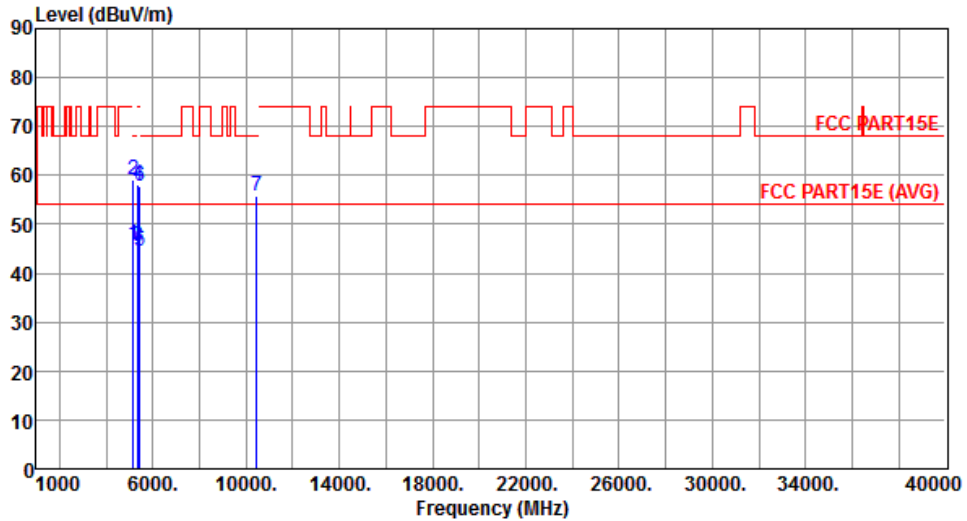


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.85	54.00	-8.15	40.14	5.71	Average	---	---
2	5150.00	59.26	74.00	-14.74	53.55	5.71	Peak	---	---
3	5350.00	45.44	54.00	-8.56	39.45	5.99	Average	---	---
4	5350.00	58.10	74.00	-15.90	52.11	5.99	Peak	---	---
5	5440.00	44.67	54.00	-9.33	38.57	6.10	Average	---	---
6	5440.00	57.74	74.00	-16.26	51.64	6.10	Peak	---	---
7	10460.00	55.81	68.20	-12.39	41.21	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5230
Polarization	Vertical		

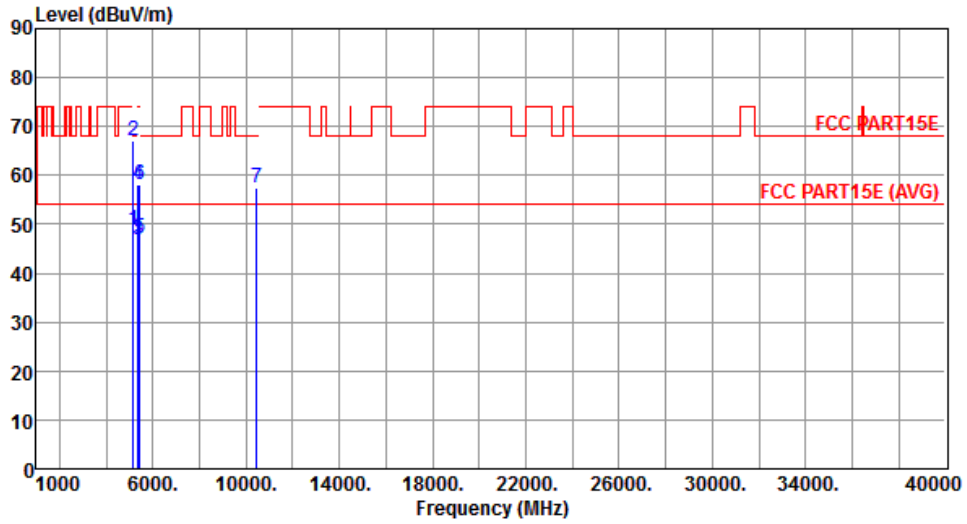


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.85	54.00	-5.15	43.14	5.71	Average	---	---
2	5150.00	66.97	74.00	-7.03	61.26	5.71	Peak	---	---
3	5350.00	46.68	54.00	-7.32	40.69	5.99	Average	---	---
4	5350.00	58.11	74.00	-15.89	52.12	5.99	Peak	---	---
5	5440.00	47.04	54.00	-6.96	40.94	6.10	Average	---	---
6	5440.00	58.12	74.00	-15.88	52.02	6.10	Peak	---	---
7	10460.00	57.53	68.20	-10.67	42.93	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

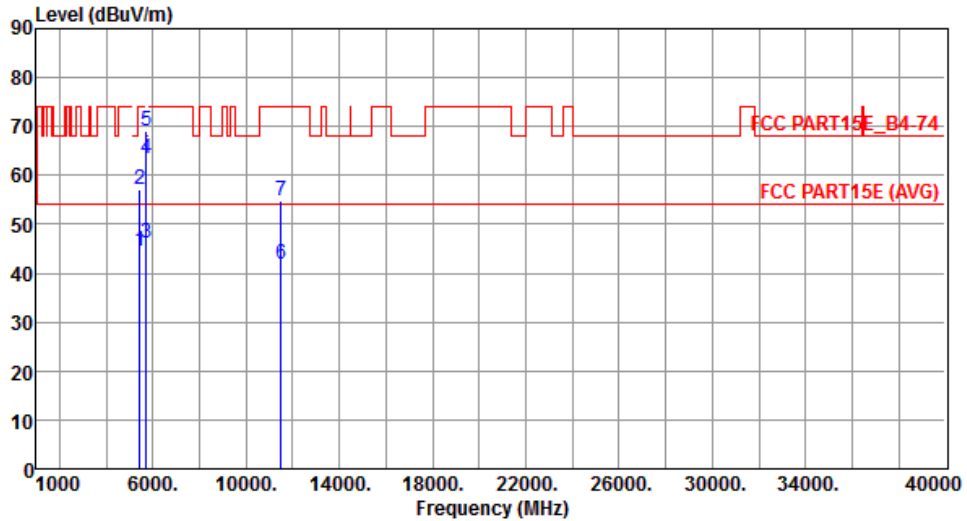


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	44.67	54.00	-9.33	38.57	6.10	Average	---	---
2	5440.00	57.01	74.00	-16.99	50.91	6.10	Peak	---	---
3	5715.00	46.19	54.00	-7.81	39.61	6.58	Average	---	---
4	5715.00	63.40	74.00	-10.60	56.82	6.58	Peak	---	---
5	5725.00	69.02	78.20	-9.18	62.43	6.59	Peak	---	---
6	11510.00	41.99	54.00	-12.01	26.81	15.18	Average	---	---
7	11510.00	54.74	74.00	-19.26	39.56	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5755
Polarization	Vertical		

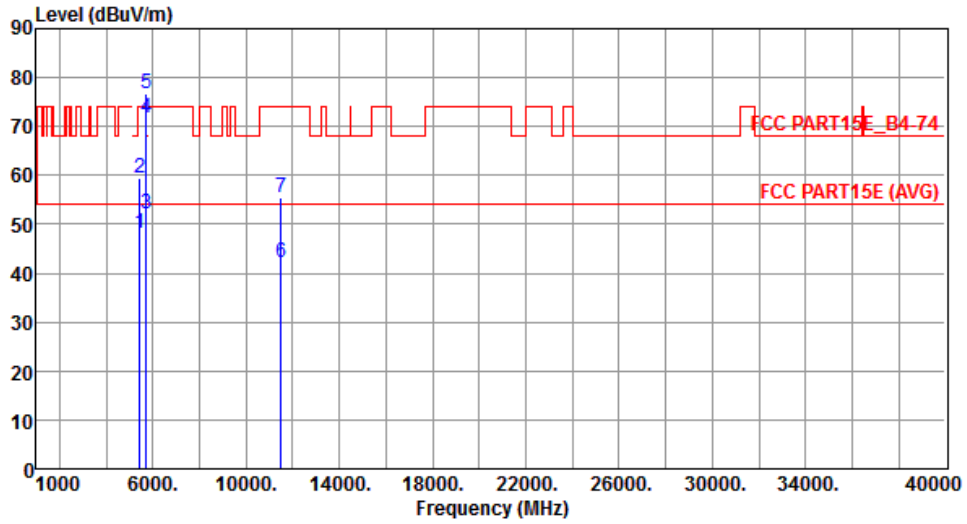


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	48.28	54.00	-5.72	42.18	6.10	Average	---	---
2	5440.00	59.33	74.00	-14.67	53.23	6.10	Peak	---	---
3	5715.00	52.21	54.00	-1.79	45.63	6.58	Average	---	---
4	5715.00	71.62	74.00	-2.38	65.04	6.58	Peak	---	---
5	5725.00	76.82	78.20	-1.38	70.23	6.59	Peak	---	---
6	11510.00	42.01	54.00	-11.99	26.83	15.18	Average	---	---
7	11510.00	55.31	74.00	-18.69	40.13	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

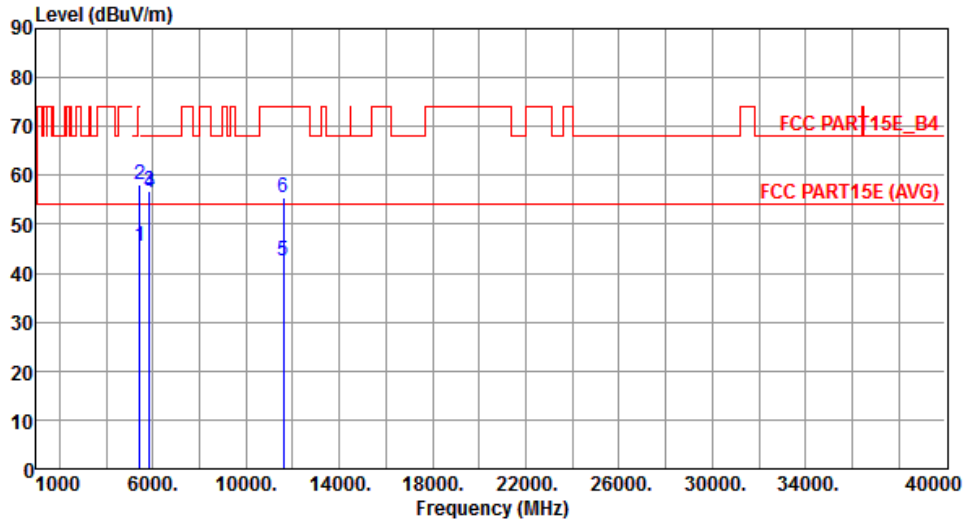


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	45.59	54.00	-8.41	39.49	6.10	Average	---	---
2	5440.00	58.13	74.00	-15.87	52.03	6.10	Peak	---	---
3	5850.00	56.68	78.20	-21.52	49.89	6.79	Peak	---	---
4	5860.00	56.62	68.20	-11.58	49.84	6.78	Peak	---	---
5	11590.00	42.67	54.00	-11.33	27.53	15.14	Average	---	---
6	11590.00	55.42	74.00	-18.58	40.28	15.14	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	5795
Polarization	Vertical		

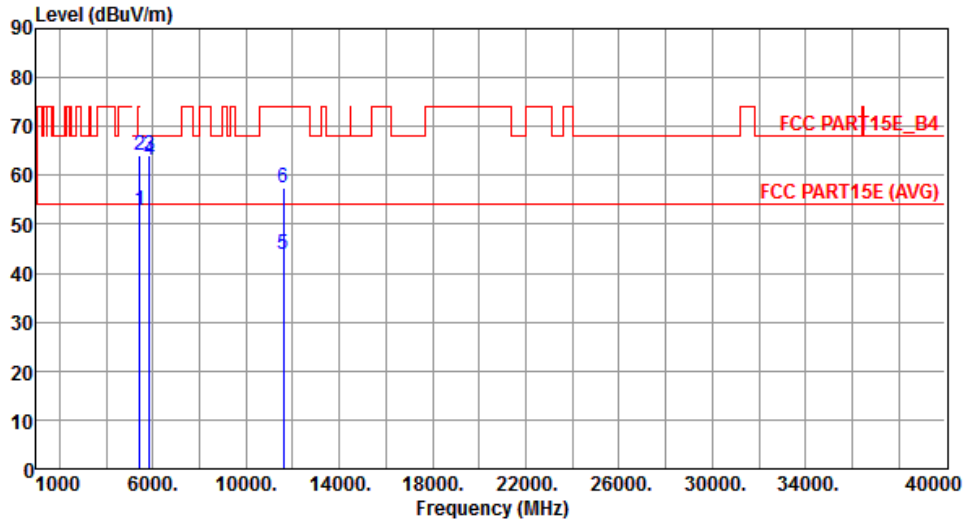

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5440.00	52.91	54.00	-1.09	46.81	6.10	Average	---	---
2	5440.00	64.15	74.00	-9.85	58.05	6.10	Peak	---	---
3	5850.00	64.01	78.20	-14.19	57.22	6.79	Peak	---	---
4	5860.00	63.10	68.20	-5.10	56.32	6.78	Peak	---	---
5	11590.00	43.99	54.00	-10.01	28.85	15.14	Average	---	---
6	11590.00	57.35	74.00	-16.65	42.21	15.14	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.6.3 Test Setup

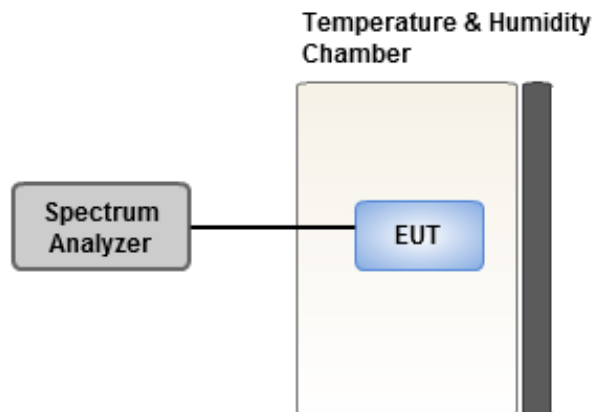

3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.54	0.51	0.81	0.89
T20°C Vmin	4.24	3.88	4.58	4.50
T75°C Vnom	5.27	6.06	5.65	5.66
T70°C Vnom	5.00	5.08	5.48	4.73
T60°C Vnom	-1.52	-0.96	-0.72	-0.67
T50°C Vnom	-0.63	-0.53	-0.63	-0.19
T40°C Vnom	-0.04	0.02	0.15	-0.02
T30°C Vnom	-0.14	-0.03	-0.45	-0.09
T20°C Vnom	-1.27	-0.71	-1.73	-1.28
T10°C Vnom	0.27	0.36	0.16	0.13
T0°C Vnom	5.65	5.97	5.48	5.61
T-10°C Vnom	5.60	5.57	5.45	5.61
T-20°C Vnom	-1.55	-1.84	-1.29	-1.59
T-30°C Vnom	0.05	0.20	-0.15	0.75
T-40°C Vnom	-0.65	-0.03	-0.62	-0.72
Vnom [Vac]: 110		Vmax [Vac]: 126.5		Vmin [Vac]: 93.5
Tnom [°C]: 20		Tmax [°C]: 75		Tmin [°C]: -40

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==