

Report No.: SZEM160400296501

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 47

#### **FCC REPORT**

Application No.: SZEM1604002965CR

Applicant: Audio Resource Group, Inc

Manufacturer: Shenzhen Alcors Technology Co.,Limited
Factory: Shenzhen Alcors Technology Co.,Limited
Product Name: Large Area 72MHz Multi-channel Transmitter

Model No.(EUT): RAW-TX72ST

Add Model No.: ARG-TX72ST. RAW-TX72ST-1. RAW-TX72ST-2. XXX-TX72ST. XXX-

TX72ST-1, XXX-TX72ST-2

Trade Mark: ARG

FCC ID: 2ACGIARG-TX72ST

Standards: 47 CFR Part 15, Subpart C (2015)

**Date of Receipt:** 2016-05-05

**Date of Test:** 2016-05-23 to 2016-06-02

**Date of Issue:** 2016-06-12

Test Result: PASS \*

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM160400296501

Page : 2 of 47

#### 2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2016-06-12		Original		

Authorized for issue by:		
Tested By	Hank yan.	2016-06-02
	(Hank Yan) /Project Engineer	Date
Prepared By	Joyce Shi	2016-06-12
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2016-06-12
	(Eric Fu) /Reviewer	Date



Report No.: SZEM160400296501

Page : 3 of 47

#### 3 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna	47 CFR Part 15, Subpart C Section	ANCI C62 10 (2000)	PASS	
Requirement	15.203	ANSI C63.10 (2009)		
AC Power Line	47 CFR Part 15, Subpart C Section	ANCI C62 10 (2000)	DACC	
Conducted Emission	15.207	ANSI C63.10 (2009)	PASS	
Field Strength of the	47 CFR Part 15, Subpart C Section	ANSI C63.10 (2009)	PASS	
Fundamental Signal	15.237 (c)	ANSI C65.10 (2009)		
Spurious Emissions	47 CFR Part 15, Subpart C Section	ANSI C63.10 (2009)	DACC	
Spurious Ellissions	15.237 (c)/15.209	ANSI C65.10 (2009)	PASS	
20dB Occupied	47 CFR Part 15, Subpart C Section	ANSI C63.10 (2009)	PASS	
Bandwidth	15.237 (b)	AINSI 003.10 (2009)	FA55	



Report No.: SZEM160400296501

Page : 4 of 47

#### 4 Contents

			Page
1	C	COVER PAGE	1
2	٧	/ERSION	2
3	Т	EST SUMMARY	
4	C	CONTENTS	4
5	G	GENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODE	7
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9 5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	T	EST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	
	6.2	CONDUCTED EMISSIONS	
	6.3	RADIATED SPURIOUS EMISSIONS	17
	6.4	20dB Bandwidth	38
7	Ρ	PHOTOGRAPHS - EUT TEST SETUP	41
	7.1	CONDUCTED EMISSION	41
	7.2	RADIATED EMISSION	41
8	P	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	42-47



Report No.: SZEM160400296501

Page : 5 of 47

#### 5 General Information

#### 5.1 Client Information

Applicant:	Audio Resource Group, Inc				
Address of Applicant:	405 Main Ave W, Suite 4G, West Fargo, ND58078, USA				
Manufacturer:	Shenzhen Alcors Technology Co.,Limited				
Address of Manufacturer:	4th Fl south, LianChuang Sci&Tec Park, Bulan RD, Buji Town, Shenzhen, China				
Factory:	Shenzhen Alcors Technology Co.,Limited				
Address of Factory:	4th Fl south, LianChuang Sci&Tec Park, Bulan RD, Buji Town, Shenzhen, China				

#### 5.2 General Description of EUT

Product Name:	Large Area 72MHz Multi-channel Transmitter	
Model No.:	RAW-TX72ST	
Trade Mark:	ARG	
Operating Frequency:	72.1MHz to 72.9MHz, 74.7MHz, 75.3MHz to 75.9MHz	
Modulation Type:	FM	
Number of Channels:	9 Channels from 72.1 to 72.9MHz	
	1 Channel from 74.6 to 74.8MHz	
	7 Channels from 75.3 to 75.9 MHz	
Antenna Type:	Integral	
Antenna Gain:	2dBi	
Power Supply:	DC 9V	

Remark:

Model No.: RAW-TX72ST, ARG-TX72ST, RAW-TX72ST-1, RAW-TX72ST-2, XXX-TX72ST, XXX-

TX72ST-1, XXX-TX72ST-2

Only the model RAW-TX72ST was tested, since the circuitry design, PCB layout, electrical components used, internal wiring and functions were identical for all above models. Only different on model number.



Report No.: SZEM160400296501

Page : 6 of 47

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
1	72.1MHz	7	75.9MHz	13	72.8MHz		
2	72.5MHz	8	72.2MHz	14	75.4MHz		
3	72.9MHz	9	72.3MHz	15	75.5MHz		
4	75.7MHz	10	72.4MHz	16	75.6MHz		
5	74.7MHz	11	72.6MHz	17	75.8MHz		
6	75.3MHz	12	72.7MHz				

#### Note:

The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH2)	72.5MHz
The Middle channel(CH5)	74.7MHz
The Highest channel(CH16)	75.6MHz



Report No.: SZEM160400296501

Page : 7 of 47

#### 5.3 Test Environment and Mode

	Operating Environment:				
	Temperature:	24.0 °C			
Humidity:		52 % RH			
Atmospheric Pressure:		1010 mbar			
	Test mode:				
Α	Tx mode	Keep the EUT in transmitting mode			



Report No.: SZEM160400296501

Page : 8 of 47

#### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

The EGT has seen tested with assessated equipment selew.						
Description	Manufacturer	Model No.				
AC adapter (Output DC 9V	Supply by customer	JY41-090-050-UD				
500mA)						
Analog Audio Signal	NTi Audio AG	G2P-RAAUM-F2				
Generator						

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160400296501

Page : 9 of 47

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### · CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### · A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160400296501

Page : 10 of 47

#### 5.10 Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30
5	4 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T4- 02	EMC0121	2015-08-30	2016-08-30
6	2 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T2- 02	EMC0122	2015-08-30	2016-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09



Report No.: SZEM160400296501

Page : 11 of 47

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS- LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16
3	BiConiLog Antenna (26-3000MHz)	ETS- LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS- LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS- LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13

	RF connected test											
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date						
				-	(yyyy-mm-dd)	(yyyy-mm-dd)						
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09						
0	Constant Analysis	Rohde &	רכם	OEM004.00	0015 10 17	0010 10 17						
2	Spectrum Analyzer	Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17						
	0'	Rohde &	0141.00	0514000.00	0010 01 05	0017.01.05						
3	Signal Generator	Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25						
	Dower Mater	Rohde &	NDVC	CEM014 00	0015 10 00	0010 10 00						
4	Power Meter	Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09						



Report No.: SZEM160400296501

Page : 12 of 47

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.





Report No.: SZEM160400296501

Page : 13 of 47


#### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207							
Test Method:	ANSI C63.10: 2009							
Test Frequency Range:	150kHz to 30MHz							
Limit:	Frequency range (MHz)	Limit (c	Limit (dBuV)					
	Frequency range (MHz)	Quasi-peak	Average					
	0.15-0.5	66 to 56*	56 to 46*					
	0.5-5	56	46					
	5-30	60	50					
	* Decreases with the logarithn	n of the frequency.						
Test Procedure:	<ol> <li>The mains terminal disturb shielded room.</li> <li>The EUT was connected to Impedance Stabilization Not linear impedance. The power connected to a second Linear reference plane in the sameasured. A multiple sock power cables to a single Linear exceeded.</li> <li>The tabletop EUT was placed the ground reference plane EUT was placed on the hose of the EUT shall be on plane. The vertical ground horizontal ground reference the boundary of the unit unplane for LISNs mounted of distance was between the All other units of the EUT am from the LISN 2.</li> <li>In order to find the maximum equipment and all of the into ANSI C63.10: 2009 on control in the account of the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and the into ANSI C63.10: 2009 on control in the EUT and t</li></ol>	pance voltage test was a AC power source through the provided wer cables of all other partial and associated equipments of the pance of the pance of the provided the pance of	ough a LISN 1 (Line es a 50Ω/50μH + 5Ω units of the EUT were onded to the ground 1 for the unit being ed to connect multiple g of the LISN was not ic table 0.8m above ing arrangement, the nce plane. The ground reference plane. The ground reference onded to the vas placed 0.8 m from o a ground reference ference plane. This ISN 1 and the EUT. In ent was at least 0.8 ive positions of e changed according					



Report No.: SZEM160400296501

Page : 14 of 47

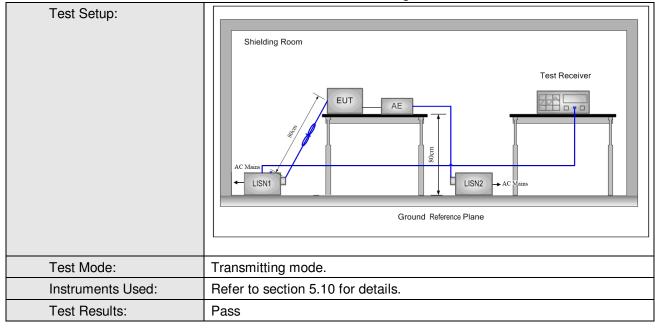



Report No.: SZEM160400296501


Page : 15 of 47

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

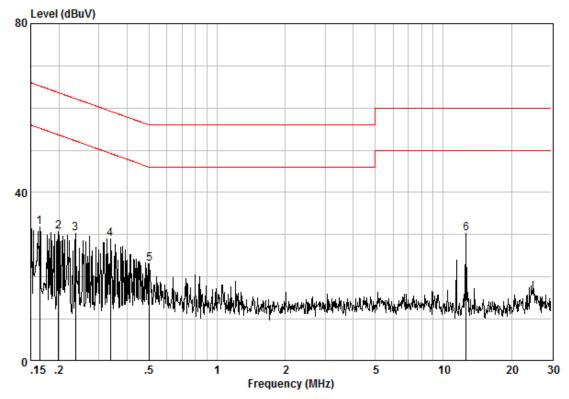

Site : Shielding Room Condition : CE LINE Job No. : 2965CR Test Mode : TX


	Freq	Cable Loss	LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16414	0.02	9.60	22.20	31.81	55.25	-23.44	Peak
2	0.19863	0.02	9.60	21.04	30.66	53.67	-23.01	Peak
3	0.23658	0.02	9.60	20.73	30.34	52.22	-21.87	Peak
4	0.33740	0.01	9.59	19.50	29.10	49.27	-20.17	Peak
5	0.50203	0.01	9.59	13.50	23.10	46.00	-22.90	Peak
6	12.582	0.01	9.74	20.46	30.21	50.00	-19.79	Peak



Report No.: SZEM160400296501

Page : 16 of 47

#### Neutral Line:

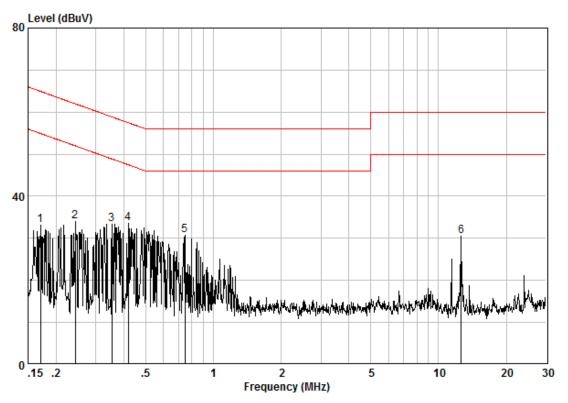

Site : Shielding Room Condition : CE NEUTRAL Job No. : 2965CR Test Mode : TX

	Freq	Cable Loss	LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17034	0.02	9.60	23.60	33.22	54.94	-21.72	Peak
2	0.24293	0.02	9.61	24.48	34.11	52.00	-17.88	Peak
3	0.35388	0.01	9.62	23.82	33.45	48.87	-15.42	Peak
4 @	0.41927	0.01	9.62	24.03	33.66	47.46	-13.80	Peak
5	0.74697	0.02	9.64	21.13	30.78	46.00	-15.22	Peak
6	12.582	0.01	9.85	20.62	30.49	50.00	-19.51	Peak

#### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160400296501

Page : 17 of 47

#### 6.3 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section	on 15.237 (c) and	d 15.209					
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance	: 3m (Semi-Anec	hoic Chambe	er)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-pea	k		
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peal	k		
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-pea	k		
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/mete	r Limit (dBuV/m)	Remark	Measureme distance (m			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequent emissions is 20dB above the maximum permitted average emission liapplicable to the equipment under test. This peak limit applies to the to peak emission level radiated by the device.							
Limit:	Frequency	Limit (dBu	IV/m @3m)	Rema	ırk			
(Field strength of the	72.0MHz-73.0MHz	98	3.06	Average	Value			
fundamental signal)	74.6MHz-74.8MHz 75.2MHz-76.0MHz	111	8.06	Peak V	alue			



Report No.: SZEM160400296501

Page : 18 of 47

#### Test Setup:

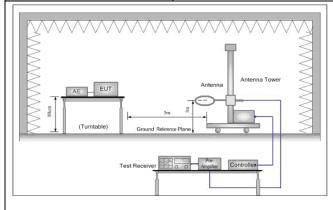

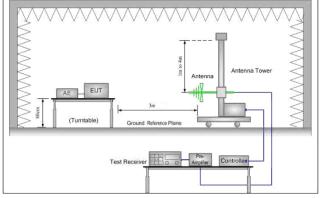


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the middle channel,the Highest channel
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- i. Repeat above procedures until all frequencies measured was complete.



Report No.: SZEM160400296501

Page : 19 of 47

Exploratory Test Mode:	Transmitting mode, AC Charge +Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and AC Charge +Transmitting mode, found the AC Charge + Transmitting mode which it is worse case.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



Report No.: SZEM160400296501

Page : 20 of 47

#### **Measurement Data**

#### 6.3.1.1 Field Strength Of The Fundamental Signal

Remark: The EUT have two Antenna: ANT A and ANT B. Only one antenna could be used at any time. Two antenna is switched by a switch. Pre-test the EUT with ANT A and ANT B, and found the data of ANT B is worse. So only the data of ANT B is recorded in the report.

#### Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
72.50	0.88	7.14	25.93	96.94	79.03	118.06	-39.03	Horizontal
72.50	0.88	7.14	25.93	92.02	74.11	118.06	-43.96	Vertical
74.70	0.94	7.34	25.93	100.38	82.73	118.06	-35.33	Horizontal
74.70	0.94	7.34	25.93	93.06	75.41	118.06	-42.65	Vertical
75.60	0.97	7.42	25.92	101.55	84.02	118.06	-34.04	Horizontal
75.60	0.97	7.42	25.92	93.52	75.99	118.06	-42.07	Vertical

#### Average value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
72.50	0.88	7.14	25.93	96.21	78.30	98.06	-19.76	Horizontal
72.50	0.88	7.14	25.93	91.25	73.34	98.06	-24.72	Vertical
74.70	0.94	7.34	25.93	99.63	81.98	98.06	-16.08	Horizontal
74.70	0.94	7.34	25.93	92.44	74.79	98.06	-23.27	Vertical
75.60	0.97	7.42	25.92	100.79	83.26	98.06	-14.80	Horizontal
75.60	0.97	7.42	25.92	92.81	75.28	98.06	-22.78	Vertical



Report No.: SZEM160400296501

Page : 21 of 47


#### 6.3.1.2 Spurious Emissions

30MHz~1GHz	
Test mode:	Transmitting mode

QP value:

Lowest Channel

Vertical:

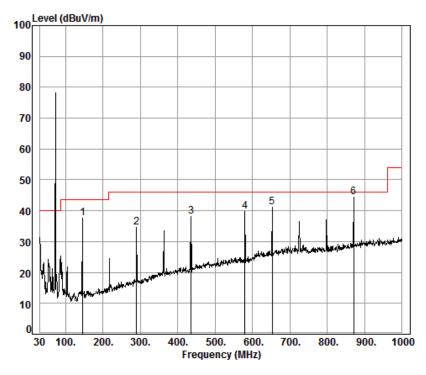

Condition: 3m VERTICAL Job No. : 2965CR Test mode: TX 72.5MHz

: ANT B


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	145.43	1.31	8.90	25.83	53.25	37.63	43.50	-5.87
2	289.96	1.86	13.25	25.71	45.32	34.72	46.00	-11.28
3	435.46	2.35	16.56	25.65	44.96	38.22	46.00	-7.78
4	579.99	2.68	19.14	25.60	43.51	39.73	46.00	-6.27
5	652.74	2.81	20.50	25.66	43.40	41.05	46.00	-4.95
6 pp	870.02	3.48	22.70	25.27	43.51	44.42	46.00	-1.58



Report No.: SZEM160400296501

Page : 22 of 47

Horizontal:

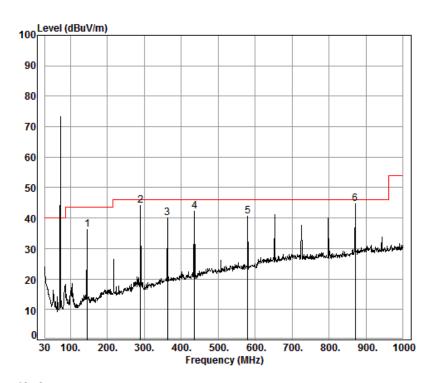

Condition: 3m HORIZONTAL

Job No. : 2965CR Test mode: TX 72.5MHz

: ANT B

	_				Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	145.43	1.31	8.90	25.83	51.93	36.31	43.50	-7.19
2	289.96	1.86	13.25	25.71	54.83	44.23	46.00	-1.77
3	362.71	2.10	15.71	25.67	47.89	40.03	46.00	-5.97
4	435.46	2.35	16.56	25.65	48.99	42.25	46.00	-3.75
5	579.99	2.68	19.14	25.60	44.49	40.71	46.00	-5.29
6 рр	870.02	3.48	22.70	25.27	43.78	44.69	46.00	-1.31




Report No.: SZEM160400296501

Page : 23 of 47

Middle Channel

Vertical:

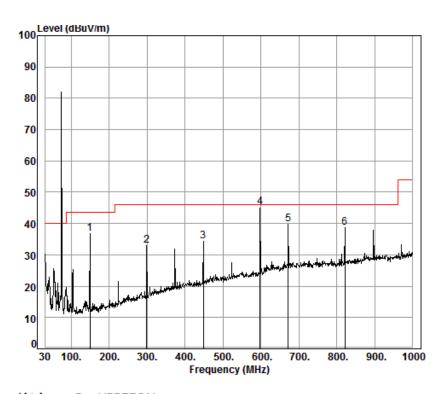

Condition: 3m VERTICAL

Job No. : 2965CR Test mode: TX 74.7MHz

: ANT B


	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	149.31	1.32	9.24	25.83	52.18	36.91	43.50	-6.59
2	298.69	1.89	13.55	25.70	43.16	32.90	46.00	-13.10
3	448.07	2.40	16.85	25.64	40.80	34.41	46.00	-11.59
4 pp	597.60	2.70	19.63	25.60	48.60	45.33	46.00	-0.67
5	672.14	2.85	21.20	25.68	41.51	39.88	46.00	-6.12
6	821.52	3.29	22.17	25.63	38.80	38.63	46.00	-7.37



Report No.: SZEM160400296501

Page : 24 of 47

Horizontal:

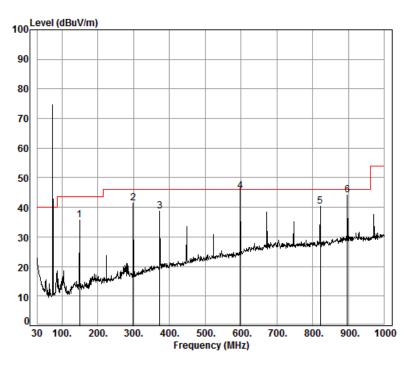

Condition: 3m HORIZONTAL

Job No. : 2965CR Test mode: TX 74.7MHz

: ANT B

	Freq			Preamp Factor			Limit Line	Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	149.31	1.32	9.24	25.83	50.96	35.69	43.50	-7.81
2	298.69	1.89	13.55	25.70	51.68	41.42	46.00	-4.58
3	373.38	2.13	15.87	25.67	46.40	38.73	46.00	-7.27
4 pp	597.60	2.70	19.63	25.60	48.89	45.62	46.00	-0.38
5	821.52	3.29	22.17	25.63	40.48	40.31	46.00	-5.69
6	896.21	3.59	23.14	25.09	42.54	44.18	46.00	-1.82

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160400296501

Page : 25 of 47

Highest Channel

Vertical:

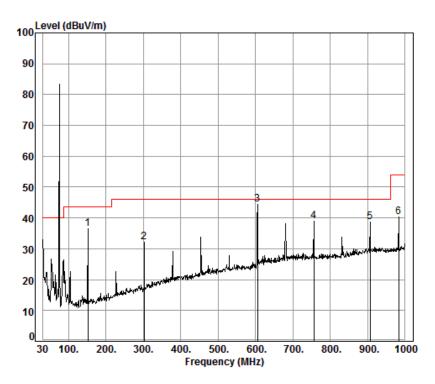

Condition: 3m VERTICAL Job No. : 2965CR Test mode: TX 75.6MHz

: ANT B


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	151.25	1.32	9.35	25.82	51.54	36.39	43.50	-7.11
2	302.57	1.91	13.73	25.70	42.17	32.11	46.00	-13.89
3 рр	605.21	2.71	19.83	25.61	47.48	44.41	46.00	-1.59
4	755.56	3.07	21.67	25.76	40.03	39.01	46.00	-6.99
5	906.88	3.61	23.26	25.01	36.80	38.66	46.00	-7.34
6	982.54	3.68	23.82	24.51	37.32	40.31	54.00	-13.69



Report No.: SZEM160400296501

Page : 26 of 47

Horizontal:

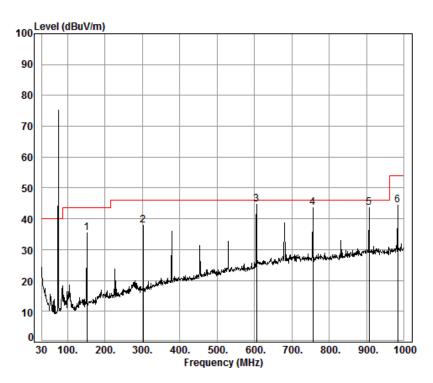

Condition: 3m HORIZONTAL

Job No. : 2965CR Test mode: TX 75.6MHz

: ANT B

	Гпол			Preamp Factor				Over Limit
_	Freq			-actor		Level	LINE	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	151.25	1.32	9.35	25.82	50.50	35.35	43.50	-8.15
2	302.57	1.91	13.73	25.70	47.99	37.93	46.00	-8.07
3 pp	605.21	2.71	19.83	25.61	47.68	44.61	46.00	-1.39
4	755.56	3.07	21.67	25.76	44.62	43.60	46.00	-2.40
5	906.88	3.61	23.26	25.01	41.71	43.57	46.00	-2.43
6	982.54	3.68	23.82	24.51	41.49	44.48	54.00	-9.52



Report No.: SZEM160400296501

Page : 27 of 47

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 1GHz, The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM160400296501

Page : 28 of 47

#### Band edge:

Test Frequency: 72.1MHz

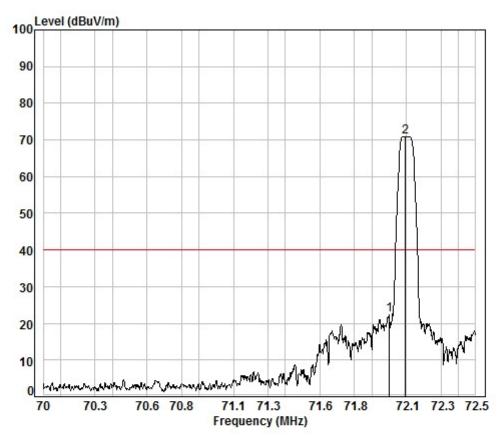

Condition: 3m HORIZONTAL

Job No. : 2965CR

Test mode: TX 72.1MHz


: ANT B

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	72.00	0.86	7.09	25.93	40.40	22.42	40.00	-17.58
2 pp	72.10	0.86	7.10	25.93	88.93	70.96	40.00	30.96



Report No.: SZEM160400296501

Page : 29 of 47

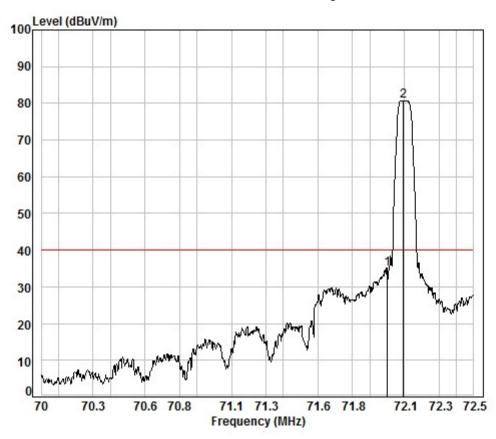

Condition: 3m VERTICAL

Job No. : 2965CR Test mode: TX 72.1MHz

: ANT B


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	72.00 72.10			25.93 25.93				



Report No.: SZEM160400296501

Page : 30 of 47

Test Frequency: 72.9MHz

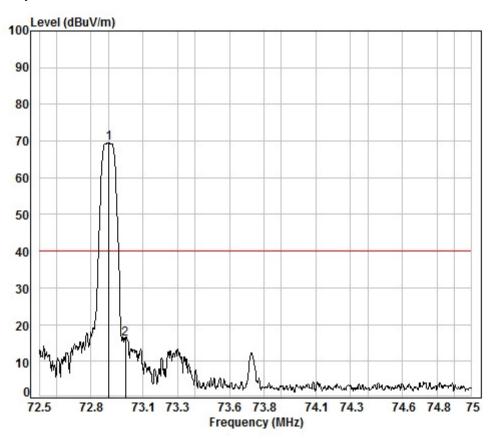

Condition: 3m HORIZONTAL

Job No. : 2965CR Test mode: TX 72.9MHz


: ANT B

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	72.90 73.00			25.93 25.93				



Report No.: SZEM160400296501

Page : 31 of 47

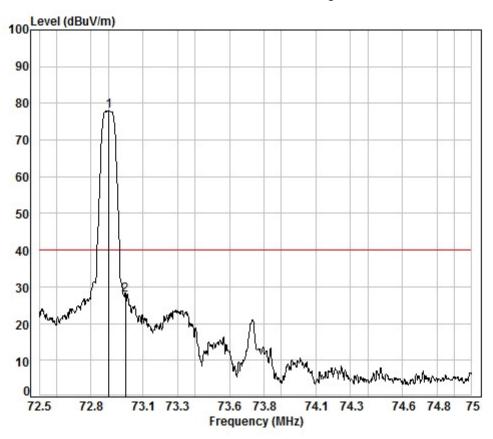

Condition: 3m VERTICAL

Job No. : 2965CR Test mode: TX 72.9MHz

: ANT B


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 2	72.90 73.00			25.93 25.93				



Report No.: SZEM160400296501

Page : 32 of 47

Test Frequency: 74.7MHz

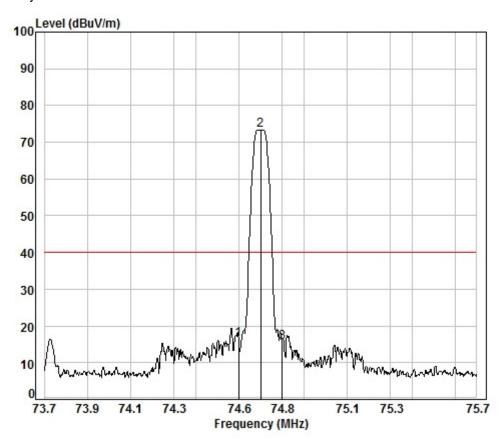

Condition: 3m HORIZONTAL

Job No. : 2965CR

Test mode: TX 74.7MHz


: ANT B

	Freq			Preamp Factor				
· ·	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	74.60	0.94	7.33	25.93	33.93	16.27	40.00	-23.73
2 pp	74.70	0.94	7.34	25.93	91.07	73.42	40.00	33.42
3	74.80	0.95	7.35	25.93	33.13	15.50	40.00	-24.50



Report No.: SZEM160400296501

Page : 33 of 47

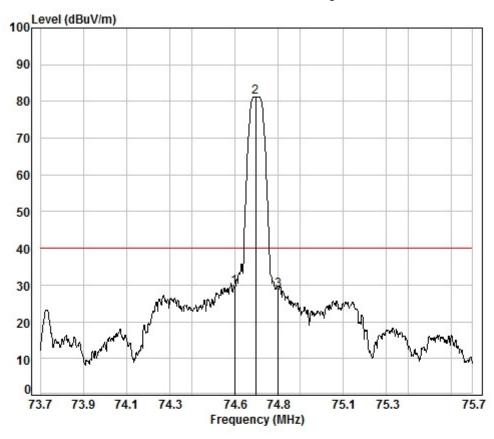

Condition: 3m VERTICAL

Job No. : 2965CR

Test mode: TX 74.7MHz

: ANT B


	Freq			Preamp Factor				
0	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	74.60	0.94	7.33	25.93	47.17	29.51	40.00	-10.49
2 pp	74.70	0.94	7.34	25.93	98.82	81.17	40.00	41.17
3	74.80	0.95	7.35	25.93	46.34	28.71	40.00	-11.29



Report No.: SZEM160400296501

Page : 34 of 47

Test Frequency: 75.3MHz

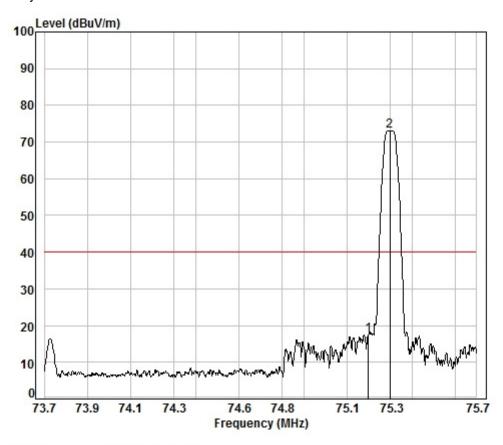

Condition: 3m HORIZONTAL

Job No. : 2965CR

Test mode: TX 75.3MHz


: ANT B

	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	75.20 75.30			25.92 25.92				



Report No.: SZEM160400296501

Page : 35 of 47

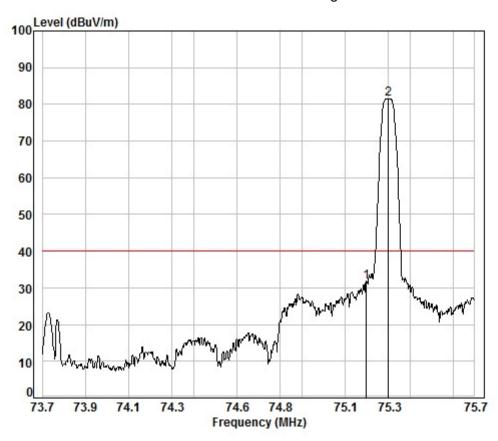

Condition: 3m VERTICAL

Job No. : 2965CR Test mode: TX 75.3MHz

: ANT B


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	75.20 75.30			25.92 25.92				



Report No.: SZEM160400296501

Page : 36 of 47

Test Frequency: 75.9MHz

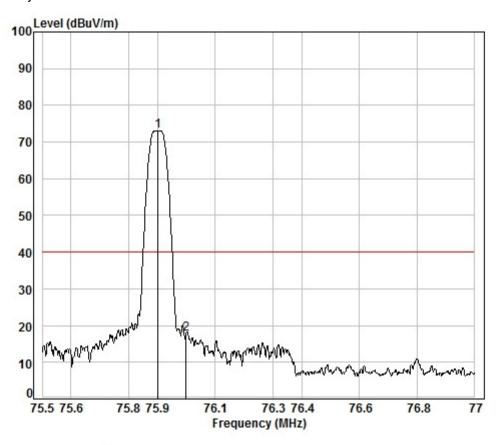

Condition: 3m HORIZONTAL

Job No. : 2965CR

Test mode: TX 75.9MHz


: ANT B

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	75.90 76.00			25.92 25.92				



Report No.: SZEM160400296501

Page : 37 of 47

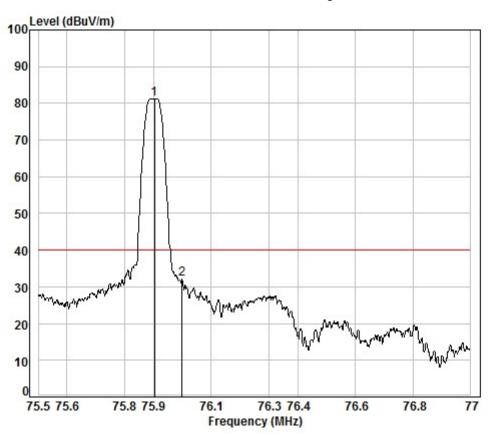

Condition: 3m VERTICAL

Job No. : 2965CR Test mode: TX 75.9MHz

: ANT B


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 2	75.90 76.00			25.92 25.92				



Report No.: SZEM160400296501

Page : 38 of 47

#### 6.4 20dB Bandwidth

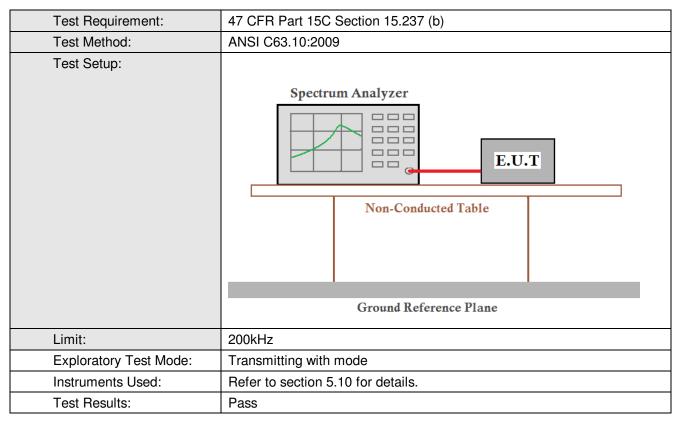

#### **Measurement Data**

Test Channel	20dB bandwidth (kHz)	Results
Lowest	56.25	Pass
Middle	39.90	Pass
Highest	35.10	Pass




Report No.: SZEM160400296501


Page : 39 of 47

Test plot as follows:

Test channel: Lowest

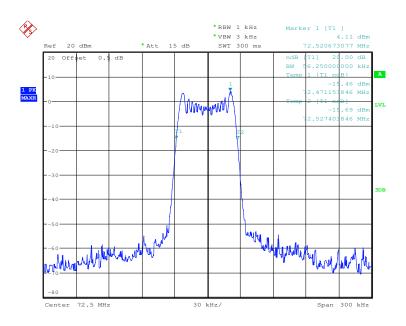




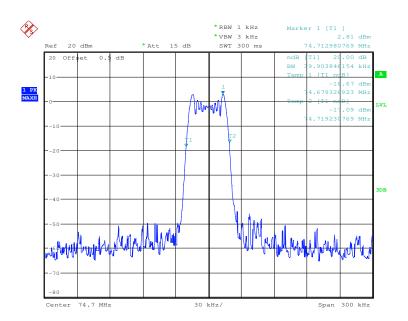




Report No.: SZEM160400296501

Page : 40 of 47



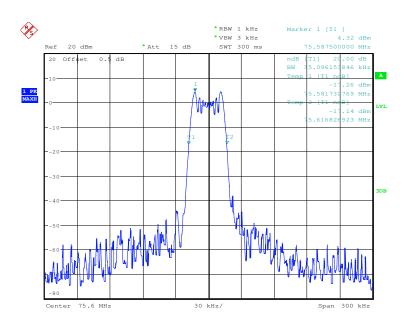




Report No.: SZEM160400296501

Page : 41 of 47

#### 7 Photographs - EUT Test Setup

Test model No.: RAW-TX72ST

#### 7.1 Conducted Emission

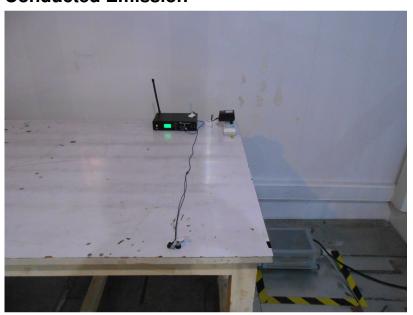

#### 7.2 Radiated Emission





Report No.: SZEM160400296501

Page : 42 of 47

#### 8 Photographs - EUT Constructional Details








Report No.: SZEM160400296501

Page : 43 of 47




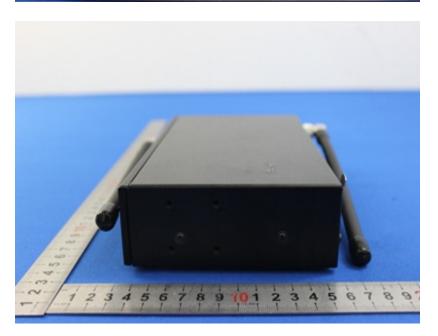



Report No.: SZEM160400296501

Page : 44 of 47

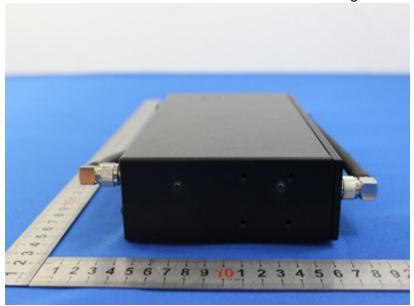







Report No.: SZEM160400296501

Page : 45 of 47

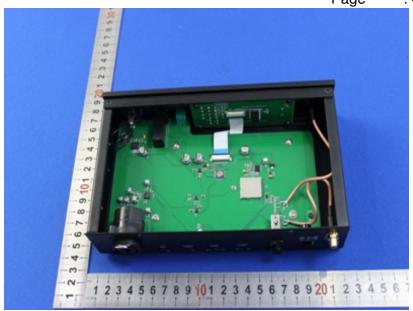


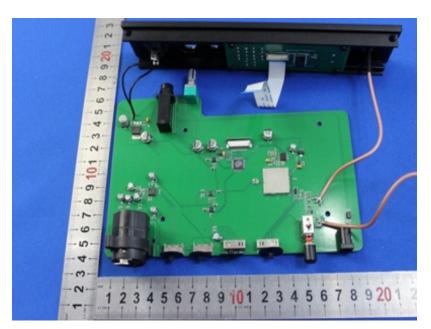




Report No.: SZEM160400296501

Page : 46 of 47

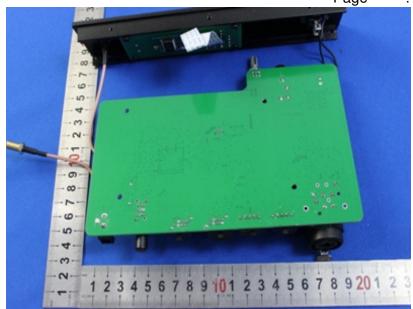

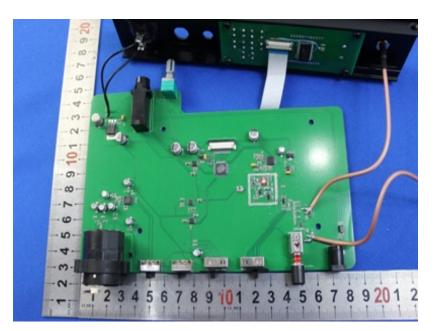



Report No.: SZEM160400296501

Page : 47 of 47

