

Test Report

Report No.: MTi230302021-04E3

Date of issue: 2023-06-21

Applicant: Guangzhou Shangke Information Technology Co., Ltd

Product: Tablet PC

Model(s): TLA002, TLA001, TLA003, TLA005, TLA006, TLA007, TLA008, TLA009, TLA010, TLA011, TLA012, TLA013, TLA015, TLA016, TLA017, TLA018, TLA019, TLA020, TLA021, TLA022, TLA023, TLA025, TLA026, TLA027, TLA028, TLA029, TLA030, TLC005, TLC006, TLC007, TLC008, TLC009, TLC010, TLC011, TLC012, TLC013, TLC014, TLC015, TLC016, TA10

FCC ID: 2ACGT-TLA002

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.


Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
1.3	Environmental conditions for testing	7
1.4	Description of support units	7
2	Measurement uncertainty	8
3	Summary of Test Result	9
4	Test Laboratory	10
5	Equipment List	11
6	Test Result.....	13
6.1	Antenna requirement	13
6.2	AC power line conducted emissions	14
6.3	Radiated spurious emission.....	17
6.4	DTS bandwidth	26
6.5	Maximum conducted output power.....	27
6.6	Power spectral density.....	28
6.7	Band edge (Conducted).....	29
6.8	Conducted spurious emissions.....	30
6.9	Duty Cycle.....	31
Appendix A: DTS Bandwidth		32
Appendix B: Maximum conducted output power.....		37
Appendix C: Maximum power spectral density.....		38
Appendix D: Band edge measurements		43
Appendix E: Conducted Spurious Emission		46
Appendix F: Duty Cycle		58
Photographs of the Test Setup.....		61
Photographs of the EUT.....		62

Test Result Certification	
Applicant:	Guangzhou Shangke Information Technology Co., Ltd
Address:	Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe District, Guangzhou, Guangdong Province, China
Manufacturer:	Guangzhou Shangke Information Technology Co., Ltd
Address:	Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe District, Guangzhou, Guangdong Province, China
Factory:	Guangzhou Shangke Information Technology Co., Ltd
Address:	Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe District, Guangzhou, Guangdong Province, China
Product description	
Product name:	Tablet PC
Trademark:	TECLAST
Model name:	TLA002
Series Model:	TLA001, TLA003, TLA005, TLA006, TLA007, TLA008, TLA009, TLA010, TLA011, TLA012, TLA013, TLA015, TLA016, TLA017, TLA018, TLA019, TLA020, TLA021, TLA022, TLA023, TLA025, TLA026, TLA027, TLA028, TLA029, TLA030, TLC005, TLC006, TLC007, TLC008, TLC009, TLC010, TLC011, TLC012, TLC013, TLC014, TLC015, TLC016, TA10
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2023-04-20 ~ 2023-05-23
Test result:	Pass

Test Engineer :


(Yanice Xie)

Reviewed By: :


(Leon Chen)

Approved By: :


(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Tablet PC
Model name:	TLA002
Series Model:	TLA001, TLA003, TLA005, TLA006, TLA007, TLA008, TLA009, TLA010, TLA011, TLA012, TLA013, TLA015, TLA016, TLA017, TLA018, TLA019, TLA020, TLA021, TLA022, TLA023, TLA025, TLA026, TLA027, TLA028, TLA029, TLA030, TLC005, TLC006, TLC007, TLC008, TLC009, TLC010, TLC011, TLC012, TLC013, TLC014, TLC015, TLC016, TA10
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: DC 5V/2A Battery: DC 3.8V 7000mAh 26.6Wh
Hardware version:	TL-SEP30A-B-V1.0
Software version:	V1.04_20230318
Accessories:	1. Adapter: Model: XY-PD020U03 Input: 100-240V~ 50/60Hz 0.6A Max Output: 5V=3A, 9V=2.22A, 12V=1.67A 20W Max 2. Cable: USB-C to USB-C cable 1m
Test sample(s) number:	MTi230302021-04S1001
RF specification:	
Operation frequency:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Modulation type:	IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Date Rate:	802.11b:1/2/5.5/11 Mbit/s 802.11g:6/9/12/18/24/36/48/54 Mbit/s 802.11n(20MHz) use 800 ns GI: 6.5/13/19.5/26/39/52/58.5/65 Mbit/s 802.11n(40MHz) use 800 ns GI: 13.5/27/40.5/54/81/108/121.5/135 Mbit/s
Antenna(s) information:	Antenna type: PIFA antenna Antenna gain: 0.2 dBi
Maximum conducted output power	17.02 dBm

1.2 Description of test modes

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	/	

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:		Engineering Mode	
802.11b		802.11g	
Channel	Power setting	Channel	Power setting
1	14	1	1
6	14	6	1
11	14	11	4
802.11n (HT20)		802.11n (HT40)	
Channel	Power setting	Channel	Power setting
1	1	3	0
6	1	6	0
11	4	9	4

1.3 Environmental conditions for testing

Environment of test site:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	±2.5 dB
Occupied Bandwidth	±3 %
Conducted RF output power	±0.16 dB
Conducted spurious emissions	±0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	±4.0 dB
Radiated emission (30 MHz~1 GHz)	±4.2 dB
Radiated emission (above 1 GHz)	±4.3 dB
Power Spectral Density	±0.16 dB
Duty Cycle	±2 %

Note: the measurement uncertainty is calculated and correspond to a factor $k = 2$ (which provide confidence levels of 95.45 %)

3 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d)	Radiated spurious emissions	Pass
4	15.247(a)(2)	DTS bandwidth	Pass
5	15.247(b)(3)	Maximum conducted output power	Pass
6	15.247(e)	Power Spectral Density	Pass
7	15.247(d)	Band edge (Conducted)	Pass
8	15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

4 Test Laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

5 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2022/05/05	2023/05/04
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2023/04/26	2024/04/25
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2022/05/05	2023/05/04
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2023/05/04	2024/05/03
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05	2023/05/04
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2023/04/26	2024/04/25
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2022/05/05	2023/05/04
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2023/04/26	2024/04/25
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2024/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2024/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2024/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2022/05/05	2023/05/04
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2023/04/26	2024/04/25
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2022/05/05	2023/05/04
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2023/05/04	2024/05/03
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2024/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2022/05/05	2023/05/04
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2022/05/05	2023/05/04
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2023/05/04	2024/05/03
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2023/05/04	2024/05/03
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2024/05/29
MTi-E136	Pre-amplifier	Space-Dtronic	EWLAN1840 G-G45	210405001	/	/
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023/04/25	2024/04/24
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2022/05/05	2023/05/04
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023/04/26	2024/04/25
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2022/05/05	2023/05/04
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2023/04/26	2024/04/25

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2022/05/05	2023/05/04
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023/05/04	2024/05/03
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS@JS1120 V2.6.88.0330	/	/	/

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.
There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- Test method: ANSI C63.10-2013 Section 6.2.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

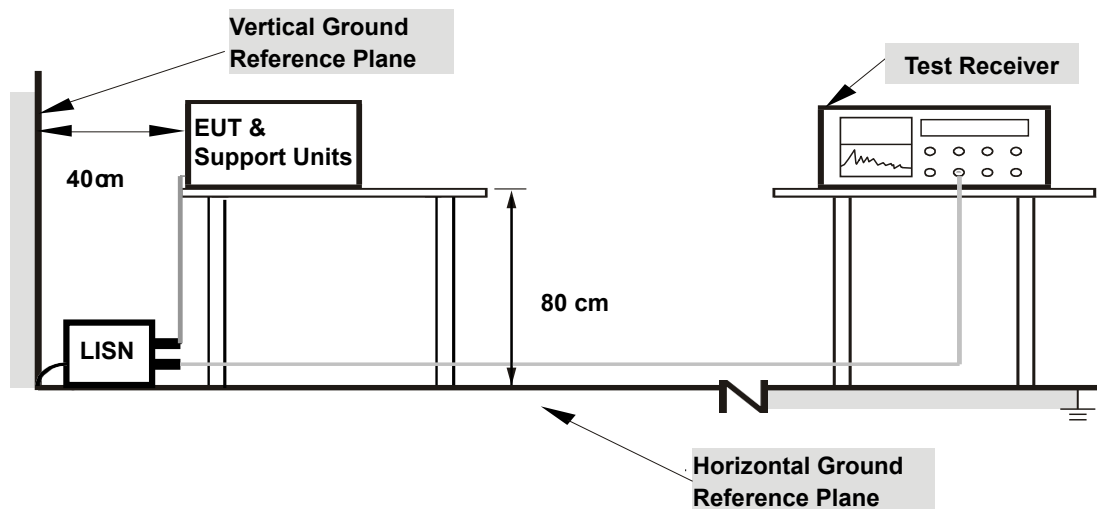

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)


Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

Test mode:	TX – 802.11b 2412MHz	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 2

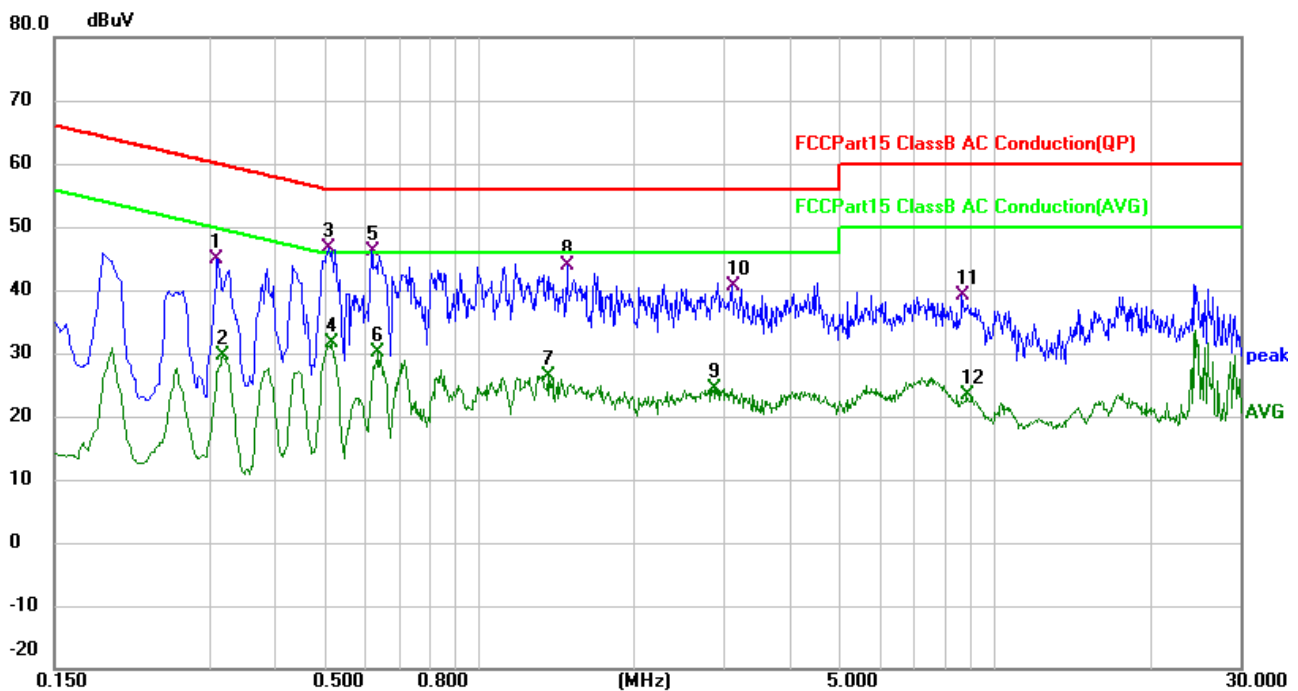

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3100	34.79	10.14	44.93	59.97	-15.04	QP
2		0.3180	19.43	10.15	29.58	49.76	-20.18	AVG
3	*	0.5100	36.40	10.25	46.65	56.00	-9.35	QP
4		0.5180	21.45	10.24	31.69	46.00	-14.31	AVG
5		0.6180	35.94	10.20	46.14	56.00	-9.86	QP
6		0.6380	19.85	10.19	30.04	46.00	-15.96	AVG
7		1.3619	16.29	10.17	26.46	46.00	-19.54	AVG
8		1.4860	33.61	10.20	43.81	56.00	-12.19	QP
9		2.8660	13.99	10.40	24.39	46.00	-21.61	AVG
10		3.1020	30.18	10.42	40.60	56.00	-15.40	QP
11		8.6540	28.37	10.79	39.16	60.00	-20.84	QP
12		8.8460	12.63	10.77	23.40	50.00	-26.60	AVG

Test mode:	TX – 802.11b 2412MHz	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 2

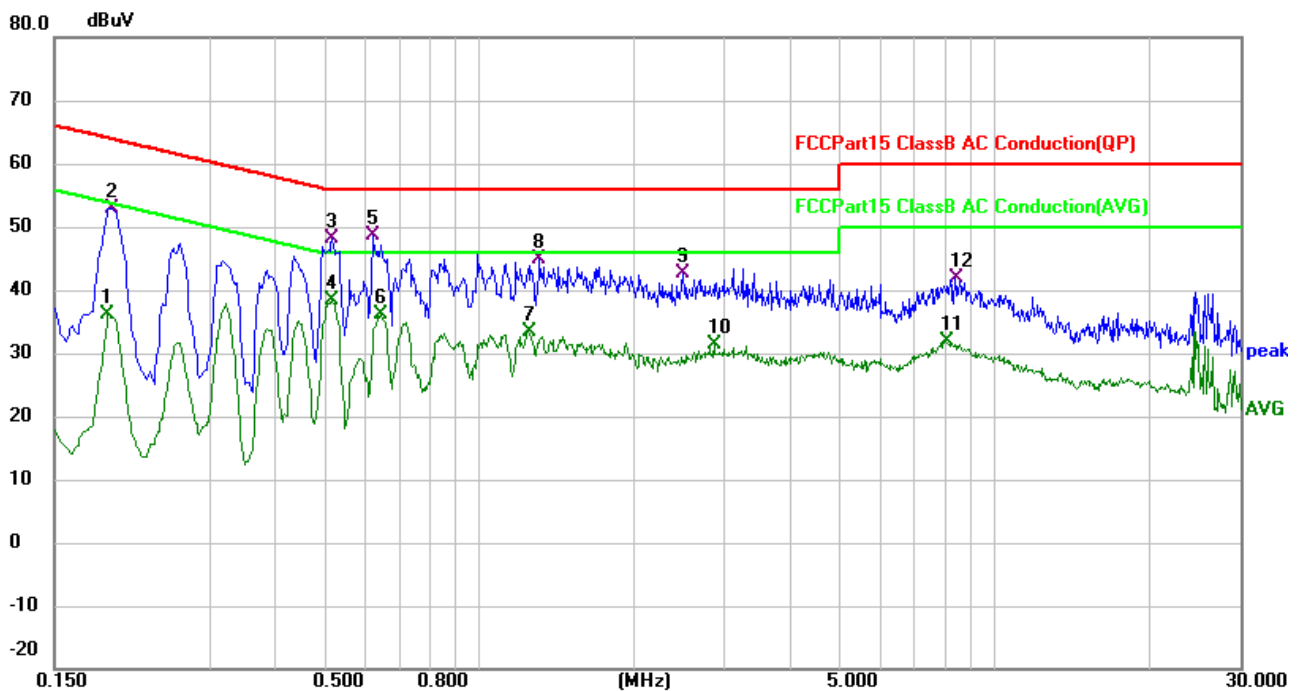

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	25.94	10.09	36.03	54.04	-18.01	AVG
2		0.1940	42.79	10.09	52.88	63.86	-10.98	QP
3		0.5180	38.09	10.06	48.15	56.00	-7.85	QP
4		0.5180	28.40	10.06	38.46	46.00	-7.54	AVG
5	*	0.6220	38.45	10.10	48.55	56.00	-7.45	QP
6		0.6460	25.96	10.11	36.07	46.00	-9.93	AVG
7		1.2460	23.32	10.13	33.45	46.00	-12.55	AVG
8		1.3099	34.66	10.16	44.82	56.00	-11.18	QP
9		2.4940	32.32	10.39	42.71	56.00	-13.29	QP
10		2.8660	20.91	10.41	31.32	46.00	-14.68	AVG
11		8.0380	21.18	10.68	31.86	50.00	-18.14	AVG
12		8.3979	31.09	10.69	41.78	60.00	-18.22	QP

6.3 Radiated spurious emission

6.3.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

6.3.2 Test setup


Below 30MHz:

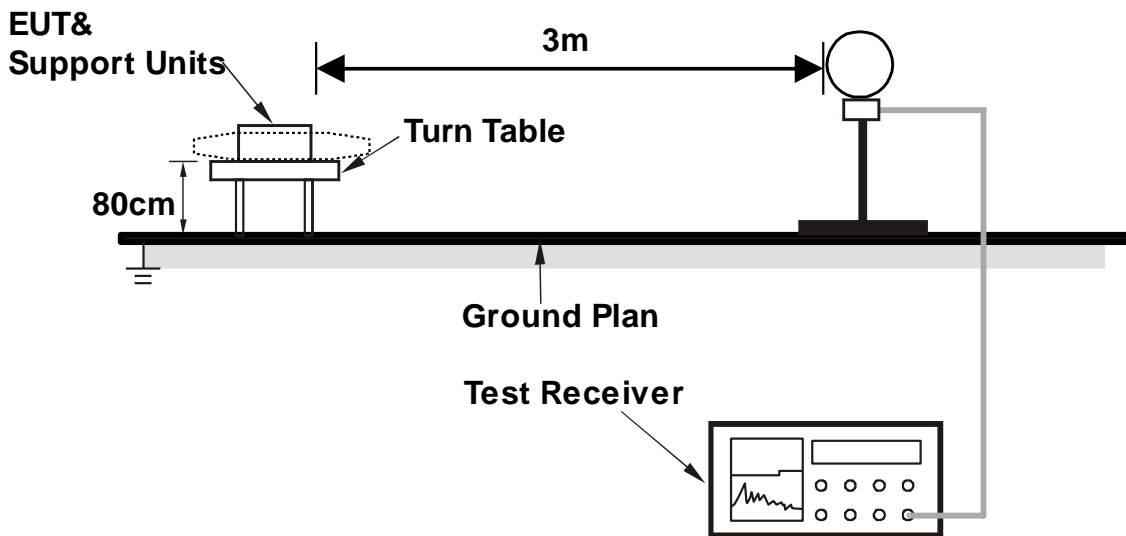

30MHz~1GHz:

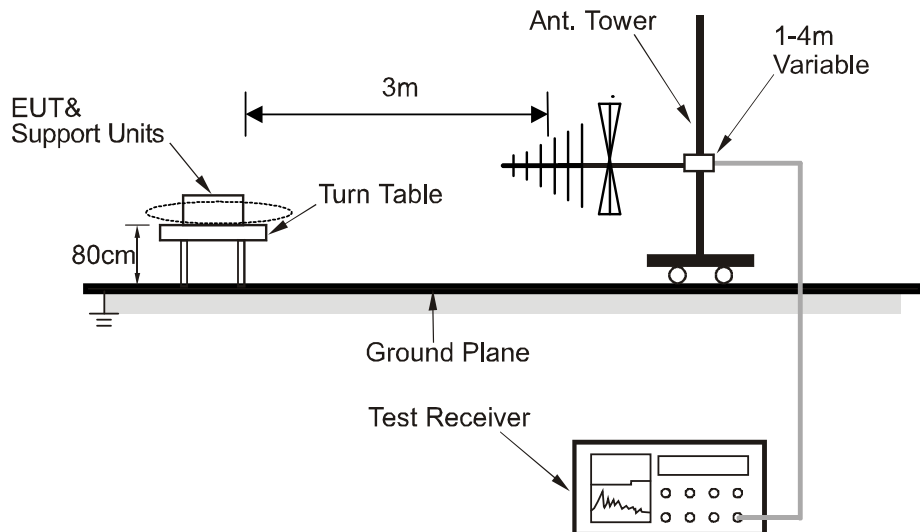

Above 1GHz:

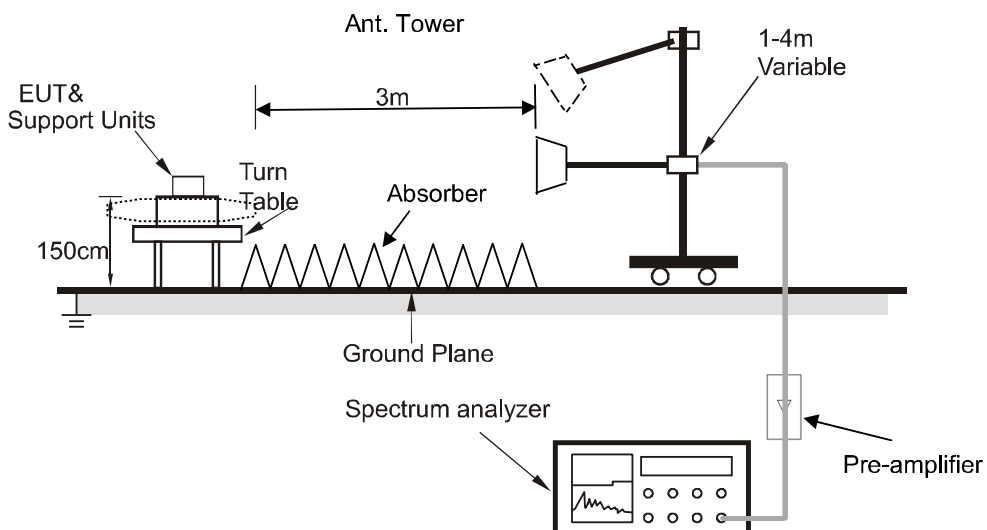

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission below 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

6.3.4 Test results

Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Radiated emissions between 30MHz – 1GHz


Test mode:	TX – 802.11b 2462MHz	Polarization:	Horizontal
Power supply:	DC 3.8V	Test site:	RE chamber 2

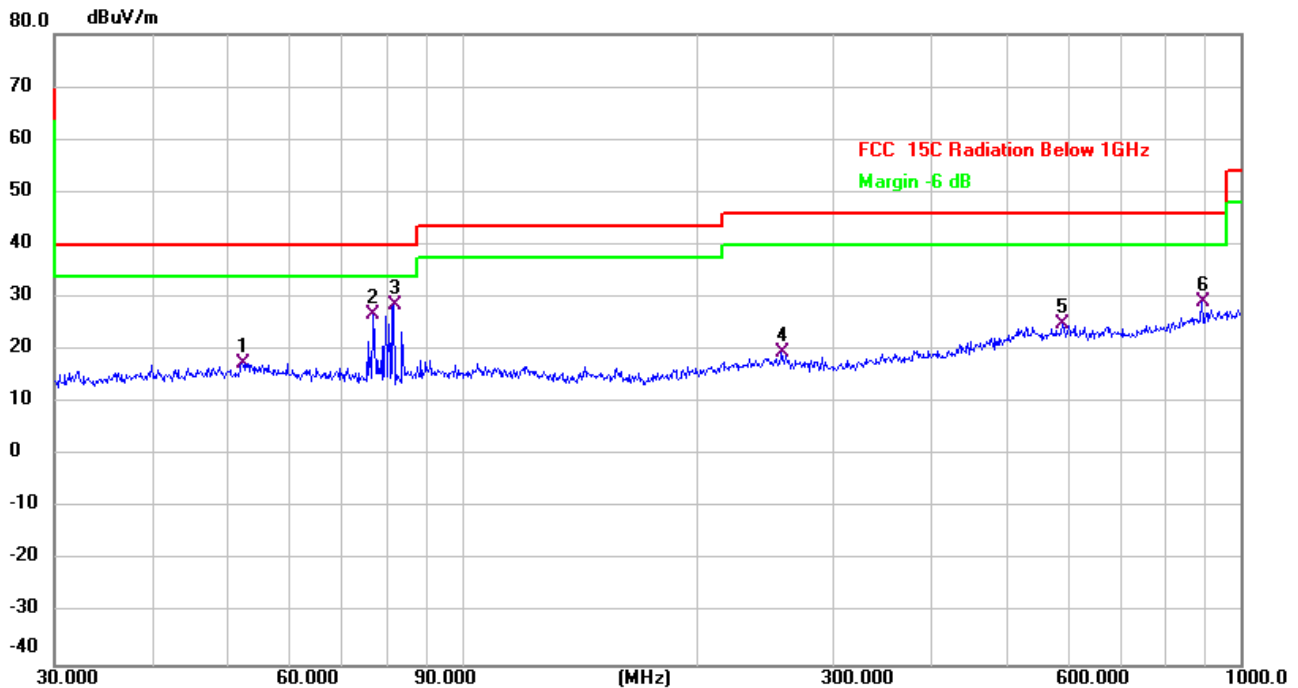

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		52.2079	27.34	-9.83	17.51	40.00	-22.49	QP
2		77.0505	38.32	-11.72	26.60	40.00	-13.40	QP
3	*	81.7833	40.15	-11.58	28.57	40.00	-11.43	QP
4		257.4222	27.45	-8.04	19.41	46.00	-26.59	QP
5		590.9737	27.76	-2.78	24.98	46.00	-21.02	QP
6		890.7278	29.31	-0.09	29.22	46.00	-16.78	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX – 802.11b 2462MHz	Polarization:	Vertical
Power supply:	DC 3.8V	Test site:	RE chamber 2

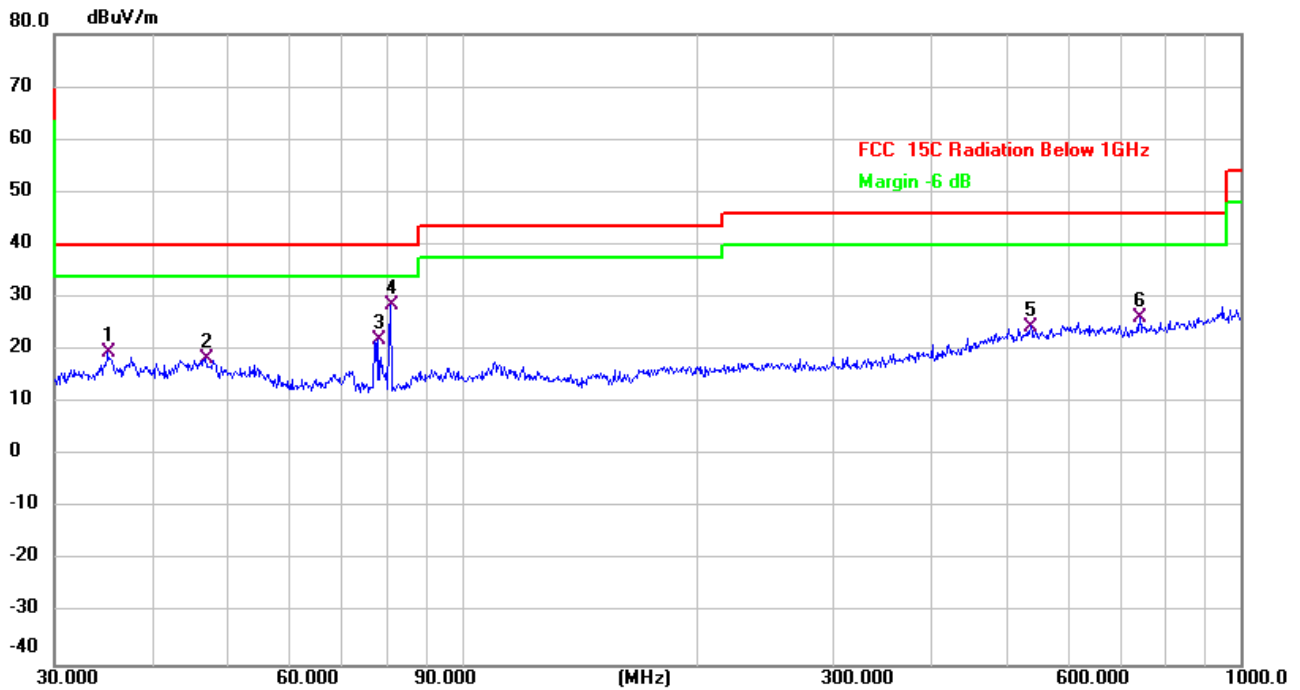

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		35.1278	29.61	-10.05	19.56	40.00	-20.44	QP
2		46.8303	27.61	-9.27	18.34	40.00	-21.66	QP
3		78.1389	33.55	-11.73	21.82	40.00	-18.18	QP
4	*	80.9275	40.14	-11.67	28.47	40.00	-11.53	QP
5		537.5891	29.04	-4.54	24.50	46.00	-21.50	QP
6		742.2587	28.47	-2.29	26.18	46.00	-19.82	QP

Radiated emissions 1 GHz ~ 25 GHz

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
4824.000	39.66	0.82	40.48	74.00	-33.52	Peak	V
4824.000	33.50	0.82	34.32	54.00	-19.68	AVG	V
7236.000	39.85	6.00	45.85	74.00	-28.15	Peak	V
7236.000	33.23	6.00	39.23	54.00	-14.77	AVG	V
9648.000	40.85	6.17	47.02	74.00	-26.98	Peak	V
9648.000	34.35	6.17	40.52	54.00	-13.48	AVG	V
4824.000	38.48	0.82	39.30	74.00	-34.70	Peak	H
4824.000	32.28	0.82	33.10	54.00	-20.90	AVG	H
7236.000	39.27	6.00	45.27	74.00	-28.73	Peak	H
7236.000	33.15	6.00	39.15	54.00	-14.85	AVG	H
9648.000	39.98	6.17	46.15	74.00	-27.85	Peak	H
9648.000	33.95	6.17	40.12	54.00	-13.88	AVG	H
TX 802.11b 2437MHz							
4874.000	40.27	1.01	41.28	74.00	-32.72	Peak	V
4874.000	34.12	1.01	35.13	54.00	-18.87	AVG	V
7311.000	39.79	5.94	45.73	74.00	-28.27	Peak	V
7311.000	33.39	5.94	39.33	54.00	-14.67	AVG	V
9748.000	41.15	6.54	47.69	74.00	-26.31	Peak	V
9748.000	34.88	6.54	41.42	54.00	-12.58	AVG	V
4874.000	40.05	1.01	41.06	74.00	-32.94	Peak	H
4874.000	33.55	1.01	34.56	54.00	-19.44	AVG	H
7311.000	40.92	5.94	46.86	74.00	-27.14	Peak	H
7311.000	34.47	5.94	40.41	54.00	-13.59	AVG	H
9748.000	40.57	6.54	47.11	74.00	-26.89	Peak	H
9748.000	34.49	6.54	41.03	54.00	-12.97	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2462MHz							
4924.000	41.59	1.27	42.86	74.00	-31.14	Peak	V
4924.000	35.15	1.27	36.42	54.00	-17.58	AVG	V
7386.000	40.79	5.86	46.65	74.00	-27.35	Peak	V
7386.000	34.47	5.86	40.33	54.00	-13.67	AVG	V
9848.000	41.42	6.31	47.73	74.00	-26.27	Peak	V
9848.000	35.10	6.31	41.41	54.00	-12.59	AVG	V
4924.000	42.73	1.27	44.00	74.00	-30.00	Peak	H
4924.000	36.41	1.27	37.68	54.00	-16.32	AVG	H
7386.000	40.51	5.86	46.37	74.00	-27.63	Peak	H
7386.000	34.29	5.86	40.15	54.00	-13.85	AVG	H
9848.000	41.21	6.31	47.52	74.00	-26.48	Peak	H
9848.000	34.95	6.31	41.26	54.00	-12.74	AVG	H

Radiated emissions at band edge


Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
2310	41.82	-8.08	33.74	74.00	-40.26	Peak	V
2310	32.55	-8.08	24.47	54.00	-29.53	AVG	V
2390	62.46	-7.71	54.75	74.00	-19.25	Peak	V
2390	42.41	-7.71	34.70	54.00	-19.30	AVG	V
2310	42.61	-8.08	34.53	74.00	-39.47	Peak	H
2310	32.77	-8.08	24.69	54.00	-29.31	AVG	H
2390	73.70	-7.71	65.99	74.00	-8.01	Peak	H
2390	57.12	-7.71	49.41	54.00	-4.59	AVG	H
TX 802.11b 2462MHz							
2483.5	63.31	-7.24	56.07	74.00	-17.93	Peak	V
2483.5	45.28	-7.24	38.04	54.00	-15.96	AVG	V
2500	47.26	-7.17	40.09	74.00	-33.91	Peak	V
2500	37.82	-7.17	30.65	54.00	-23.35	AVG	V
2483.5	76.78	-7.24	69.54	74.00	-4.46	Peak	H
2483.5	57.97	-7.24	50.73	54.00	-3.27	AVG	H
2500	48.32	-7.17	41.15	74.00	-32.85	Peak	H
2500	38.04	-7.17	30.87	54.00	-23.13	AVG	H

6.4 DTS bandwidth

6.4.1 Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test setup



6.4.3 Test procedures

Test method: ANSI C63.10-2013 Section 11.8.1

6.4.4 Test results


Note: See the appendix A

6.5 Maximum conducted output power

6.5.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

6.5.2 Test setup



6.5.3 Test procedure

Test method for peak power: ANSI C63.10-2013 Section 11.9.1.3 PKPM1 Peak power meter method

Test method for average power: ANSI C63.10-2013 Section 11.9.2.3.1 Method AVGPM

6.5.4 Test results


Note: see the appendix B

6.6 Power spectral density

6.6.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.6.2 Test setup



6.6.3 Test Procedure

Test method: ANSI C63.10-2013 Section 11.10.2

6.6.4 Test Results


Note: see the appendix C

6.7 Band edge (Conducted)

6.7.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.7.2 Test setup



6.7.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.13

6.7.4 Test results


Note: see the appendix D

6.8 Conducted spurious emissions

6.8.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.8.2 Test setup



6.8.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.13

6.8.4 Test results


Note: see the appendix E

6.9 Duty Cycle

6.9.1 Limits

None, for reporting purposes only.

6.9.2 Test setup



6.9.3 Test procedure

Test method: KDB 558074 section 6, zero-span spectrum analyzer method.

6.9.4 Test Results


Note: see the appendix F




Appendix A: DTS Bandwidth




Test Result


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.600	0.5	PASS
		2437	9.560	0.5	PASS
		2462	9.080	0.5	PASS
11G	Ant1	2412	16.320	0.5	PASS
		2437	15.760	0.5	PASS
		2462	16.320	0.5	PASS
11N20SISO	Ant1	2412	16.800	0.5	PASS
		2437	17.000	0.5	PASS
		2462	17.120	0.5	PASS
11N40SISO	Ant1	2422	35.120	0.5	PASS
		2437	35.120	0.5	PASS
		2452	33.120	0.5	PASS

Test Graphs

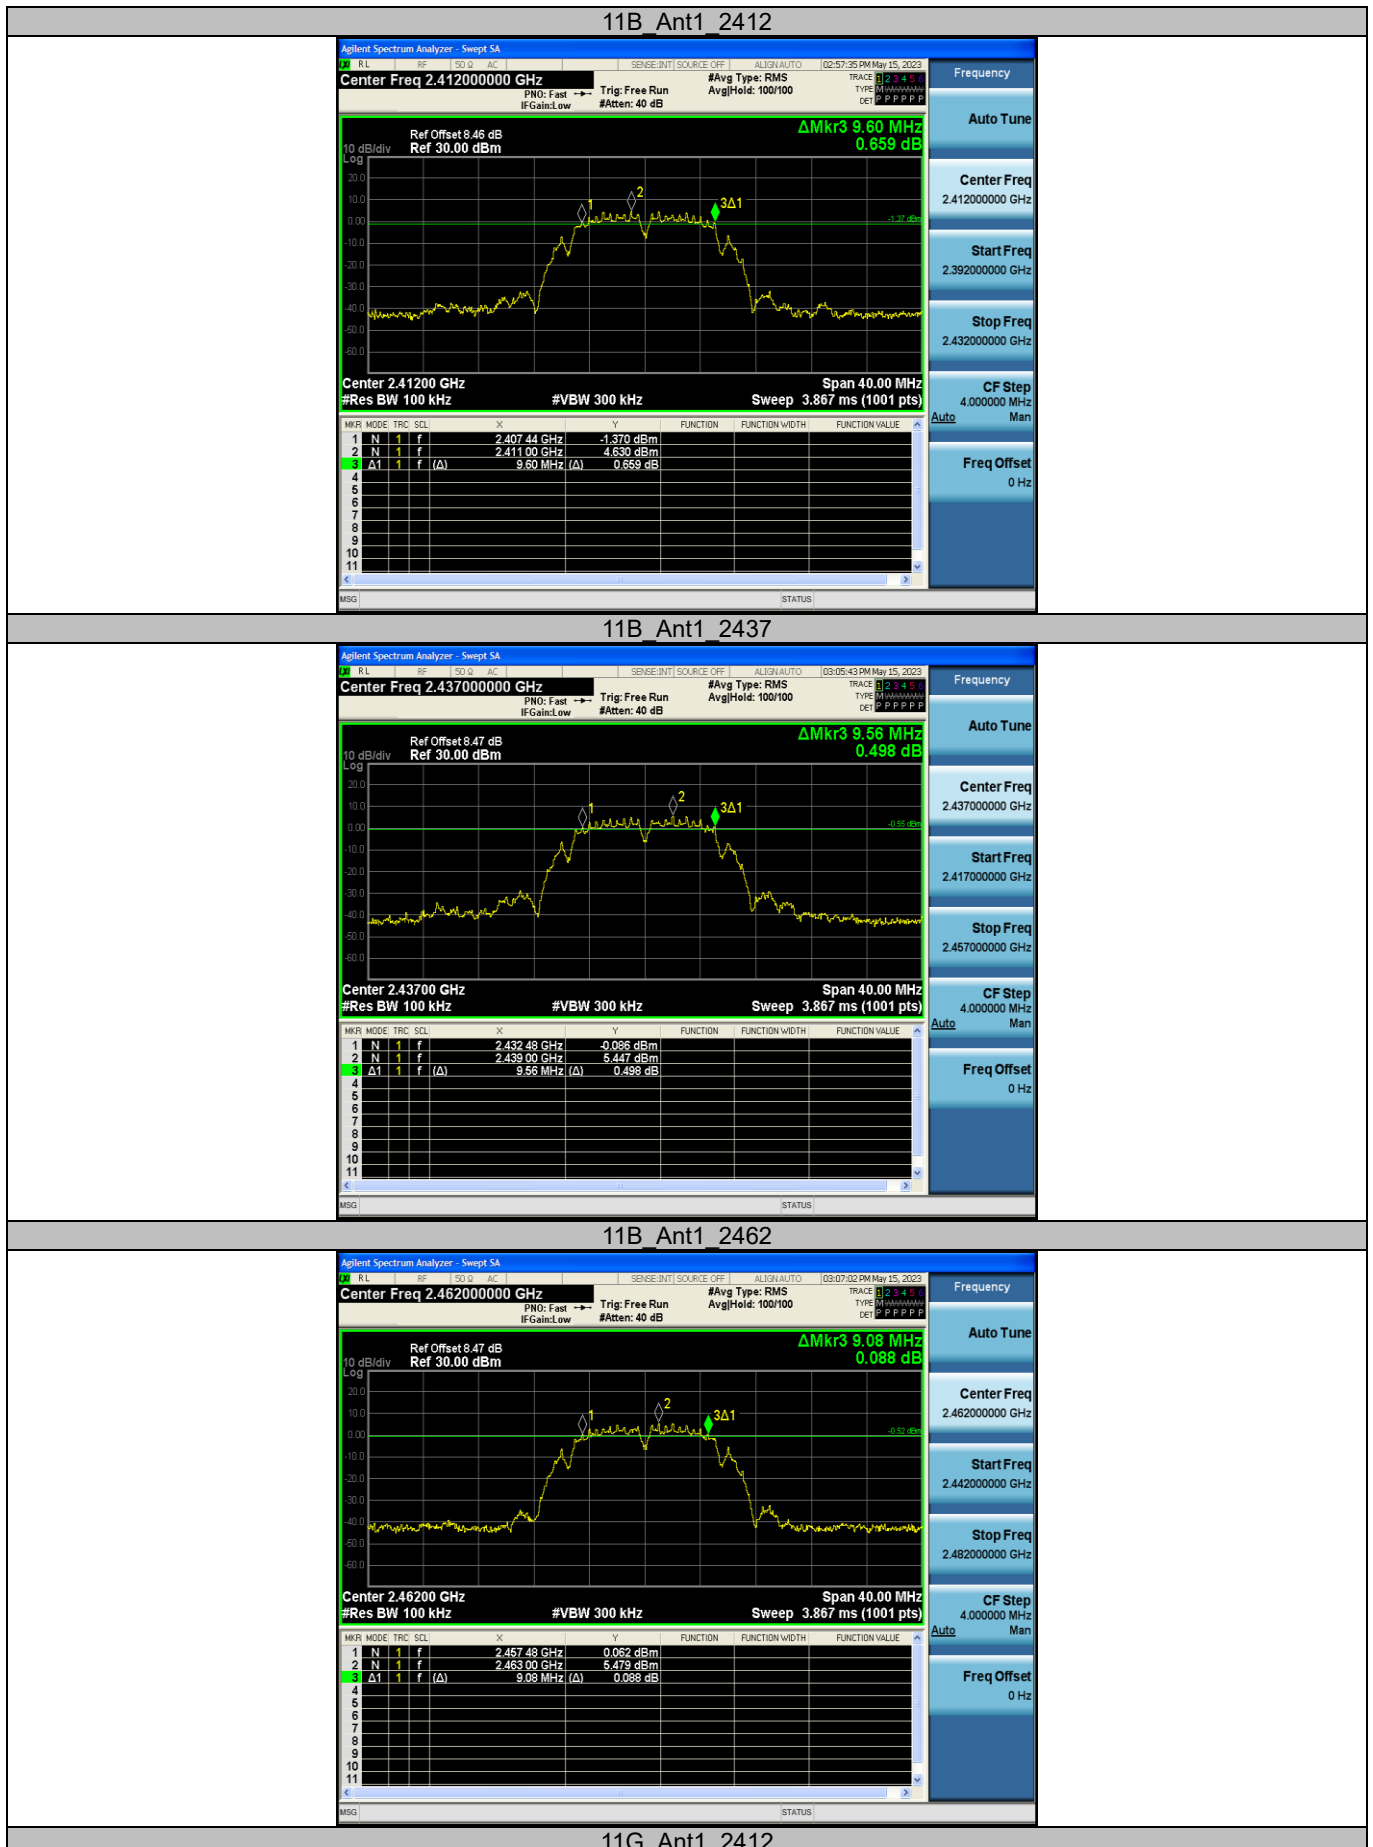


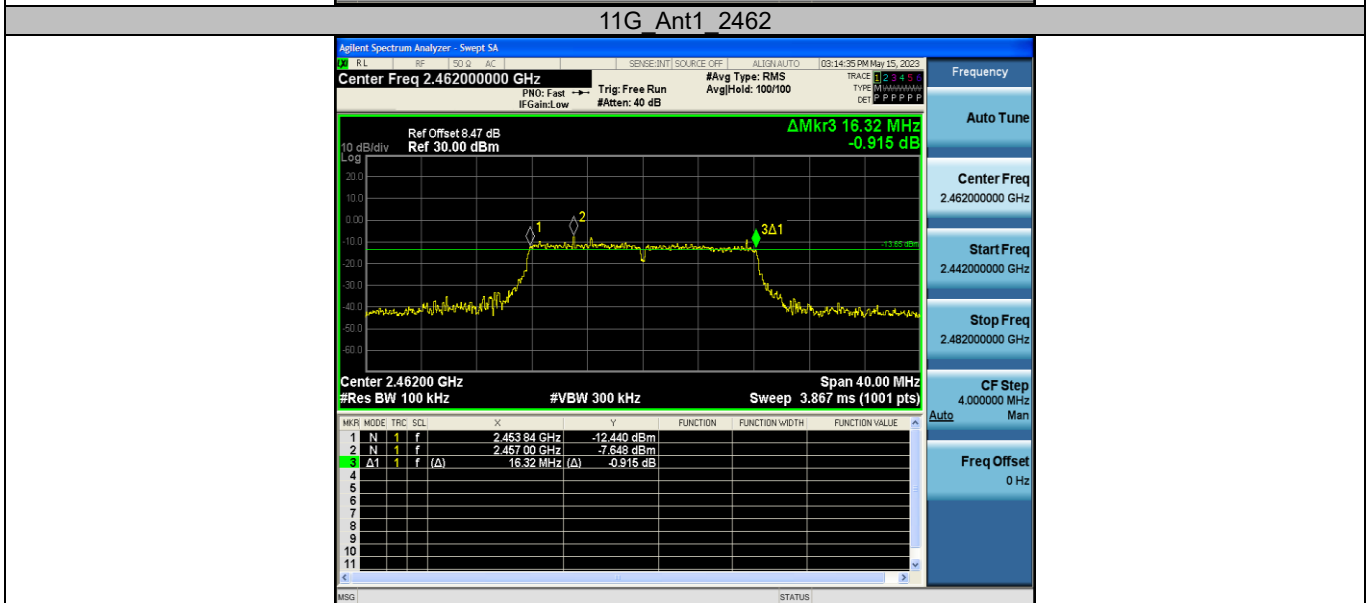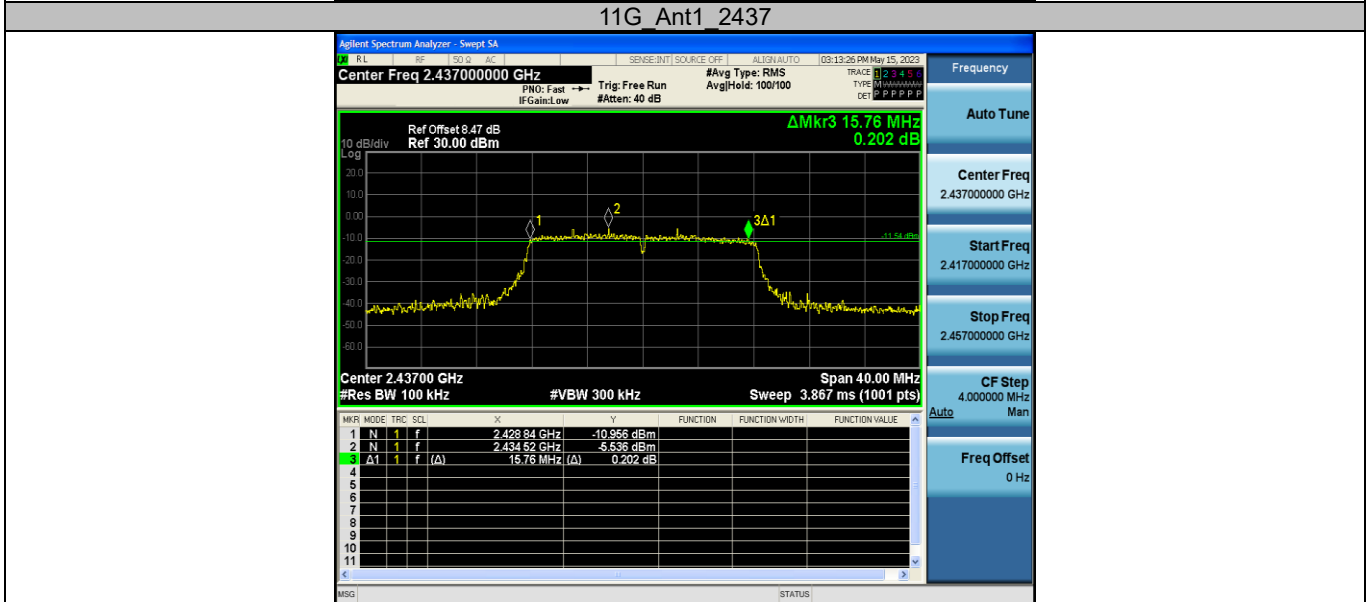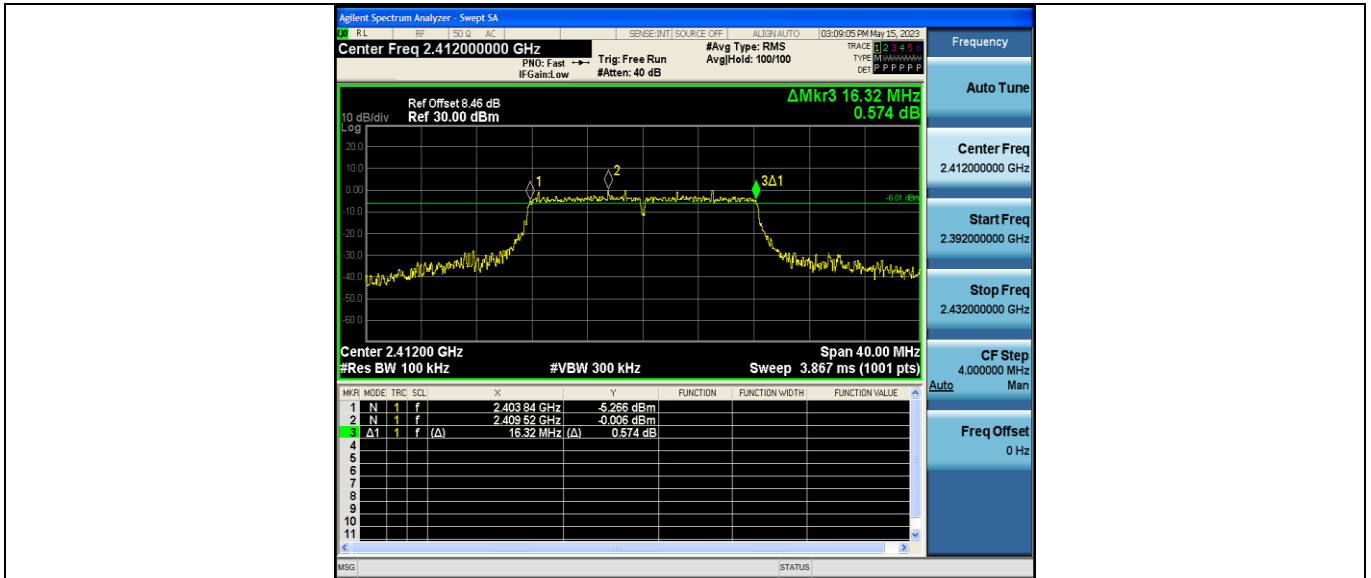

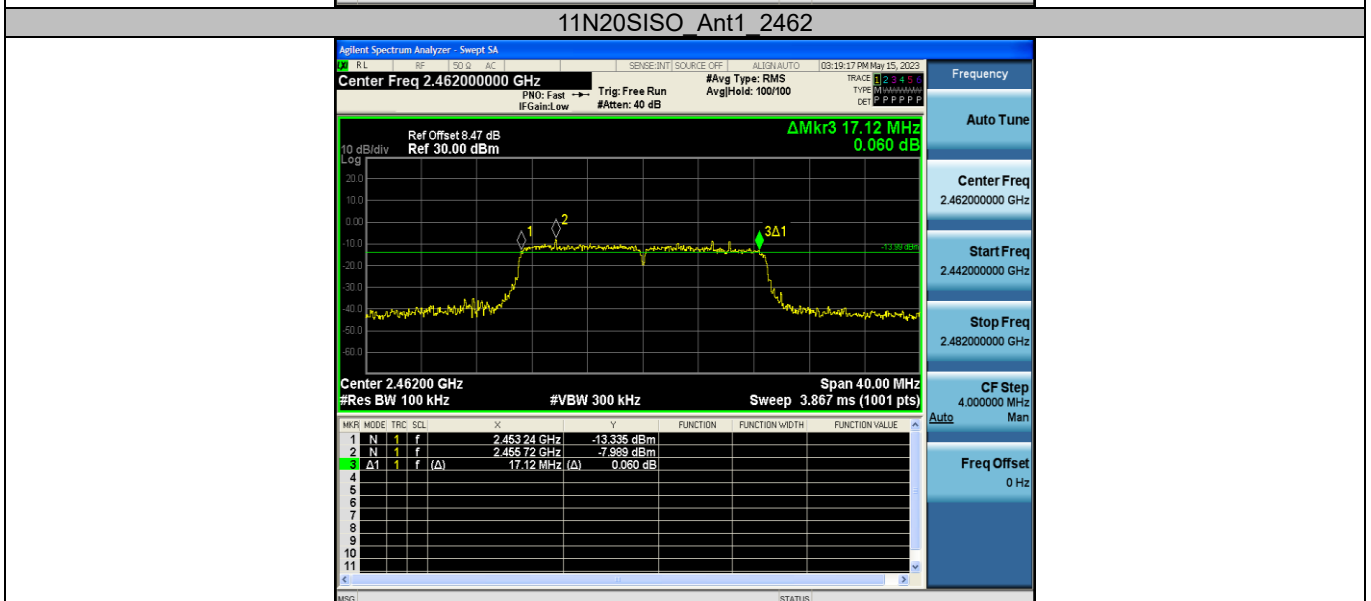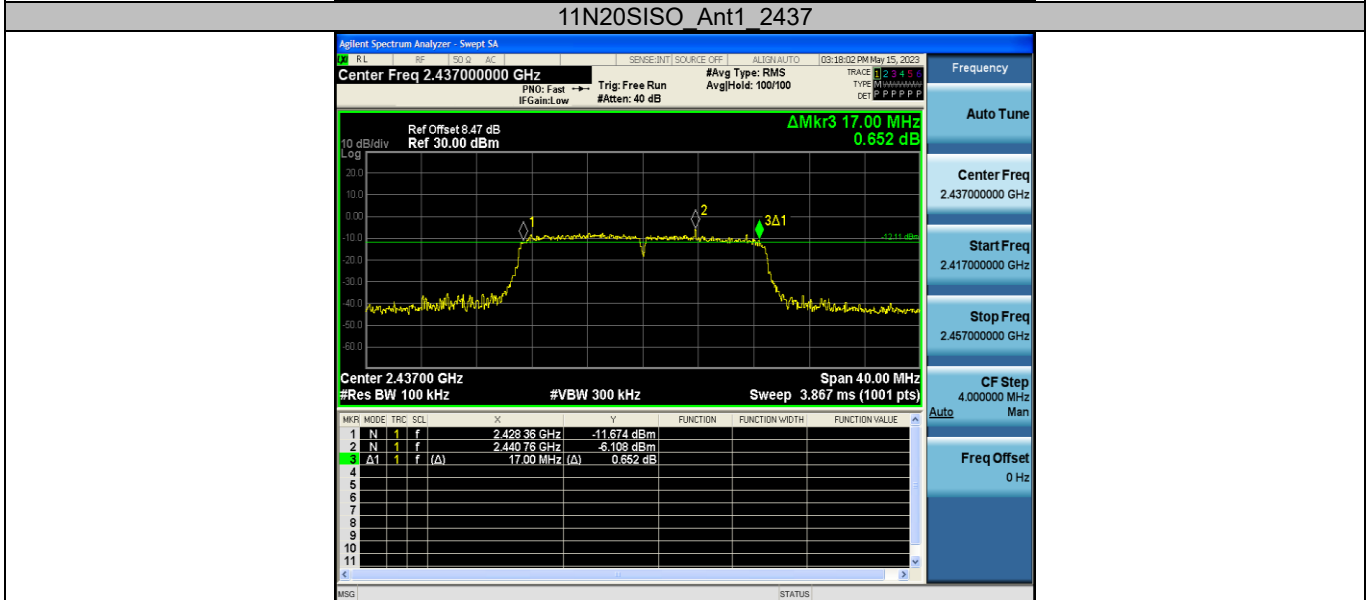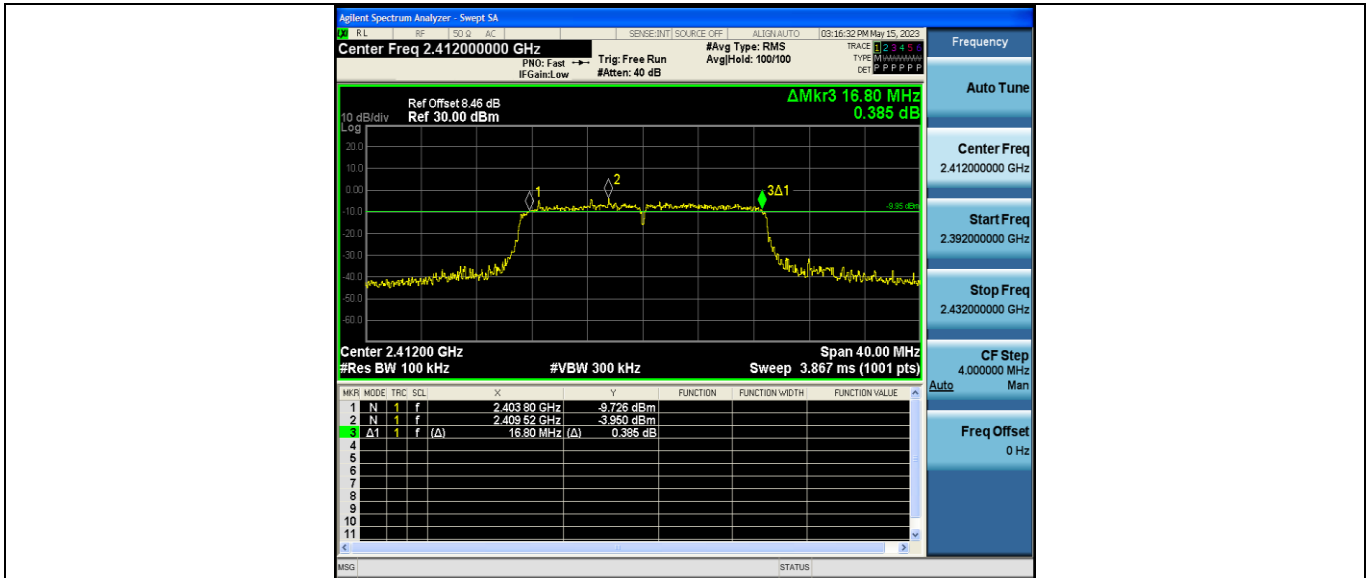


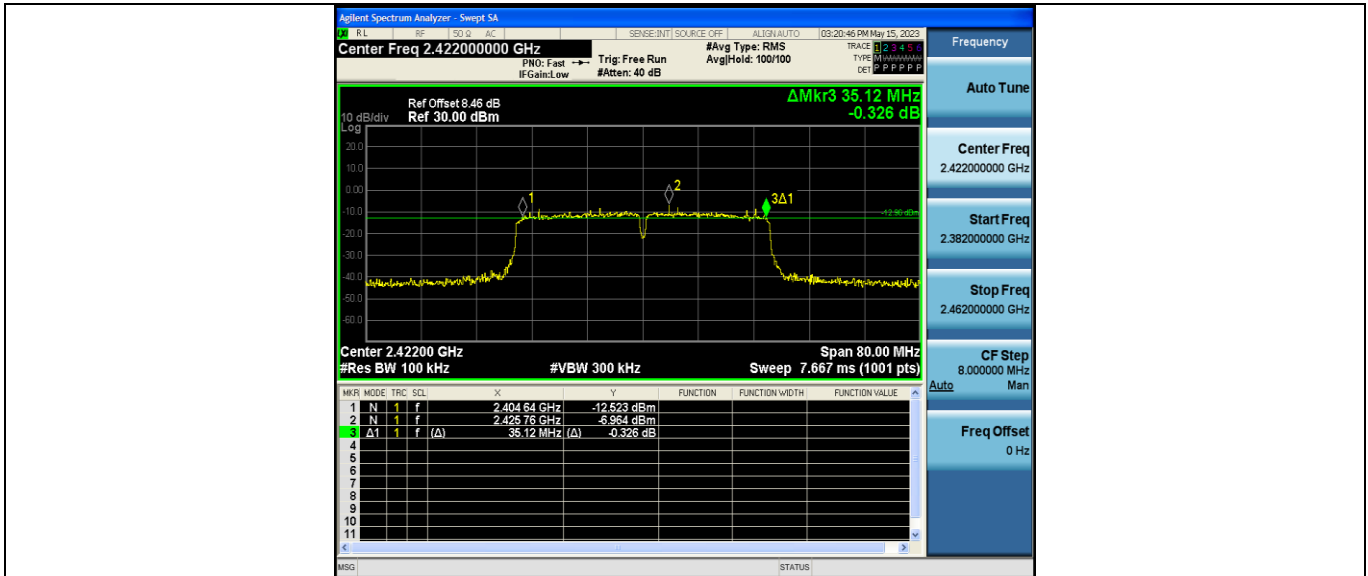

11N40SISO Ant1_2437

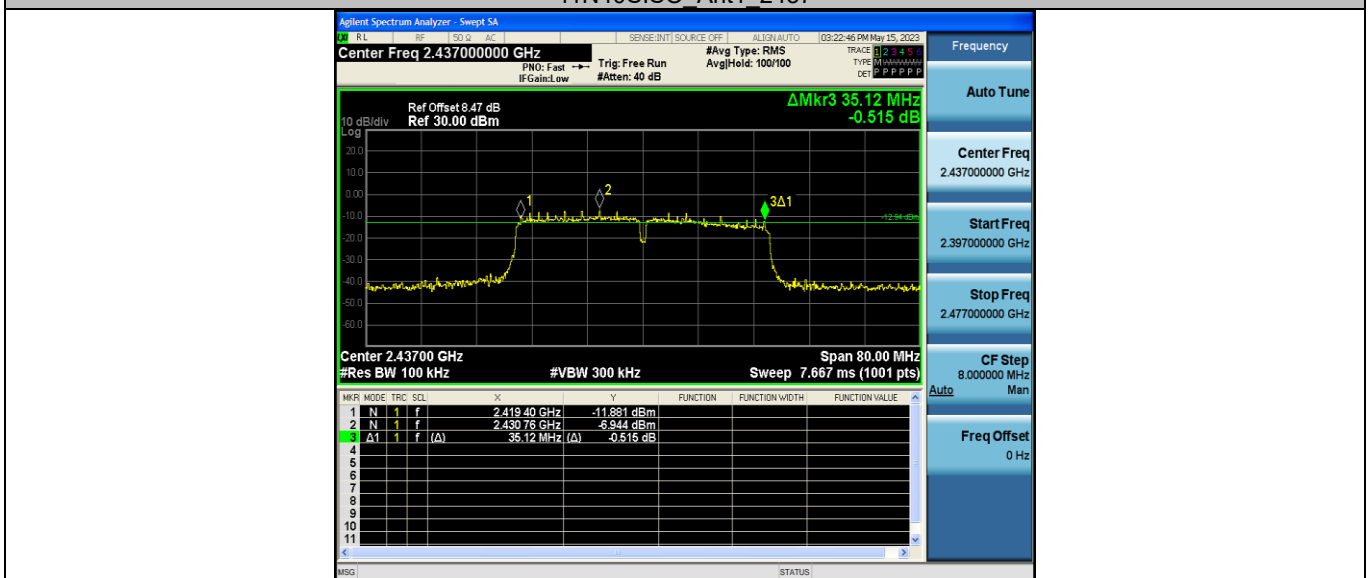

11N40SISO Ant1_2452

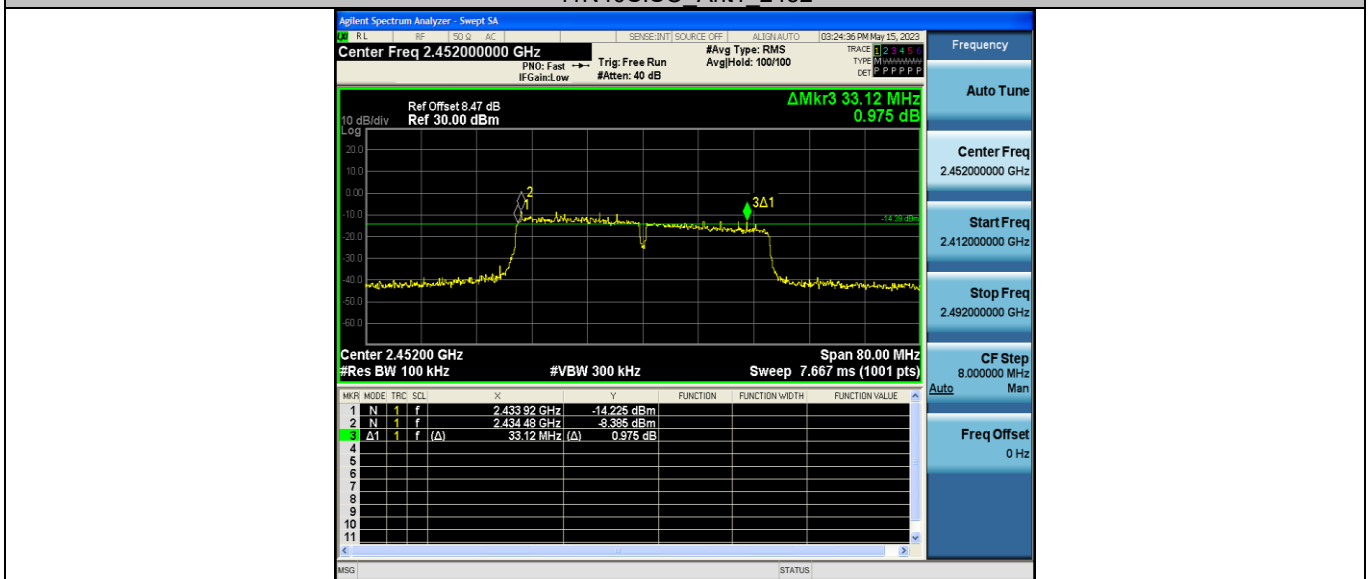

Appendix B: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	16.38	≤30.00	PASS
		2437	17.02	≤30.00	PASS
		2462	16.98	≤30.00	PASS
11G	Ant1	2412	13.10	≤30.00	PASS
		2437	12.89	≤30.00	PASS
		2462	12.54	≤30.00	PASS
11N20SISO	Ant1	2412	13.21	≤30.00	PASS
		2437	13.07	≤30.00	PASS
		2462	12.70	≤30.00	PASS
11N40SISO	Ant1	2422	14.06	≤30.00	PASS
		2437	13.54	≤30.00	PASS
		2452	12.50	≤30.00	PASS


Appendix C: Maximum power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	0.41	≤8.00	PASS
		2437	1.46	≤8.00	PASS
		2462	1.36	≤8.00	PASS
11G	Ant1	2412	-8.95	≤8.00	PASS
		2437	-9.67	≤8.00	PASS
		2462	-10.23	≤8.00	PASS
11N20SISO	Ant1	2412	-10.59	≤8.00	PASS
		2437	-11.11	≤8.00	PASS
		2462	-11.04	≤8.00	PASS
11N40SISO	Ant1	2422	-11.54	≤8.00	PASS
		2437	-11.49	≤8.00	PASS
		2452	-12.66	≤8.00	PASS

Test Graphs

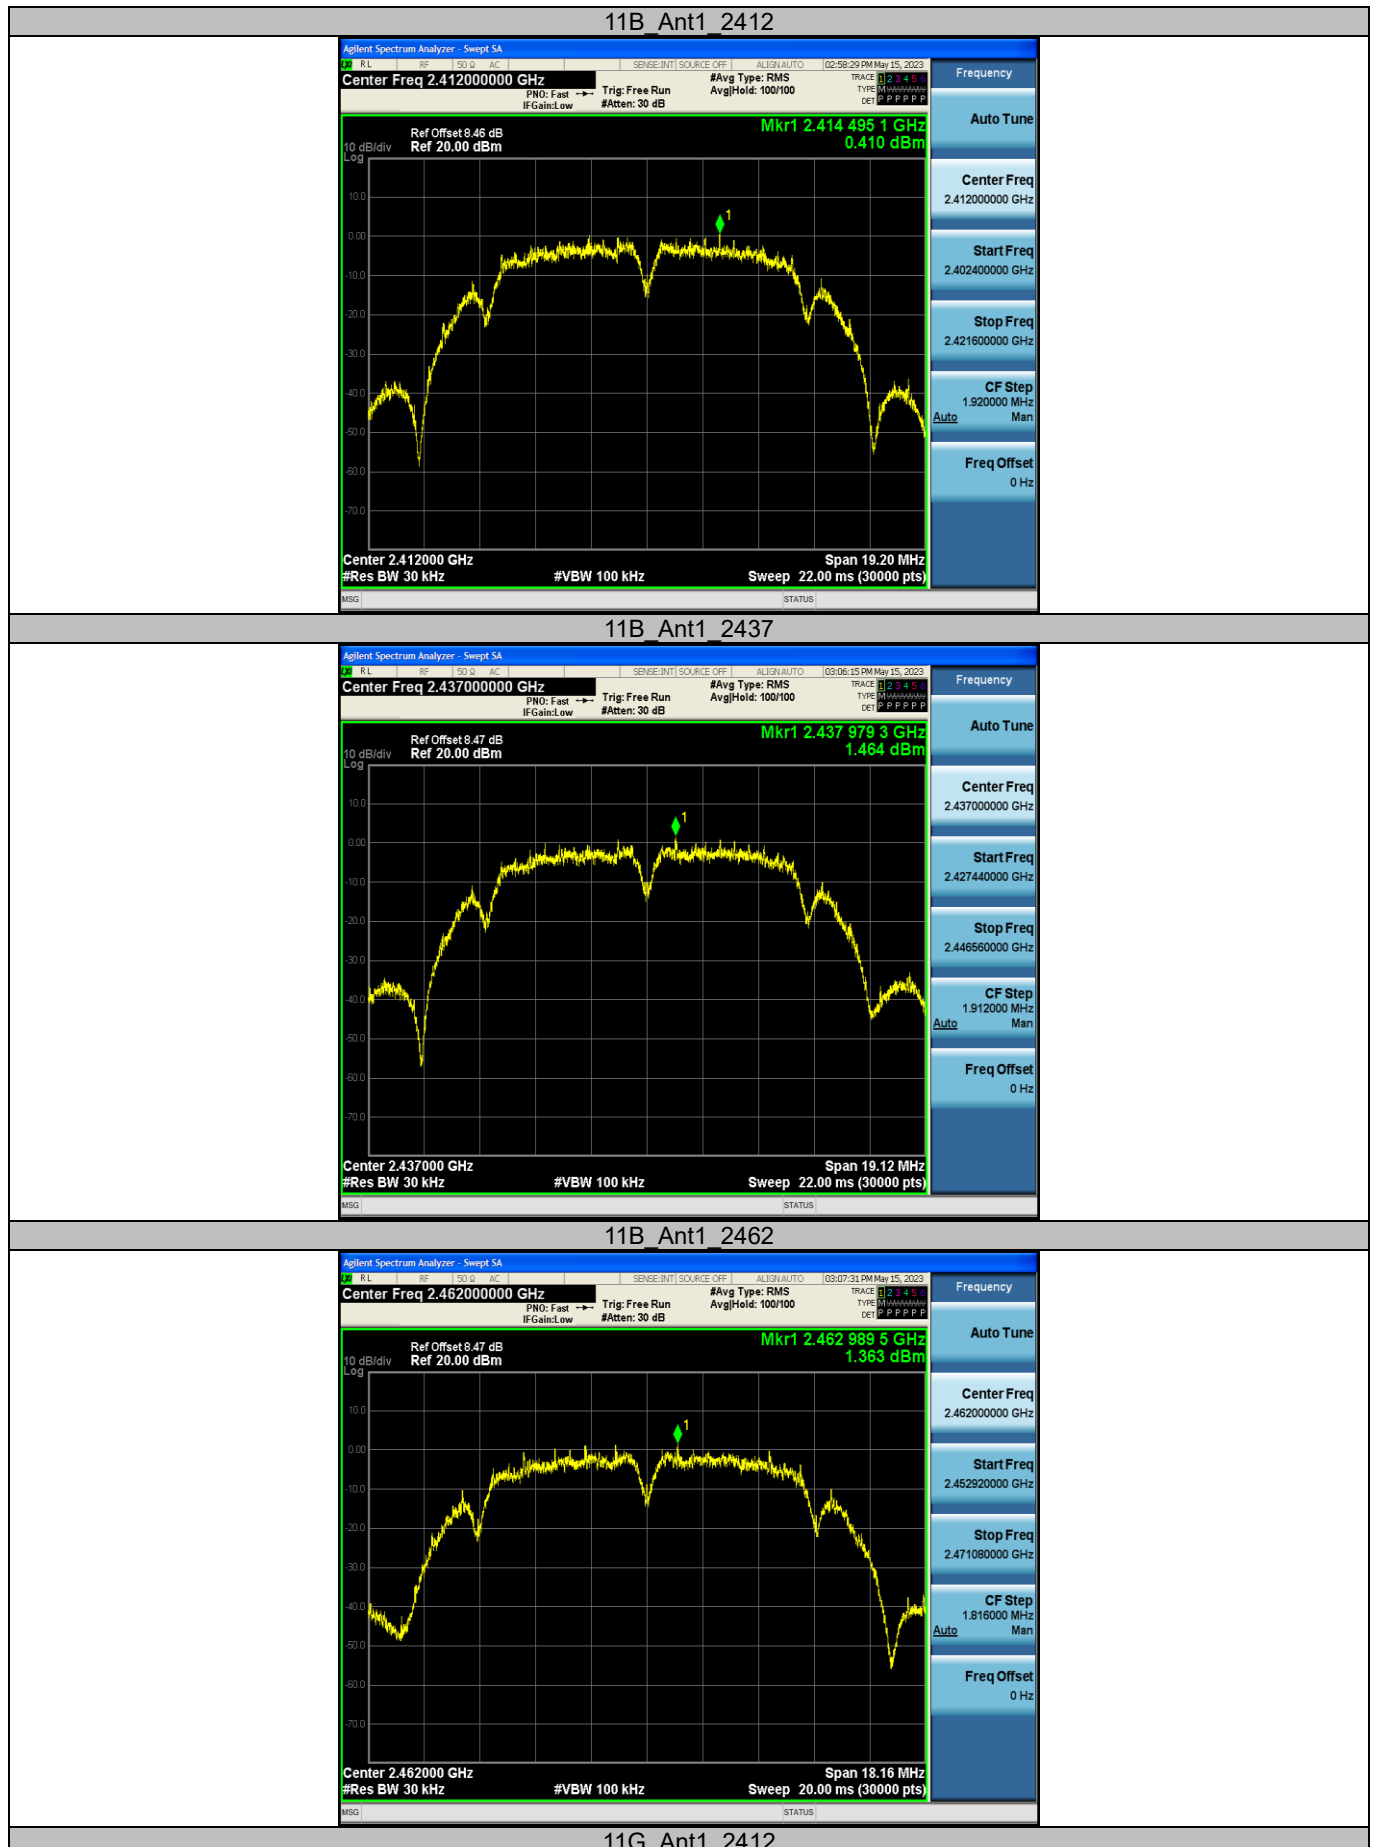


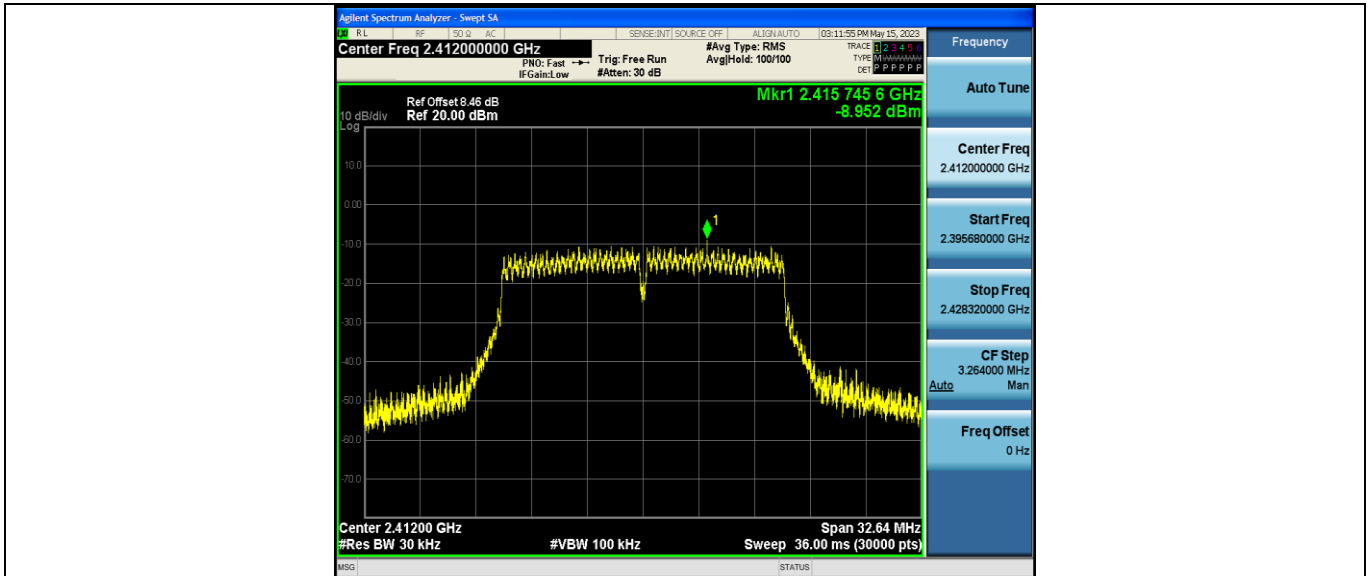




11G Ant1 2437

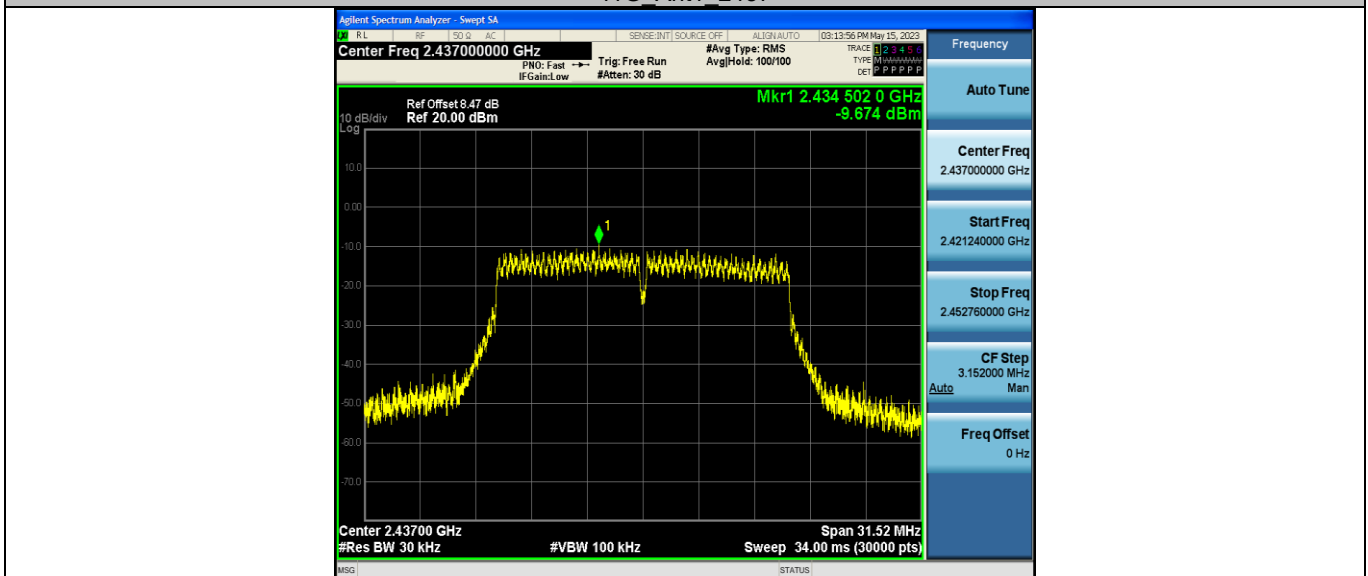


11G Ant1 2462

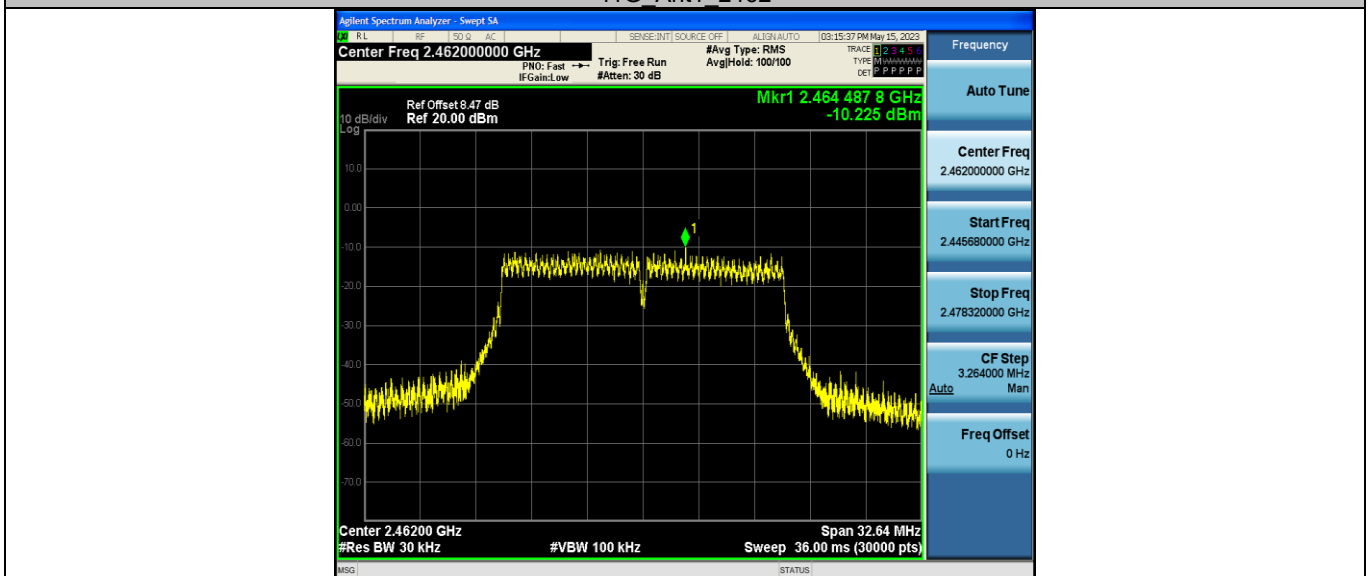



11N20SISO Ant1 2412

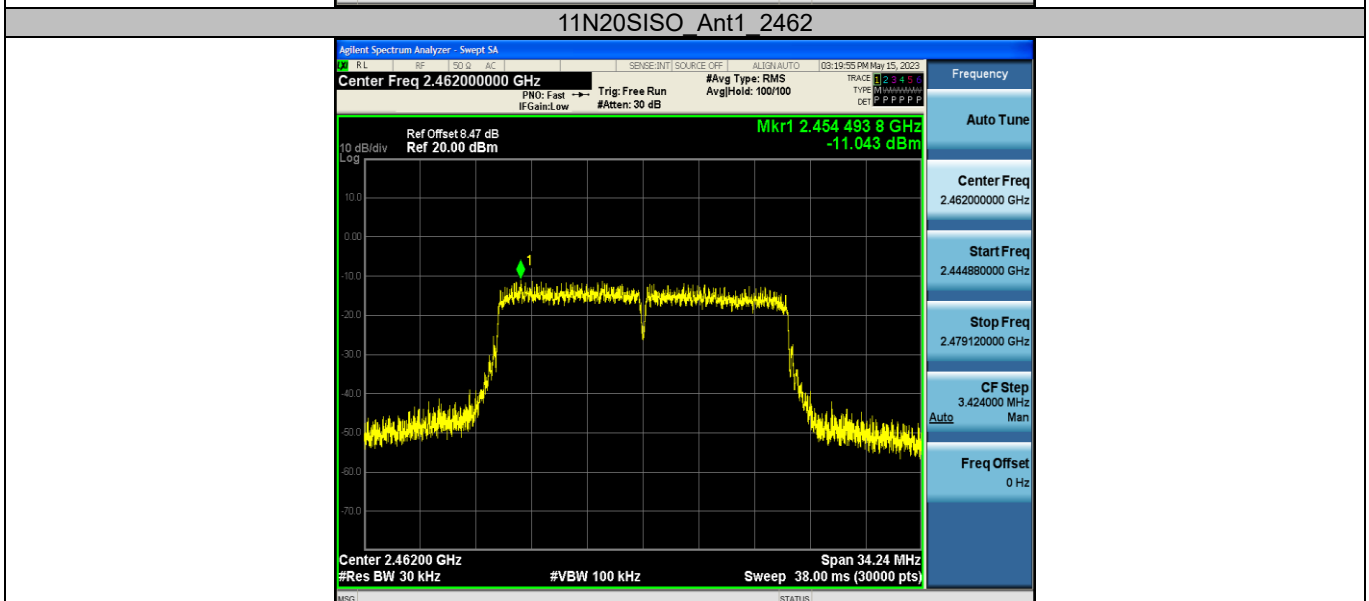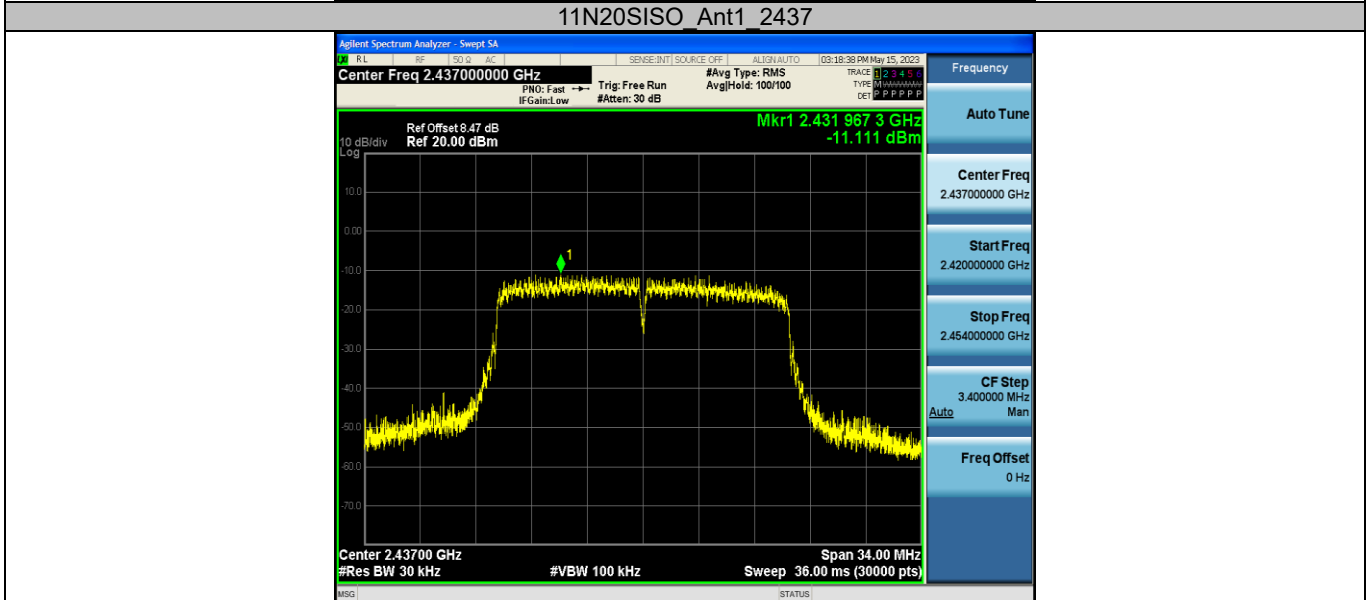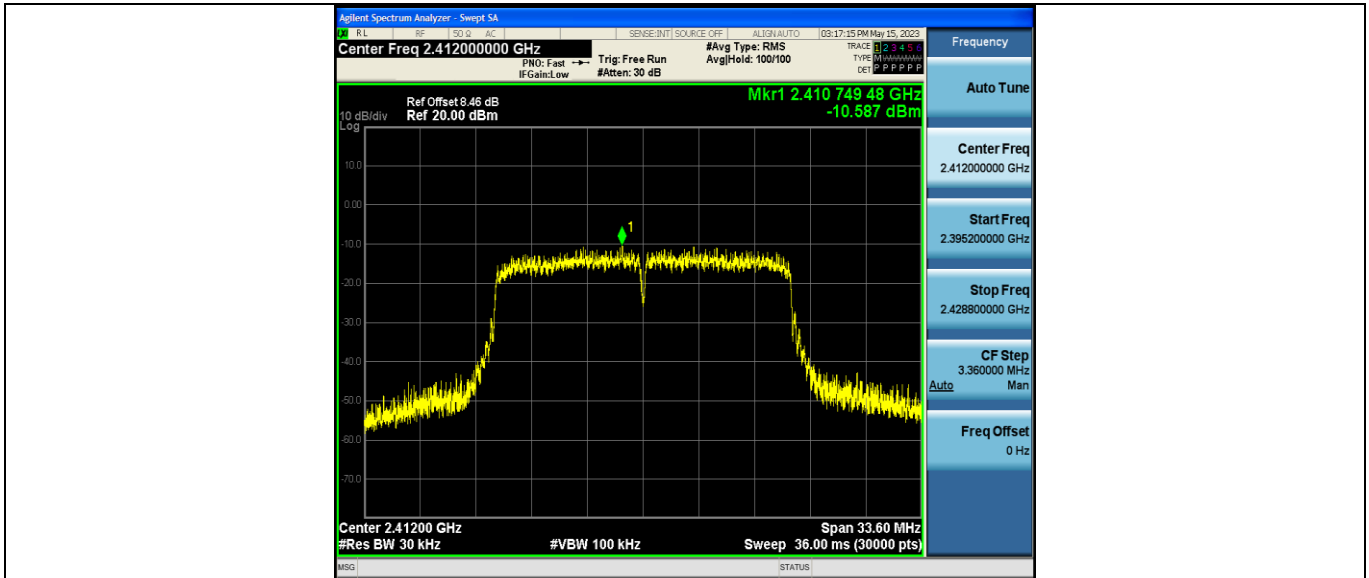

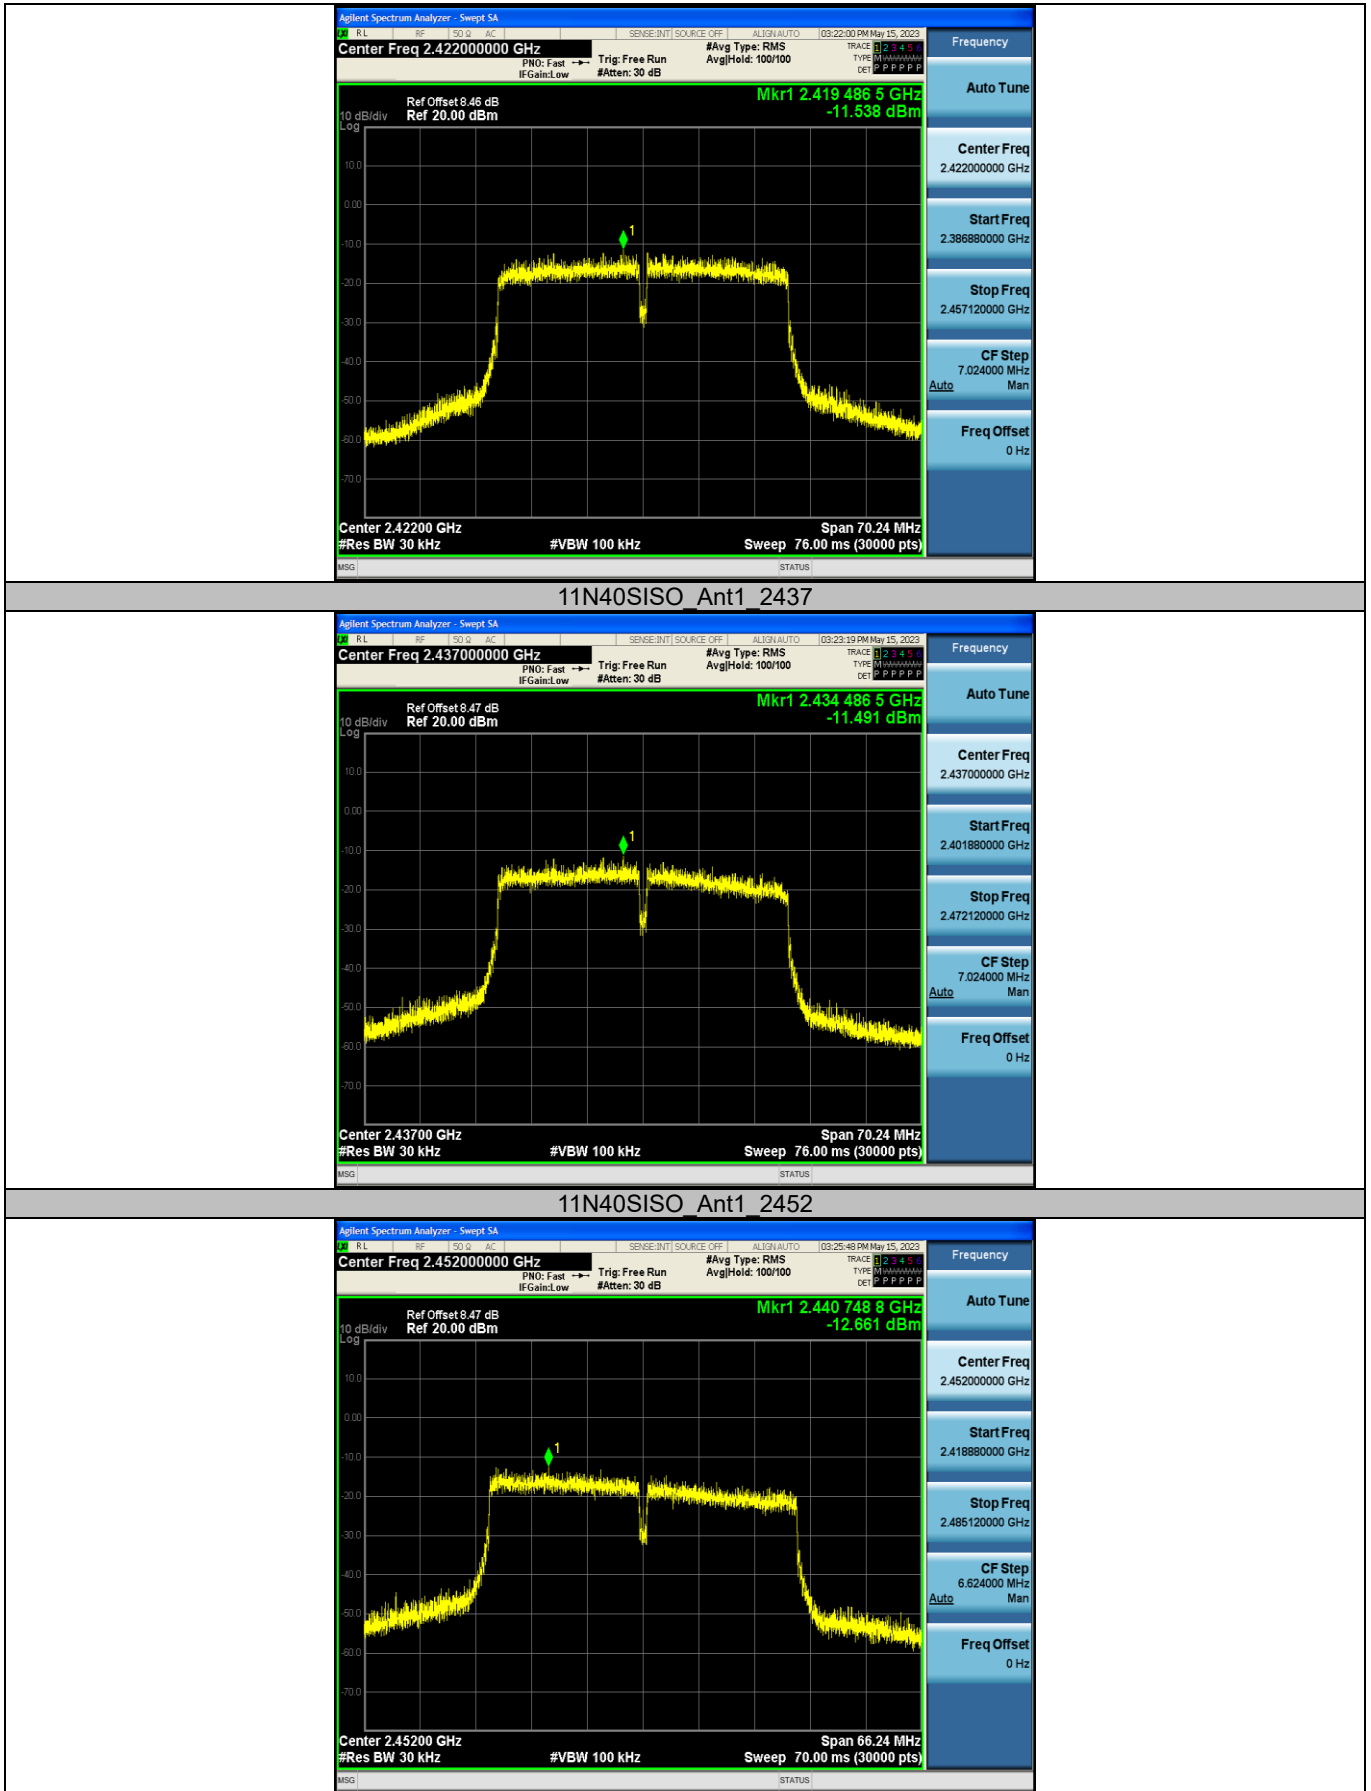


Appendix D: Band edge measurements

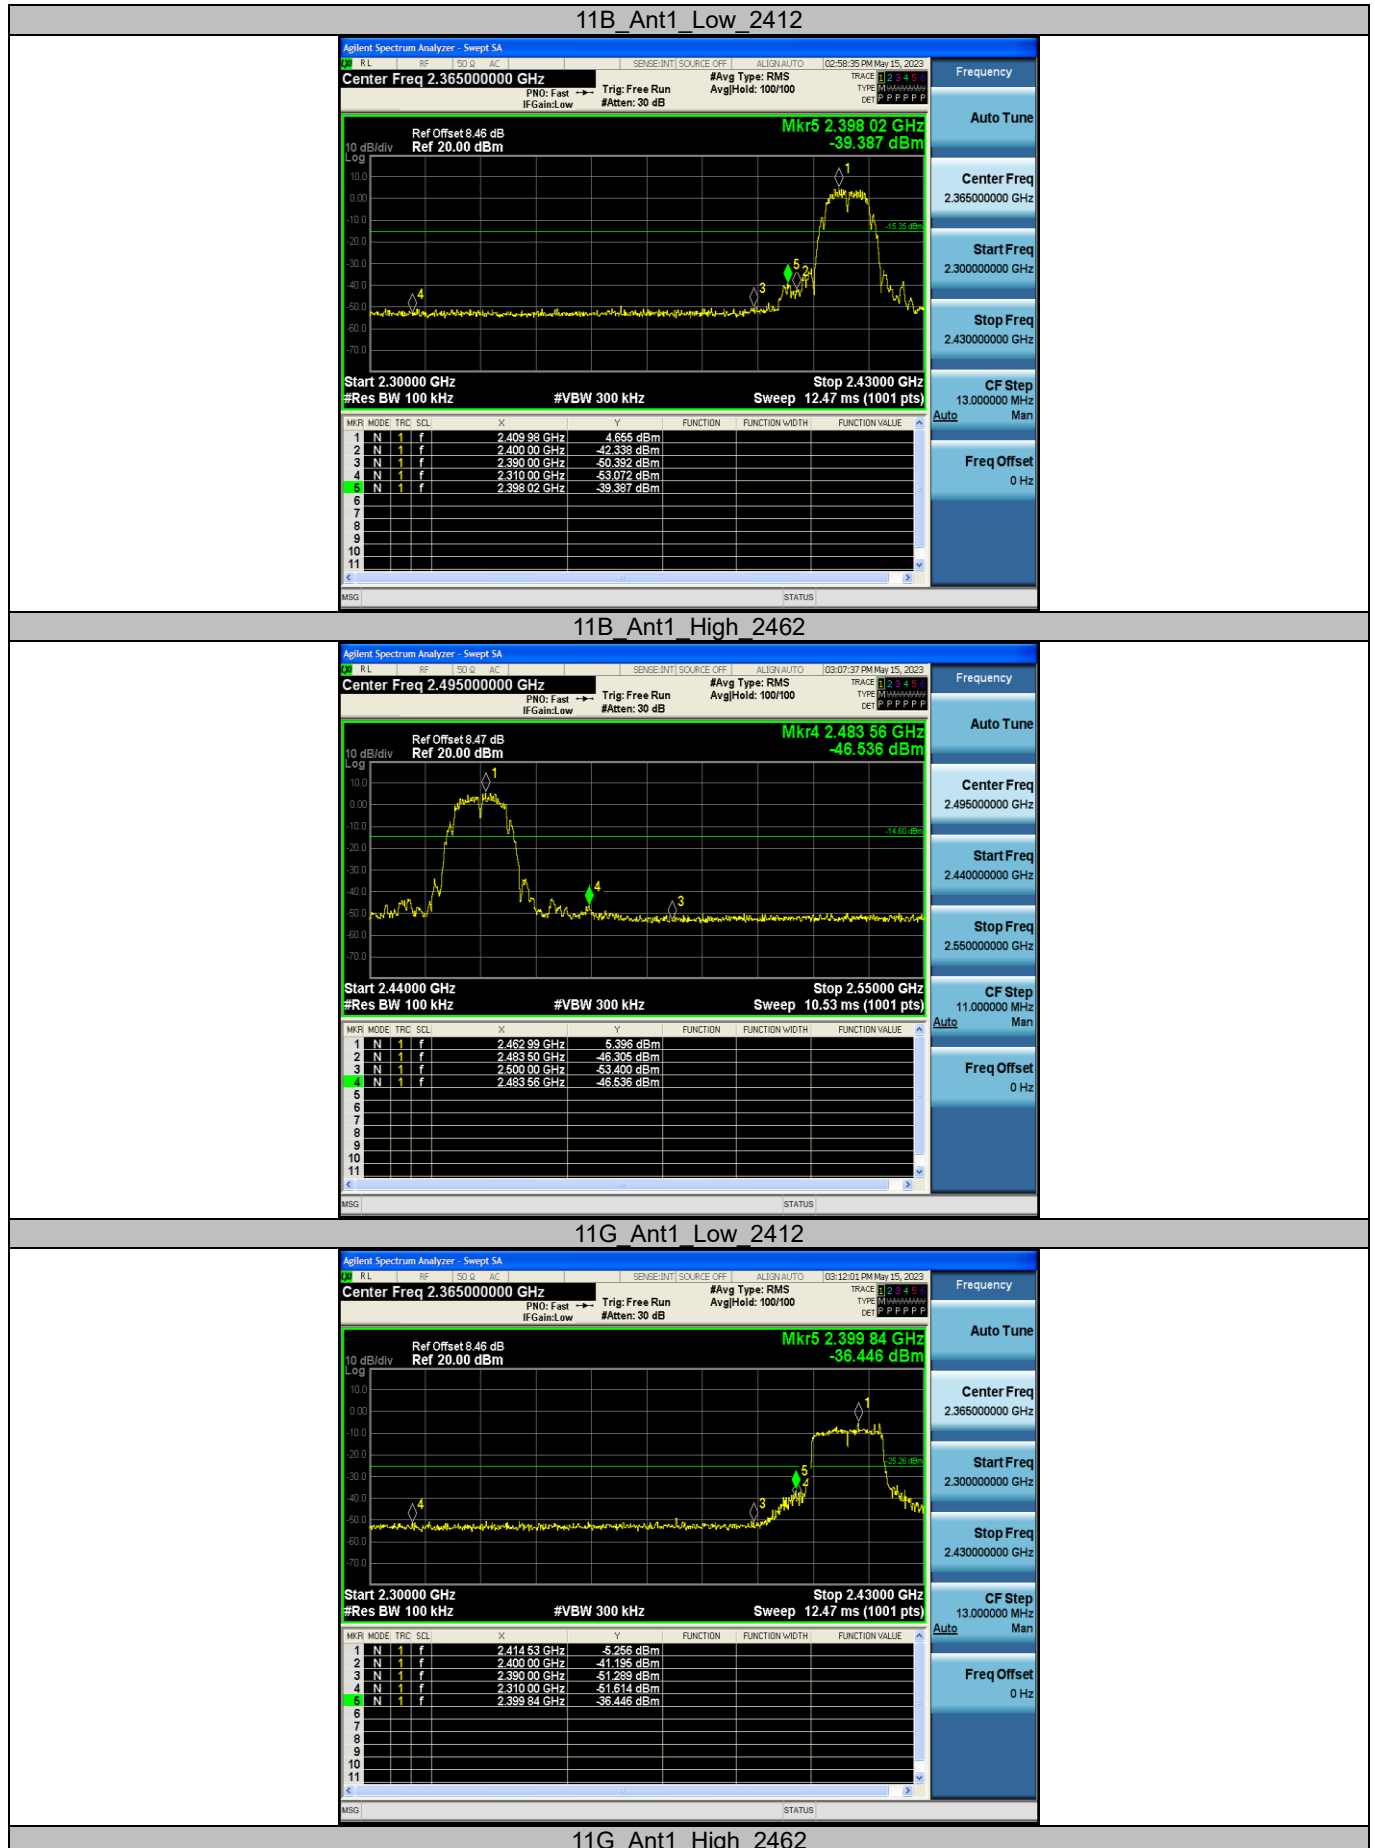


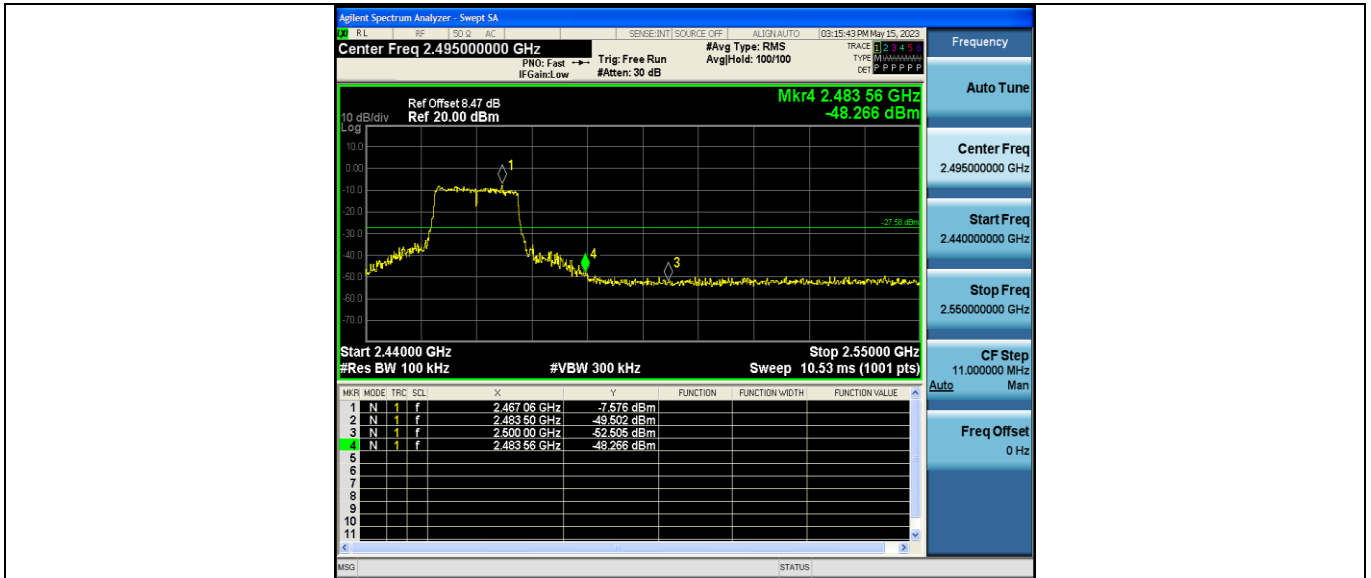


11N20SISO Ant1 Low 2412

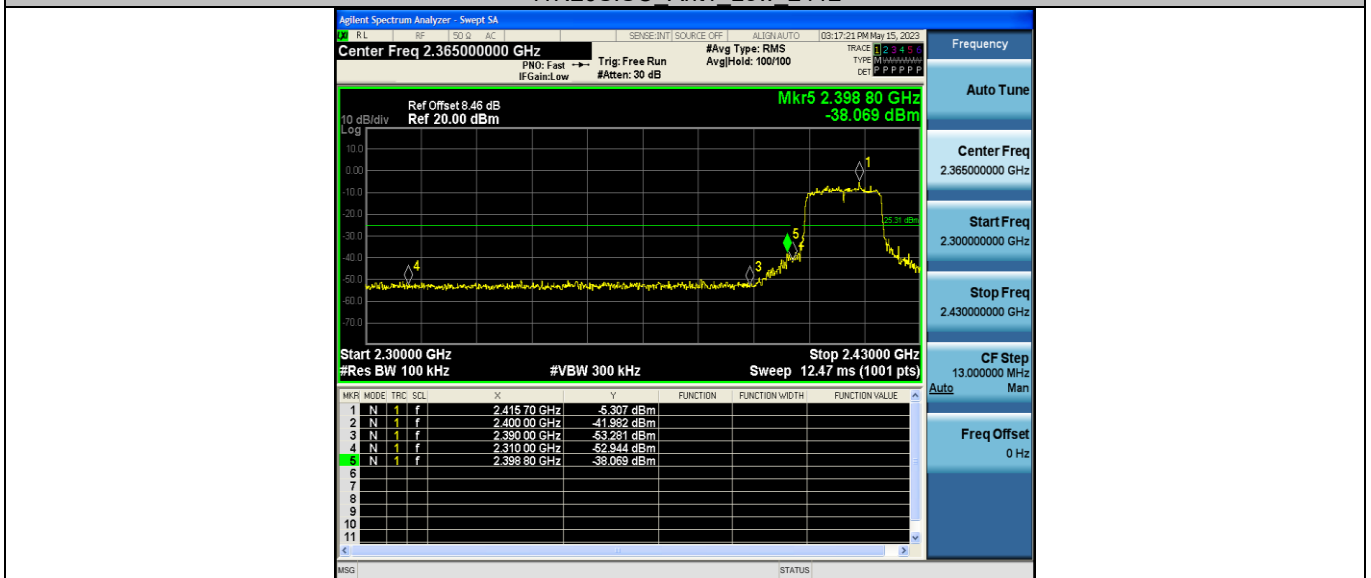


11N20SISO Ant1 High 2462


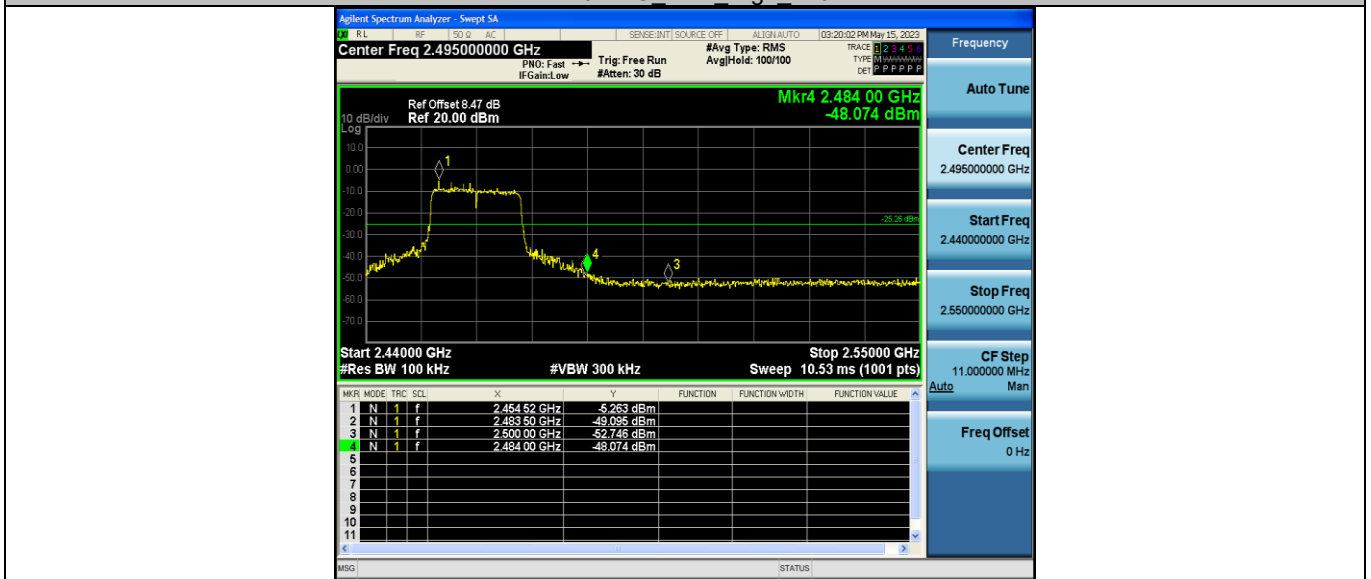


11N40SISO Ant1 Low 2422

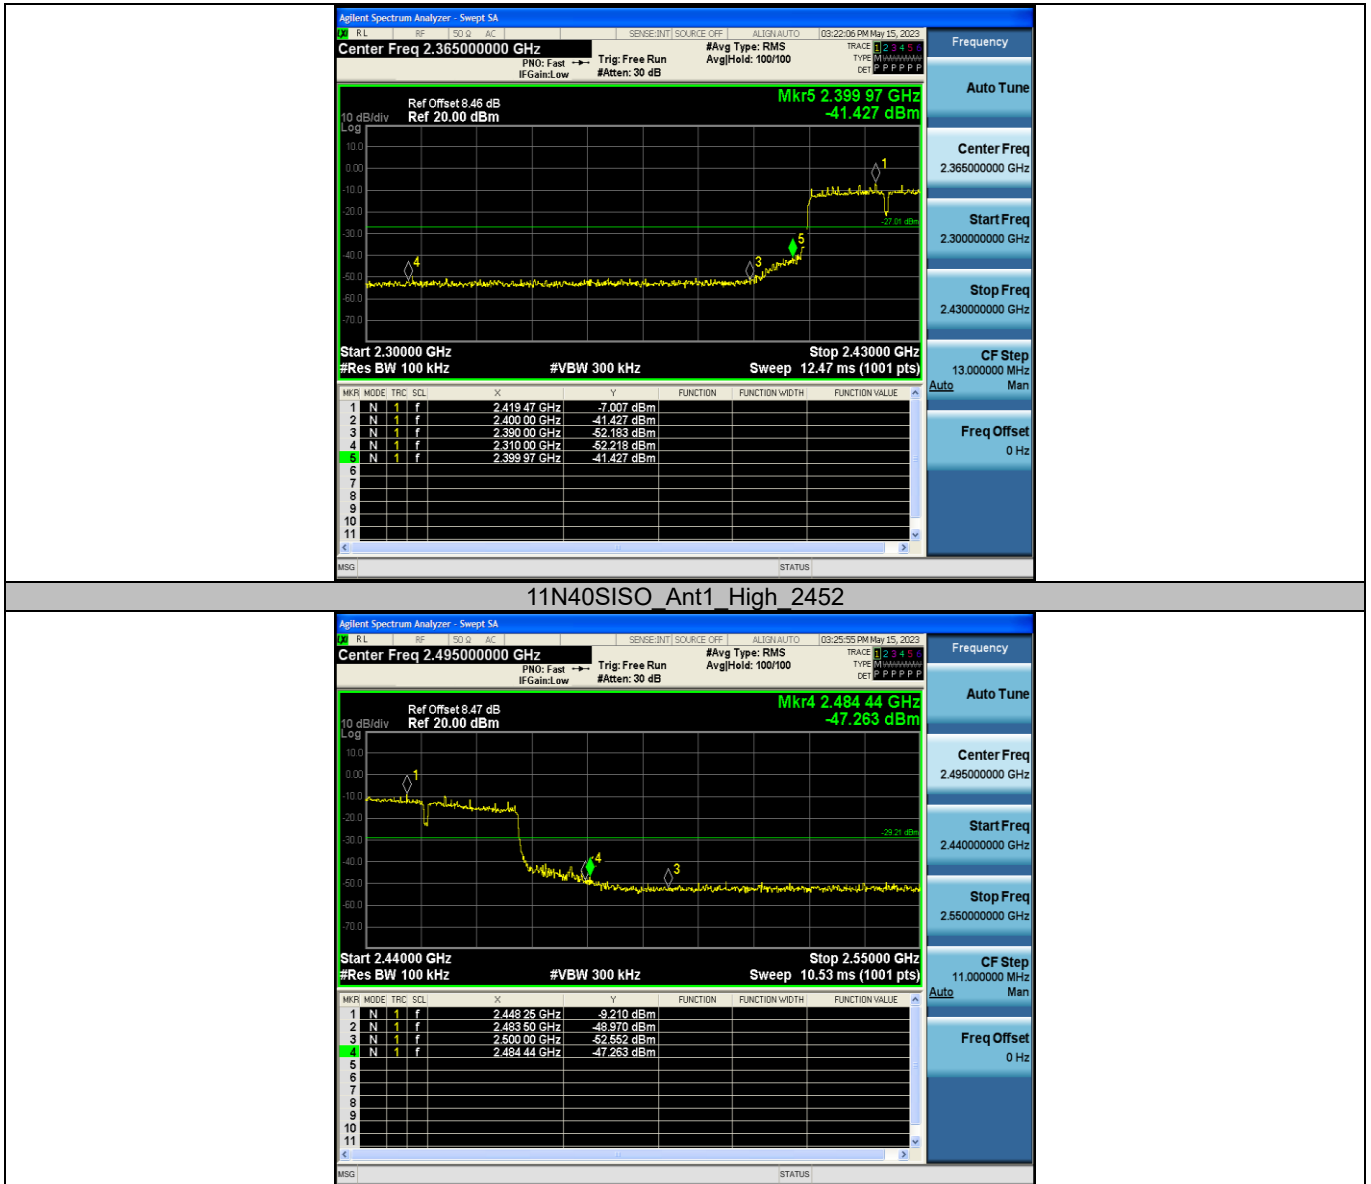


Appendix E: Conducted Spurious Emission

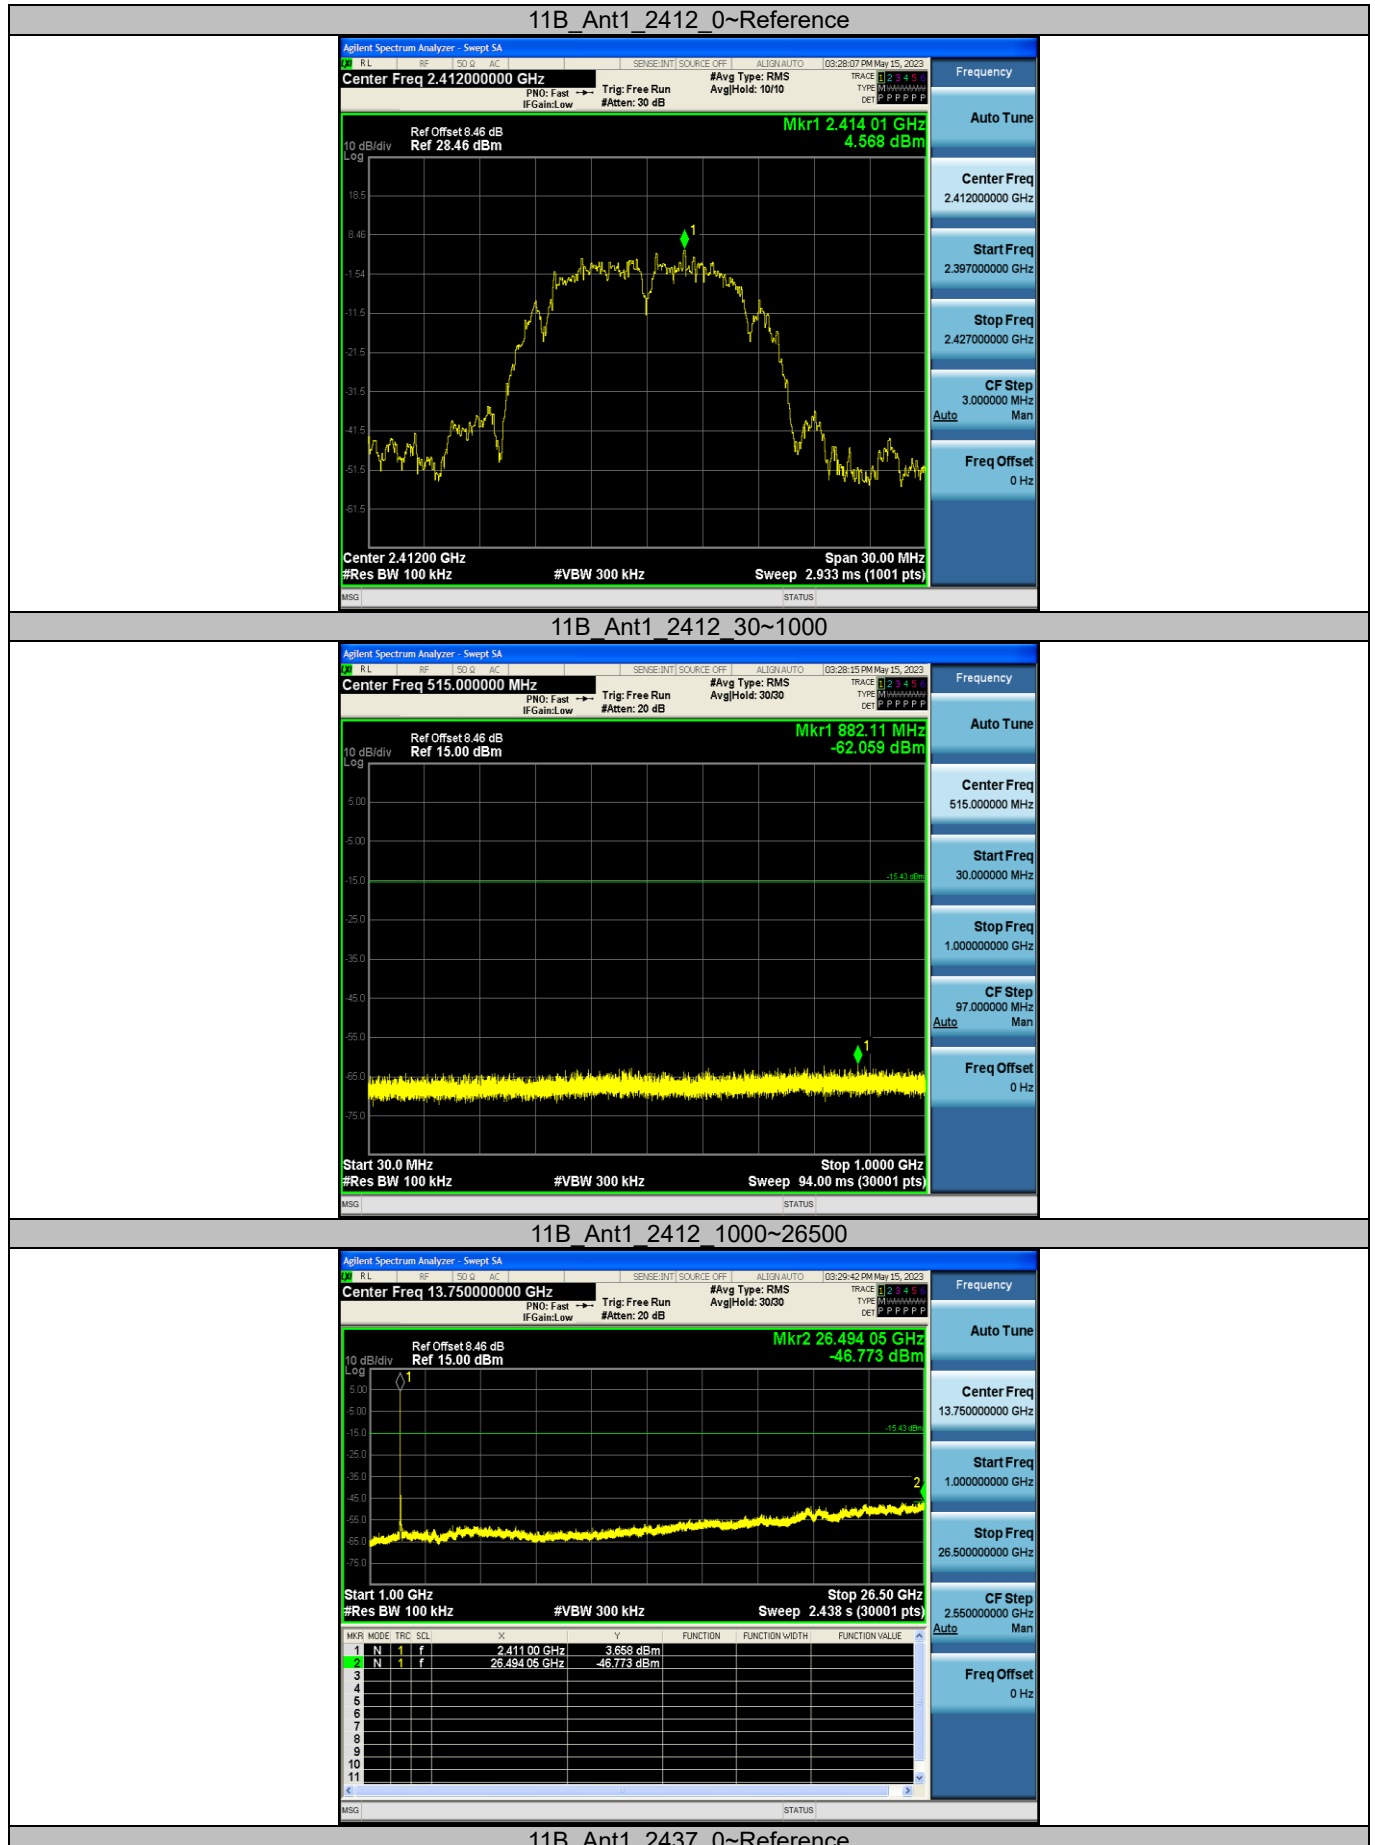

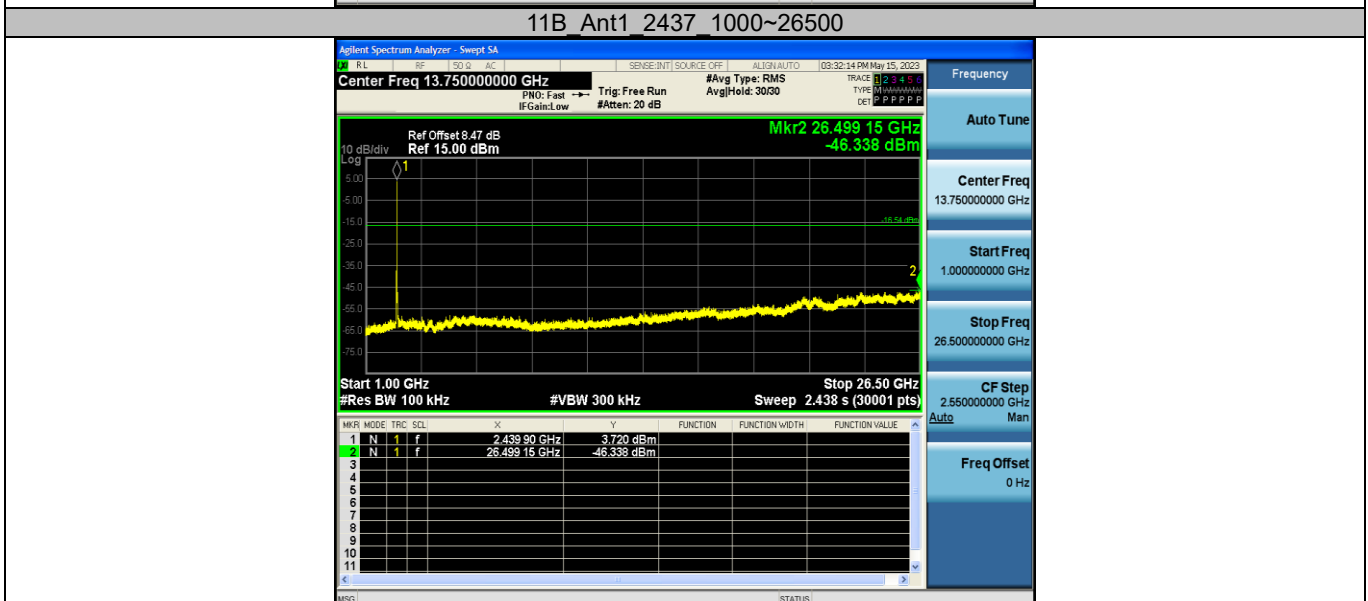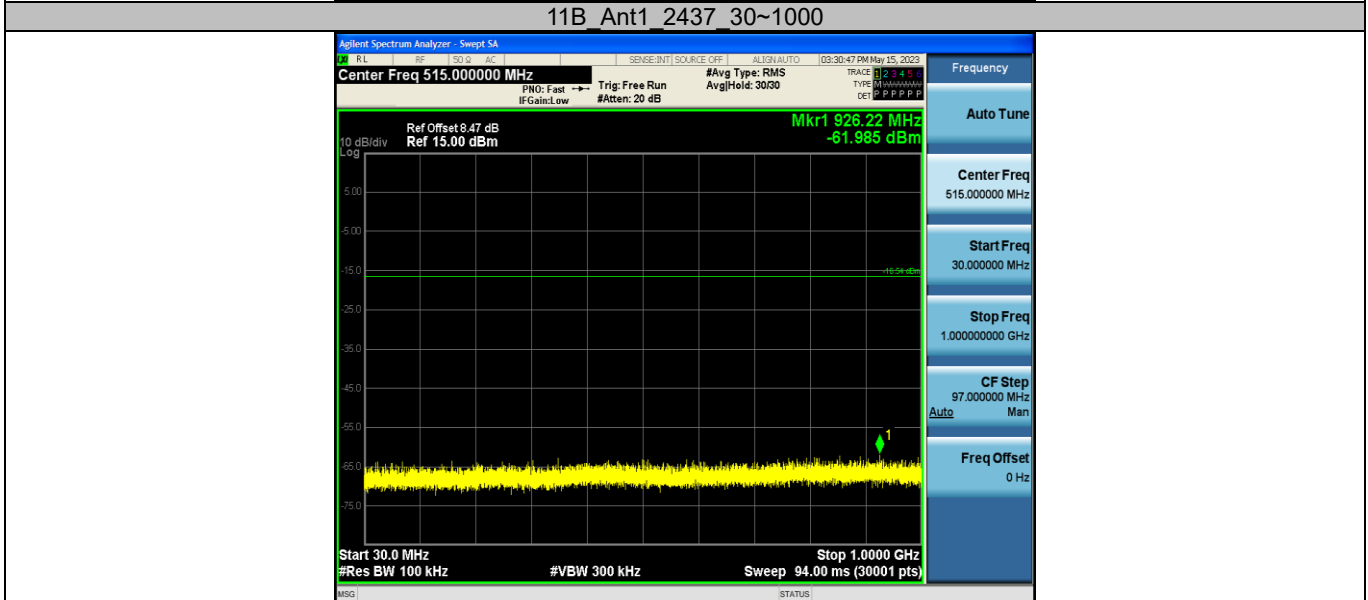





11B Ant1 2462 30~1000

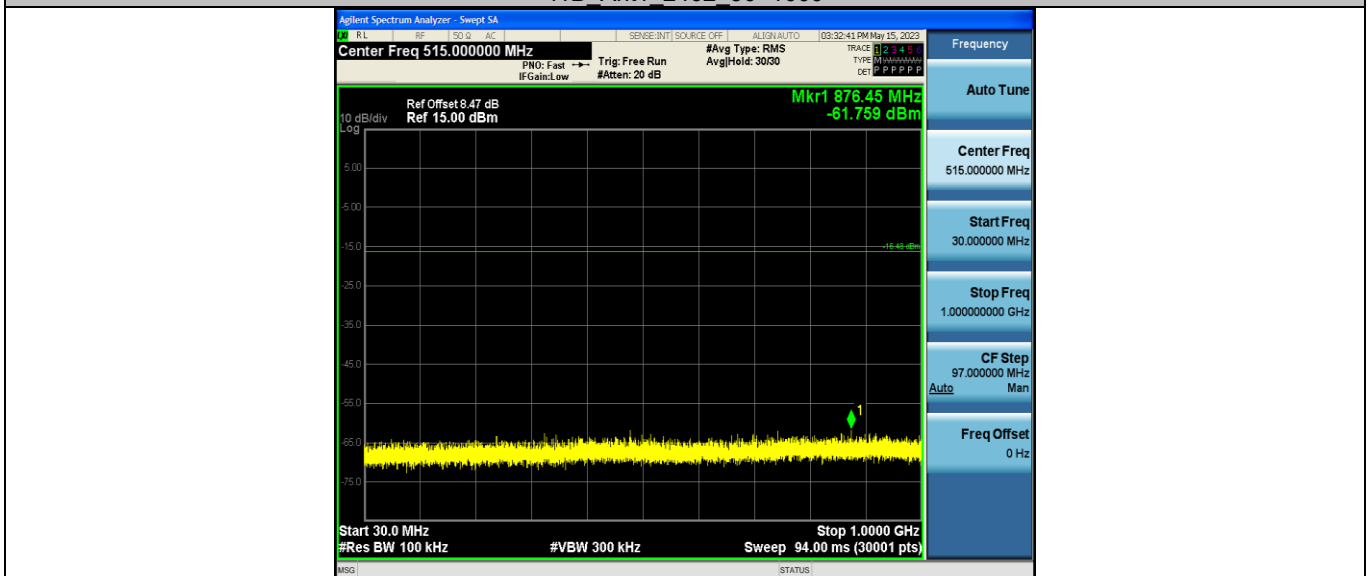


11B Ant1 2462 1000~26500

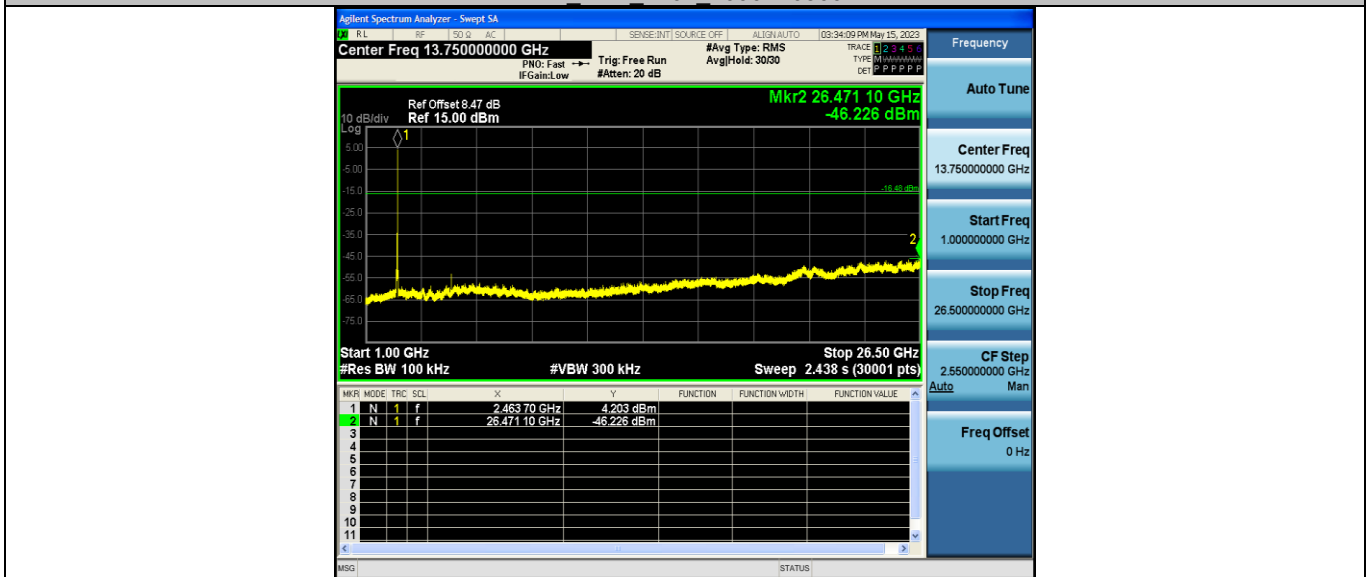


11G Ant1 2412 0~Reference

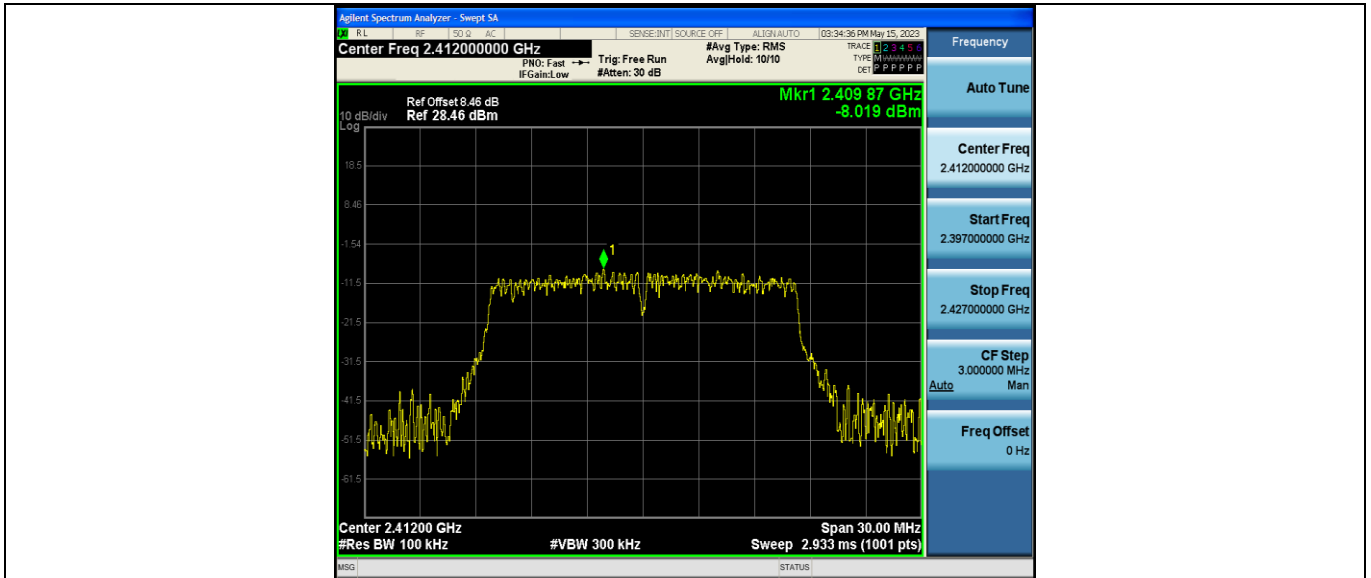


11G Ant1 2412 30~1000

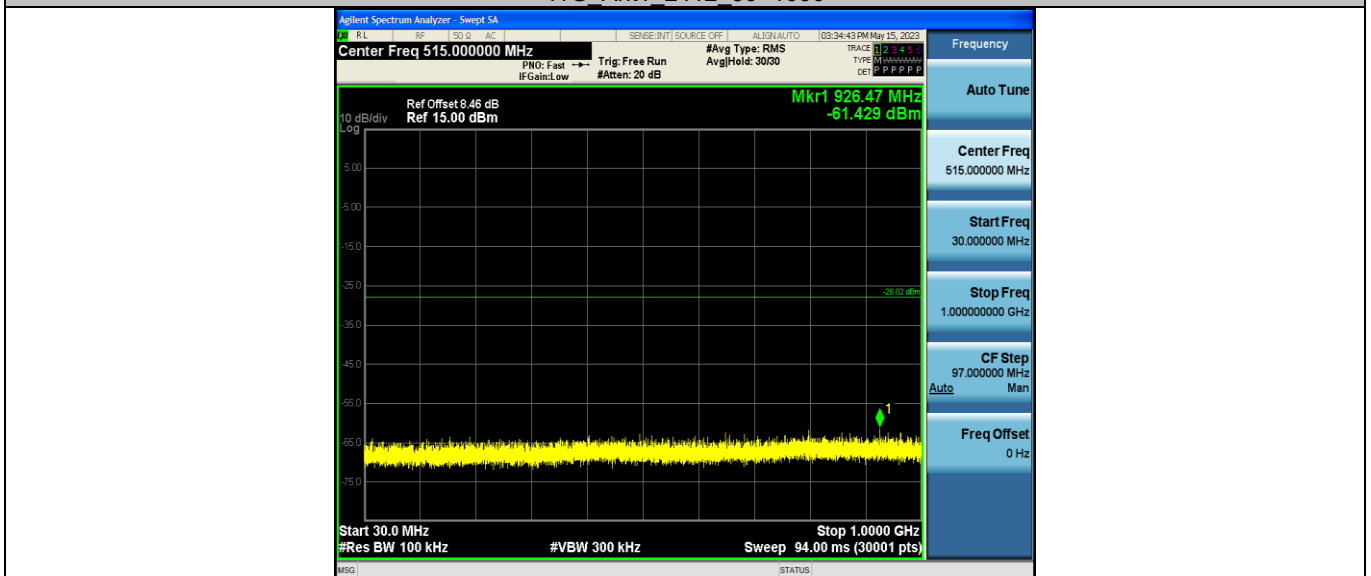


11G Ant1 2412 1000~26500

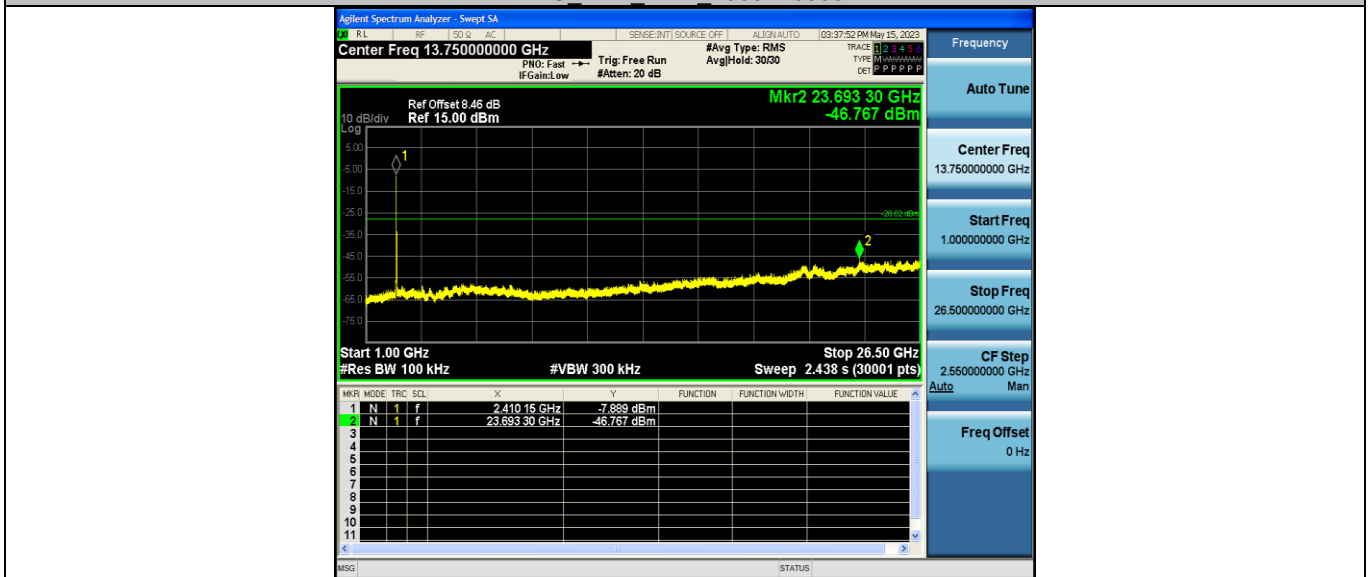


11G Ant1 2437 0~Reference

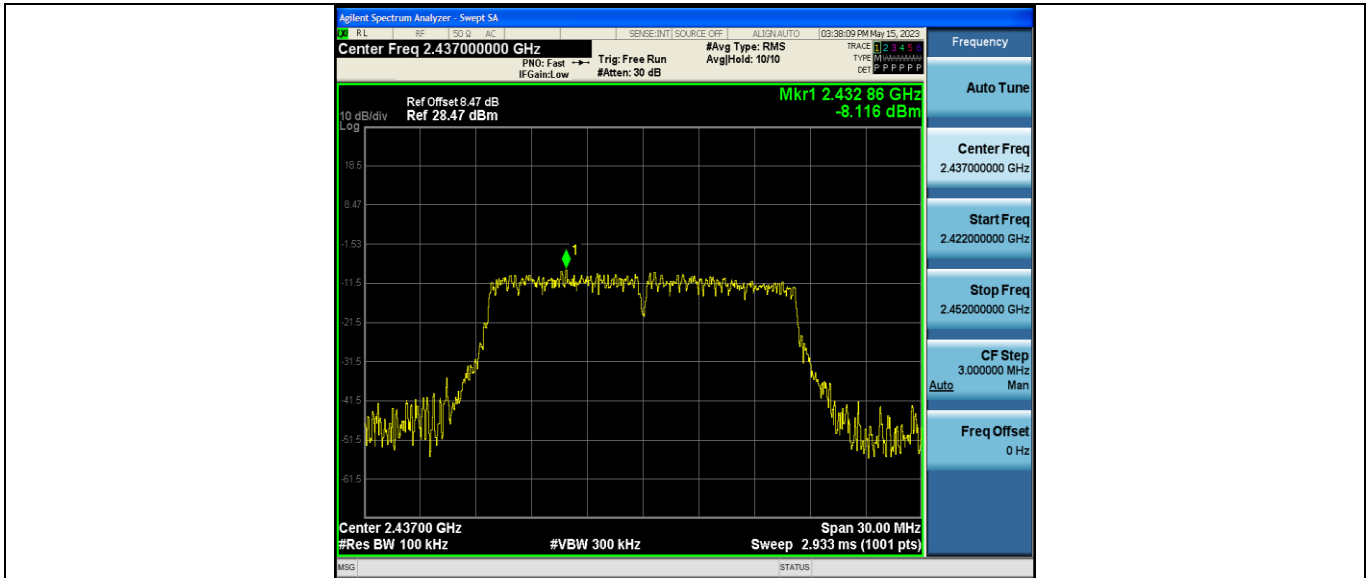


11G Ant1 2437 30~1000

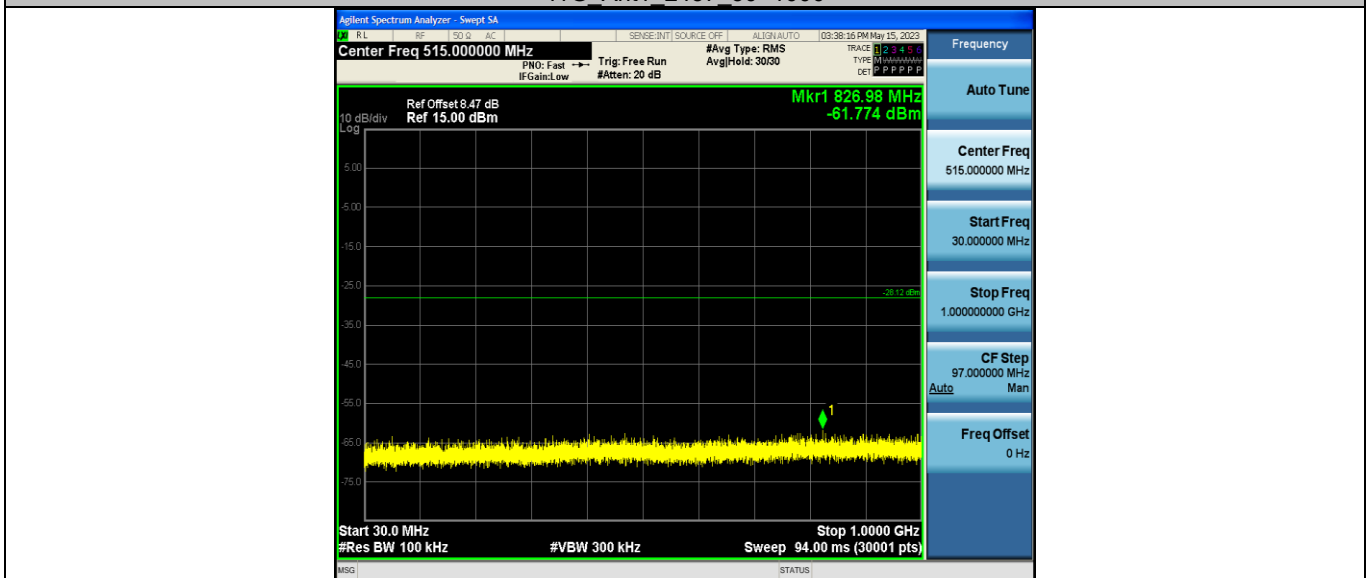


11G Ant1 2437 1000~26500

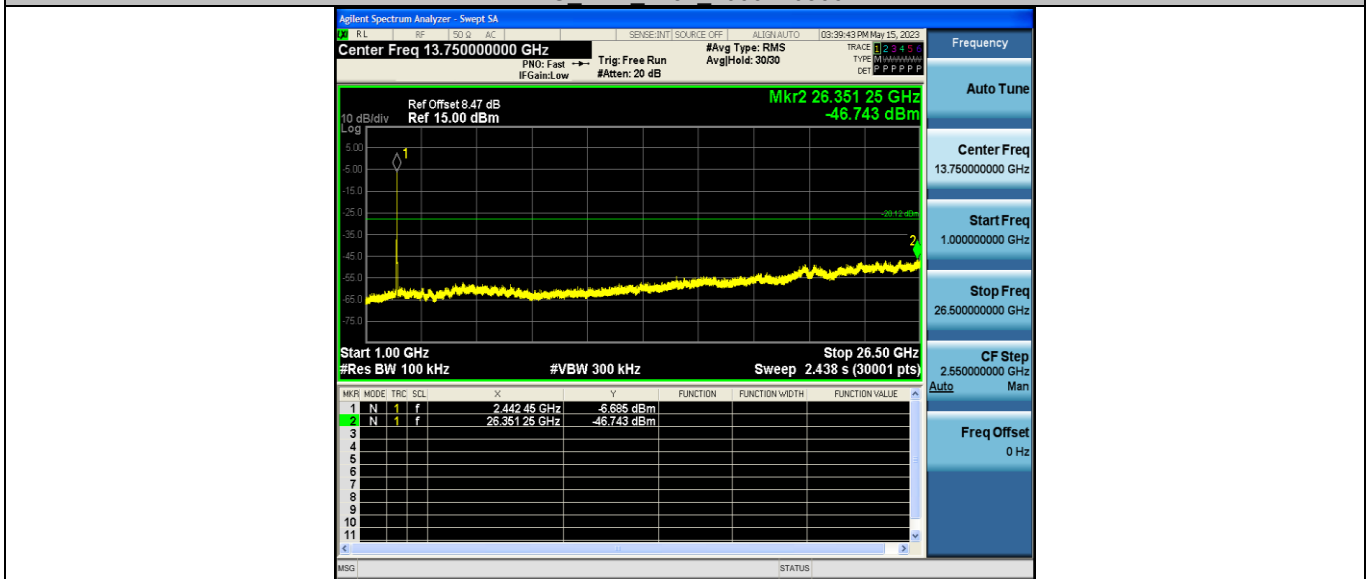


11G Ant1 2462 0~Reference

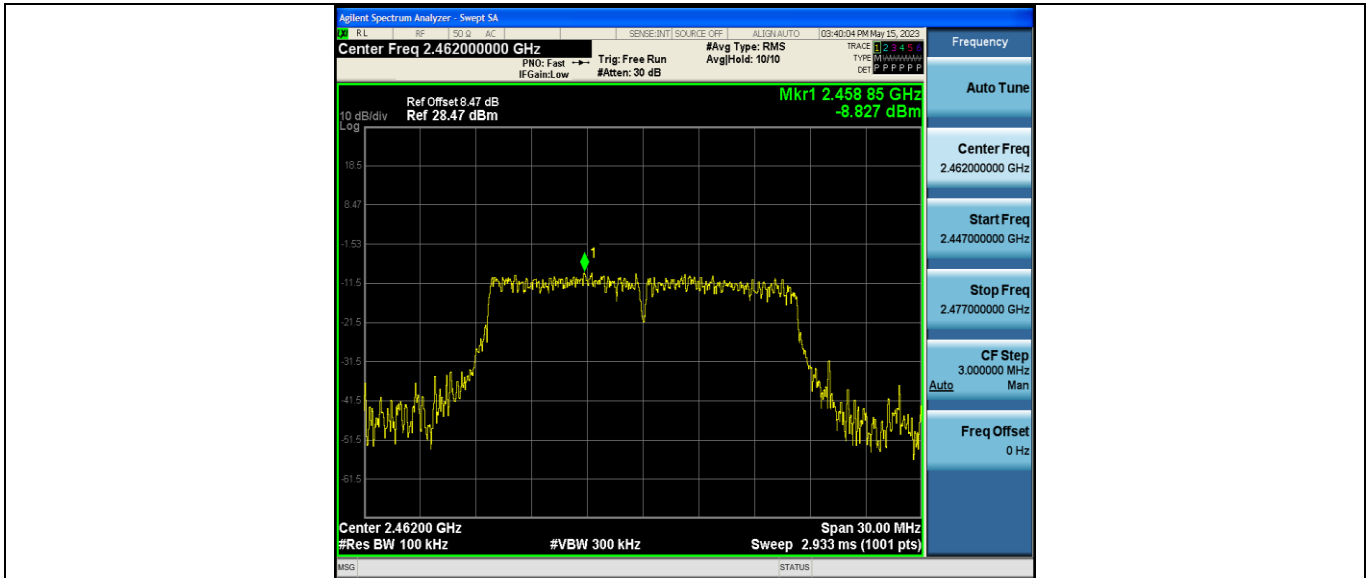

11G Ant1_2462_30~1000

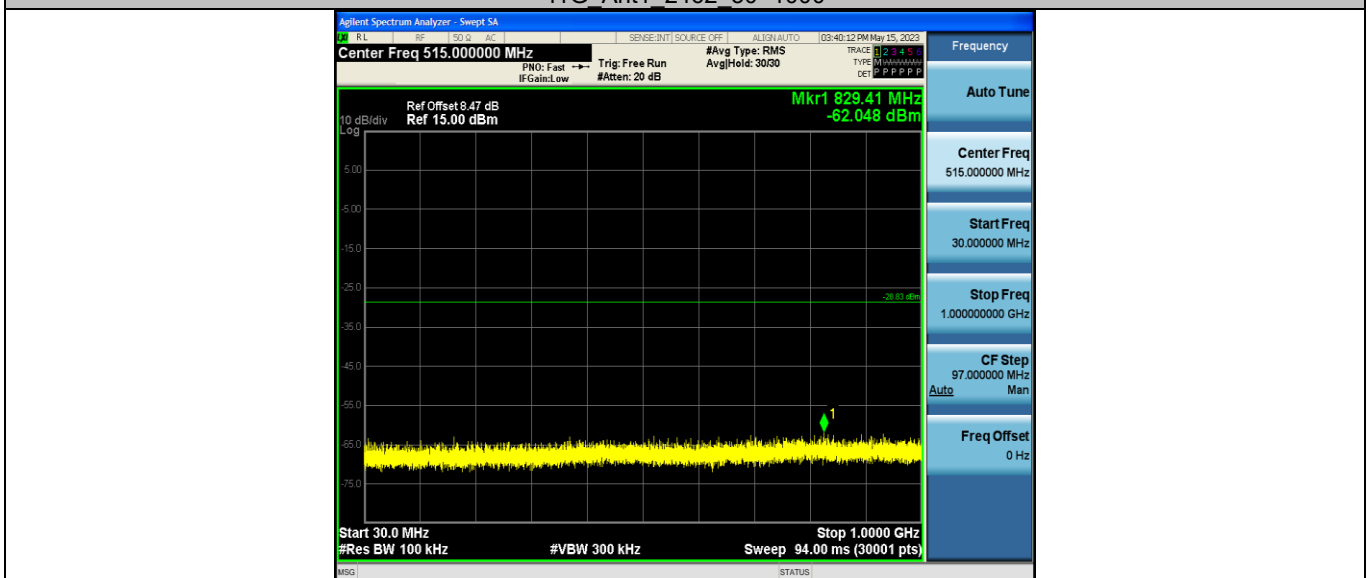


11G Ant1_2462_1000~26500

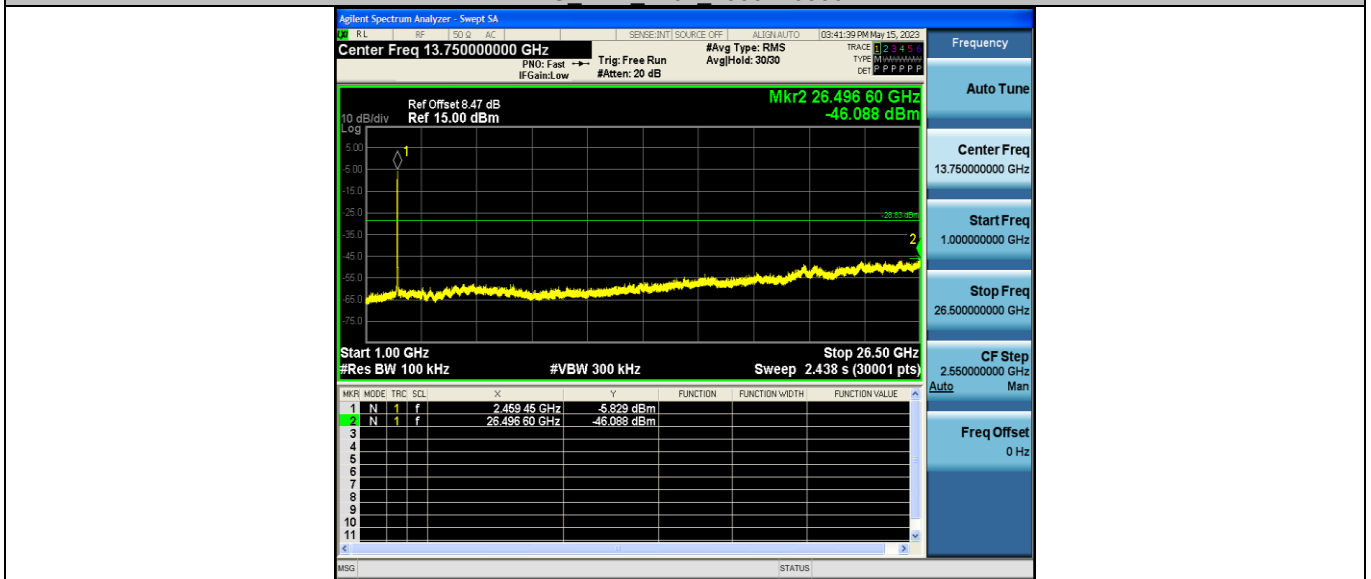


11N20SISO Ant1_2412_0~Reference



11N20SISO Ant1 2412 30~1000

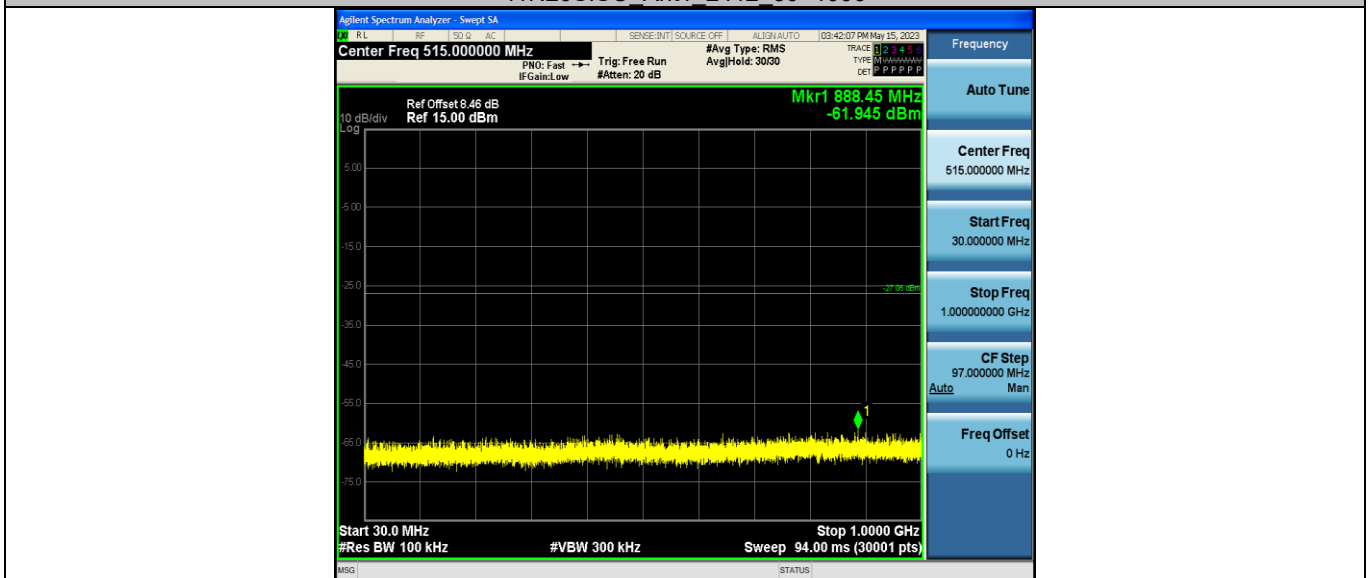


11N20SISO Ant1 2412 1000~26500

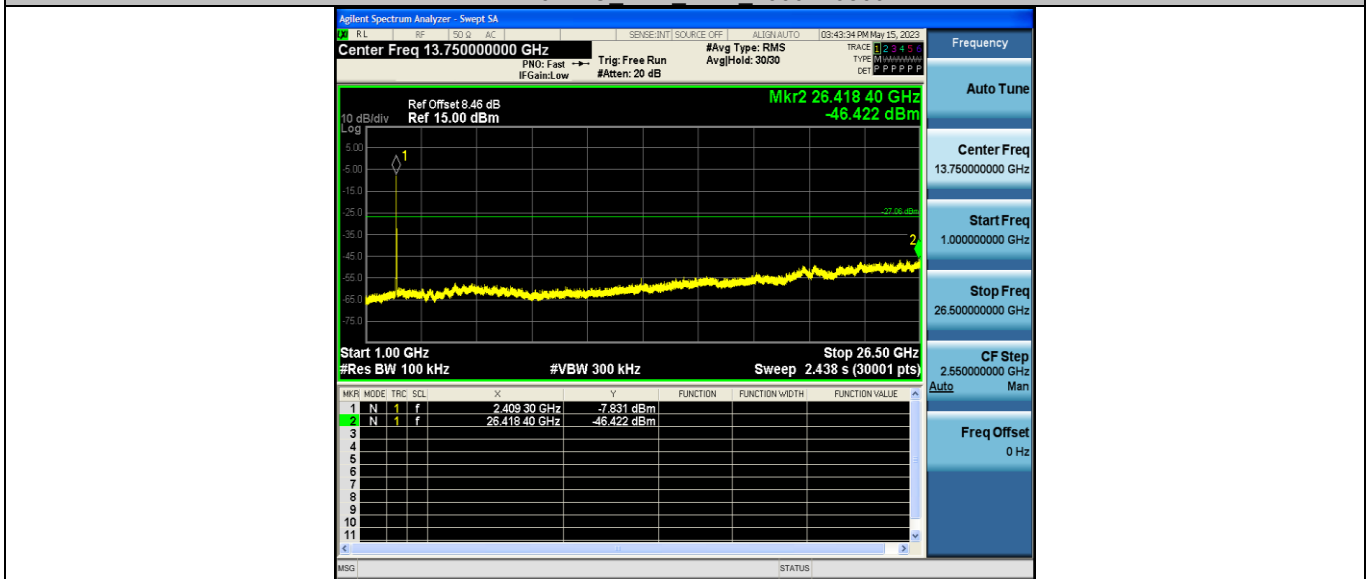


11N20SISO Ant1 2437 0~Reference




11N20SISO Ant1 2437 30~1000

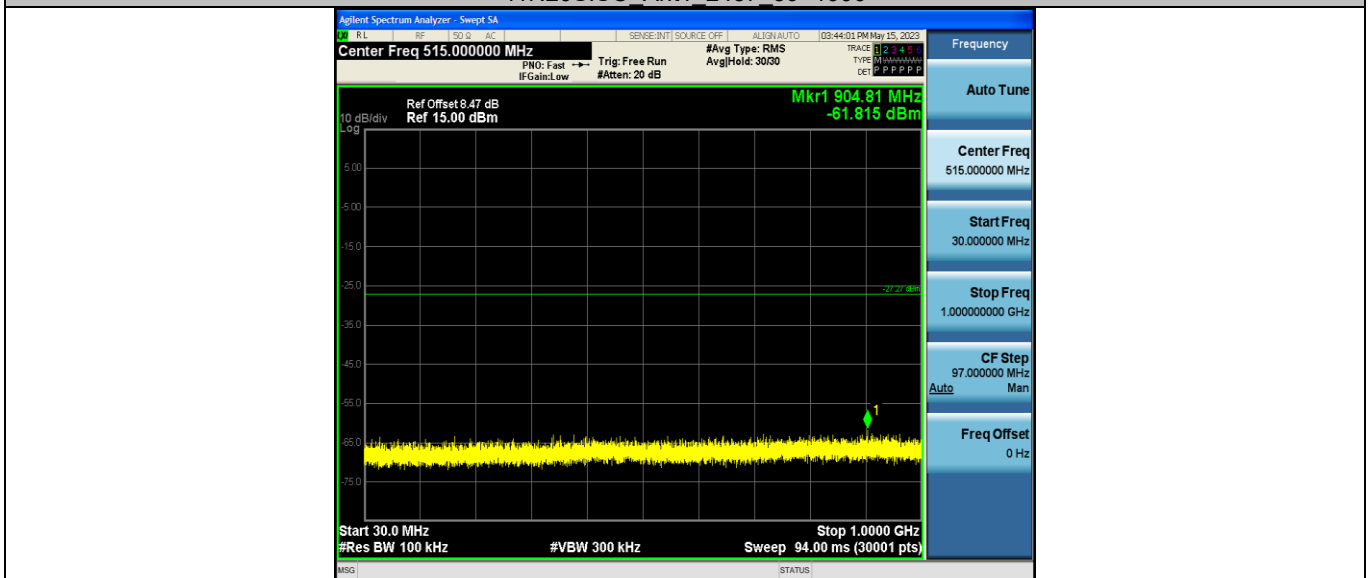


11N20SISO Ant1 2437 1000~26500

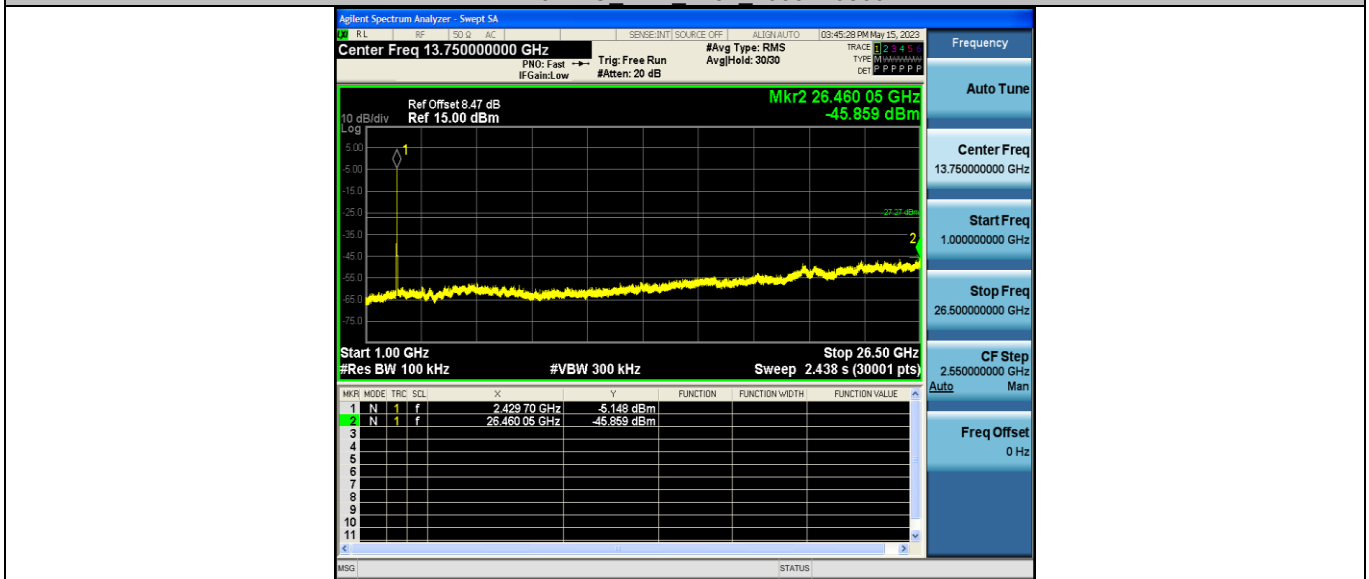


11N20SISO Ant1 2462 0~Reference

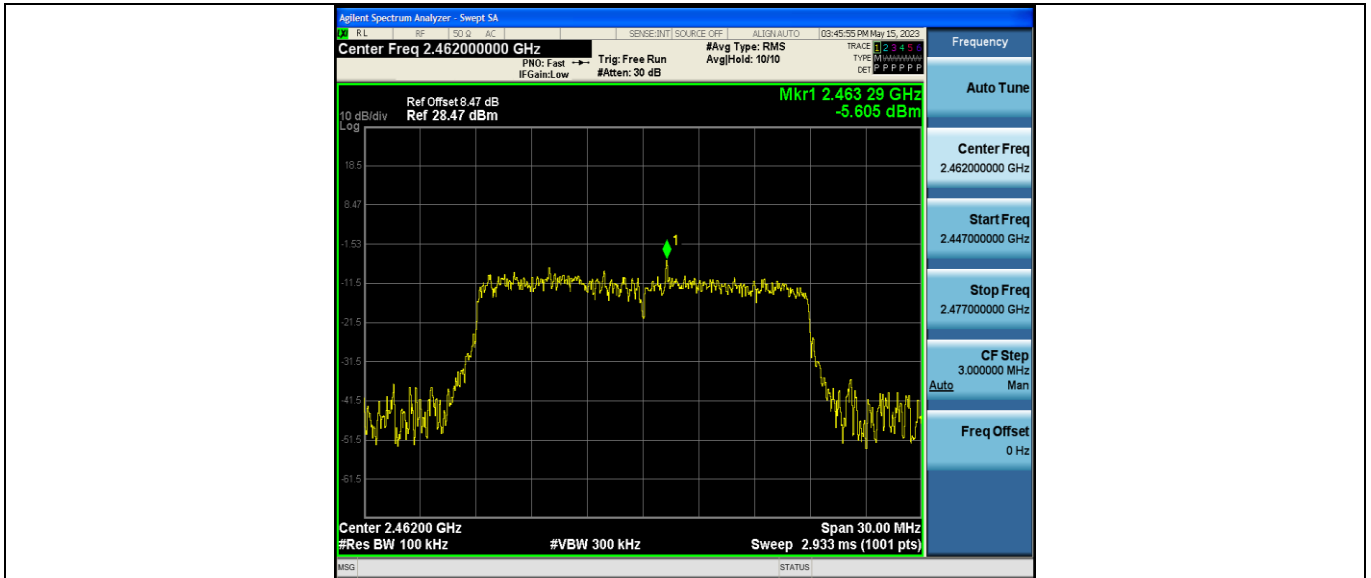

11N20SISO Ant1 2462 30~1000

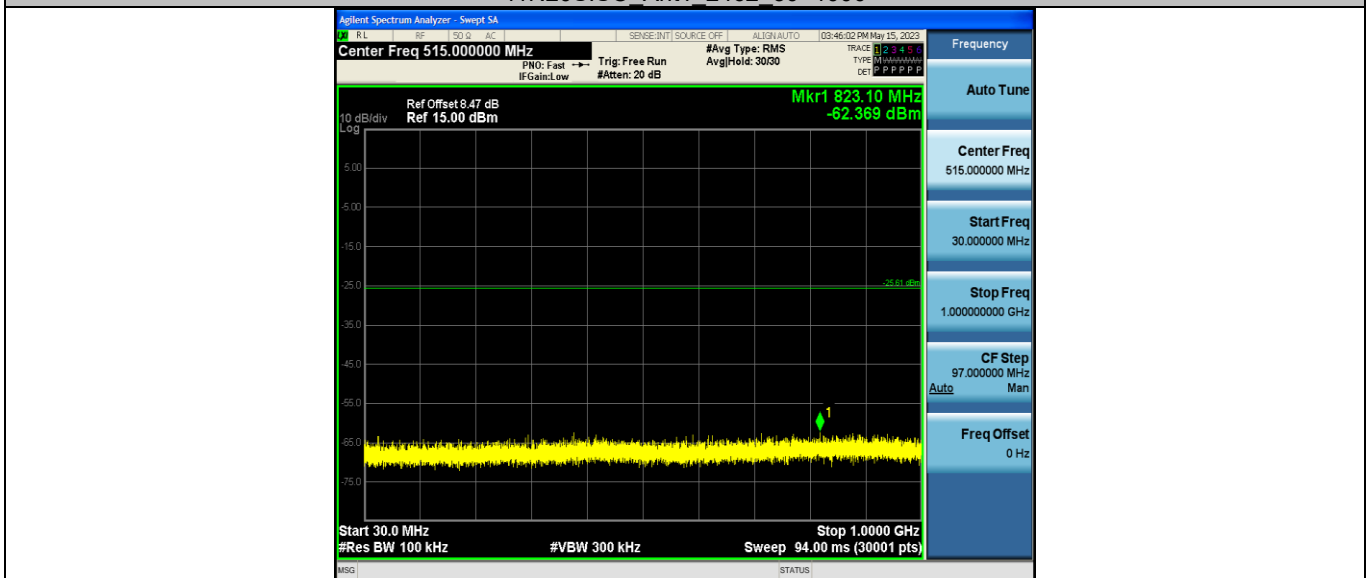


11N20SISO Ant1 2462 1000~26500

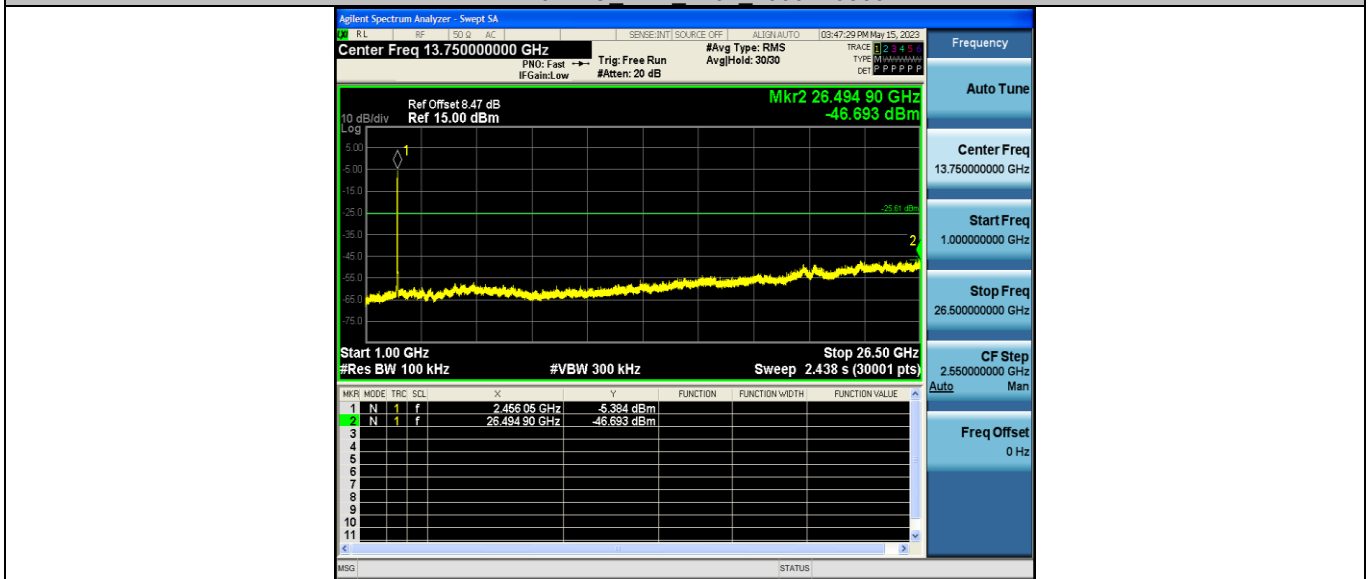


11N40SISO Ant1 2422 0~Reference




11N40SISO Ant1 2422 30~1000

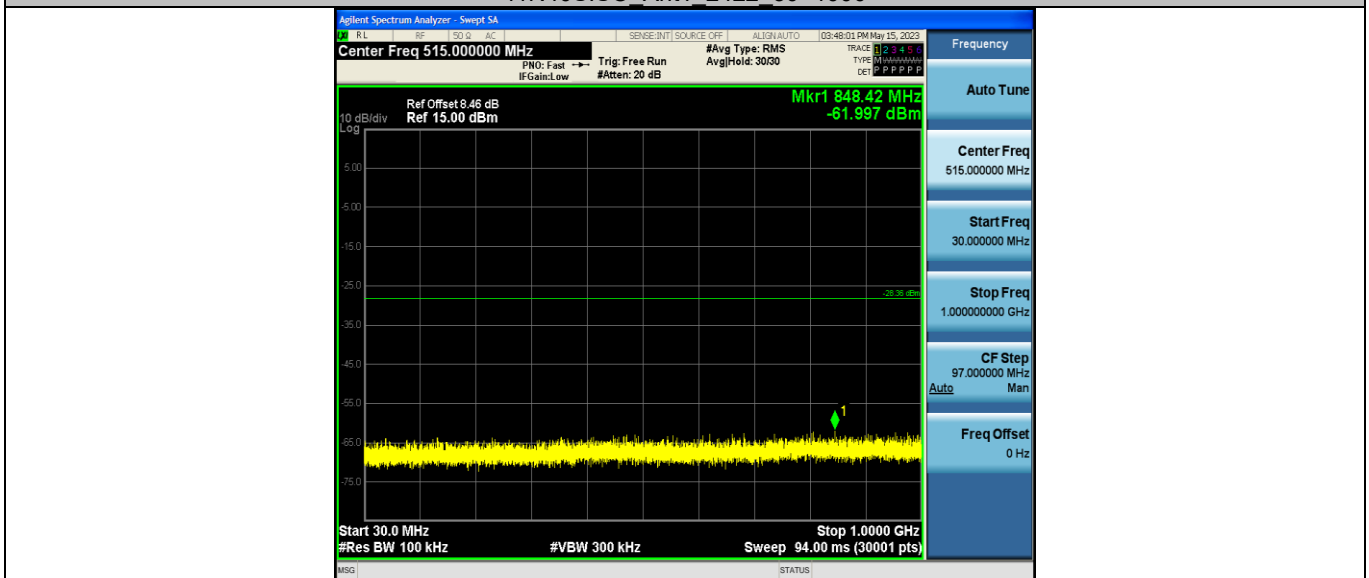


11N40SISO Ant1 2422 1000~26500

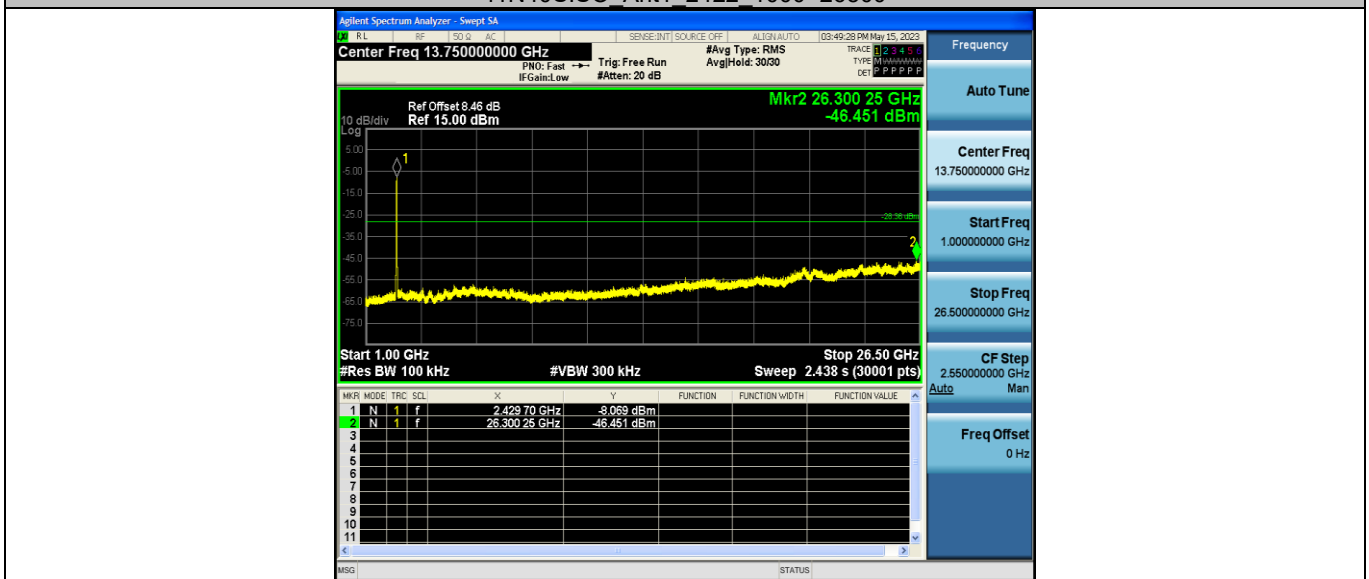


11N40SISO Ant1 2437 0~Reference

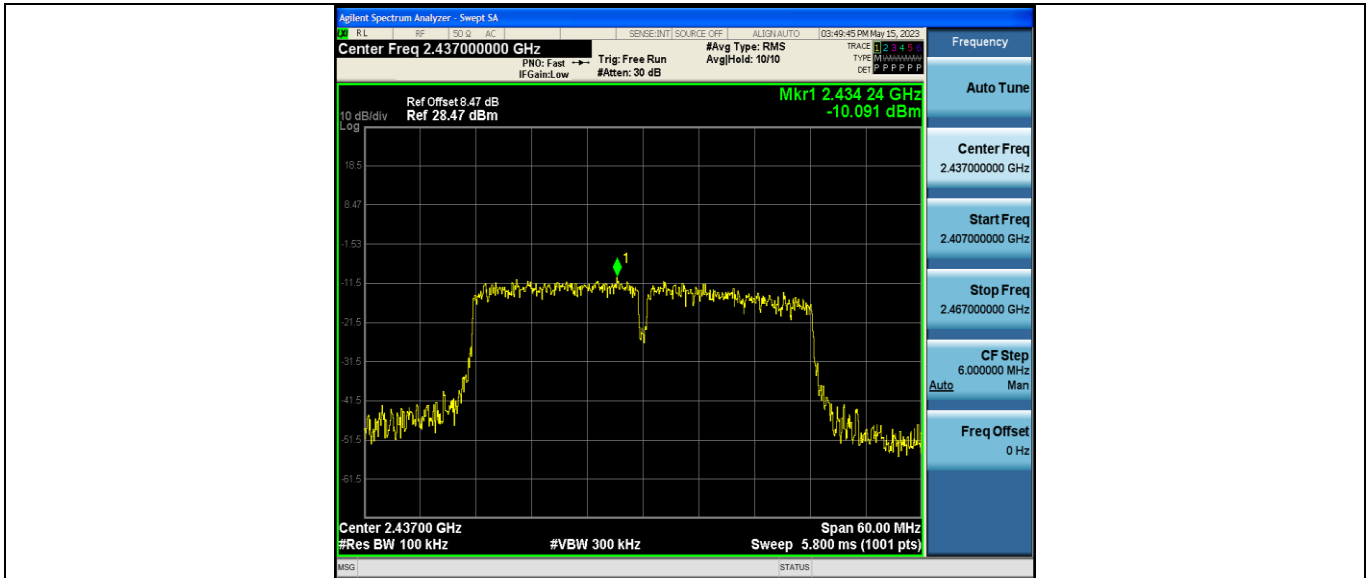


11N40SISO Ant1 2437 30~1000

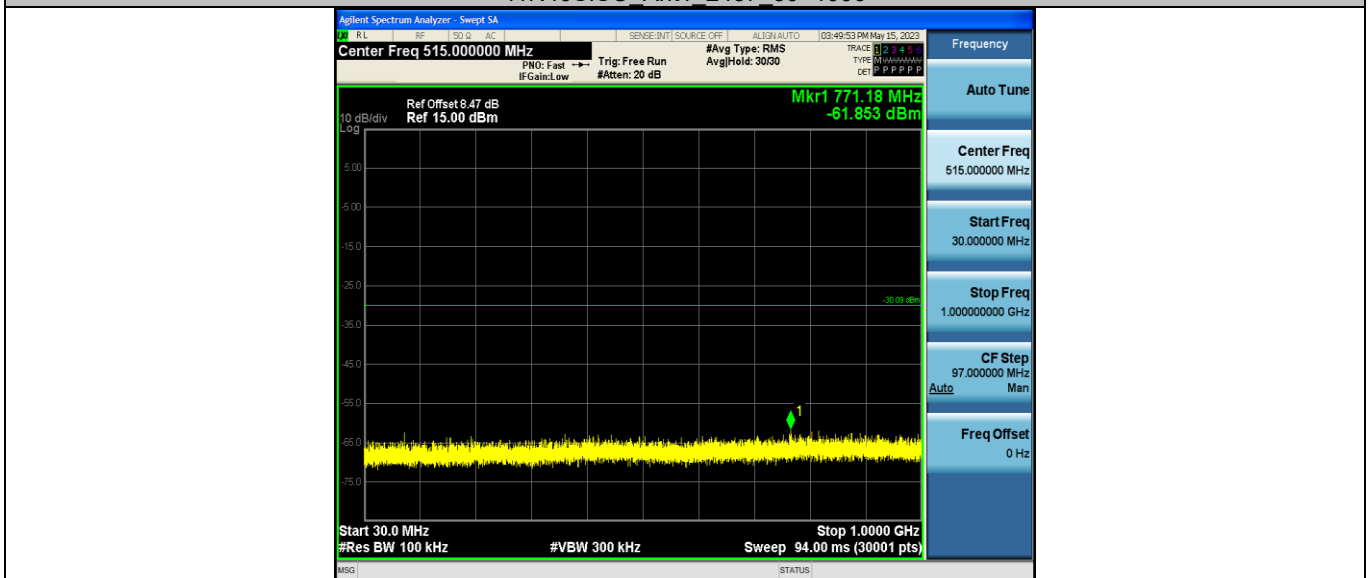

11N40SISO Ant1 2437 1000~26500

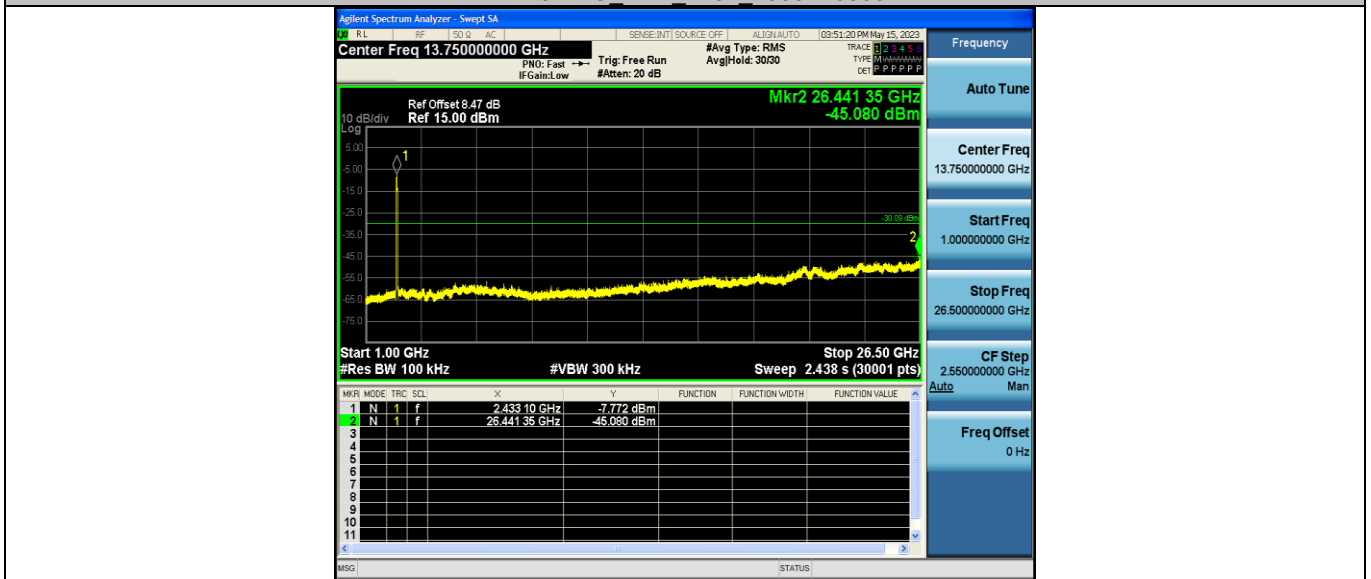

11N40SISO Ant1 2452 0~Reference

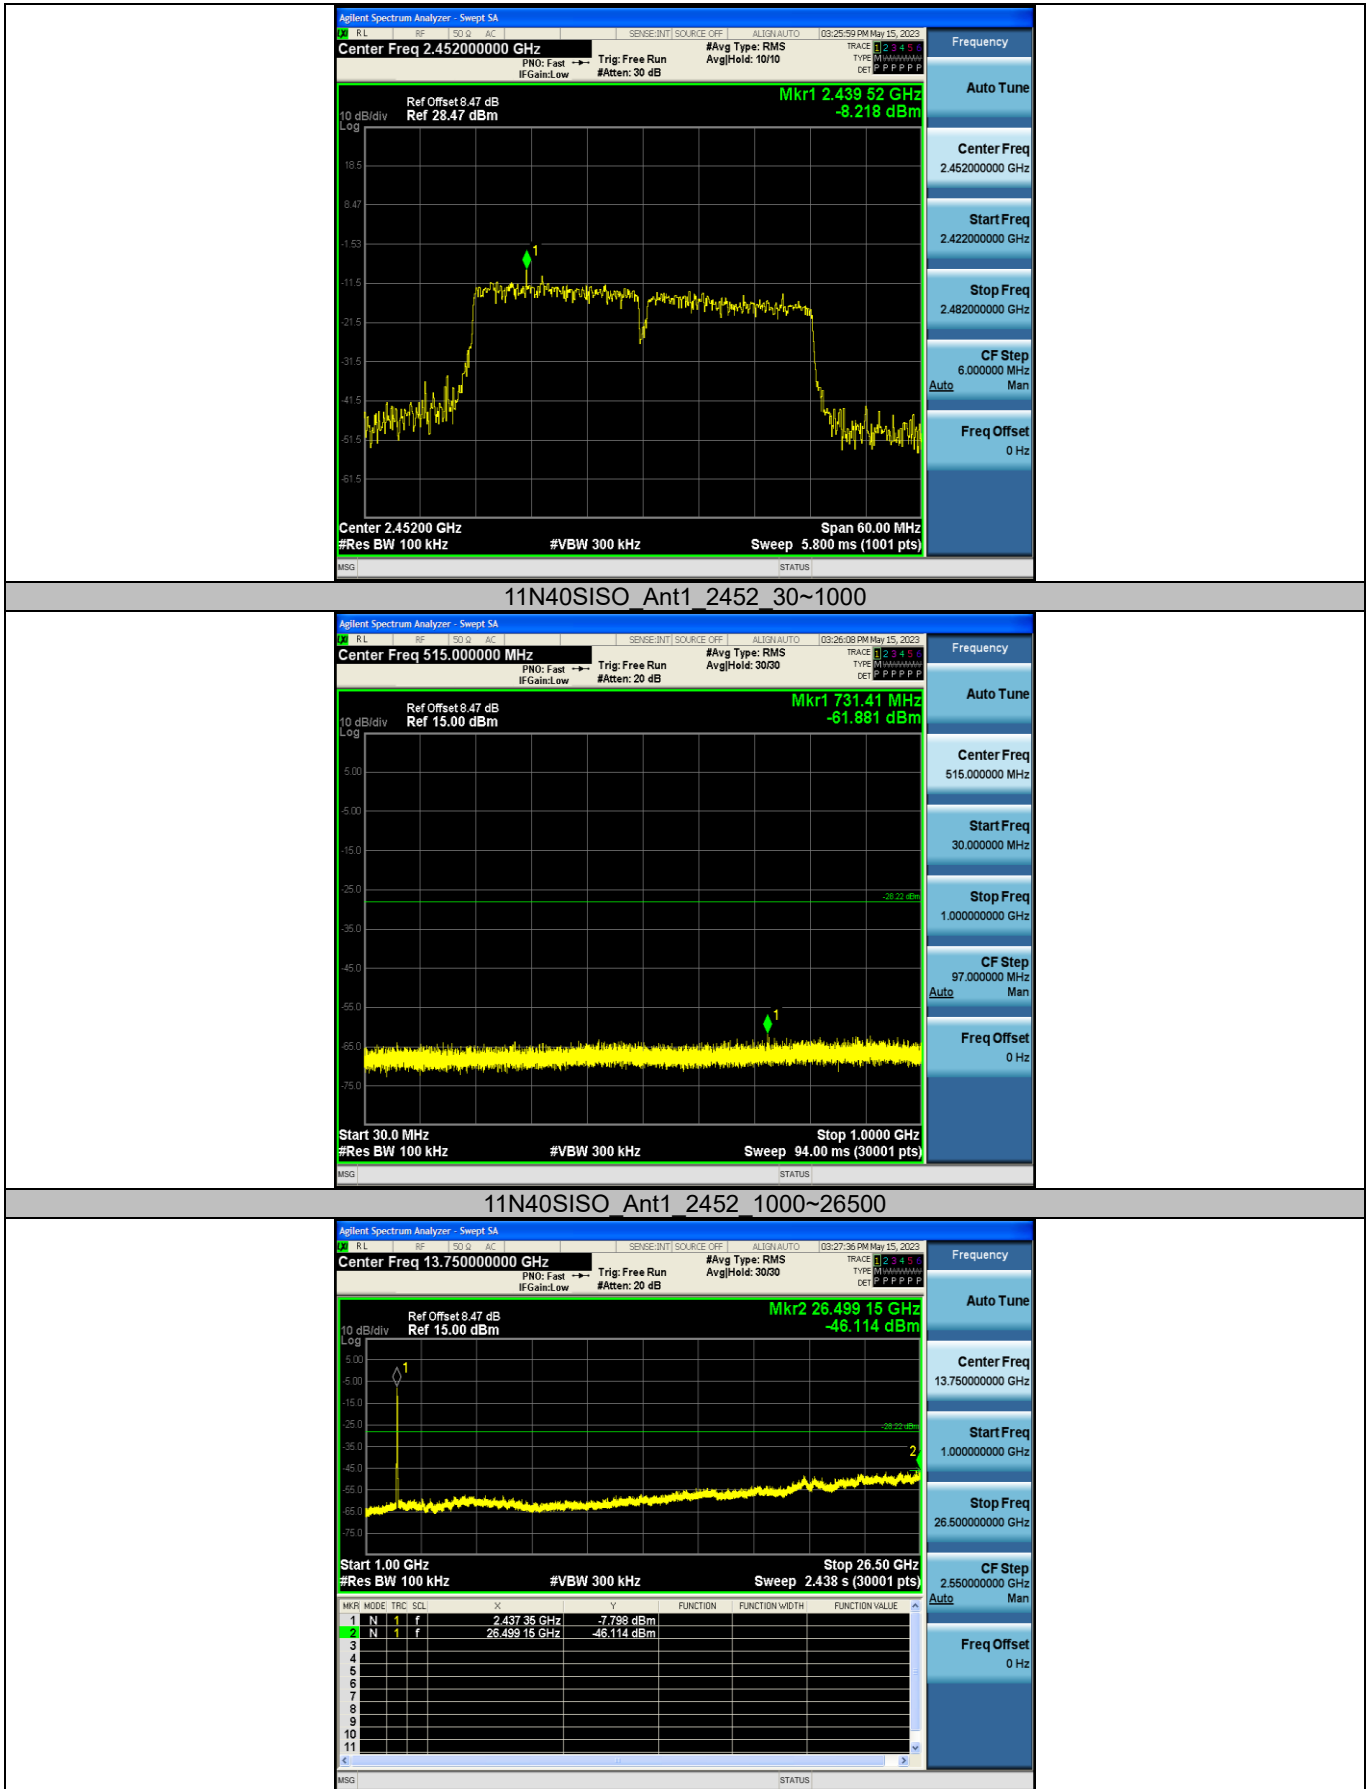

Appendix F: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2437	20.03	20.39	98.23	0.08
11G	Ant1	2437	3.33	3.63	91.74	0.37
11N20SISO	Ant1	2437	2.78	3.12	89.10	0.50
11N40SISO	Ant1	2437	1.36	1.73	78.61	1.05


Notes:

Duty Cycle [%] = Transmission Duration [ms] / Transmission Period [ms] * 100

Factor = 10 * log (Duty Cycle)

Test Graphs

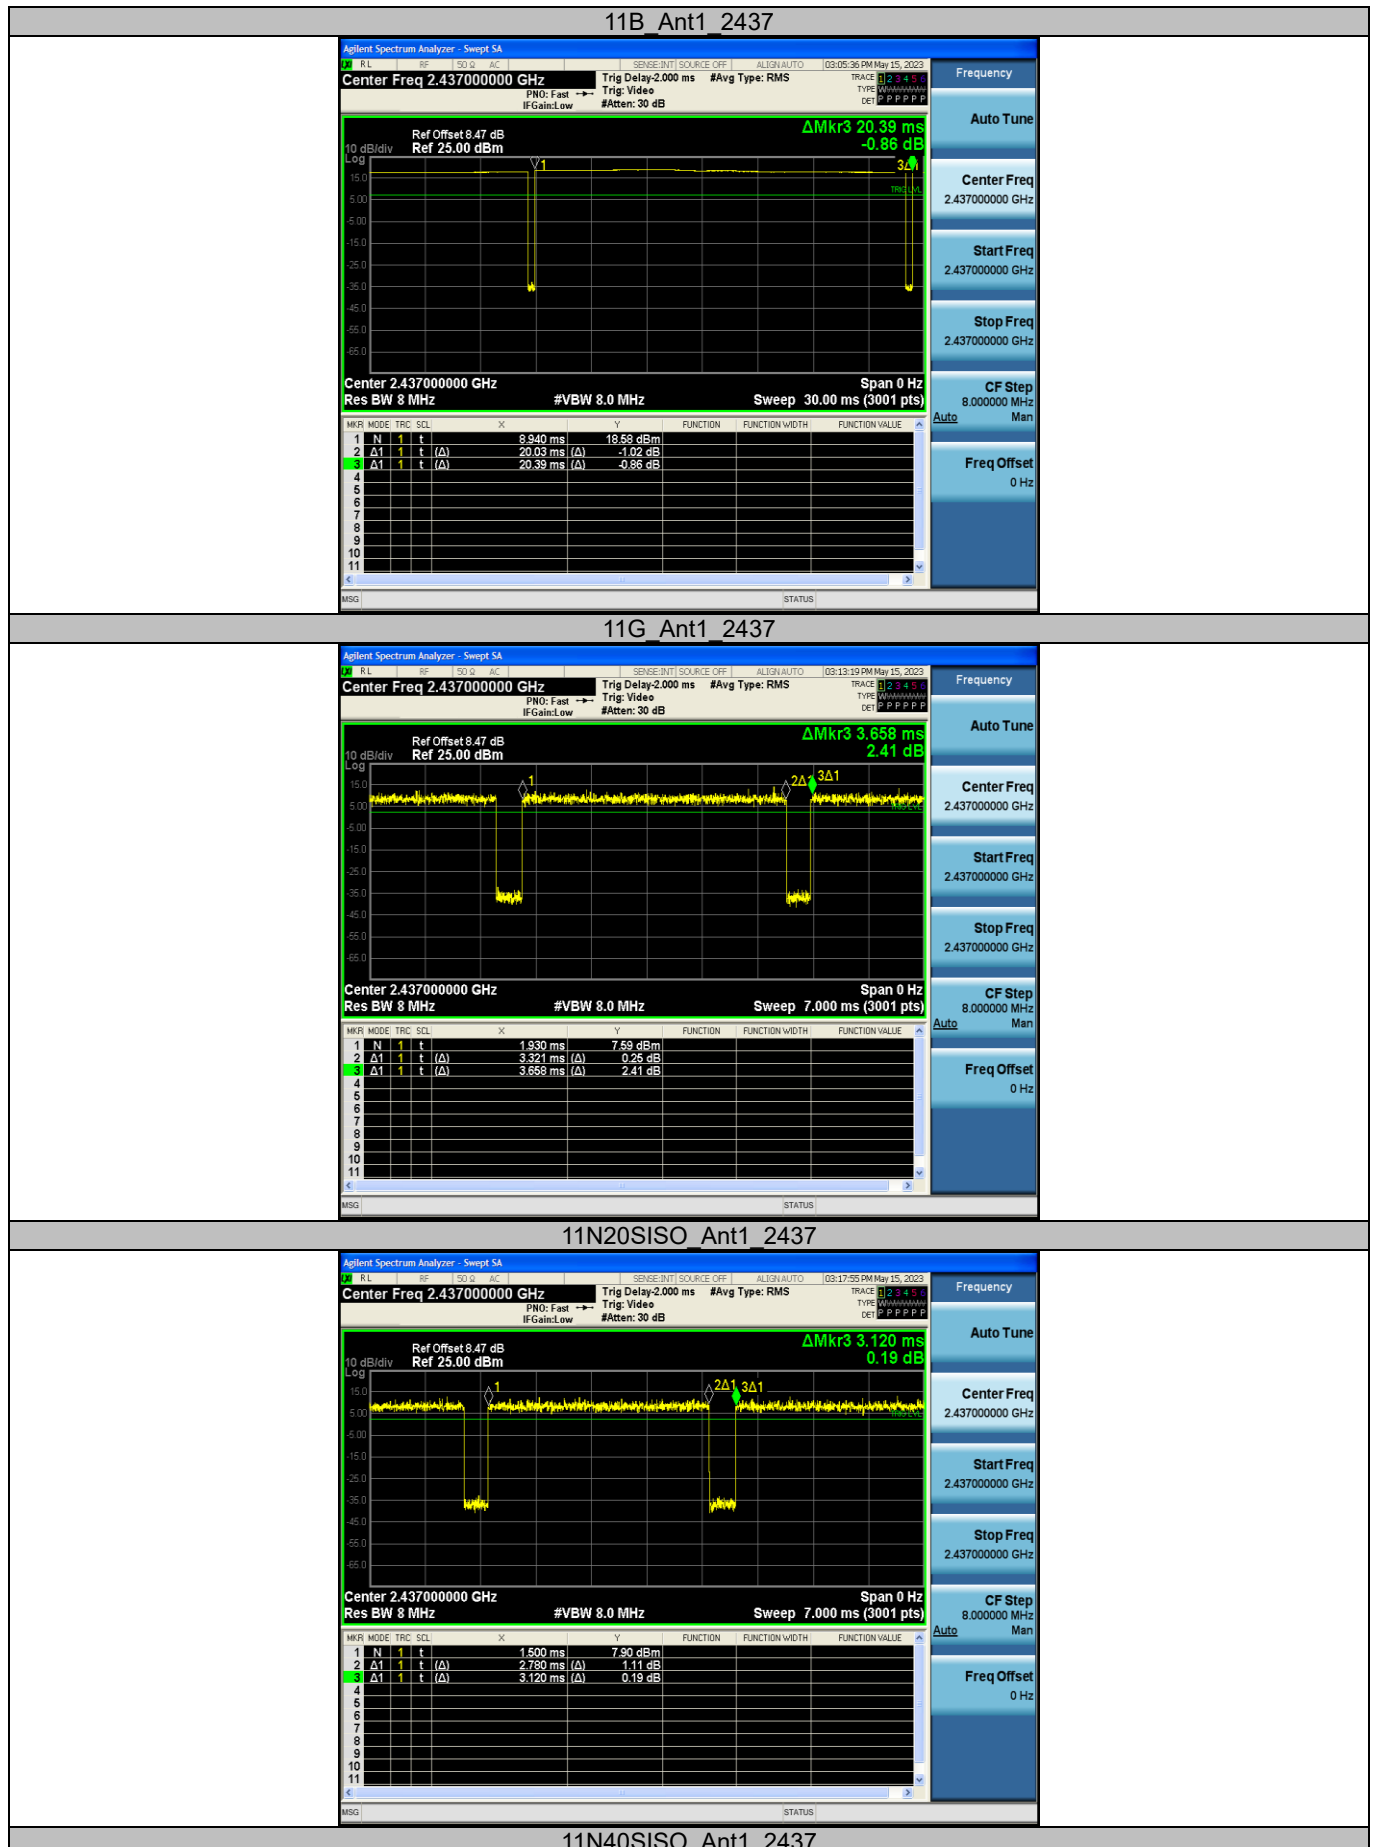

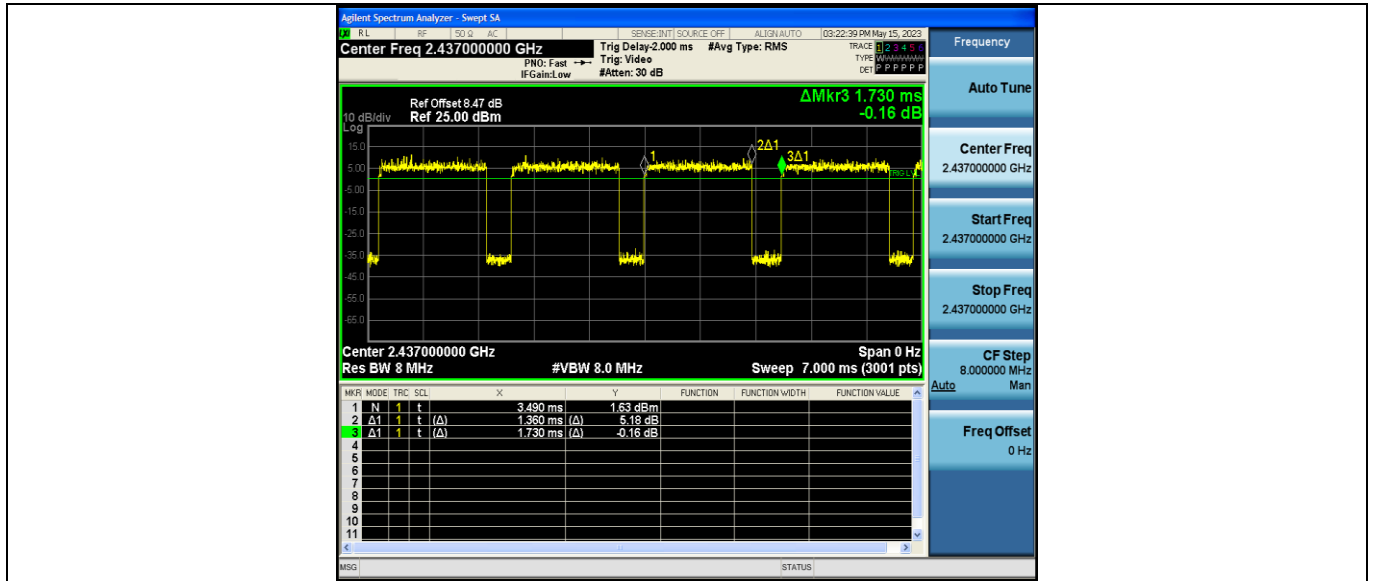

Photographs of the Test Setup

See the Appendix – Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----