

FCC Part 15C Measurement and Test Report

For

Guangzhou Shangke Information Technology Co., LTD

A1, E1, C2 Room, 17/F No. 689, GuangDa Bank Bldg. North-Tianhe

Road, Tianhe District, Guangzhou, China

FCC ID: 2ACGTX5PRO

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Tablet PC</u>
Tested Model:	<u>X5 Pro</u>
Report No.:	<u>STR17038044I-1</u>
Tested Date:	<u>2017-03-22 to 2017-04-10</u>
Issued Date:	<u>2017-04-11</u>
Tested By:	<u>Leo Lee / Engineer</u> <i>Leo Lee</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 ENVIRONMENTAL CONDITIONS	11
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	25
6.1 STANDARD APPLICABLE	25
6.2 TEST PROCEDURE	25
6.3 ENVIRONMENTAL CONDITIONS	25
6.4 SUMMARY OF TEST RESULTS/PLOTS	25
7. RF OUTPUT POWER	39
7.1 STANDARD APPLICABLE	39
7.2 TEST PROCEDURE	39
7.3 ENVIRONMENTAL CONDITIONS	39
7.4 SUMMARY OF TEST RESULTS/PLOTS	40
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	53
8.1 STANDARD APPLICABLE	53
8.2 TEST PROCEDURE	53
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	54
8.4 ENVIRONMENTAL CONDITIONS	54
8.5 SUMMARY OF TEST RESULTS/PLOTS	55
9. OUT OF BAND EMISSIONS	69
9.1 STANDARD APPLICABLE	69
9.2 TEST PROCEDURE	69
9.3 ENVIRONMENTAL CONDITIONS	70
9.4 SUMMARY OF TEST RESULTS/PLOTS	70
10. CONDUCTED EMISSIONS	98
10.1 TEST PROCEDURE	98
10.2 BASIC TEST SETUP BLOCK DIAGRAM	98
10.3 ENVIRONMENTAL CONDITIONS	98
10.4 TEST RECEIVER SETUP	99
10.5 SUMMARY OF TEST RESULTS/PLOTS	99
10.6 CONDUCTED EMISSIONS TEST DATA	99

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Guangzhou Shangke Information Technology Co., LTD
 Address of applicant: A1, E1, C2 Room, 17/F No. 689, GuangDa Bank Bldg. North-Tianhe Road, Tianhe District, Guangzhou, China

Manufacturer: Guangzhou Shangke Information Technology Co., LTD
 Address of manufacturer: A1, E1, C2 Room, 17/F No. 689, GuangDa Bank Bldg. North-Tianhe Road, Tianhe District, Guangzhou, China

General Description of EUT	
Product Name:	Tablet PC
Trade Name:	TECLAST
Model No.:	X5 Pro
Adding Model(s):	Tbook10S, Tbook16 Power, Tbook12S, Tbook12 Plus, Tbook12 Power, Tbook16 Pro, Tbook14, Tbook14 Pro, Tbook14S, Tbook14 Power, Tbook14 Plus, Tbook15, Tbook15 Pro, Tbook15S, Tbook15 Power, Tbook15 Plus/98, P10, 10, X6, X6 Pro, X6 Plus, X7, X3 Plus, X3, P704G, P804G, P983G, P89H, T10, F5, F6S, F6, F6 Plus, F6 Pro, F6 Power, F6s Plus, F6s Pro, F6s Power, T8, T7, X3Pro, X3 Power, X10 Quad Core, 98 Octa Core, TLP98
Rated Voltage:	DC 7.6V by battery
Battery Capacity:	5000mAh
Power Adapter Model:	Model: TP-U55 Input: AC 100-240V, 50/60Hz; Output: DC 12V, 2.0A
Software Version:	/
Hardware Version:	S122Y REV: 1.1
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model X5 Pro, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	Antenna A: 9.64dBm (Conducted); Antenna B: 9.32dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	Antenna A: 1.56dBi Antenna B: 1.56dBi
Lowest Internal Frequency	32.768kHz

1.2 Test Standards

The following report is prepared on behalf of the Guangzhou Shangke Information Technology Co.,LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v04 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
U-Disk*3	Kingston	DT SE9H	/
Adapter	Handing Electronic	TP-U55	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
OTG cable(Micro USB)	0.06	Shielded	Without Core
OTG cable(Type-C)	0.10	Shielded	Without Core
HDMI cable	1.12	Shielded	Without Core

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
DC cable	0.45	Unshielded	Without Core
AC cable	1.42	Unshielded	Without Core

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots

Antenna A

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-22.30	8
	2437	-23.80	8
	2462	-24.46	8
802.11g	2412	-24.18	8
	2437	-24.63	8
	2462	-26.01	8
802.11n HT20	2412	-25.05	8
	2437	-25.27	8
	2462	-27.02	8
802.11n HT40	2422	-28.38	8
	2437	-29.07	8
	2452	-29.95	8


Antenna B

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-23.02	8
	2437	-23.86	8
	2462	-24.69	8
802.11g	2412	-24.63	8
	2437	-25.40	8
	2462	-26.23	8
802.11n HT20	2412	-24.83	8
	2437	-25.84	8
	2462	-26.72	8
802.11n HT40	2422	-29.03	8
	2437	-29.17	8
	2452	-29.67	8


Please refer to the following test plots:

Antenna A


802.11b-Low Channel

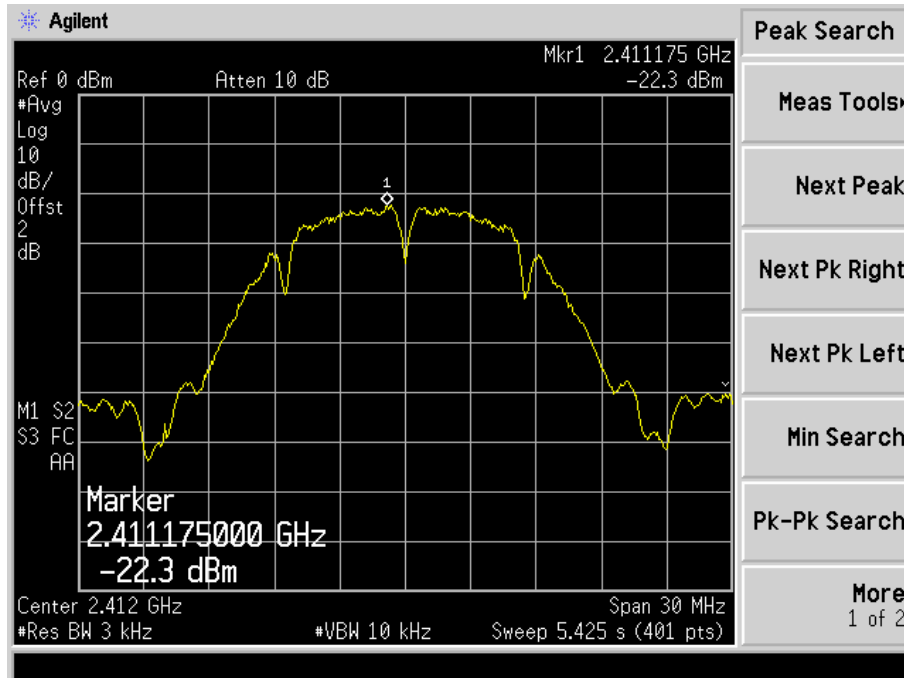


802.11b-Middle Channel

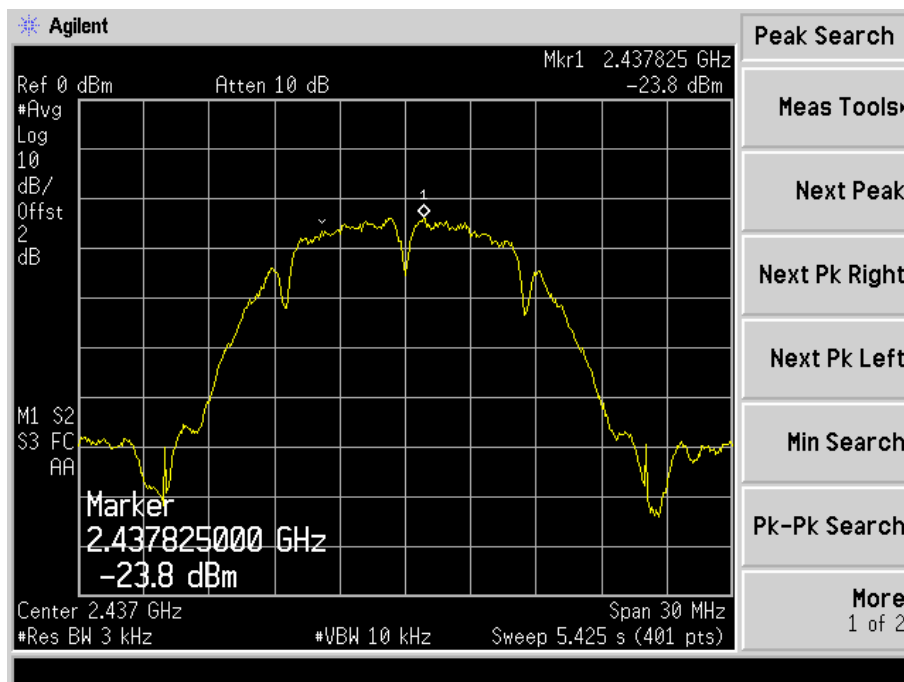


802.11b-High Channel

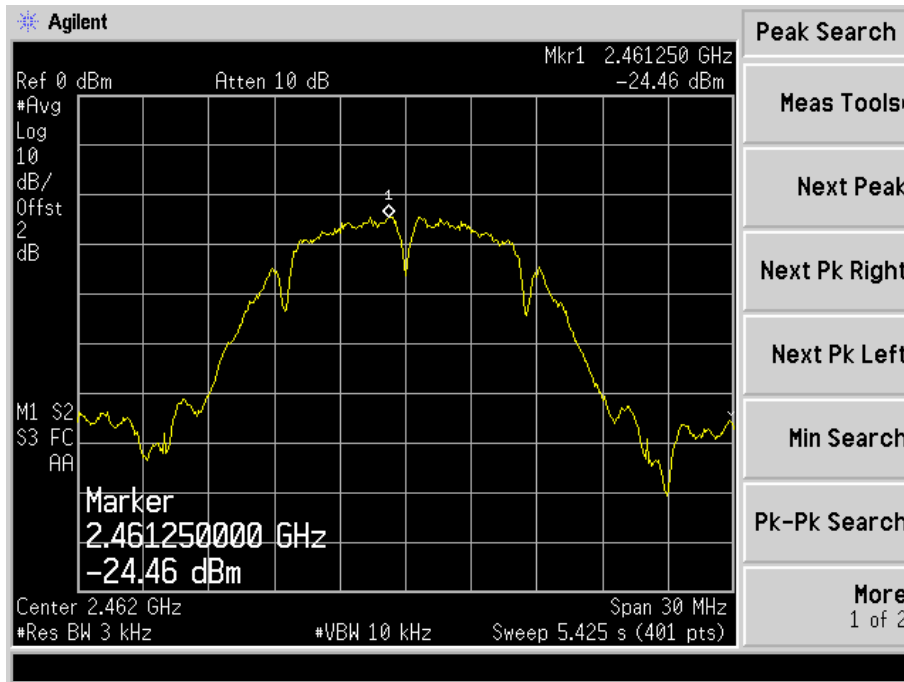


802.11g-Low Channel

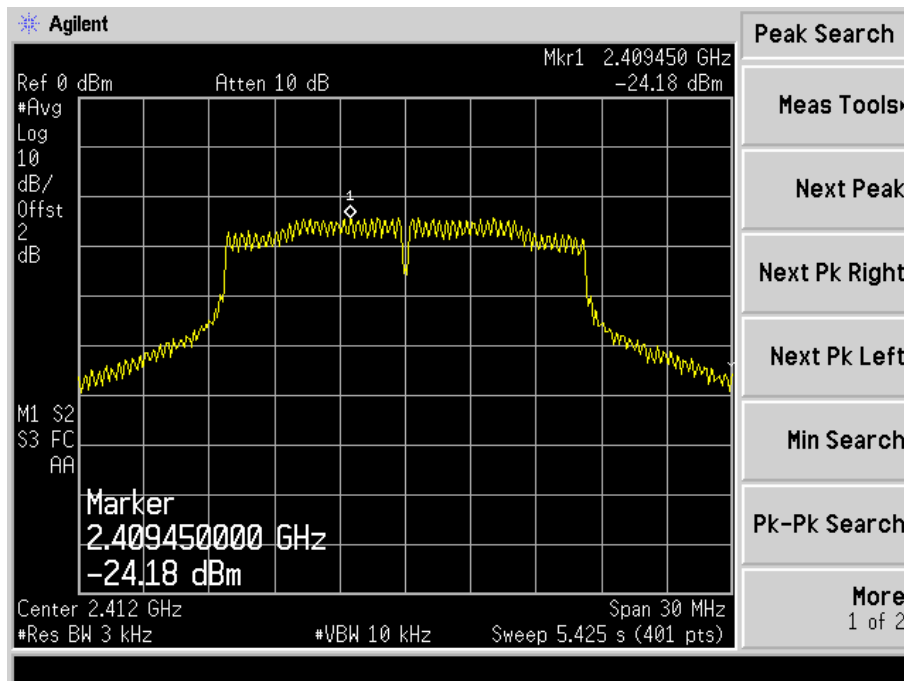


802.11g-Middle Channel

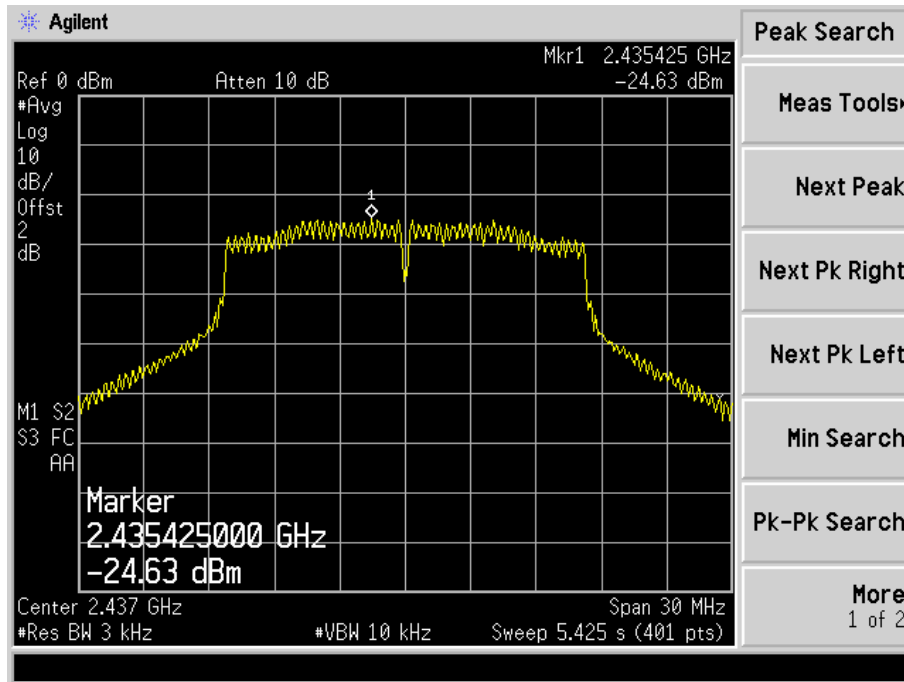


802.11g-High Channel

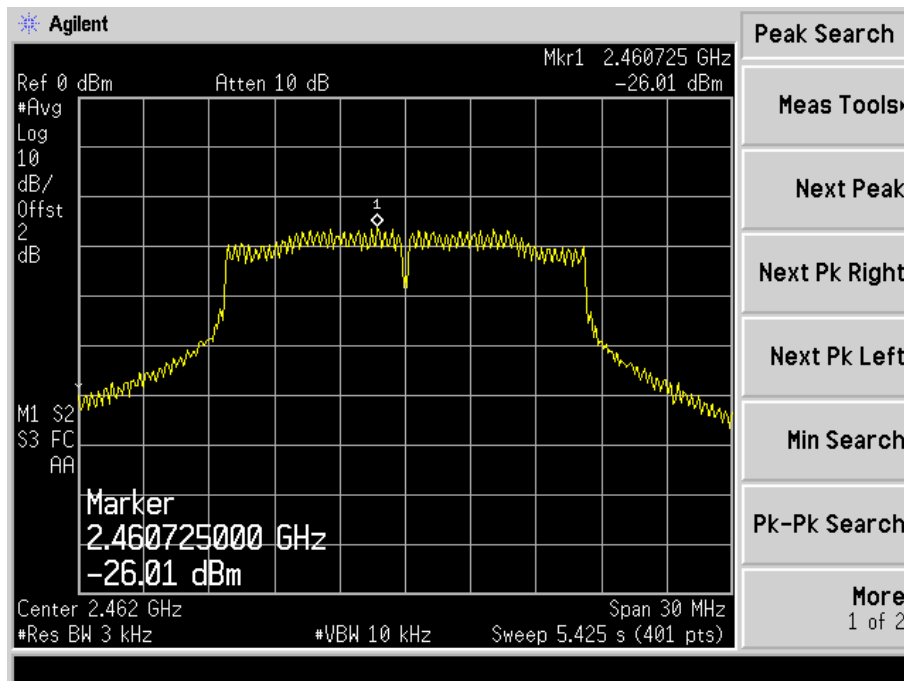


802.11n-HT20-Low Channel

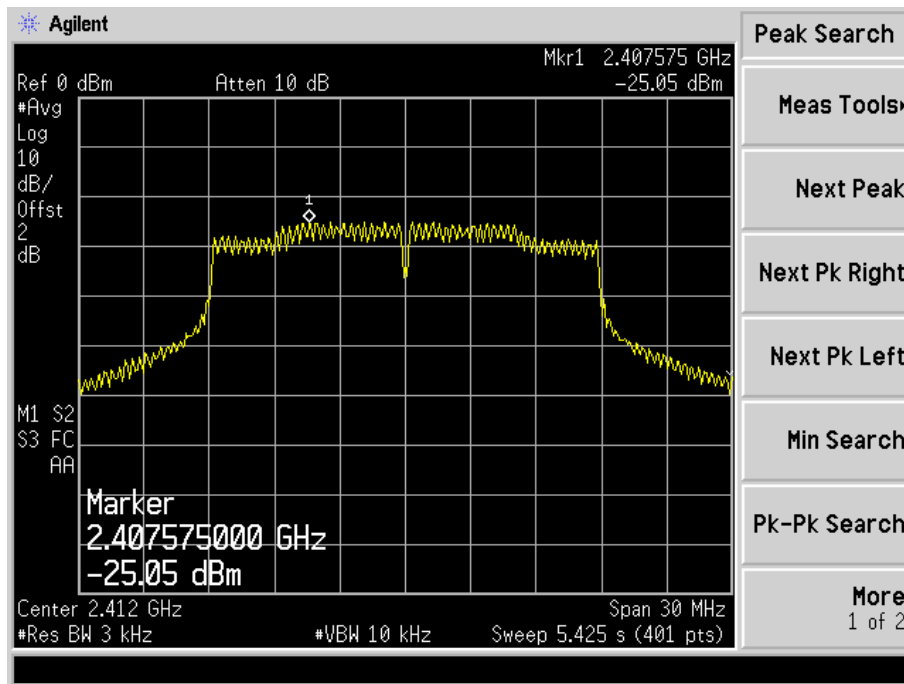


802.11n-HT20-Middle Channel

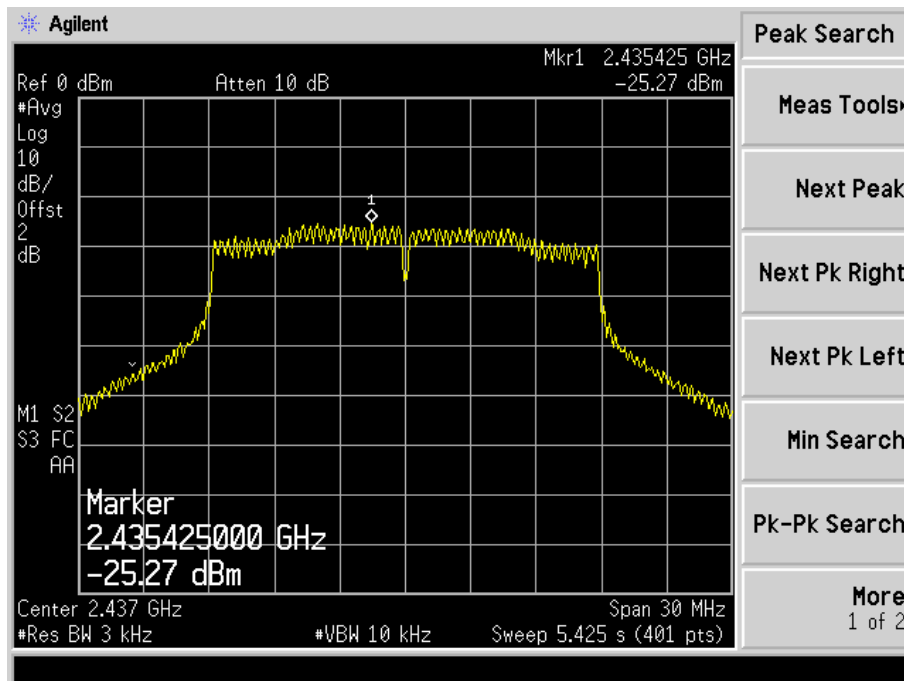


802.11n-HT20-High Channel

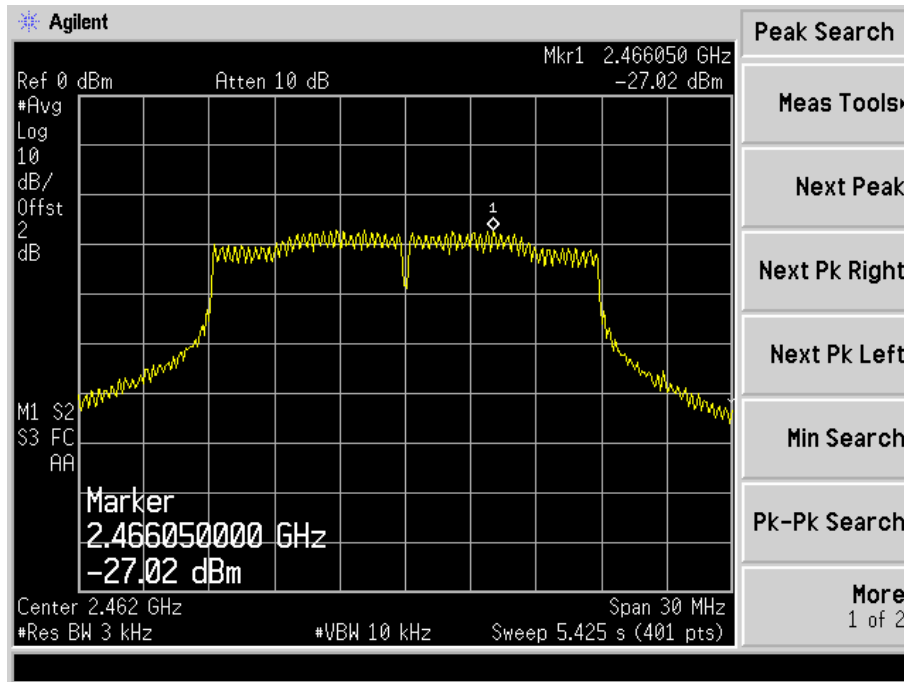


802.11n-HT40-Low Channel

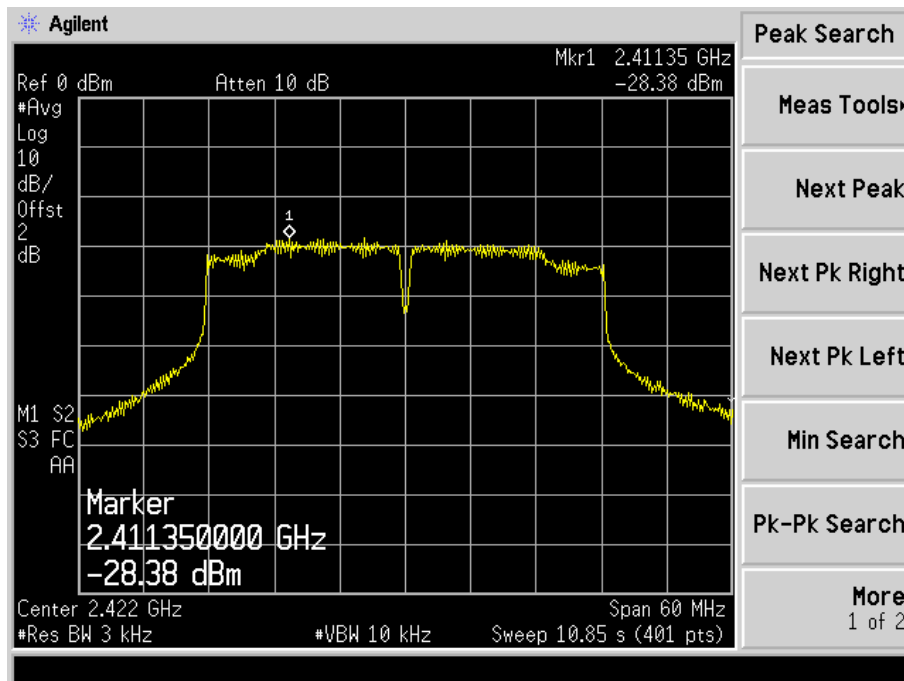

802.11n-HT40-Middle Channel

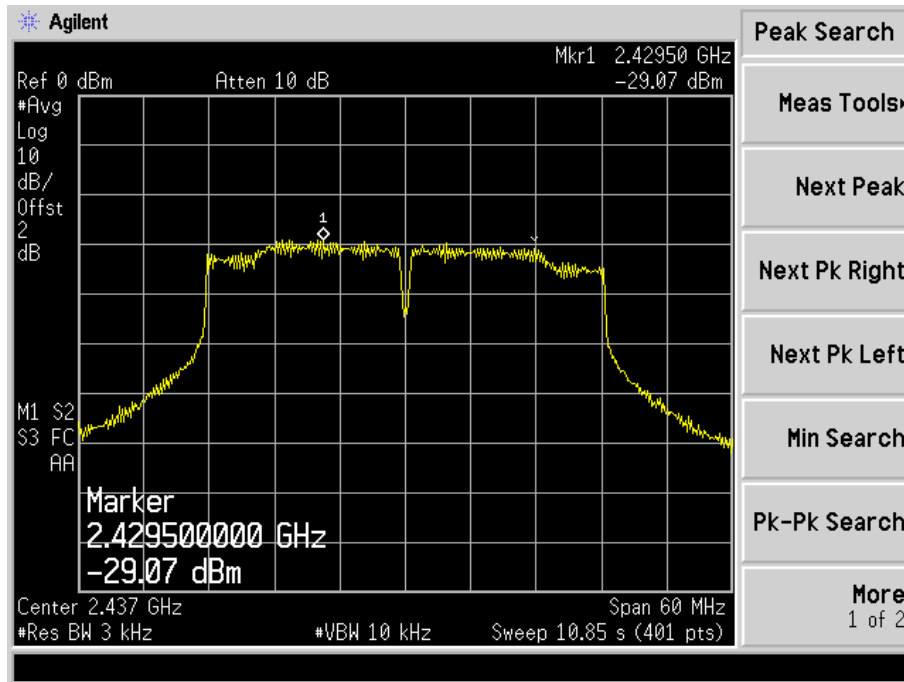


802.11n-HT40-High Channel

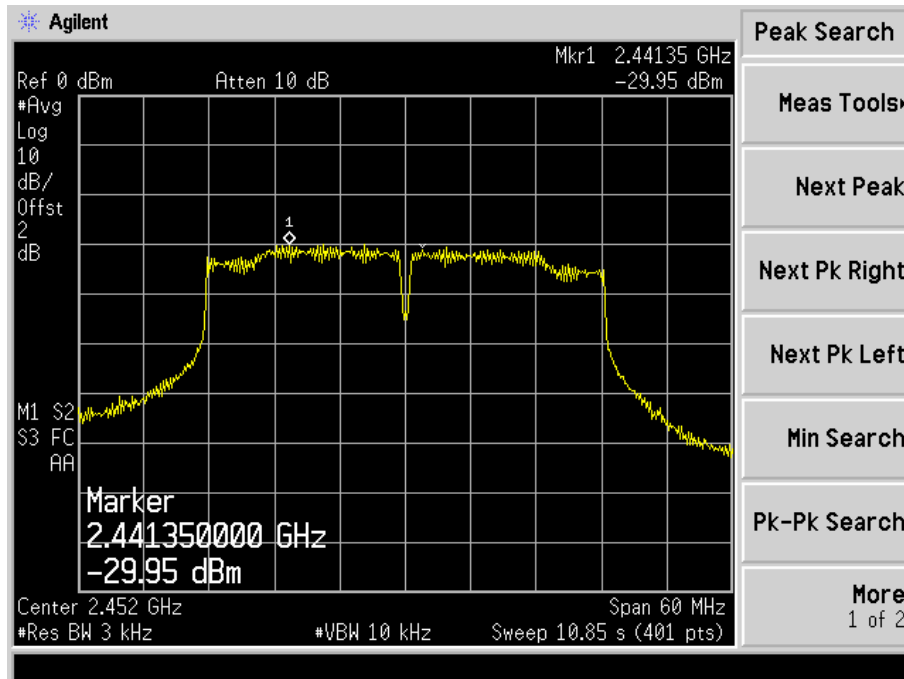


Antenna B


802.11b-Low Channel

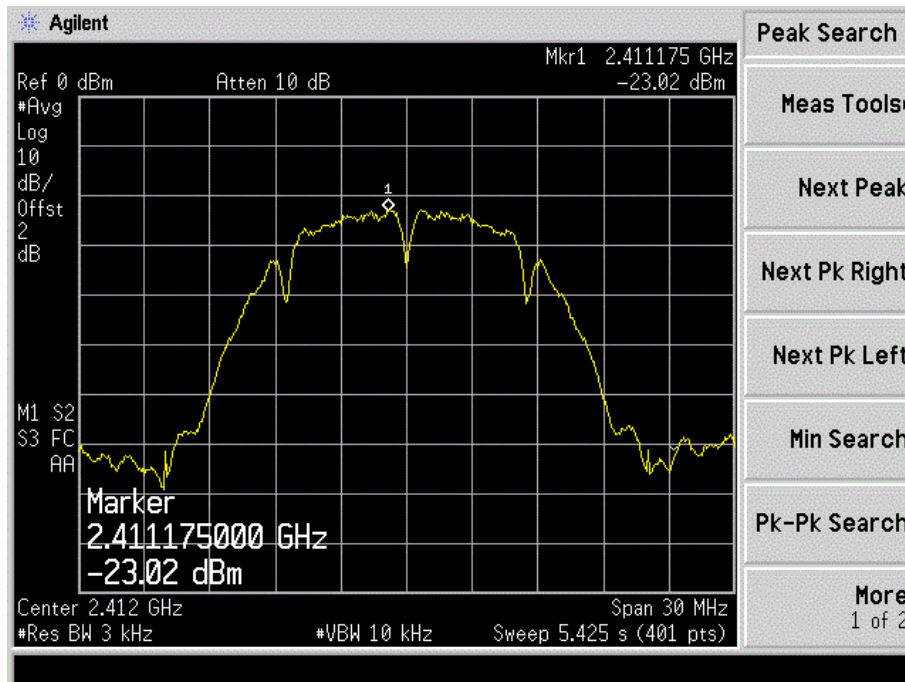


802.11b-Middle Channel

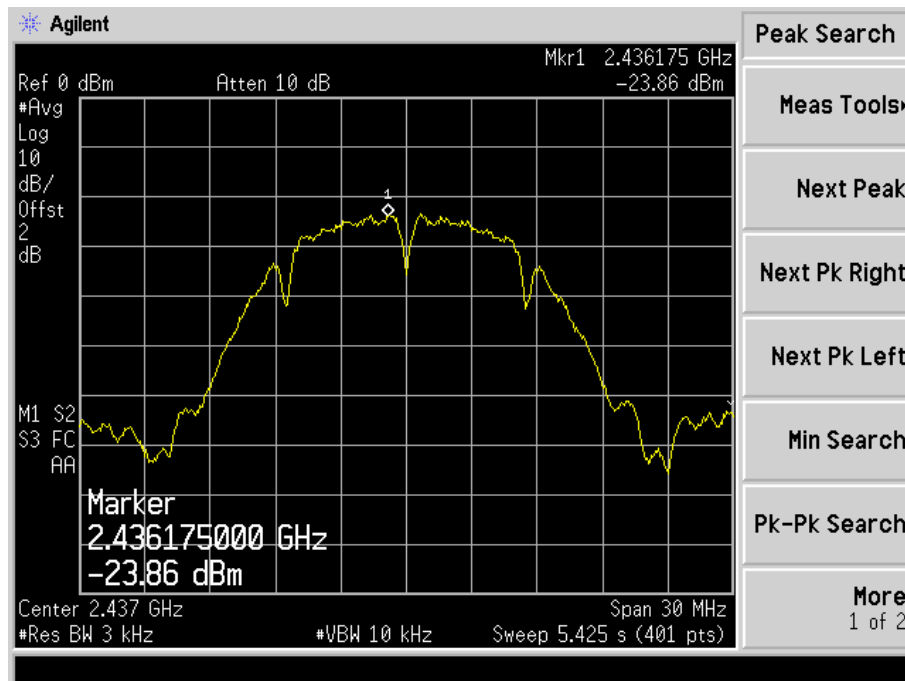


802.11b-High Channel

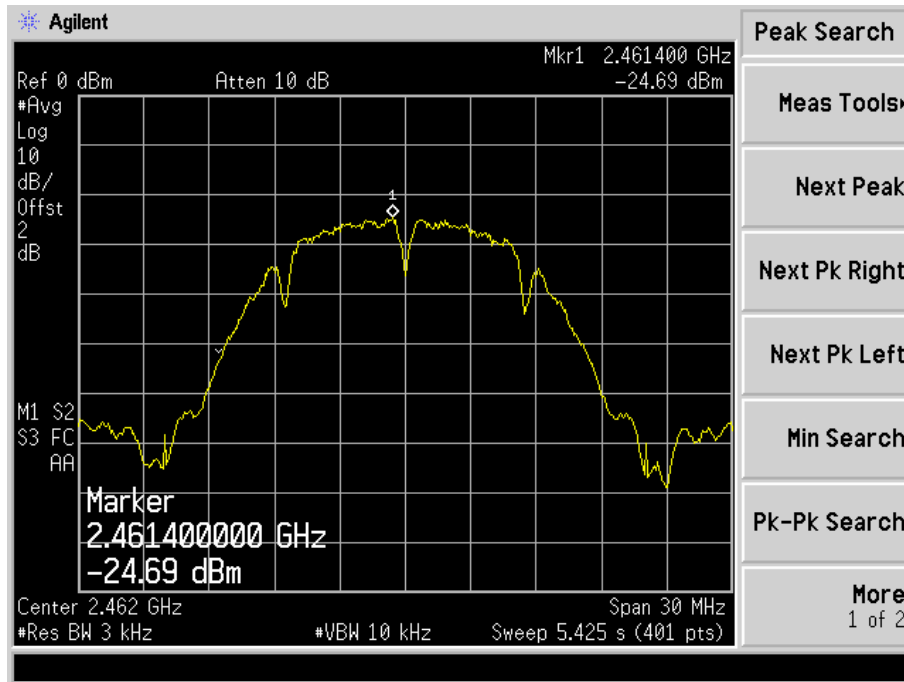


802.11g-Low Channel

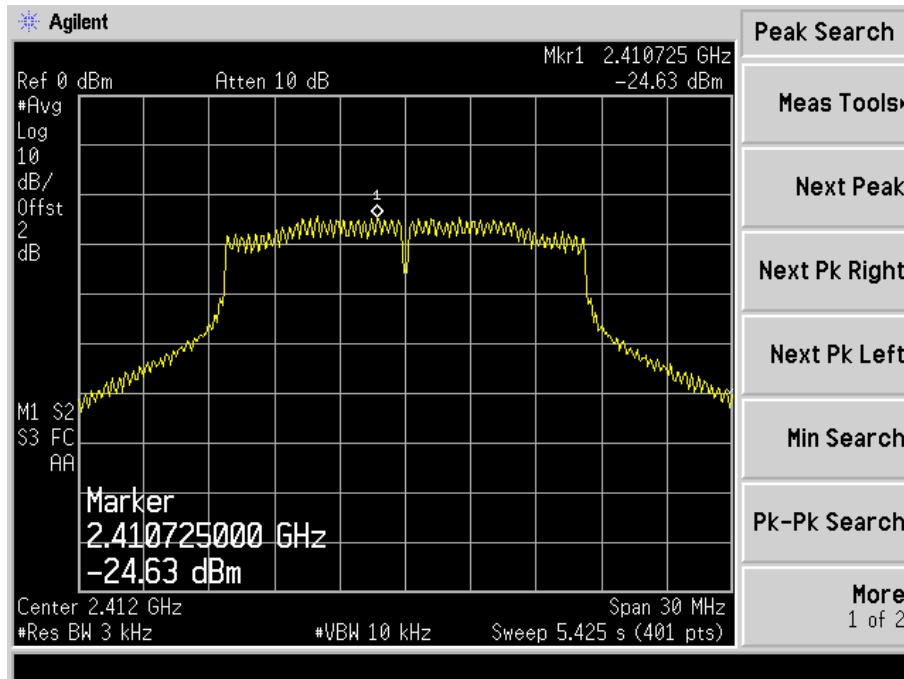


802.11g-Middle Channel

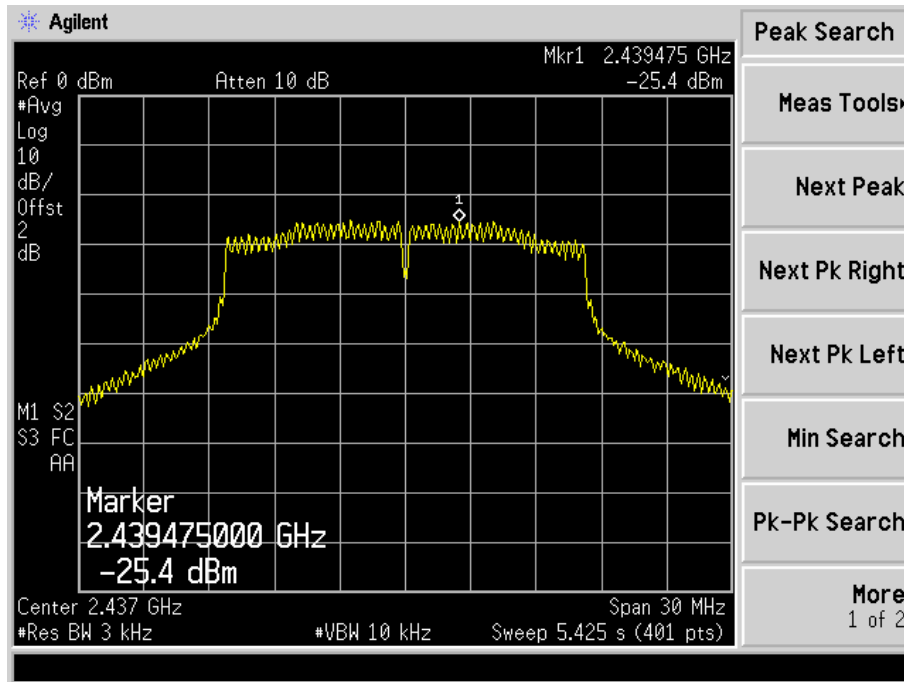


802.11g-High Channel

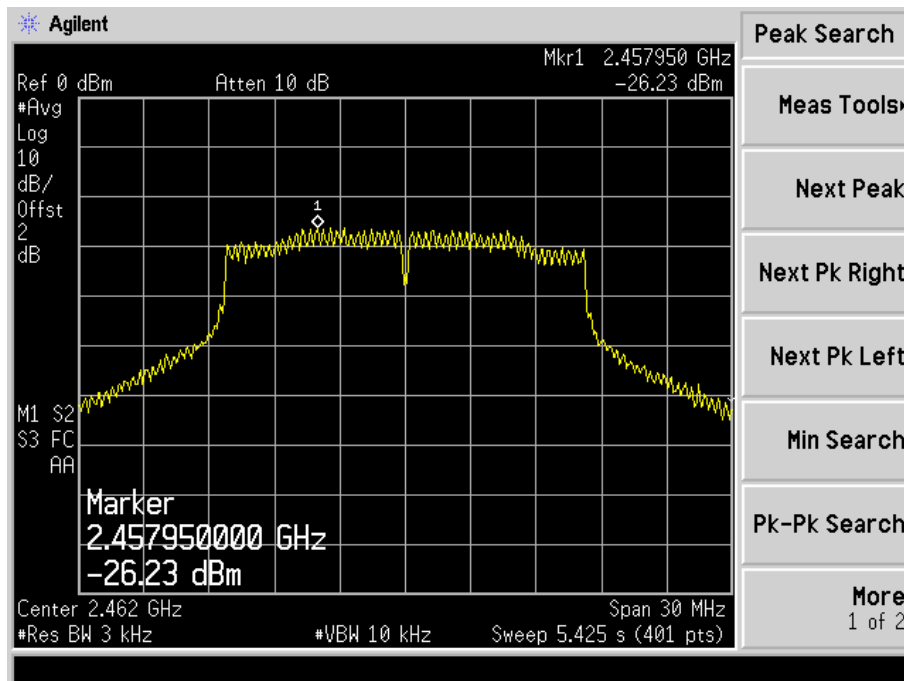


802.11n-HT20-Low Channel

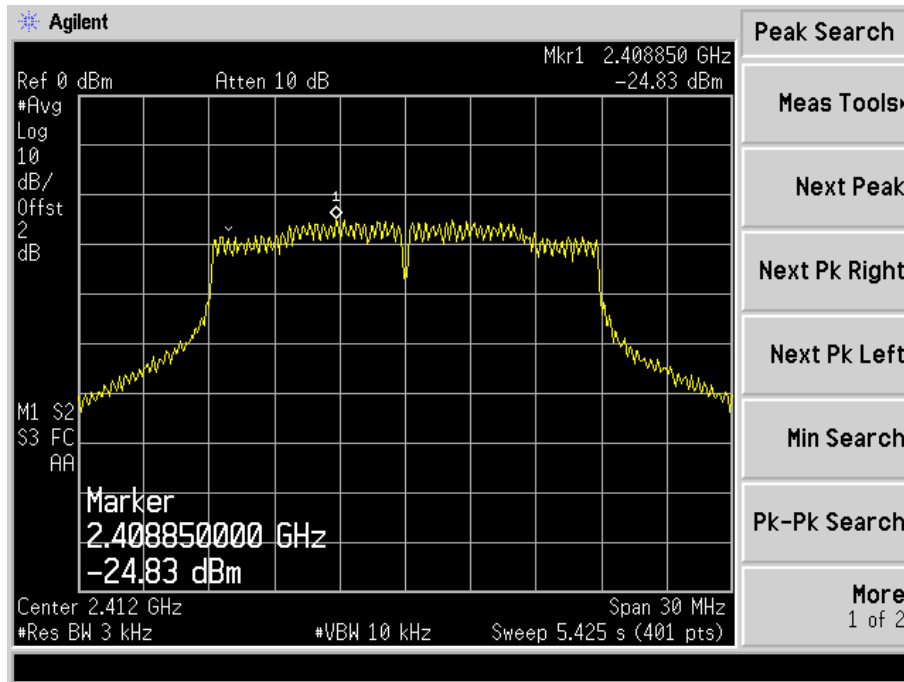


802.11n-HT20-Middle Channel

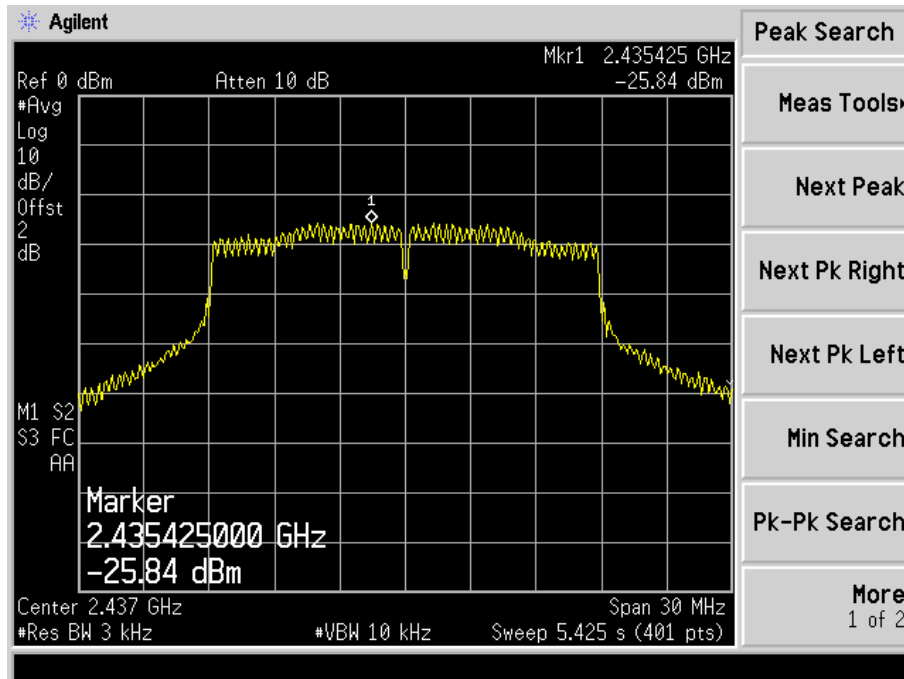


802.11n-HT20-High Channel

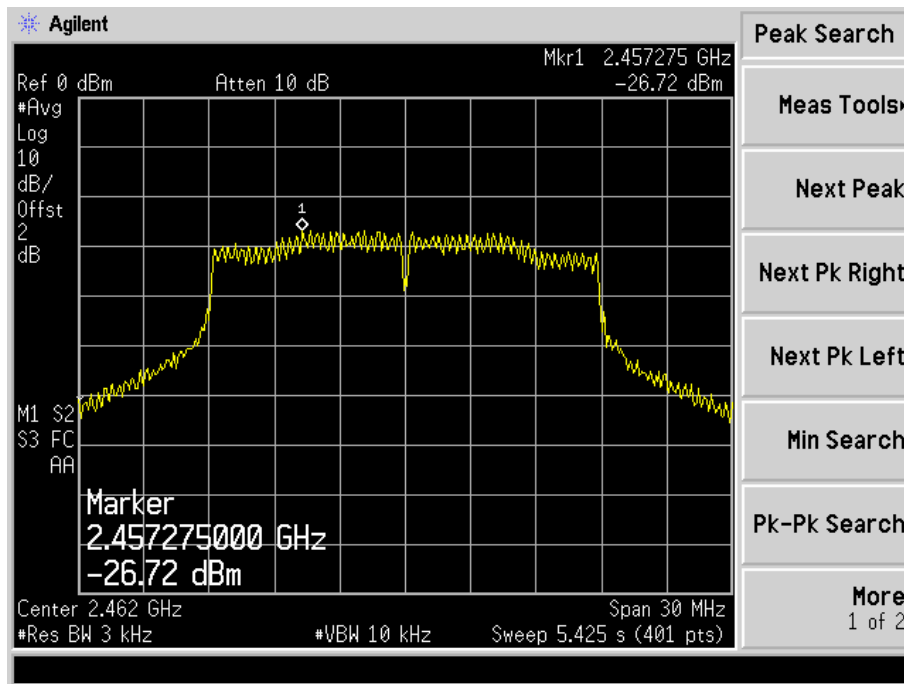


802.11n-HT40-Low Channel

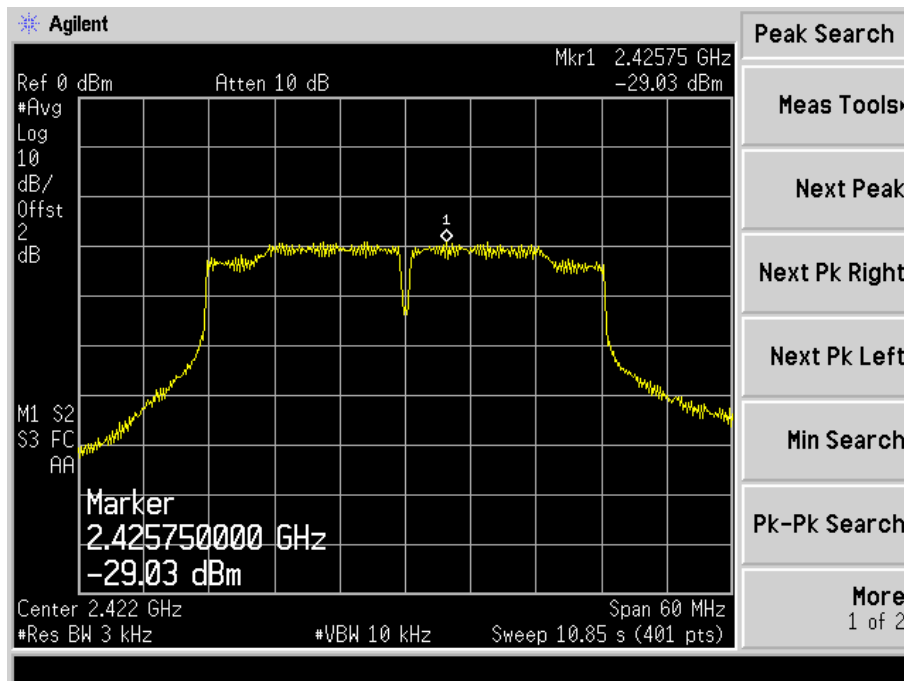

802.11n-HT40-Middle Channel

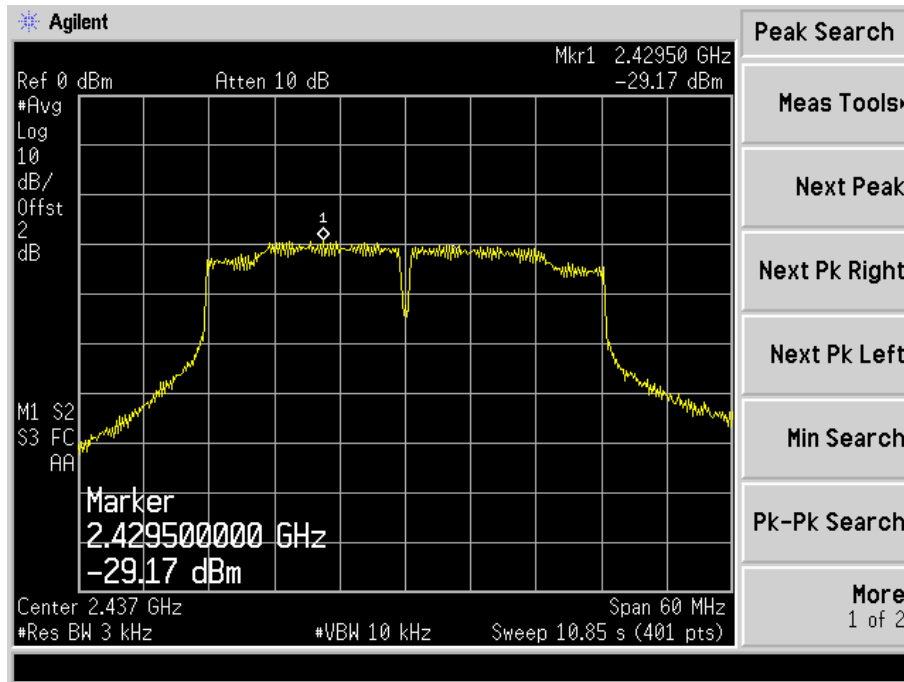

802.11n-HT40-High Channel

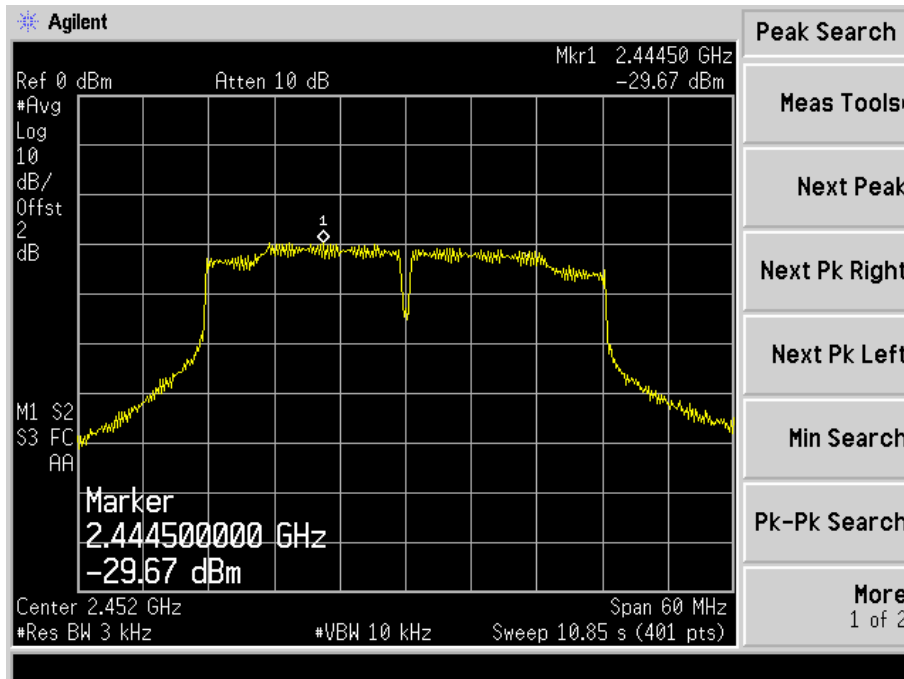

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Antenna A

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.229	12.5032	≥ 500
	2437	9.116	12.4905	≥ 500
	2462	9.665	12.7084	≥ 500
802.11g	2412	16.387	16.3736	≥ 500
	2437	15.158	16.3368	≥ 500
	2462	15.030	16.3497	≥ 500
802.11n-HT20	2412	15.180	17.5426	≥ 500
	2437	15.048	17.5476	≥ 500
	2462	15.108	17.5649	≥ 500
802.11n-HT40	2422	34.064	35.7955	≥ 500
	2437	35.293	35.8981	≥ 500
	2452	35.296	35.9232	≥ 500


Antenna B

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.376	12.7256	≥500
	2437	9.180	12.5164	≥500
	2462	9.243	12.5275	≥500
802.11g	2412	13.232	16.4071	≥500
	2437	15.302	16.4193	≥500
	2462	14.207	16.3709	≥500
802.11n-HT20	2412	15.504	17.5515	≥500
	2437	15.302	17.5959	≥500
	2462	15.141	17.5419	≥500
802.11n-HT40	2422	35.190	35.7789	≥500
	2437	33.905	35.8742	≥500
	2452	33.877	35.8947	≥500


Please refer to the following test plots:

Antenna A


802.11b-Low Channel

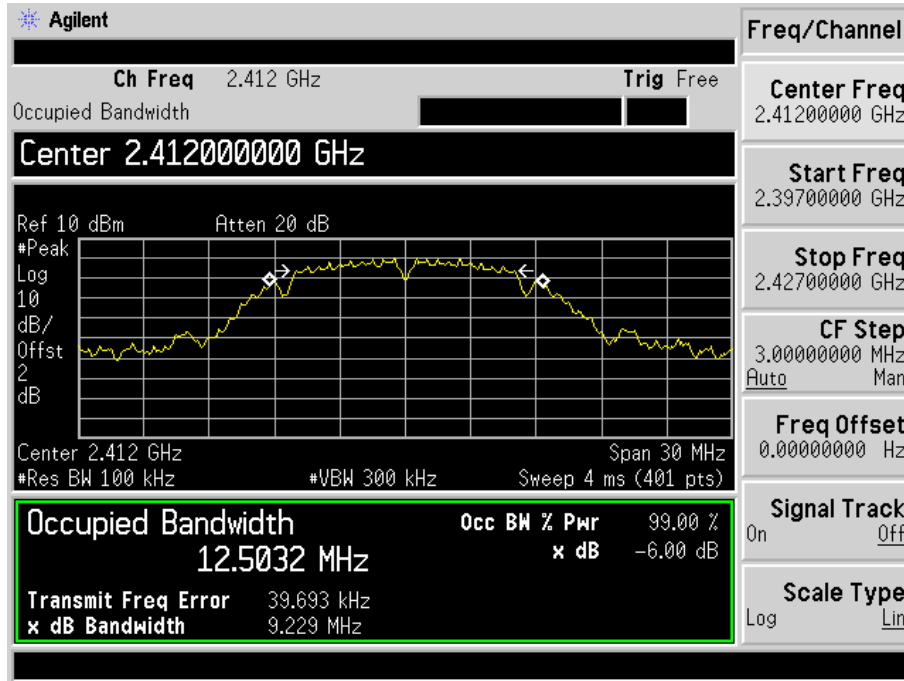


802.11b-Middle Channel

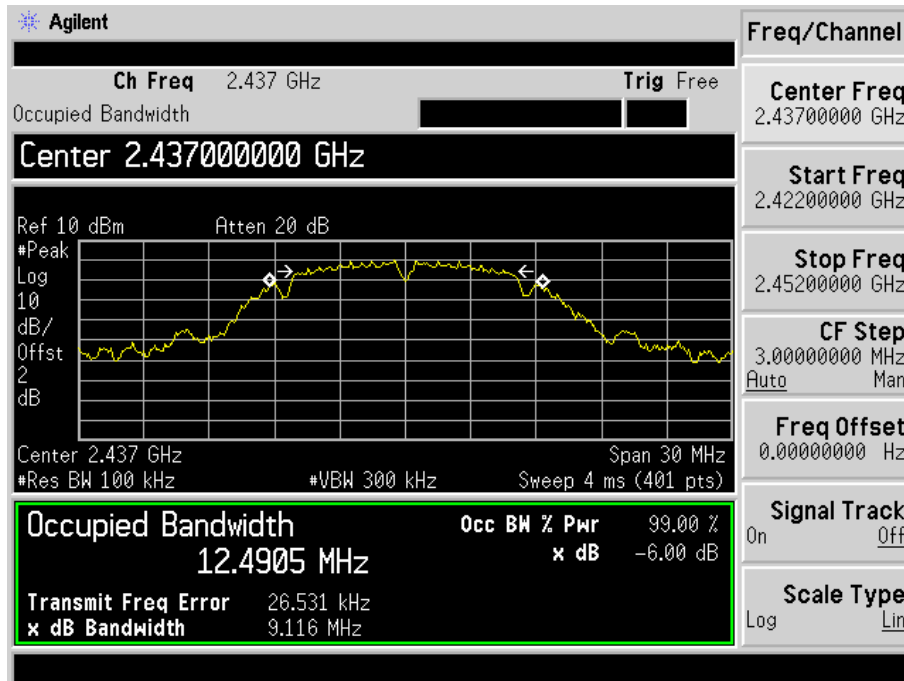


802.11b-High Channel

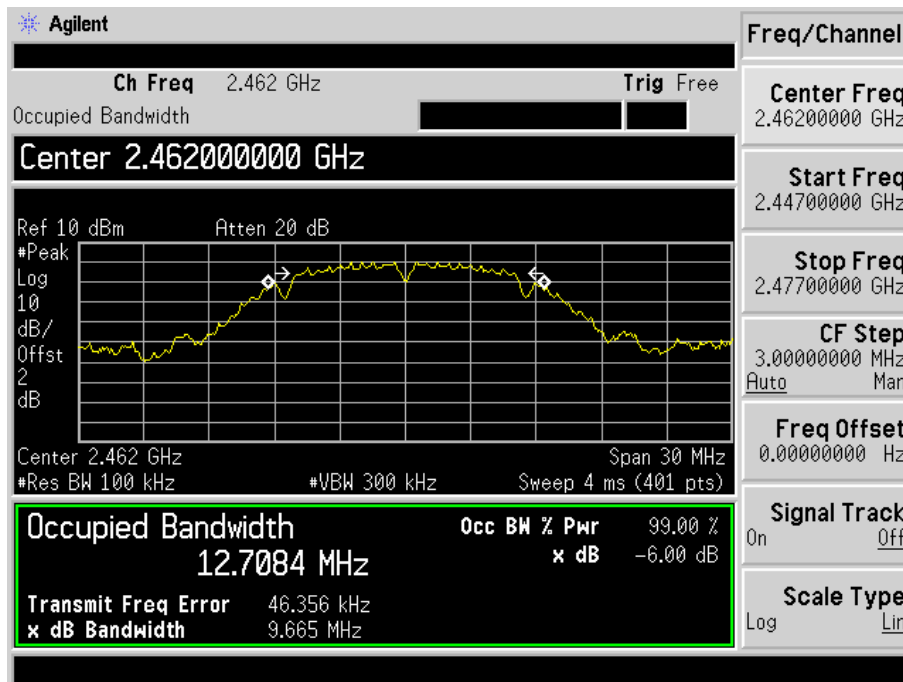


802.11g-Low Channel

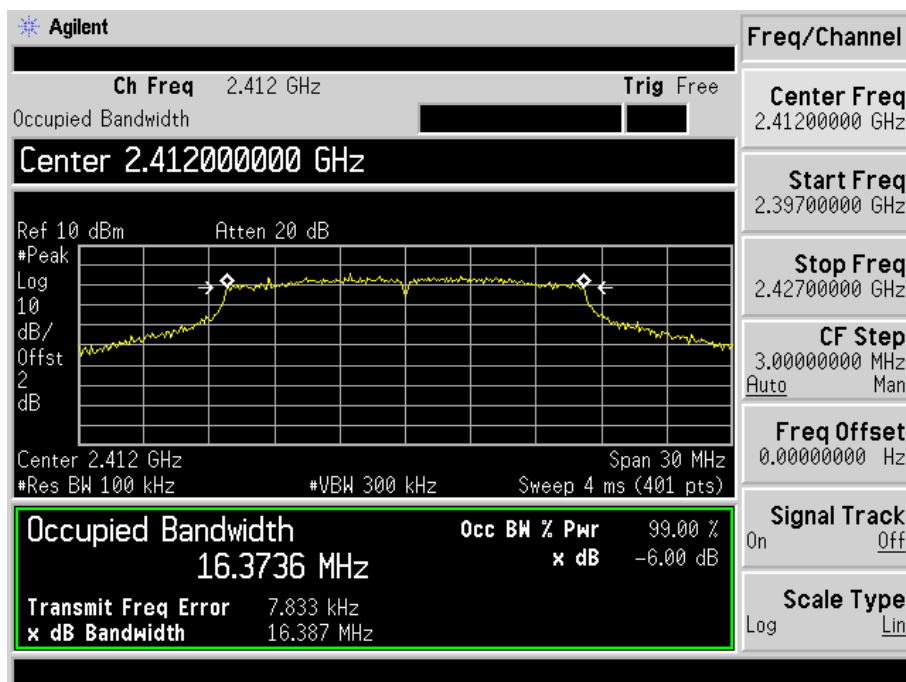


802.11g-Middle Channel

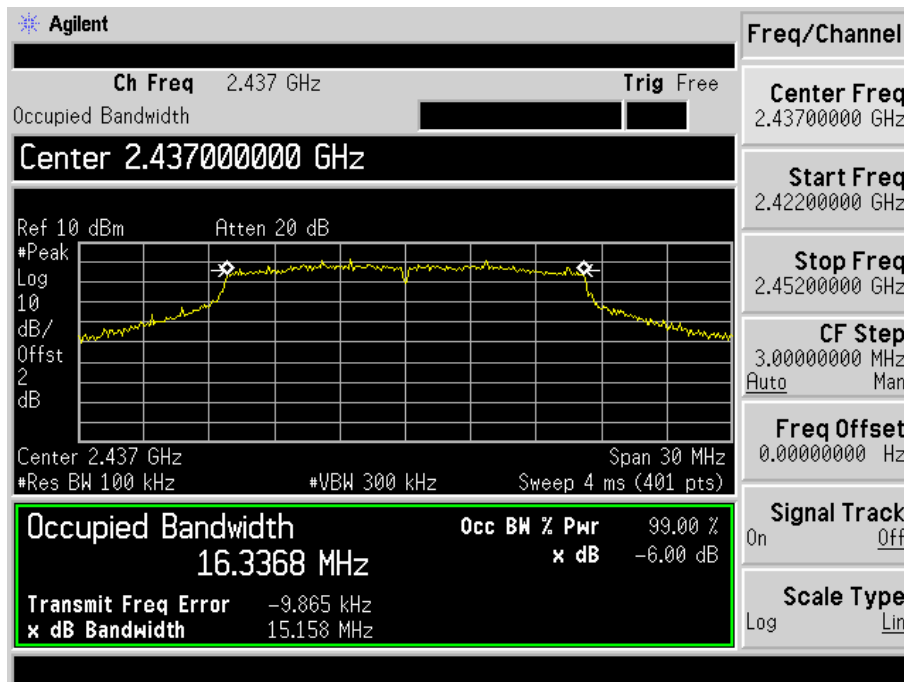


802.11g-High Channel

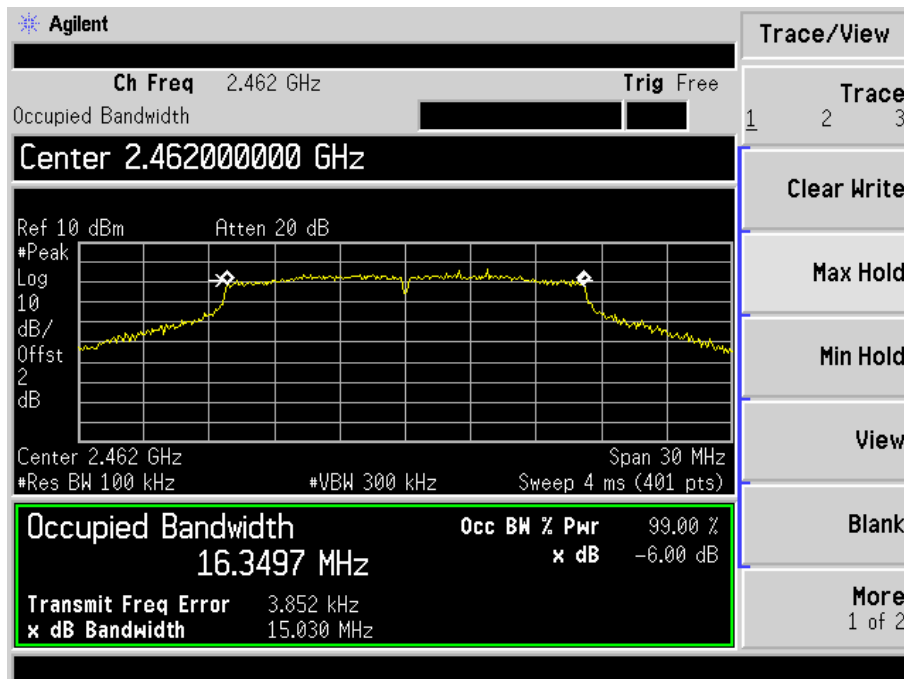


802.11n-HT20-Low Channel

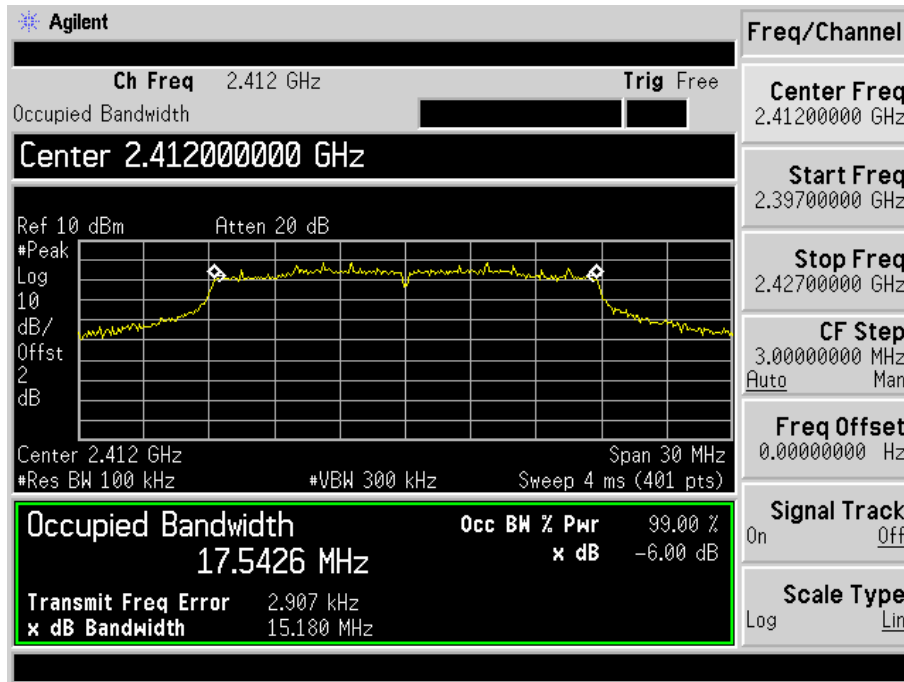


802.11n-HT20-Middle Channel

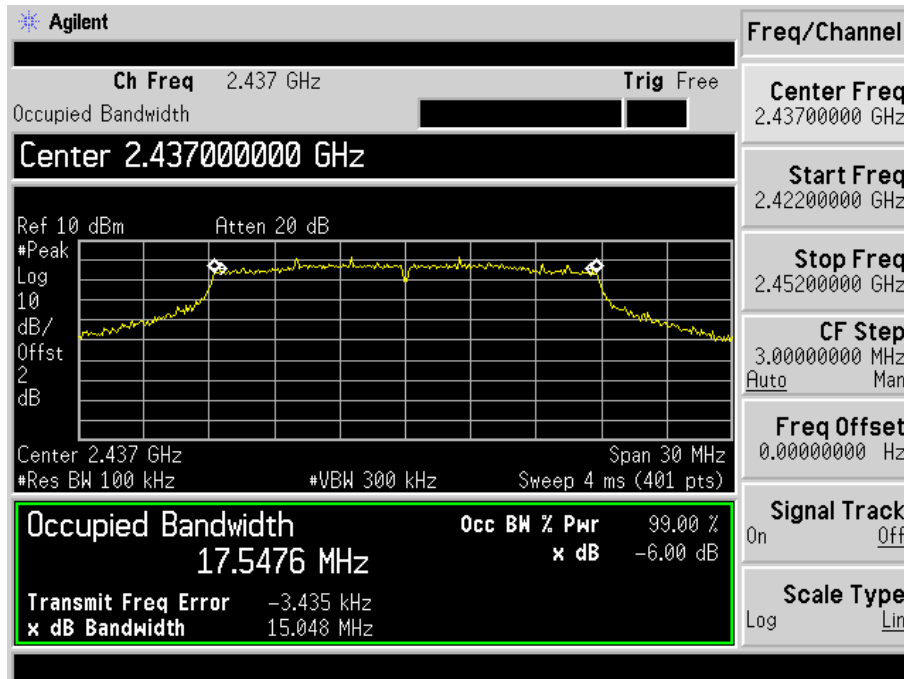


802.11n-HT20-High Channel

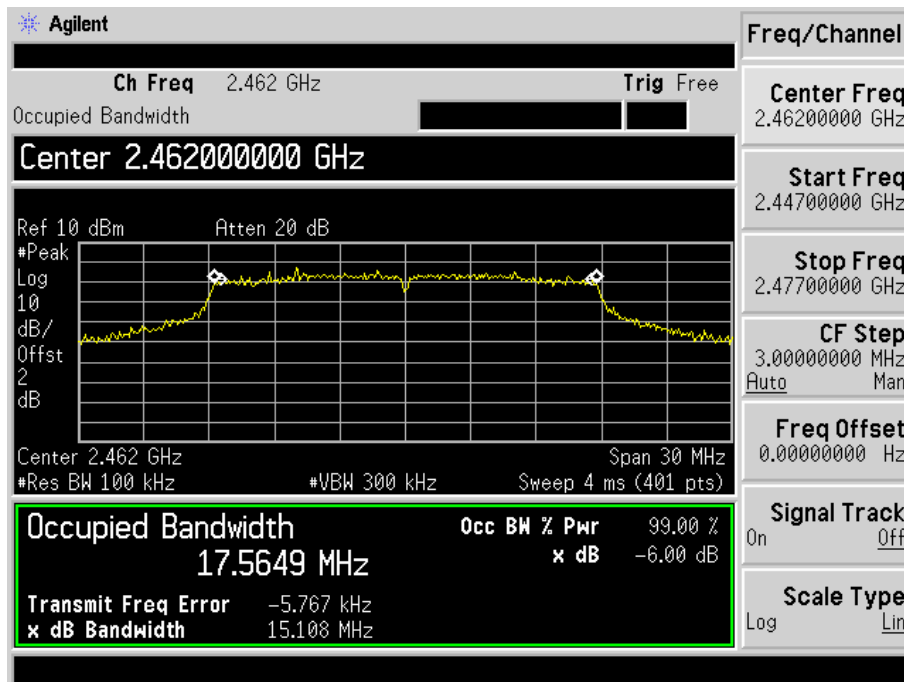


802.11n-HT40-Low Channel

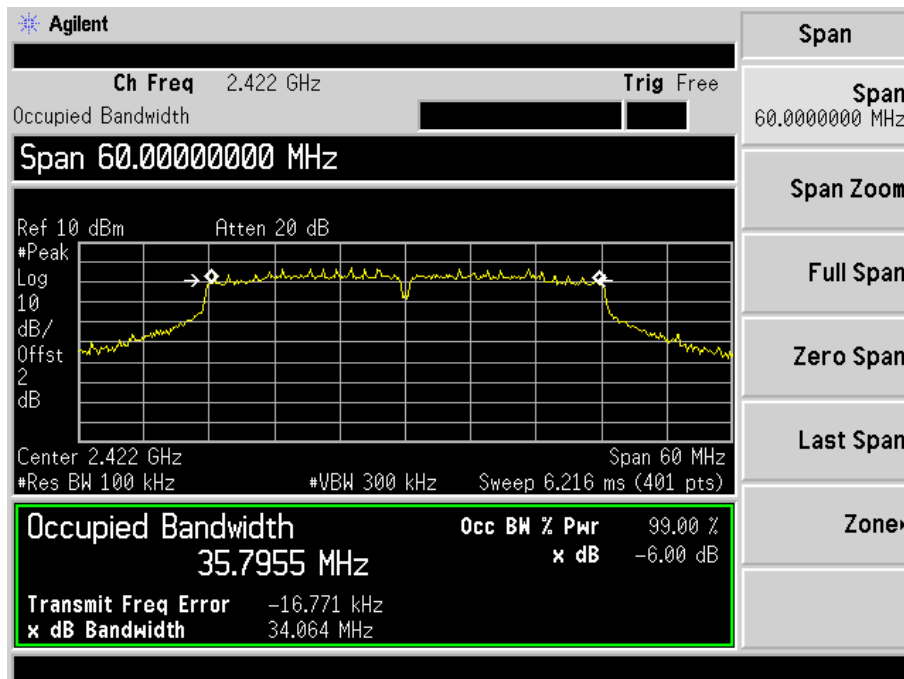

802.11n-HT40-Middle Channel

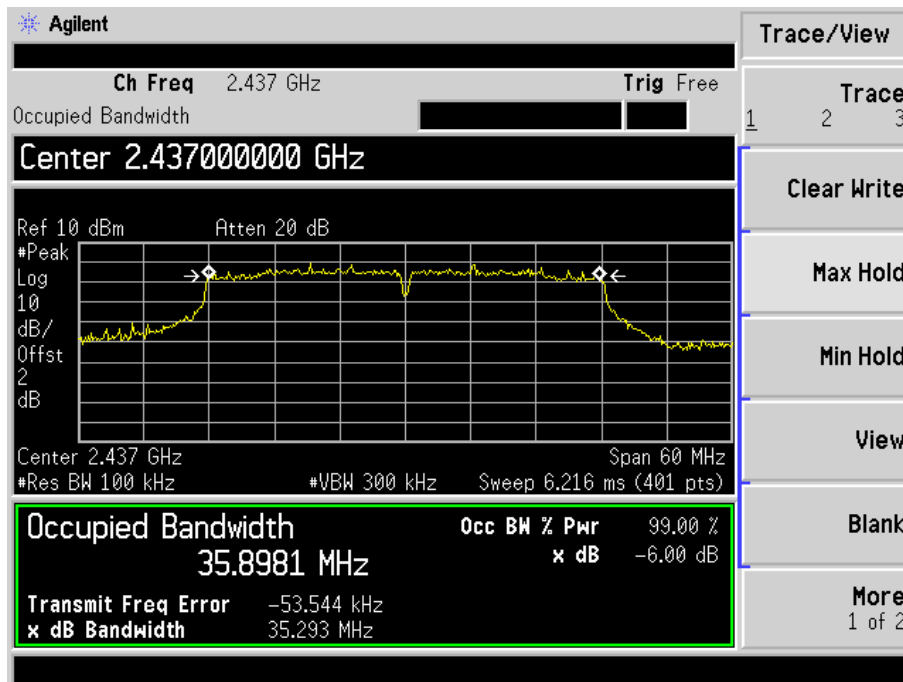


802.11n-HT40-High Channel

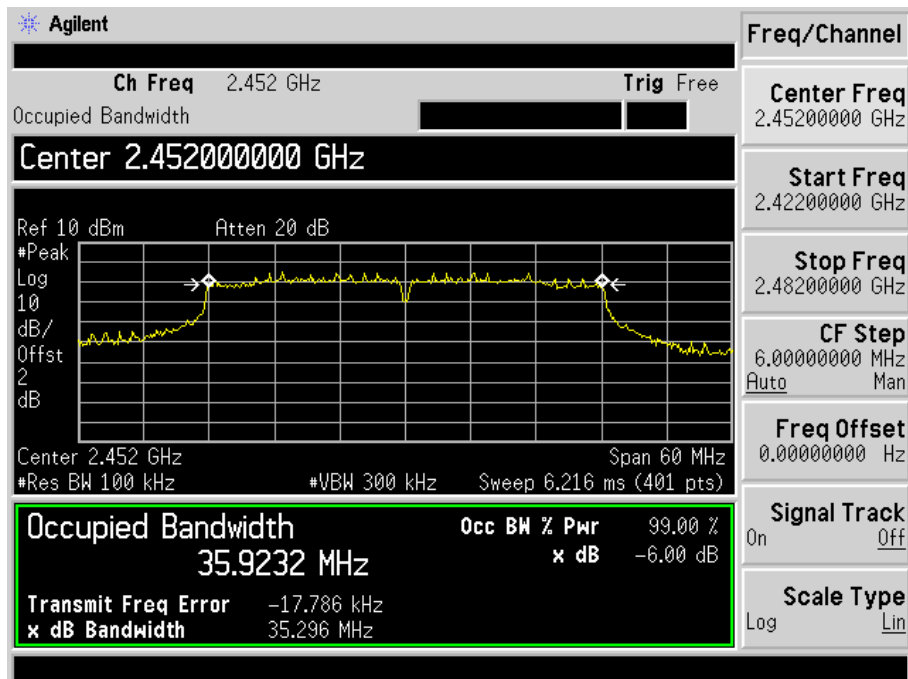


Antenna B


802.11b-Low Channel

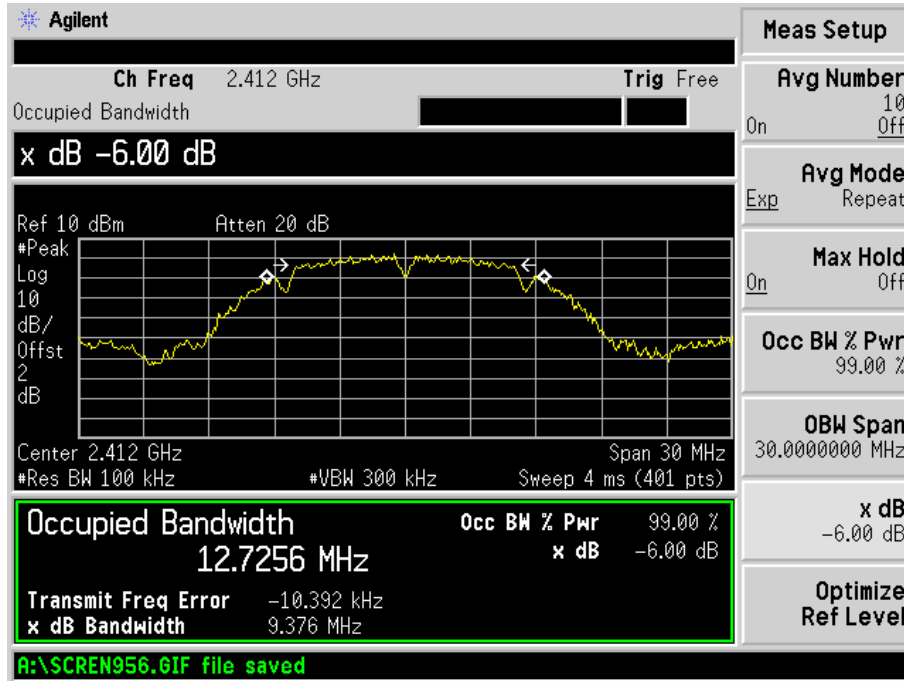


802.11b-Middle Channel

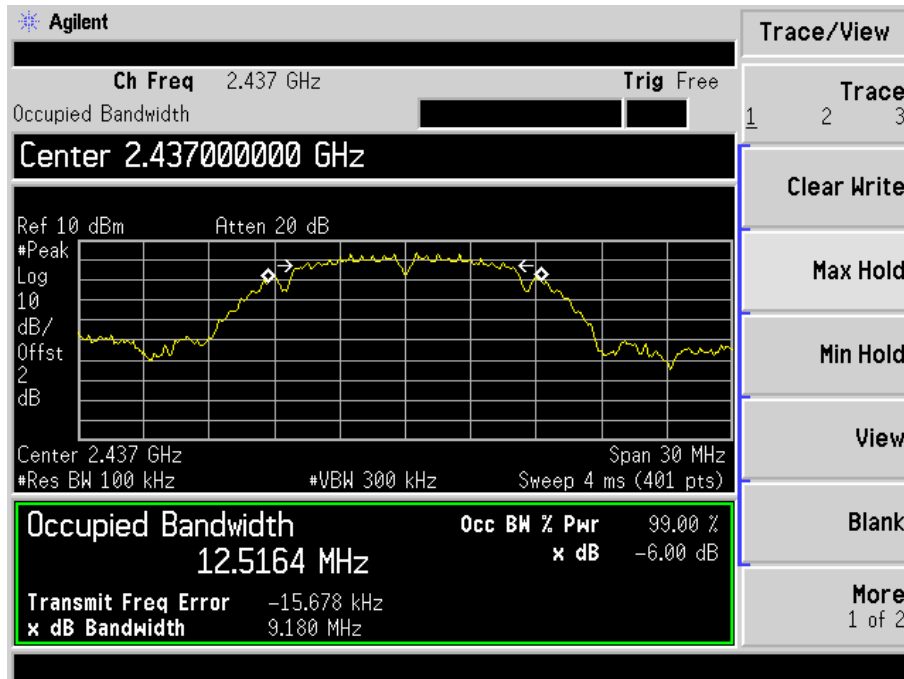


802.11b-High Channel

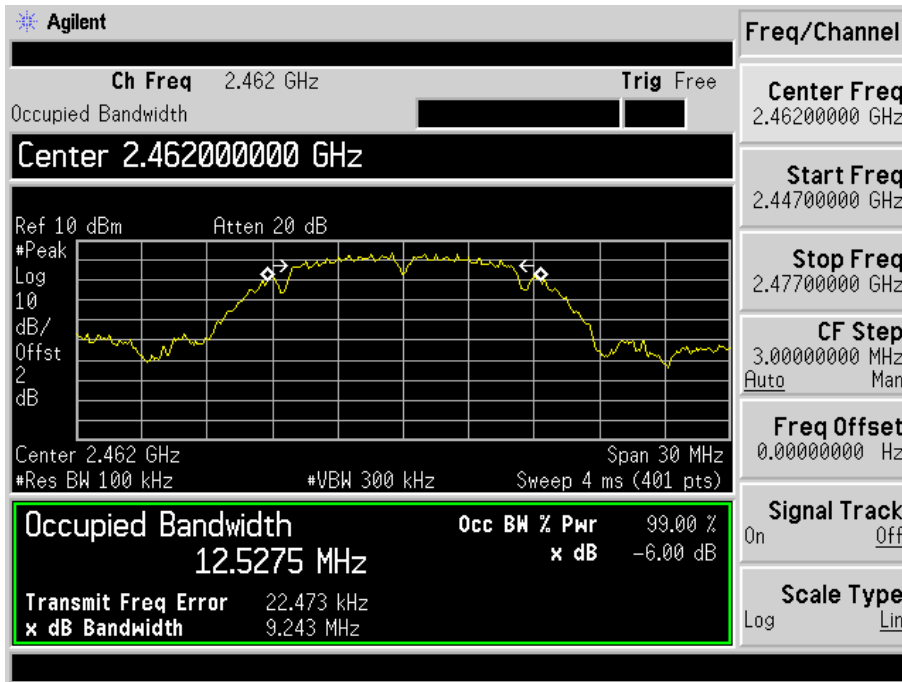


802.11g-Low Channel

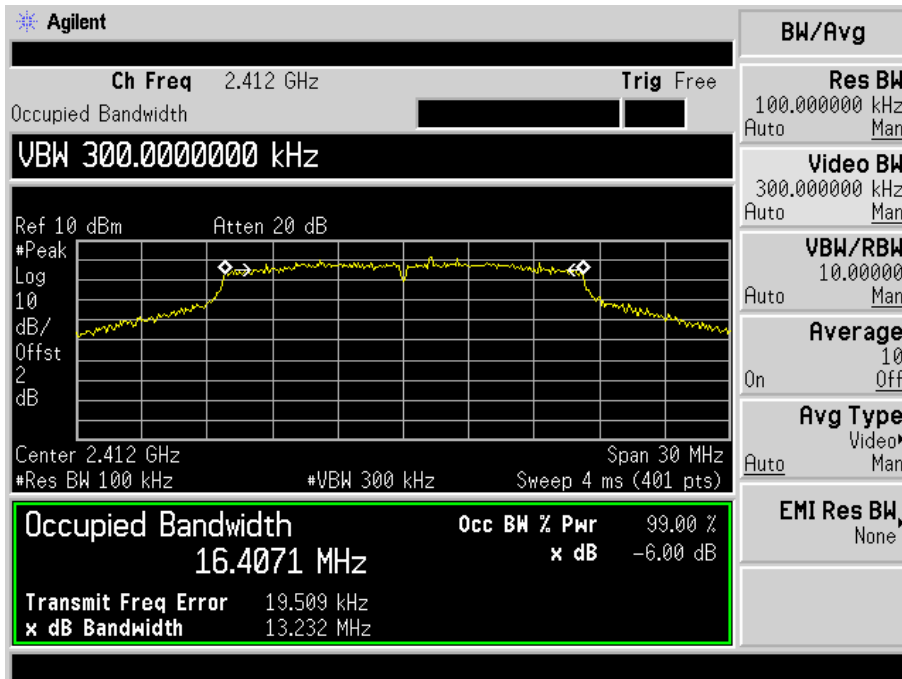


802.11g-Middle Channel

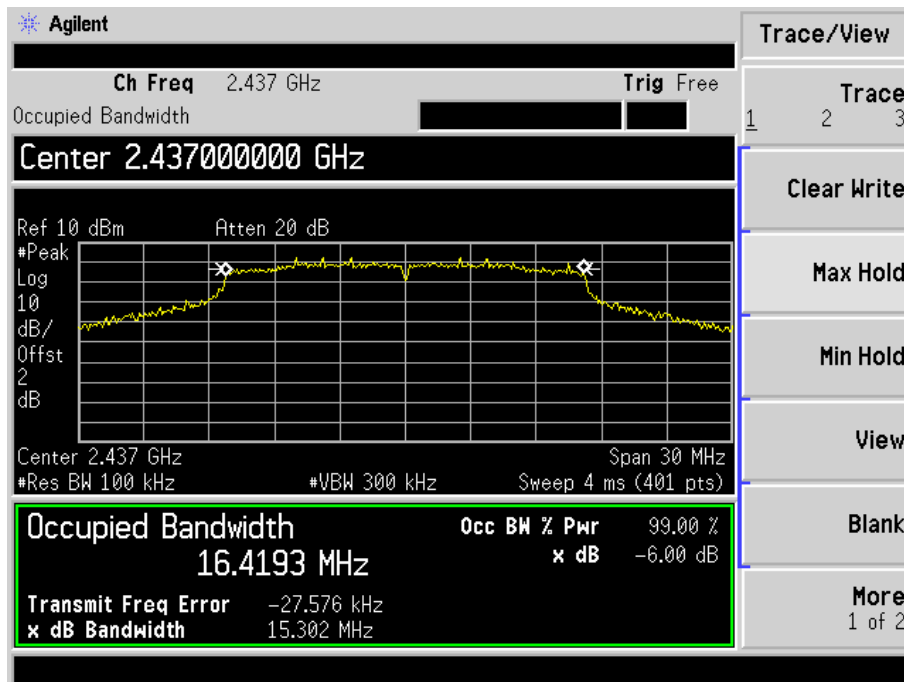


802.11g-High Channel

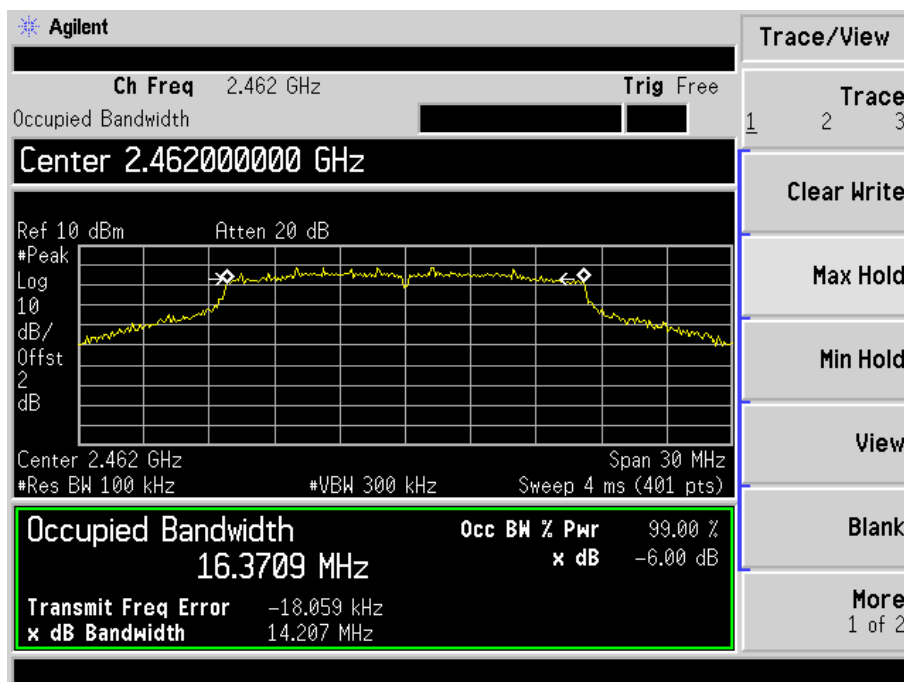


802.11n-HT20-Low Channel

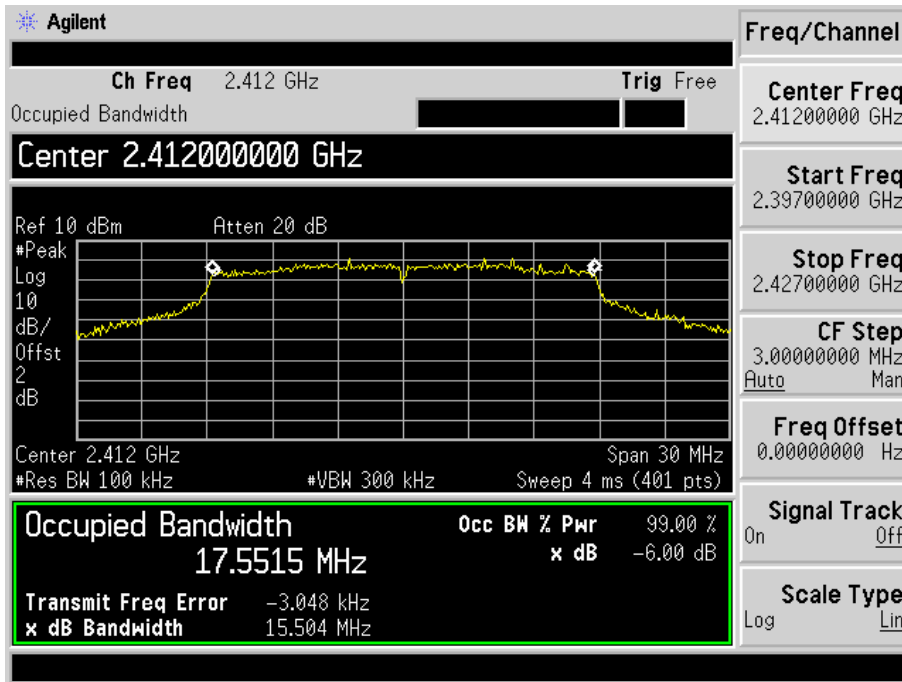


802.11n-HT20-Middle Channel

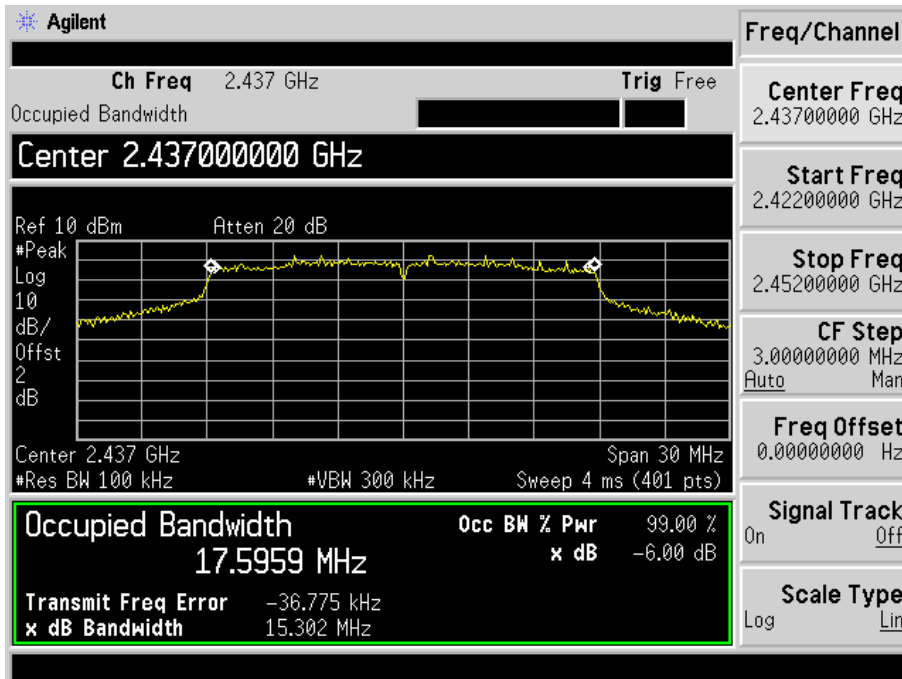


802.11n-HT20-High Channel

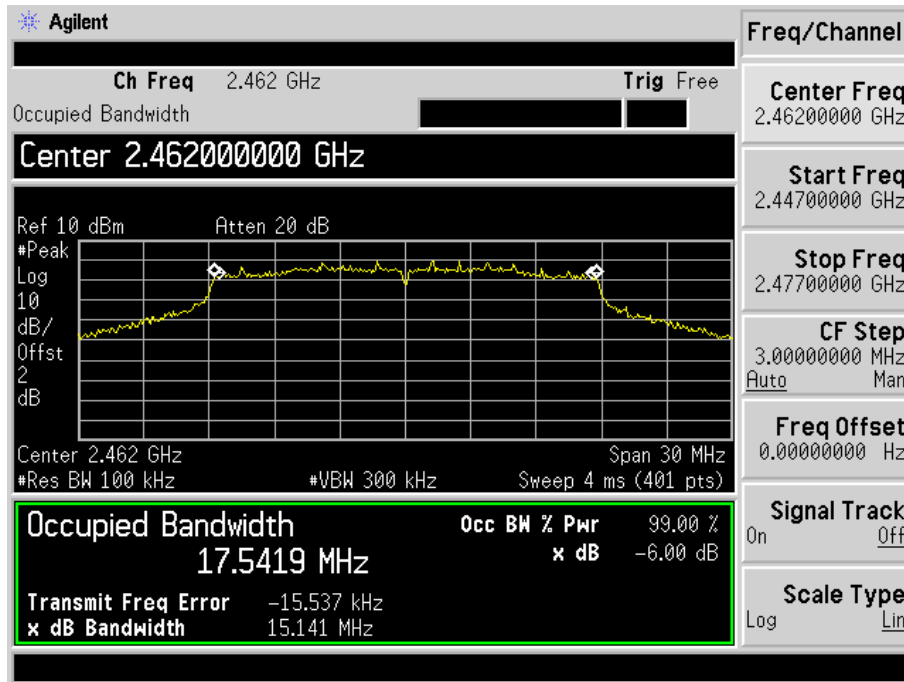


802.11n-HT40-Low Channel

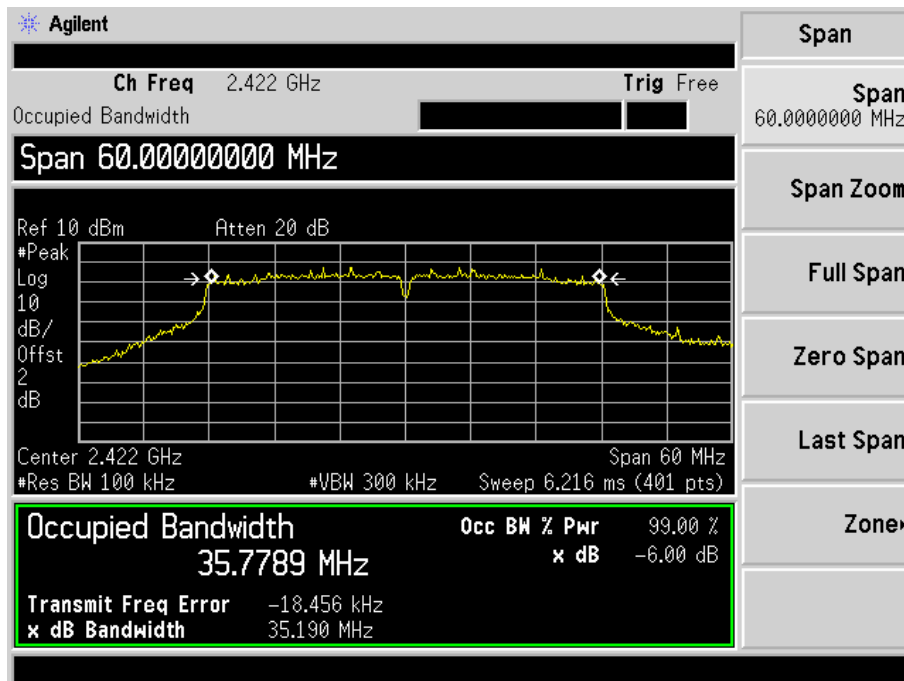

802.11n-HT40-Middle Channel

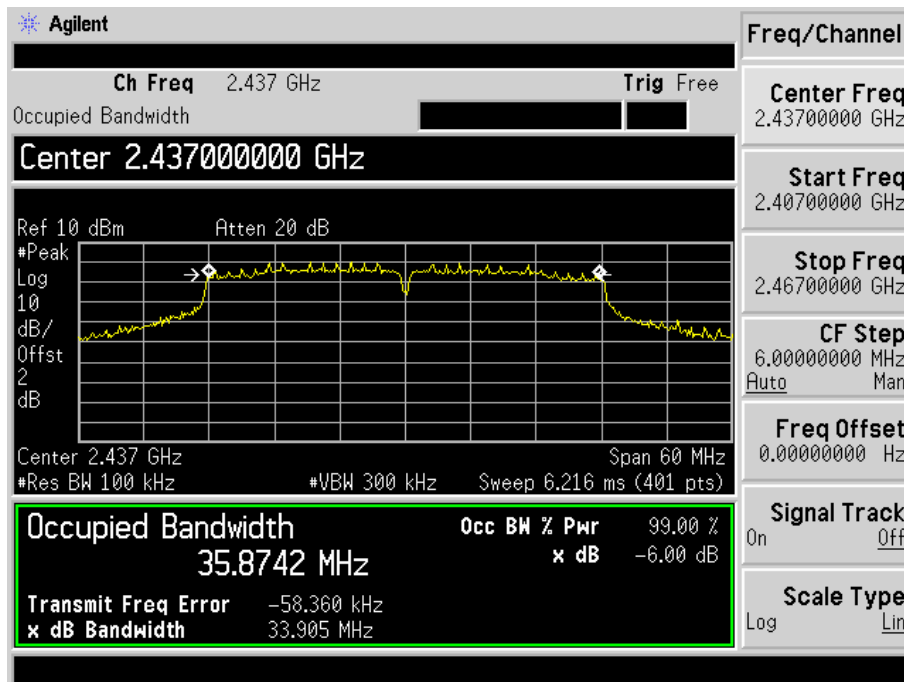

802.11n-HT40-High Channel

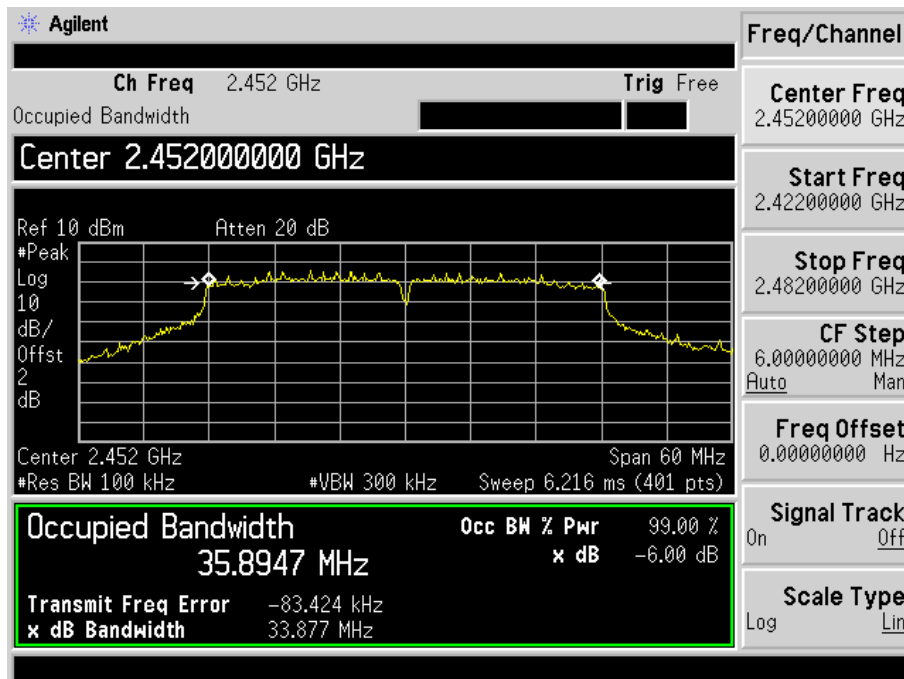

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98 \%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

Antenna A

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	9.64	9.20	1000
	2437	9.17	8.26	1000
	2462	8.14	6.52	1000
802.11g_54Mbps	2412	9.07	8.07	1000
	2437	8.55	7.16	1000
	2462	8.36	6.85	1000
802.11n HT20_MCS7	2412	8.50	7.08	1000
	2437	8.99	7.93	1000
	2462	8.35	6.84	1000
802.11n HT40_MCS7	2422	8.57	7.19	1000
	2437	8.45	7.00	1000
	2452	8.51	7.10	1000


Antenna B

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	9.26	8.43	1000
	2437	9.19	8.30	1000
	2462	9.32	8.55	1000
802.11g_54Mbps	2412	9.01	7.96	1000
	2437	8.88	7.73	1000
	2462	8.98	7.91	1000
802.11n HT20_MCS7	2412	9.00	7.94	1000
	2437	8.95	7.85	1000
	2462	8.40	6.92	1000
802.11n HT40_MCS7	2422	8.41	6.93	1000
	2437	8.72	7.45	1000
	2452	8.17	6.56	1000


Please refer to the following test plots:

Antenna A


802.11b-11Mbps-Low Channel

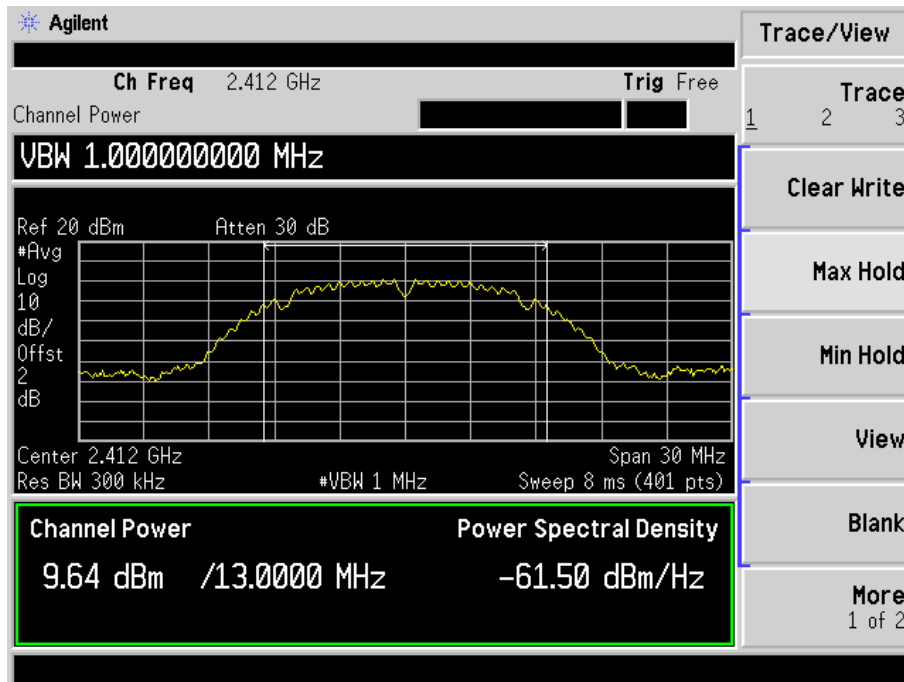


802.11b -11Mbps-Middle Channel

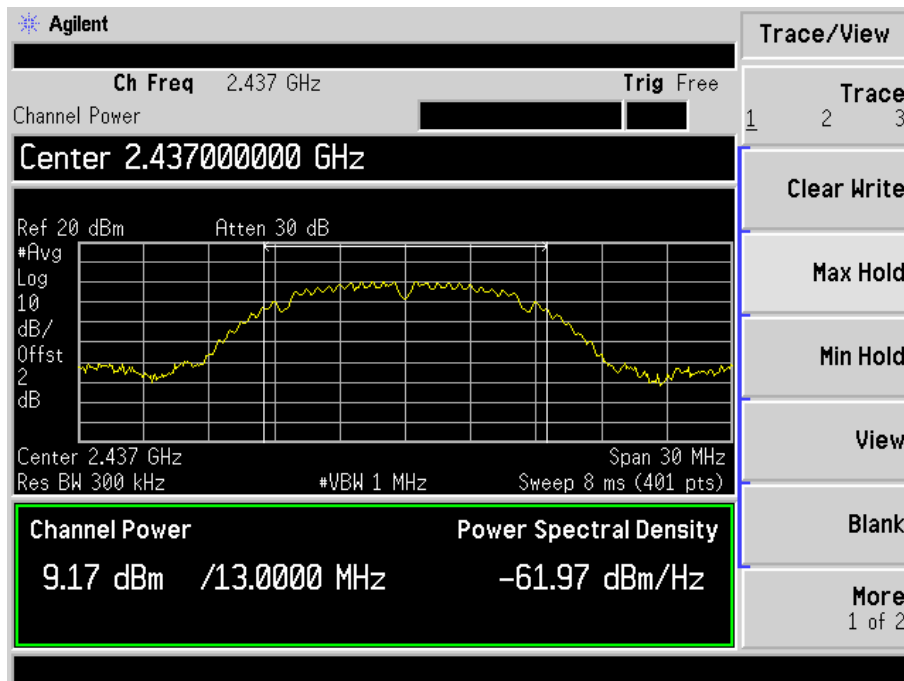


802.11b -11Mbps-High Channel

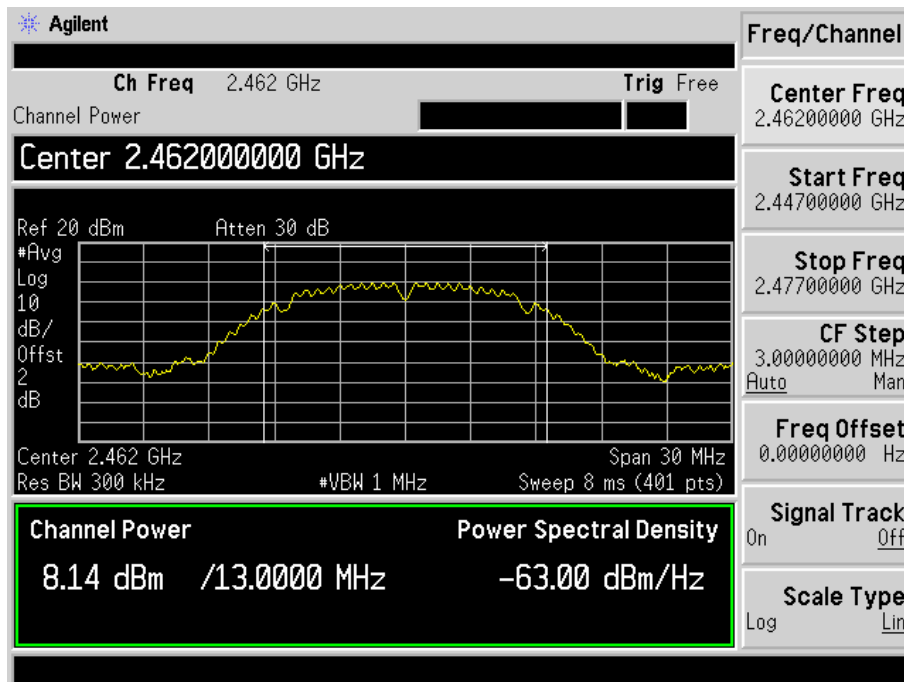


802.11g-54Mbps-Low Channel

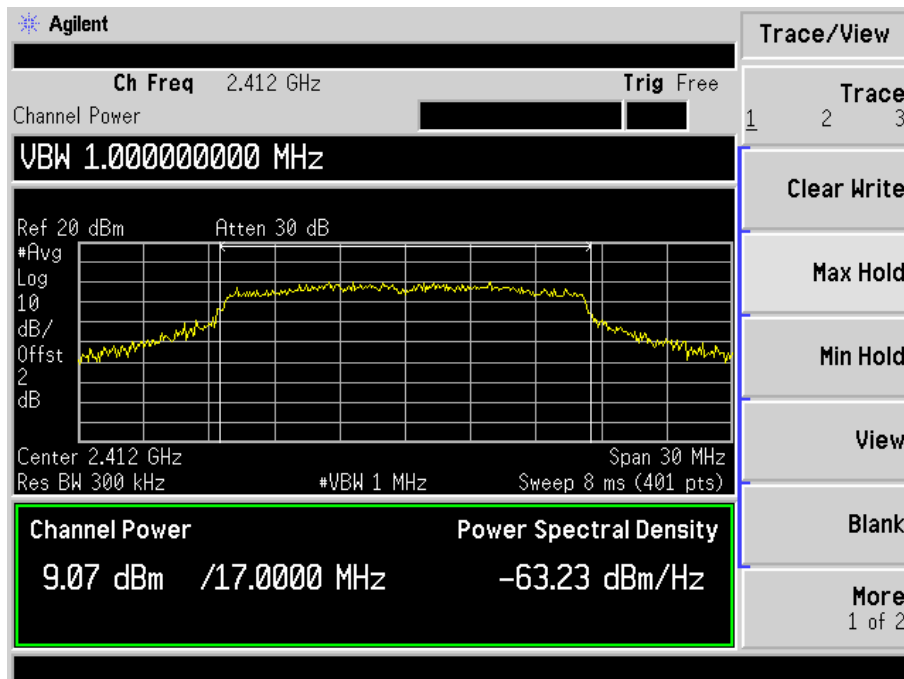


802.11g-54Mbps-Middle Channel

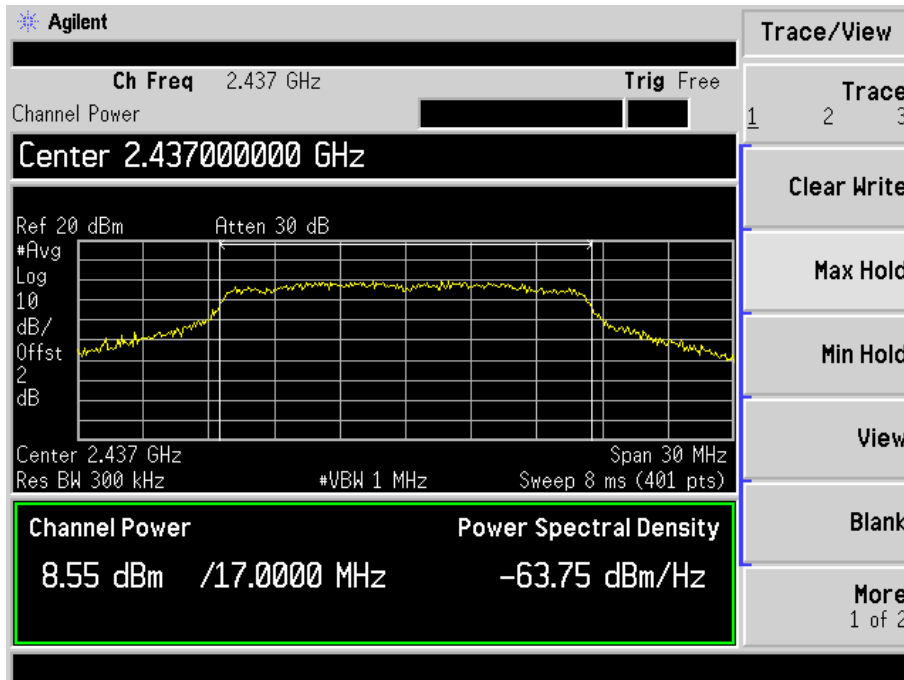


802.11g-54Mbps-High Channel

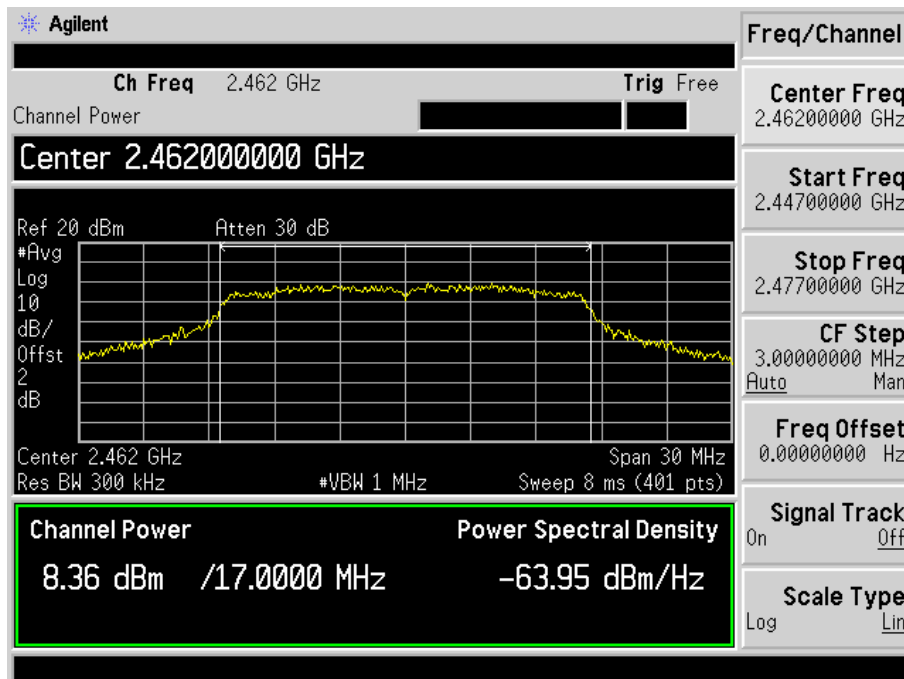


802.11n-HT20-MCS7-Low Channel

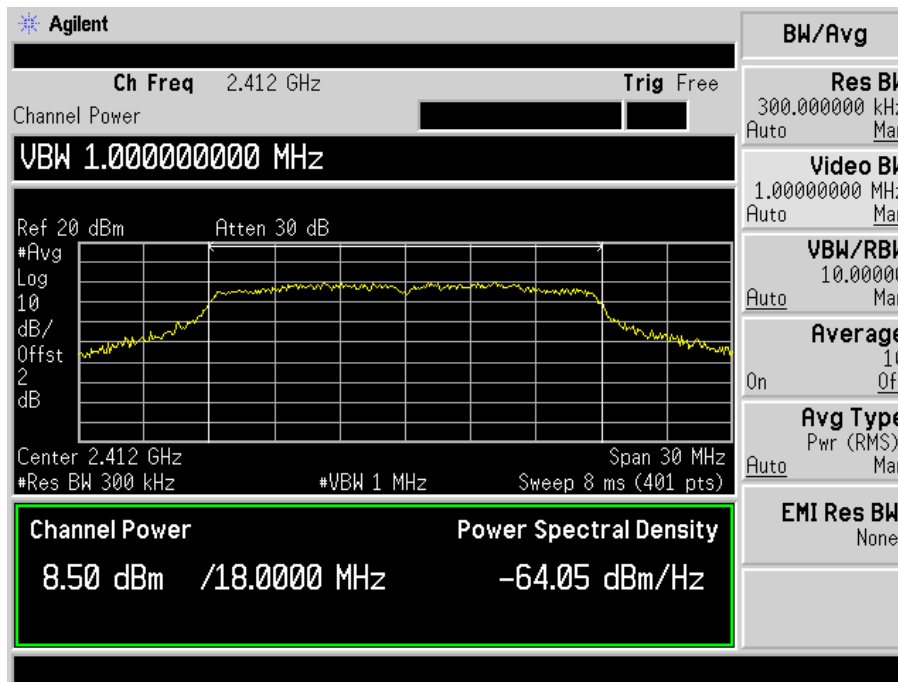


802.11n-HT20-MCS7-Middle Channel

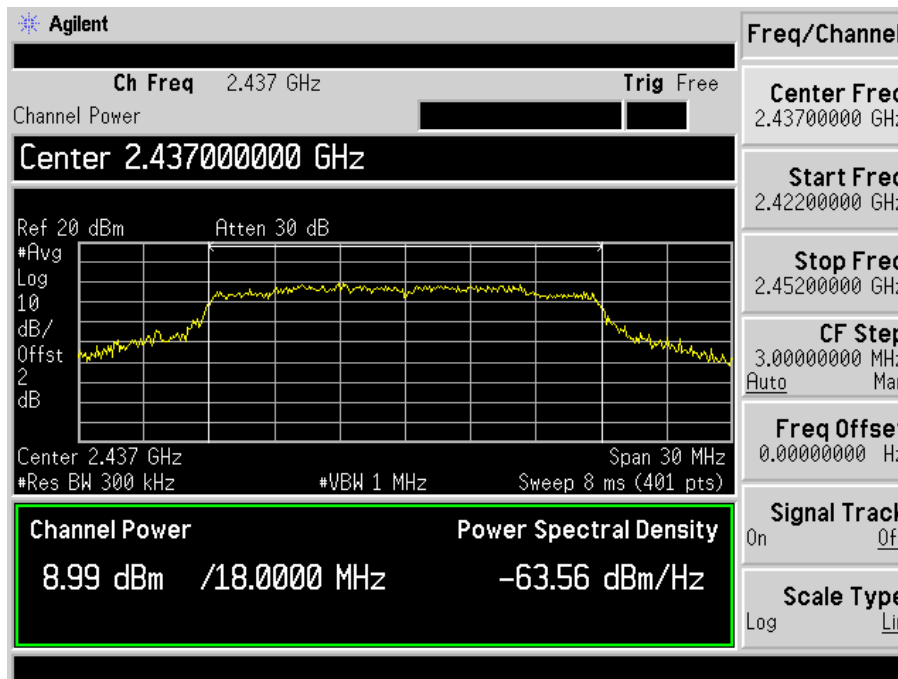


802.11n-HT20-MCS7-High Channel

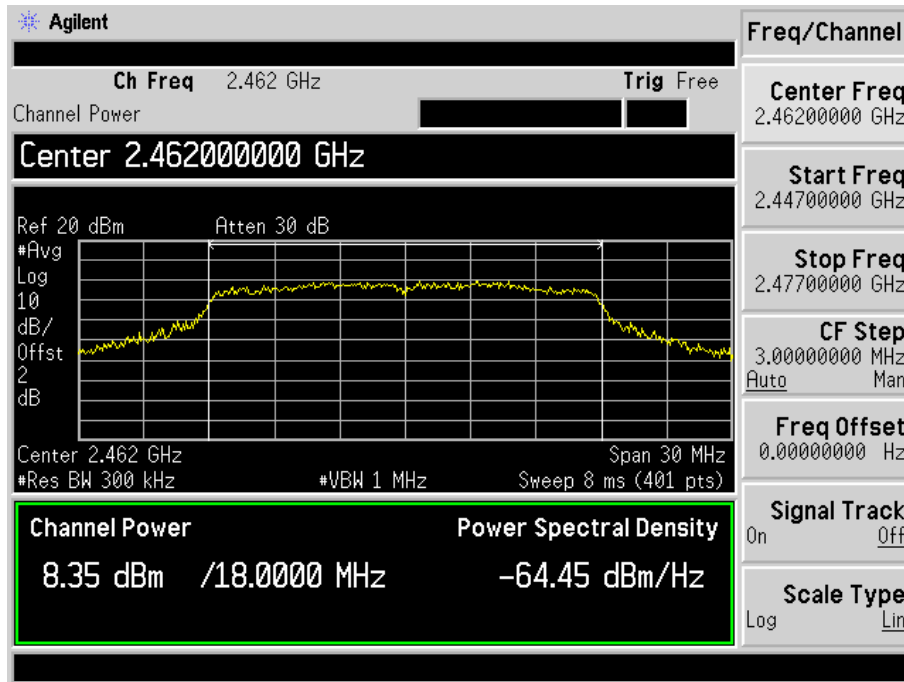


802.11n-HT40-MCS7-Low Channel

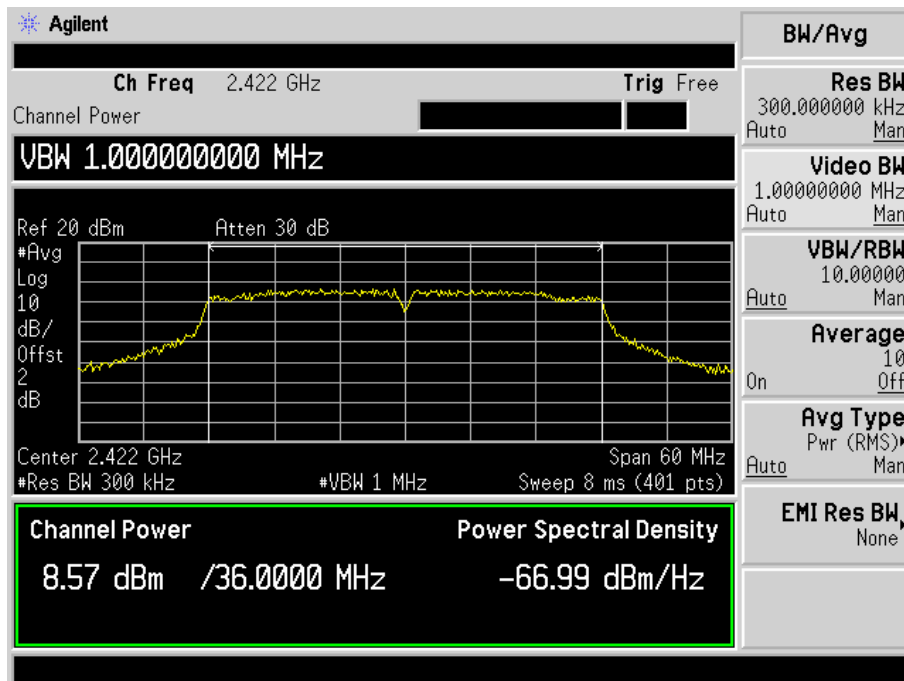

802.11n-HT40-MCS7-Middle Channel

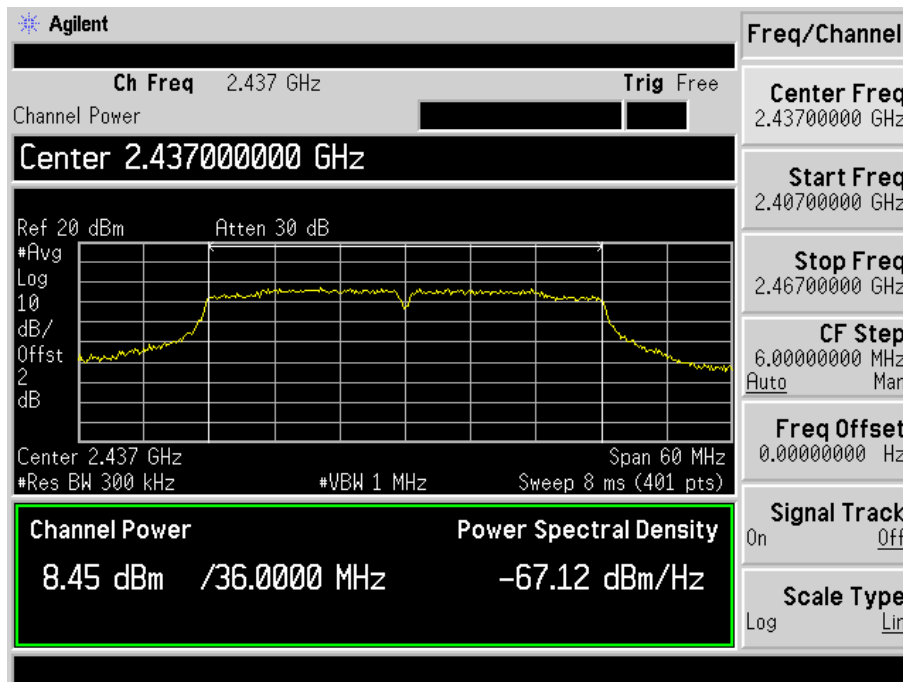


802.11n-HT40-MCS7-High Channel

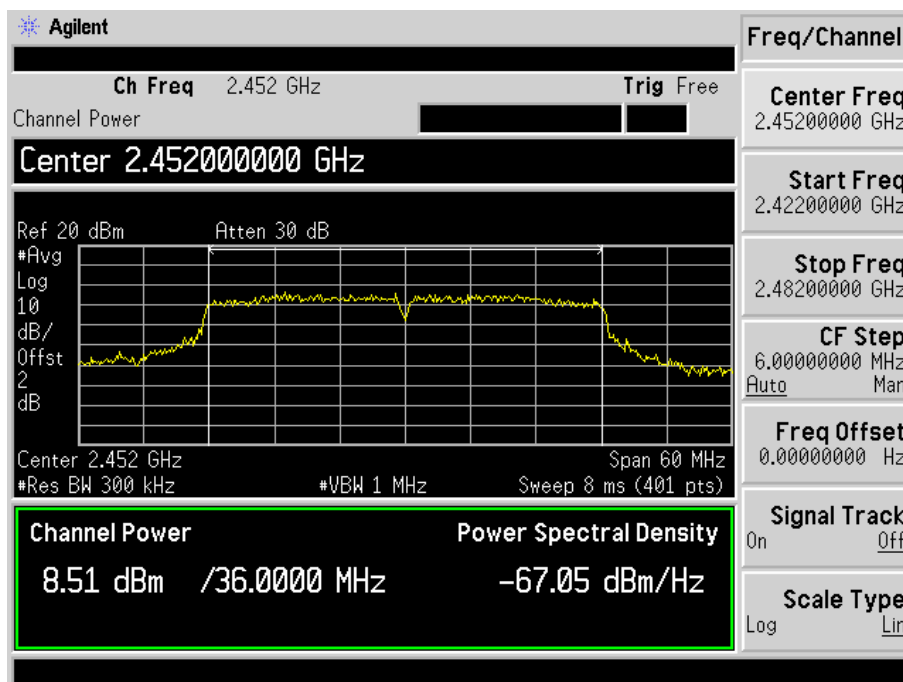


Antenna B


802.11b-11Mbps-Low Channel

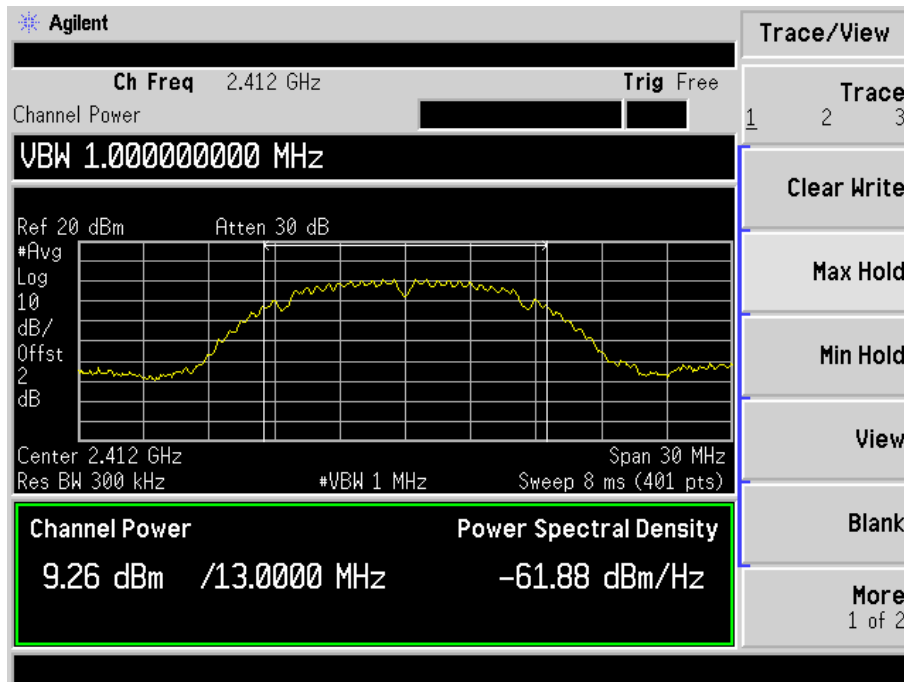


802.11b -11Mbps-Middle Channel

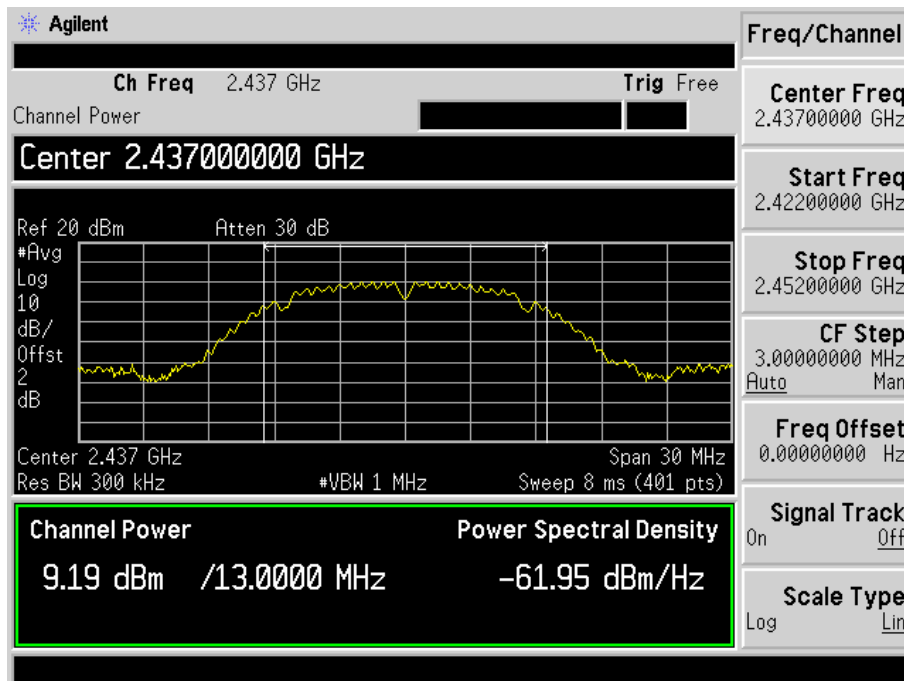


802.11b -11Mbps-High Channel

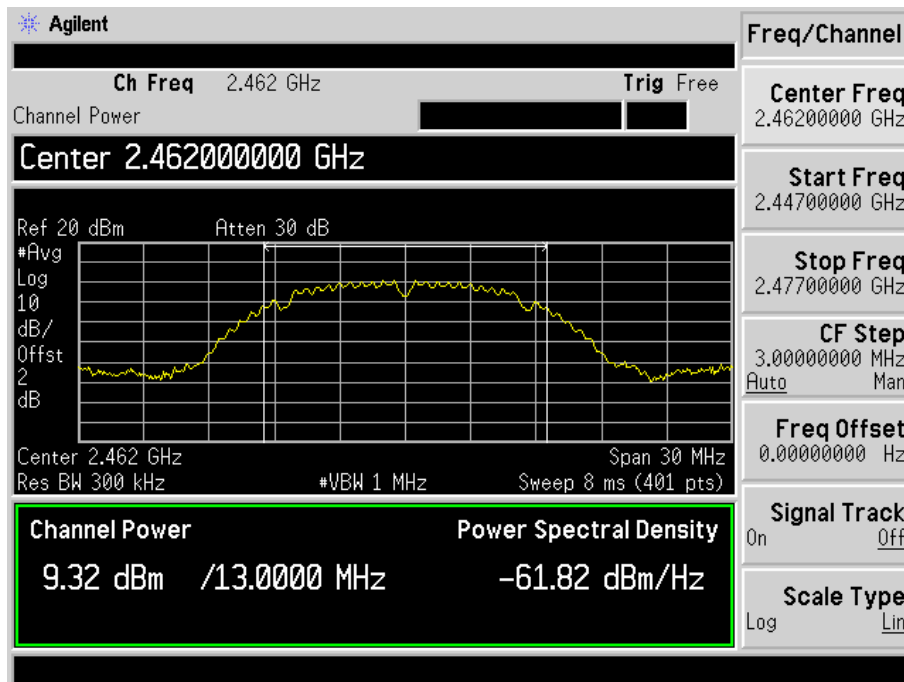


802.11g-54Mbps-Low Channel

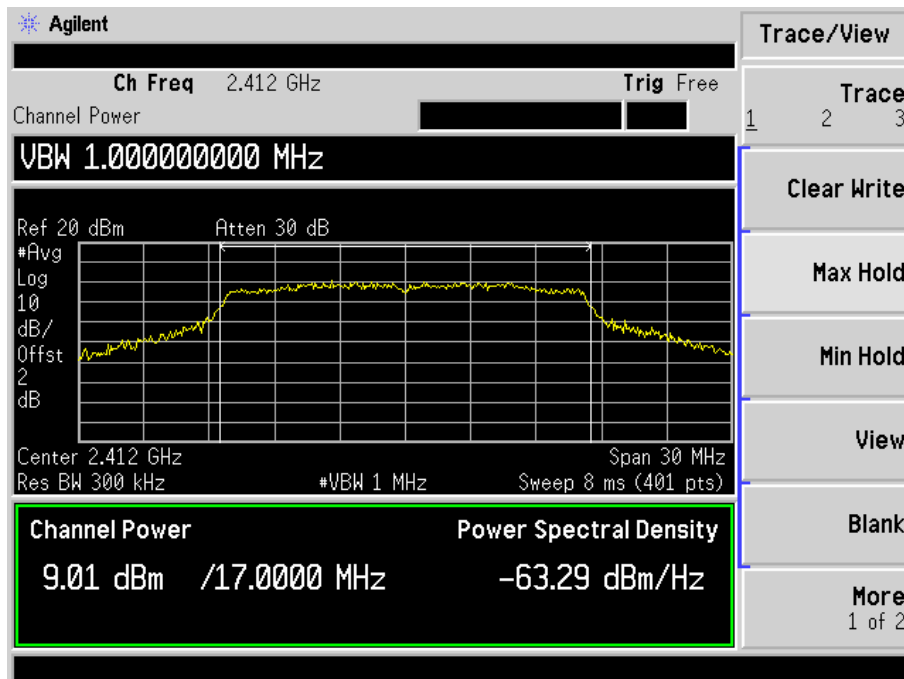


802.11g-54Mbps-Middle Channel

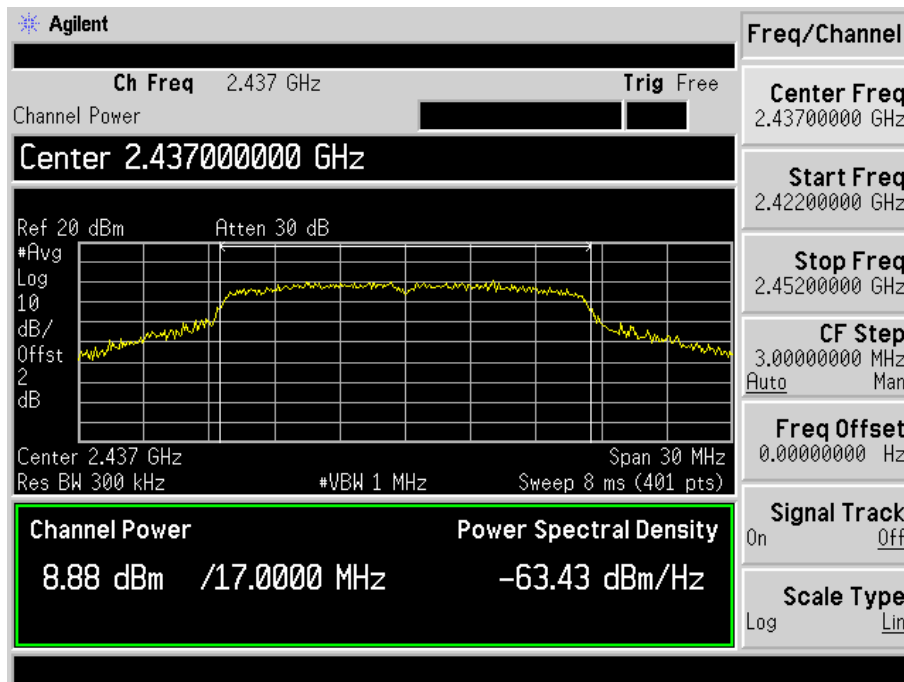


802.11g-54Mbps-High Channel

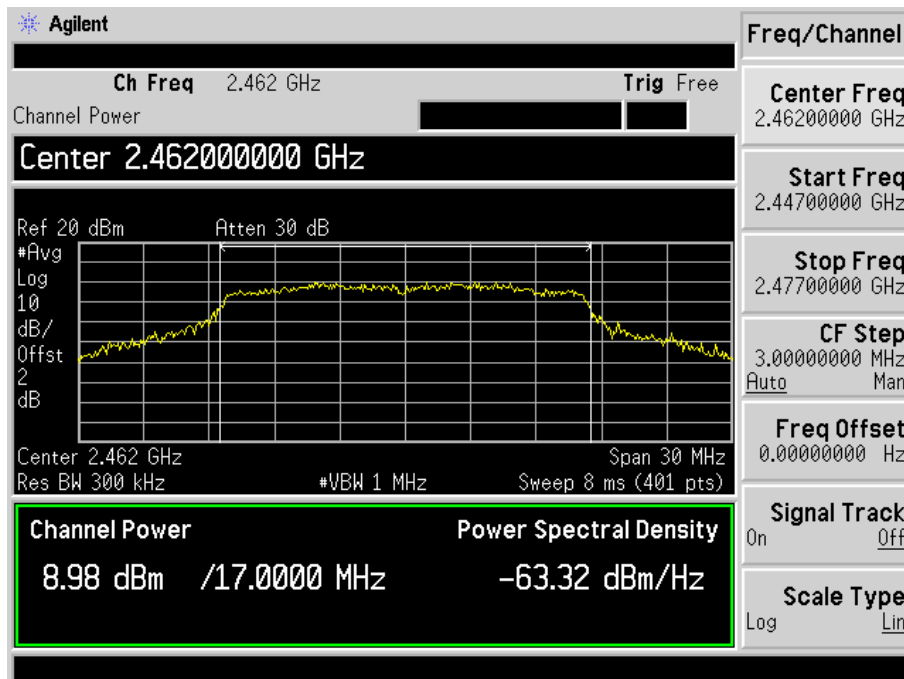


802.11n-HT20-MCS7-Low Channel

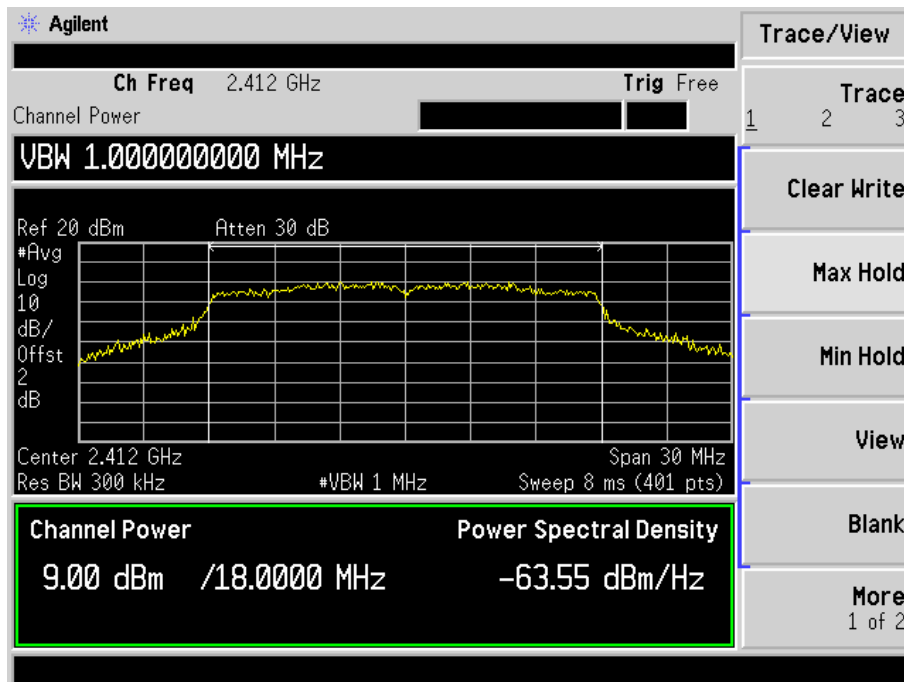


802.11n-HT20-MCS7-Middle Channel

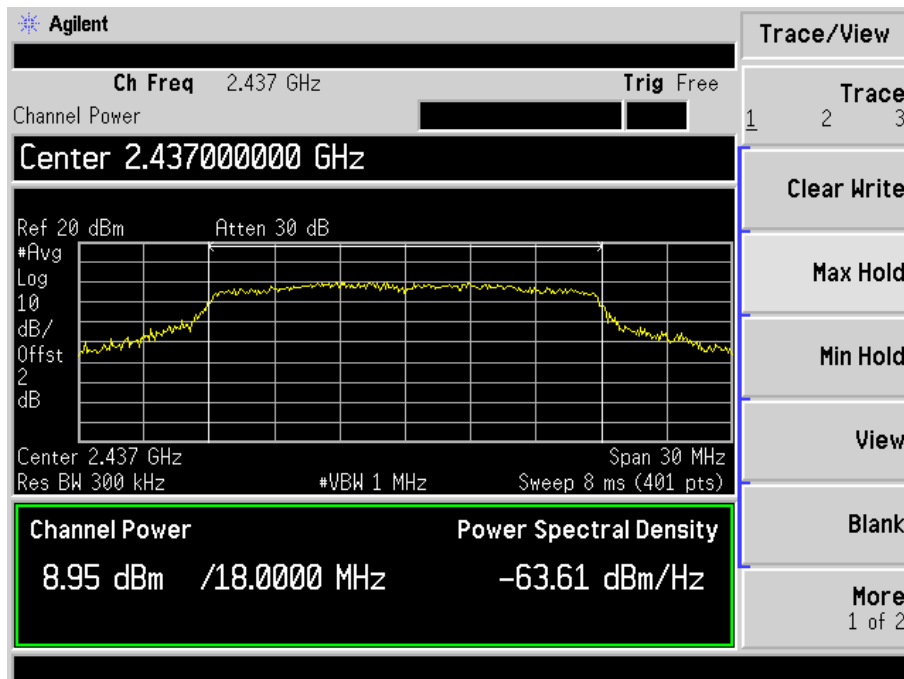


802.11n-HT20-MCS7-High Channel

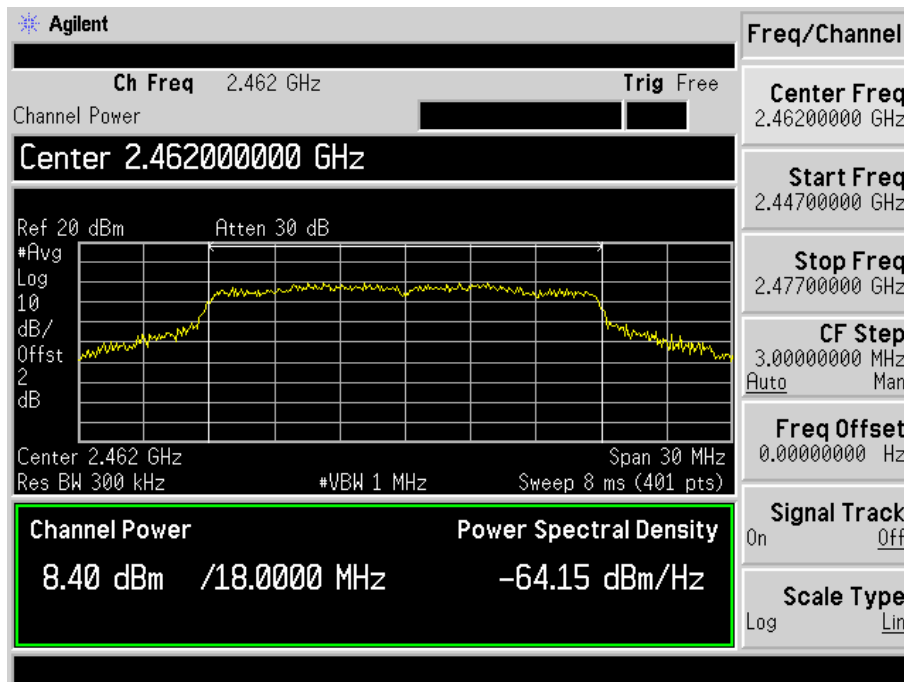


802.11n-HT40-MCS7-Low Channel

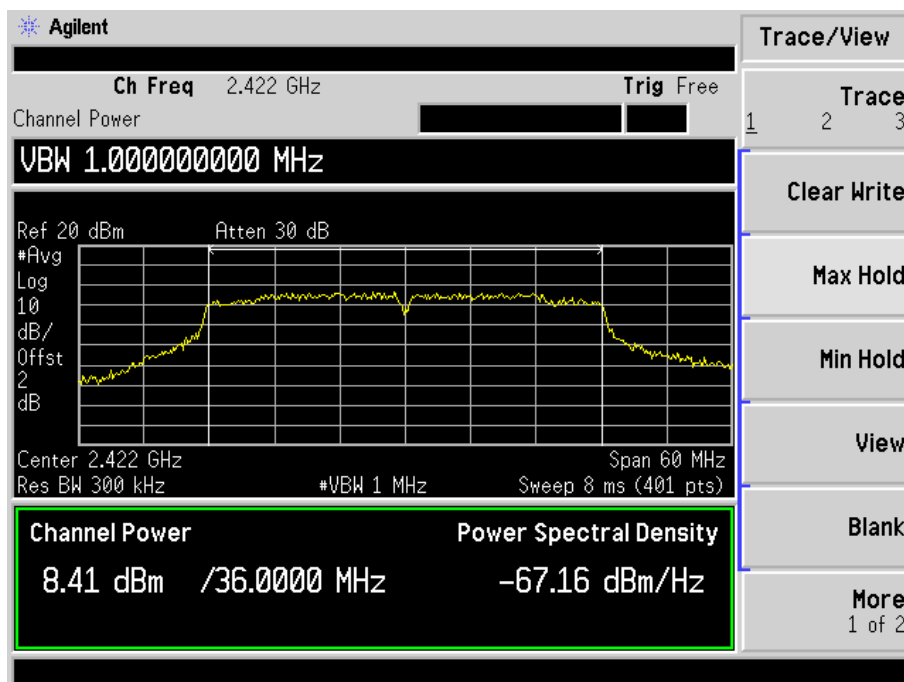

802.11n-HT40-MCS7-Middle Channel

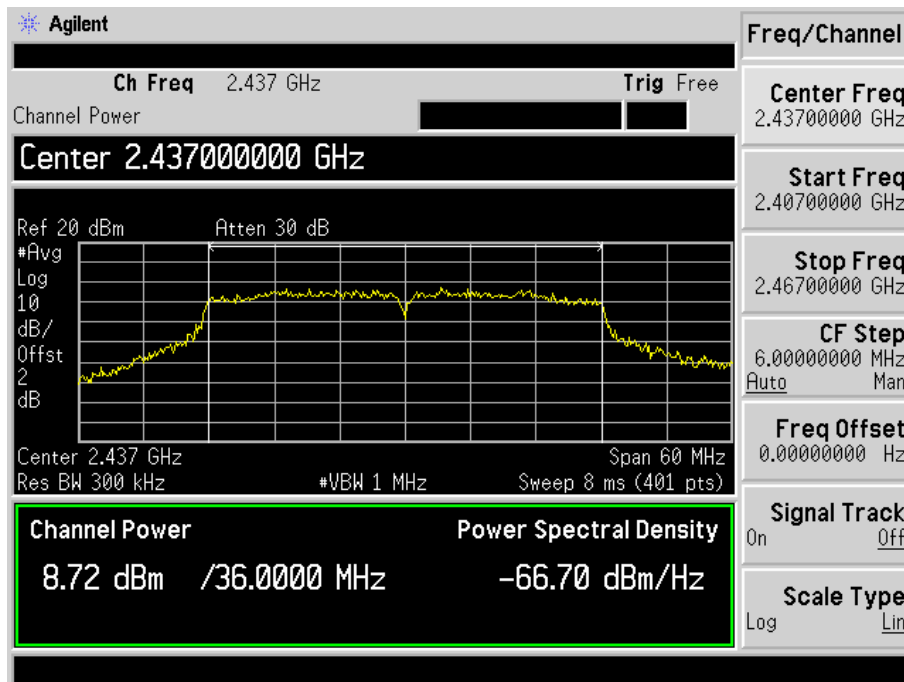

802.11n-HT40-MCS7-High Channel

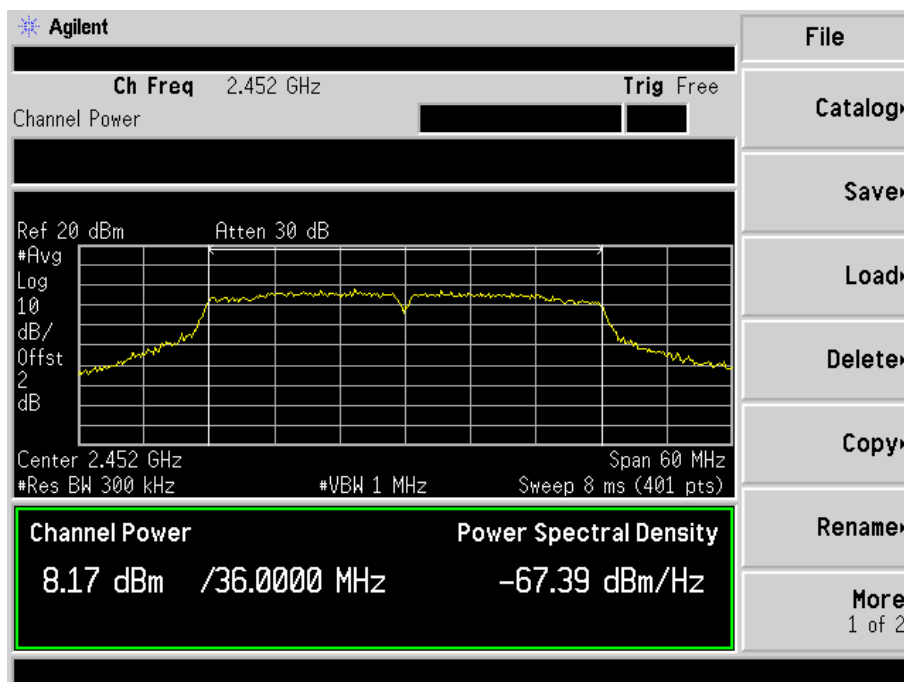

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

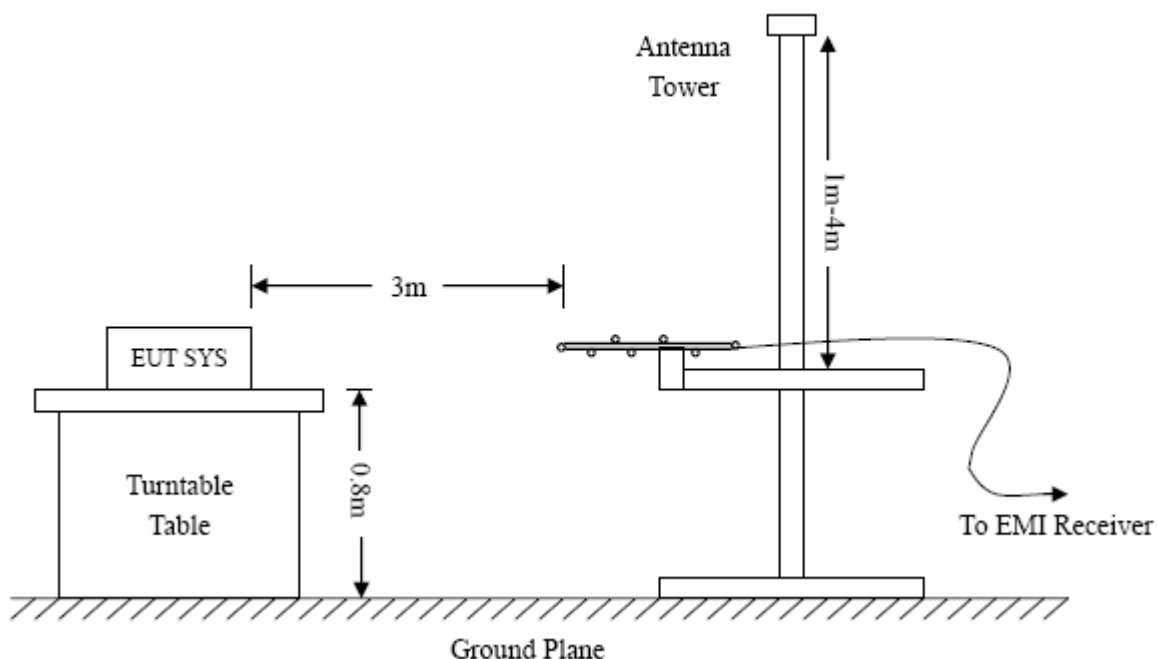

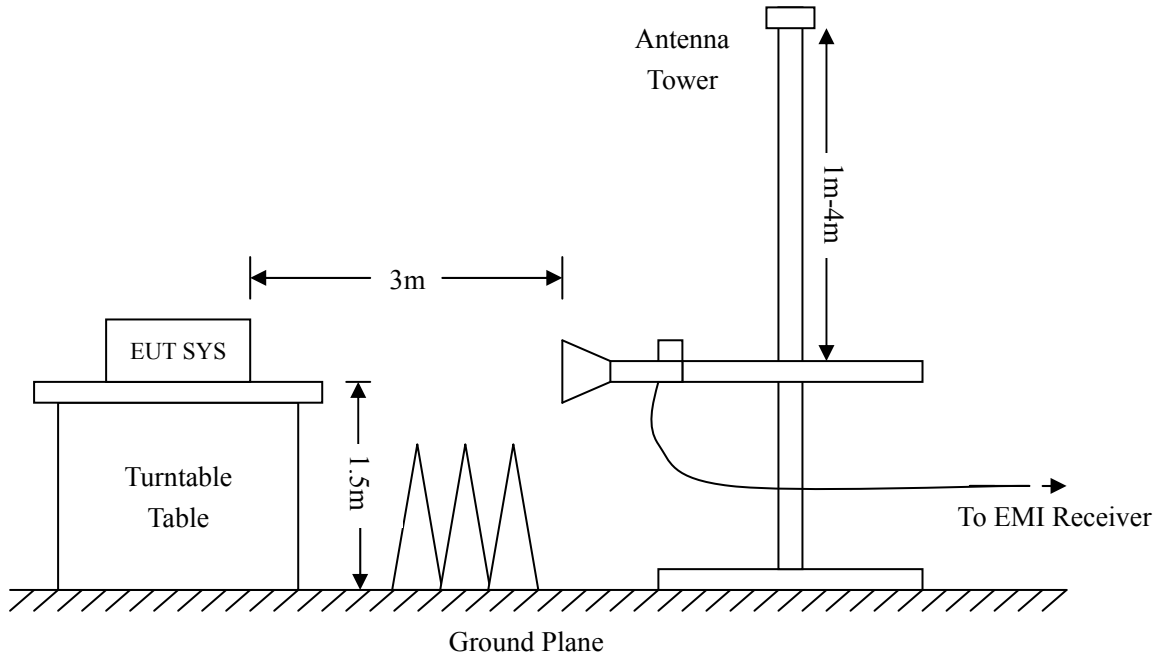

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Antenna A-802.11b worst case

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Tablet PC*
 Tested Model: *X5 Pro*
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz*
 Comment: *DC 7.6V*

Test Specification: *Horizontal*

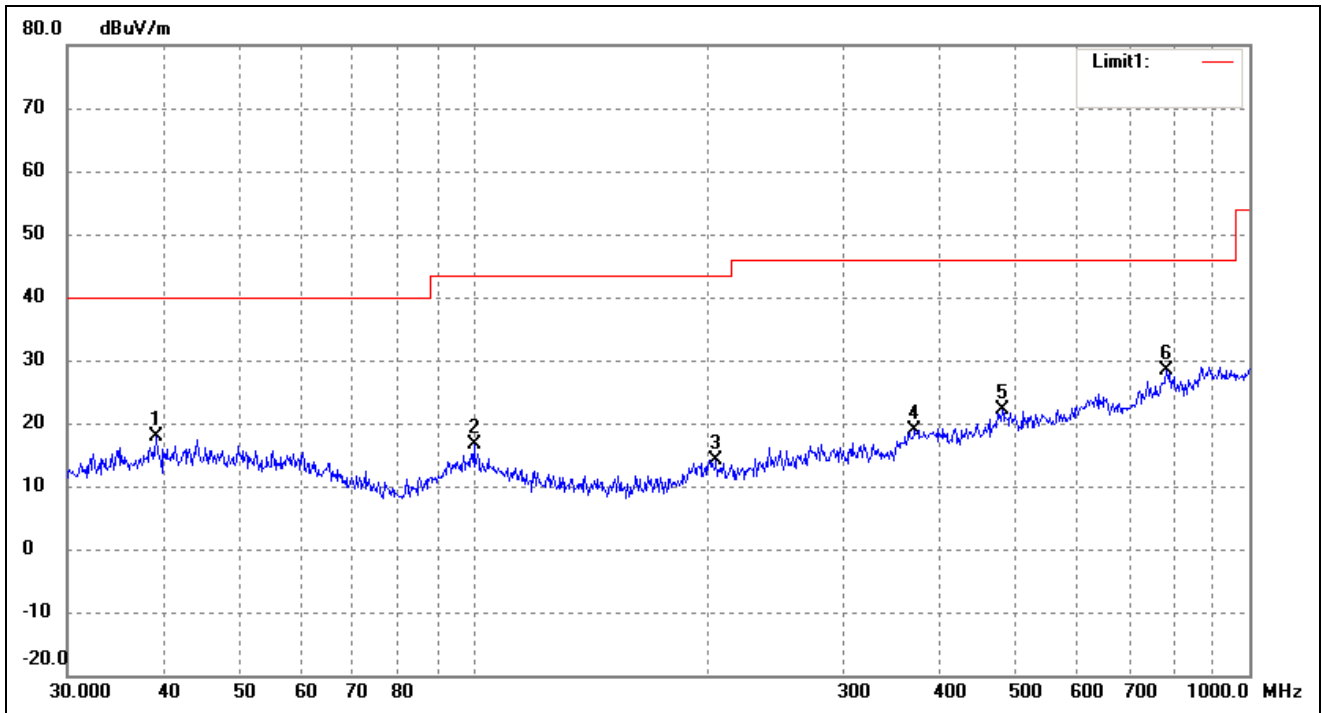

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	28.45	-10.63	17.82	40.00	-22.18	261	100	peak
2	100.2286	27.98	-11.43	16.55	43.50	-26.95	99	100	peak
3	205.6751	26.03	-11.85	14.18	43.50	-29.32	305	100	peak
4	370.7023	26.38	-7.41	18.97	46.00	-27.03	109	100	peak
5	480.5276	27.44	-5.36	22.08	46.00	-23.92	106	100	peak
6	782.3453	27.89	0.50	28.39	46.00	-17.61	204	100	peak

Test Specification: Vertical

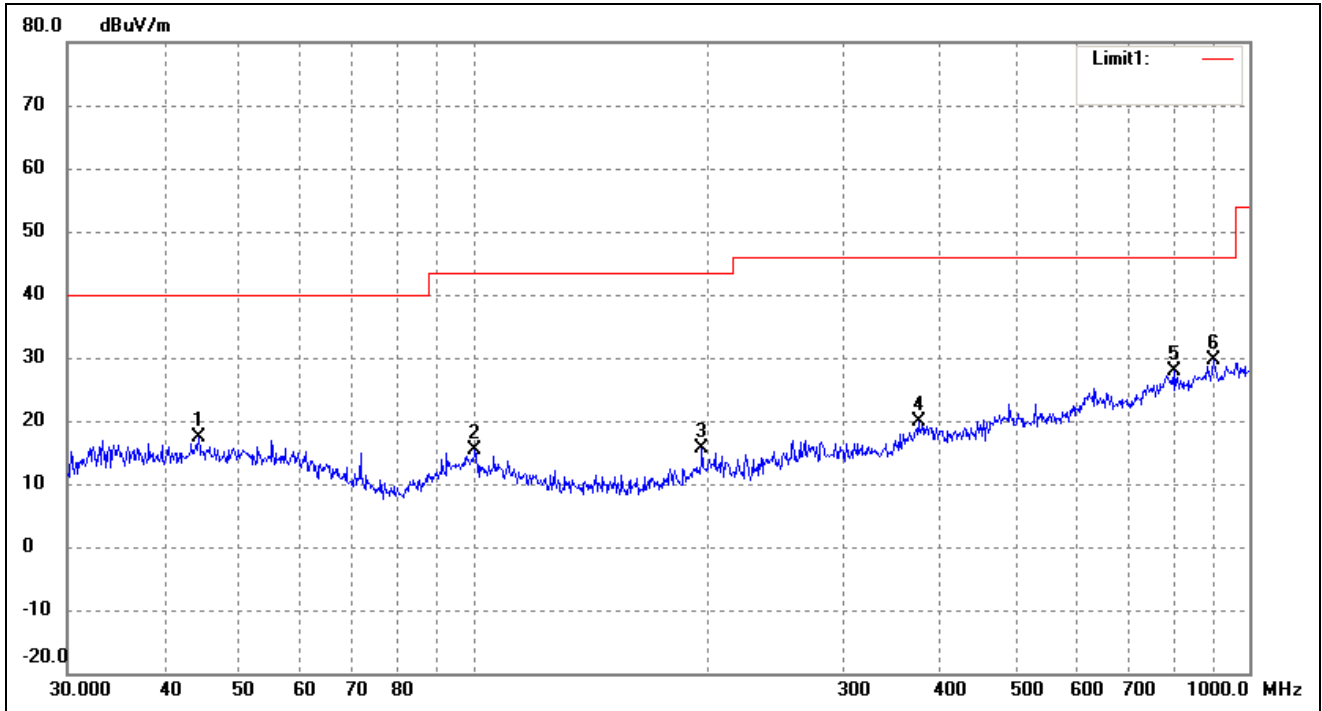


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.2752	27.85	-10.45	17.40	40.00	-22.60	322	100	peak
2	100.5806	26.96	-11.46	15.50	43.50	-28.00	92	100	peak
3	197.2001	27.71	-11.97	15.74	43.50	-27.76	359	100	peak
4	374.6226	27.21	-7.24	19.97	46.00	-26.03	119	100	peak
5	801.7863	27.96	-0.13	27.83	46.00	-18.17	167	100	peak
6	900.1474	28.24	1.40	29.64	46.00	-16.36	342	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: DC 7.6V

Test Specification: Horizontal

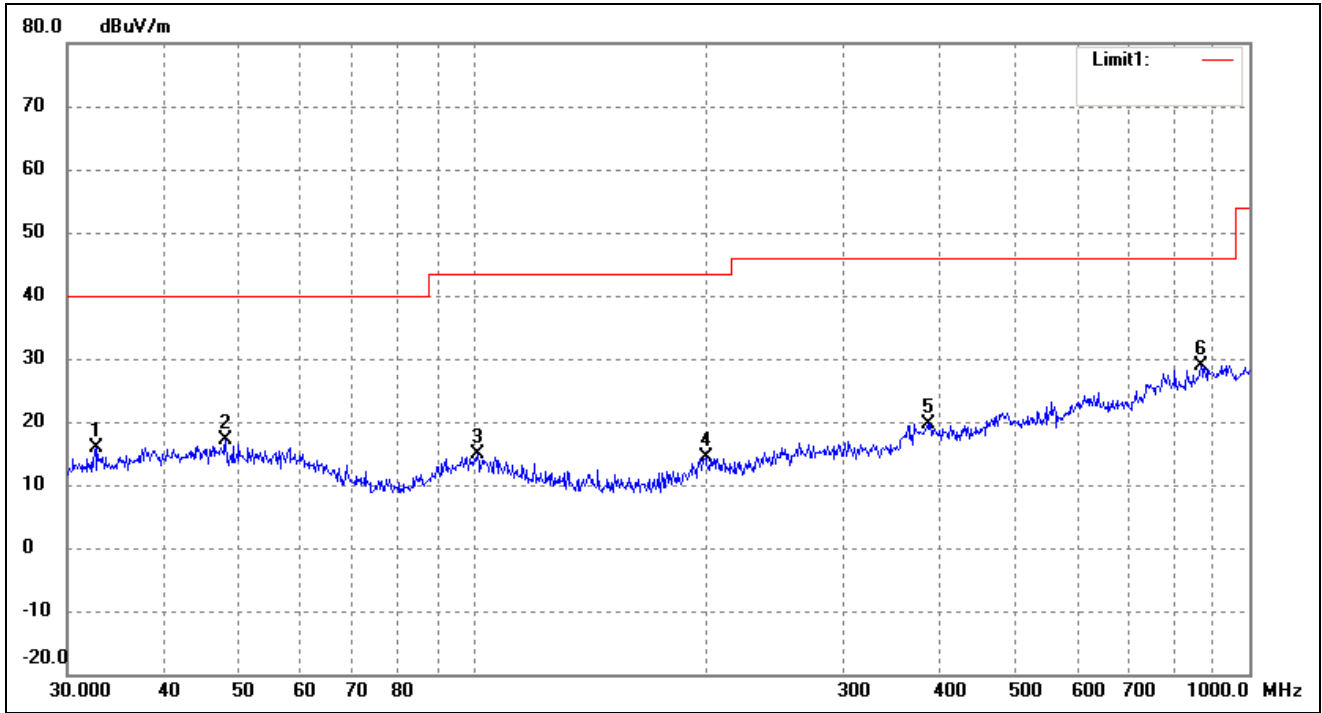

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.6340	27.97	-12.10	15.87	40.00	-24.13	281	100	peak
2	47.9940	27.81	-10.66	17.15	40.00	-22.85	340	100	peak
3	101.2885	26.31	-11.55	14.76	43.50	-28.74	97	100	peak
4	199.2855	26.00	-11.69	14.31	43.50	-29.19	213	100	peak
5	385.2805	26.86	-7.16	19.70	46.00	-26.30	180	100	peak
6	866.0879	27.75	1.18	28.93	46.00	-17.07	106	100	peak

Test Specification: Vertical

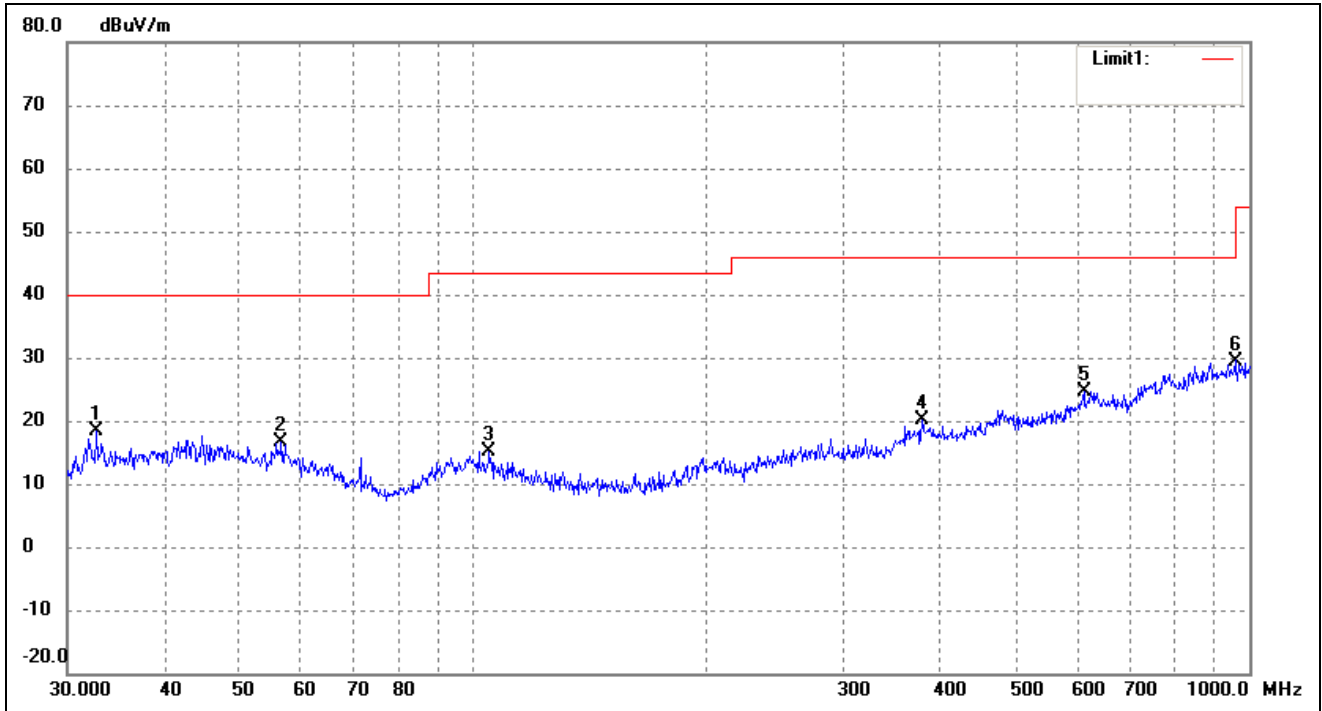


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.7486	30.45	-12.07	18.38	40.00	-21.62	144	100	peak
2	56.5929	29.20	-12.57	16.63	40.00	-23.37	154	100	peak
3	104.9033	27.01	-11.96	15.05	43.50	-28.45	67	100	peak
4	378.5843	27.13	-7.06	20.07	46.00	-25.93	213	100	peak
5	612.0642	27.96	-3.40	24.56	46.00	-21.44	134	100	peak
6	958.7943	27.90	1.60	29.50	46.00	-16.50	221	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: DC 7.6V

Test Specification: Horizontal

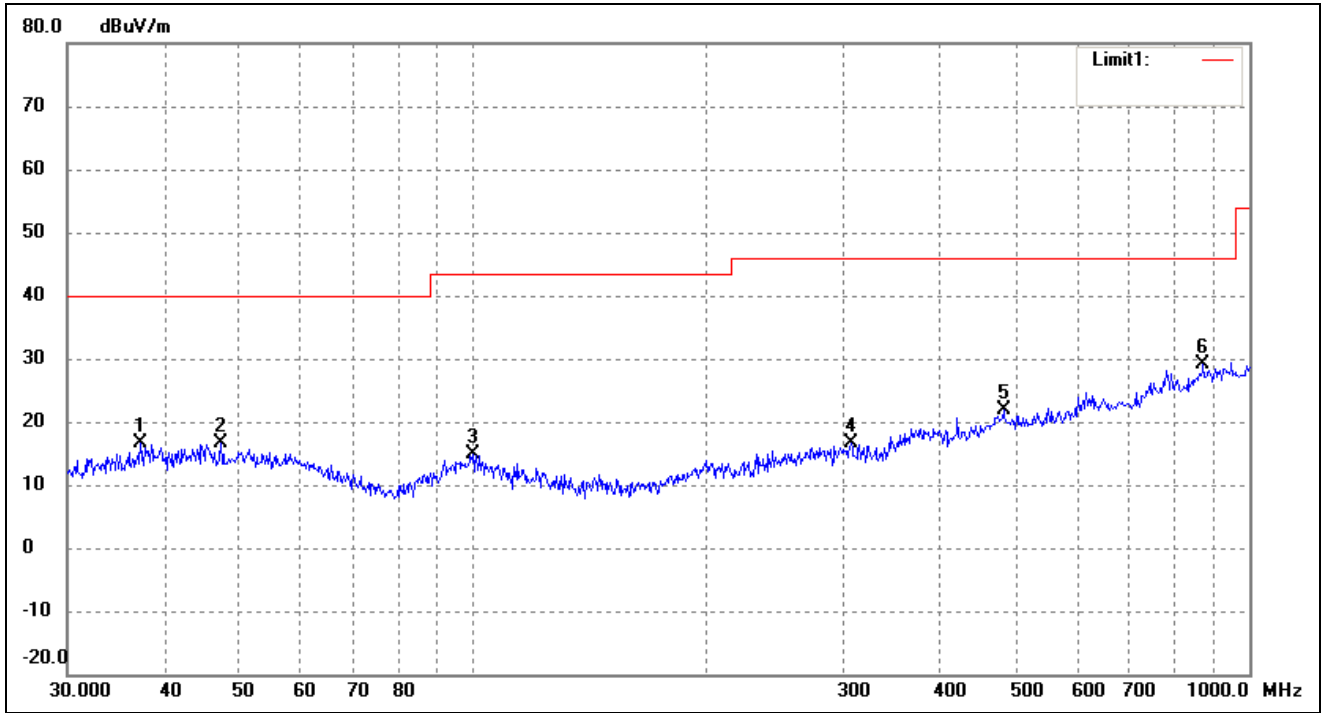

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.2855	27.77	-11.03	16.74	40.00	-23.26	172	100	peak
2	47.3255	27.36	-10.64	16.72	40.00	-23.28	185	100	peak
3	99.8777	26.41	-11.43	14.98	43.50	-28.52	68	100	peak
4	306.7537	26.41	-9.70	16.71	46.00	-29.29	102	100	peak
5	482.2156	27.28	-5.44	21.84	46.00	-24.16	61	100	peak
6	872.1832	27.70	1.31	29.01	46.00	-16.99	203	100	peak

Test Specification: Vertical

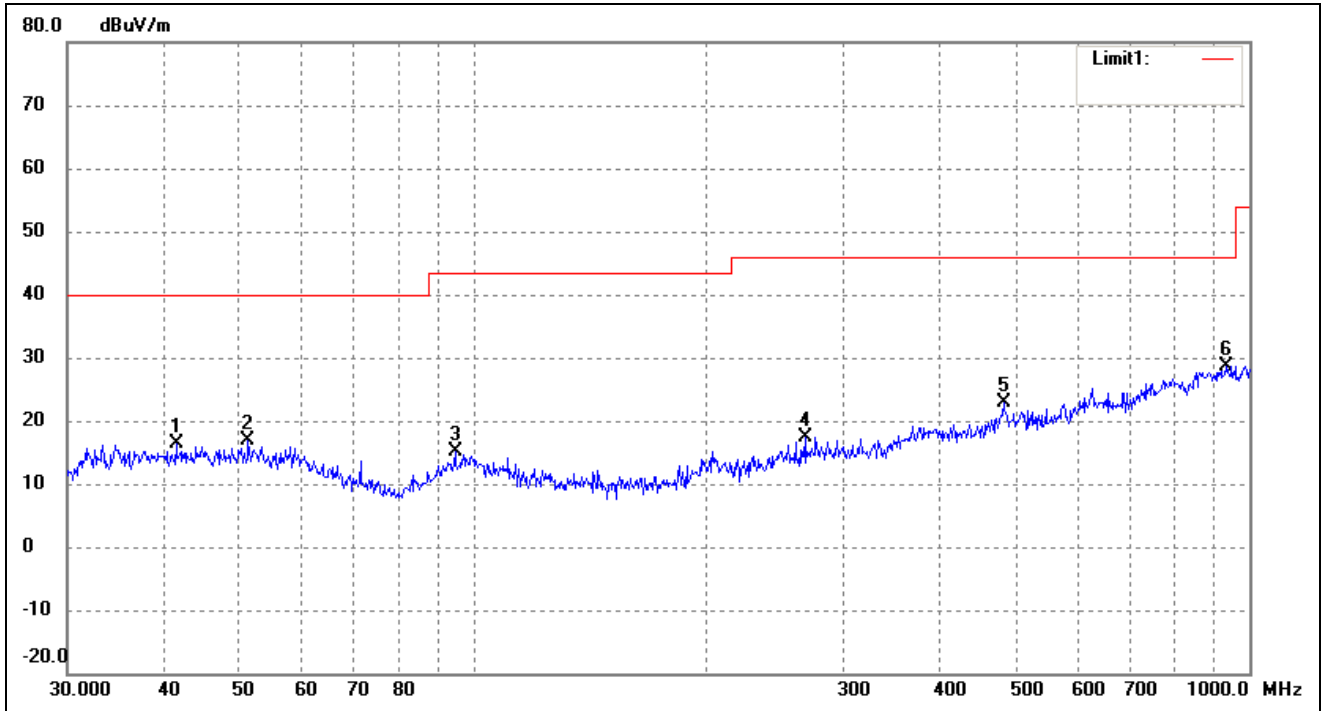


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4215	26.84	-10.42	16.42	40.00	-23.58	50	100	peak
2	51.3005	27.80	-10.83	16.97	40.00	-23.03	109	100	peak
3	94.7601	27.69	-12.56	15.13	43.50	-28.37	131	100	peak
4	267.5455	27.25	-9.85	17.40	46.00	-28.60	126	100	peak
5	482.2156	28.28	-5.44	22.84	46.00	-23.16	358	100	peak
6	932.2715	26.60	2.09	28.69	46.00	-17.31	247	100	peak

Antenna B-802.11b worst case

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Tablet PC*
 Tested Model: *X5 Pro*
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz*
 Comment: *DC 7.6V*

Test Specification: *Horizontal*

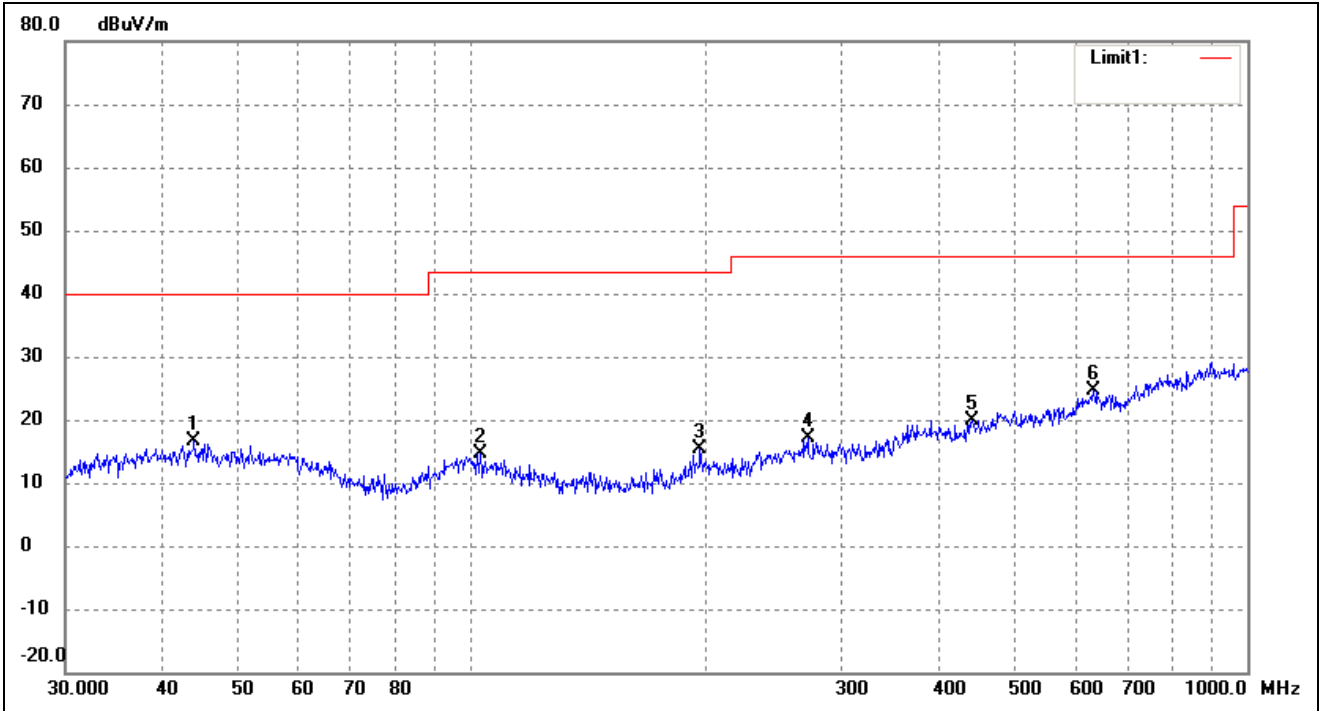

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.9658	27.18	-10.56	16.62	40.00	-23.38	327	100	peak
2	102.7192	26.42	-11.71	14.71	43.50	-28.79	99	100	peak
3	197.2001	27.29	-11.97	15.32	43.50	-28.18	97	100	peak
4	271.3246	26.80	-9.76	17.04	46.00	-28.96	96	100	peak
5	441.7426	27.38	-7.38	20.00	46.00	-26.00	306	100	peak
6	633.9073	27.77	-3.08	24.69	46.00	-21.31	305	100	peak

Test Specification: Vertical

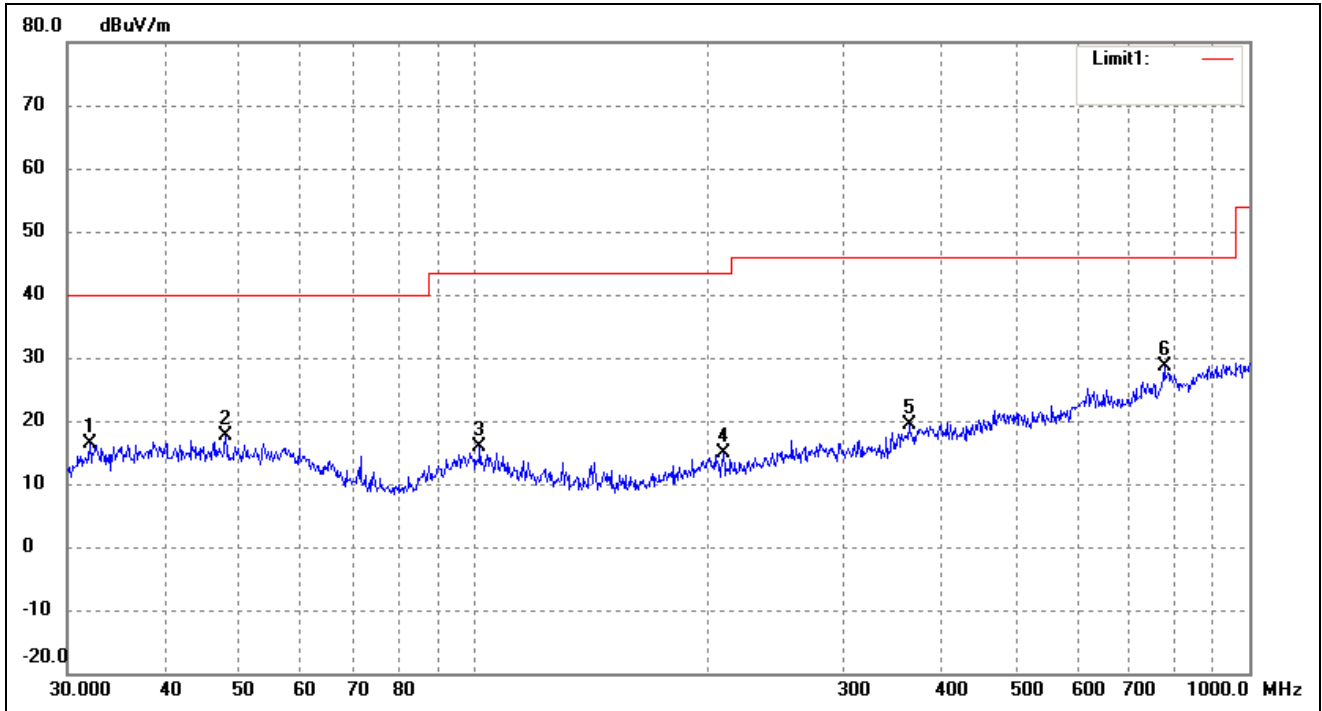


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.0668	28.69	-12.23	16.46	40.00	-23.54	299	100	peak
2	47.9940	27.94	-10.42	17.52	40.00	-22.48	99	100	peak
3	102.0014	27.52	-11.63	15.89	43.50	-27.61	119	100	peak
4	210.0482	26.90	-12.04	14.86	43.50	-28.64	99	100	peak
5	364.2595	27.03	-7.71	19.32	46.00	-26.68	244	100	peak
6	776.8778	28.31	0.30	28.61	46.00	-17.39	232	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: DC 7.6V

Test Specification: Horizontal

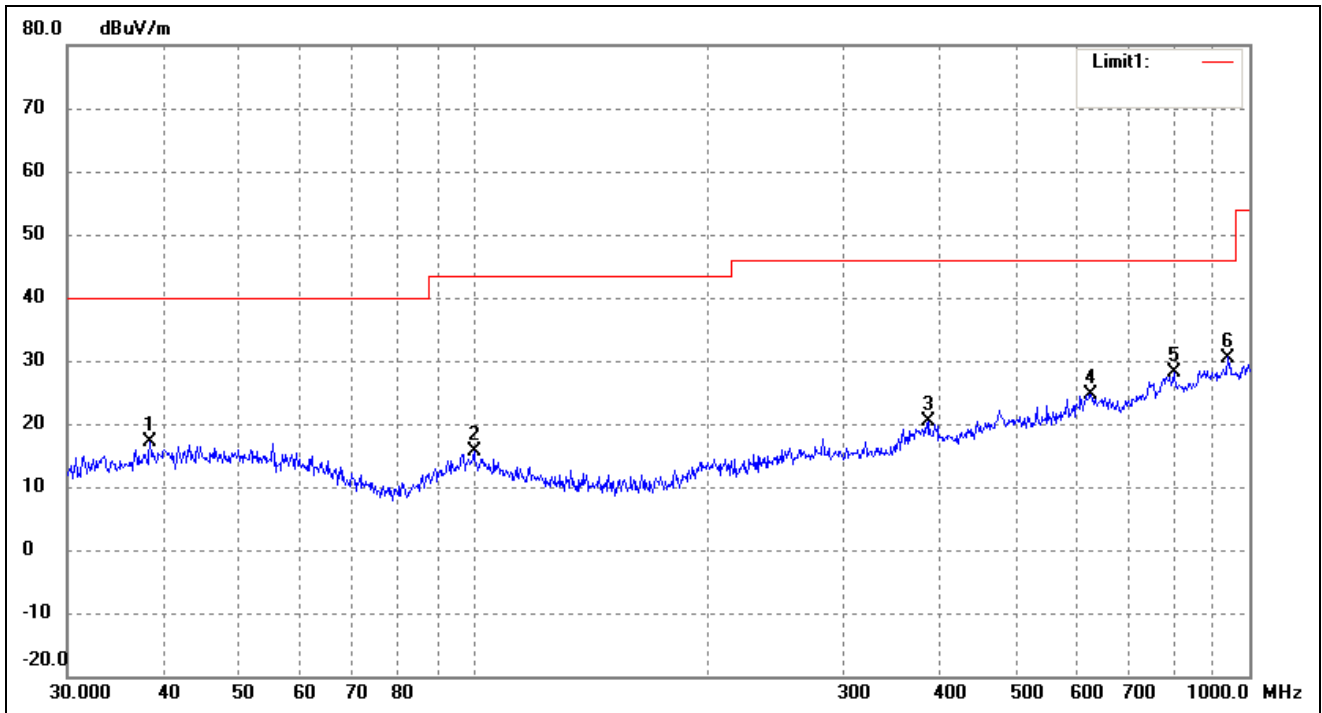

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	27.91	-10.78	17.13	40.00	-22.87	312	100	peak
2	100.2286	27.13	-11.43	15.70	43.50	-27.80	347	100	peak
3	386.6338	27.58	-7.20	20.38	46.00	-25.62	76	100	peak
4	625.0780	27.62	-2.90	24.72	46.00	-21.28	209	100	peak
5	798.9797	28.10	-0.07	28.03	46.00	-17.97	245	100	peak
6	938.8326	28.23	2.27	30.50	46.00	-15.50	109	100	peak

Test Specification: Vertical

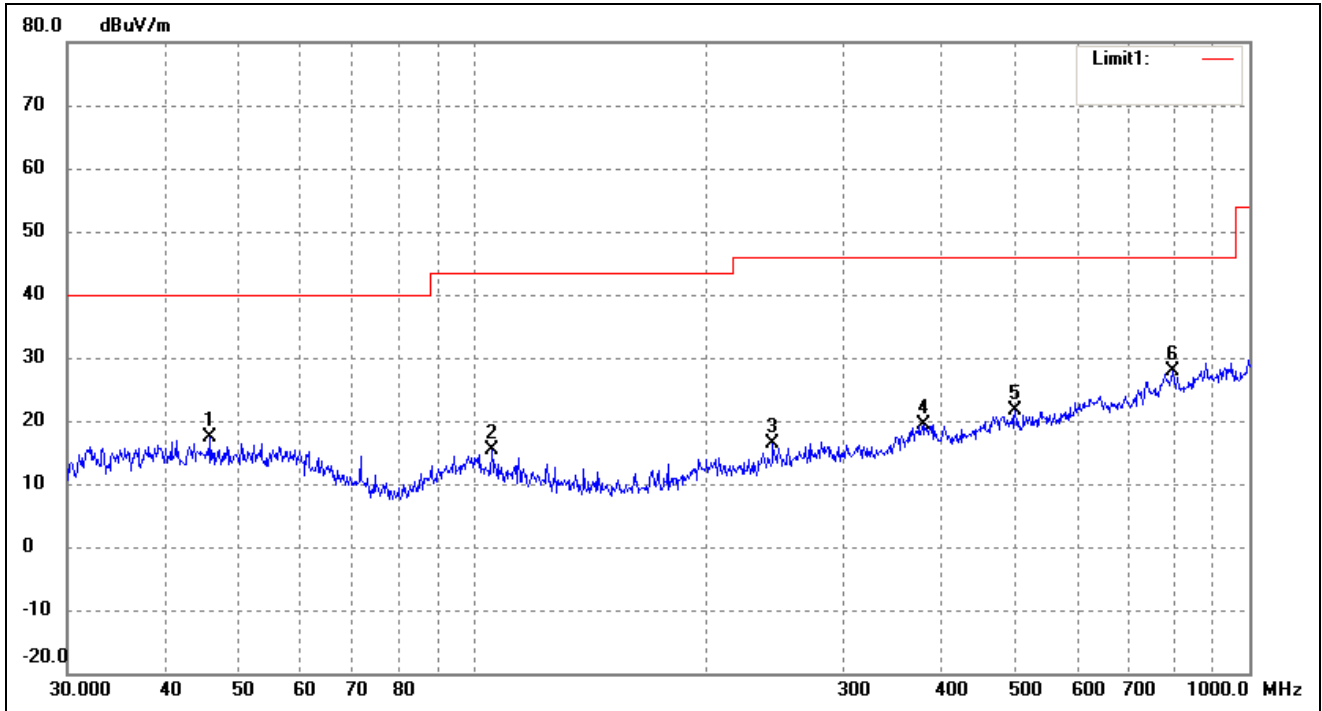


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	27.76	-10.44	17.32	40.00	-22.68	173	100	peak
2	105.6415	27.33	-12.05	15.28	43.50	-28.22	330	100	peak
3	243.3772	27.09	-10.80	16.29	46.00	-29.71	60	100	peak
4	379.9141	26.49	-7.00	19.49	46.00	-26.51	344	100	peak
5	499.4247	27.77	-6.18	21.59	46.00	-24.41	121	100	peak
6	796.1830	27.84	0.03	27.87	46.00	-18.13	313	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: DC 7.6V

Test Specification: Horizontal

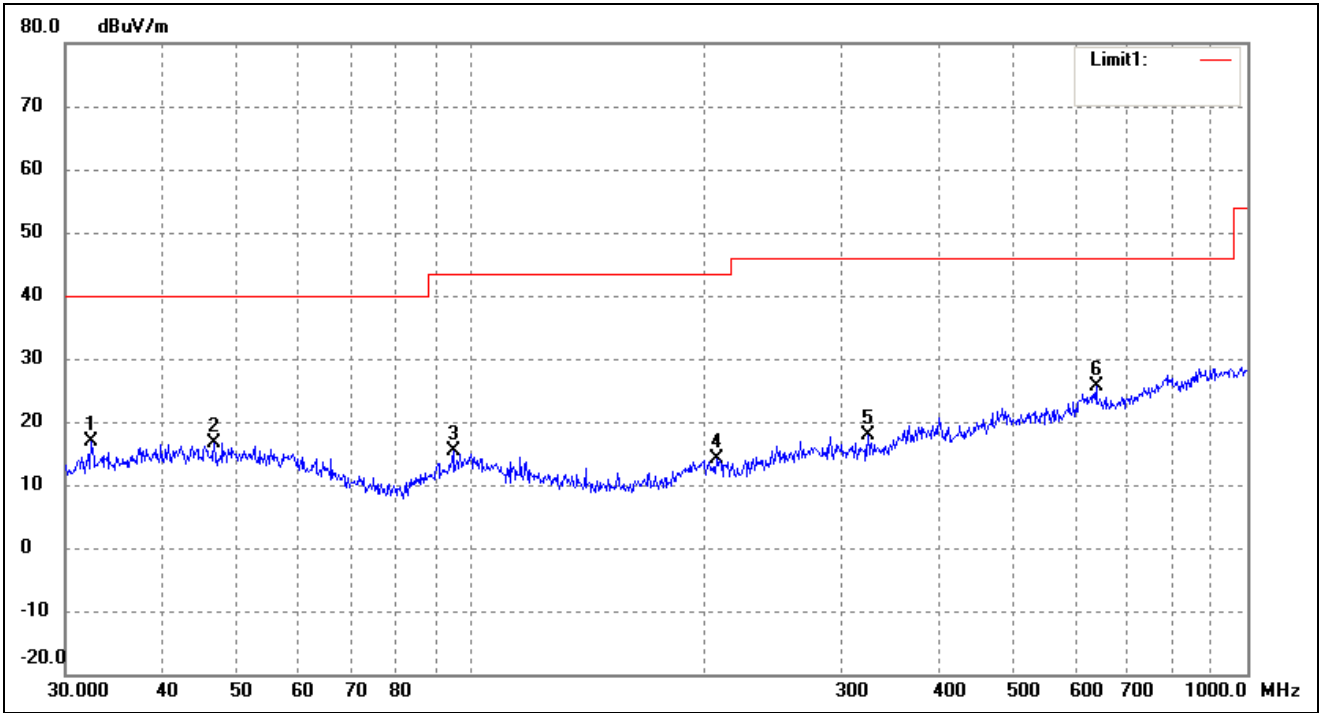

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	29.07	-12.15	16.92	40.00	-23.08	134	100	peak
2	46.6664	27.32	-10.64	16.68	40.00	-23.32	183	100	peak
3	94.7601	27.98	-12.56	15.42	43.50	-28.08	139	100	peak
4	207.1226	25.99	-11.92	14.07	43.50	-29.43	105	100	peak
5	324.4561	27.51	-9.67	17.84	46.00	-28.16	86	100	peak
6	638.3686	28.89	-3.16	25.73	46.00	-20.27	200	100	peak

Test Specification: Vertical

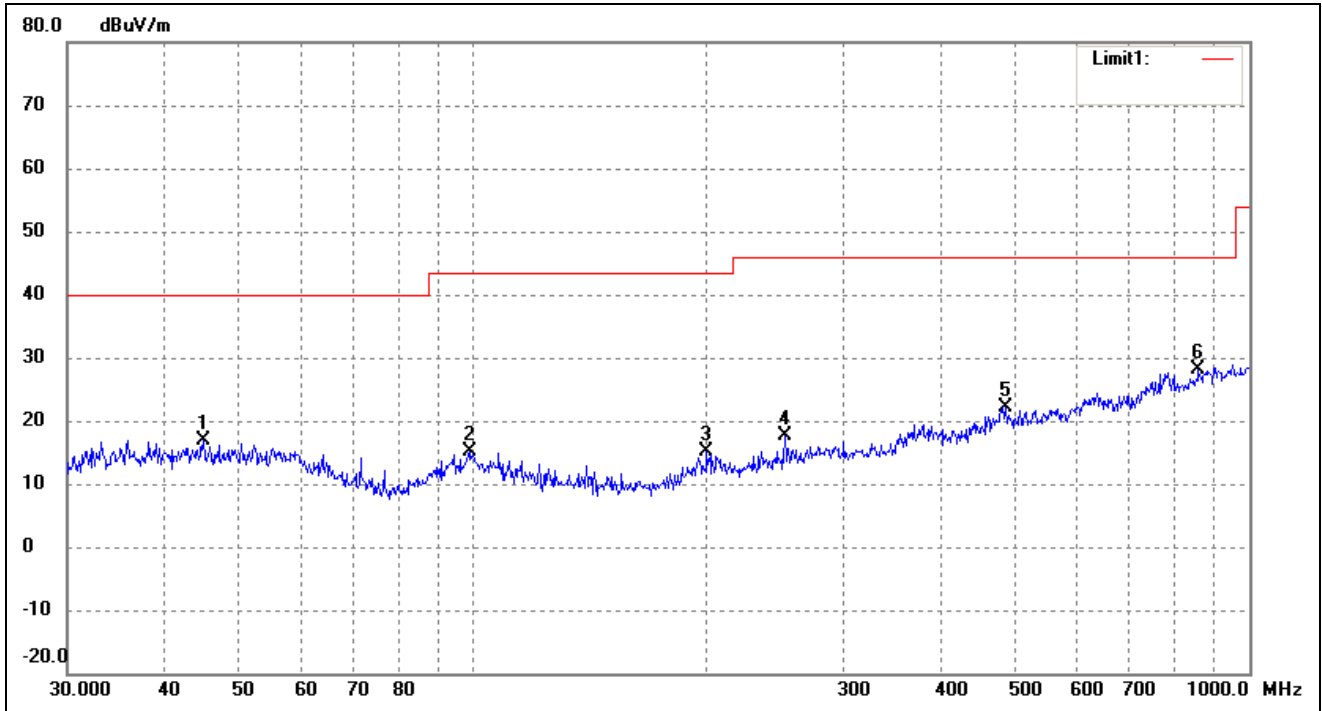

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	27.44	-10.44	17.00	40.00	-23.00	62	100	peak
2	98.8326	26.90	-11.66	15.24	43.50	-28.26	196	100	peak
3	199.9856	26.85	-11.60	15.25	43.50	-28.25	83	100	peak
4	252.0627	28.04	-10.42	17.62	46.00	-28.38	125	100	peak
5	485.6093	27.76	-5.58	22.18	46.00	-23.82	267	100	peak
6	860.0352	27.01	1.06	28.07	46.00	-17.93	169	100	peak

Spurious Emissions Above 1GHz

Test Mode: Antenna A-802.11b worst case

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.91	-3.86	57.05	74.00	-16.95	H	PK
4824.000	45.45	-3.86	41.59	54.00	-12.41	H	AV
7236.000	56.36	1.1	57.46	74.00	-16.54	H	PK
7236.000	44.55	1.1	45.65	54.00	-8.35	H	AV
4824.000	60.00	-3.86	56.14	74.00	-17.86	V	PK
4824.000	50.91	-3.86	47.05	54.00	-6.95	V	AV
7236.000	54.55	1.1	55.65	74.00	-18.35	V	PK
7236.000	46.36	1.1	47.46	54.00	-6.54	V	AV
Middle Channel-2437MHz							
4874.000	59.09	-3.74	55.35	74.00	-18.65	H	PK
4874.000	43.64	-3.74	39.90	54.00	-14.10	H	AV
7311.000	57.27	1.47	58.74	74.00	-15.26	H	PK
7311.000	42.73	1.47	44.20	54.00	-9.80	H	AV
4874.000	60.91	-3.74	57.17	74.00	-16.83	V	PK
4874.000	53.64	-3.74	49.90	54.00	-4.10	V	AV
7311.000	56.36	1.47	57.83	74.00	-16.17	V	PK
7311.000	41.82	1.47	43.29	54.00	-10.71	V	AV
High Channel-2462MHz							
4924.000	58.18	-3.63	54.55	74.00	-19.45	H	PK
4924.000	52.73	-3.63	49.10	54.00	-4.90	H	AV
7386.000	59.09	1.62	60.71	74.00	-13.29	H	PK
7386.000	48.18	1.62	49.80	54.00	-4.20	H	AV
4924.000	60.00	-3.63	56.37	74.00	-17.63	V	PK
4924.000	53.64	-3.63	50.01	54.00	-3.99	V	AV
7386.000	55.45	1.62	57.07	74.00	-16.93	V	PK
7386.000	49.09	1.62	50.71	54.00	-3.29	V	AV

Test Mode: Antenna B-802.11b worst case

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	61.82	-3.86	57.96	74.00	-16.04	H	PK
4824.000	51.82	-3.86	47.96	54.00	-6.04	H	AV
7236.000	59.09	1.1	60.19	74.00	-13.81	H	PK
7236.000	49.09	1.1	50.19	54.00	-3.81	H	AV
4824.000	61.82	-3.86	57.96	74.00	-16.04	V	PK
4824.000	49.09	-3.86	45.23	54.00	-8.77	V	AV
7236.000	55.45	1.1	56.55	74.00	-17.45	V	PK
7236.000	40.00	1.1	41.10	54.00	-12.90	V	AV
Middle Channel-2437MHz							
4874.000	60.00	-3.74	56.26	74.00	-17.74	H	PK
4874.000	50.00	-3.74	46.26	54.00	-7.74	H	AV
7311.000	59.09	1.47	60.56	74.00	-13.44	H	PK
7311.000	42.73	1.47	44.20	54.00	-9.80	H	AV
4874.000	58.18	-3.74	54.44	74.00	-19.56	V	PK
4874.000	53.64	-3.74	49.90	54.00	-4.10	V	AV
7311.000	56.36	1.47	57.83	74.00	-16.17	V	PK
7311.000	48.18	1.47	49.65	54.00	-4.35	V	AV
High Channel-2462MHz							
4924.000	58.18	-3.63	54.55	74.00	-19.45	H	PK
4924.000	47.27	-3.63	43.64	54.00	-10.36	H	AV
7386.000	58.18	1.62	59.80	74.00	-14.20	H	PK
7386.000	49.09	1.62	50.71	54.00	-3.29	H	AV
4924.000	62.73	-3.63	59.10	74.00	-14.90	V	PK
4924.000	49.09	-3.63	45.46	54.00	-8.54	V	AV
7386.000	54.55	1.62	56.17	74.00	-17.83	V	PK
7386.000	48.18	1.62	49.80	54.00	-4.20	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

Antenna A

802.11b-Lowest Bandedge


Vertical (Worst case)

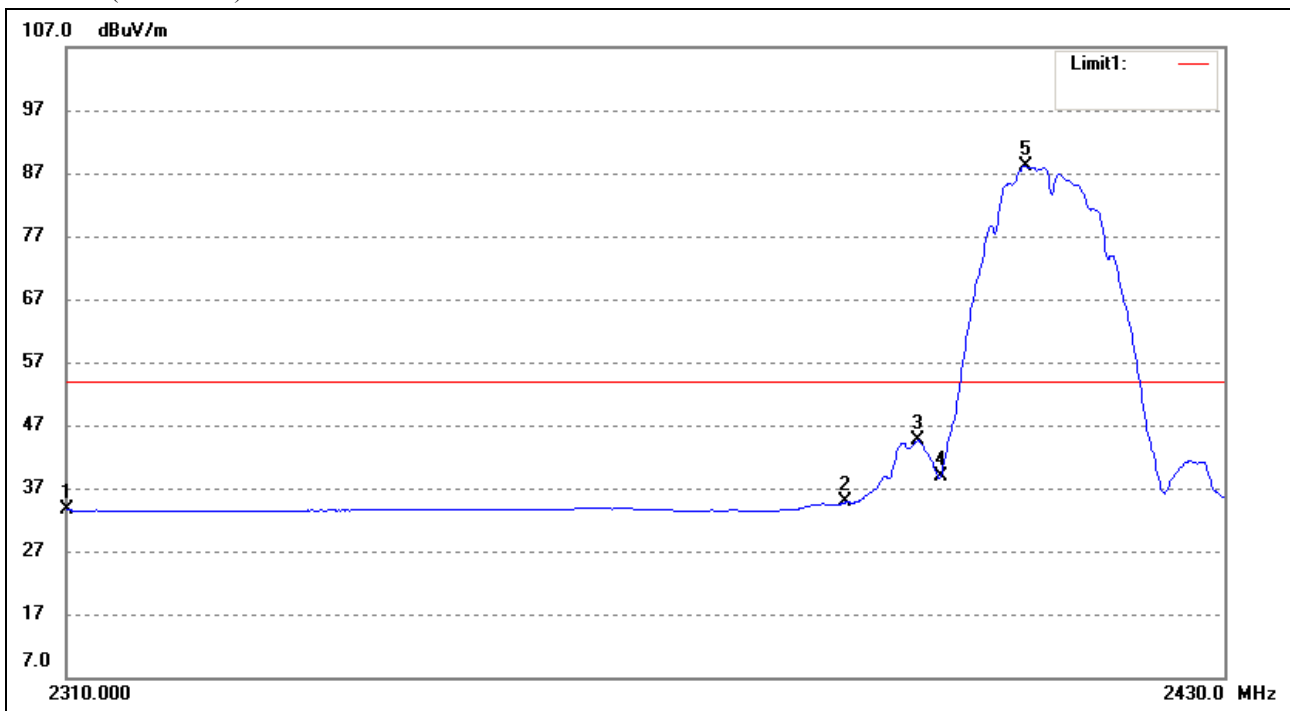

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.56	-1.00	33.56	54.00	-20.44	Average Detector
	2310.000	46.99	-1.00	45.99	74.00	-28.01	Peak Detector
2	2390.000	35.68	-0.88	34.80	54.00	-19.20	Average Detector
	2390.000	48.19	-0.88	47.31	74.00	-26.69	Peak Detector
3	2397.606	45.38	-0.86	44.52	54.00	-9.48	Average Detector
	2396.756	54.36	-0.87	53.49	74.00	-20.51	Peak Detector
4	2400.000	39.71	-0.86	38.85	54.00	-15.15	Average Detector
	2400.000	52.02	-0.86	51.16	74.00	-22.84	Peak Detector
5	2408.925	89.04	-0.85	88.19	/	/	Average Detector
	2410.145	94.24	-0.84	93.40	/	/	Peak Detector

802.11b-Highest Bandedge


Vertical (Worst case)

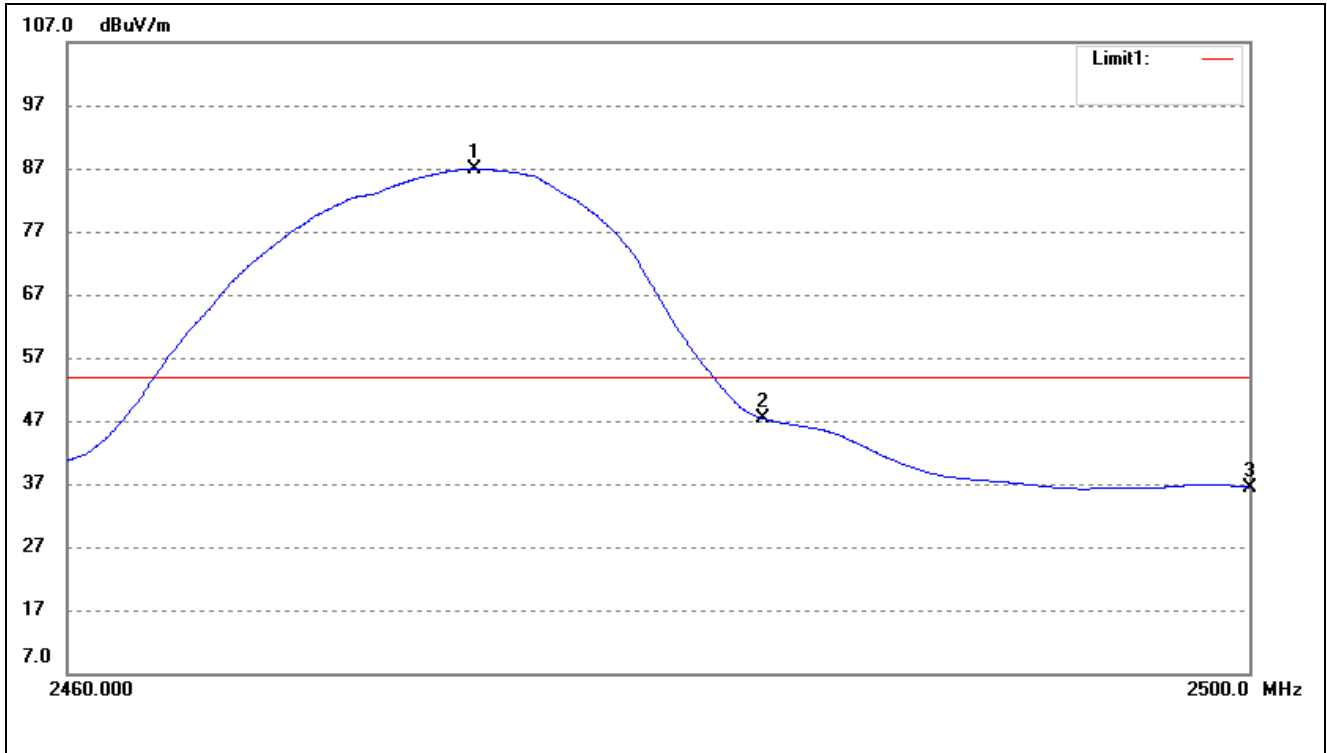

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2473.727	87.73	-0.74	86.99	/	/	Average Detector
	2473.368	94.15	-0.74	93.41	/	/	Peak Detector
2	2483.500	48.02	-0.73	47.29	54.00	-6.71	Average Detector
	2483.500	49.82	-0.73	49.09	74.00	-24.91	Peak Detector
3	2500.000	37.12	-0.70	36.42	54.00	-17.58	Average Detector
	2500.000	48.37	-0.70	47.67	74.00	-26.33	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

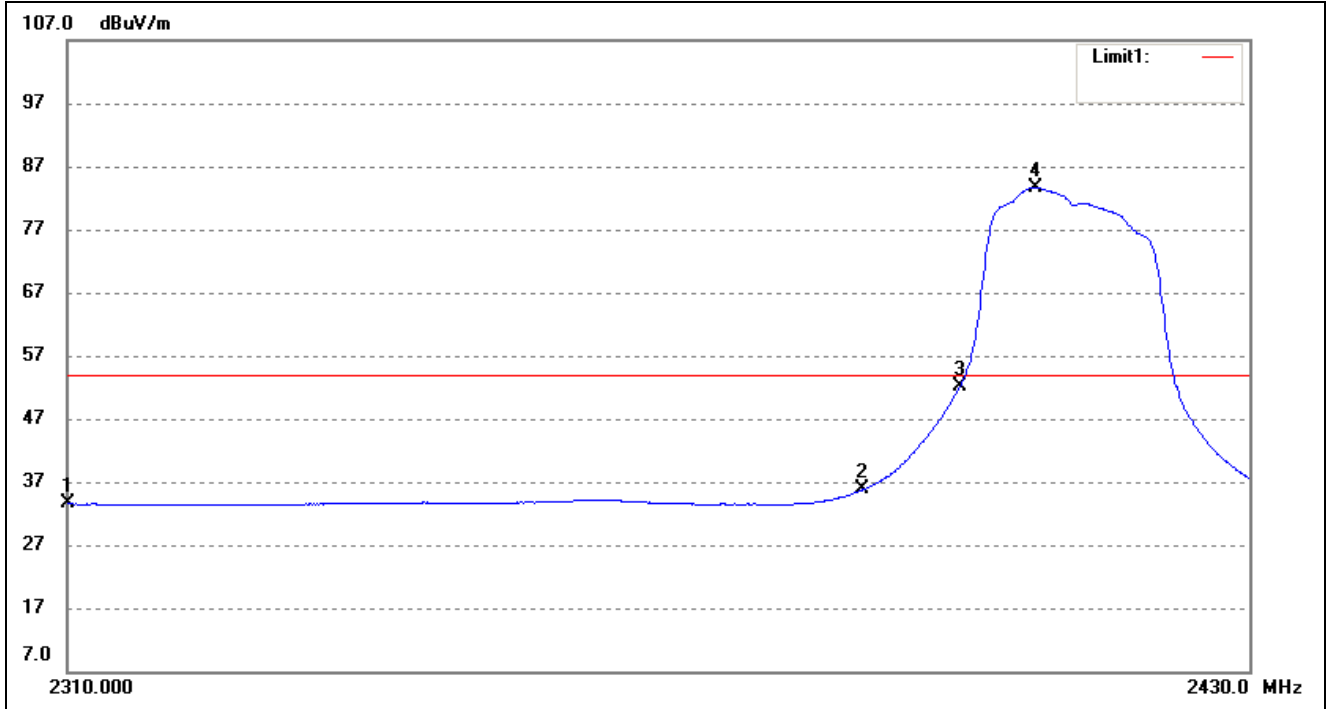

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.56	-1.00	33.56	54.00	-20.44	Average Detector
	2310.000	46.47	-1.00	45.47	74.00	-28.53	Peak Detector
2	2390.000	36.67	-0.88	35.79	54.00	-18.21	Average Detector
	2390.000	51.63	-0.88	50.75	74.00	-23.25	Peak Detector
3	2400.000	53.01	-0.86	52.15	54.00	-1.85	Average Detector
	2400.000	72.24	-0.86	71.38	74.00	-2.62	Peak Detector
4	2407.827	84.45	-0.85	83.60	/	/	Average Detector
	2408.559	95.94	-0.85	95.09	/	/	Peak Detector

802.11g-Highest Bandedge


Vertical (Worst case)

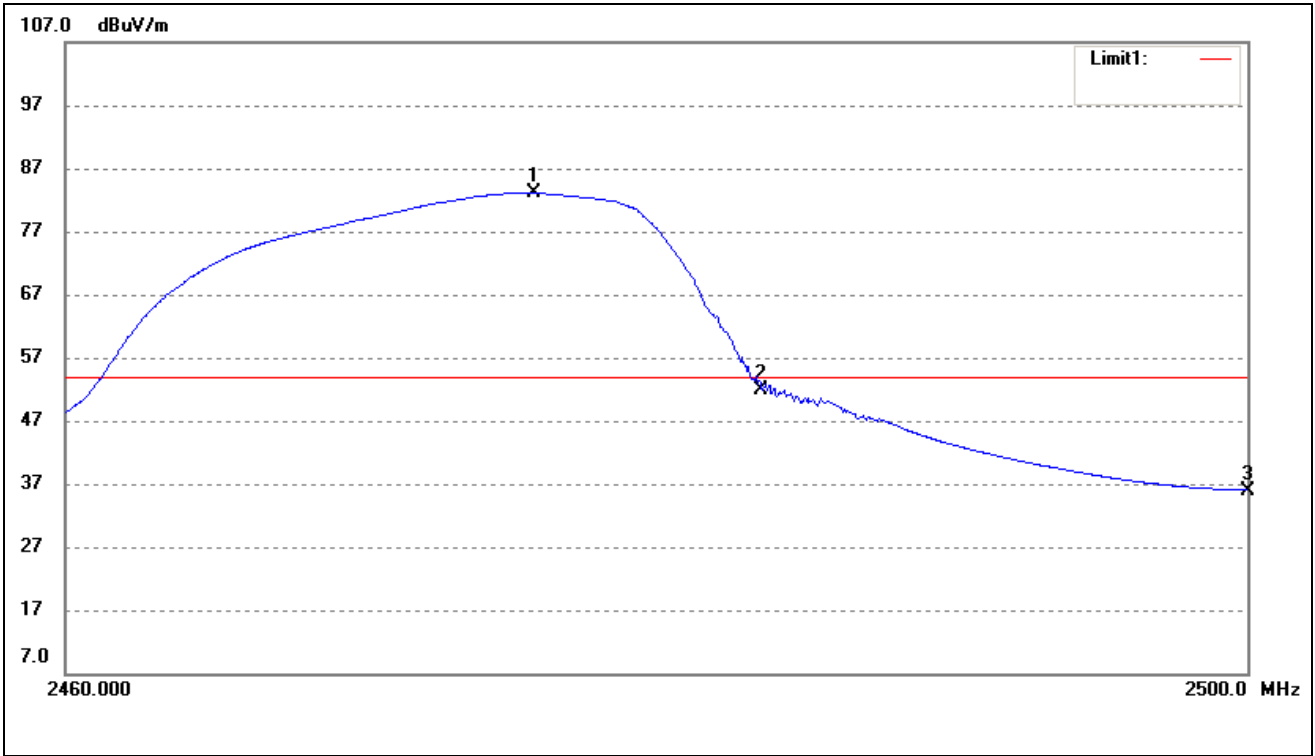

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.763	83.88	-0.74	83.14	/	/	Average Detector
	2475.643	96.14	-0.74	95.40	/	/	Peak Detector
2	2483.500	52.62	-0.73	51.89	54.00	-2.11	Average Detector
	2483.500	73.41	-0.73	72.68	74.00	-1.32	Peak Detector
3	2500.000	36.70	-0.70	36.00	54.00	-18.00	Average Detector
	2500.000	50.20	-0.70	49.50	74.00	-24.50	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

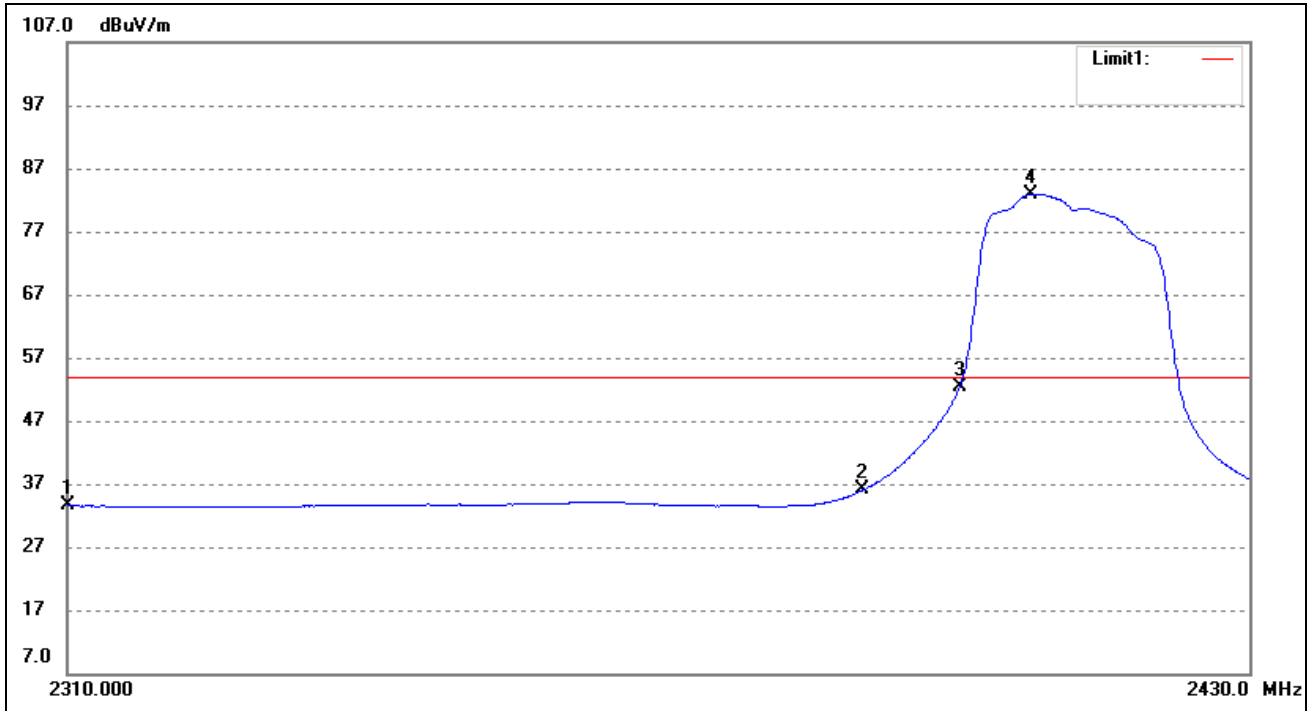

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.61	-1.00	33.61	54.00	-20.39	Average Detector
	2310.000	46.40	-1.00	45.40	74.00	-28.60	Peak Detector
2	2390.000	36.91	-0.88	36.03	54.00	-17.97	Average Detector
	2390.000	50.27	-0.88	49.39	74.00	-24.61	Peak Detector
3	2400.000	53.25	-0.86	52.39	54.00	-1.61	Average Detector
	2400.000	73.38	-0.86	72.52	74.00	-1.48	Peak Detector
4	2407.339	83.84	-0.85	82.99	/	/	Average Detector
	2408.315	95.27	-0.85	94.42	/	/	Peak Detector

802.11n-HT20-Highest Bandedge


Vertical (Worst case)

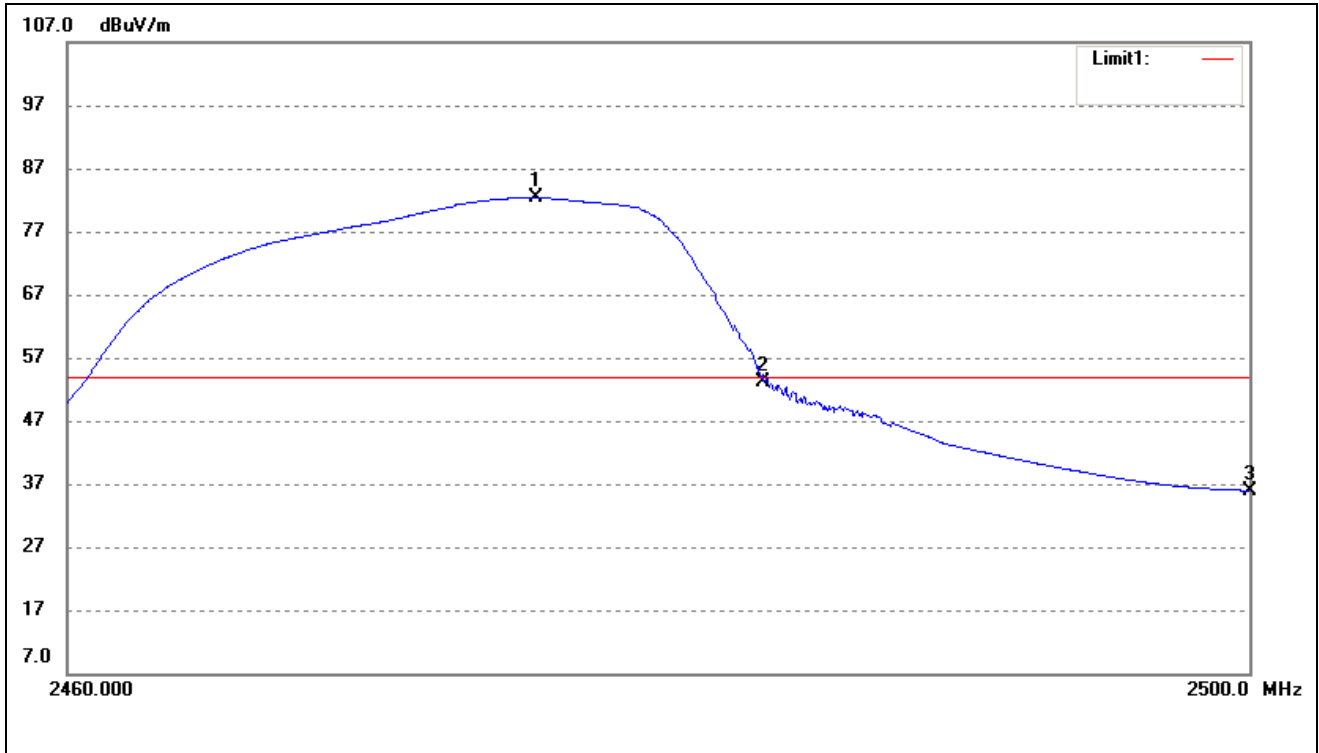

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.763	83.11	-0.74	82.37	/	/	Average Detector
	2476.242	95.59	-0.74	94.85	/	/	Peak Detector
2	2483.500	53.83	-0.73	53.10	54.00	-0.90	Average Detector
	2483.500	71.94	-0.73	71.21	74.00	-2.79	Peak Detector
3	2500.000	36.65	-0.70	35.95	54.00	-18.05	Average Detector
	2500.000	50.05	-0.70	49.35	74.00	-24.65	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

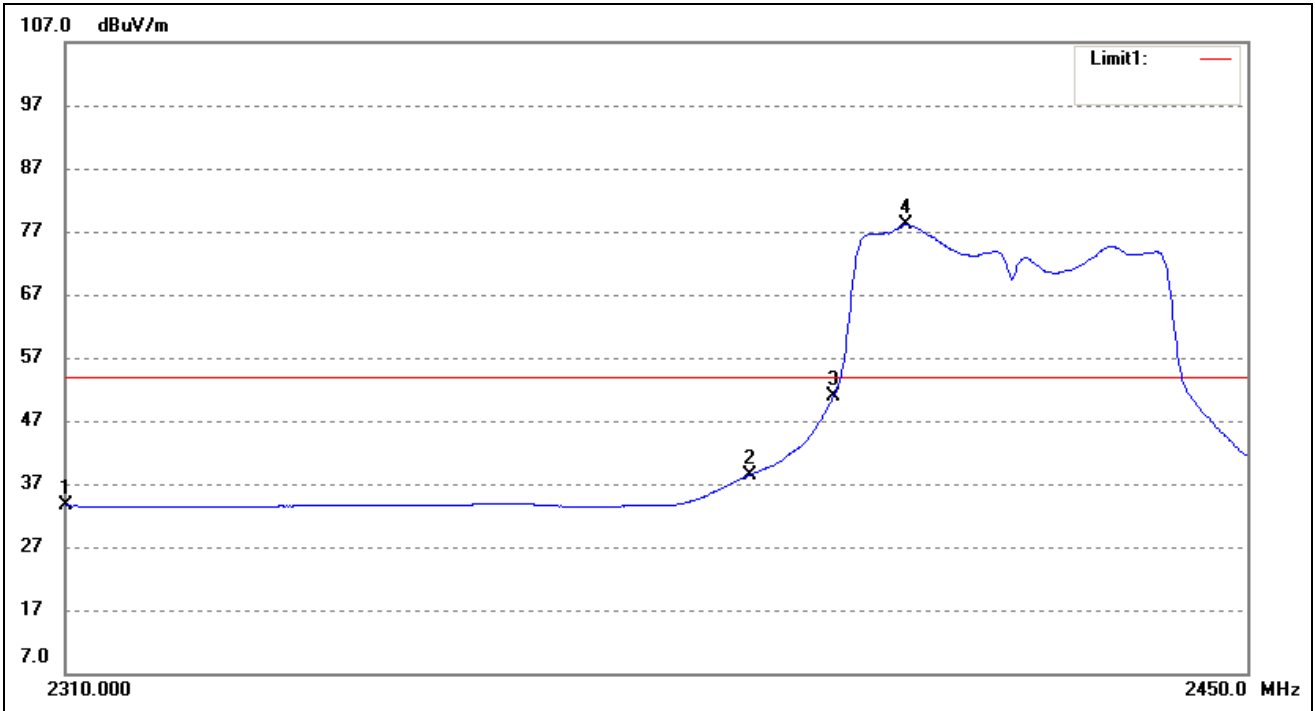

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.59	-1.00	33.59	54.00	-20.41	Average Detector
	2310.000	46.83	-1.00	45.83	74.00	-28.17	Peak Detector
2	2390.000	39.35	-0.88	38.47	54.00	-15.53	Average Detector
	2390.000	52.35	-0.88	51.47	74.00	-22.53	Peak Detector
3	2400.000	51.78	-0.86	50.92	54.00	-3.08	Average Detector
	2400.000	67.38	-0.86	66.52	74.00	-7.48	Peak Detector
4	2408.690	79.03	-0.85	78.18	/	/	Average Detector
	2409.399	91.93	-0.84	91.09	/	/	Peak Detector


802.11n-HT40-Highest Bandedge

Vertical (Worst case)

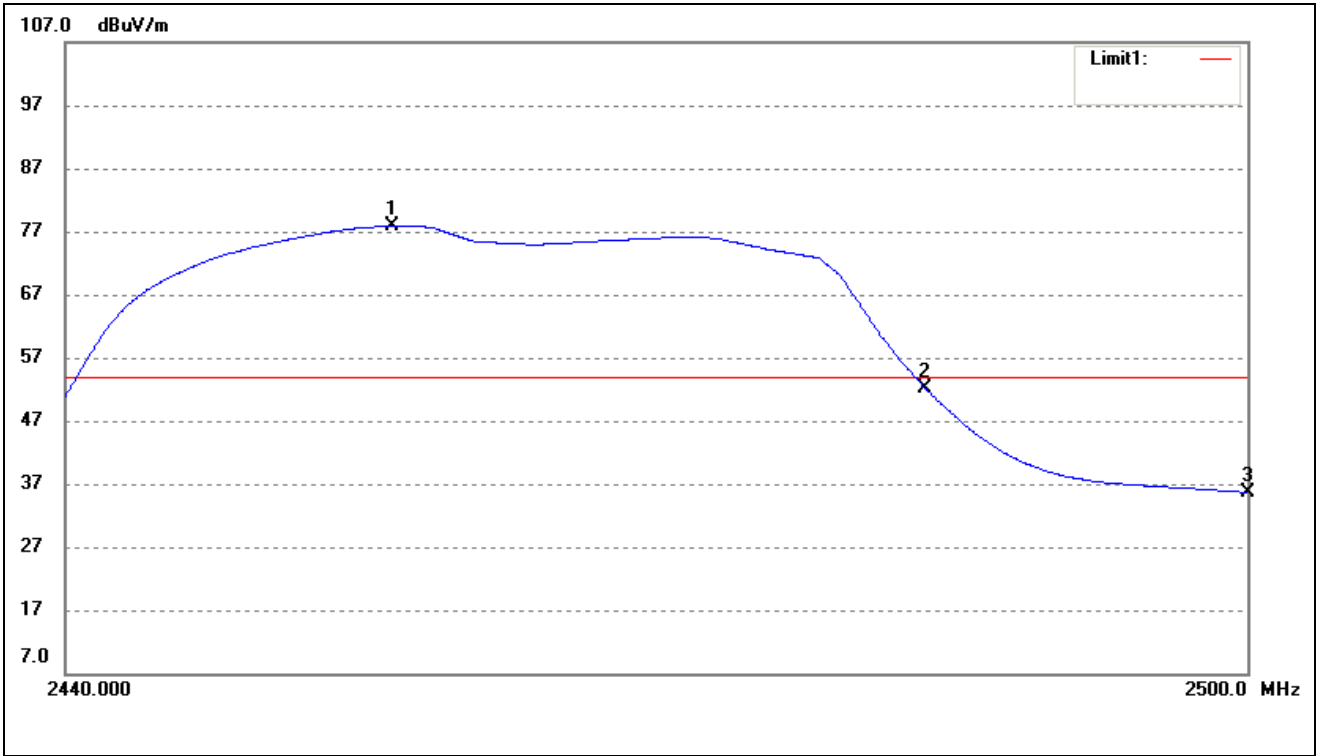

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.415	78.68	-0.77	77.91	/	/	Average Detector
	2474.502	91.68	-0.74	90.94	/	/	Peak Detector
2	2483.500	52.79	-0.73	52.06	54.00	-1.94	Average Detector
	2483.500	67.85	-0.73	67.12	74.00	-6.88	Peak Detector
3	2500.000	36.36	-0.70	35.66	54.00	-18.34	Average Detector
	2500.000	50.99	-0.70	50.29	74.00	-23.71	Peak Detector


Antenna B
 802.11b-Lowest Bandedge
 Vertical (Worst case)

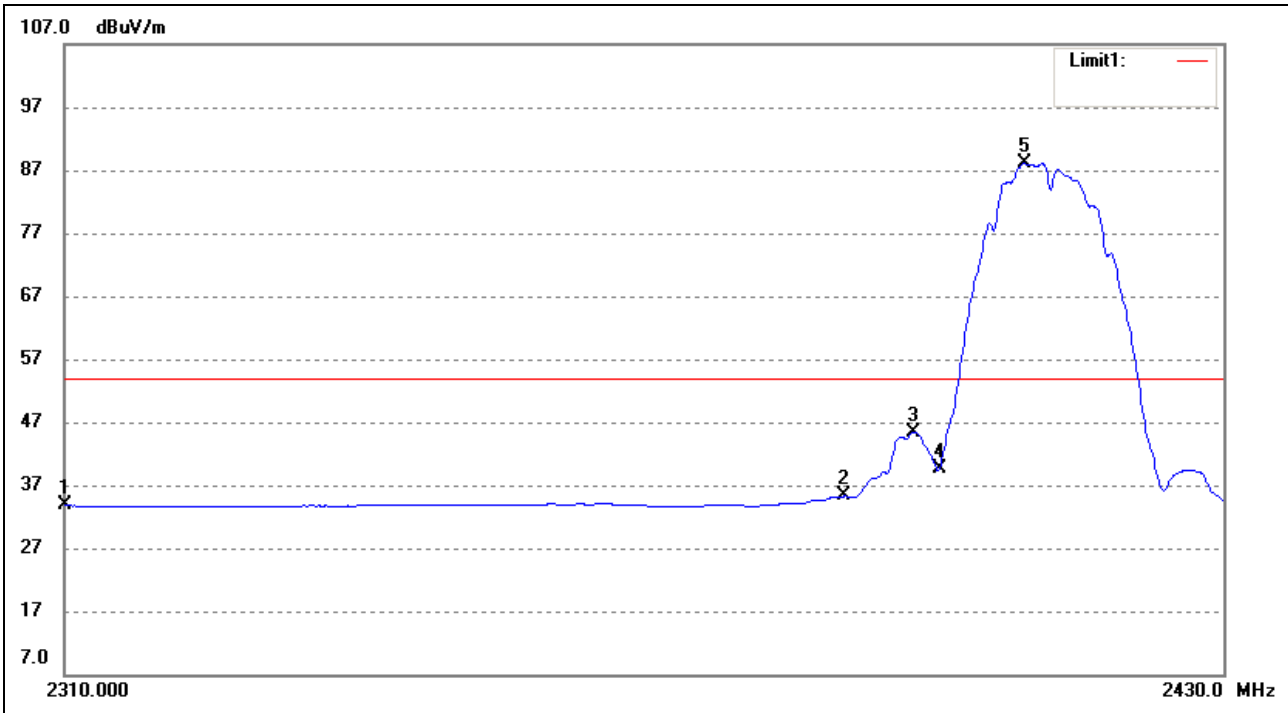

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.83	-1.00	33.83	54.00	-20.17	Average Detector
	2310.000	48.07	-1.00	47.07	74.00	-26.93	Peak Detector
2	2390.000	36.15	-0.88	35.27	54.00	-18.73	Average Detector
	2390.000	49.08	-0.88	48.20	74.00	-25.80	Peak Detector
3	2397.363	46.23	-0.86	45.37	54.00	-8.63	Average Detector
	2396.392	55.12	-0.87	54.25	74.00	-19.75	Peak Detector
4	2400.000	40.49	-0.86	39.63	54.00	-14.37	Average Detector
	2400.000	52.76	-0.86	51.90	74.00	-22.10	Peak Detector
5	2408.925	89.02	-0.85	88.17	/	/	Average Detector
	2410.267	95.11	-0.84	94.27	/	/	Peak Detector

802.11b-Highest Bandedge


Vertical (Worst case)

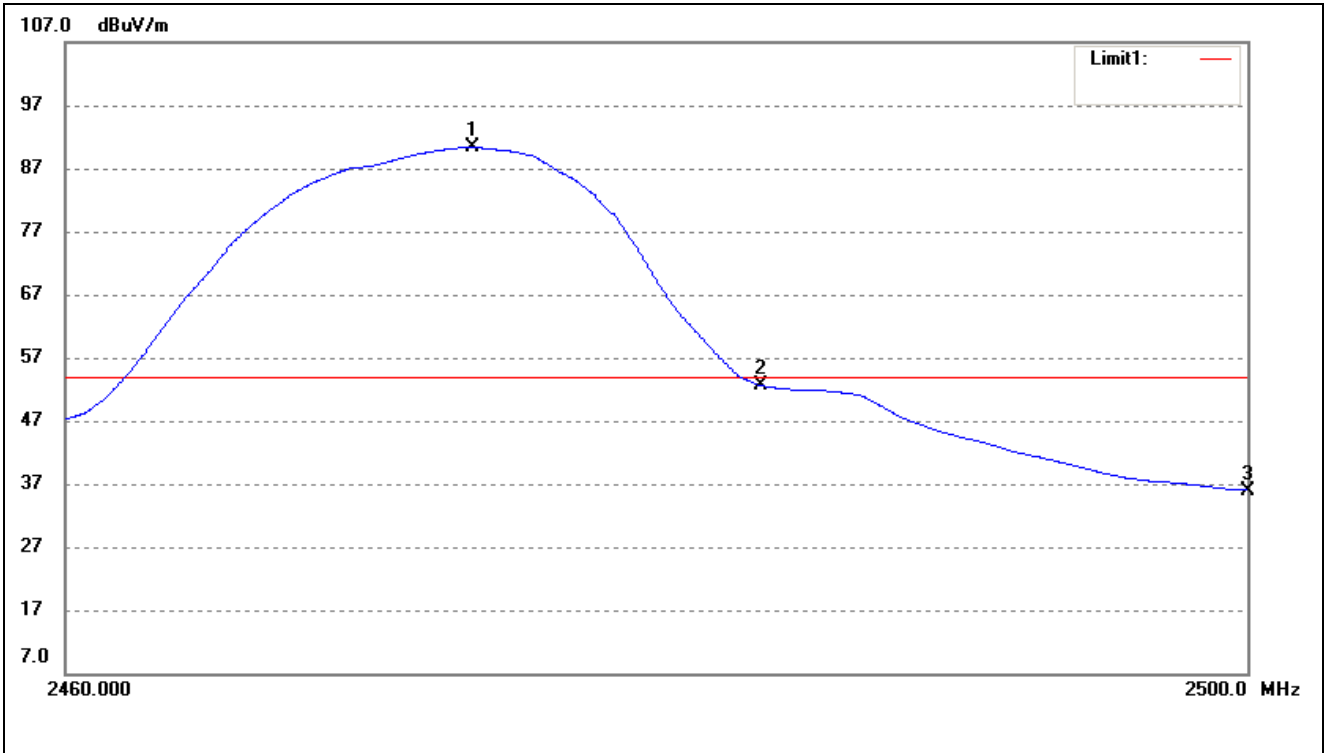

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2473.73	91.17	-0.74	90.43	/	/	Average Detector
	2473.33	96.48	-0.74	95.74	/	/	Peak Detector
2	2483.50	53.29	-0.73	52.56	54.00	-1.44	Average Detector
	2483.50	56.66	-0.73	55.93	74.00	-18.07	Peak Detector
3	2500.00	36.70	-0.70	36.00	54.00	-18.00	Average Detector
	2500.00	48.93	-0.70	48.23	74.00	-25.77	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

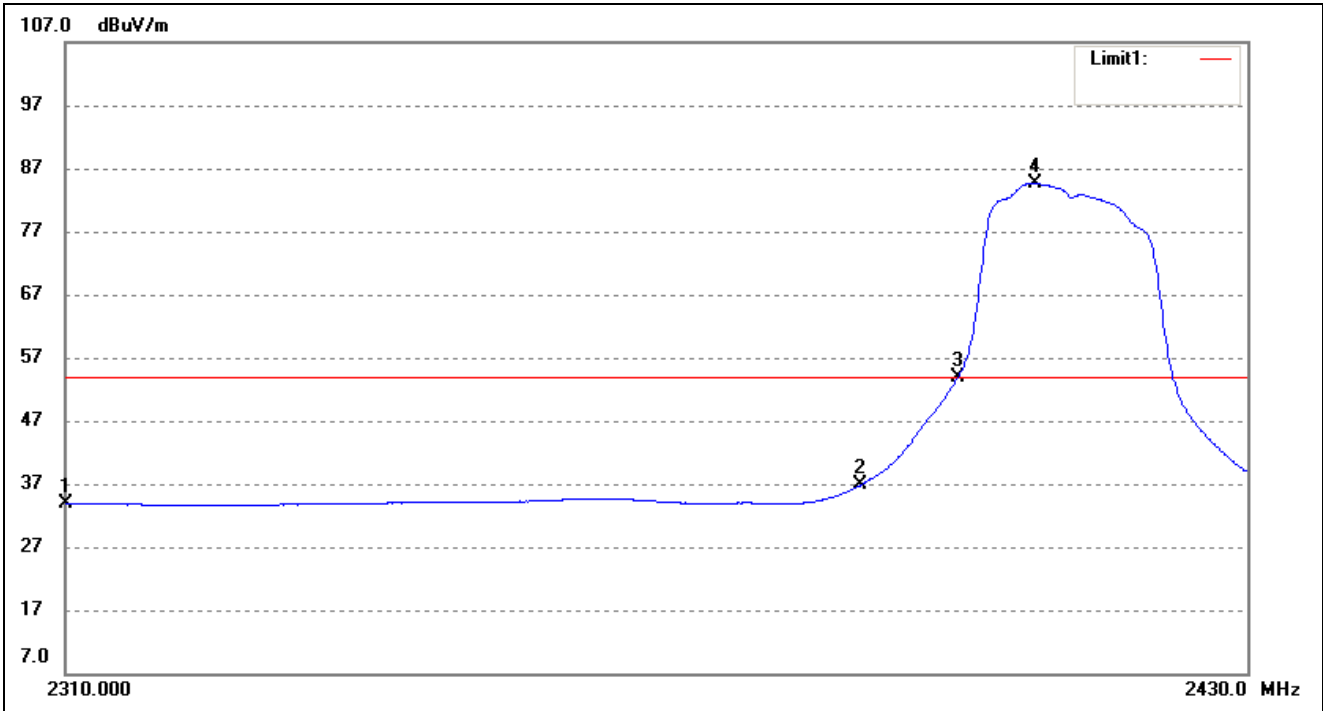

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	34.92	-1.00	33.92	54.00	-20.08	Average Detector
	2310.00	47.94	-1.00	46.94	74.00	-27.06	Peak Detector
2	2390.00	37.72	-0.88	36.84	54.00	-17.16	Average Detector
	2390.00	54.73	-0.88	53.85	74.00	-20.15	Peak Detector
3	2400.00	54.76	-0.86	53.90	54.00	-0.10	Average Detector
	2400.00	74.42	-0.86	73.56	74.00	-0.44	Peak Detector
4	2408.07	85.57	-0.85	84.72	/	/	Average Detector
	2408.56	97.30	-0.85	96.45	/	/	Peak Detector

802.11g-Highest Bandedge


Vertical (Worst case)

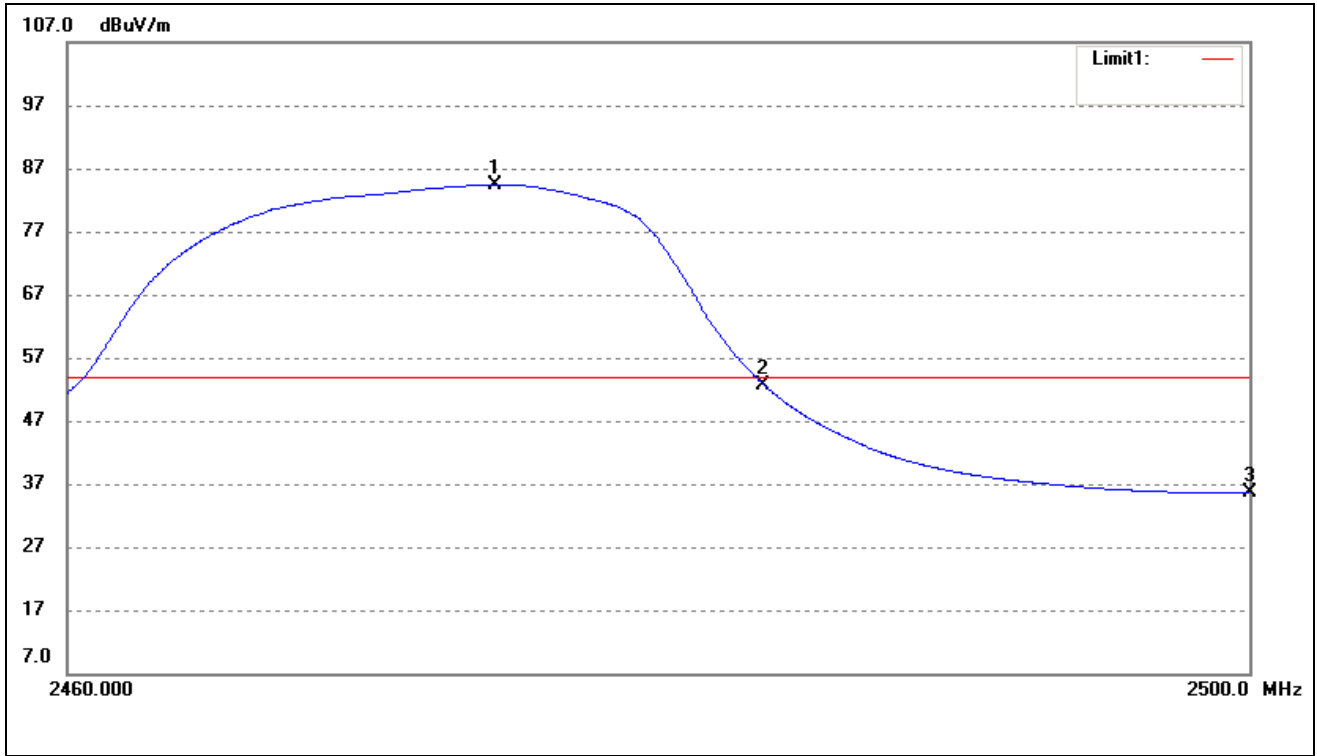

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2474.41	85.16	-0.74	84.42	/	/	Average Detector
	2475.96	97.21	-0.74	96.47	/	/	Peak Detector
2	2483.50	53.34	-0.73	52.61	54.00	-1.39	Average Detector
	2483.50	73.92	-0.73	73.19	74.00	-0.81	Peak Detector
3	2500.00	36.25	-0.70	35.55	54.00	-18.45	Average Detector
	2500.00	54.23	-0.70	53.53	74.00	-20.47	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

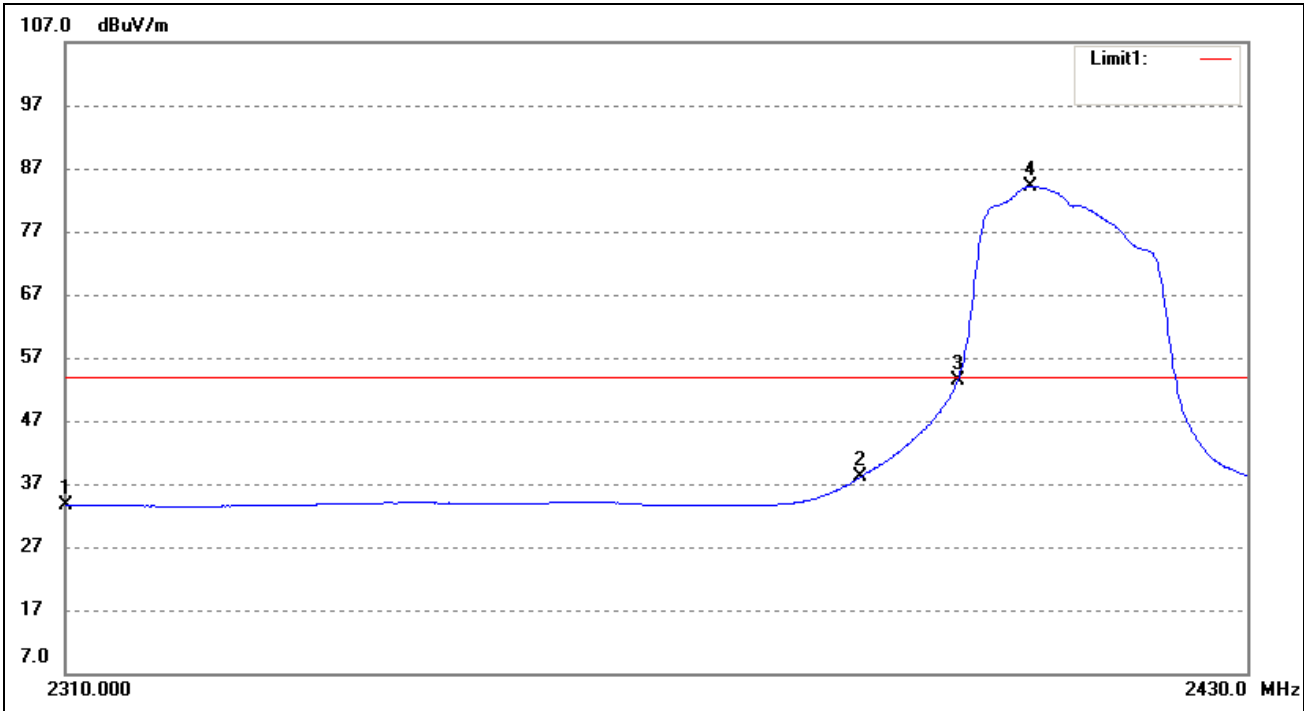

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	34.73	-1.00	33.73	54.00	-20.27	Average Detector
	2310.00	47.47	-1.00	46.47	74.00	-27.53	Peak Detector
2	2390.00	39.04	-0.88	38.16	54.00	-15.84	Average Detector
	2390.00	55.16	-0.88	54.28	74.00	-19.72	Peak Detector
3	2400.00	54.30	-0.86	53.44	54.00	-0.56	Average Detector
	2400.00	74.23	-0.86	73.37	74.00	-0.63	Peak Detector
4	2407.46	85.07	-0.85	84.22	/	/	Average Detector
	2408.68	96.66	-0.85	95.81	/	/	Peak Detector

802.11n-HT20-Highest Bandedge


Vertical (Worst case)

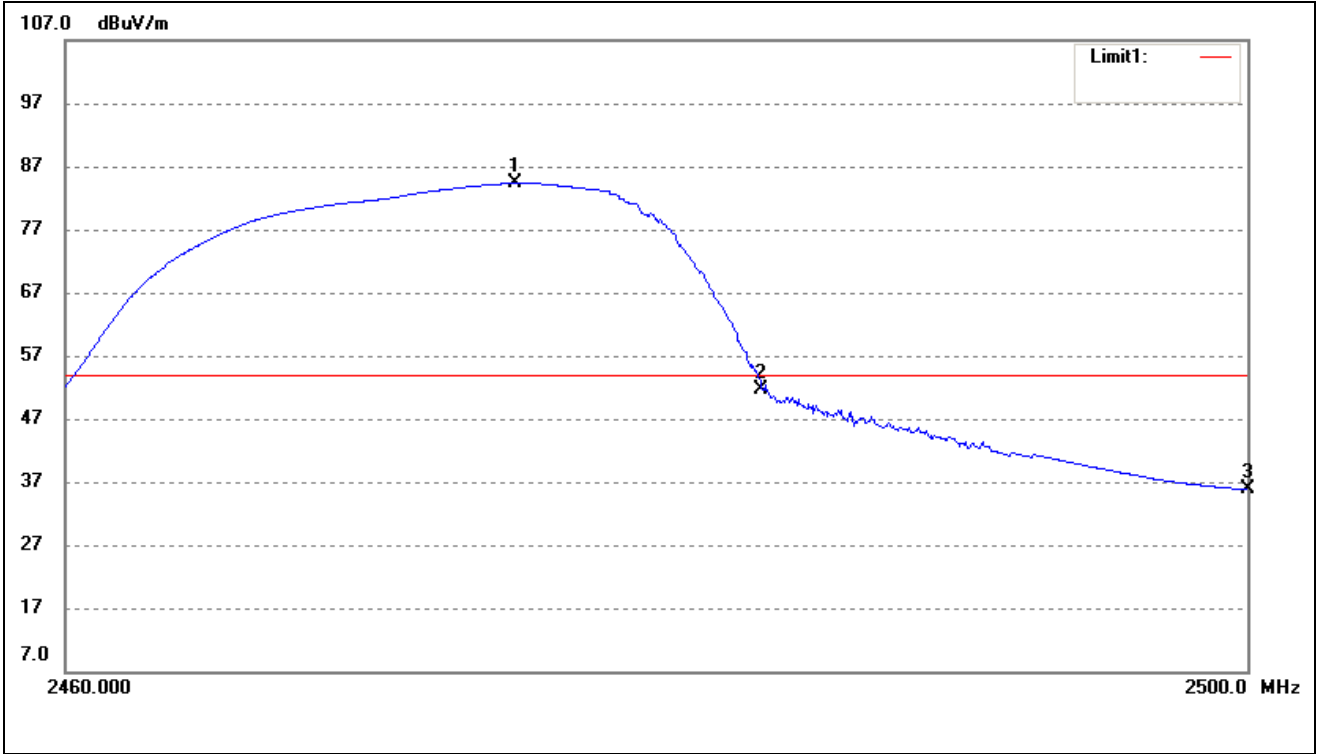

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.12	85.11	-0.74	84.37	/	/	Average Detector
	2476.16	98.13	-0.74	97.39	/	/	Peak Detector
2	2483.50	52.41	-0.73	51.68	54.00	-2.32	Average Detector
	2483.50	71.43	-0.73	70.70	74.00	-3.30	Peak Detector
3	2500.00	36.51	-0.70	35.81	54.00	-18.19	Average Detector
	2500.00	52.93	-0.70	52.23	74.00	-21.77	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

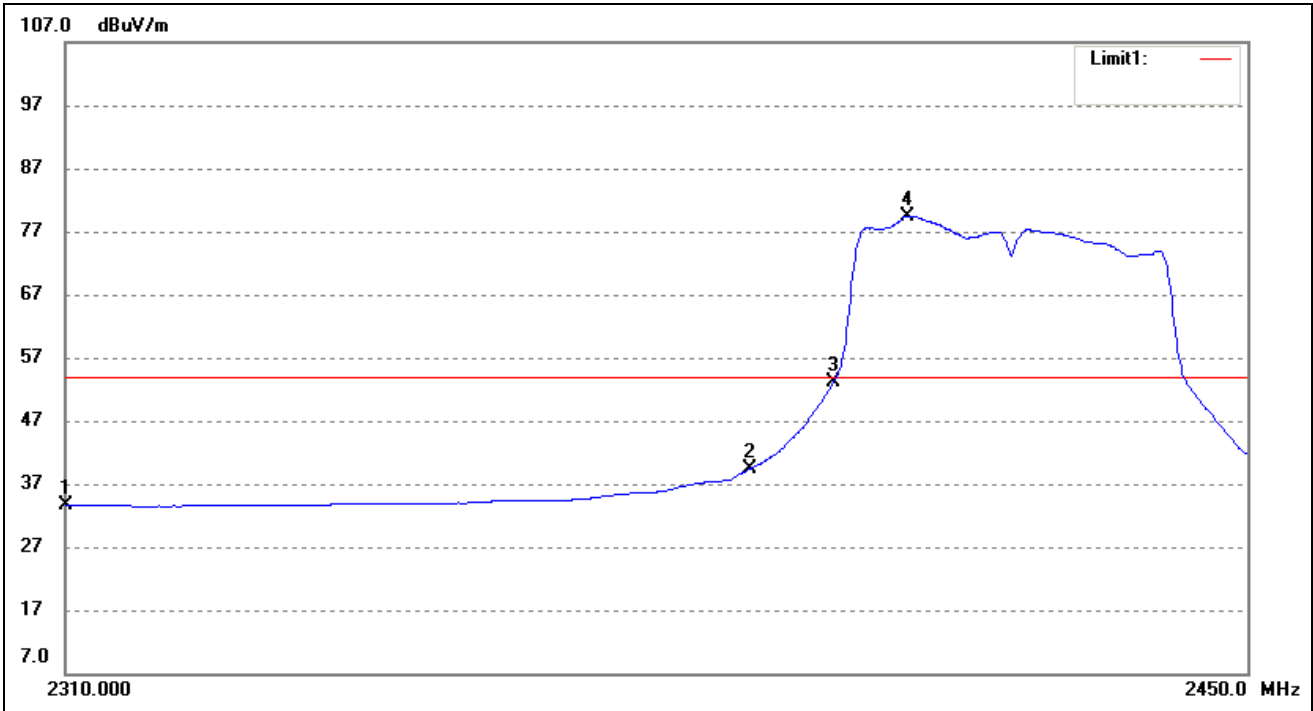

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	34.72	-1.00	33.72	54.00	-20.28	Average Detector
	2310.00	47.16	-1.00	46.16	74.00	-27.84	Peak Detector
2	2390.00	40.31	-0.88	39.43	54.00	-14.57	Average Detector
	2390.00	54.55	-0.88	53.67	74.00	-20.33	Peak Detector
3	2400.00	54.05	-0.86	53.19	54.00	-0.81	Average Detector
	2400.00	68.61	-0.86	67.75	74.00	-6.25	Peak Detector
4	2408.83	80.29	-0.85	79.44	/	/	Average Detector
	2430.19	92.61	-0.81	91.80	/	/	Peak Detector


802.11n-HT40-Highest Bandedge

Vertical (Worst case)

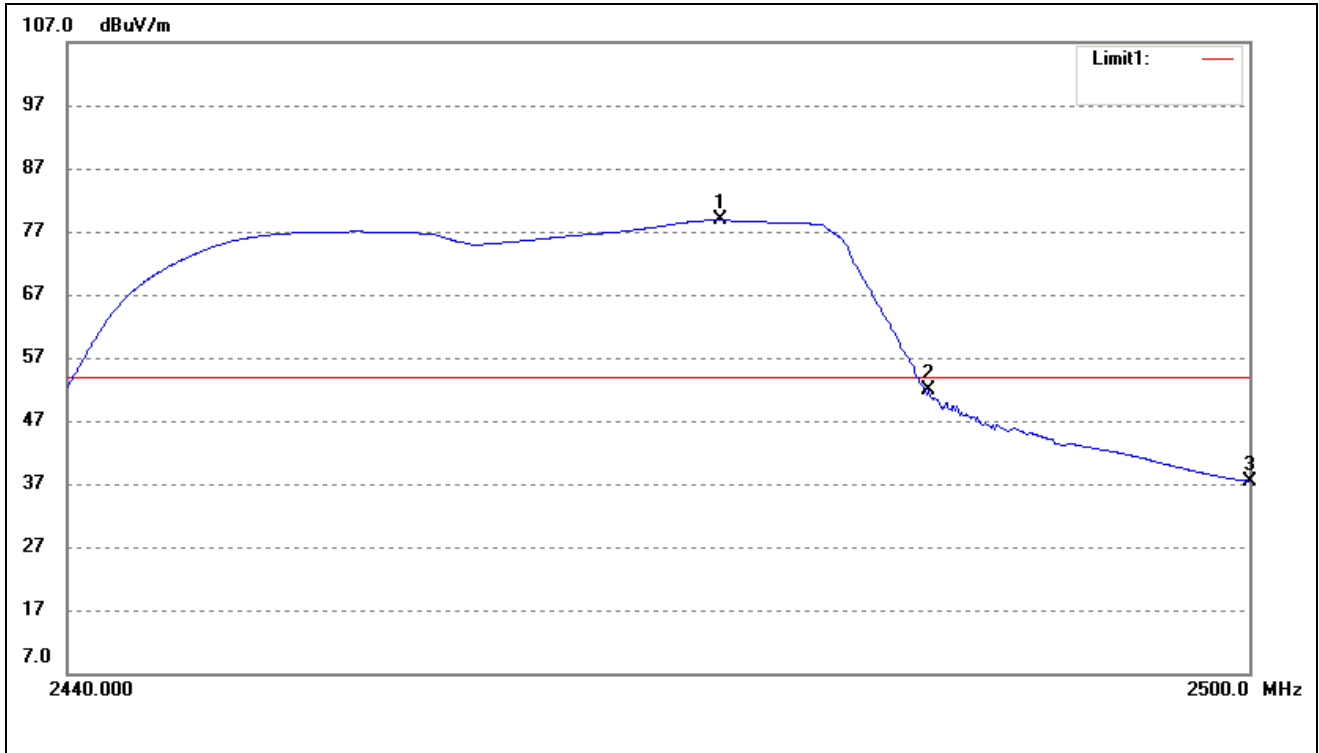


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2472.94	79.57	-0.74	78.83	/	/	Average Detector
	2456.71	93.11	-0.77	92.34	/	/	Peak Detector
2	2483.50	52.53	-0.73	51.80	54.00	-2.20	Average Detector
	2483.50	68.16	-0.73	67.43	74.00	-6.57	Peak Detector
3	2500.00	38.10	-0.70	37.40	54.00	-16.60	Average Detector
	2500.00	50.03	-0.70	49.33	74.00	-24.67	Peak Detector


Antenna A
 Spurious (Conducted)
 802.11b-Lowest
 Lowest

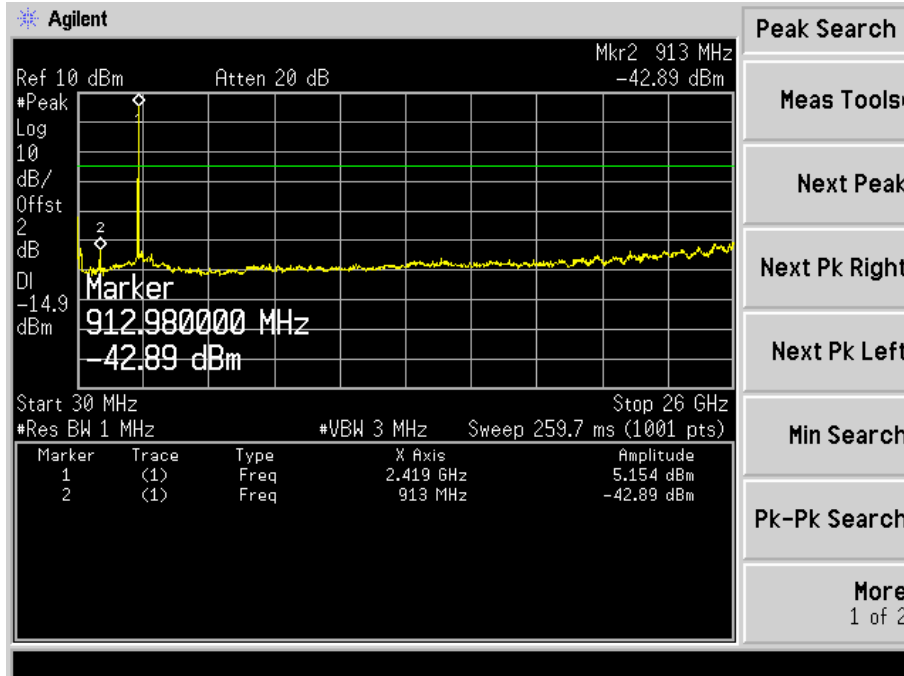

Middle

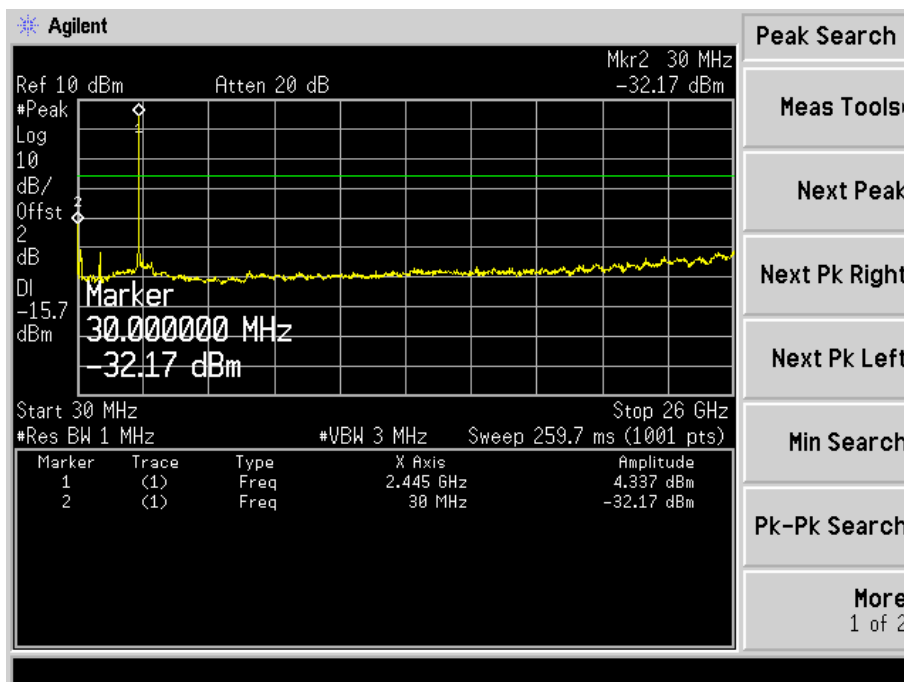


Highest

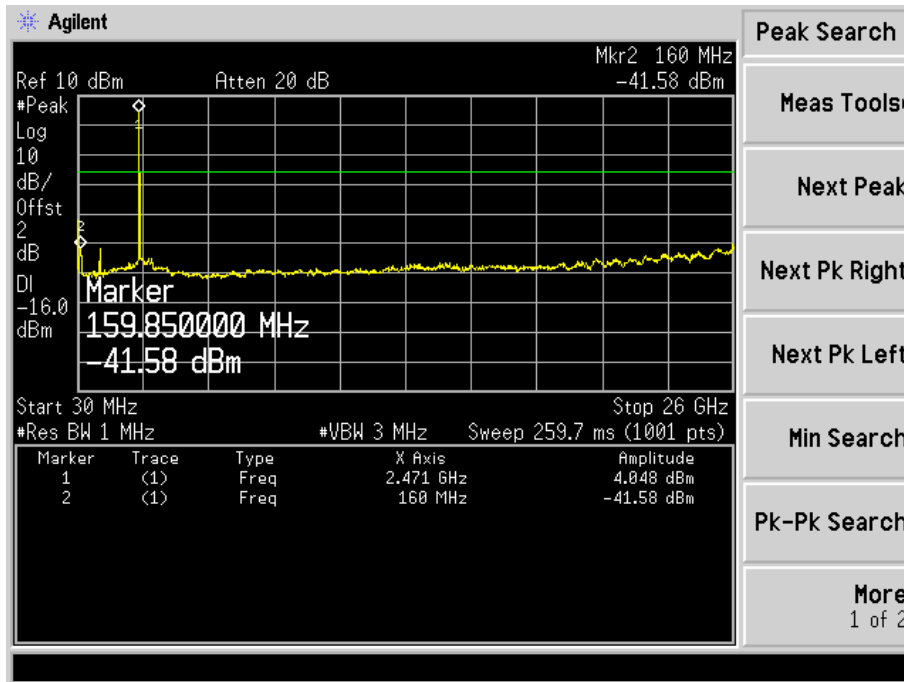


Spurious (Conducted)

802.11g-Lowest


Lowest

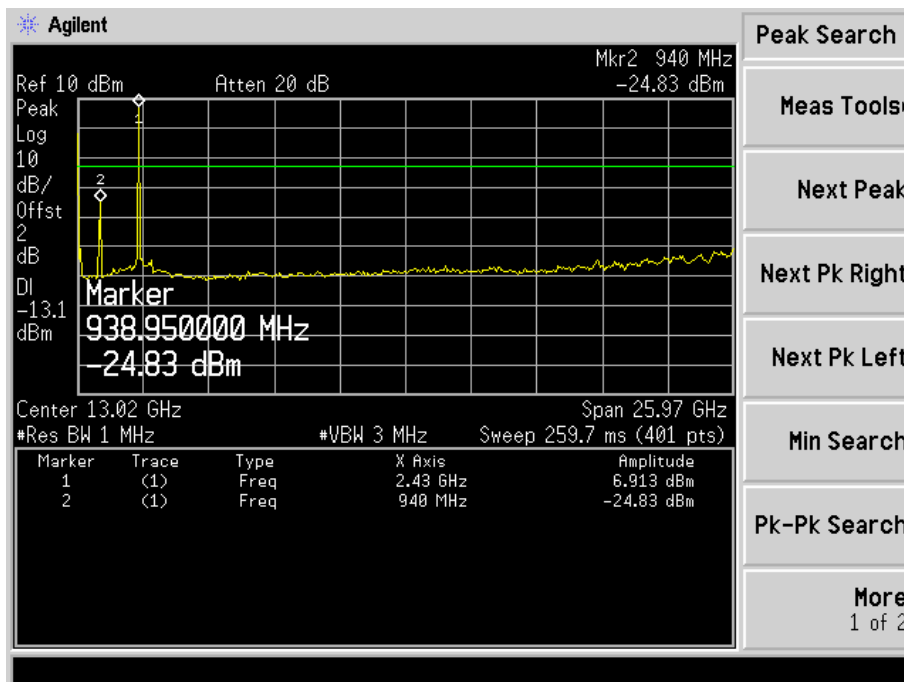


Middle

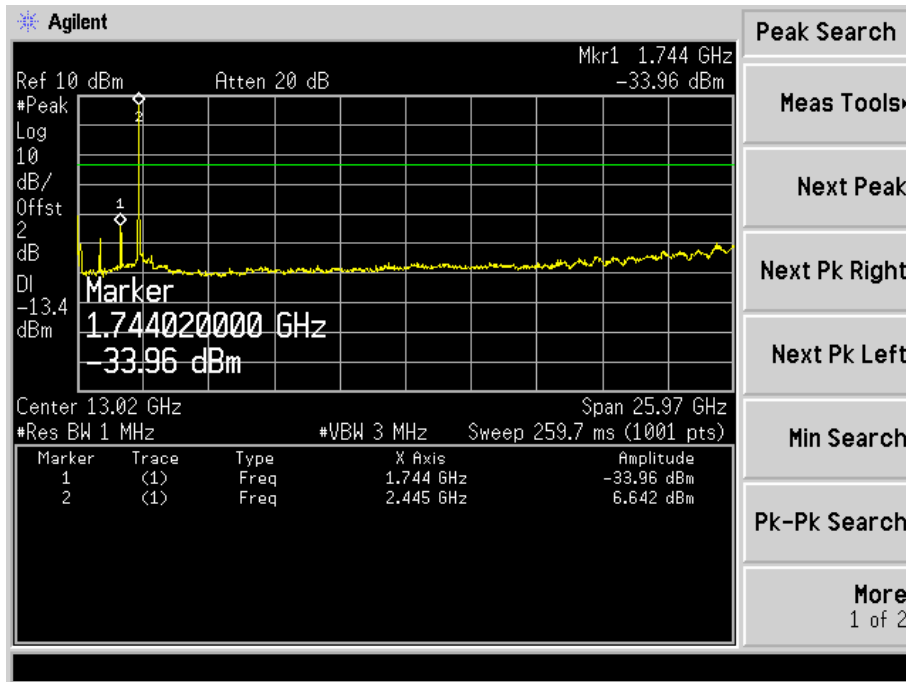


Highest

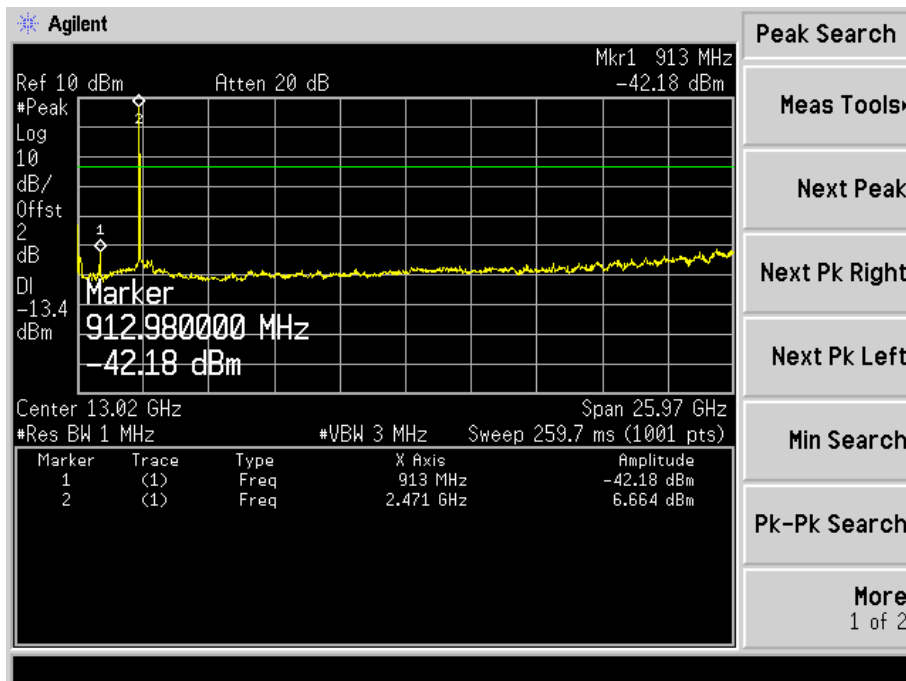


Spurious (Conducted)
 802.11n-HT20-Lowest
 Lowest

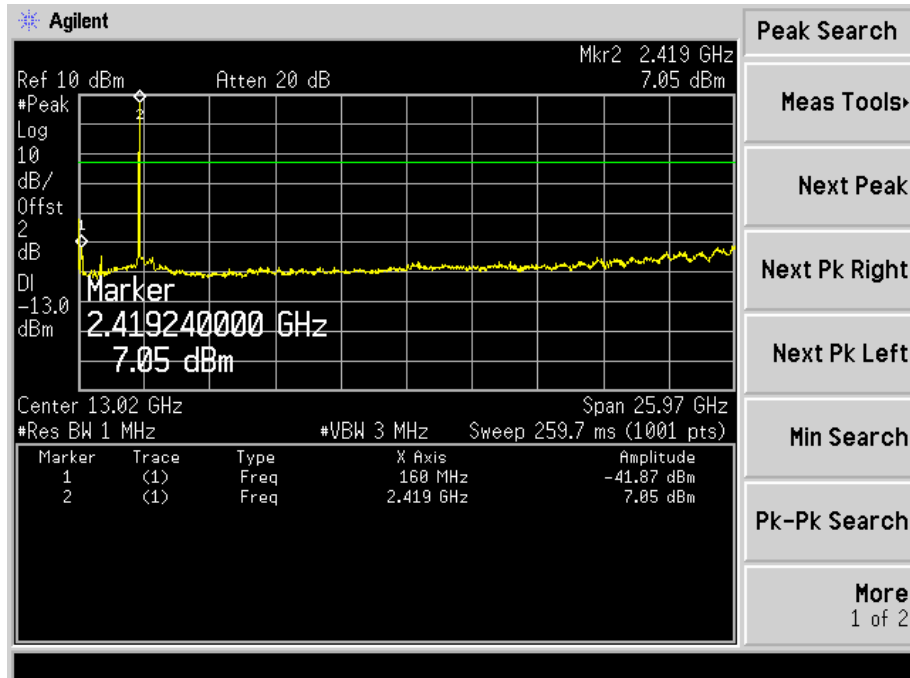


Middle

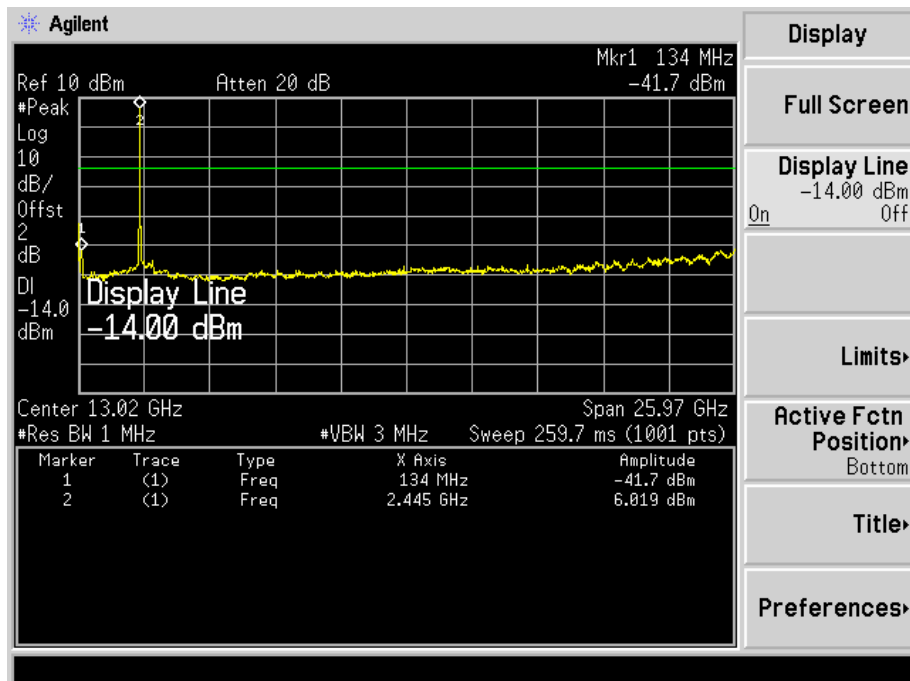


Highest

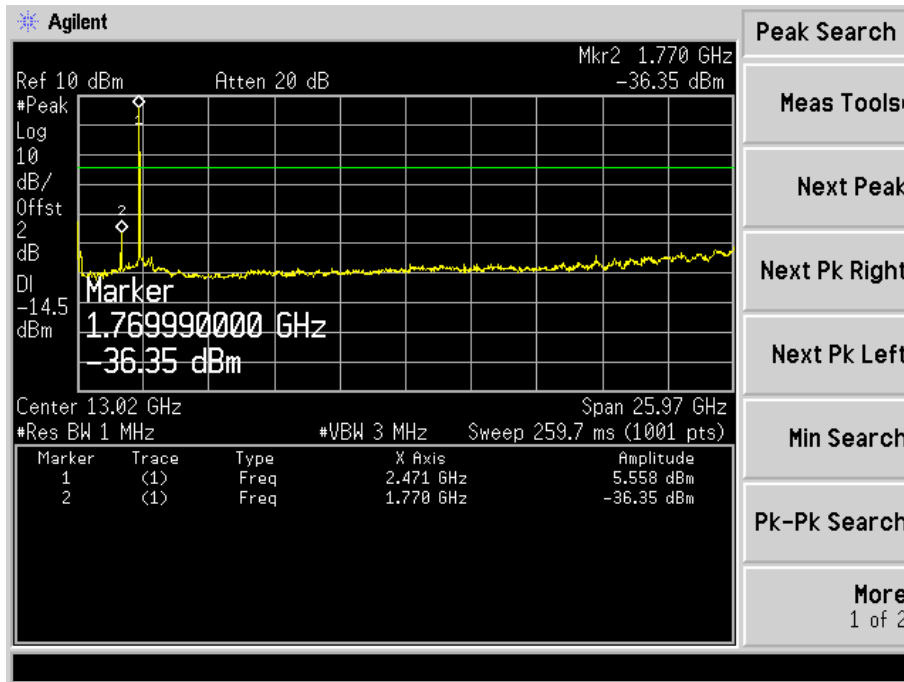


Spurious (Conducted)
802.11n-HT40-Lowest
Lowest

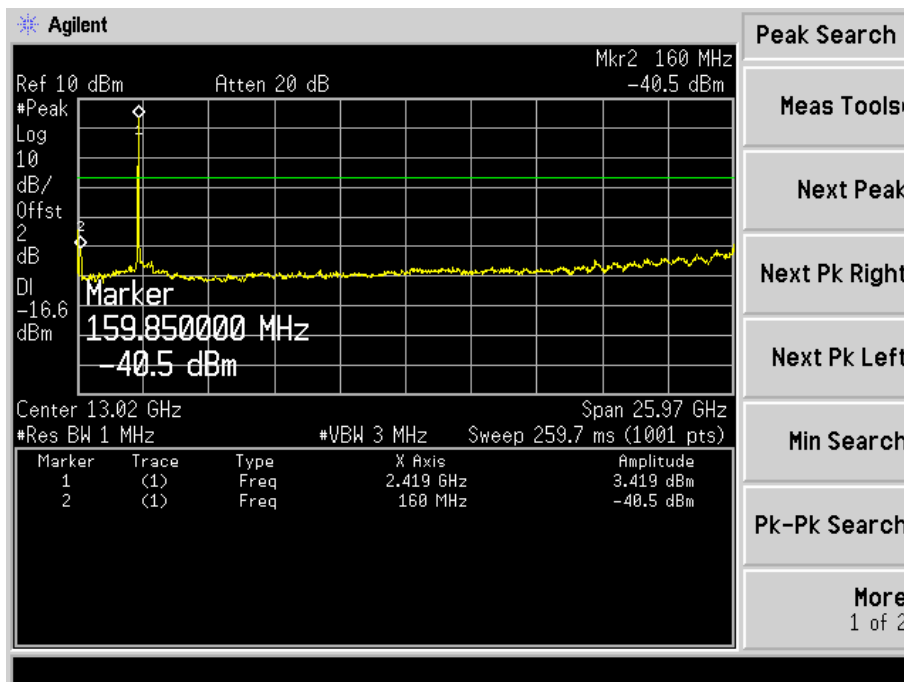


Middle

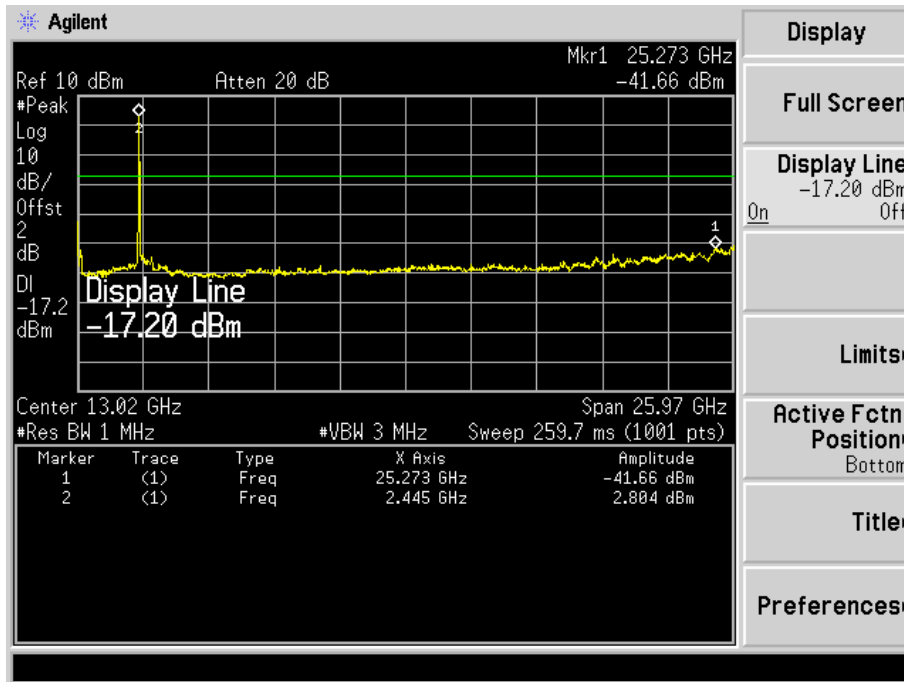


Highest

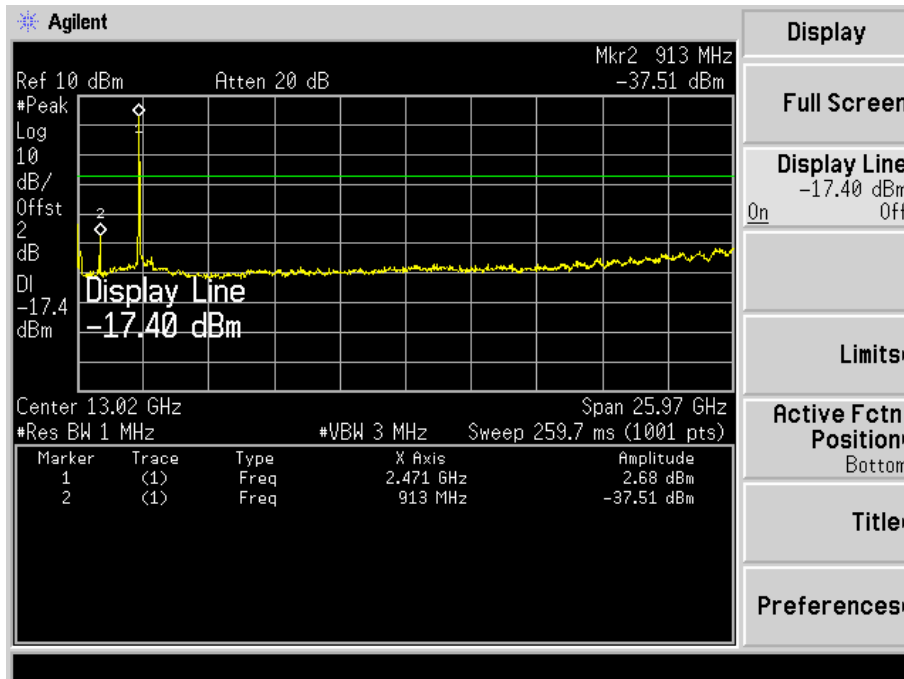


Antenna B
 Spurious (Conducted)
 802.11b-Lowest
 Lowest

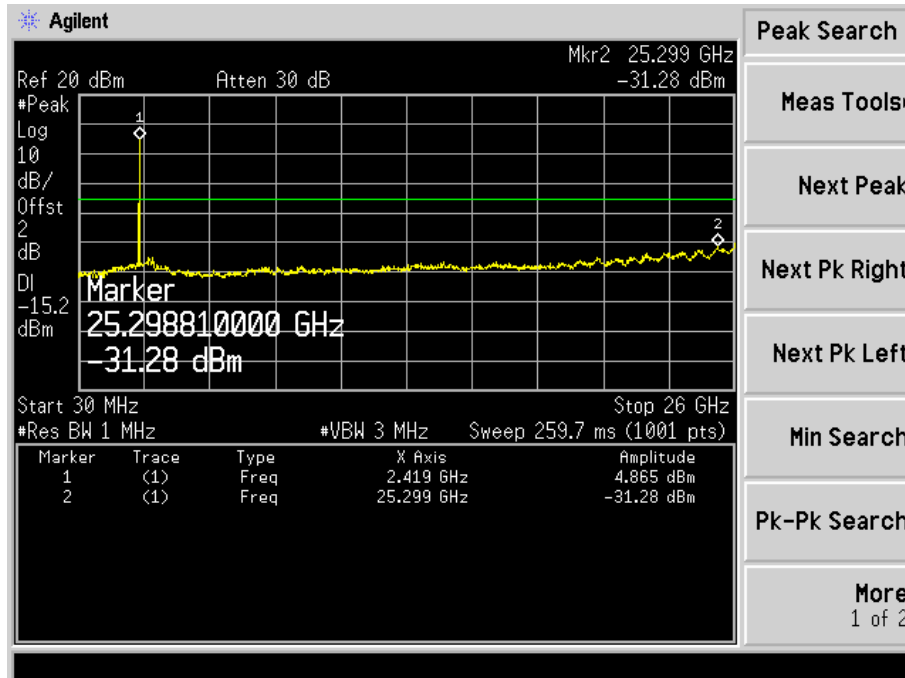

Middle

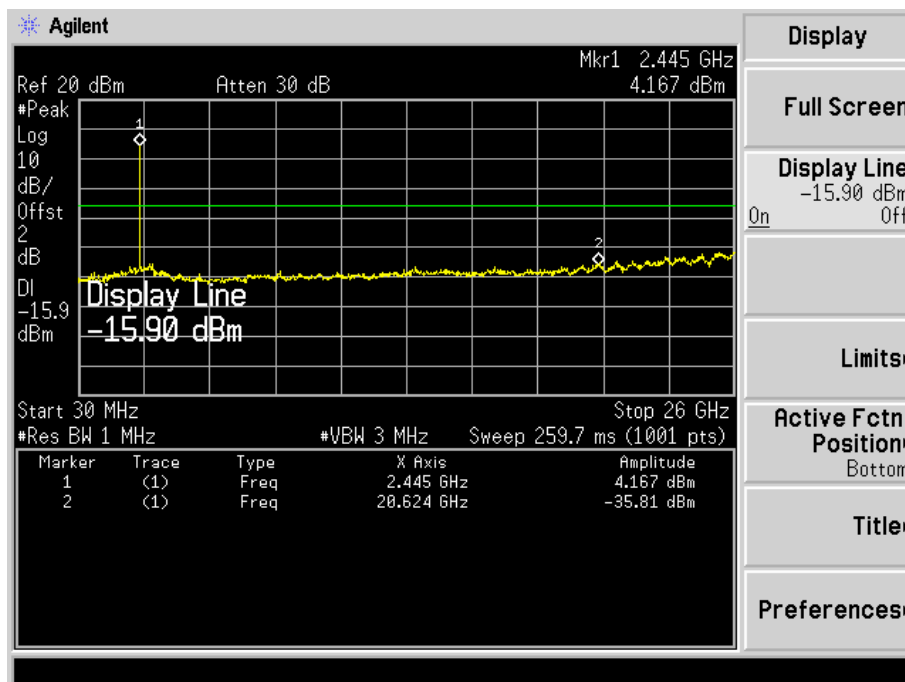


Highest

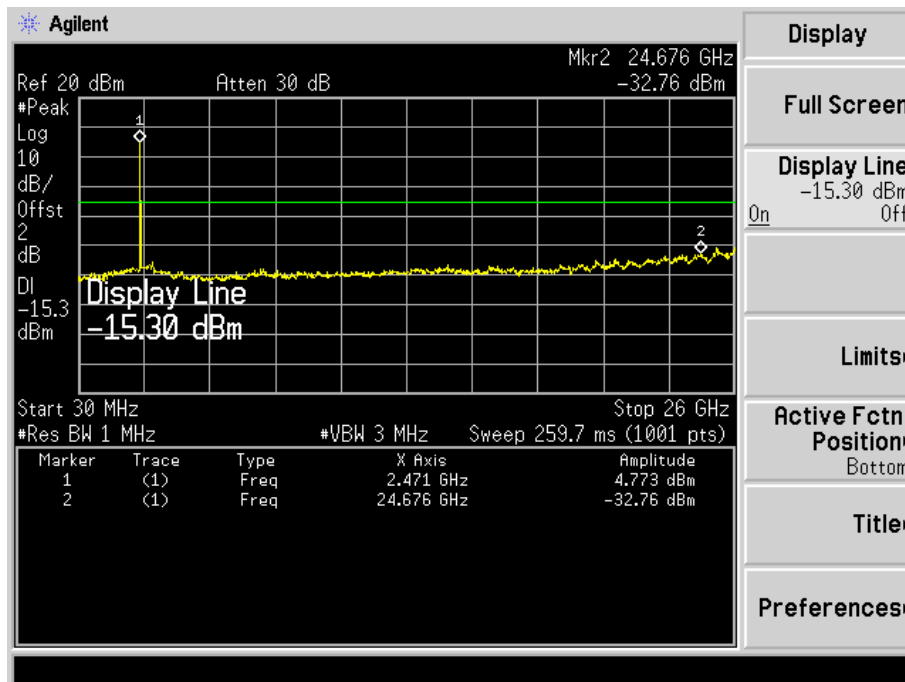


Spurious (Conducted)

802.11g-Lowest


Lowest

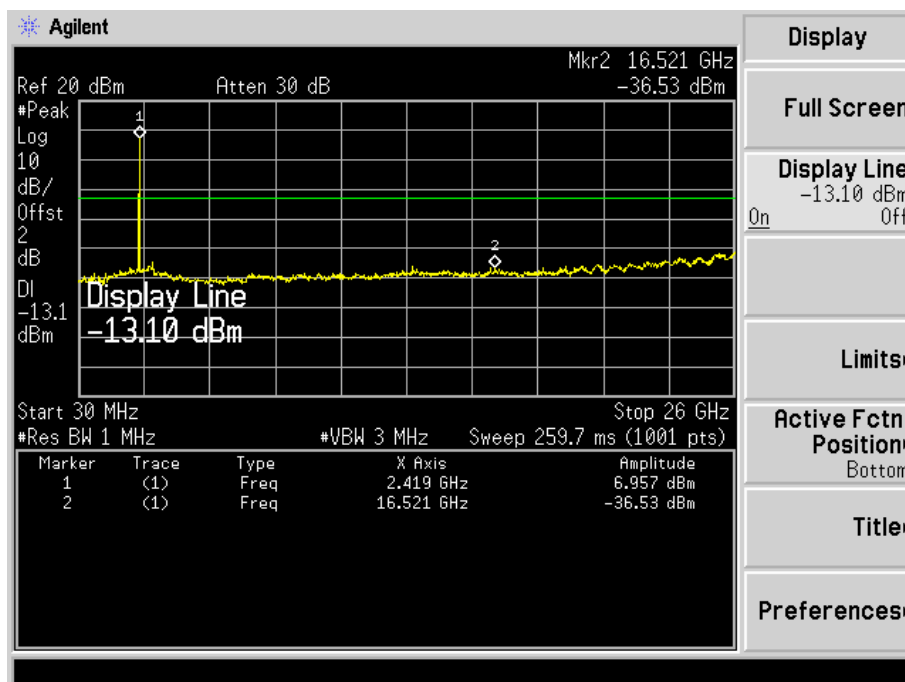


Middle

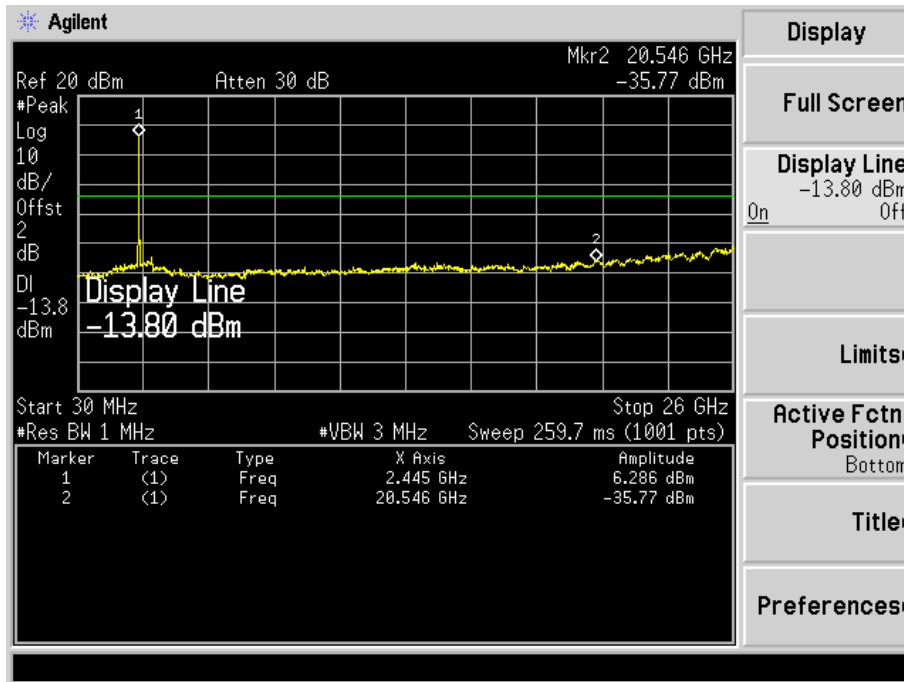


Highest

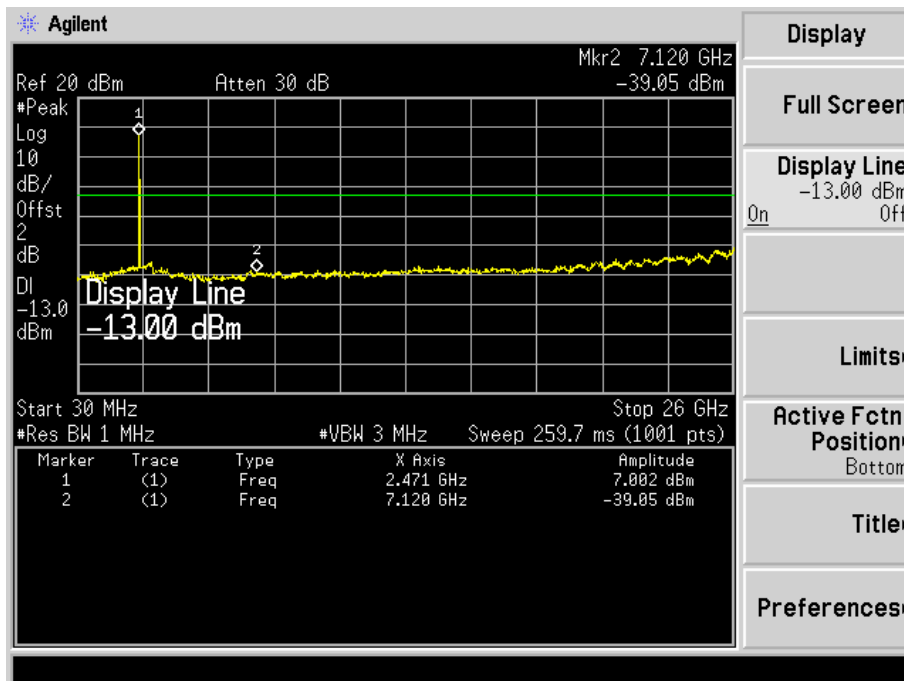


Spurious (Conducted)
 802.11n-HT20-Lowest
 Lowest

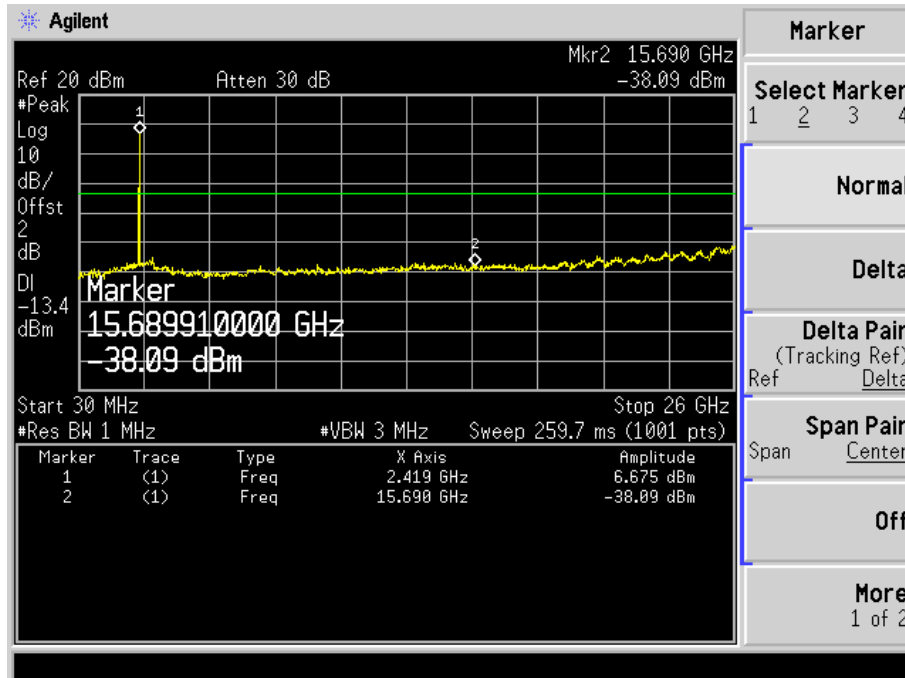


Middle

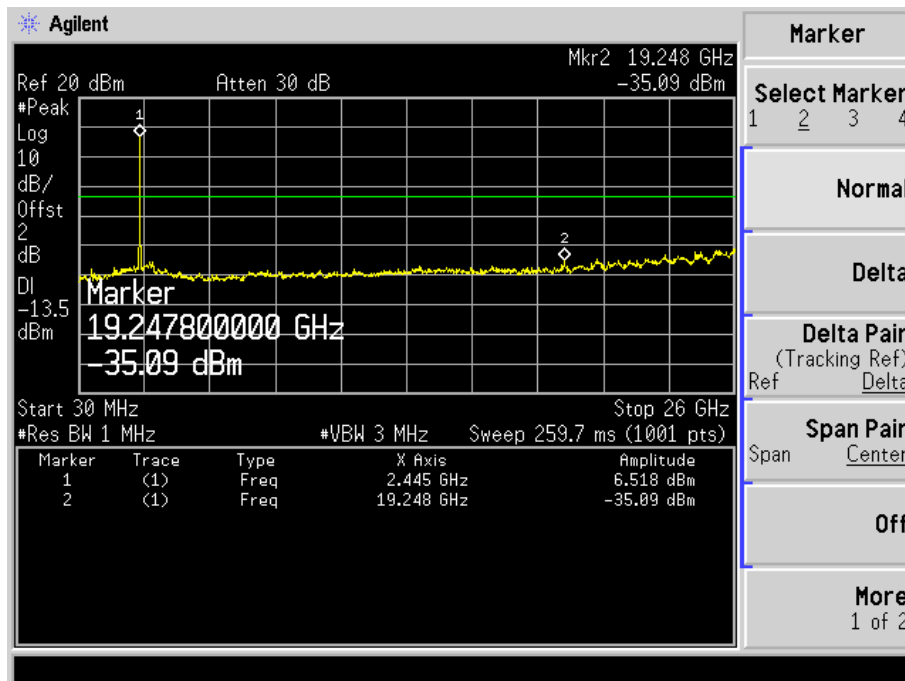


Highest

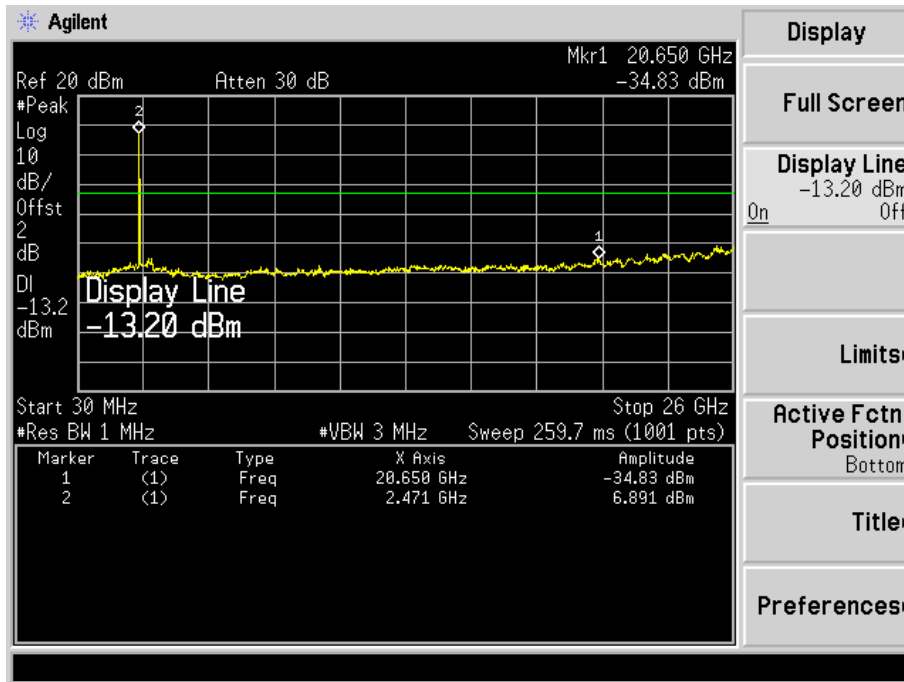


Spurious (Conducted)
802.11n-HT40-Lowest
Lowest

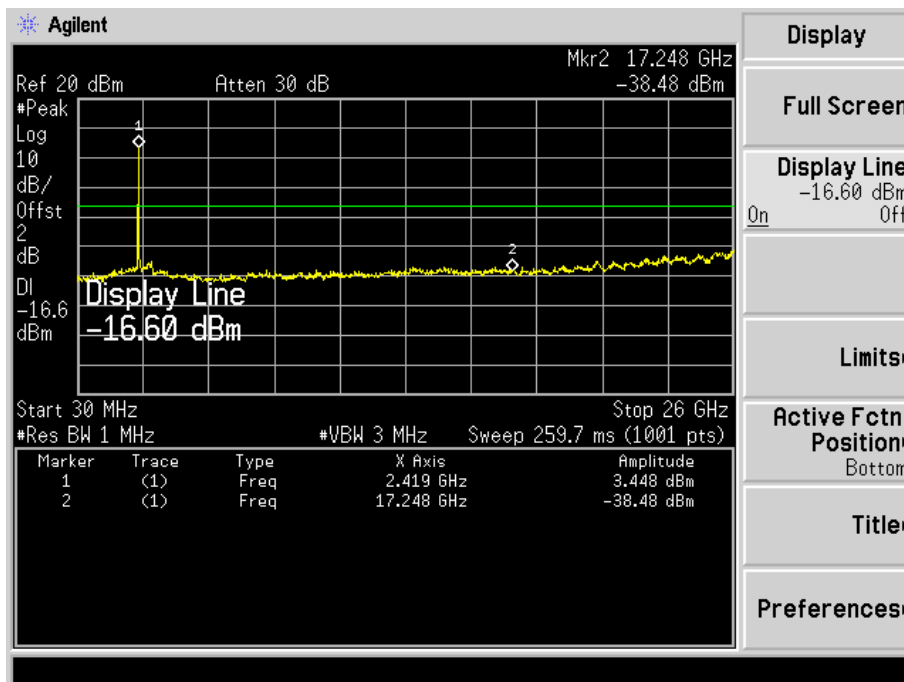

Middle

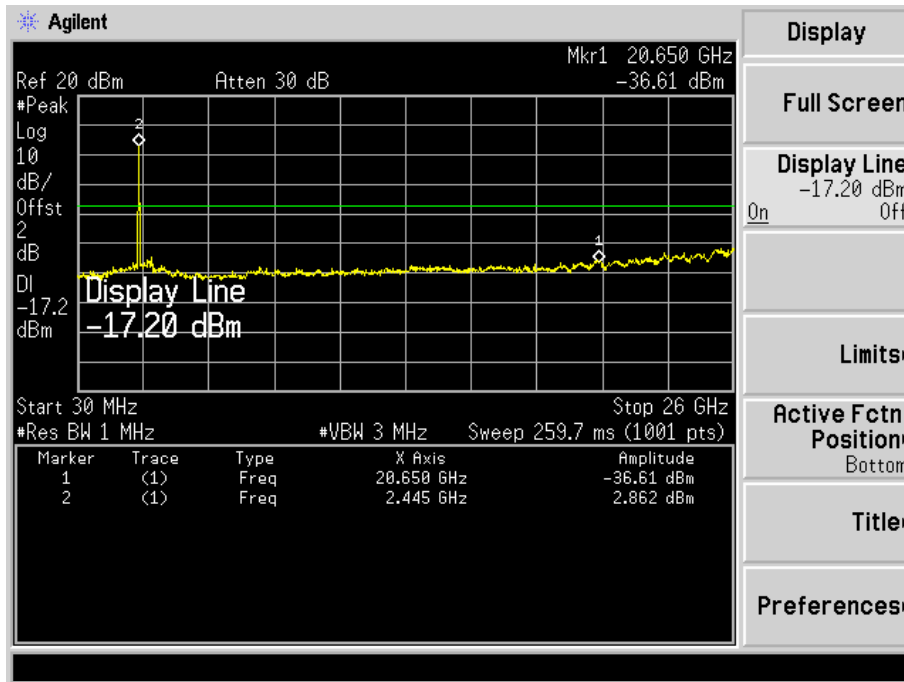

Highest

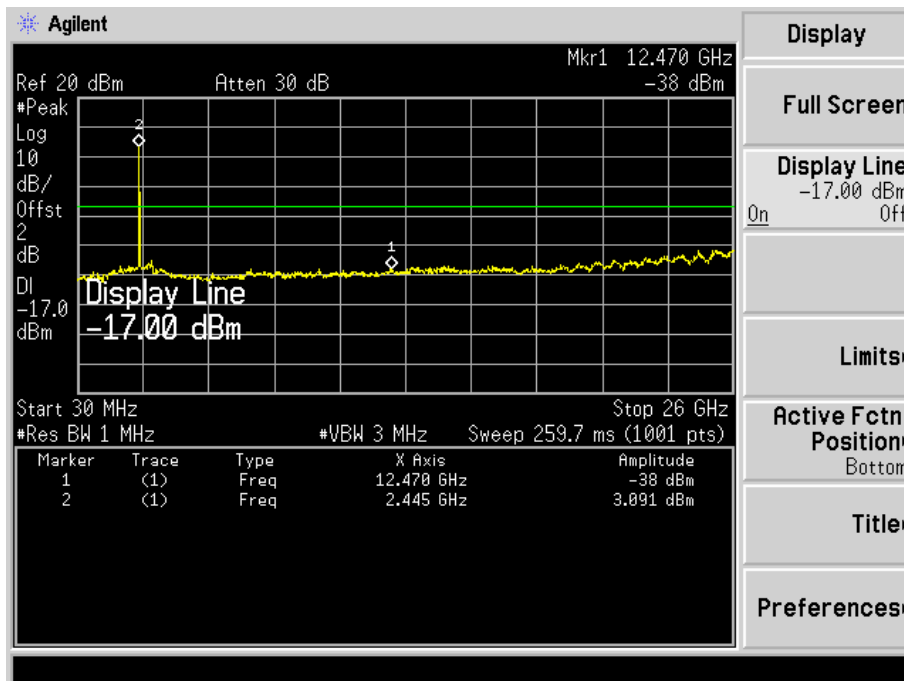


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

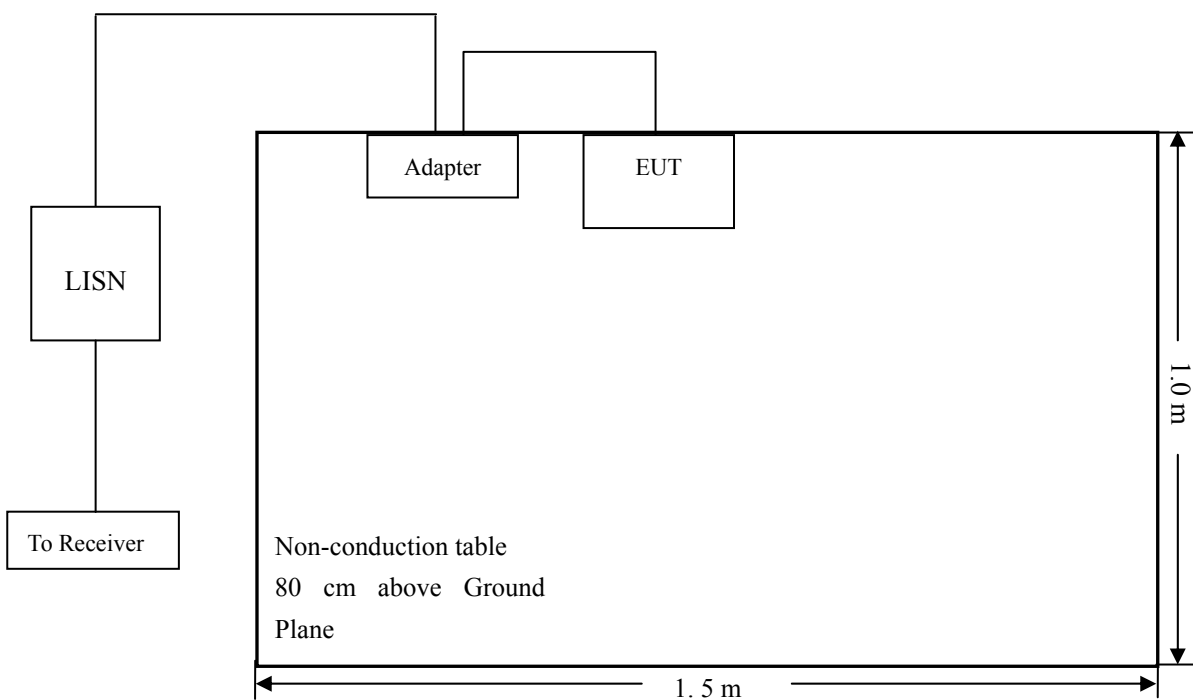

10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.5 Summary of Test Results/Plots

According to the data in section 10.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-7.54 dB at 0.1940 MHz in the Neutral mode, QP detector, Antenna A, 0.15-30MHz

10.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data- Antenna A


EUT: *Tablet PC*
 Tested Model: *X5 Pro*
 Operating Condition: *Transmitting(Wi-Fi)*
 Comment: *AC 120V/60Hz, Adapter DC 12V*

Test Specification: *Neutral*

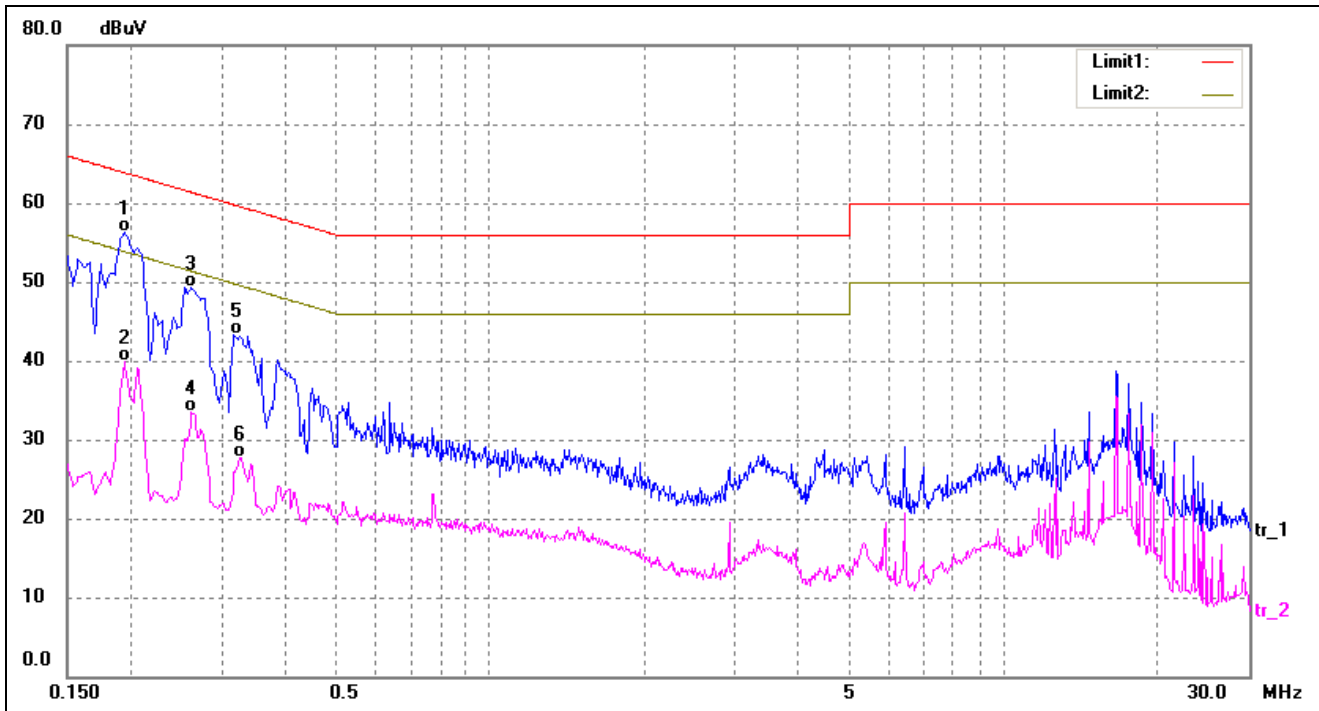

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1940	46.51	9.81	56.32	63.86	-7.54	QP
2	0.1940	30.05	9.81	39.86	53.86	-14.00	AVG
3	0.2620	39.55	9.80	49.35	61.37	-12.02	QP
4	0.2620	23.67	9.80	33.47	51.37	-17.90	AVG
5	0.3180	33.47	9.80	43.27	59.76	-16.49	QP
6	0.3260	17.97	9.80	27.77	49.55	-21.78	AVG

Test Specification: Line

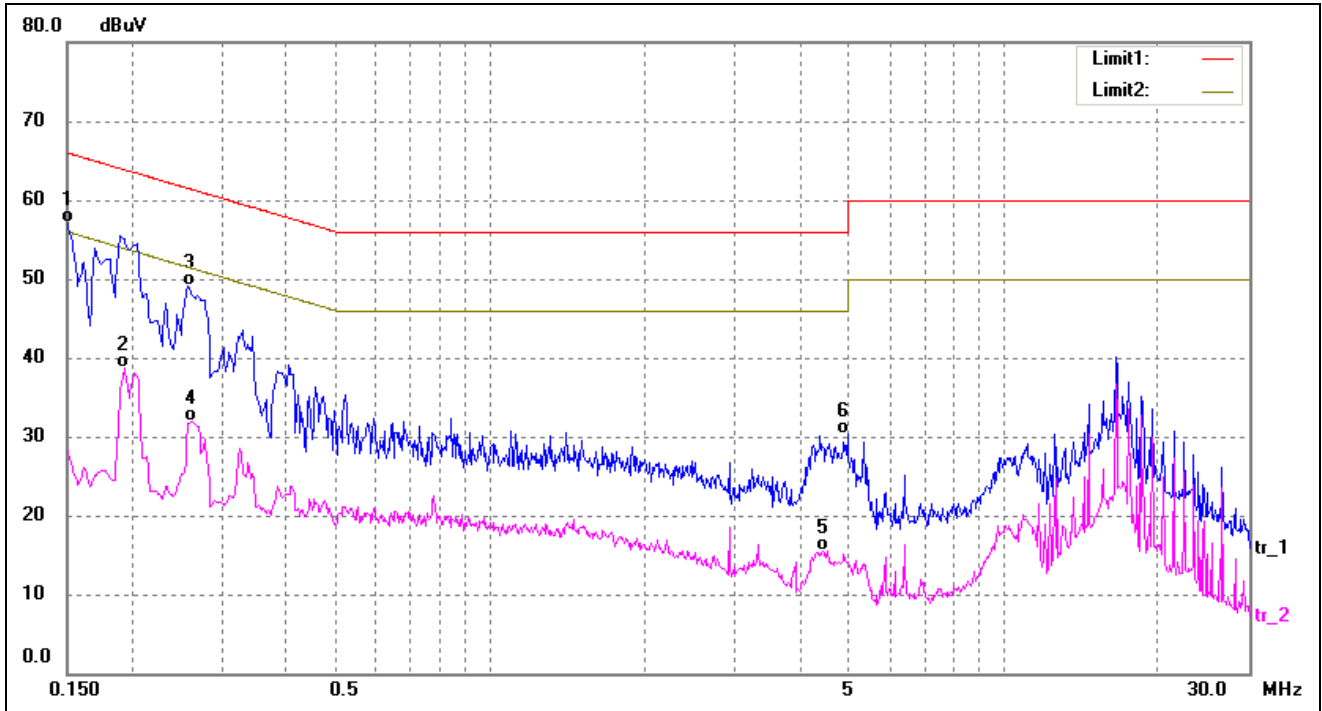


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	47.26	9.85	57.11	66.00	-8.89	QP
2	0.1940	28.98	9.81	38.79	53.86	-15.07	AVG
3	0.2580	39.37	9.80	49.17	61.50	-12.33	QP
4	0.2620	22.19	9.80	31.99	51.37	-19.38	AVG
5	4.4340	5.90	9.67	15.57	46.00	-30.43	AVG
6	4.9540	20.59	9.66	30.25	56.00	-25.75	QP

Plot of Conducted Emissions Test Data- Antenna B


EUT: *Tablet PC*
 Tested Model: *X5 Pro*
 Operating Condition: *Transmitting(Wi-Fi)*
 Comment: *AC 120V/60Hz*

Test Specification: *Neutral*

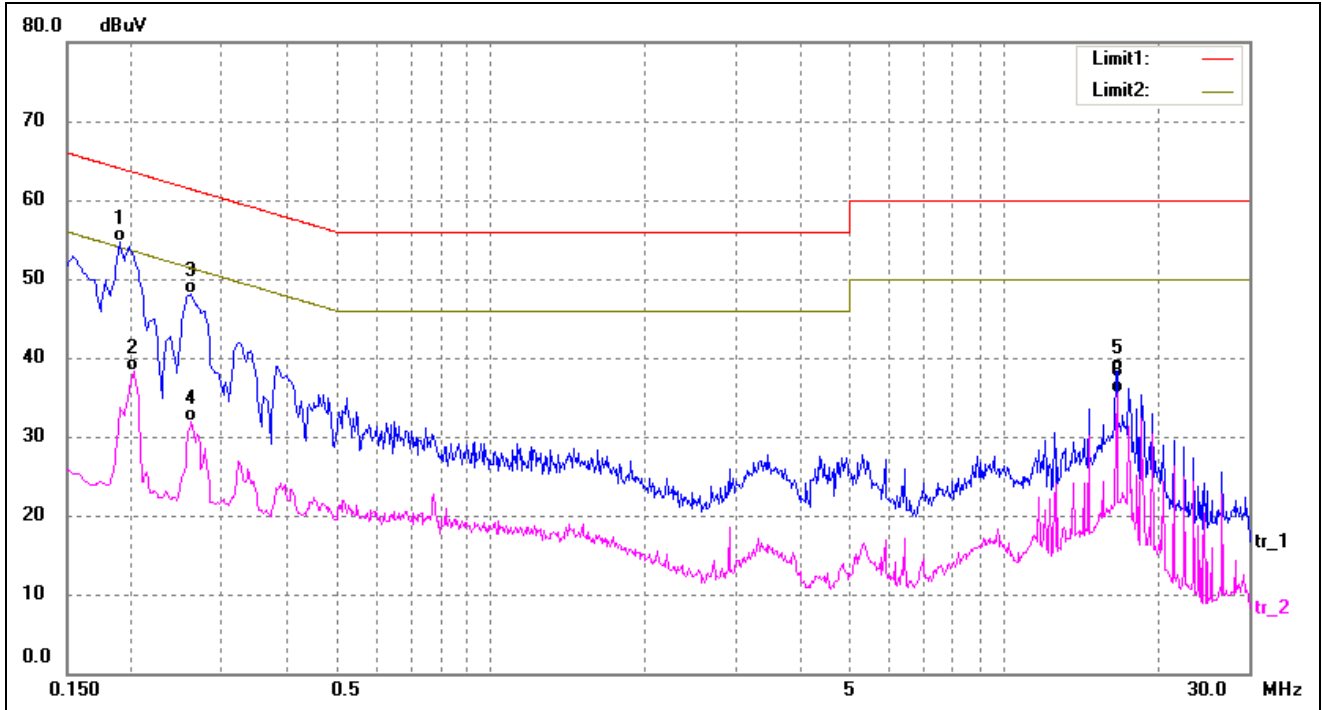

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1900	44.88	9.81	54.69	64.04	-9.35	QP
2	0.2020	28.60	9.80	38.40	53.53	-15.13	AVG
3	0.2620	38.22	9.80	48.02	61.37	-13.35	QP
4	0.2620	22.09	9.80	31.89	51.37	-19.48	AVG
5	16.5740	28.72	9.63	38.35	60.00	-21.65	QP
6	16.5740	25.94	9.63	35.57	50.00	-14.43	AVG

Test Specification: Line

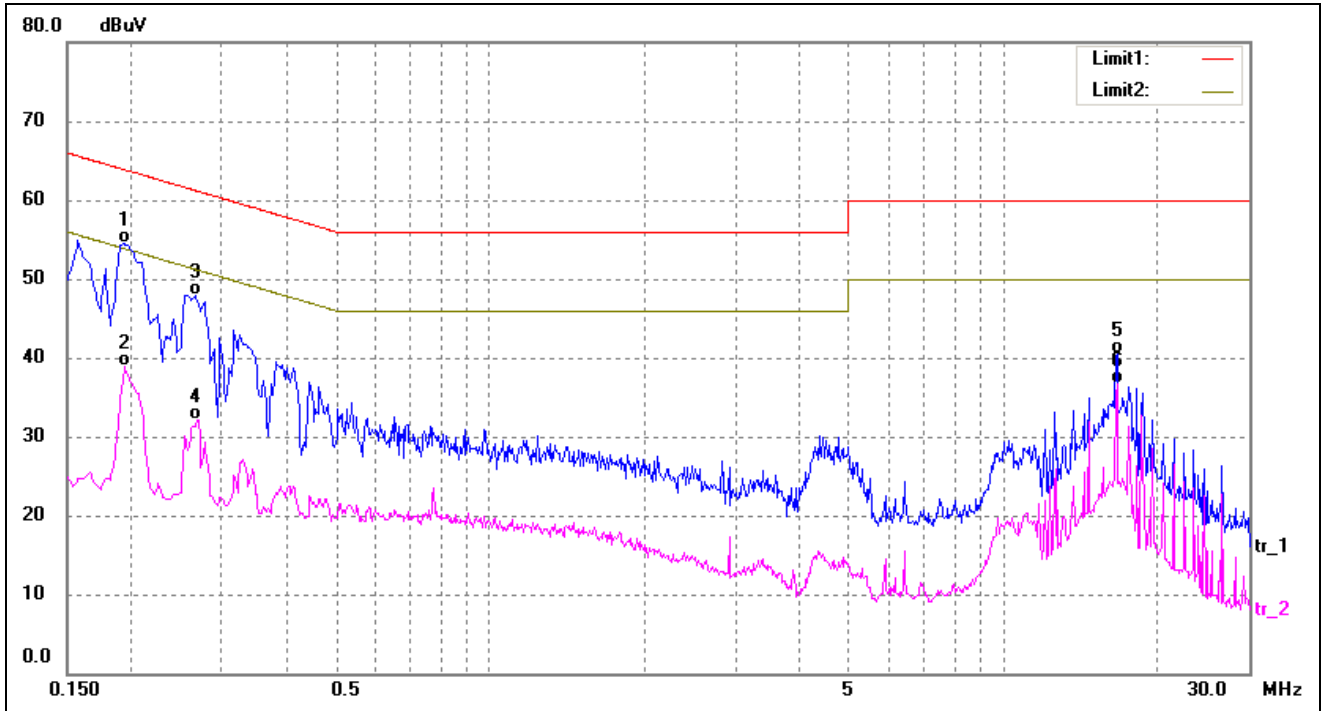

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1940	44.63	9.81	54.44	63.86	-9.42	QP
2	0.1940	29.10	9.81	38.91	53.86	-14.95	AVG
3	0.2660	38.19	9.80	47.99	61.24	-13.25	QP
4	0.2700	22.40	9.80	32.20	51.12	-18.92	AVG
5	16.5740	30.95	9.63	40.58	60.00	-19.42	QP
6	16.5740	27.17	9.63	36.80	50.00	-13.20	AVG

***** END OF REPORT *****