


ISED CABid: ES1909

Test Report No:
 NIE: 72146RRF.002A1

Partial Test Report

USA FCC Part 24

CANADA RSS-133

| | |
|---|---|
| (*) Identification of item tested | CPAP Device |
| (*) Trademark | ResMed |
| (*) Model and /or type reference | 37089 |
| (*) Derived model not tested | 37158, 37159, 37160, 37161, 37162, 37163, 37164, 37165 |
| Other identification of the product | HW version: R379-7135 SW version: SX558 FCC ID: 2ACHL-AIR104GU IC: 9103A-AIR104GU |
| (*) Features | 4G, 3G, 2G |
| Applicant | ResMed Pty Ltd 1 Elizabeth Macarthur Drive, Bella Vista, NSW, 2153, Australia |
| Test method requested, standard | USA FCC Part 24 (10-1-20 Edition). CANADA RSS-133 Issue 6, Jan. 2018 Amendment. ANSI C63.26-2015. ANSI/TIA-603-E: 2016. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018. |
| Approved by (name / position & signature) | Rafael López EMC Consumer & RF Lab. Manager  2022.10. 17 15:30:01 +02'00' |
| Date of issue | 2022-10-17 |
| Report template No | FDT08_24 (*) "Data provided by the client" |

Index

| | |
|---|----|
| Competences and guarantees | 3 |
| General conditions | 3 |
| Uncertainty..... | 3 |
| Data provided by the client | 3 |
| Usage of samples | 5 |
| Test sample description | 6 |
| Identification of the client | 6 |
| Testing period and place | 6 |
| Document history..... | 7 |
| Environmental conditions | 7 |
| Remarks and comments..... | 8 |
| Testing verdicts..... | 9 |
| Summary | 9 |
| Appendix A: Test results for FCC 24 / RSS-133 | 10 |

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document. **IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model 37089 is a CPAP device with integrated cellular connectivity.
3. Derived models not tested. These models have been declared by the supplier of the sample as being the same as the model under test.



Date: 13-May-2022

DECLARATION OF EQUIVALENCE

This document declares that the following designated products are equivalent to the unit under test 37089.

| Model Name / Product Code | Marketing Name |
|---------------------------|------------------------|
| 37158 | AirSense 10 CPAP |
| 37159 | AirSense 10 Elite |
| 37160 | AirSense 10 AutoSet |
| 37161 | AirSense 10 AutoSet FH |
| 37162 | AirCurve 10 ASV |
| 37163 | AirCurve 10 S |
| 37164 | AirCurve 10 VAuto |
| 37165 | AirCurve 10 ST |

All the above stated products have the same cellular hardware and firmware.

Applicant:

Company Name: ResMed Pty Ltd
Address: 1 Elizabeth Macarthur Drive,
Bella Vista NSW 2153
Australia

By,


Christopher Jenkins
Title: Associate Manager – Systems Engineering
Company: ResMed Pty Ltd
Telephone: +61 2 8884 1517
e-mail: Christopher.jenkins@resmed.com.au

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

| Control N° | Description | Model | Serial N° | Date of reception |
|------------|---------------|-------------------------|-------------|-------------------|
| 72146/001 | CPAP Device | 37089 AirSense 10 | 22221362833 | 2022/05/09 |
| 72146/008 | Water tub | -- | -- | 2022/05/09 |
| 72146/009 | Air tube | -- | -- | 2022/05/09 |
| 72146/010 | AC/DC Adapter | 370006 | -- | 2022/05/09 |
| 72146/011 | Power Cord | -- | -- | 2022/05/09 |

Sample S/01 has undergone the following test(s): The Radiated tests indicated in Appendix A.

- Sample S/02 is composed of the following elements:

| Control N° | Description | Model | Serial N° | Date of reception |
|------------|---------------|-------------------------|-------------|-------------------|
| 72146/007 | CPAP Device | 37089 AirSense 10 | 22221362874 | 2022/05/09 |
| 72146/008 | Water tub | -- | -- | 2022/05/09 |
| 72146/009 | Air tube | -- | -- | 2022/05/09 |
| 72146/010 | AC/DC Adapter | 370006 | -- | 2022/05/09 |
| 72146/011 | Power Cord | -- | -- | 2022/05/09 |

Sample S/02 has undergone the following test(s): The Conducted tests indicated in Appendix A.

Test sample description

| | | | | | | | |
|---|---|-------------------------------------|-------------------------------------|--------------------------|-----------------------------------|--------------------------|--------------------------|
| Ports.....: | Port name and description | Cable | | | | | |
| | | Specified max length [m] | Attached during test | Shielded | Coupled to patient ⁽³⁾ | | |
| | Power | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | |
| | - | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | |
| Supplementary information to the ports.....: | - | | | | | | |
| Rated power supply | Voltage and Frequency | | Reference poles | | | | |
| | | | L1 | L2 | L3 | N | PE |
| | <input checked="" type="checkbox"/> | AC: 100–240V, 50–60Hz 1.0–1.5A | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input checked="" type="checkbox"/> | AC: 115V, 400Hz 1.5A, (aircraft) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input checked="" type="checkbox"/> | DC: 24V, 90W (DC-DC Converter) | | | | | |
| <input type="checkbox"/> | DC: | | | | | | |
| Rated Power.....: | 53W (57VA) - Typical, 104W (108VA) – Peak | | | | | | |
| Clock frequencies.....: | N/A | | | | | | |
| Other parameters | - | | | | | | |
| Software version.....: | SX558 | | | | | | |
| Hardware version | R379-7135 | | | | | | |
| Dimensions in cm (W x H x D) ...: | 255 mm X 116 mm X 150 mm | | | | | | |
| Mounting position | <input checked="" type="checkbox"/> | Table top equipment | | | | | |
| | <input type="checkbox"/> | Wall/Ceiling mounted equipment | | | | | |
| | <input type="checkbox"/> | Floor standing equipment | | | | | |
| | <input type="checkbox"/> | Hand-held equipment | | | | | |
| | <input type="checkbox"/> | Other: | | | | | |
| Modules/parts.....: | Module/parts of test item | | Type | Manufacturer | | | |
| | Cellular Module (4G, 3G, 2G) | | LARA-R6001 | u-blox | | | |
| Accessories (not part of the test item) | Description | | Type | Manufacturer | | | |
| | - | | - | - | | | |
| Documents as provided by the applicant | Description | | File name | Issue date | | | |
| | - | | - | - | | | |
| | - | | - | - | | | |

Identification of the client

ResMed Pty Ltd
 1 Elizabeth Macarthur Drive, Bella Vista, NSW, 2153, Australia

Testing period and place

| | |
|---------------|--|
| Test Location | DEKRA Testing and Certification S.A.U. |
| Date (start) | 2022-05-24 |
| Date (finish) | 2022-06-09 |

Document history

| Report number | Date | Description |
|----------------|------------|--|
| 72146RRF.002 | 2022-08-26 | First release. |
| 72146RRF.002A1 | 2022-10-17 | First modification: update of typos. This modification test report cancels and replaces the test report 72146RRF.002s. |

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

| | |
|-------------------|------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 20 % Max. = 75 % |

In the semianechoic chamber, the following limits were not exceeded during the test.

| | |
|-------------------|------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 20 % Max. = 75 % |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

| | |
|-------------------|------------------------------|
| Temperature | Min. = 15 °C Max. = 35 °C |
| Relative humidity | Min. = 20 % Max. = 75 % |

Remarks and comments

The tests have been performed by the technical personnel: Rafael Fernández, Alfonso Gutiérrez, José Manuel Jiménez.

Used instrumentation:

Conducted Measurements

| | | Last Calibration | Due Calibration |
|----|---|------------------|-----------------|
| 1. | Shielded Room ETS LINDGREN S101 | N/A | N/A |
| 2. | Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500 | 2021/09 | 2023/09 |
| 3. | Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500 | 2022/05 | 2023/05 |

Radiated Measurements

| | | Last Calibration | Due Calibration |
|-----|--|------------------|-----------------|
| 1. | Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP | N/A | N/A |
| 2. | Shielded Room ETS LINDGREN S101 | N/A | N/A |
| 3. | Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E | 2020/04 | 2023/04 |
| 4. | Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D | 2019/11 | 2022/11 |
| 5. | Horn Antenna 18-40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170 | 2020/05 | 2023/05 |
| 6. | RF Preamplifier, 40 dB ,1-18 GHz BONN ELEKTRONIK BLMA 0118-1M | 2021/06 | 2022/06 |
| 7. | Pre-Amplifier G>30dB 17-40GHz BONN ELEKTRONIK BLMA 1840-4A | 2021/09 | 2022/09 |
| 8. | EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7 | 2021/11 | 2023/11 |
| 9. | Spectrum Analyzer ROHDE AND SCHWARZ FSW50 | 2020/07 | 2022/07 |
| 10. | Attenuator DC, 26.5 GHz, 10 dB, 2W TECHNIWAVE TWSMAG2 | 2022/05 | 2023/05 |
| 11. | Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500 | 2021/07 | 2022/07 |
| 12. | Digital Multimeter FLUKE 175 | 2021/11 | 2022/11 |
| 13. | Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D | 2020/08 | 2023/08 |
| 14. | Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E | 2020/10 | 2023/10 |
| 15. | RF Preamplifier G>30dB, 1-18GHz BONN ELEKTRONIK BLMA 0118-3A | 2021/12 | 2022/12 |
| 16. | EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7 | 2020/12 | 2022/12 |
| 17. | EMI Test Receiver 2Hz-44GHz, ROHDE AND SCHWARZ ESW44 | 2021/12 | 2023/12 |
| 18. | Wideband Radio Communication Tester ROHDE AND SCHWARZ CMW500 | 2021/09 | 2023/09 |
| 19. | EMC/RF Testing SW ROHDE AND SCHWARZ EMC32 | N/A | N/A |

Testing verdicts

| | |
|-----------------|-----|
| Not applicable: | N/A |
| Pass: | P |
| Fail: | F |
| Not measured: | N/M |

Summary

| FCC 24 / RSS-133 PARAGRAPH | | |
|---|---------|--------|
| Requirement – Test case | Verdict | Remark |
| Clause 24.232/RSS-133 Clause 6.4: RF output power | P | |
| Clause 2.1047/RSS-133 Clause 6.2: Modulation characteristics | N/M | (1) |
| Clause 24.235/RSS-133 Clause 6.3: Frequency stability | N/M | (1) |
| Clause 2.1049: Occupied Bandwidth | N/M | (1) |
| Clause 24.238/RSS-133 Clause 6.5: Spurious emissions at antenna terminals | N/M | (1) |
| Clause 24.238/RSS-133 Clause 6.5: Radiated emissions | P | |
| <u>Supplementary information and remarks:</u> | | |
| (1) Test not requested. | | |

Appendix A: Test results for FCC 24 / RSS-133

INDEX

| | |
|--------------------------|----|
| TEST CONDITIONS | 12 |
| RF Output Power | 13 |
| Radiated Emissions | 20 |

TEST CONDITIONS

POWER SUPPLY (*):

Vnormal: 24 Vdc
 Type of Power Supply: AC-DC Adapter.

ANTENNA GAIN (*):

| Bands | Gain (dBi) | Type |
|---------|------------|---------------------|
| 2G 1900 | 3.03 | Ceramic SMT Antenna |
| 3G II | 3.03 | Ceramic SMT Antenna |
| LTE 2 | 3.03 | Ceramic SMT Antenna |

(*): Declared by the Applicant.

TEST FREQUENCIES:

2G Band 1900 MHz:

GPRS and EDGE modulations:

Low Channel (512): 1850.2 MHz
 Middle Channel (662): 1880.2 MHz
 High Channel (810): 1909.8 MHz

3G Band II:

WCDMA and HSUPA modulations:

Low Channel (9262): 1852.4 MHz
 Middle Channel (9400): 1880.0 MHz
 High Channel (9538): 1907.6 MHz

LTE Band 2. QPSK and 16QAM modulations:

| | Channel (Frequency. MHz) | | | | | |
|--------|--------------------------|----------------|----------------|--------------|----------------|--------------|
| | BW=1.4 MHz | BW=3 MHz | BW=5 MHz | BW=10 MHz | BW=15 MHz | BW=20 MHz |
| Low | 18607 (1850.7) | 18615 (1851.5) | 18650 (1852.5) | 18675 (1855) | 18675 (1857.5) | 18700 (1860) |
| Middle | 18900 (1880) | 18900 (1880) | 18900 (1880) | 18900 (1880) | 18900 (1880) | 18900 (1880) |
| High | 19193 (1909.3) | 19185 (1908.5) | 19150 (1907.5) | 19150 (1905) | 19125 (1902.5) | 19100 (1900) |

RF Output Power

SPECIFICATION:

FCC §2.1046 and §24.232:

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.).
The peak-to-average ratio (PAR) of the transmission shall not exceed 13 dB.

RSS-133. Clause 6.4.:

Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. The peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the High PAPR during periods of continuous transmission.

METHOD:

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester CMW500, selecting maximum transmission power of the EUT and different modes of modulation.

The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

The peak-to-average power ratio (PAPR) is measured using an attenuator, power splitter and spectrum analyser with a Complementary Cumulative Distribution Function implemented.


The EUT was controlled via the Universal Radio Communication tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation.

TEST SETUP:

1. CONDUCTED AVERAGE POWER:



2. PEAK-TO-AVERAGE POWER RATIO (PAPR) and Conducted Average power:

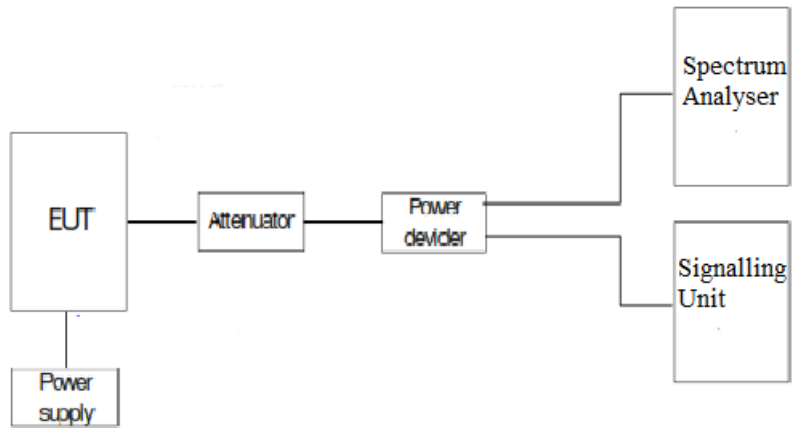

RESULTS:

1. AVERAGE POWER:

2G Band 1900 MHz :

GPRS modulation:

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 29.47 | 29.61 | 29.51 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 32.50 | 32.64 | 32.54 |
| Maximum effective radiated power E.R.P. (dBm) | 30.35 | 30.49 | 30.39 |
| Peak-to-average ratio (PAPR) (dB) | 7.71 | 7.72 | 7.72 |
| Measurement uncertainty (dB) | <±0.94 | | |

EDGE modulation:

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 25.86 | 25.69 | 25.95 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 28.89 | 28.72 | 28.98 |
| Maximum effective radiated power E.R.P. (dBm) | 26.74 | 26.57 | 26.83 |
| Peak-to-average ratio (PAPR) (dB) | 8.51 | 8.29 | 7.69 |
| Measurement uncertainty (dB) | <±0.94 | | |

3G Band II:

WCDMA modulation:

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.67 | 24.64 | 24.83 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.70 | 27.67 | 27.86 |
| Maximum effective radiated power E.R.P. (dBm) | 25.55 | 25.52 | 25.71 |
| Peak-to-average ratio (PAPR) (dB) | 3.33 | 3.19 | 3.19 |
| Measurement uncertainty (dB) | <±0.94 | | |

HSUPA modulation:

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 21.38 | 21.18 | 21.50 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 24.41 | 24.21 | 24.53 |
| Maximum effective radiated power E.R.P. (dBm) | 22.26 | 22.06 | 22.38 |
| Peak-to-average ratio (PAPR) (dB) | 6.7 | 5.72 | 6.59 |
| Measurement uncertainty (dB) | <±0.94 | | |

LTE BAND 2:

LTE Band 2. QPSK modulation. BW=1.4 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.72 | 24.78 | 24.39 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.75 | 27.81 | 27.42 |
| Maximum effective radiated power E.R.P. (dBm) | 25.60 | 25.66 | 25.27 |
| PAPR (dB) | (*) | 5.18 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 2.
 Worst case PAPR: Modulation QPSK. RB Size: 6. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=1.4 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 21.8 | 23.72 | 21.55 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 24.83 | 26.75 | 24.58 |
| Maximum effective radiated power E.R.P. (dBm) | 22.68 | 24.60 | 22.43 |
| PAPR (dB) | 6.47 | 6.09 | 5.99 |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 3. RB Offset: 2.
 Worst case PAPR: Modulation 16QAM. RB Size: 6. RB Offset: 0.

LTE Band 2. QPSK modulation. BW=3 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.27 | 24.51 | 24.42 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.30 | 27.54 | 27.45 |
| Maximum effective radiated power E.R.P. (dBm) | 25.15 | 25.39 | 25.30 |
| PAPR (dB) | (*) | 5.34 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 7.
 Worst case PAPR: Modulation QPSK. RB Size: 15. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=3 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 22.16 | 23.66 | 22,31 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 25.19 | 26.69 | 25.34 |
| Maximum effective radiated power E.R.P. (dBm) | 23.04 | 24.54 | 23,19 |
| PAPR (dB) | 6.39 | 6.20 | 6.15 |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 1. RB Offset: 14.
 Worst case PAPR: Modulation 16QAM. RB Size: 15. RB Offset: 0.

LTE Band 2. QPSK modulation. BW=5 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.47 | 24.39 | 24.47 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.50 | 27.42 | 27.50 |
| Maximum effective radiated power E.R.P. (dBm) | 25.35 | 25.27 | 25.35 |
| PAPR (dB) | (*) | 5.37 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 12.
 Worst case PAPR: Modulation QPSK. RB Size: 25. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=5 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 21,56 | 23.34 | 22,35 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 24.59 | 26.37 | 25.38 |
| Maximum effective radiated power E.R.P. (dBm) | 22,44 | 24.22 | 23,23 |
| PAPR (dB) | 6.44 | 6.06 | 6.11 |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 1. RB Offset: 24.
 Worst case PAPR: Modulation 16QAM. RB Size: 25. RB Offset: 0.

LTE Band 2. QPSK modulation. BW=10 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.90 | 24.65 | 24.76 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.93 | 27.68 | 27.79 |
| Maximum effective radiated power E.R.P. (dBm) | 25.78 | 25.53 | 25.64 |
| PAPR (dB) | (*) | 5.35 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 24.
 Worst case PAPR: Modulation QPSK. RB Size: 50. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=10 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 22,01 | 23.96 | 22,34 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 25.04 | 26.99 | 25.37 |
| Maximum effective radiated power E.R.P. (dBm) | 22.89 | 24.84 | 23.22 |
| PAPR (dB) | 6.17 | 5.95 | 5.88 |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 1. RB Offset: 49.
 Worst case PAPR: Modulation 16QAM. RB Size: 25. RB Offset: 24.

LTE Band 2. QPSK modulation. BW=15 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.58 | 25.11 | 24.71 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.61 | 28.14 | 27.74 |
| Maximum effective radiated power E.R.P. (dBm) | 25.46 | 25.99 | 25.59 |
| PAPR (dB) | (*) | 5.5 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 37.
 Worst case PAPR: Modulation QPSK. RB Size: 75. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=15 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 21.49 | 24.86 | 22.55 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 24.52 | 27.89 | 25.58 |
| Maximum effective radiated power E.R.P. (dBm) | 22.37 | 25.74 | 23.43 |
| PAPR (dB) | 5.88 | 5.74 | 5.66 |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 1. RB Offset: 37.
 Worst case PAPR: Modulation 16QAM. RB Size: 1. RB Offset: 74.

LTE Band 2. QPSK modulation. BW=20 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 24.94 | 24.85 | 24.49 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 27.97 | 27.88 | 27.52 |
| Maximum effective radiated power E.R.P. (dBm) | 25.82 | 25.73 | 25.37 |
| PAPR (dB) | (*) | 5.3 | (*) |
| Measurement uncertainty (dB) | <±0.94 | | |

Worst case AVERAGE POWER: Modulation QPSK. RB Size: 1. RB Offset: 49.
 Worst case PAPR: Modulation QPSK. RB Size: 100. RB Offset: 0.
 (*): Preliminary measurements determined the Middle Channel as the worst case.

LTE Band 2. 16QAM modulation. BW=20 MHz.

| Channel | Low | Middle | High |
|--|--------|--------|-------|
| Maximum declared antenna gain (dBi) | 3.03 | 3.03 | 3.03 |
| Measured maximum average power (dBm) at antenna port | 21.61 | 23.98 | 21.38 |
| Maximum equivalent isotropically radiated power (E.I.R.P.) (dBm) | 24.64 | 27.01 | 24.41 |
| Maximum effective radiated power E.R.P. (dBm) | 22.49 | 24.86 | 22.26 |
| PAPR (dB) | 5.19 | 5.87 | 5.5 |
| Measurement uncertainty (dB) | <±0.94 | | |


Worst case AVERAGE POWER: Modulation 16QAM. RB Size: 1. RB Offset: 2.
 Worst case PAPR: Modulation 16QAM. RB Size: 1. RB Offset: 99.

Verdict: PASS


2. PEAK-TO-AVERAGE POWER RATIO (PAPR):

2G Band 1900 MHz. GPRS MODULATION.


Low Channel:

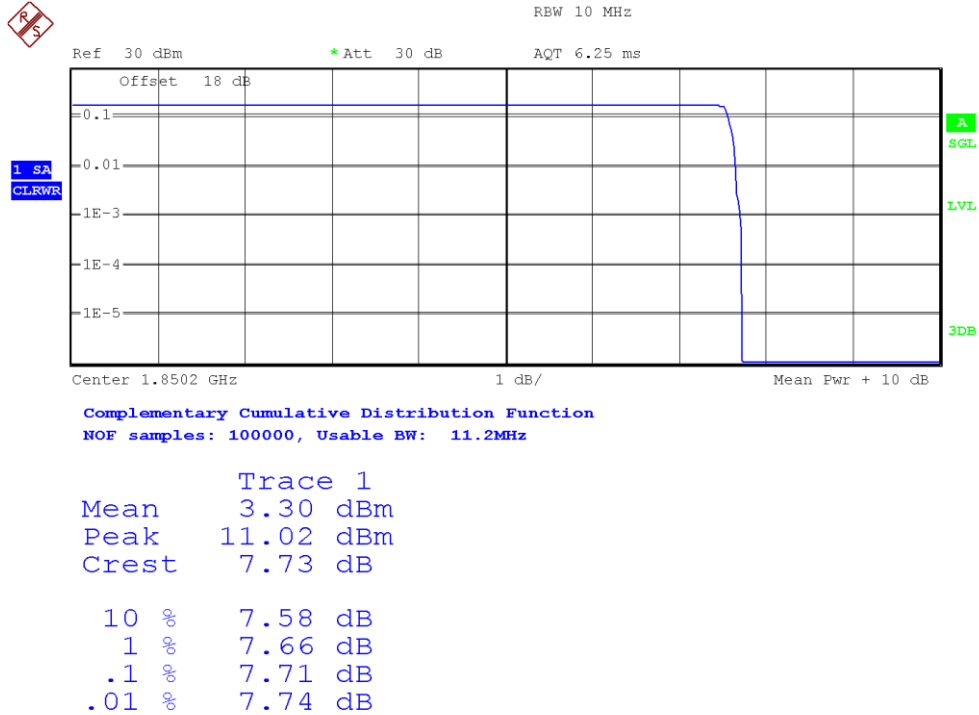

Middle Channel:

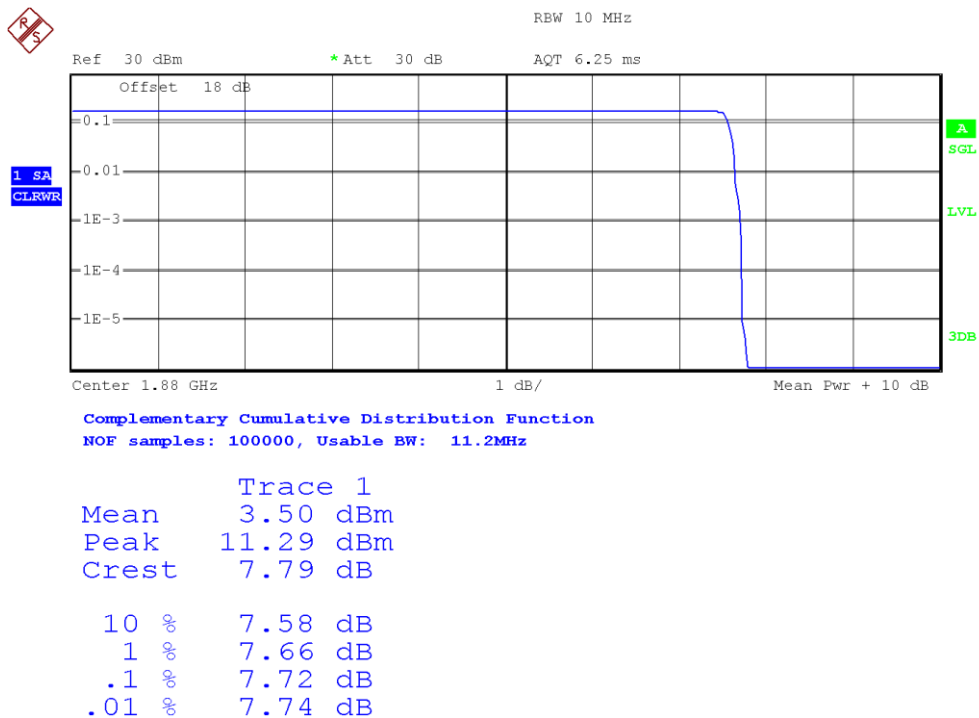

High Channel:

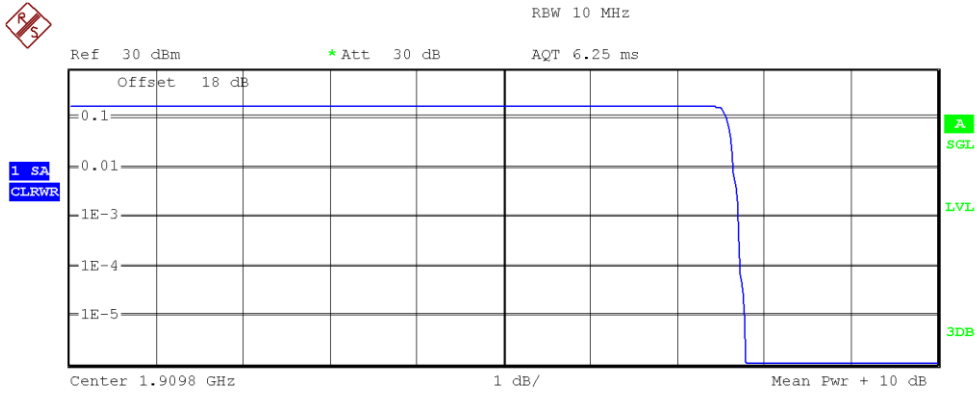


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 3.23 dBm |
| Peak | 11.01 dBm |
| Crest | 7.78 dB |
| 10 % | 7.58 dB |
| 1 % | 7.66 dB |
| .1 % | 7.72 dB |
| .01 % | 7.74 dB |

2G Band 1900 MHz. EDGE MODULATION.


Low Channel:

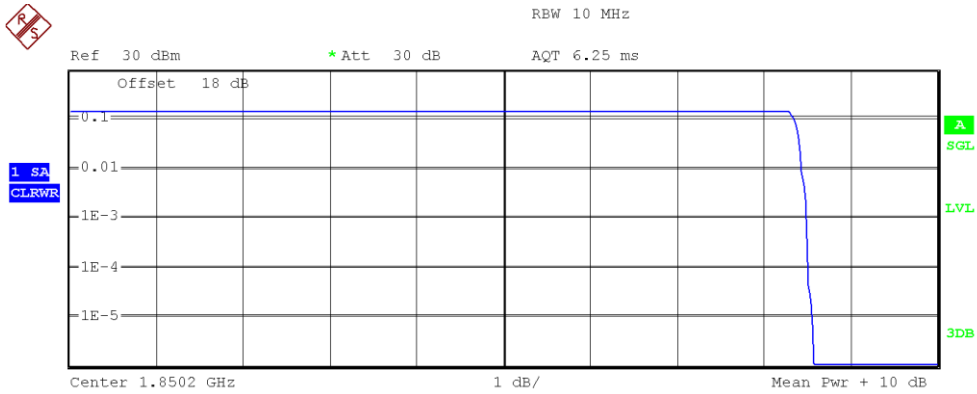

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 2.52 dBm |
| Peak | 11.09 dBm |
| Crest | 8.57 dB |
| 10 % | 8.35 dB |
| 1 % | 8.45 dB |
| .1 % | 8.51 dB |
| .01 % | 8.53 dB |


Middle Channel:

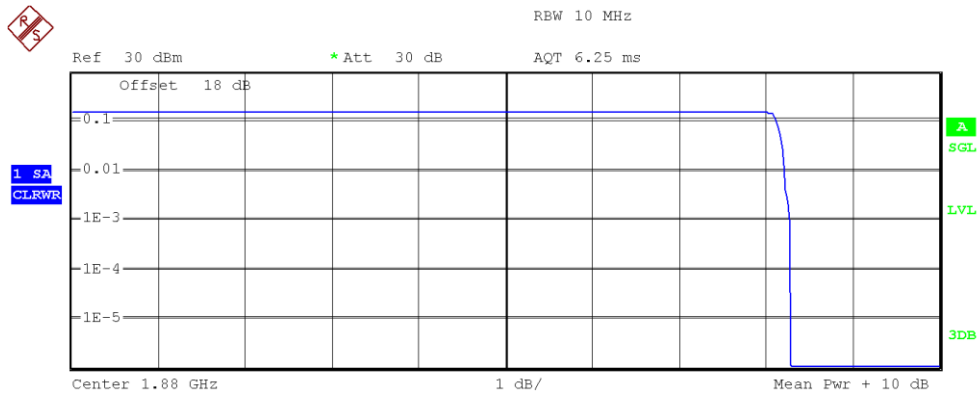

Center 1.88 GHz 1 dB/ Mean Pwr + 10 dB
 Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 2.86 dBm |
| Peak | 11.15 dBm |
| Crest | 8.29 dB |
| 10 % | 8.13 dB |
| 1 % | 8.22 dB |
| .1 % | 8.29 dB |
| .01 % | 8.30 dB |

High Channel:

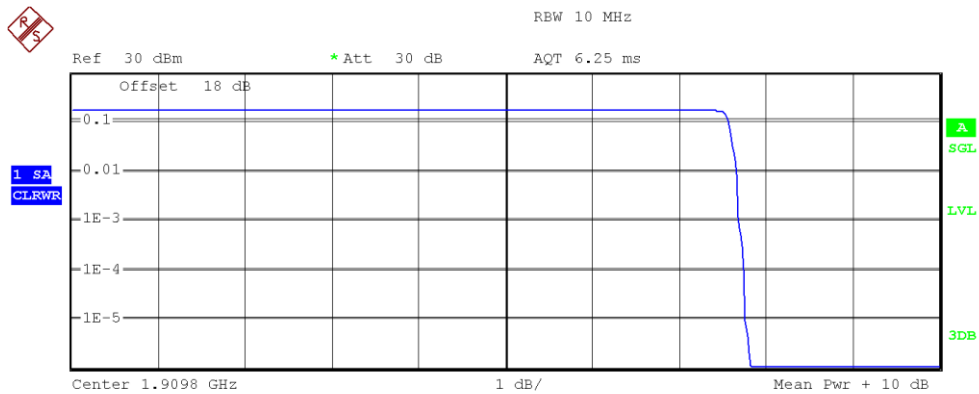


Center 1.9098 GHz 1 dB/ Mean Pwr + 10 dB
 Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz


| Trace 1 | |
|---------|-----------|
| Mean | 3.26 dBm |
| Peak | 11.08 dBm |
| Crest | 7.82 dB |
| 10 % | 7.58 dB |
| 1 % | 7.68 dB |
| .1 % | 7.69 dB |
| .01 % | 7.76 dB |

3G Band II. WCDMA MODULATION.


Low Channel:

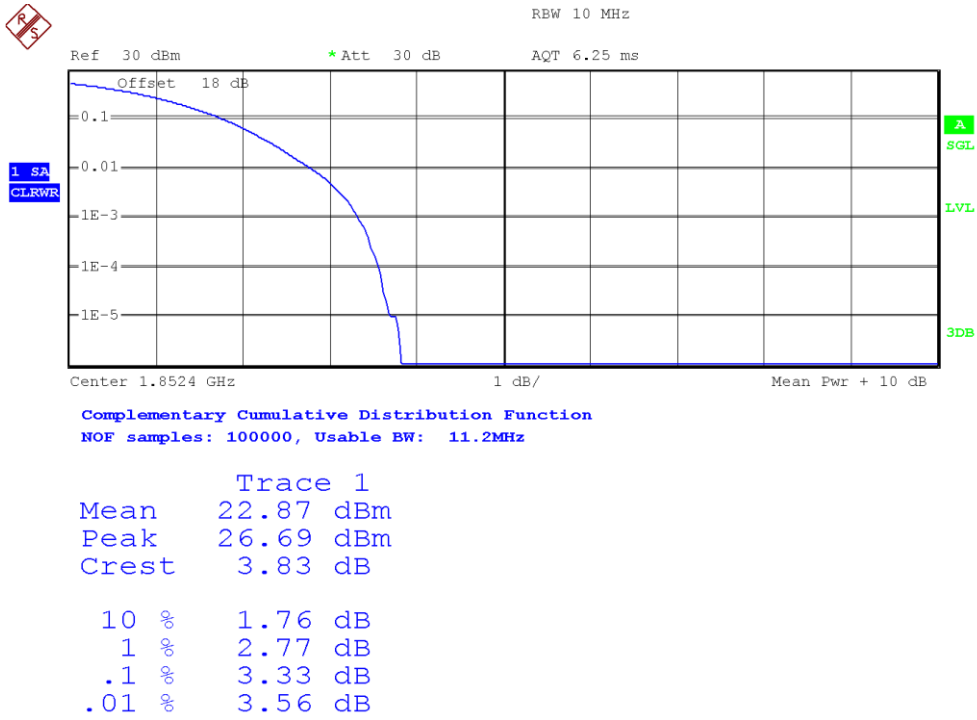

Middle Channel:

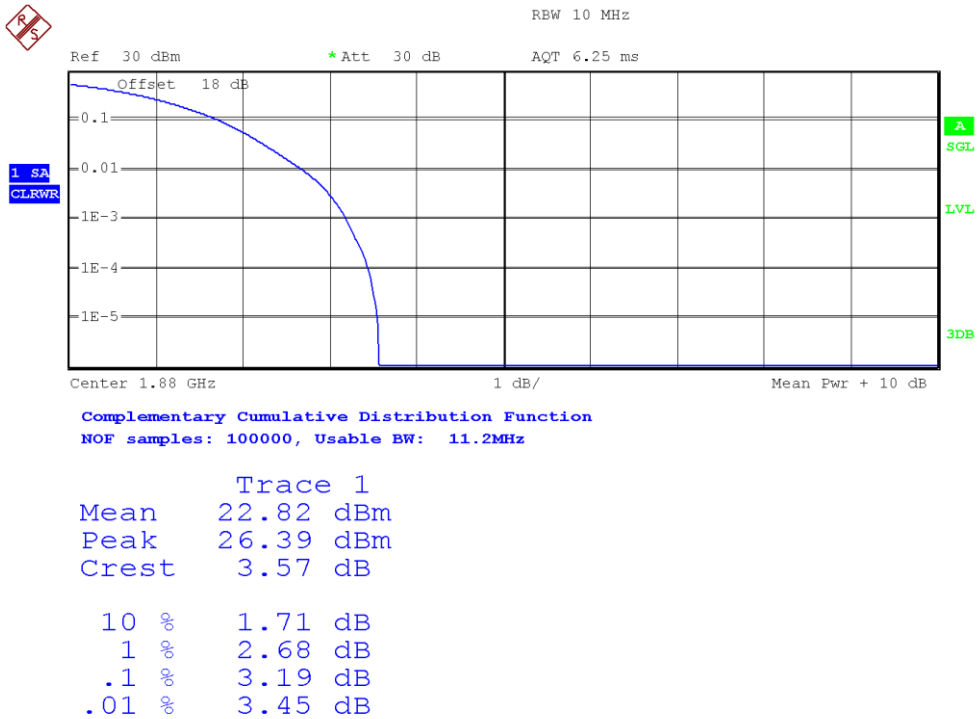

High Channel:

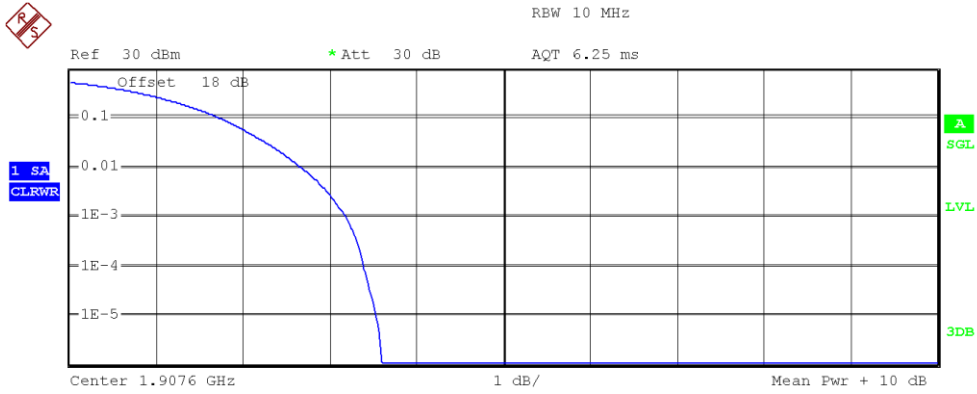


Center 1.9076 GHz 1 dB/ Mean Pwr + 10 dB
 Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 22.92 dBm |
| Peak | 26.52 dBm |
| Crest | 3.60 dB |
| 10 % | 1.73 dB |
| 1 % | 2.66 dB |
| .1 % | 3.19 dB |
| .01 % | 3.40 dB |

3G Band II. HSUPA MODULATION.


Low Channel:

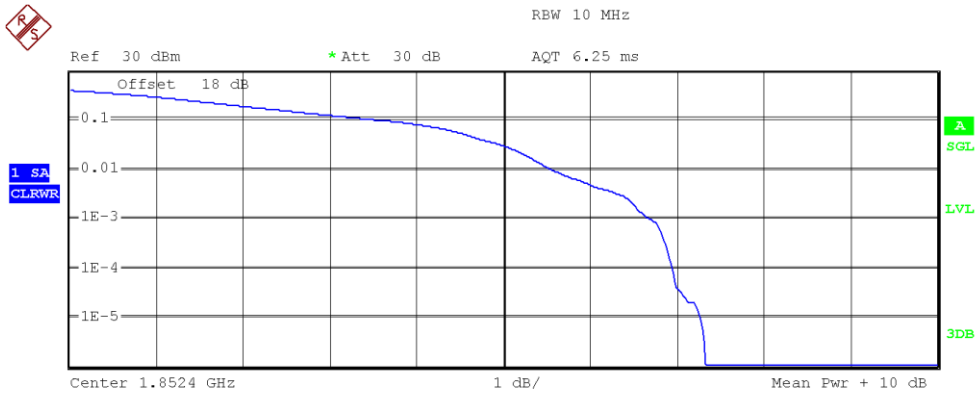

Center 1.8524 GHz 1 dB/ Mean Pwr + 10 dB
 Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 19.85 dBm |
| Peak | 27.19 dBm |
| Crest | 7.33 dB |
| 10 % | 3.59 dB |
| 1 % | 5.56 dB |
| .1 % | 6.70 dB |
| .01 % | 6.96 dB |


Middle Channel:

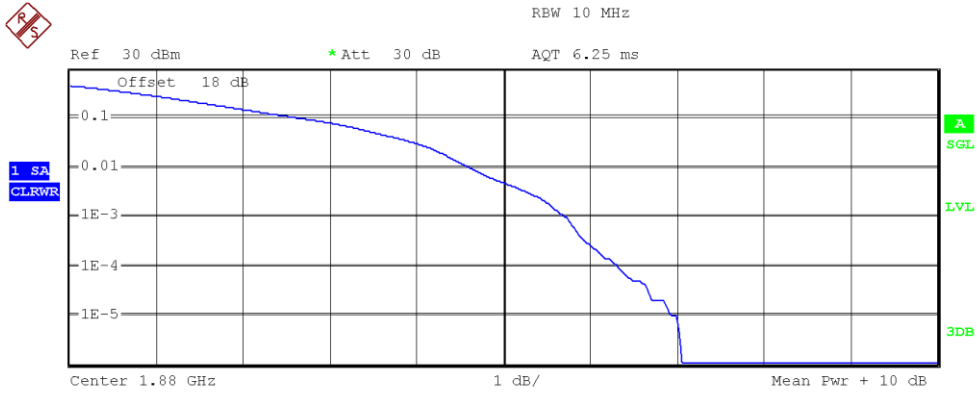

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 19.40 dBm |
| Peak | 26.46 dBm |
| Crest | 7.06 dB |
| 10 % | 2.66 dB |
| 1 % | 4.60 dB |
| .1 % | 5.72 dB |
| .01 % | 6.31 dB |

High Channel:

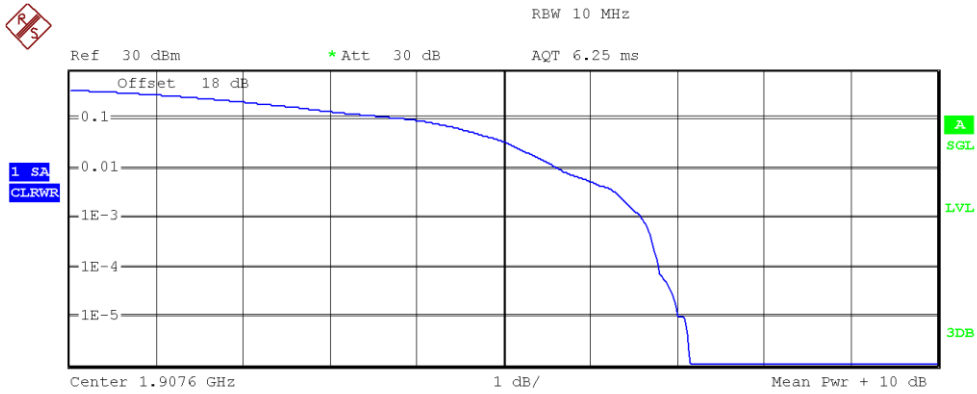


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 19.72 dBm |
| Peak | 26.87 dBm |
| Crest | 7.15 dB |
| 10 % | 3.91 dB |
| 1 % | 5.63 dB |
| .1 % | 6.59 dB |
| .01 % | 6.79 dB |


LTE Band 2. Bandwidth = 1.4 MHz. Modulation QPSK. RB Size: 6. RB Offset: 0.

Middle Channel:

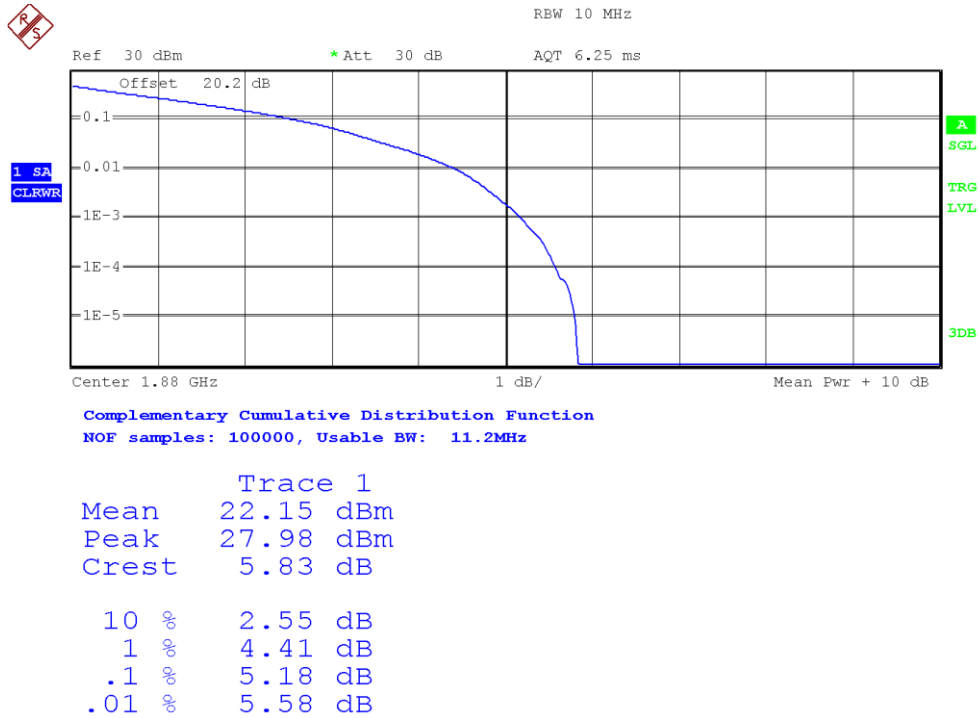


LTE Band 2. Bandwidth = 3 MHz. Modulation QPSK. RB Size: 15. RB Offset: 0.

Middle Channel:

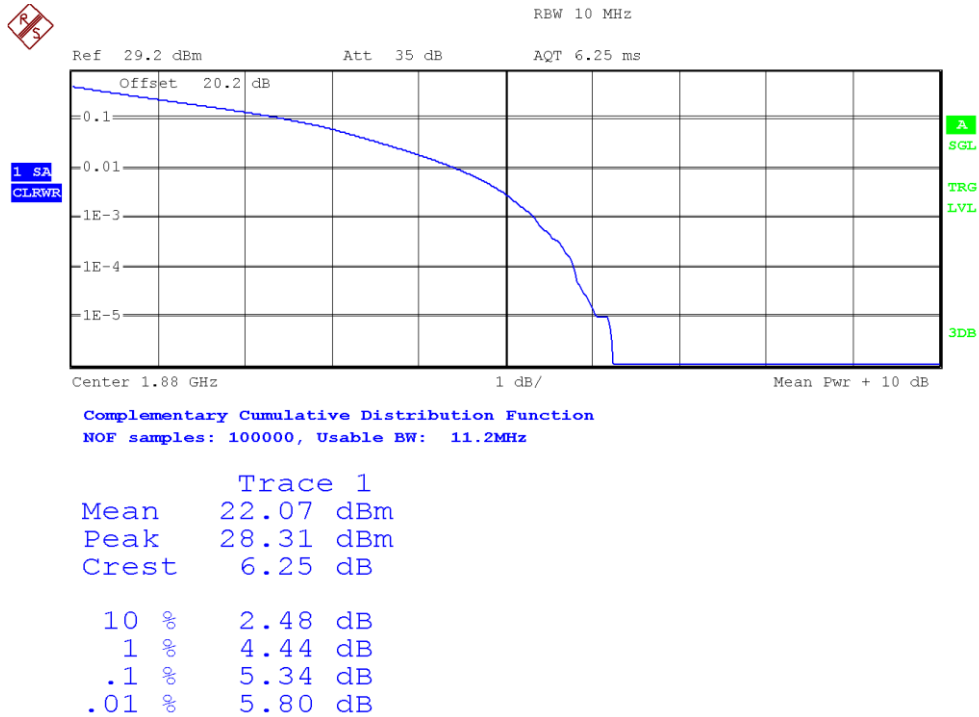


LTE Band 2. Bandwidth = 5 MHz. Modulation QPSK. RB Size: 25. RB Offset: 0.

Middle Channel:

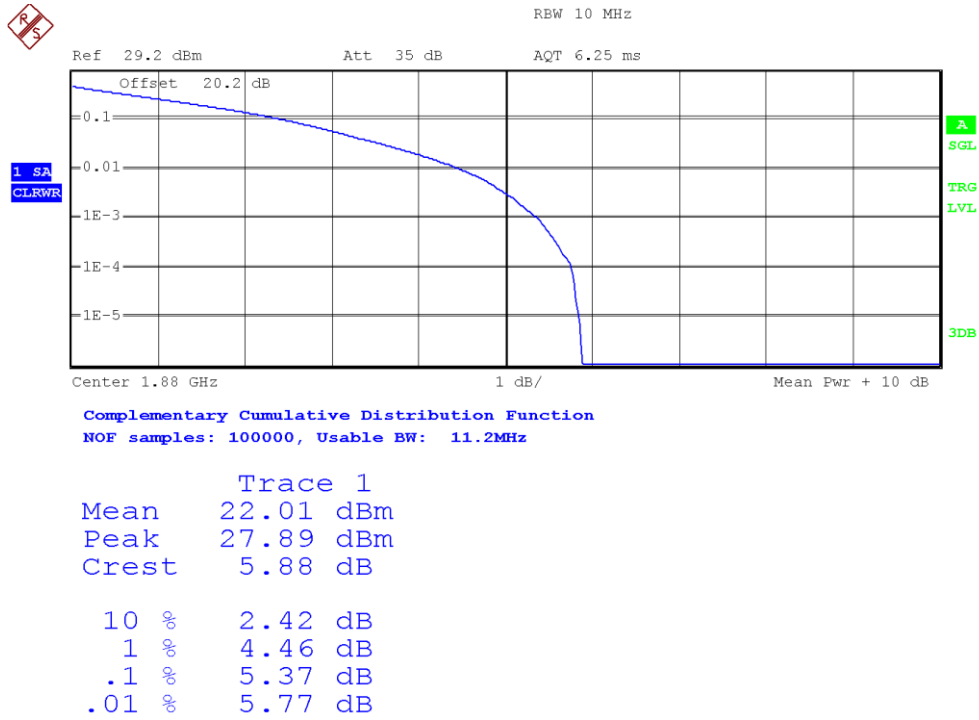


LTE Band 2. Bandwidth = 10 MHz. Modulation QPSK. RB Size: 50. RB Offset: 0.

Middle Channel:

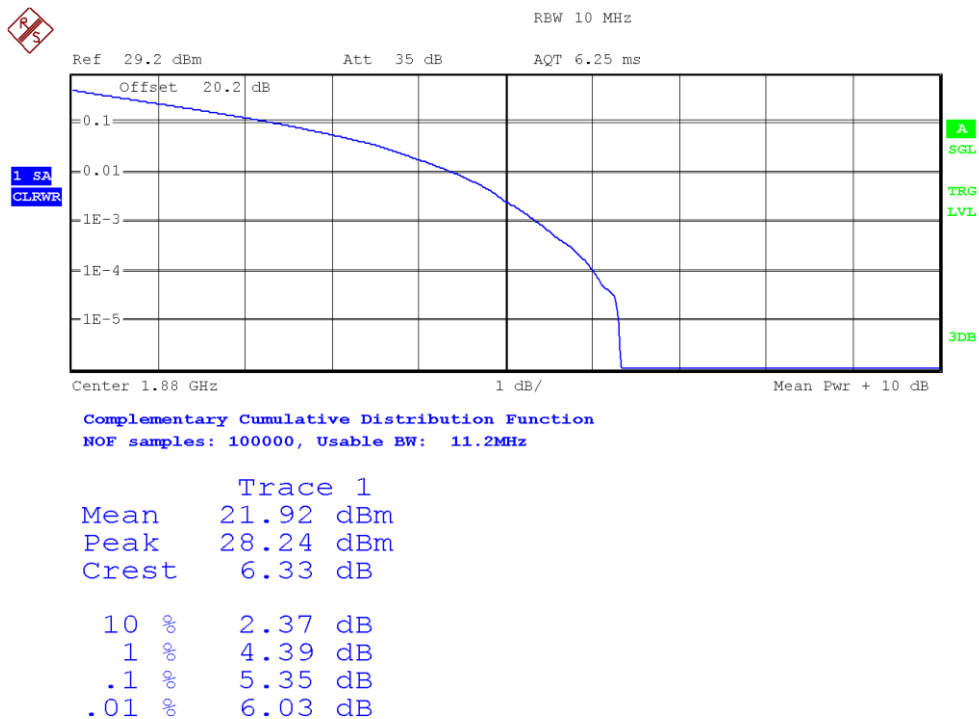

LTE Band 2. Bandwidth = 15 MHz. Modulation QPSK. RB Size: 25. RB Offset: 0.

Middle Channel:

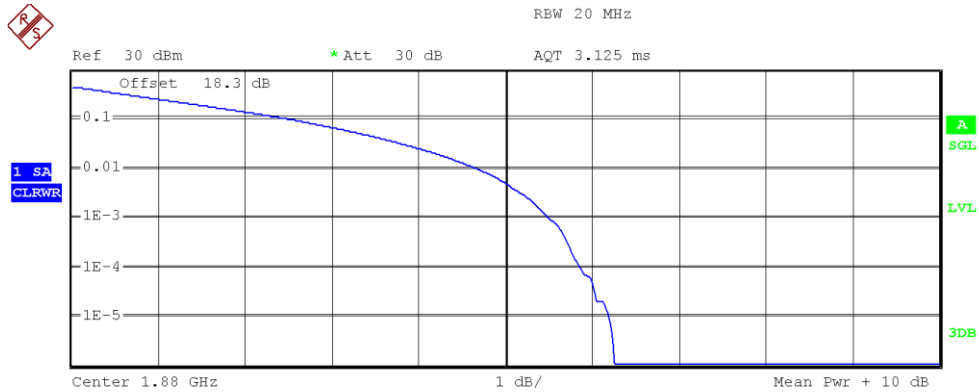


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz

| Trace 1 | |
|---------|-----------|
| Mean | 22.97 dBm |
| Peak | 29.23 dBm |
| Crest | 6.26 dB |
| 10 % | 2.52 dB |
| 1 % | 4.66 dB |
| .1 % | 5.50 dB |
| .01 % | 5.87 dB |

LTE Band 2. Bandwidth = 20 MHz. Modulation QPSK. RB Size: 100. RB Offset: 0.

Middle Channel:

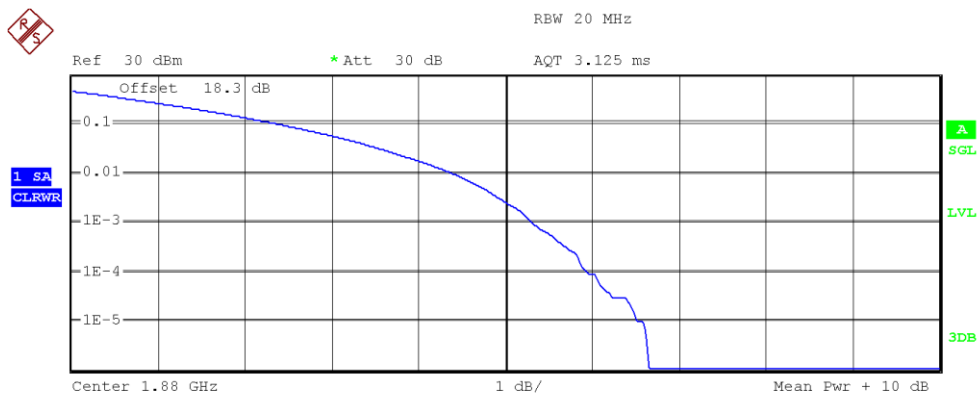


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz


| Trace 1 | |
|---------|-----------|
| Mean | 23.00 dBm |
| Peak | 29.66 dBm |
| Crest | 6.65 dB |
| 10 % | 2.39 dB |
| 1 % | 4.39 dB |
| .1 % | 5.30 dB |
| .01 % | 5.93 dB |

LTE Band 2. Bandwidth = 1.4 MHz. Modulation 16 QAM. RB Size: 6. RB Offset: 0.


Low Channel:

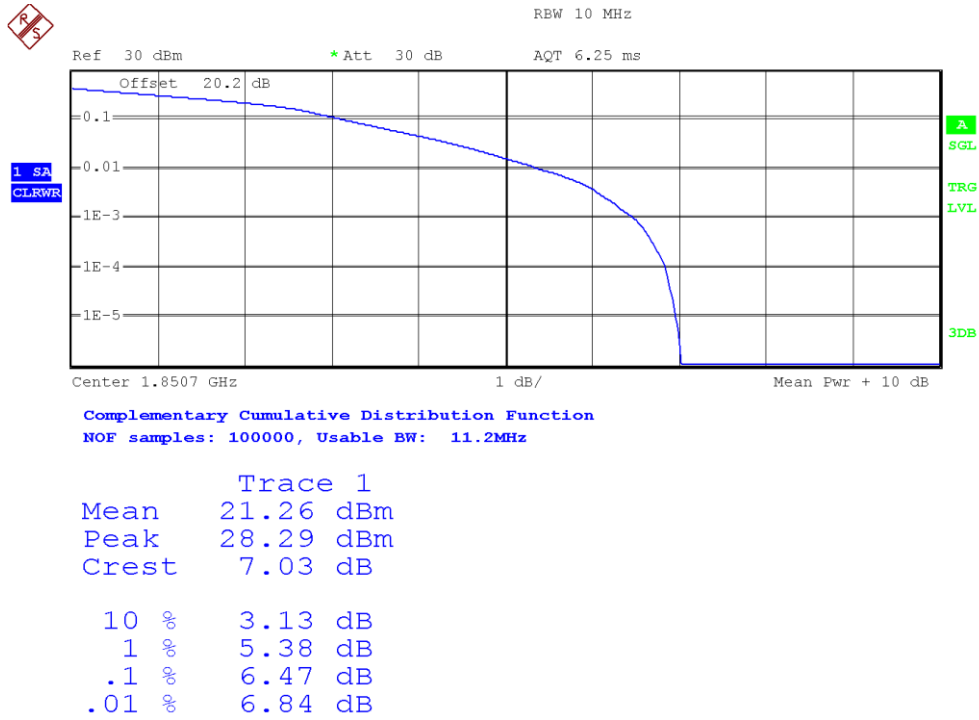

Middle Channel:

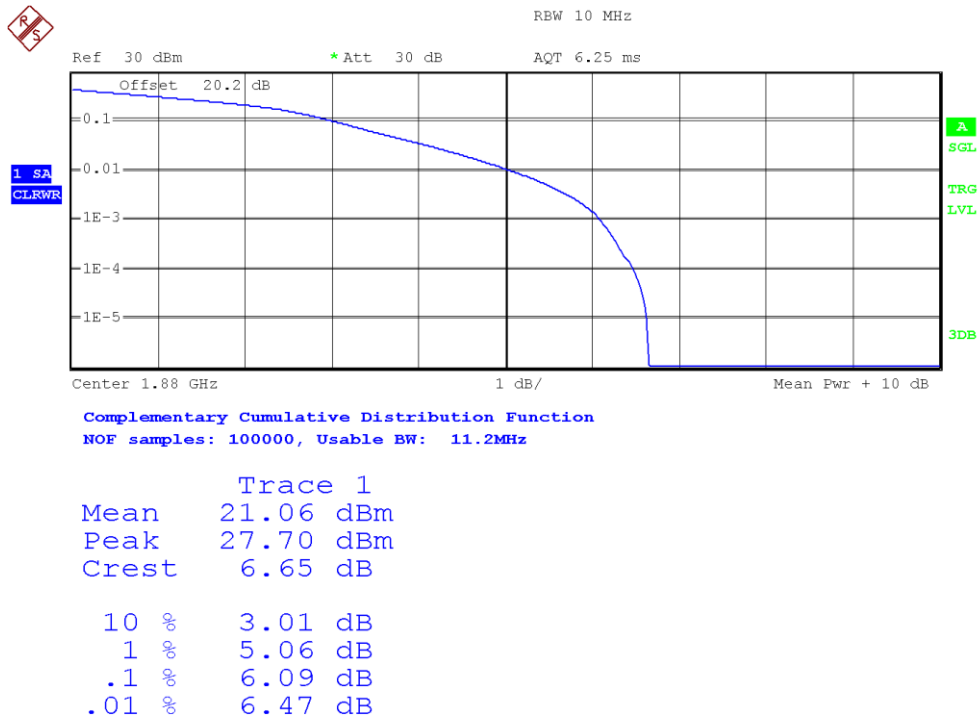

High Channel:

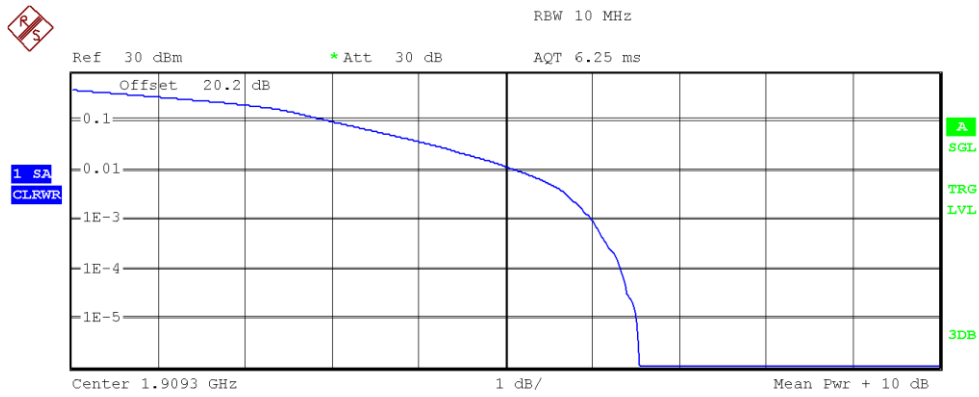


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 21.02 dBm |
| Peak | 27.56 dBm |
| Crest | 6.54 dB |
| 10 % | 3.00 dB |
| 1 % | 5.14 dB |
| .1 % | 5.99 dB |
| .01 % | 6.33 dB |

LTE Band 2. Bandwidth = 3 MHz. Modulation 16 QAM. RB Size: 15. RB Offset: 0.


Low Channel:

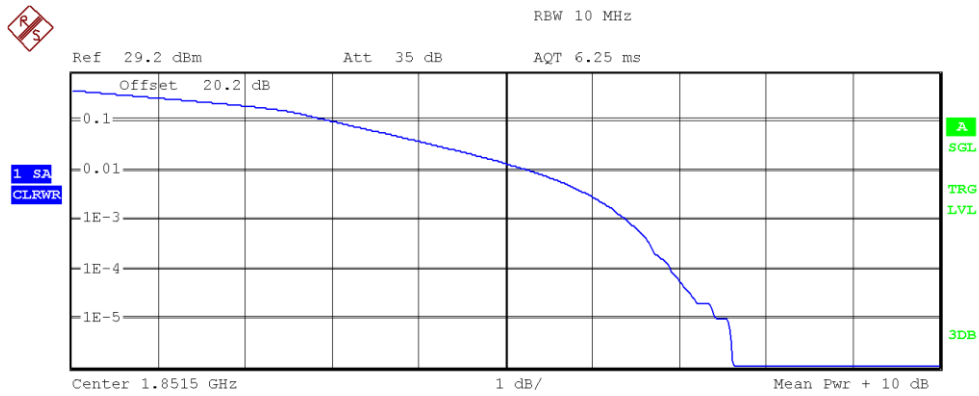

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 21.30 dBm |
| Peak | 28.93 dBm |
| Crest | 7.63 dB |
| 10 % | 3.01 dB |
| 1 % | 5.27 dB |
| .1 % | 6.39 dB |
| .01 % | 6.91 dB |


Middle Channel:

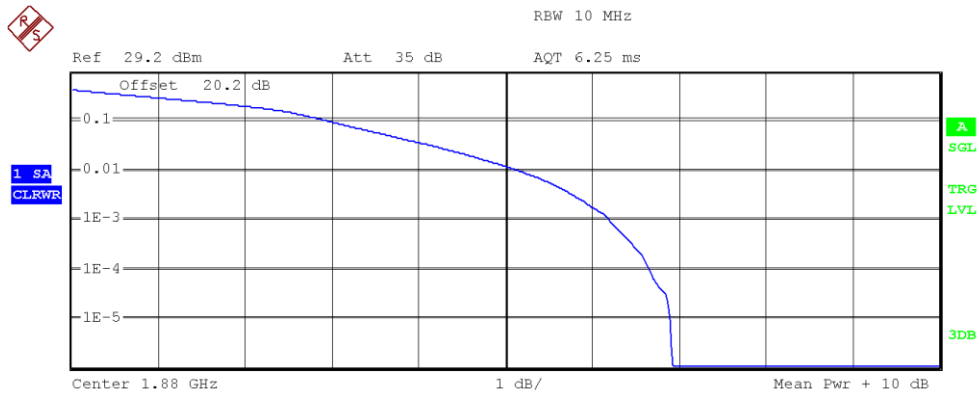

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 20.97 dBm |
| Peak | 27.89 dBm |
| Crest | 6.92 dB |
| 10 % | 2.96 dB |
| 1 % | 5.14 dB |
| .1 % | 6.20 dB |
| .01 % | 6.67 dB |

High Channel:

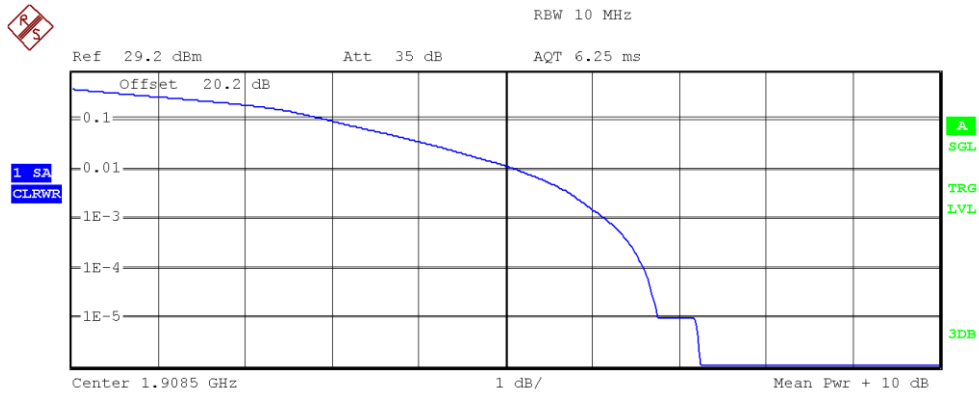


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz


| Trace 1 | |
|---------|-----------|
| Mean | 20.85 dBm |
| Peak | 28.10 dBm |
| Crest | 7.25 dB |
| 10 % | 2.96 dB |
| 1 % | 5.13 dB |
| .1 % | 6.15 dB |
| .01 % | 6.60 dB |

LTE Band 2. Bandwidth = 5 MHz. Modulation 16 QAM. RB Size: 25. RB Offset: 0.


Low Channel:

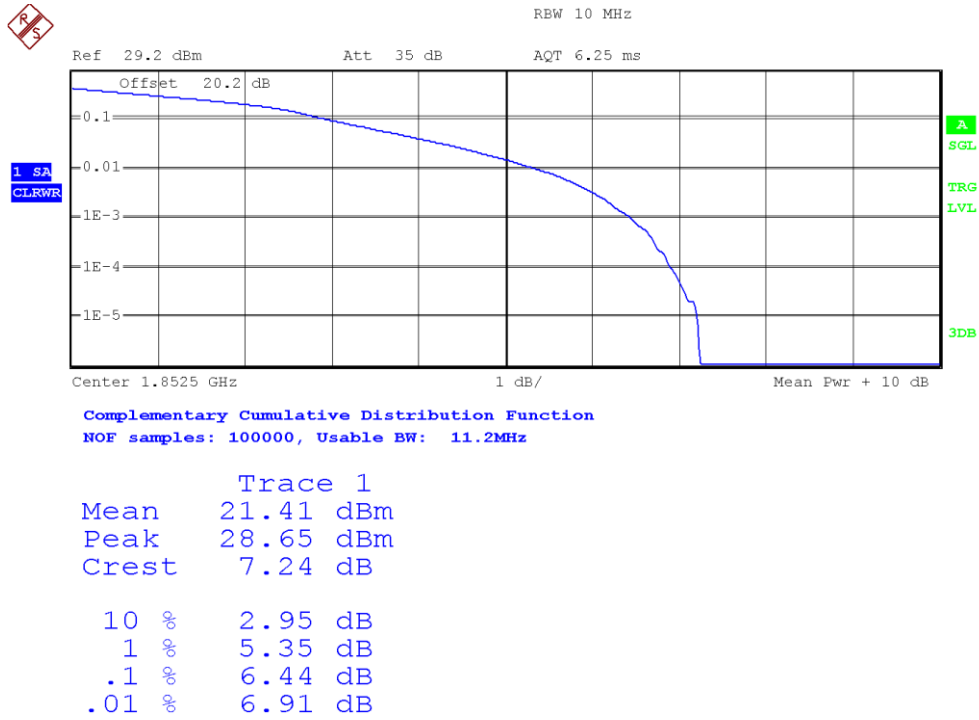

Middle Channel:

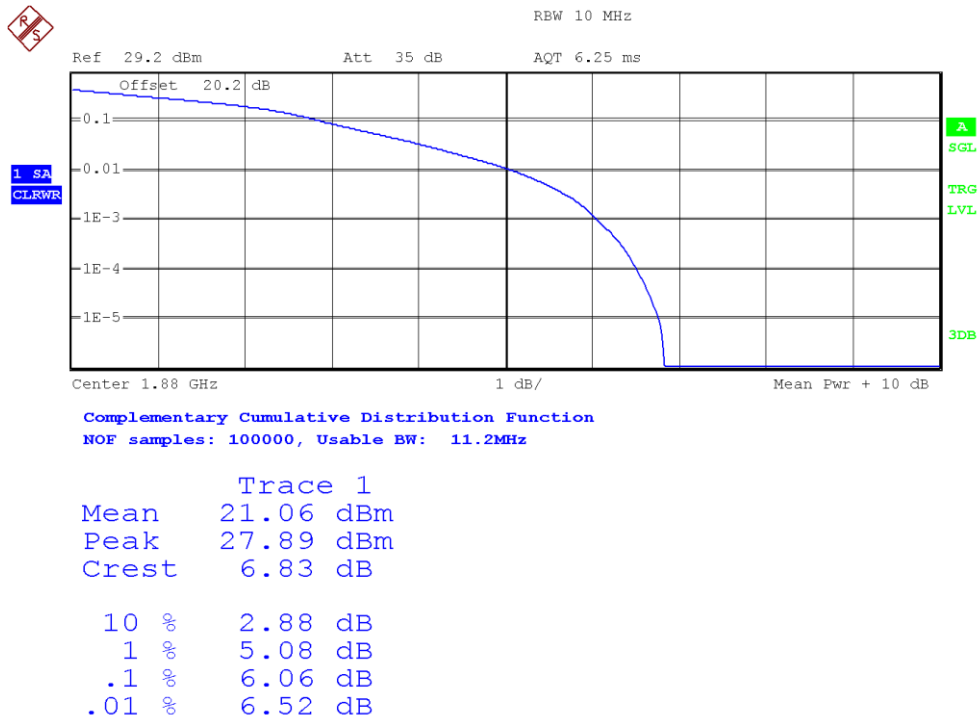

High Channel:

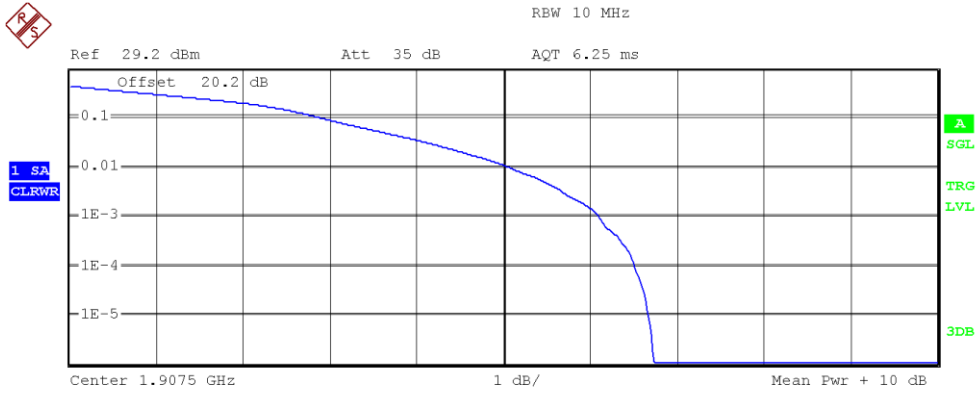


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 20.80 dBm |
| Peak | 27.53 dBm |
| Crest | 6.73 dB |
| 10 % | 2.92 dB |
| 1 % | 5.06 dB |
| .1 % | 6.11 dB |
| .01 % | 6.52 dB |

LTE Band 2. Bandwidth = 10 MHz. Modulation 16 QAM. RB Size: 50. RB Offset: 0.


Low Channel:

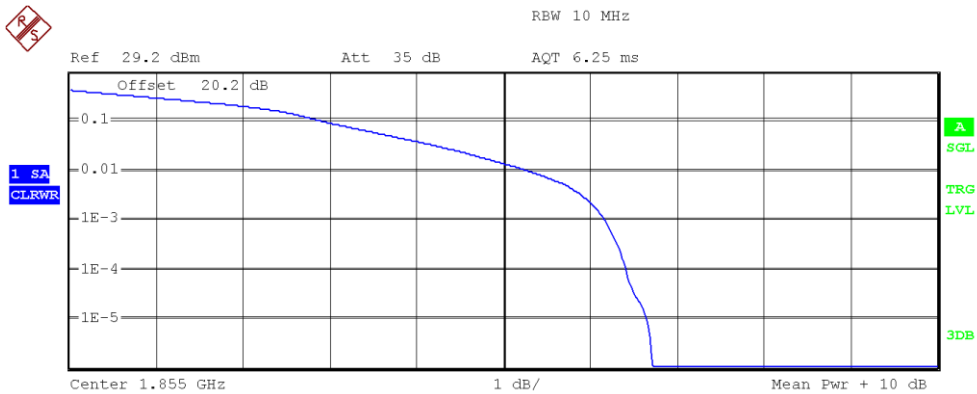

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 21.31 dBm |
| Peak | 28.02 dBm |
| Crest | 6.72 dB |
| 10 % | 2.93 dB |
| 1 % | 5.27 dB |
| .1 % | 6.17 dB |
| .01 % | 6.43 dB |


Middle Channel:

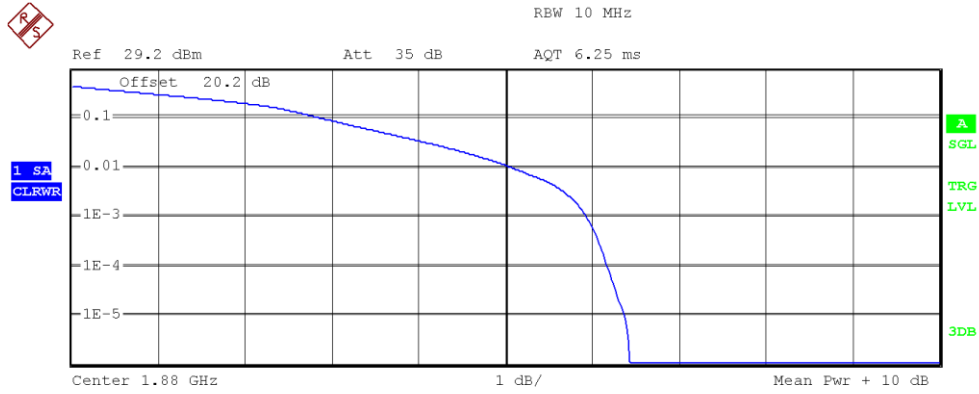

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 21.10 dBm |
| Peak | 27.54 dBm |
| Crest | 6.44 dB |
| 10 % | 2.88 dB |
| 1 % | 5.06 dB |
| .1 % | 5.95 dB |
| .01 % | 6.17 dB |

High Channel:

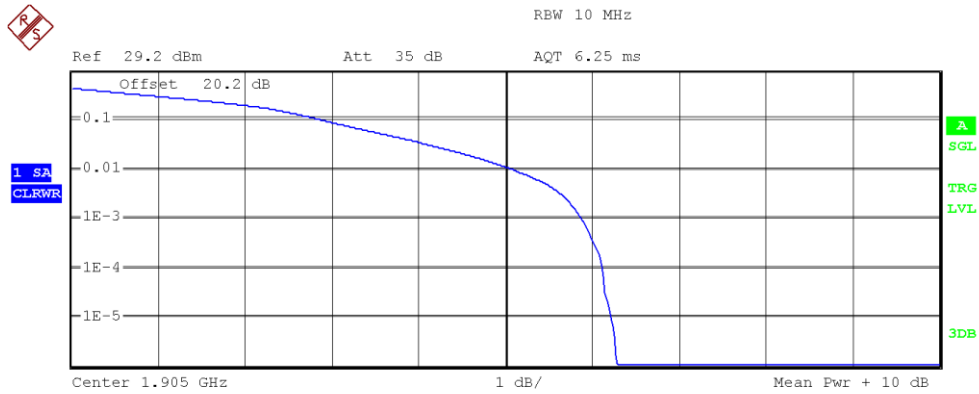


Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 11.2MHz

| Trace 1 | |
|---------|-----------|
| Mean | 21.02 dBm |
| Peak | 27.31 dBm |
| Crest | 6.28 dB |
| 10 % | 2.90 dB |
| 1 % | 5.08 dB |
| .1 % | 5.88 dB |
| .01 % | 6.12 dB |

LTE Band 2. Bandwidth = 15 MHz. Modulation 16 QAM. RB Size: 25. RB Offset: 0.


Low Channel:

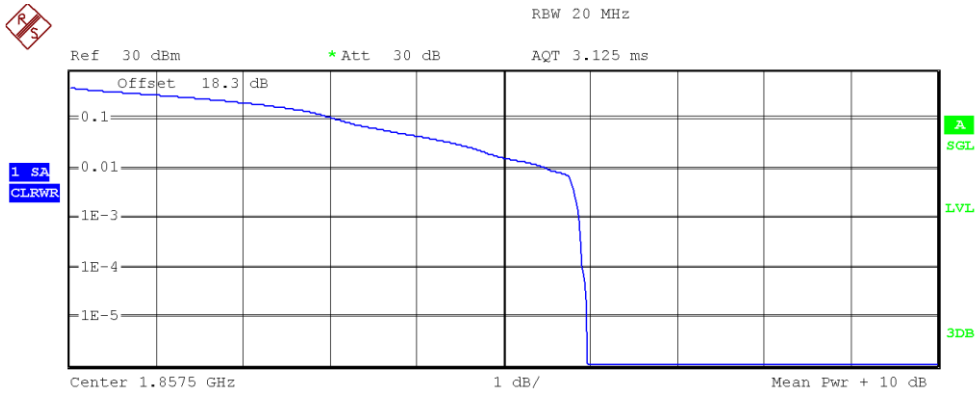

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz

| Trace 1 | |
|---------|-----------|
| Mean | 23.39 dBm |
| Peak | 29.35 dBm |
| Crest | 5.96 dB |
| 10 % | 3.08 dB |
| 1 % | 5.51 dB |
| .1 % | 5.88 dB |
| .01 % | 5.91 dB |


Middle Channel:

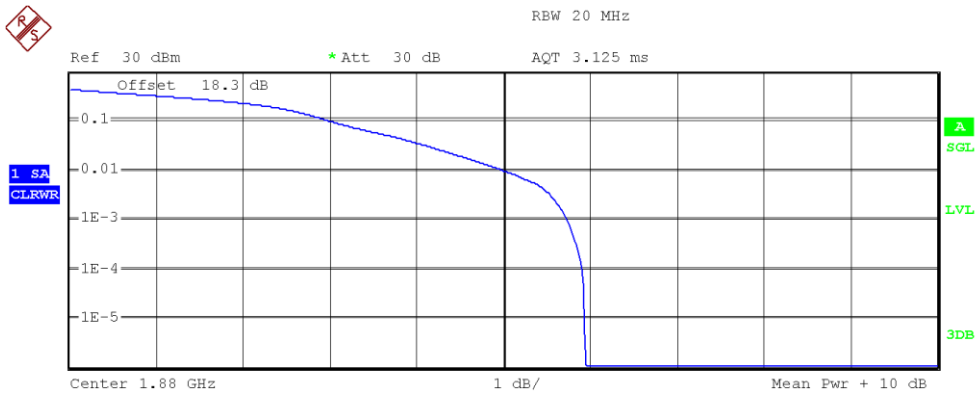

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz


| Trace 1 | |
|---------|-----------|
| Mean | 23.44 dBm |
| Peak | 29.37 dBm |
| Crest | 5.94 dB |
| 10 % | 3.00 dB |
| 1 % | 5.00 dB |
| .1 % | 5.74 dB |
| .01 % | 5.91 dB |

High Channel:

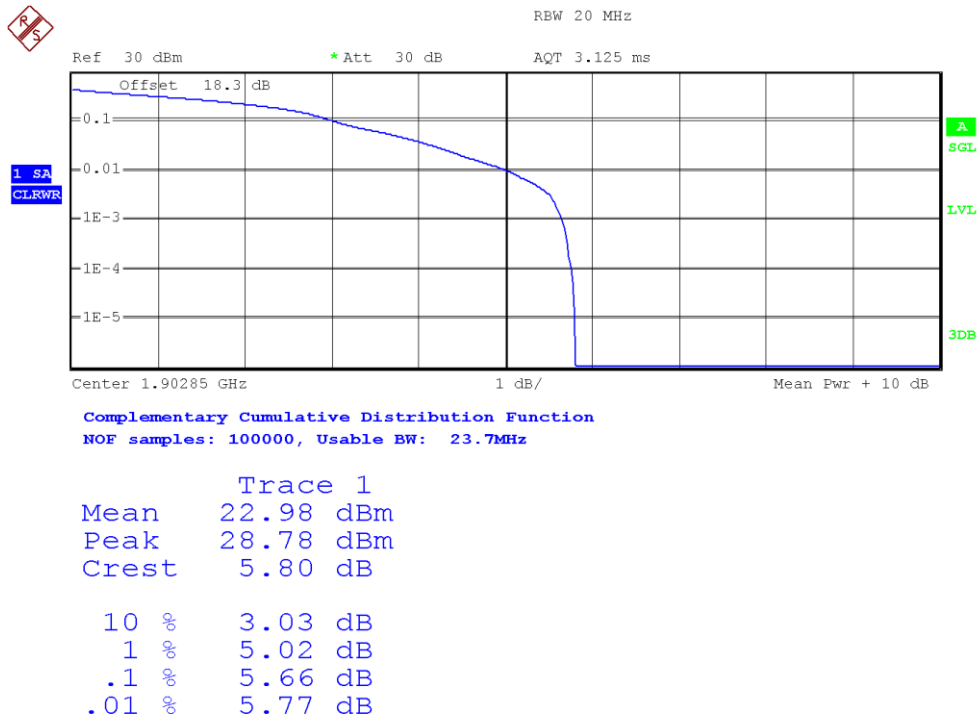


LTE Band 2. Bandwidth = 20 MHz. Modulation 16 QAM. RB Size: 50. RB Offset: 0.

Low Channel:

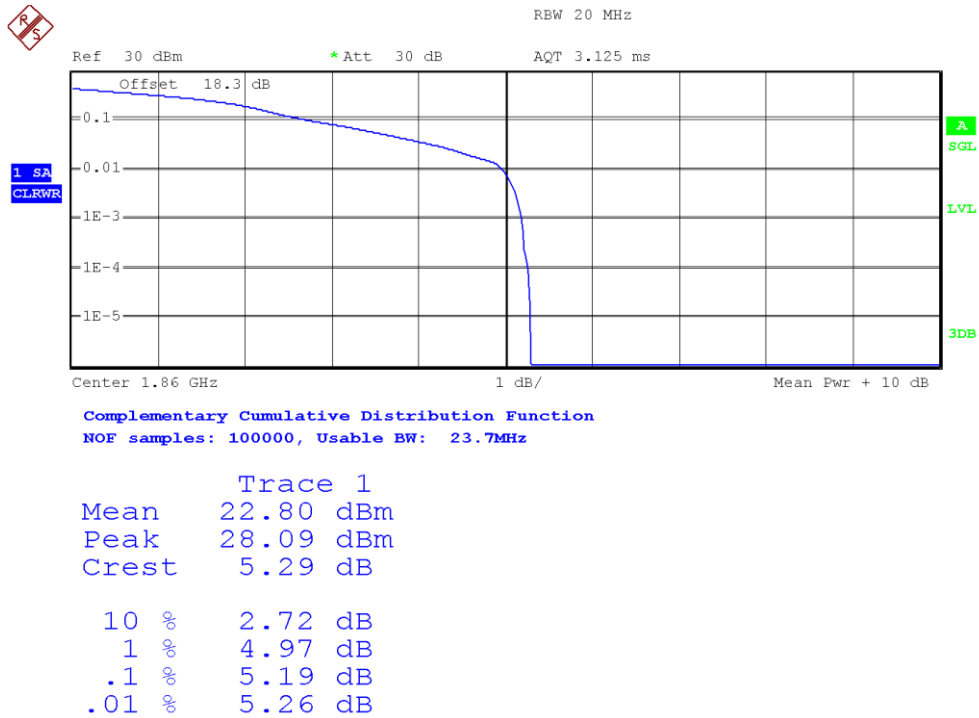


Middle Channel:

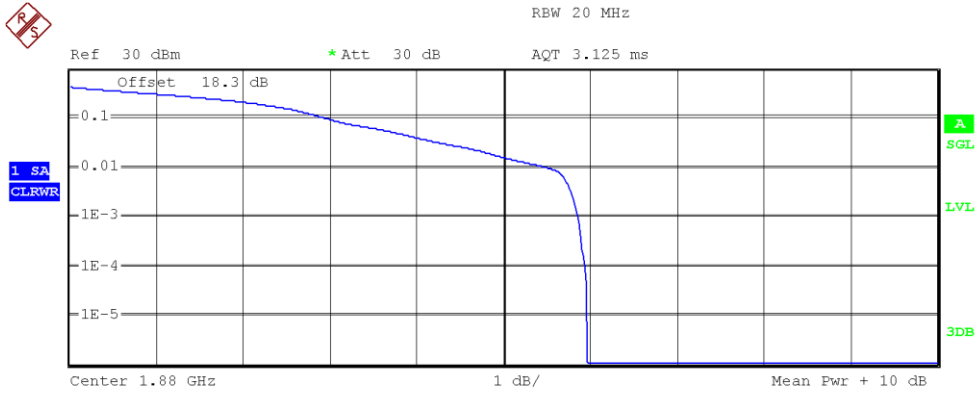

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz

| Trace 1 | |
|---------|-----------|
| Mean | 22.84 dBm |
| Peak | 28.81 dBm |
| Crest | 5.97 dB |
| 10 % | 2.95 dB |
| 1 % | 5.50 dB |
| .1 % | 5.87 dB |
| .01 % | 5.95 dB |

High Channel:

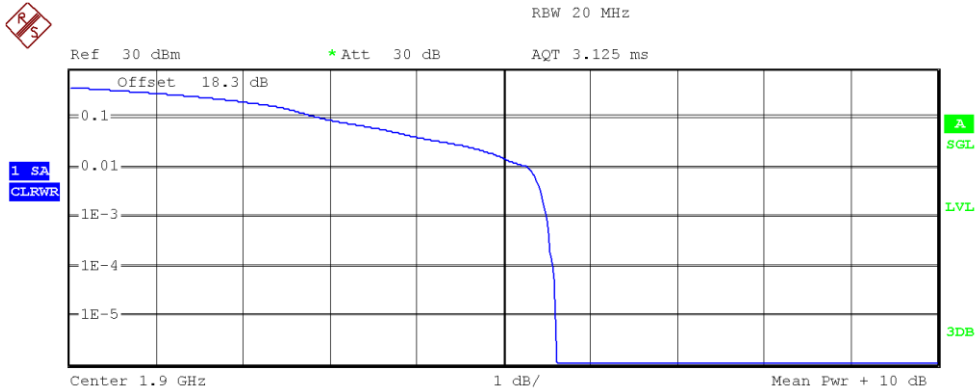

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 23.7MHz

| Trace 1 | |
|---------|-----------|
| Mean | 22.88 dBm |
| Peak | 28.48 dBm |
| Crest | 5.60 dB |
| 10 % | 2.90 dB |
| 1 % | 5.27 dB |
| .1 % | 5.50 dB |
| .01 % | 5.58 dB |