

Test report No:
 NIE: 72943RAN.001A1

Test report IEEE Std 1528™-2013

(*) Identification of item tested	Continuous Positive Airway Pressure (CPAP) Device
(*) Trademark	ResMed
(*) Model and /or type reference tested	AirSense 11 39485
(*) Derived model not tested	For USA: AirSense 11 Autoset USA (39517), AirSense 11 CPAP USA (39518), AirSense 11 Elite USA (39519). For Canada: AirSense 11 AutoSet CAN (39520), AirSense 11 CPAP CAN (39521), AirSense 11 Elite CAN (39522).
(*) Other identification of the product	HW Version: R390-7654 SW Version: SW04600 FCC ID: 2ACHL-AIR11M1G22 IC: 9103A-AIR11M1G22
(*) Features	LTE Cat-M1, BLE
Manufacturer	RESMED Pty Ltd 1 Elizabeth Macarthur Drive, BELLA VISTA, NSW, 2153, AUSTRALIA
Test method requested, standard	1. IEEE Std 1528™-2013. 2. FCC 47 CFR Part 2.1093.
Summary	Considering the results of the performed test, the item under test is IN COMPLIANCE with FCC 47CFR Part 2.1093 exposure limits. The maximum 1-g SAR found during this test has been 0.328 W/kg, for LTE CAT M1 Band 2.
Approved by (name / position & signature)	Miguel Lacave Antennas Lab Manager
Date of issue	2022-11-11
Report template No	FDT08_24 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty	3
Data provided by the client.....	3
Usage of samples	5
Test sample description	5
Identification of the client.....	5
Testing period and place.....	6
Document history.....	6
Environmental conditions	6
Remarks and comments	6
Testing verdicts.....	8
Summary	8
Appendix A: Test configuration	9
Appendix B: Test results	20
Appendix C: Measurement Reports	62
Appendix D: System Validation Reports.....	79
Appendix E: Calibration data.....	86
Appendix F: Photographs.....	138

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the following documents:

1. DEKRA Testing and Certification S.A.U. internal document PODT000.
2. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested", "Derived model not tested", "Other identification of the product", "Features" and "Test sample description").
2. Maximum output power and testing distance.
3. Derived model not tested. These models have been declared by the supplier of the sample as being the same as the model under test.



Date: 25-Oct-2022

DECLARATION OF EQUIVALENCE

This document declares that the following designated products are equivalent to the unit under test 39485.

Model Name / Product Code	Marketing Name
39517	AirSense 11 AutoSet USA
39518	AirSense 11 CPAP USA
39519	AirSense 11 Elite USA
39520	AirSense 11 AutoSet CAN
39521	AirSense 11 CPAP CAN
39522	AirSense 11 Elite CAN

All the above stated products and the unit under test - 39485 have the same cellular hardware and firmware.

Applicant:

Company Name: ResMed Pty Ltd
Address: 1 Elizabeth Macarthur Drive,
Bella Vista NSW 2153
Australia

By,



Christopher Jenkins
Title: Manager – Systems Engineering
Company: ResMed Pty Ltd
Telephone: +61 2 8884 1517
e-mail: Christopher.jenkins@resmed.com.au

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: the client

Sample M/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
72943/055	Continuous Positive Airway Pressure (CPAP) Device	39485 AirSense 11	22221830061	2022/09/22
72943/021	AC/DC adapter	390000	0001RL02	2022/08/02
72943/011	Water tank	HumidAir11	--	2022/08/02
72943/026	Power cord	--	--	2022/08/02

Sample M/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
72943/052	Continuous Positive Airway Pressure (CPAP) Device	39485 AirSense 11	22221830060	2022/09/22
72943/021	AC/DC adapter	390000	0001RL02	2022/08/02
72943/011	Water tank	HumidAir11	--	2022/08/02
72943/026	Power cord	--	--	2022/08/02

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested": Conducted average output power.
2. Sample M/02 has undergone the test(s) specified in subclause "Test method requested": SAR evaluation for LTE Cat-M1.

Test sample description

Description of product	CPAP device with integrated cellular and Bluetooth connectivity		
Software version.....	SW04600		
Hardware version	R390-7654		
Mounting position	<input checked="" type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Equipment used next to the ear	
	<input type="checkbox"/>	Hand-held equipment	
	<input type="checkbox"/>	Other: Body-worn device	
Accessories (not part of the test item).....	Description	Type	Manufacturer
	Charging adapter	---	

Identification of the client

ResMed Pty Ltd.

1 Elizabeth Macarthur Drive, Bella Vista, NSW 2153 Australia

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2022-09-23
Date (finish)	2022-10-07

Document history

Report number	Date	Description
72943RAN.001	2022-11-02	First release
72943RAN.001A1	2022-11-11	Second release. Declared Bluetooth LE Maximum output power has been modified by the client. This modification test report cancels and replaces the test report 72943RAN.001.

Environmental conditions

Date	Max. Temp.	Min. Temp.	Max. Hum.	Min. Hum.	Limit
	°C	°C	%	%	
From 2022-09-23 to 2022-10-07	24.98	20.88	65.79	40.32	18-25 °C, 30-70%

Remarks and comments

1: Zoom scan is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06, paragraph "4.4.2. Area scan based 1-g estimation"

2: Bottom edge of the device has not been tested due to testing reduction. The device is a top-table device, therefore this side will be always facing a table and the transmitting antenna is located on the opposite device edge (Top edge).

3: Zoom scan and/or power drifts measurements have not been able to be performed by the measurement system due to very low SAR values close or under the noise level.

4: Only the plots of the highest reported SAR for each test position and mode/band are included in appendix C.

5: The tests have been performed by the technical personnel: Francisco J. Sánchez and Ismael Gamarro.

6: References

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093 and the following FCC Published RF exposure KDB procedures:

1. FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015)
2. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).
3. FCC OET KDB 865664 D02 RF Exposure Reporting v01r02 (October 2015)
4. FCC OET KDB 941225 D05 SAR for LTE Devices v02r05 (October 2015).

7: The instrumentation utilized to perform the tests covered in this test report is listed in the following table:

Equipment	NC
Dosimetric E-field probe SPEAG EX3DV4	6125
Data acquisition device SPEAG DAE4	3430
SPEAG Mounting Device for Laptop and Body-Worn Transmitters	3526
Oval flat phantom SPEAG ELI 4	3525
Electro-optical converter SPEAG SE UMS 018 BB	8902
Robot Stäubli RX60BL, Robot controller STÄUBLI CS8CSpeag-TX60	8867
Measurement server SPEAG DASY6 SE UMS 028 CA	8895
SAR measurement software SPEAG cDASY6 16.0.0.116	8898
Head Tissue Equivalent Liquid for 750 MHz band	3920
Body Tissue Equivalent Liquid for 750 MHz band	3921
Head Tissue Equivalent Liquid for 850 MHz band	3631
Body Tissue Equivalent Liquid for 850 MHz band	3632
Head Tissue Equivalent Liquid for 1700 MHz band	8844
Body Tissue Equivalent Liquid for 1700 MHz band	8845
Head Tissue Equivalent Liquid for 1900 MHz band	8844
Body Tissue Equivalent Liquid for 1900 MHz band	8845
Head Tissue Equivalent Liquid for 600 - 10000 MHz band	9449
750 MHz dipole validation kit SPEAG D750V3	3919
900 MHz dipole validation kit SPEAG D900V2	3426
1800 MHz dipole validation kit SPEAG D1800V2	3427
Vector network analyzer Agilent FieldFox N9923A	4482
Dielectric probe kit SPEAG DAK-3.5	4171
RF Generator R&S SMU200	3346
Power amplifier MITEQ AMF-4D-00400600-50-30P	3485
DC Power supply Agilent U8002A	4835
Dual directional coupler HP 778D	1084
Dual directional coupler NARDA 4227-16	3630
Power sensor Agilent E9300A	4391
Power sensor Agilent E9300A	4392
Power meter Agilent E4419B	4393
Power sensor DC 50 MHz to 18 GHz R&S model NRP-Z81	4164
Digital thermometer LKM Electronics model DTM300-Spezial	4170
Temperature and humidity probe HUMIDIPROBE Pico Technology	3453
Universal Radio Communication Tester R&S CMW 500	8849

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Summary

FCC 47CFR Part 2.1093	VERDICT			
	N/A	P	F	NM
LTE CAT M1 Band 2		P		
LTE CAT M1 Band 4		P		
LTE CAT M1 Band 5		P		
LTE CAT M1 Band 12		P		
LTE CAT M1 Band 13		P		
LTE CAT M1 Band 25		P		
LTE CAT M1 Band 26		P		
LTE CAT M1 Band 66		P		
Bluetooth LE		P ¹		
1: Technology not subject to testing. Verdict has been determined through RF Exposure assessment (see Appendix B, 2.2. of this document for more details).				

Appendix A: Test configuration

INDEX

1.	GENERAL INTRODUCTION	11
1.1.	Application Standard	11
1.2.	General requirements	11
1.3.	Measurement system requirements	11
1.4.	Phantom requirements	11
1.5.	Measurement Liquids requirements.	12
2.	MEASUREMENT SYSTEM	13
2.1.	Measurement System	13
2.3.	Device Holder	16
2.4.	Test Positions of device relative to head and body.....	16
2.5.	Test to be performed.....	16
2.6.	Description of interpolation/extrapolation scheme	16
2.7.	Determination of the largest peak spatial-average SAR	16
2.8.	System Check.....	17
3.	UNCERTAINTY	18
4.	SAR LIMIT	19
5.	DEVICE UNDER TEST.....	19
5.1.	Dimensions	19
5.2.	Wireless Technology.....	19
5.3.	Simultaneous Transmission	19
5.4.	Antenna Location	19

1. GENERAL INTRODUCTION

1.1. Application Standard

The Federal Communications Commission (FCC) sets the limits for General Population/Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the body of the user under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

1.2. General requirements

The SAR measurement has been performed continuing the following considerations and environment conditions:

The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/-2°C during the test.

The ambient humidity shall be in the range of and 30% - 70%.

The device battery shall be fully charged before each measurement.

1.3. Measurement system requirements

The measurement system used for SAR tests fullfils the procedural and technical requirements described at the reference standards used.

1.4. Phantom requirements

The phantom model for body measurements is an elliptical open-top container with a flat bottom, with the following shape and dimensions:

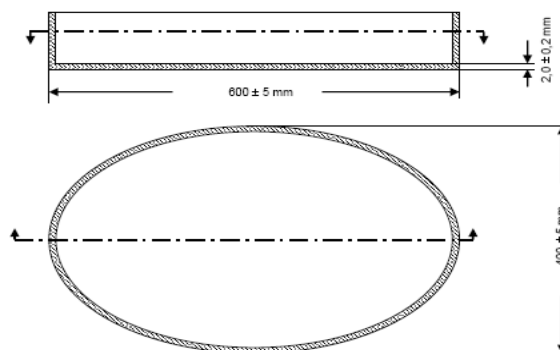


Figure 1: Proportions and shape of Phantom shell

1.5. Measurement Liquids requirements.


The liquids used to simulate the human tissues, must fulfill the requirements of the dielectric properties required. These target dielectric properties are indicated into FCC OET KDB 865664 D01 Appendix A.


Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


Table 1: Liquid material requirements


To minimize the effect of reflections on peak spatial-average SAR values, from the upper surface of the tissue-equivalent liquid, the depth of the liquid should be at least 15 cm.


Dielectric properties values of the Tissue Simulant Liquids used for SAR measurements are included in Appendix B, Section 3, of this document.

	Model	EX3DV4
	Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
	Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
	Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
	Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
	Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm

	Model	DAE4
	Construction	Signal amplifier, multiplexer, A/D converter, and control logic. Serial optical link communication with DASY4/5 embedded system (fully remote controlled). Two-step probe touch detector for mechanical surface detection and emergency robot stop.
	Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
	Input Offset Voltage	< 5 μ V (with auto zero)
	Input Resistance	200 MOhm
	Input Bias Current	< 50 fA

	Model	Mounting Device for Laptop and Body-Worn Transmitters
	Construction	In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device (Body-worn) enables testing of transmitters devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at flat phantom section.
	Material	Polyoxymethylene (POM), PET-G, Foam

	Model	ELI
	Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
	Material	Vinylester, glass fiber reinforced (VE-GF)
	Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
	Shell Thickness	2 ± 0.2 mm (bottom plate)
	Dimensions	Major axis: 600 mm Minor axis: 400 mm
	Filling Volume	Approx. 30 liters
	Wooden Support	SPEAG standard phantom table

	Model	System Validations Kits 450 MHz – 6 GHz			
	Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.			
	Frequency	450 MHz to 5800 MHz			
	Return Loss	20 dB at specified validation position			
	Dimensions (length and overall height in mm)	Product	Dipole length	Overall height	
		D450V3	290.0	330.0	
		D750V3	179.0	330.0	
		D900V2	148.5	340.0	
		D1800V2	72.5	300.0	
		D2000V2	65.0	300.0	
D2300V2		56.3	290.0		
D2450V2		52.0	290.0		
D2600V2		49.2	290.0		
D3300V2		38.0	285.0		
D3500V2	37.0	285.0			
D3700V2	34.7	285.0			
D3900V2	32.0	280.0			
D4200V2	30.1	280.0			
D4600V2	27.0	280.0			
D4900V2	25.0	280.0			
D5GHzV2	20.6	300.0			

2.3. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY Laptop Holder extension is lightweight and made of POM, PET-G acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.

2.4. Test Positions of device relative to head and body

The device under test consists of a continuous Positive Airway Pressure (CPAP) Device which could be used near the head and body of the user placed on a bedside table.

Although it will be used normally at higher distance from users, according to the manufacturer request, SAR testing has been performed at a conservative test separation distance of 15 mm.

All device edges have been tested facing the flat phantom at 15 mm test distance, except the back face of the device, measured at 45 mm due to mains cord and the bottom edge of the device due to testing reduction based on device use and tests results found for the rest of device's sides.

2.5. Test to be performed

Test shall be performed for each test position previously described, using the channel producing the highest rated output power.

Additionally the other applicable test frequency channels must be measure for the test configuration providing the highest SAR for each applicable transmitting band.

2.6. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantoms surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr and 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with approx. 15 mm spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning within a 1 mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5 mm steps in both directions. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

2.7. Determination of the largest peak spatial-average SAR

To determine the maximum value of the peak spatial-average SAR of a DUT, all device positions, configurations and operational modes should be tested for each frequency band.

The averaging volume shall be chosen as 1gr. of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the DUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

2.8. System Check

Prior to the SAR measurements, system verification is done to verify the system accuracy. As IEEE 1528-2013, Annex paragraph 8.2.1 “System Check - Purpose” specifies, a complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 10% of this channel, whichever is greater.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

3. UNCERTAINTY

According to FCC OET KDB 865664 D01, if the highest measured 1-g SAR is < 1.5 W/kg, SAR measurement uncertainty analysis is not required to be included into SAR report, but it has been included for ISO 17025 accreditation.

Uncertainty for 300 MHz – 3 GHz

ERROR SOURCES (source of uncertainty)	Uncertainty value (%)	Prob. Dist.	Div.	<i>c</i>_i (1g)	<i>c</i>_i (10g)	Standard uncertainty (1g) (%)	Standard uncertainty (10g) (%)
Measurement Equipment							
Probe Calibration	13.30%	N	2	1	1	6.65%	6.65%
Probe calibration drift	11.35%	R	√3	1	1	6.55%	6.55%
Axial Isotropy	4.70%	R	√3	0.7	0.7	1.90%	1.90%
Hemispherical Isotropy	9.60%	R	√3	0.7	0.7	3.88%	3.88%
Boundary effect	1.00%	R	√3	1	1	0.58%	0.58%
Linearity	4.70%	R	√3	1	1	2.71%	2.71%
System Detection limits	0.25%	R	√3	1	1	0.14%	0.14%
Probe modulation response	4.80%	N	1	1	1	4.80%	4.80%
Readout electronics	0.30%	N	1	1	1	0.30%	0.30%
Response time	1.01%	R	√3	1	1	0.58%	0.58%
Integration time	2.60%	R	√3	1	1	1.50%	1.50%
RF Ambient noise	3.00%	R	√3	1	1	1.73%	1.73%
RF Ambient reflections	3.00%	R	√3	1	1	1.73%	1.73%
Probe positioner mech. restrictions	0.40%	R	√3	1	1	0.23%	0.23%
Probe positioning with respect to phantom shell	2.90%	R	√3	1	1	1.67%	1.67%
Max. SAR Eval.	2.00%	R	√3	1	1	1.15%	1.15%
Test Sample Related							
Device holder uncertainty	3.60%	N	1	1	1	3.60%	3.60%
Test sample positioning	2.90%	N	1	1	1	2.90%	2.90%
Drift of output power	2.50%	N	1	1	1	2.50%	2.50%
System Validation source (dipole)							
Deviation of experimental dipole from numerical dipole	0.00%	N	1	0	0	0.00%	0.00%
Input power and SAR drift measurement	2.00%	R	√3	1	1	1.15%	1.15%
Dipole axis to liquid distance	3.40%	R	√3	1	1	1.96%	1.96%
Phantom and Setup							
Phantom uncertainty (shape and thickness tolerances)	6.10%	R	√3	1	1	3.52%	3.52%
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.90%	N	1	1	0.84	1.90%	1.60%
Liquid conductivity (meas.)	2.45%	N	1	0.78	0.71	1.91%	1.74%
Liquid permittivity (meas.)	2.45%	N	1	0.26	0.26	0.64%	0.64%
Liquid conductivity – temperature uncertainty	2.30%	R	√3	0.78	0.71	1.04%	0.94%
Liquid permittivity – temperature uncertainty	0.36%	R	√3	0.23	0.26	0.05%	0.05%
Combined standard uncertainty (Validation antenna)	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					11.62%	11.54%
Expanded uncertainty (confidence interval of 95%)	$u_e = 2.00 u_c$					23.25%	23.09%
Combined standard uncertainty (DUT)	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					14.08%	14.01%
Expanded uncertainty (confidence interval of 95%)	$u_e = 2.00 u_c$					28.16%	28.03%

Table 2: Uncertainty Assessment for 300 MHz - 3 GHz.

4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR 1 gr.) with the shape of a cube and averaged over a mass of 10 gr (Extremity SAR 10 gr). These levels could not exceed the values indicated in the application Standard:

Standard	Exposure	SAR	SAR Limit (W/kg)
FCC 47 CFR Part 1.1310, Paragraph (c)	General population/Uncontrolled	SAR 1-g.	1.6
FCC 47 CFR Part 1.1310, Paragraph (c)	General population/Uncontrolled Extremity	SAR 10-g.	4.0

Table 3: SAR limit

5. DEVICE UNDER TEST

5.1. Dimensions

Dimensions	Millimetres
Length x Width x Height	95.0 x 235.0 x 125.0

Table 4: Dimensions

5.2. Wireless Technology

Wireless Technology	Frequency Bands	Modes	Duty Cycle used for SAR testing
LTE CAT-M1	2/4/5/12/13/25/26/66	QPSK and 16-QAM	FDD: 32.57%, TDD: 32.57%
Bluetooth	2.4 GHz	Bluetooth LE	SAR Low-Power Exclusion compliant

Table 5: Supported modes

5.3. Simultaneous Transmission

Simultaneous transmission evaluation was performed according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015). The detailed simultaneous transmission combination is:

RF Exposure Condition	Simultaneous transmission configurations
Head & Body	LTE CAT-M1 + Bluetooth LE

Table 6: Simultaneous transmission

5.4. Antenna Location

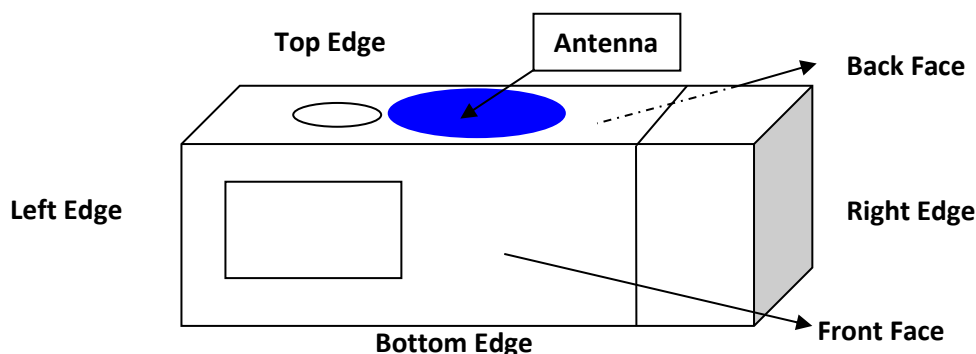


Figure 3: Antenna diagram location sketch (front face view)

Appendix B: Test results

INDEX

1. TEST CONDITIONS	22
1.1. Power supply (V):.....	22
1.2. Temperature (°C):	22
1.3. DUT and test-site configurations	22
1.4. Test signal, Output Power and Frequencies.....	22
2. CONDUCTED AVERAGE POWER MEASUREMENTS.....	23
2.1. LTE Bands.....	23
2.2. Bluetooth.....	41
3. TISSUE PARAMETERS MEASUREMENTS.....	42
4. SYSTEM CHECK MEASUREMENTS.....	44
4.1. Validation results for Head TSL.....	44
4.2. Validation results for Body TSL	44
5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)	45
5.1. Summary maximum results for 1-g Head SAR measurements.....	45
5.2. Summary maximum results for 1-g Body SAR measurements.....	45
5.3. Maximum 1g simultaneous multi-band transmission	45
5.5. Results for LTE CAT M1 Band 2 (1 RB, 20 MHz, QPSK)	46
5.6. Results for LTE CAT M1 Band 2 (50% RB, 20 MHz, QPSK)	47
5.7. Results for LTE CAT M1 Band 4 (1 RB, 20 MHz, QPSK)	48
5.8. Results for LTE CAT M1 Band 4 (50% RB, 20 MHz, QPSK)	49
5.9. Results for LTE CAT M1 Band 5 (1 RB, 20 MHz, QPSK)	50
5.10. Results for LTE CAT M1 Band 5 (50% RB, 20 MHz, QPSK)	51
5.11. Results for LTE CAT M1 Band 12 (1 RB, 10 MHz, QPSK)	52
5.12. Results for LTE CAT M1 Band 12 (50% RB, 10 MHz, QPSK)	53
5.13. Results for LTE CAT M1 Band 13 (1 RB, 10 MHz, QPSK)	54
5.14. Results for LTE CAT M1 Band 13 (50% RB, 10 MHz, QPSK)	55
5.15. Results for LTE CAT M1 Band 25 (1 RB, 20 MHz, QPSK)	56
5.16. Results for LTE CAT M1 Band 25 (50% RB, 20 MHz, QPSK)	57
5.17. Results for LTE CAT M1 Band 26 (1 RB, 15 MHz, QPSK)	58
5.18. Results for LTE CAT M1 Band 26 (50% RB, 15 MHz, QPSK)	59
5.19. Results for LTE CAT M1 Band 66 (1 RB, 20 MHz, QPSK)	60
5.20. Results for LTE CAT M1 Band 66 (50% RB, 20 MHz, QPSK)	61
5.21. Variability results.....	61

1. TEST CONDITIONS

1.1. Power supply (V):

Type of power supply = 90W AC Adapter.

1.2. Temperature (°C):

$T_n = +20.00$ to $+25.00$

The subscript n indicates normal test conditions.

1.3. DUT and test-site configurations

For all supported modes, the DUT was placed with each face and edge position against the flat phantom surface, except the bottom edge of the device due to testing reduction.

The separation distance between DUT and flat phantom surface was 45 mm for the back face of the device due to mains cord, and 15 mm for the remaining faces/edges.

1.4. Test signal, Output Power and Frequencies

The sample was put into operation by using an R&S CMW 500 as base station simulator for the LTE Cat-M1 transmitting technologies.

The actual SAR sample does not have accessible antenna connectors for conducted measurements, so the conducted average output power was measured using others identical samples (M/01) provided by the manufacturer with auxiliary external connectors that makes the measurements representative and applicable for all the tested samples. See 'usage of samples' paragraph of this report.

The maximum conducted time-averaged power of the device for each mode was measured with a power sensor R&S NRP-Z81.

The target power alignments, including tune-up tolerance, for RF components declared by the manufacturer for each supported technology are:

Output Power (dBm)	CAT M1 Transmission Mode							
	LTE B2	LTE B4	LTE B5	LTE B12	LTE B13	LTE B25	LTE B26	LTE B66
Maximum Burst	22.0	22.0	22.0	22.0	22.0	22.0	22.0	22.0
Maximum Averaged	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2

Output Power (dBm)	Transmission Mode
	Bluetooth LE
Maximum	0

2. CONDUCTED AVERAGE POWER MEASUREMENTS

2.1. LTE Bands.

LTE MPR is permanently implemented for the device. The following power reductions are used for the different RB allocations and modulations:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- LTE CAT M1 B2

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1860.0 MHz	1880.0 MHz	1900.0 MHz
LTE CAT M1 B2	20 MHz	QPSK	1RB Low	0	14.16	14.38	14.30
			1RB Mid	0	14.13	14.23	14.15
			1RB High	0	14.09	14.02	14.09
			50% Low	1	14.19	14.23	14.25
			50% Mid	1	14.09	14.24	14.24
			50% High	1	14.20	14.20	14.03
			100%	1	14.08	13.98	14.01
		16-QAM	1RB Low	1	13.84	14.25	13.72
			1RB Mid	1	14.02	14.23	13.54
			1RB High	1	14.04	14.06	13.52
			50% Low	2	14.14	14.15	14.21
			50% Mid	2	14.12	13.95	14.03
			50% High	2	14.18	14.12	13.99
			100%	2	14.07	14.03	13.77
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1857.5 MHz	1880.0 MHz	1902.5 MHz
LTE CAT M1 B2	15 MHz	QPSK	1RB Low	0	14.40	14.06	14.00
			1RB Mid	0	14.22	14.07	13.95
			1RB High	0	14.01	13.81	13.81
			50% Low	1	14.39	14.11	13.94
			50% Mid	1	14.22	14.03	13.95
			50% High	1	14.19	14.00	13.91
			100%	1	14.16	13.98	13.79
		16-QAM	1RB Low	1	14.56	14.36	13.91
			1RB Mid	1	14.27	14.32	13.62
			1RB High	1	14.36	14.19	13.30
			50% Low	2	14.35	14.06	14.22
			50% Mid	2	14.14	14.03	14.30
			50% High	2	14.10	14.01	14.28
			100%	2	14.31	14.10	13.80

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1855.0 MHz	1880.0MHz	1905.0 MHz
LTE CAT M1 B2	10 MHz	QPSK	1RB Low	0	14.59	14.50	14.25
			1RB Mid	0	14.52	14.33	14.15
			1RB High	0	14.33	14.27	14.02
			50% Low	1	14.50	14.50	14.18
			50% Mid	1	14.50	14.50	14.19
			50% High	1	14.46	14.46	14.15
			100%	1	13.26	13.21	13.02
		16-QAM	1RB Low	1	14.61	14.60	14.05
			1RB Mid	1	14.62	14.54	13.86
			1RB High	1	14.42	14.32	13.72
			50% Low	2	14.43	14.32	14.47
			50% Mid	2	14.42	14.20	14.49
			50% High	2	14.32	14.16	14.37
			100%	2	13.50	13.48	12.56
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1852.5 MHz	1880.0 MHz	1907.5 MHz
LTE CAT M1 B2	5 MHz	QPSK	1RB Low	0	14.46	14.49	14.56
			1RB Mid	0	14.47	14.33	14.40
			1RB High	0	14.35	14.27	14.16
			50% Low	1	14.55	14.42	14.15
			50% Mid	1	14.56	14.43	14.16
			50% High	1	14.52	14.39	14.10
			100%	1	13.23	13.17	12.95
		16-QAM	1RB Low	1	14.74	14.52	14.10
			1RB Mid	1	14.68	14.11	14.26
			1RB High	1	14.47	14.08	14.26
			50% Low	2	14.47	14.63	14.30
			50% Mid	2	14.31	14.60	14.08
			50% High	2	14.27	14.59	14.04
			100%	2	12.28	12.19	11.98

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1851.5 MHz	1880.0 MHz	1908.5 MHz
LTE CAT M1 B2	3 MHz	QPSK	1RB Low	0	13.64	13.87	13.71
			1RB Mid	0	13.52	13.88	13.52
			1RB High	0	13.43	13.85	13.51
			50% Low	1	12.59	12.72	12.55
			50% Mid	1	12.54	12.75	12.48
			50% High	1	12.50	12.72	12.43
			100%	1	11.52	11.65	11.46
		16-QAM	1RB Low	1	12.10	12.65	12.24
			1RB Mid	1	12.25	12.53	12.17
			1RB High	1	11.95	12.64	11.83
			50% Low	2	11.45	11.89	11.72
			50% Mid	2	11.47	11.89	11.73
			50% High	2	11.44	11.86	11.69
			100%	2	11.37	11.69	11.54
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1850.7 MHz	1880.0 MHz	1909.3 MHz
LTE CAT M1 B2	1.4 MHz	QPSK	1RB Low	1	13.69	14.08	13.80
			1RB Mid	1	13.71	14.09	13.77
			1RB High	1	12.65	13.96	12.59
			50% Low	1	12.81	12.92	12.74
			50% Mid	1	12.70	12.96	12.65
			50% High	1	12.64	12.83	12.61
			100%	1	11.61	11.77	11.67
		16-QAM	1RB Low	1	12.60	12.87	12.96
			1RB Mid	1	12.41	12.70	12.93
			1RB High	1	12.46	12.71	12.83
			50% Low	1	11.75	12.12	11.80
			50% Mid	1	11.74	12.04	11.72
			50% High	1	11.72	11.98	11.67
			100%	2	11.55	11.81	11.75

- LTE CAT M1 B4

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1720.0 MHz	1732.5 MHz	1745.0 MHz
LTE CAT M1 B4	20 MHz	QPSK	1RB Low	0	14.27	14.43	14.80
			1RB Mid	0	14.20	14.37	14.65
			1RB High	0	14.20	14.23	14.60
			50% Low	1	14.29	14.37	14.50
			50% Mid	1	14.30	14.31	14.51
			50% High	1	14.25	14.31	14.46
			100%	1	14.10	14.22	14.44
		16-QAM	1RB Low	0	14.46	14.53	14.62
			1RB Mid	1	14.40	14.28	14.63
			1RB High	1	14.19	14.19	14.42
			50% Low	1	14.27	14.49	14.53
			50% Mid	2	14.29	14.50	14.48
			50% High	2	14.21	14.46	14.45
			100%	2	14.13	14.34	14.38
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE CAT M1 B4	15 MHz	QPSK	1RB Low	0	14.39	14.57	14.91
			1RB Mid	0	14.18	14.49	14.74
			1RB High	0	14.24	14.50	14.51
			50% Low	1	14.45	14.56	14.68
			50% Mid	1	14.40	14.46	14.54
			50% High	1	14.35	14.42	14.52
			100%	1	14.34	14.37	14.46
		16-QAM	1RB Low	0	14.32	14.60	14.97
			1RB Mid	1	14.26	14.51	14.73
			1RB High	1	14.14	14.40	14.78
			50% Low	2	14.50	14.38	14.76
			50% Mid	2	14.38	14.40	14.69
			50% High	2	14.33	14.38	14.64
			100%	2	14.32	14.39	14.60

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1715.0 MHz	1732.5MHz	1750.0 MHz
LTE CAT M1 B4	10 MHz	QPSK	1RB Low	0	14.51	14.52	14.81
			1RB Mid	0	14.25	14.43	14.82
			1RB High	0	14.22	14.31	14.66
			50% Low	1	14.34	14.46	14.65
			50% Mid	1	14.36	14.47	14.52
			50% High	1	14.30	14.42	14.48
			100%	1	13.11	13.25	13.36
		16-QAM	1RB Low	1	14.37	14.38	14.94
			1RB Mid	1	14.38	14.38	14.75
			1RB High	1	14.19	14.16	14.75
			50% Low	2	14.27	14.68	14.80
			50% Mid	2	14.29	14.55	14.67
			50% High	2	14.26	14.51	14.62
			100%	2	13.16	13.37	13.48
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1712.5 MHz	1732.5MHz	1752.5 MHz
LTE CAT M1 B4	5 MHz	QPSK	1RB Low	0	14.55	14.51	14.95
			1RB Mid	0	14.37	14.33	14.85
			1RB High	0	14.33	14.29	14.73
			50% Low	1	14.33	14.54	14.62
			50% Mid	1	14.20	14.47	14.63
			50% High	1	14.16	14.29	14.68
			100%	1	13.14	13.23	13.41
		16-QAM	1RB Low	1	14.62	14.54	14.92
			1RB Mid	1	14.51	14.36	14.91
			1RB High	1	14.44	14.24	14.71
			50% Low	2	14.39	14.68	14.75
			50% Mid	2	14.25	14.55	14.76
			50% High	2	14.22	14.64	14.72
			100%	2	12.16	12.25	12.48

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1711.5 MHz	1732.5MHz	1753.5 MHz
LTE CAT M1 B4	3 MHz	QPSK	1RB Low	0	13.58	13.93	12.83
			1RB Mid	0	13.57	13.82	12.73
			1RB High	0	13.50	13.87	12.67
			50% Low	1	12.53	12.83	12.75
			50% Mid	1	12.64	12.83	12.67
			50% High	1	12.40	12.72	12.66
			100%	1	11.37	11.76	11.59
		16-QAM	1RB Low	1	12.40	12.72	12.71
			1RB Mid	1	12.28	12.66	12.54
			1RB High	1	12.17	12.54	12.53
			50% Low	2	11.77	12.11	11.98
			50% Mid	2	11.64	12.05	11.99
			50% High	2	11.67	12.00	11.96
100%	2	11.40	11.83	11.59			
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1710.7 MHz	1732.5MHz	1754.3 MHz
LTE CAT M1 B4	1.4 MHz	QPSK	1RB Low	0	13.71	14.08	14.02
			1RB Mid	0	13.69	14.03	13.95
			1RB High	0	13.56	13.84	13.80
			50% Low	0	12.59	12.90	12.81
			50% Mid	0	12.64	12.90	12.73
			50% High	0	12.54	12.85	12.68
			100%	1	11.60	11.80	11.71
		16-QAM	1RB Low	1	12.48	12.75	12.60
			1RB Mid	1	12.29	12.68	12.55
			1RB High	1	12.33	12.65	12.36
			50% Low	1	11.86	12.14	11.88
			50% Mid	1	11.86	12.21	11.88
			50% High	1	11.83	12.18	11.85
100%	2	11.53	11.78	11.79			

- **LTE CAT M1 B5**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					829.0 MHz	836.5 MHz	844.0 MHz
LTE CAT M1 B5	10 MHz	QPSK	1RB Low	0	15.59	15.46	15.55
			1RB Mid	0	15.53	15.42	15.55
			1RB High	0	15.38	15.33	15.44
			50% Low	1	15.40	15.45	15.34
			50% Mid	1	15.44	15.39	15.33
			50% High	1	15.37	15.37	15.34
			100%	1	14.28	14.17	14.08
		16-QAM	1RB Low	1	15.37	15.64	15.76
			1RB Mid	1	15.34	15.69	15.74
			1RB High	1	15.18	15.44	15.58
			50% Low	2	15.64	15.61	15.55
			50% Mid	2	15.64	15.60	15.54
			50% High	2	15.58	15.55	15.47
			100%	2	14.27	14.21	14.30
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					826.5 MHz	836.5 MHz	846.5 MHz
LTE CAT M1 B5	5 MHz	QPSK	1RB Low	0	15.54	15.64	15.48
			1RB Mid	0	15.43	15.61	15.43
			1RB High	0	15.43	15.52	15.39
			50% Low	1	15.47	15.33	15.29
			50% Mid	1	15.46	15.30	15.27
			50% High	1	15.41	15.34	15.21
			100%	1	14.27	14.14	14.16
		16-QAM	1RB Low	1	15.45	15.77	15.46
			1RB Mid	1	15.31	15.75	15.42
			1RB High	1	15.19	15.57	15.31
			50% Low	2	15.64	15.51	15.43
			50% Mid	2	15.63	15.50	15.32
			50% High	2	15.64	15.45	15.35
			100%	2	13.32	13.24	13.10

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					825.5 MHz	836.5 MHz	847.4 MHz
LTE CAT M1 B5	3 MHz	QPSK	1RB Low	0	14.80	14.63	14.74
			1RB Mid	0	14.75	14.48	14.71
			1RB High	0	14.66	14.50	14.61
			50% Low	1	13.84	13.67	13.83
			50% Mid	1	13.80	13.60	13.75
			50% High	1	13.75	13.57	13.76
			100%	1	12.88	12.60	12.69
		16-QAM	1RB Low	1	13.73	13.63	13.83
			1RB Mid	1	13.65	13.52	13.86
			1RB High	1	13.39	13.22	13.82
			50% Low	2	12.74	12.56	12.83
			50% Mid	2	12.73	12.55	12.82
			50% High	2	12.67	12.51	12.76
			100%	2	12.73	12.45	12.83
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					824.7 MHz	836.5 MHz	848.2 MHz
LTE CAT M1 B5	1.4 MHz	QPSK	1RB Low	0	14.98	14.73	14.89
			1RB Mid	0	14.82	14.59	14.74
			1RB High	0	14.76	14.56	14.71
			50% Low	0	14.03	13.78	13.92
			50% Mid	0	14.00	13.73	13.91
			50% High	0	13.93	13.69	13.91
			100%	1	13.00	12.78	12.91
		16-QAM	1RB Low	1	13.88	13.82	13.89
			1RB Mid	1	13.79	13.70	13.88
			1RB High	1	13.55	13.40	13.57
			50% Low	2	12.93	12.65	12.86
			50% Mid	2	12.92	12.65	12.88
			50% High	2	12.86	12.56	12.78
			100%	2	12.85	12.60	12.74

- **LTE CAT M1 B12**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
LTE CAT M1 B12	10 MHz	QPSK	1RB Low	0	-	707.5 MHz	-
			1RB Mid	0	-	15.23	-
			1RB High	0	-	15.21	-
			50% Low	1	-	15.16	-
			50% Mid	1	-	15.05	-
			50% High	1	-	15.02	-
			100%	1	-	14.97	-
		16-QAM	1RB Low	1	-	13.88	-
			1RB Mid	1	-	15.09	-
			1RB High	1	-	15.01	-
			50% Low	2	-	14.96	-
			50% Mid	2	-	15.06	-
			50% High	2	-	15.06	-
100%	2	-	15.10	-			
100%	2	-	14.07	-			
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B12	5 MHz	QPSK	1RB Low	0	701.5 MHz	707.5 MHz	713.5 MHz
			1RB Mid	0	14.98	14.79	15.07
			1RB High	0	14.91	14.77	15.21
			50% Low	1	14.85	14.72	15.27
			50% Mid	1	14.79	14.75	14.86
			50% High	1	14.79	14.76	14.80
			100%	1	14.75	14.81	14.76
		16-QAM	1RB Low	1	13.72	13.76	13.74
			1RB Mid	1	14.51	15.08	15.09
			1RB High	1	14.51	15.07	15.06
			50% Low	2	14.38	15.02	15.09
			50% Mid	2	14.75	14.97	15.06
			50% High	2	14.66	14.97	15.05
100%	2	14.69	15.05	15.09			
100%	2	12.82	12.80	12.94			

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE CAT M1 Bands that do not support at least three non-overlapping channels in certain channel bandwidths test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					700.5 MHz	707.5 MHz	714.5 MHz
LTE CAT M1 B12	3 MHz	QPSK	1RB Low	0	14.99	15.22	15.25
			1RB Mid	0	14.92	15.12	15.14
			1RB High	0	14.85	14.91	15.03
			50% Low	1	14.06	14.19	14.18
			50% Mid	1	14.00	14.16	14.13
			50% High	1	14.02	14.15	14.15
			100%	1	12.98	13.14	13.17
		16-QAM	1RB Low	0	15.07	14.36	14.35
			1RB Mid	0	15.00	14.33	14.25
			1RB High	0	14.85	14.20	14.22
			50% Low	2	14.05	13.15	13.33
			50% Mid	2	14.01	13.16	13.33
			50% High	2	14.01	13.13	13.28
			100%	2	12.97	13.25	13.20
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B12	1.4 MHz	QPSK	1RB Low	0	15.22	15.34	15.24
			1RB Mid	0	15.22	15.24	15.13
			1RB High	0	15.06	15.12	15.04
			50% Low	0	14.18	14.33	14.13
			50% Mid	0	14.16	14.25	14.15
			50% High	0	14.13	14.24	14.05
			100%	1	13.19	13.24	13.12
		16-QAM	1RB Low	1	13.85	14.29	14.42
			1RB Mid	1	13.80	14.18	14.46
			1RB High	1	13.70	14.11	14.37
			50% Low	1	13.10	13.32	13.13
			50% Mid	1	13.05	13.31	13.13
			50% High	1	13.00	13.26	13.06
			100%	1	13.25	13.20	13.33

- **LTE CAT M1 B13**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
LTE CAT M1 B13	10 MHz	QPSK	1RB Low	0	-	782.0 MHz	-
			1RB Mid	0	-	15.61	-
			1RB High	0	-	15.60	-
			50% Low	1	-	15.42	-
			50% Mid	1	-	15.39	-
			50% High	1	-	15.38	-
			100%	1	-	15.32	-
		16-QAM	1RB Low	1	-	14.11	-
			1RB Mid	1	-	15.79	-
			1RB High	1	-	15.73	-
			50% Low	2	-	15.68	-
			50% Mid	2	-	15.61	-
			50% High	2	-	15.62	-
100%	2	-	15.57	-			
100%	2	-	14.32	-			
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					779.5 MHz	782.0 MHz	784.5 MHz
LTE CAT M1 B13	5 MHz	QPSK	1RB Low	0	-	15.38	-
			1RB Mid	0	-	15.35	-
			1RB High	0	-	15.28	-
			50% Low	1	-	15.46	-
			50% Mid	1	-	15.45	-
			50% High	1	-	15.40	-
			100%	1	-	14.19	-
		16-QAM	1RB Low	1	-	15.64	-
			1RB Mid	1	-	15.62	-
			1RB High	1	-	15.50	-
			50% Low	2	-	15.37	-
			50% Mid	2	-	15.36	-
			50% High	2	-	15.32	-
100%	2	-	13.30	-			

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE CAT M1 Bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

- **LTE CAT M1 B25**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1860.0 MHz	1882.5 MHz	1905.0 MHz
LTE CAT M1 B25	20 MHz	QPSK	1RB Low	0	14.52	14.49	14.24
			1RB Mid	0	14.46	14.33	14.23
			1RB High	0	14.23	14.36	14.18
			50% Low	1	14.37	14.52	14.40
			50% Mid	1	14.38	14.45	14.31
			50% High	1	14.34	14.43	14.37
			100%	1	14.14	14.21	14.03
		16-QAM	1RB Low	1	14.35	14.24	14.22
			1RB Mid	1	14.31	14.09	14.31
			1RB High	1	14.40	13.94	14.24
			50% Low	2	14.43	14.46	14.10
			50% Mid	2	14.44	14.47	14.10
			50% High	2	14.39	14.43	14.07
			100%	2	14.04	14.28	14.19
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1857.5 MHz	1882.5 MHz	1907.5 MHz
LTE CAT M1 B25	15 MHz	QPSK	1RB Low	0	14.38	14.49	14.58
			1RB Mid	0	14.32	14.27	14.43
			1RB High	0	14.18	14.28	14.37
			50% Low	1	14.35	14.49	14.45
			50% Mid	1	14.39	14.44	14.34
			50% High	1	14.35	14.43	14.33
			100%	1	14.29	14.39	14.12
		16-QAM	1RB Low	1	14.45	14.56	14.56
			1RB Mid	1	14.42	14.20	14.51
			1RB High	1	14.36	14.32	14.45
			50% Low	2	14.30	14.71	14.33
			50% Mid	2	14.14	14.73	14.32
			50% High	2	14.04	14.60	14.32
			100%	2	14.36	14.29	14.11

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1855.0 MHz	1882.5 MHz	1910.0 MHz
LTE CAT M1 B25	10 MHz	QPSK	1RB Low	0	13.89	14.33	14.16
			1RB Mid	0	13.69	14.22	13.96
			1RB High	0	13.64	14.19	13.95
			50% Low	1	13.87	14.26	13.77
			50% Mid	1	13.81	14.21	13.65
			50% High	1	13.74	14.16	13.62
			100%	1	12.58	12.93	12.75
		16-QAM	1RB Low	1	13.94	14.39	14.07
			1RB Mid	1	13.88	14.38	13.87
			1RB High	1	13.71	14.11	13.93
			50% Low	2	13.86	14.17	13.80
			50% Mid	2	13.80	14.09	13.76
			50% High	2	13.75	14.05	13.69
			100%	2	12.55	12.86	12.68
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B25	5 MHz	QPSK	1RB Low	0	13.78	13.84	14.27
			1RB Mid	0	13.73	13.78	14.00
			1RB High	0	13.68	13.65	13.96
			50% Low	1	13.86	13.86	13.97
			50% Mid	1	13.82	13.82	13.85
			50% High	1	13.74	13.74	13.70
			100%	1	12.62	12.64	12.68
		16-QAM	1RB Low	1	14.05	14.05	14.22
			1RB Mid	1	13.95	13.95	13.79
			1RB High	1	13.77	13.78	13.72
			50% Low	2	13.83	13.84	13.73
			50% Mid	2	13.75	13.76	13.59
			50% High	2	13.72	13.71	13.50
			100%	2	12.51	12.54	12.59

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1851.5 MHz	1882.5 MHz	1913.5 MHz
LTE CAT M1 B25	3 MHz	QPSK	1RB Low	0	13.65	13.99	13.44
			1RB Mid	0	13.51	13.96	13.33
			1RB High	0	13.31	13.93	13.27
			50% Low	1	12.56	12.92	12.56
			50% Mid	1	12.51	12.85	12.54
			50% High	1	12.46	12.78	12.53
			100%	1	11.41	11.76	11.57
		16-QAM	1RB Low	1	12.70	13.26	12.92
			1RB Mid	1	12.52	13.00	12.90
			1RB High	1	12.47	12.99	12.70
			50% Low	2	11.26	11.77	11.41
			50% Mid	2	11.25	11.69	11.35
			50% High	2	11.25	11.65	11.26
			100%	2	11.32	11.70	11.52
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B25	1.4 MHz	QPSK	1RB Low	0	13.87	14.14	13.88
			1RB Mid	0	13.83	13.98	13.80
			1RB High	0	13.62	13.91	13.67
			50% Low	1	12.65	13.07	12.85
			50% Mid	1	12.62	13.02	12.76
			50% High	1	12.61	12.94	12.72
			100%	1	11.57	12.00	11.77
		16-QAM	1RB Low	1	12.28	13.30	12.95
			1RB Mid	1	12.28	13.11	12.76
			1RB High	1	12.17	13.01	12.73
			50% Low	2	11.86	11.86	11.44
			50% Mid	2	11.76	11.73	11.43
			50% High	2	11.72	11.72	11.45
			100%	2	11.49	12.01	11.71

- **LTE CAT M1 B26**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
LTE CAT M1 B26	15 MHz	QPSK	1RB Low	0	-	15.54	-
			1RB Mid	0	-	15.51	-
			1RB High	0	-	15.40	-
			50% Low	1	-	15.30	-
			50% Mid	1	-	15.49	-
			50% High	1	-	15.43	-
			100%	1	-	15.19	-
		16-QAM	1RB Low	1	-	15.77	-
			1RB Mid	1	-	15.56	-
			1RB High	1	-	15.58	-
			50% Low	2	-	15.47	-
			50% Mid	2	-	15.63	-
			50% High	2	-	15.50	-
			100%	2	-	15.42	-
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B26	10 MHz	QPSK	1RB Low	0	15.46	15.32	15.19
			1RB Mid	0	15.21	15.15	15.08
			1RB High	0	14.91	15.08	14.98
			50% Low	1	15.04	15.05	14.94
			50% Mid	1	14.96	14.93	14.92
			50% High	1	14.89	14.89	14.89
			100%	1	13.85	13.76	13.75
		16-QAM	1RB Low	1	15.44	15.09	14.78
			1RB Mid	1	15.35	15.15	14.70
			1RB High	1	15.16	15.00	14.46
			50% Low	2	15.21	14.98	14.94
			50% Mid	2	15.11	14.93	14.92
			50% High	2	15.04	14.86	14.94
			100%	2	13.85	13.73	13.75

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE CAT M1 Bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					816.5 MHz	831.5 MHz	846.5 MHz
LTE CAT M1 B26	5 MHz	QPSK	1RB Low	0	15.26	15.25	15.40
			1RB Mid	0	15.21	14.96	15.22
			1RB High	0	15.23	14.96	15.11
			50% Low	1	15.03	14.99	15.12
			50% Mid	1	14.93	14.89	15.10
			50% High	1	14.90	14.80	15.03
			100%	1	13.86	13.78	13.91
		16-QAM	1RB Low	1	15.59	15.42	15.01
			1RB Mid	1	15.43	15.26	14.84
			1RB High	1	15.22	15.14	14.82
			50% Low	2	15.27	15.11	15.25
			50% Mid	2	15.09	15.02	15.19
			50% High	2	15.02	14.98	15.14
			100%	2	13.99	13.65	13.85
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B26	3 MHz	QPSK	1RB Low	0	15.14	14.53	14.82
			1RB Mid	0	15.01	14.33	14.71
			1RB High	0	14.92	14.21	14.62
			50% Low	1	13.85	13.64	13.82
			50% Mid	1	13.80	13.60	13.79
			50% High	1	13.80	13.57	13.75
			100%	1	12.83	12.58	12.89
		16-QAM	1RB Low	1	13.98	14.21	13.77
			1RB Mid	1	13.88	14.08	13.88
			1RB High	1	13.69	13.99	13.77
			50% Low	2	12.63	12.84	13.08
			50% Mid	2	12.60	12.68	12.91
			50% High	2	12.62	12.66	12.90
			100%	2	12.75	12.48	12.69
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE CAT M1 B26	1.4 MHz	QPSK	1RB Low	0	15.24	14.62	14.83
			1RB Mid	0	15.13	14.57	14.65
			1RB High	0	15.08	14.46	14.86
			50% Low	1	13.98	13.80	14.00
			50% Mid	1	13.93	13.79	13.96
			50% High	1	13.91	13.72	13.88
			100%	1	12.94	12.73	13.01
		16-QAM	1RB Low	1	14.11	14.33	14.52
			1RB Mid	1	14.02	14.22	14.40
			1RB High	1	13.95	14.11	14.37
			50% Low	2	12.85	12.93	13.28
			50% Mid	2	12.79	12.83	13.16
			50% High	2	12.75	12.75	13.10
			100%	2	12.86	12.64	12.95

- **LTE CAT M1 B66**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1720.0 MHz	1745.0 MHz	1770.0 MHz
LTE CAT M1 B66	20 MHz	QPSK	1RB Low	0	14.86	14.76	14.92
			1RB Mid	0	14.71	14.66	14.90
			1RB High	0	14.73	14.55	14.69
			50% Low	1	14.67	14.71	14.67
			50% Mid	1	14.59	14.70	14.60
			50% High	1	14.56	14.57	14.55
			100%	1	14.51	14.58	14.52
		16-QAM	1RB Low	1	14.90	14.77	14.78
			1RB Mid	1	14.76	14.49	14.67
			1RB High	1	14.63	14.44	14.58
			50% Low	2	14.64	14.88	14.47
			50% Mid	2	14.63	14.87	14.48
			50% High	2	14.61	14.83	14.45
			100%	2	14.55	14.65	14.41
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1717.5 MHz	1745.0 MHz	1772.5 MHz
LTE CAT M1 B66	15 MHz	QPSK	1RB Low	0	14.85	14.62	14.66
			1RB Mid	0	14.78	14.63	14.69
			1RB High	0	14.73	14.39	14.54
			50% Low	1	14.62	14.70	14.60
			50% Mid	1	14.64	14.71	14.61
			50% High	1	14.53	14.67	14.48
			100%	1	14.45	14.55	14.47
		16-QAM	1RB Low	1	14.71	14.89	14.55
			1RB Mid	1	14.45	14.81	14.30
			1RB High	1	14.54	14.77	14.20
			50% Low	2	14.75	14.78	14.71
			50% Mid	2	14.69	14.71	14.72
			50% High	2	14.66	14.67	14.58
			100%	2	14.55	14.67	14.50

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1715.0 MHz	1745.0 MHz	1775.0 MHz
LTE CAT M1 B66	10 MHz	QPSK	1RB Low	0	14.44	14.49	14.00
			1RB Mid	0	14.20	14.27	13.59
			1RB High	0	14.16	14.26	13.49
			50% Low	1	14.22	14.25	13.90
			50% Mid	1	14.29	14.12	13.88
			50% High	1	14.12	14.10	13.76
			100%	1	12.98	13.17	12.82
		16-QAM	1RB Low	1	14.36	14.63	13.94
			1RB Mid	1	14.27	14.30	13.58
			1RB High	1	14.17	14.21	13.51
			50% Low	2	14.17	14.31	13.96
			50% Mid	2	14.15	14.29	13.92
			50% High	2	14.05	14.20	13.80
			100%	2	13.02	13.10	12.75
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1712.5 MHz	1745.0 MHz	1777.5 MHz
LTE CAT M1 B66	5 MHz	QPSK	1RB Low	0	14.38	14.58	14.00
			1RB Mid	0	14.30	14.39	13.95
			1RB High	0	14.23	14.29	13.82
			50% Low	1	14.23	14.28	13.98
			50% Mid	1	14.20	14.16	13.89
			50% High	1	14.17	14.13	13.87
			100%	1	13.07	13.10	13.12
		16-QAM	1RB Low	1	14.32	14.86	14.21
			1RB Mid	1	14.22	14.26	13.94
			1RB High	1	14.12	14.18	13.90
			50% Low	2	14.06	14.08	13.86
			50% Mid	2	14.02	14.18	13.75
			50% High	2	14.00	14.16	13.69
			100%	2	13.02	13.11	13.00

2.2. Bluetooth

Band	Mode	Channel / Freq (MHz)	Maximum Output Power (dBm)
ISM 2.4 GHz	Bluetooth LE	0 / 2402	0
		39 / 2441	
		78 / 2480	

Based on paragraph “4.3.1 Standalone SAR test exclusion considerations” of the KDB 447498 D01 - General RF Exposure Guidance, for a minimum separation distance of 15mm:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Protocol	Max. Output Power		Min. Test Distance (mm)	Freq. (GHz)	Result	Test Exclusion
	(dBm)	(mW)				
Bluetooth LE	0	1	15	2.48	0.11	√

The computed value for Bluetooth is < 3.0, so Bluetooth LE mode qualifies for Standalone SAR test exclusion for 1-g SAR and 10-g SAR.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x] \leq 10 \text{ W/kg for test separation distances } \leq 50 \text{ mm; where } x = 7.5 \text{ for 1-g SAR and } x = 18,75 \text{ for 10-g extremity SAR.}$$

Estimated SAR						
Protocol	Max. Output Power		Min. Test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR	Estimated 10-g SAR
	(dBm)	(mW)				
Bluetooth LE	0	1	15.0	2.48	0.014	0.0056

3. TISSUE PARAMETERS MEASUREMENTS

Frequency (MHz)	Target Head Tissue		Measured Head Tissue		Deviation %		Measured Date
	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	
750	41.94	0.89	43.35	0.94	3.37	5.48	2022-10-06
835	41.55	0.91	43.08	0.97	3.66	6.34	2022-10-06
900	41.50	0.97	42.95	0.99	3.49	2.35	2022-10-06
1750	40.07	1.37	40.73	1.41	1.65	3.05	2022-10-04
1800	40.00	1.40	40.65	1.45	1.62	3.29	2022-10-04
1900	40.00	1.40	40.41	1.50	1.03	7.49	2022-10-04

Frequency (MHz)	Target Body Tissue		Measured Body Tissue		Deviation %		Measured Date
	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	
750	55.53	0.96	54.88	0.97	-1.18	0.61	2022-09-28
835	55.21	0.98	54.84	0.97	-0.66	-1.20	2022-09-29
900	55.00	1.05	54.33	1.04	-1.23	-1.06	2022-09-29
1750	53.43	1.49	52.23	1.46	-2.26	-2.17	2022-10-03
1800	53.30	1.52	52.05	1.50	-2.34	-1.54	2022-10-03
1900	53.30	1.52	51.64	1.55	-3.11	1.85	2022-10-03

Note: The dielectric properties have been measured by the contact probe method at 22° C.

DASY6 measurement systems have a SAR error compensation algorithm to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, so the tolerance for ϵ and σ may be relaxed to $\pm 10\%$.

- Composition / Information on ingredients

Head and Muscle Tissue Simulation Liquids HSL750V2/MSL750V2

H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose Medium	Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%

Head and Muscle Tissue Simulation Liquids HSL900/MSL900

H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose Medium	Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%

Head and Muscle Tissue Simulation Liquids HBBL1550-1900V3/MBBL1550-1900V3

Water	50 – 73 %
Non-ionic detergents	27 – 50 % polyoxyethylenesorbitan monolaurate
NaCl	0 – 2 %
Preservative	0.05 – 0.1% Preventol-D7
Safety relevant ingredients:	
CAS-No. 55965-84-9	< 0.1 % aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone
CAS-No. 9005-64-5	<50 % polyoxyethylenesorbitan monolaurate

Head Tissue Simulation Liquids HBBL600-6000V6

Aqueous solution with surfactants and inhibitors, exact percentage concentration of components is withheld as a trade secret by the manufacturer. Contains:

Ehtanediol	<5.2 %
Sodium petroleum sulfonate	<2.9 %
Hexylene Glycol / 2 – Methyl-pentane-2,4-diol	<2.9 %
Alkoxylated alcohol, > C ₁₆	<2.0 %

4. SYSTEM CHECK MEASUREMENTS

4.1. Validation results for Head TSL

Date	Frequency (MHz)	SAR over	Fast SAR (W/kg)	SAR (W/kg)	1 W Target SAR (W/kg)	1 W Norm. SAR (W/kg)	Drift (%)
2022-10-06	750	1 gr.	2.31	2.25	8.43	8.93	5.90
		10 gr.	1.54	1.46	5.51	5.79	5.14
2022-06-10	900	1 gr.	2.80	2.83	11.10	11.32	1.98
		10 gr.	1.79	1.84	7.07	7.36	4.10
2022-10-04	1800	1 gr.	9.91	9.80	39.30	39.20	-0.25
		10 gr.	5.18	5.07	20.40	20.28	-0.59

4.2. Validation results for Body TSL

Date	Frequency (MHz)	SAR over	Fast SAR (W/kg)	SAR (W/kg)	1 W Target SAR (W/kg)	1 W Norm. SAR (W/kg)	Drift (%)
2022-01-18	750	1 gr.	2.27	2.25	8.78	9.00	2.51
		10 gr.	1.50	1.49	5.81	5.96	2.58
2022-01-21	900	1 gr.	2.88	2.87	11.30	11.48	1.59
		10 gr.	1.86	1.86	7.29	7.44	2.06
2022-01-25	1800	1 gr.	9.80	9.54	38.80	38.16	-1.65
		10 gr.	5.06	4.95	20.40	19.80	-2.94

5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

5.1. Summary maximum results for 1-g Head SAR measurements.

Mode	Side / Position	Channel (Frequency)	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)
LTE CAT M1 Band 2	Top edge/15 mm	CH 18700 (1860 MHz)	0.328	1.6
LTE CAT M1 Band 4	Top edge/15 mm	CH 20300 (1745 MHz)	0.165	1.6
LTE CAT M1 Band 5	Top edge/15 mm	CH 20525 (836.5 MHz)	0.076	1.6
LTE CAT M1 Band 12	Top edge/15 mm	CH 23095 (707.5 MHz)	0.096	1.6
LTE CAT M1 Band 13	Top edge/15 mm	CH 23230 (782 MHz)	0.074	1.6
LTE CAT M1 Band 25	Top edge/15 mm	CH 26140 (1860.0 MHz)	0.300	1.6
LTE CAT M1 Band 26	Top edge/15 mm	CH 26865 (831.5 MHz)	0.078	1.6
LTE CAT M1 Band 66	Top edge/15 mm	CH 132575 (1770.0 MHz)	0.228	1.6

5.2. Summary maximum results for 1-g Body SAR measurements.

Mode	Side / Position	Channel (Frequency)	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)
LTE CAT M1 Band 2	Top edge/15 mm	CH 18700 (1860 MHz)	0.284	1.6
LTE CAT M1 Band 4	Top edge/15 mm	CH 20300 (1745 MHz)	0.148	1.6
LTE CAT M1 Band 5	Top edge/15 mm	CH 20600 (844 MHz)	0.073	1.6
LTE CAT M1 Band 12	Top edge/15 mm	CH 23095 (707.5 MHz)	0.107	1.6
LTE CAT M1 Band 13	Top edge/15 mm	CH 23230 (782 MHz)	0.085	1.6
LTE CAT M1 Band 25	Top edge/15 mm	CH 26140 (1860.0 MHz)	0.247	1.6
LTE CAT M1 Band 26	Top edge/15 mm	CH 26865 (831.5 MHz)	0.083	1.6
LTE CAT M1 Band 66	Top edge/15 mm	CH 132575 (1770.0 MHz)	0.215	1.6

5.3. Maximum 1g simultaneous multi-band transmission

Transmission Mode	Band	Max SAR 1-g (W/kg)	Σ SAR _i (W/kg)	Limit SAR 1-g (W/kg)	Verdict
LTE CAT M1 Band 2 (Head Exposure)	1800 MHz	0.328	0.342	1.6	Pass
Bluetooth LE (Estimated SAR)	2.4 GHz	0.014			

5.5. Results for LTE CAT M1 Band 2 (1 RB, 20 MHz, QPSK)

- Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 18900 (1880 MHz)	0.039	NM ¹	0.81	1.914	0.075		
Back Face	40	CH 18900 (1880 MHz)	0.003 ³	NM ¹	0.000 ³	1.914	0.006		
Left Edge	15	CH 18900 (1880 MHz)	0.007 ³	NM ¹	0.000 ³	1.914	0.013		
Right Edge	15	CH 18900 (1880 MHz)	0.008 ³	NM ¹	0.000 ³	1.914	0.015		
Top Edge	15	CH 18900 (1880 MHz)	0.147	0.147	-2.837	1.914	0.281		
Bottom Edge	15	CH 18900 (1880 MHz)	NM ²						
Top Edge	15	CH 18700 (1860 MHz)	0.159	0.163	0.577	2.014	0.328	1	
Top Edge	15	CH 19100 (1900 MHz)	0.123	0.129	0.115	1.950	0.252		

1, 2 and 3: See remarks and comments

- Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 18900 (1880 MHz)	0.042	NM ¹	1.742	1.914	0.080		
Back Face	40	CH 18900 (1880 MHz)	0.008 ³	NM ¹	0.000 ³	1.914	0.015		
Left Edge	15	CH 18900 (1880 MHz)	0.005 ³	NM ¹	0.000 ³	1.914	0.010		
Right Edge	15	CH 18900 (1880 MHz)	0.007 ³	NM ¹	0.000 ³	1.914	0.013		
Top Edge	15	CH 18900 (1880 MHz)	0.133	0.143	1.625	1.914	0.274		
Bottom Edge	15	CH 18900 (1880 MHz)	NM ²						
Top Edge	15	CH 18700 (1860 MHz)	0.133	0.141	-2.837	2.014	0.284	2	
Top Edge	15	CH 19100 (1900 MHz)	0.114	0.118	1.274	1.950	0.230		

1, 2 and 3: See remarks and comments

5.6. Results for LTE CAT M1 Band 2 (50% RB, 20 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 19100 (1900 MHz)	0.116	0.123	0.000	1.972	0.243	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 19100 (1900 MHz)	0.104	0.108	-0.917	1.972	0.213	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.7. Results for LTE CAT M1 Band 4 (1 RB, 20 MHz, QPSK)

- Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 20300 (1745 MHz)	0.025	NM ¹	1.859	1.738	0.043		
Back Face	40	CH 20300 (1745 MHz)	0.000 ³	NM ¹	0.000 ³	1.738	0.000		
Left Edge	15	CH 20300 (1745 MHz)	0.002 ³	NM ¹	0.000 ³	1.738	0.003		
Right Edge	15	CH 20300 (1745 MHz)	0.005 ³	NM ¹	0.000 ³	1.738	0.009		
Top Edge	15	CH 20300 (1745 MHz)	0.086	0.095	-0.688	1.738	0.165	3	
Bottom Edge	15	CH 20300 (1745 MHz)	NM ²						
Top Edge	15	CH 20050 (1720 MHz)	0.063	0.063	-0.803	1.963	0.124		
Top Edge	15	CH 20175 (1732.5 MHz)	0.062	0.064	-1.258	1.892	0.121		

1, 2 and 3: See remarks and comments

- Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 20300 (1745 MHz)	0.026	NM ¹	-2.725	1.738	0.045		
Back Face	40	CH 20300 (1745 MHz)	0.005 ³	NM ¹	0.000 ³	1.738	0.009		
Left Edge	15	CH 20300 (1745 MHz)	0.002 ³	NM ¹	0.000 ³	1.738	0.003		
Right Edge	15	CH 20300 (1745 MHz)	0.004 ³	NM ¹	0.000 ³	1.738	0.007		
Top Edge	15	CH 20300 (1745 MHz)	0.078	0.085	-0.115	1.738	0.148	4	
Bottom Edge	15	CH 20300 (1745 MHz)	NM ²						
Top Edge	15	CH 20050 (1720 MHz)	0.054	0.055	-0.803	1.963	0.108		
Top Edge	15	CH 20175 (1732.5 MHz)	0.060	0.057	-3.395	1.892	0.108		

1, 2 and 3: See remarks and comments

5.8. Results for LTE CAT M1 Band 4 (50% RB, 20 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 20300 (1745 MHz)	0.079	0.088	-0.688	1.858	0.163	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 20300 (1745 MHz)	0.069	0.077	0.809	1.858	0.143	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.9. Results for LTE CAT M1 Band 5 (1 RB, 20 MHz, QPSK)

- Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 20450 (829 MHz)	0.005	NM ¹	2.329	1.449	0.007		
Back Face	40	CH 20450 (829 MHz)	0.004 ³	NM ¹	0.000 ³	1.449	0.006		
Left Edge	15	CH 20450 (829 MHz)	0.002 ³	NM ¹	0.000 ³	1.449	0.003		
Right Edge	15	CH 20450 (829 MHz)	0.000 ³	NM ¹	0.000 ³	1.449	0.000		
Top Edge	15	CH 20450 (829 MHz)	0.043	0.046	-0.230	1.449	0.067		
Bottom Edge	15	CH 20450 (829 MHz)	NM ²						
Top Edge	15	CH 20525 (836.5 MHz)	0.049	0.051	-0.115	1.493	0.076	5	
Top Edge	15	CH 20600 (844 MHz)	0.049	0.051	-1.145	1.462	0.075		

1, 2 and 3: See remarks and comments

- Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 20450 (829 MHz)	0.007 ³	NM ¹	0.000 ³	1.449	0.010		
Back Face	40	CH 20450 (829 MHz)	0.007 ³	NM ¹	0.000 ³	1.449	0.010		
Left Edge	15	CH 20450 (829 MHz)	0.003 ³	NM ¹	0.000 ³	1.449	0.004		
Right Edge	15	CH 20450 (829 MHz)	0.000 ³	NM ¹	0.000 ³	1.449	0.001		
Top Edge	15	CH 20450 (829 MHz)	0.042	0.044	-0.803	1.449	0.064		
Bottom Edge	15	CH 20450 (829 MHz)	NM ²						
Top Edge	15	CH 20525 (836.5 MHz)	0.046	0.049	1.508	1.493	0.073		
Top Edge	15	CH 20600 (844 MHz)	0.049	0.050	-1.372	1.462	0.073	6	

1, 2 and 3: See remarks and comments

5.10. Results for LTE CAT M1 Band 5 (50% RB, 20 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 20525 (836.5 MHz)	0.046	0.047	0.577	1.496	0.070	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 20525 (836.5 MHz)	0.046	0.048	2.802	1.496	0.072	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.11. Results for LTE CAT M1 Band 12 (1 RB, 10 MHz, QPSK)

- **Head measurements**

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, the middle channel of the group of overlapping channels should be selected for testing.

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 23095 (707.5 MHz)	0.005 ³	NM ¹	2.329	1.574	0.008	
Back Face	40	CH 23095 (707.5 MHz)	0.004 ³	NM ¹	0.000 ³	1.574	0.006	
Left Edge	15	CH 23095 (707.5 MHz)	0.000 ³	NM ¹	0.000 ³	1.574	0.003	
Right Edge	15	CH 23095 (707.5 MHz)	0.000 ³	NM ¹	0.000 ³	1.574	0.000	
Top Edge	15	CH 23095 (707.5 MHz)	0.060	0.061	2.094	1.574	0.096	7
Bottom Edge	15	CH 23095 (707.5 MHz)	NM ²					

1, 2 and 3: See remarks and comments

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 23095 (707.5 MHz)	0.010 ³	NM ¹	-4.170	1.574	0.017	
Back Face	40	CH 23095 (707.5 MHz)	0.006 ³	NM ¹	0.000 ³	1.574	0.009	
Left Edge	15	CH 23095 (707.5 MHz)	0.001 ³	NM ¹	0.000 ³	1.574	0.000	
Right Edge	15	CH 23095 (707.5 MHz)	0.000 ³	NM ¹	0.000 ³	1.574	0.000	
Top Edge	15	CH 23095 (707.5 MHz)	0.066	0.068	0.115	1.574	0.107	
Bottom Edge	15	CH 23095 (707.5 MHz)	NM ²					

1, 2 and 3: See remarks and comments

5.12. Results for LTE CAT M1 Band 12 (50% RB, 10 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 23095 (707.5 MHz)	0.056	0.057	0.231	1.641	0.094	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 23095 (707.5 MHz)	0.064	0.066	0.462	1.641	0.108	8

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.13. Results for LTE CAT M1 Band 13 (1 RB, 10 MHz, QPSK)

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, the middle channel of the group of overlapping channels should be selected for testing.

- Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 23230 (782 MHz)	0.007 ³	NM ¹	1.391	1.442	0.010		
Back Face	40	CH 23230 (782 MHz)	0.004 ³	NM ¹	0.000 ³	1.442	0.006		
Left Edge	15	CH 23230 (782 MHz)	0.001 ³	NM ¹	0.000 ³	1.442	0.001		
Right Edge	15	CH 23230 (782 MHz)	0.000 ³	NM ¹	0.000 ³	1.442	0.000		
Top Edge	15	CH 23230 (782 MHz)	0.047	0.050	0.462	1.442	0.072		
Bottom Edge	15	CH 23230 (782 MHz)	NM ²						

1, 2 and 3: See remarks and comments

- Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 23230 (782 MHz)	0.011 ³	NM ¹	1.508	1.442	0.016		
Back Face	40	CH 23230 (782 MHz)	0.007 ³	NM ¹	0.000 ³	1.442	0.012		
Left Edge	15	CH 23230 (782 MHz)	0.001 ³	NM ¹	0.000 ³	1.442	0.001		
Right Edge	15	CH 23230 (782 MHz)	0.000 ³	NM ¹	0.000 ³	1.442	0.000		
Top Edge	15	CH 23230 (782 MHz)	0.059	0.059	0.231	1.442	0.085		
Bottom Edge	15	CH 23230 (782 MHz)	NM ²						

1, 2 and 3: See remarks and comments

5.14. Results for LTE CAT M1 Band 13 (50% RB, 10 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 23230 (782 MHz)	0.048	0.049	-0.230	1.517	0.074	9

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 23230 (782 MHz)	0.058	0.056	-3.284	1.517	0.085	10

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.15. Results for LTE CAT M1 Band 25 (1 RB, 20 MHz, QPSK)

- Head measurements

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 26140 (1860.0 MHz)	0.040	NM ¹	-1.372	1.854	0.074	
Back Face	40	CH 26140 (1860.0 MHz)	0.002 ³	NM ¹	0.000 ³	1.854	0.004	
Left Edge	15	CH 26140 (1860.0 MHz)	0.005 ³	NM ¹	0.000 ³	1.854	0.009	
Right Edge	15	CH 26140 (1860.0 MHz)	0.009 ³	NM ¹	0.000 ³	1.854	0.017	
Top Edge	15	CH 26140 (1860.0 MHz)	0.150	0.162	0.346	1.854	0.300	11
Bottom Edge	15	CH 26140 (1860.0 MHz)	NM ²					
Top Edge	15	CH 26365 (1882.5 MHz)	0.129	0.138	0.231	1.866	0.258	
Top Edge	15	CH 26590 (1905.0 MHz)	0.112	0.120	1.274	1.977	0.237	

1, 2 and 3: See remarks and comments

- Body measurements

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 26140 (1860.0 MHz)	0.040	NM ¹	-2.276	1.854	0.074	
Back Face	40	CH 26140 (1860.0 MHz)	0.007 ³	NM ¹	0.000 ³	1.854	0.013	
Left Edge	15	CH 26140 (1860.0 MHz)	0.005 ³	NM ¹	0.000 ³	1.854	0.009	
Right Edge	15	CH 26140 (1860.0 MHz)	0.007 ³	NM ¹	0.000 ³	1.854	0.013	
Top Edge	15	CH 26140 (1860.0 MHz)	0.129	0.133	2.920	1.854	0.247	12
Bottom Edge	15	CH 26140 (1860.0 MHz)	NM ²					
Top Edge	15	CH 26365 (1882.5 MHz)	0.120	0.126	0.925	1.866	0.235	
Top Edge	15	CH 26590 (1905.0 MHz)	0.096	0.105	-0.230	1.977	0.208	

1, 2 and 3: See remarks and comments

5.16. Results for LTE CAT M1 Band 25 (50% RB, 20 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 26365 (1882.5 MHz)	0.119	0.127	0.231	1.854	0.235	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 26365 (1882.5 MHz)	0.111	0.115	0.693	1.854	0.213	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.17. Results for LTE CAT M1 Band 26 (1 RB, 15 MHz, QPSK)

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, the middle channel of the group of overlapping channels should be selected for testing.

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 26865 (831.5 MHz)	0.007 ³	NM ¹	1.391	1.466	0.010	
Back Face	40	CH 26865 (831.5 MHz)	0.004 ³	NM ¹	0.000 ³	1.466	0.006	
Left Edge	15	CH 26865 (831.5 MHz)	0.001 ³	NM ¹	0.000 ³	1.466	0.001	
Right Edge	15	CH 26865 (831.5 MHz)	0.000 ³	NM ¹	0.000 ³	1.466	0.000	
Top Edge	15	CH 26865 (831.5 MHz)	0.052	0.053	0.925	1.466	0.078	13
Bottom Edge	15	CH 26865 (831.5 MHz)	NM ²					

1, 2 and 3: See remarks and comments

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front Face	15	CH 26865 (831.5 MHz)	0.008 ³	NM ¹	0.000 ³	1.466	0.012	
Back Face	40	CH 26865 (831.5 MHz)	0.006 ³	NM ¹	0.000 ³	1.466	0.009	
Left Edge	15	CH 26865 (831.5 MHz)	0.002 ³	NM ¹	0.000 ³	1.466	0.003	
Right Edge	15	CH 26865 (831.5 MHz)	0.000 ³	NM ¹	0.000 ³	1.466	0.000	
Top Edge	15	CH 26865 (831.5 MHz)	0.053	0.055	0.462	1.466	0.081	
Bottom Edge	15	CH 26865 (831.5 MHz)	NM ²					

1, 2 and 3: See remarks and comments

5.18. Results for LTE CAT M1 Band 26 (50% RB, 15 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 26865 (831.5 MHz)	0.049	0.049	-1.712	1.483	0.073	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 26865 (831.5 MHz)	0.053	0.055	-0.230	1.483	0.083	14

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.19. Results for LTE CAT M1 Band 66 (1 RB, 20 MHz, QPSK)

- Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 132575 (1770.0 MHz)	0.030	NM ¹	2.329	1.690	0.051		
Back Face	40	CH 132575 (1770.0 MHz)	0.000 ³	NM ¹	0.000 ³	1.690	0.000		
Left Edge	15	CH 132575 (1770.0 MHz)	0.002 ³	NM ¹	0.000 ³	1.690	0.003		
Right Edge	15	CH 132575 (1770.0 MHz)	0.009 ³	NM ¹	0.000 ³	1.690	0.015		
Top Edge	15	CH 132575 (1770.0 MHz)	0.127	0.135	0.809	1.690	0.228	15	
Bottom Edge	15	CH 132575 (1770.0 MHz)	NM ²						
Top Edge	15	CH 132072 (1720.0 MHz)	0.068	0.071	2.094	1.714	0.122		
Top Edge	15	CH 132322 (1745.0 MHz)	0.086	0.091	-2.051	1.754	0.160		

1, 2 and 3: See remarks and comments

- Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.	
Front Face	15	CH 132575 (1770.0 MHz)	0.043	NM ¹	1.042	1.690	0.054		
Back Face	40	CH 132575 (1770.0 MHz)	0.003 ³	NM ¹	0.000 ³	1.690	0.005		
Left Edge	15	CH 132575 (1770.0 MHz)	0.000 ³	NM ¹	0.000 ³	1.690	0.000		
Right Edge	15	CH 132575 (1770.0 MHz)	0.009 ³	NM ¹	0.000 ³	1.690	0.015		
Top Edge	15	CH 132575 (1770.0 MHz)	0.123	0.127	0.809	1.690	0.215	16	
Bottom Edge	15	CH 132575 (1770.0 MHz)	NM ²						
Top Edge	15	CH 132072 (1720.0 MHz)	0.059	0.062	0.231	1.714	0.106		
Top Edge	15	CH 132322 (1745.0 MHz)	0.077	0.078	-1.712	1.754	0.137		

1, 2 and 3: See remarks and comments

5.20. Results for LTE CAT M1 Band 66 (50% RB, 20 MHz, QPSK)

- **Head measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 132322 (1745.0 MHz)	0.079	0.082	-0.688	1.774	0.145	

- **Body measurements**

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Top Edge	15	CH 132322 (1745.0 MHz)	0.074	0.079	-1.031	1.774	0.140	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

5.21. Variability results.

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, paragraph “2.8.1. SAR measurement variability”, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements.

Repeated measurements are required only when the measured 1-g SAR is ≥ 0.80 W/kg, or 10-g SAR is ≥ 2.0 W/kg, using the highest measured SAR configuration for that tissue-equivalent medium.

As all measured SAR values are below these values, no Variability measurements are needed for this device.

Appendix C: Measurement Reports

Plot N° 1

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 2, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.0, 18700	8.25	1.48	40.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-04 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-04, 19:21	2022-10-04, 19:28
psSAR1g [W/kg]	0.159	0.163
psSAR10g [W/kg]	0.092	0.096
Power Drift [dB]	-0.03	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.6
Dist 3dB Peak [mm]		12.9

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

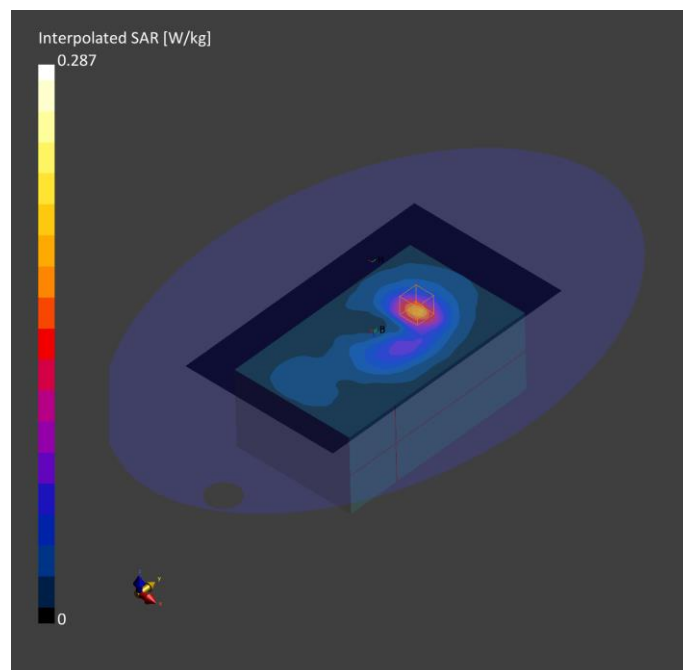

Plot N° 2

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 2, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.0, 18700	8.06	1.53	51.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MBBL15550-1950V3-2022-10-03 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-03, 13:38	2022-10-03, 13:44
psSAR1g [W/kg]	0.133	0.141
psSAR10g [W/kg]	0.076	0.083
Power Drift [dB]	-0.20	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.4
Dist 3dB Peak [mm]		13.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

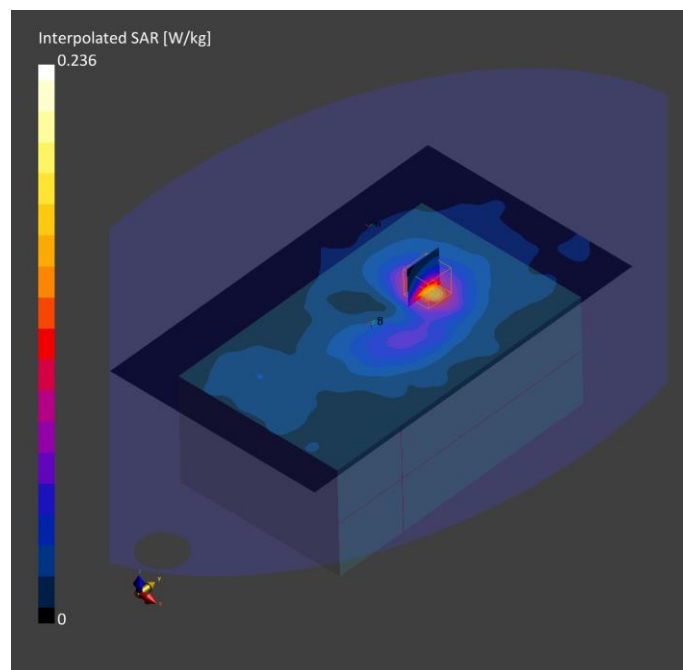

Plot N° 3

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 4, E-UTRA/FDD	LTE-FDD, 10169-CAE	1745.0, 20300	8.25	1.41	40.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-04 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-04, 19:53	2022-10-04, 19:59
psSAR1g [W/kg]	0.086	0.095
psSAR10g [W/kg]	0.052	0.057
Power Drift [dB]	-0.11	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.8
Dist 3dB Peak [mm]		14.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

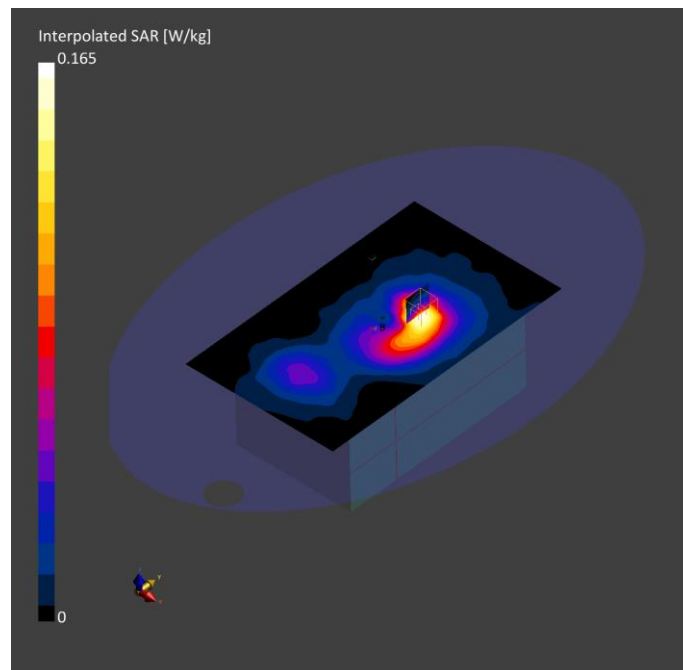

Plot Nº 4

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 4, E-UTRA/FDD	LTE-FDD, 10169-CAE	1745.0, 20300	8.06	1.46	52.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MBBL15550-1950V3-2022-10-03 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-03, 14:22	2022-10-03, 14:28
psSAR1g [W/kg]	0.078	0.085
psSAR10g [W/kg]	0.047	0.052
Power Drift [dB]	-0.02	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.3
Dist 3dB Peak [mm]		13.4

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

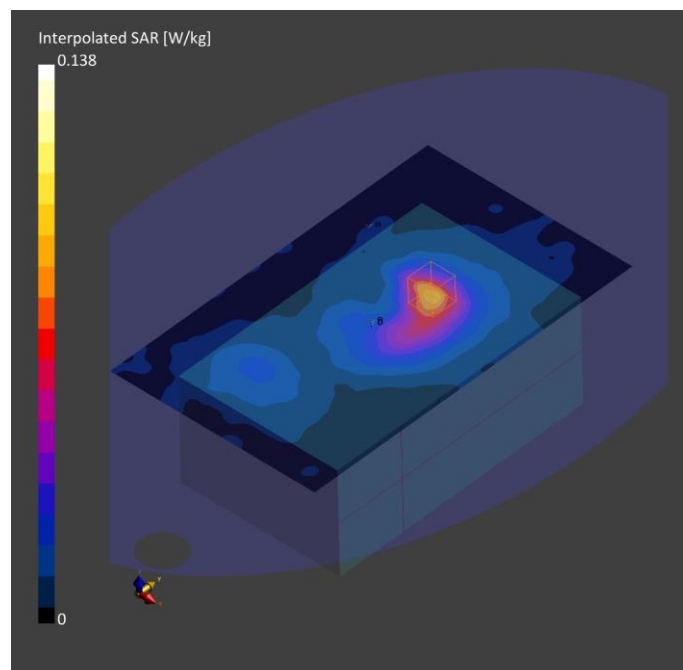

Plot Nº 5

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	836.5, 20525	9.43	0.970	43.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-06, 20:16	2022-10-06, 20:22
psSAR1g [W/kg]	0.049	0.051
psSAR10g [W/kg]	0.034	0.038
Power Drift [dB]	0.11	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		90.3
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

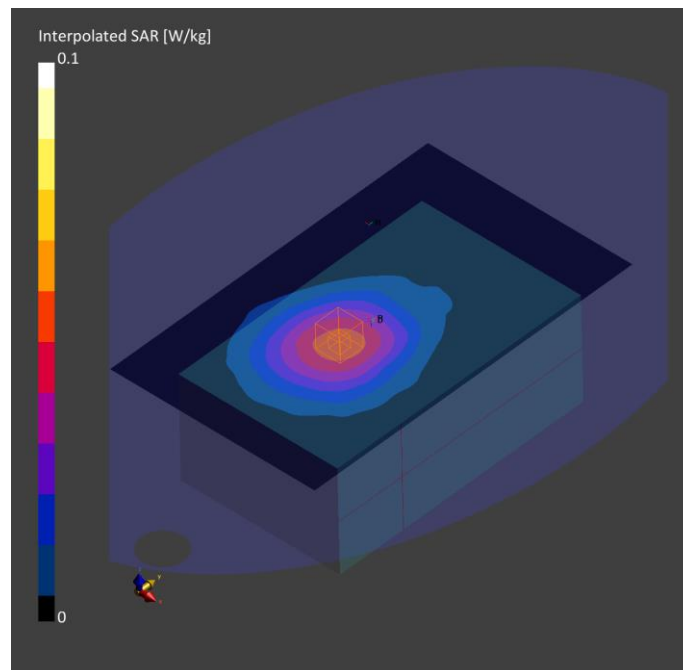

Plot Nº 6

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	844.0, 20600	9.52	0.980	54.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL900V2-2022-09-29 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-29, 17:14	2022-09-29, 17:21
psSAR1g [W/kg]	0.049	0.050
psSAR10g [W/kg]	0.034	0.039
Power Drift [dB]	-0.19	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.7
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

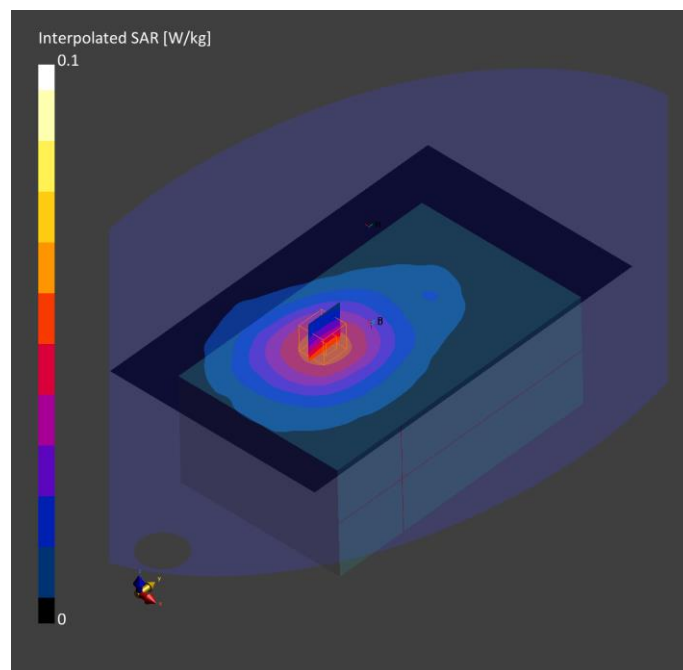

Plot N° 7

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	707.5, 23095	9.84	0.930	43.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-06, 17:50	2022-10-06, 17:57
psSAR1g [W/kg]	0.060	0.061
psSAR10g [W/kg]	0.042	0.046
Power Drift [dB]	0.08	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		89.7
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

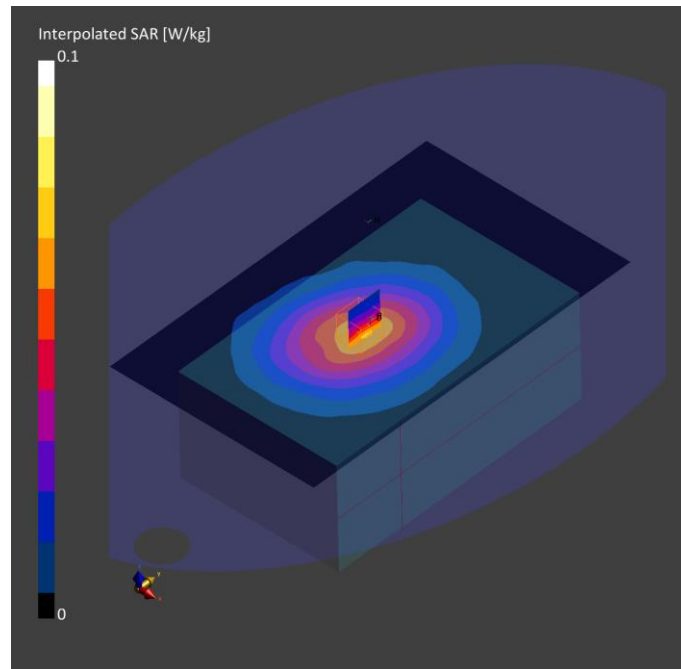

Plot Nº 8

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 12, E-UTRA/FDD	LTE-FDD, 10154-CAG	707.5, 23095	10.0	0.940	55.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL750V2 - 2022-09-28 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-29, 11:28	2022-09-29, 11:35
psSAR1g [W/kg]	0.064	0.066
psSAR10g [W/kg]	0.046	0.050
Power Drift [dB]	-0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		90.4
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

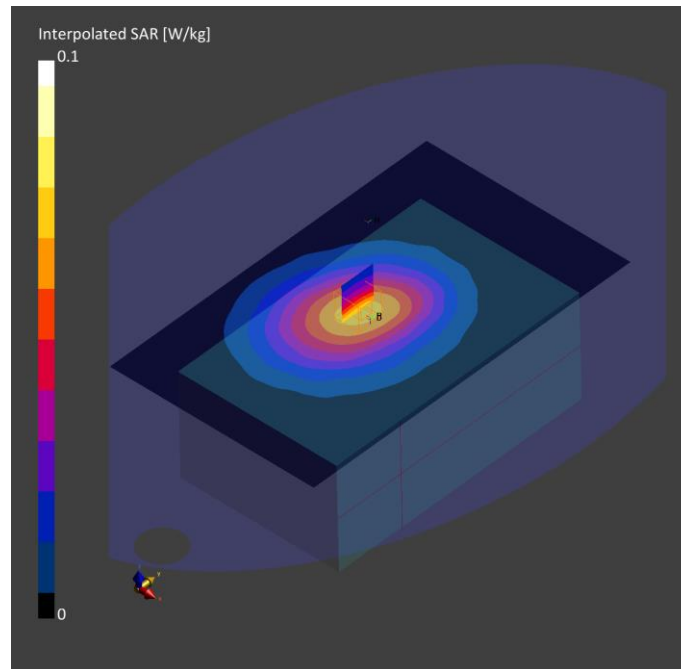

Plot Nº 9

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 13, E-UTRA/FDD	LTE-FDD, 10154-CAG	782.0, 23230	9.84	0.950	43.3

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-06, 17:33	2022-10-06, 17:40
psSAR1g [W/kg]	0.048	0.049
psSAR10g [W/kg]	0.034	0.036
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		89.7
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

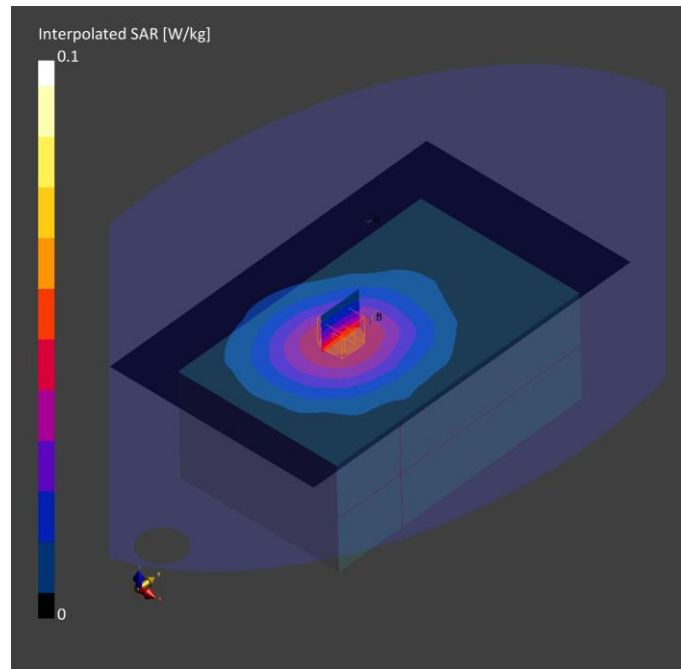

Plot N° 10

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.0, 23230	10.0	0.980	54.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL750V2 - 2022-09-28 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-29, 11:54	2022-09-29, 12:00
psSAR1g [W/kg]	0.059	0.059
psSAR10g [W/kg]	0.042	0.045
Power Drift [dB]	0.07	0.36
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		89.6
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

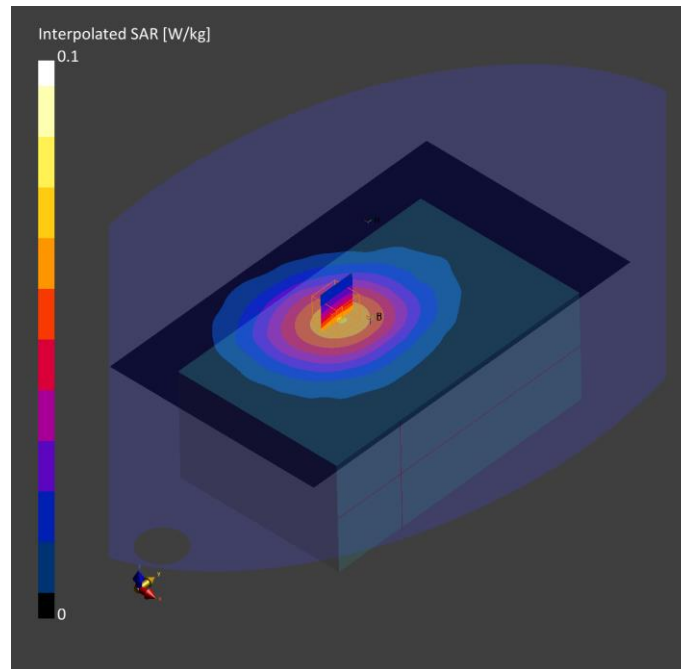

Plot N° 11

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.0, 26140	8.25	1.48	40.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-04 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-04, 20:57	2022-10-04, 21:03
psSAR1g [W/kg]	0.150	0.162
psSAR10g [W/kg]	0.086	0.093
Power Drift [dB]	-0.01	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.5
Dist 3dB Peak [mm]		12.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

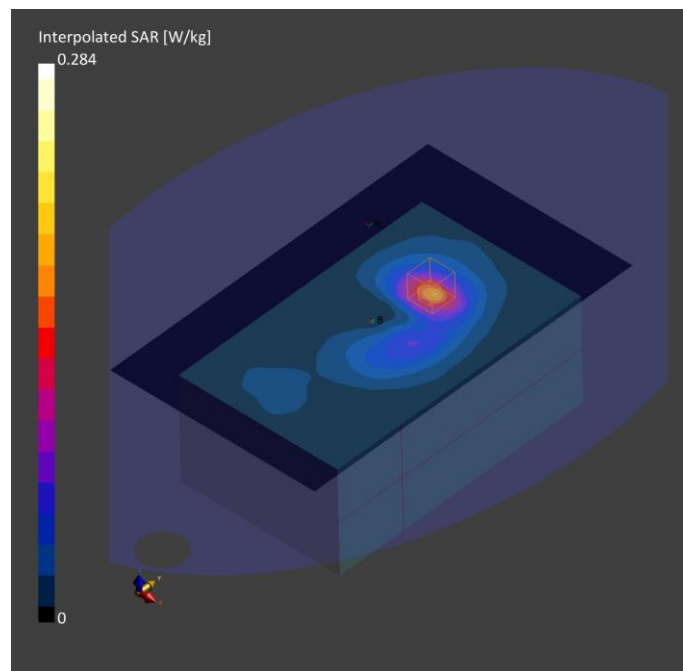

Plot N° 12.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.0, 26140	8.06	1.53	51.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MBBL15550-1950V3-2022-10-03 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-03, 15:13	2022-10-03, 15:19
psSAR1g [W/kg]	0.129	0.133
psSAR10g [W/kg]	0.074	0.077
Power Drift [dB]	0.07	0.21
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.0
Dist 3dB Peak [mm]		13.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

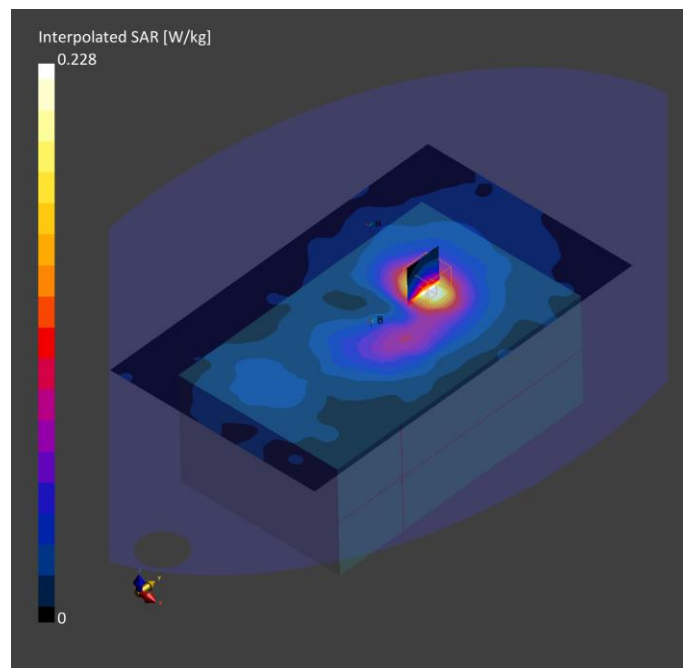

Plot N° 13.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 26 E-UTRA/FDD	LTE-FDD, 10181-CAE	831.5, 26865	9.43	0.970	43.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-06, 21:22	2022-10-06, 21:28
psSAR1g [W/kg]	0.052	0.053
psSAR10g [W/kg]	0.036	0.040
Power Drift [dB]	0.13	-0.20
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		86.7
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

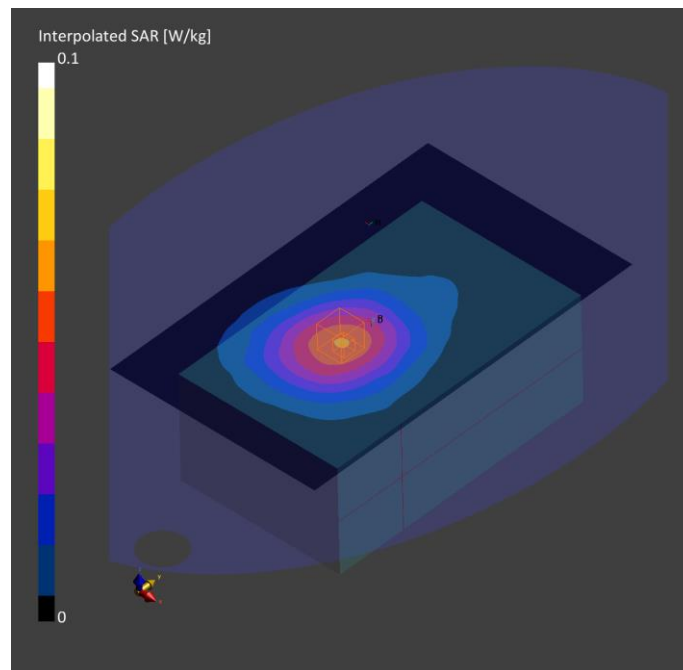

Plot Nº 14.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 26 E-UTRA/FDD	LTE-FDD, 10181-CAE	831.5, 26865	9.52	0.970	54.9

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL900V2-2022-09-29 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-30, 07:57	2022-09-30, 08:04
psSAR1g [W/kg]	0.053	0.055
psSAR10g [W/kg]	0.037	0.042
Power Drift [dB]	0.08	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.1
Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

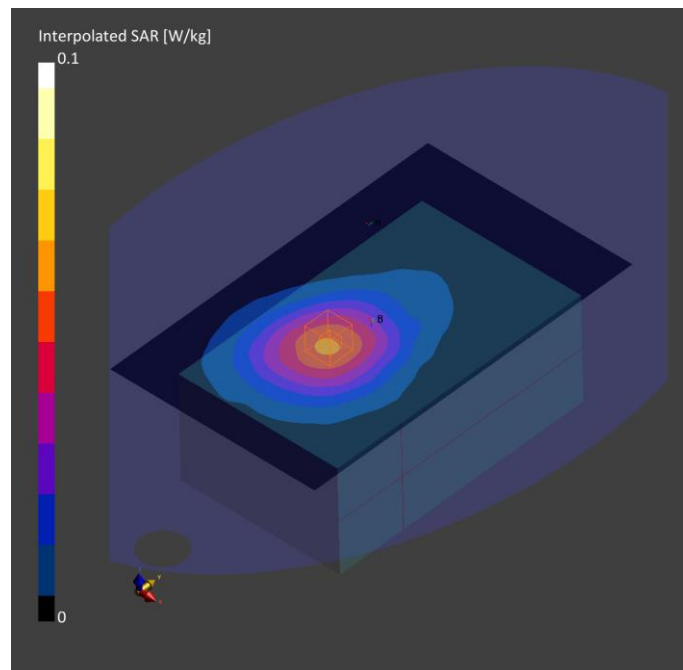

Plot Nº 15.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 15.00	Band 66, E-UTRA/FDD	LTE-FDD, 10169-CAE	1770.0, 132572	8.25	1.43	40.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-04 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-05, 09:03	2022-10-05, 09:09
psSAR1g [W/kg]	0.127	0.135
psSAR10g [W/kg]	0.074	0.081
Power Drift [dB]	0.06	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.3
Dist 3dB Peak [mm]		13.7

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

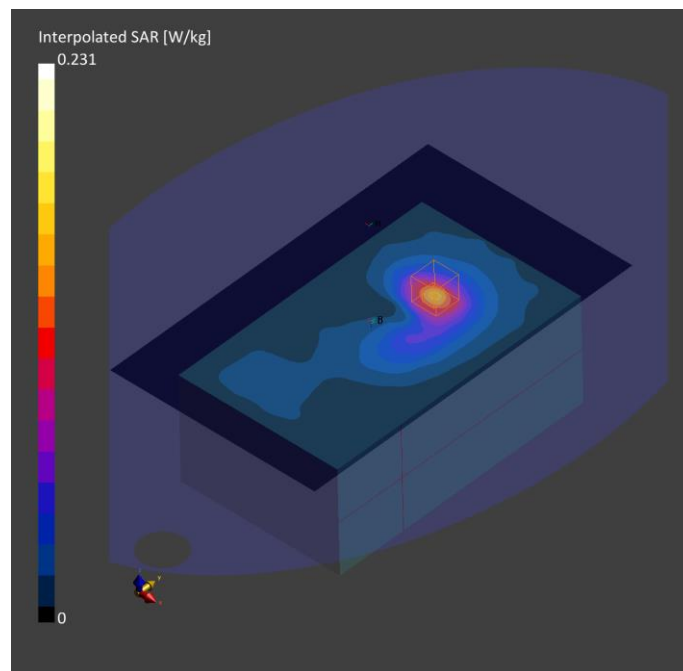

Plot Nº 16.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	230.0 x 90.0 x 140.0	354040470005107	CPAP device

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 15.00	Band 66, E-UTRA/FDD	LTE-FDD, 10169-CAE	1770.0, 132572	8.06	1.47	52.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MBBL15550-1950V3-2022-10-03 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-03, 16:14	2022-10-03, 17:05
psSAR1g [W/kg]	0.123	0.127
psSAR10g [W/kg]	0.071	0.076
Power Drift [dB]	0.33	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.0
Dist 3dB Peak [mm]		13.7

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

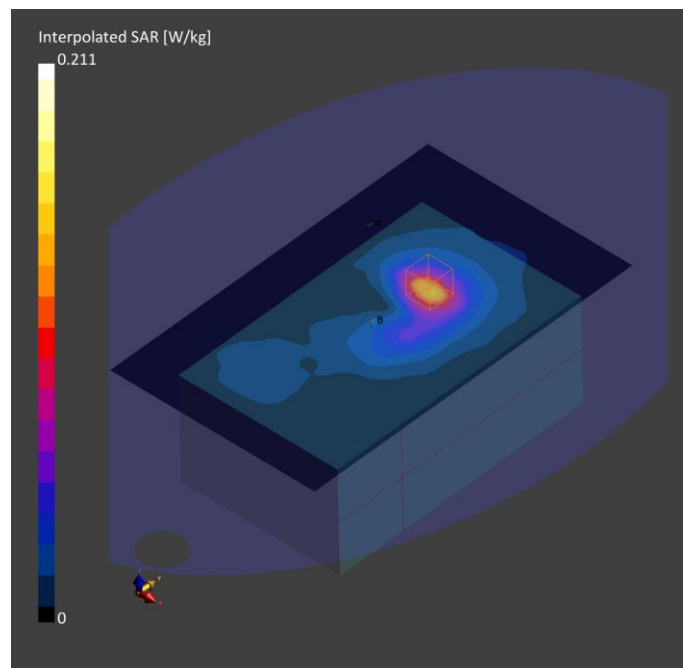

Appendix D: System Validation Reports

Validation results in 750 MHz Band for Head TSL

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	750.0, 0	10.0	0.970	54.9

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL750V2 - 2022-09-28 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-28, 09:35	2022-09-28, 09:40
psSAR1g [W/kg]	2.27	2.25
psSAR10g [W/kg]	1.50	1.49
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		86.9
Dist 3dB Peak [mm]		16.3

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

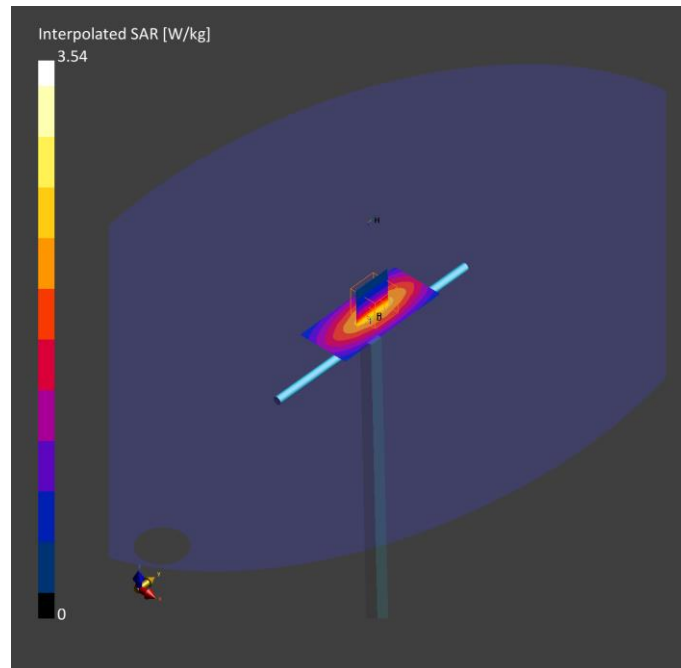

Validation results in 750 MHz Band for Body TSL

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		, 0--	750.0, 0	9.84	0.940	43.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0	Date	2022-10-06, 11:15	2022-10-06, 11:20
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5	psSAR1g [W/kg]	2.31	2.25
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.54	1.46
Graded Grid	Yes	Yes	Power Drift [dB]	-0.06	0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	Positive only	Positive only
Scan Method	Measured	Measured	M2/M1 [%]		86.4
			Dist 3dB Peak [mm]		> 15.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

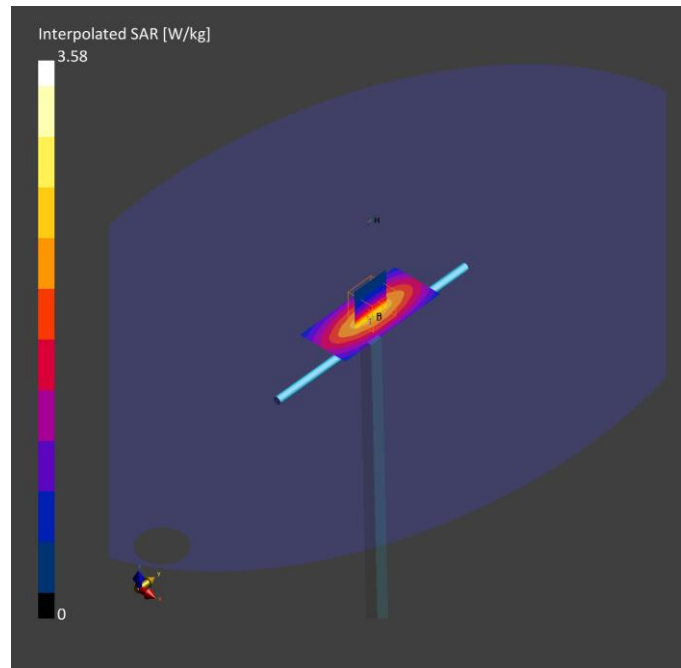

Validation results in 900 MHz Band for Head TSL

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	900.0, 0	9.52	1.04	54.3

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MSL900V2-2022-09-29 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-29, 16:03	2022-09-29, 16:08
psSAR1g [W/kg]	2.88	2.87
psSAR10g [W/kg]	1.86	1.86
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.7
Dist 3dB Peak [mm]		14.6

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

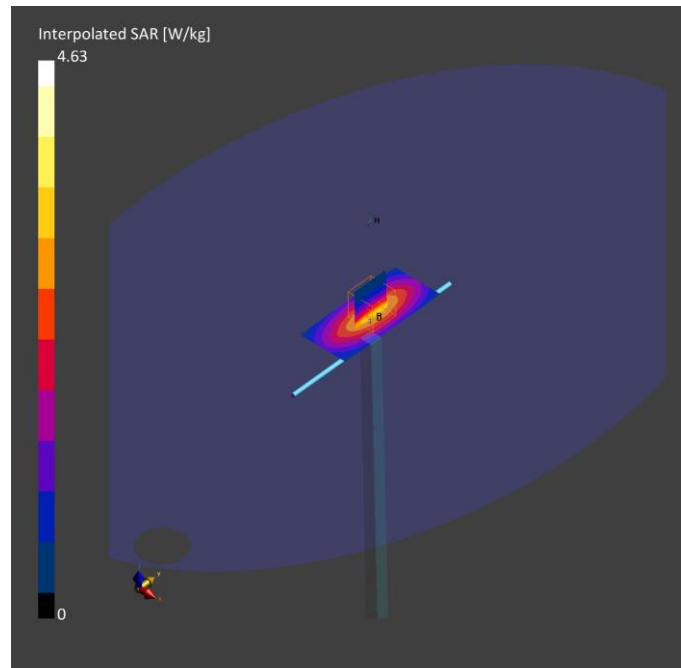

Validation results in 900 MHz Band for Body TSL

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		, 0--	900.0, 0	9.43	0.990	43.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-06 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-06, 11:57	2022-10-06, 12:02
psSAR1g [W/kg]	2.83	2.80
psSAR10g [W/kg]	1.84	1.79
Power Drift [dB]	0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		86.0
Dist 3dB Peak [mm]		17.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

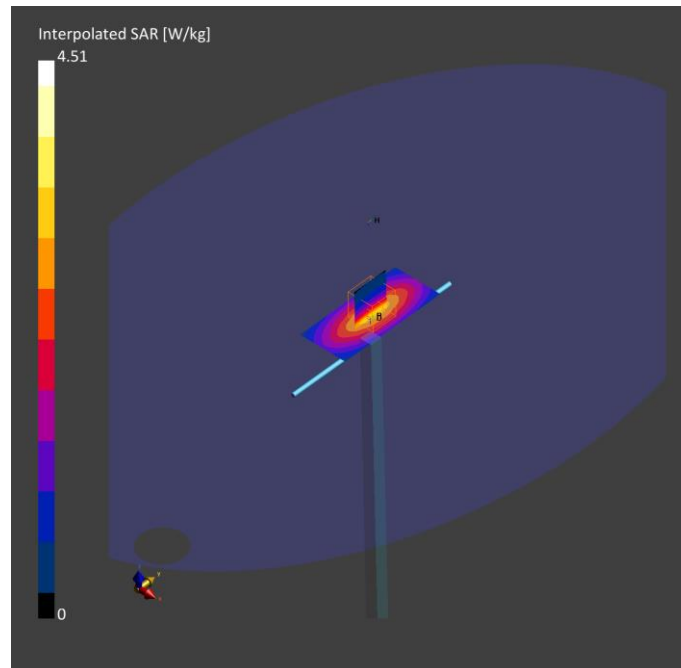

Validation results in 1800 MHz Band for Head TSL

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	1800.0, 0	8.06	1.50	52.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	MBBL15550-1950V3-2022-10-03 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0	Date	2022-10-03, 11:38	2022-10-03, 11:43
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5	psSAR1g [W/kg]	9.80	9.54
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	5.06	4.95
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		83.0
			Dist 3dB Peak [mm]		9.6

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

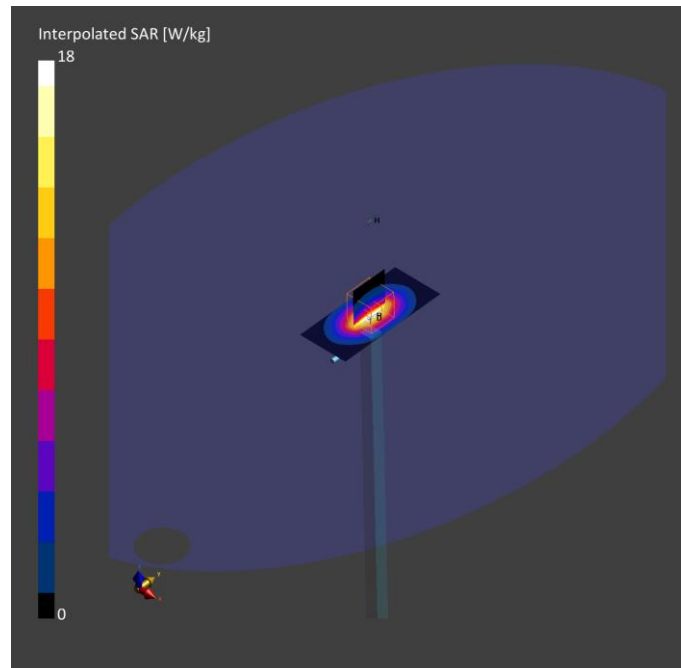

Validation results in 1800 MHz Band for Body TSL.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
RESMED,	50.0 x 10.0 x 140.0	354040470005107	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		, 0--	1800.0, 0	8.25	1.45	40.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V4.0 (20deg probe tilt) - 1060	HBBL 600-10000V6-2022-10-04 , --	EX3DV4 - SN7461, 2022-08-25	DAE4 Sn669, 2022-08-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-10-04, 16:18	2022-10-04, 16:23
psSAR1g [W/kg]	9.91	9.80
psSAR10g [W/kg]	5.18	5.07
Power Drift [dB]	0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.3
Dist 3dB Peak [mm]		9.7

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

