



SAR Test Report

FOR:

ResMed Limited

Model Name:

AirSense 10 & AirCurve 10

Product Description:

Continuous Positive Airway Pressure (CPAP) Device

FCC ID: 2ACHL-AIR104G

IC ID: 9103A-AIR104G

Test Report #: CONNE-051-16001-SAR-FCC

Date of Report: 2016-10-20



A2LA Accredited
FCC Recognized

IC Recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1. **Assessment** 4

2. **Administrative Data**..... 5

 2.1. Identification of the Testing Laboratory Issuing the SAR Test Report 5

 2.2. Identification of the Client and Manufacturer 5

3. **Equipment under Test (EUT)** 6

 3.1. General Specification of the Equipment under Test 6

 3.2. Antenna Information 7

 3.3. Identification of the Equipment Under Test (EUT) 7

 3.4. Identification of Accessory equipment 7

 3.5. Maximum SAR values 7

 3.6. Miscellaneous EUT Information:..... 7

4. **Subject of Investigation** 8

 4.1. The IEEE Standard C95.1, FCC Exposure Criteria, and IC Exposure Criteria..... 8

 4.2. SAR Limit 8

5. **Measurement Procedure**..... 9

 5.1. General Requirements 9

 5.2. Body-worn and Other Configurations 9

 5.3. System Check..... 10

 5.4. Procedure for assessing the peak spatial-average SAR 11

 5.5. Determination of the largest peak spatial-average SAR..... 13

 5.6. SAR Scaling Using the Tune-Up Scaling Factor 13

6. **The Measurement System** 14

 6.1. Robot system specification..... 14

 6.2. Data Acquisition Electronics..... 15

 6.3. Phantoms 15

 6.4. Interpolation and Extrapolation schemes 15

7. **Uncertainty Assessment**..... 16

 7.1. Measurement Uncertainty Budget According to IEEE 1528:2013..... 16

 7.2. Measurement Uncertainty Budget According to EN 62209-2 17

8. **Test results summary** 18

 8.1. Measured Conducted Average Output Power 18

8.2. Stand-Alone SAR Evaluation Exclusion.....28
8.3. Test Positions and Configurations29
8.4. SAR Results for Body30
8.5. SAR Measurement Variability31
8.1. SAR Measurement Variability31
8.2. Dipole verification32

9. References33

10. Report History.....34

Appendices:

Appendix A – Plots

Appendix B – Antenna location, Test Setup Photos

Appendix C – Tissue liquid parameters, Equipment list

1. Assessment

The following device was evaluated against the limits for general population uncontrolled exposure specified in FCC 2.1093 and RSS 102, Issue 5 according to measurement procedures specified in FCC regulation as listed in chapter 5, IEEE 1528:2013 and IEC 62209-2:2010 and no deviations were ascertained during the course of the tests performed.

Manufacturer	Description	Model #
ResMed Limited	Continuous Positive Airway Pressure (CPAP) Device	37028

Responsible for Testing Laboratory:

2016-10-20	Compliance	Franz Engert (Compliance Manager)	 Digitally signed by Franz Engert DN: cn=Franz Engert, c=US, o=CETECOM, ou=Compliance, email=franz.engert@cetecom. com
Date	Section	Name	Signature

Responsible for the Report:

2016-10-20	Compliance	James Donnellan (Sr. EMC Engineer)	 Digitally signed by James Donnellan DN: cn=James Donnellan, c=US, o=Cetecom Inc., ou=Compliance, email=james.donnellan@cetecom. com Date: 2016.10.20 13:34:07 -07'00'
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2. Administrative Data

2.1. Identification of the Testing Laboratory Issuing the SAR Test Report

Company Name	CETECOM Inc.
Department	Compliance
Address	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone	+1 (408) 586 6200
Fax	+1 (408) 586 6299
Industry Canada Company Number	3462B
Test Lab Manager	Franz Engert
Responsible Project Manager	Laith Saman

2.2. Identification of the Client and Manufacturer

	Client	Manufacturer
Company	ResMed Limited	ResMed Limited
Street Address	1 Elizabeth MacArthur Drive	1 Elizabeth MacArthur Drive
City/Zip Code	Bella Vista NSW 2153	Bella Vista NSW 2153
Country	Australia	Australia

3. Equipment under Test (EUT)

3.1. General Specification of the Equipment under Test

Model # & HVIN¹:	37015, 37020, 37028, 37036, 37043, 37046, 37051, 37056
Model/Marketing Name & PMN¹:	AirSense 10: 37015, 37020, 37028, 37036 AirCruve 10: 37043, 37046, 37051, 37056
FCC ID:	2ACHL-AIR104G
IC Certification Number:	9103A-AIR104G
Firmware Version Identification Number (FVIN):	N/A
HW Version	BOM 37028
SW Version	SX558
Host Marketing Name (HMN):	N/A
Product Type:	Portable
Prototype/Production:	Prototype
RF Exposure Environment:	General / Uncontrolled
Dimensions:	116 mm * 255 mm * 150 mm (H * W * D)
Exposure Conditions:	Body worn (Used Near Body)
Supported Radios:	Module Gemalto Cinterion ELS61-US; FCC-ID: QIPELS61-US; IC-ID: 7830A-ELS61US ELS61-US: Quad-Band LTE: Bands 2, 4, 5, 12 (700, 850, 1700/2100 (AWS) and 1900 MHz), Tri-Band UMTS: Bands 5, 4, 2 (WCDMA/FDD 850, 1700/2100 (AWS) and 1900 MHz) HSPA+ Cat.8 Data rates DL: max. 7.2 Mbps, UL: max. 5.76 Mbps LTE Cat.1 DL: max. 10.2 Mbps, UL: max. 5.2 Mbps
Additional Radios:	N/A
Operating Frequency Ranges (MHz)	WCDMA/UMTS FDD BAND II: 1852 - 1908 MHz; WCDMA/UMTS FDD BAND IV: 1710 - 1755 MHz; WCDMA/UMTS FDD BAND V: 824 - 849 MHz; LTE Band 2: 1850 - 1910 MHz; LTE Band 4: 1710 - 1755 MHz; LTE Band 5: 824 - 849 MHz; LTE Band 12: 698 - 716 MHz;
Power Back-Off Modes:	N/A
Simultaneous Transmission Configurations:	No simultaneous Transmission
Date of Testing:	2016-08-09 - 2016-09-15

¹ Model 37028 was tested, please refer to section 3.6

3.2. Antenna Information

Antenna	Type	Internal / External	Frequency (MHz)	Manufacturer Stated Max Peak Gain (dBi)
1	PCB	Internal	700 - 960 MHz	1.71
			1700 – 1950 MHz	3.03

3.3. Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	
1	22161345318	BOM 37028	SX558	Radiated Sample
2	22161345304	BOM 37028	SX558	Radiated Sample
3	22161345305	BOM 37028	SX558	Conducted Sample

3.4. Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number	Comments
1	AC Adapter	ResMed Limited	370001	YL88516319003781700	To power unit

3.5. Maximum SAR values

Equipment Class	Exposure Condition	Measured 1g SAR (W/kg)	Maximum Reported 1g SAR ¹ (W/kg)
PCT	Body-Worn Accessory (Operates Near Body)	0.83	1.32

NOTES:

1. Measured 1g SAR scaled to manufacturer stated output power upper tolerance limit.

3.6. Miscellaneous EUT Information:

Model 27028 was tested for EMC evaluation.

Based on a related model equality/similarity declaration provided by ResMed and which will be part of the FCC and IC filing exhibits, it is assumed that the results obtained from testing of the mentioned EUT remains valid for all model variants listed in sections 3.1 above

4. Subject of Investigation

The objective of the measurements done by CETECOM Inc. was the dosimetric assessment of the EUT described in section 3. The tests were performed in configurations for devices operated next to a person's body. The examinations were carried out with the dosimetric assessment system DASYS2 described in Section 6.

4.1. The IEEE Standard C95.1, FCC Exposure Criteria, and IC Exposure Criteria

The FCC limits are set by CFR 47 FCC rule parts 1.1307 and 2.1093. The IC limits are set by RSS 102, Issue 5. The limits are derived from the recommendations in IEEE C95.1-1999 (ANSI/IEEE C95.1-1999), "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz."

4.2. SAR Limit

In this report the comparison between the exposure limits and the SAR data is made using the spatial peak SAR.

Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and portable transmitters. The SAR values have to be averaged over a mass of 1g (SAR_{1g}) with the shape of a cube.

Standard	Exposure Condition	Average SAR (W/kg)	Mass Average (g)
FCC CFR 47 Part 2.1093 (d)(2)	Partial-Body	1.6	1
RSS 102, Issue 5 Safety Code 6 (2015)	Localized Head and Trunk	1.6	1

5. Measurement Procedure

The Federal Communications Commission (FCC) requires routine dosimetric assessment of mobile telecom-communications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. The measurement procedure shall be performed according to IEEE 1528:2013. The following KDB publications have additionally been applied:

447498 D01 v06 – General RF Exposure Guidance
865664 D01 v01r04 – SAR measurement 100 MHz to 6 GHz
941225 D01 v03r01 – SAR Measurement Procedures for 3G Devices
941225 D05 V02R05 – SAR for LTE Devices
941225 D05A V01R02 LTE Rel. 10 KDB Inquiry Sheet

Industry Canada (IC) requirements and measurement techniques regarding RF exposure are described in RSS-102, Issue 5, which refers to the latest version of IEEE 1528 and IEC 62209. IC follows many of the same procedures as applied for compliance with FCC requirements regarding EUT specific technologies and form factors. IC allows the use of the above listed KDBs in most aspects as described in IC Notice 2012-DRS1203 regarding Applicability of Latest FCC RF Exposure KDB Procedures (Publication Date: October 24, 2012) and Other Procedures.

5.1. General Requirements

SAR evaluation was performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature was in the range of 18°C to 25°C and 30-70% humidity. Simulating liquid temperature did not deviate more than 2°C throughout SAR evaluation.

5.2. Body-worn and Other Configurations

Test Position

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration. Devices with a headset output shall be tested with a connected headset.

Test to be Performed

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body. For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that provides the closest spacing to the body must be tested. If the manufacturer provides none body-worn accessories a separation distance of 1.5 cm between the back of the device and the flat phantom is recommended. Other separation distances may be used, but they shall not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

5.3. System Check

The purpose of the system check is to verify that the system operates within its specifications. System check is performed within 24 hours prior to compliance testing for each liquid type and frequency band. The system check result is verified to be within $\pm 10\%$ of the reference dipole source as measured during calibration of the dipole.

Phantom Set-Up


A flat phantom is used with the same tissue-equivalent liquid that will be used during compliance testing. The dipole feed point is placed at the center of the flat phantom and the dipole arms are aligned with the major axis.

Standard Source

A reference dipole source is used to irradiate the phantom. The dipole is placed under the bottom of the phantom and centred with its axis parallel to the longest dimension of the phantom. A low loss spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom. For frequencies below 1 GHz, a spacing of 15 mm is used. For frequencies above 1 GHz, a spacing of 10 mm is used. The dipole has a return loss of less than -20 dB at the resonant frequency.

System Check Procedure

The test set-up is as follows:

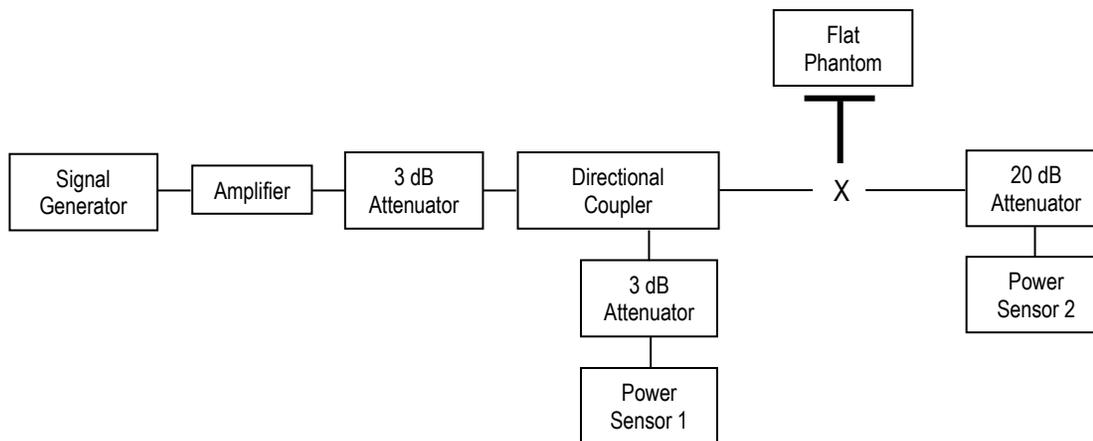

1. The cable at the output of the directional coupler is connected to the 20 dB attenuator.
2. The signal generator is adjusted until the desired input power to the dipole is measured at power sensor 2. The forward power of the directional coupler is measured with power sensor 1 and noted for step 4.
3. The cable at the output of the directional coupler is connected to the dipole source.
4. The signal generator is adjusted until power sensor 1 measures the same power as in step 2.
5. A SAR measurement is performed with the dipole source radiating.
6. During the system check test, the power measured by power sensor 1 is monitored to ensure the power does not drift.
7. At the conclusion of the SAR measurement, the SAR result is normalized to a dipole input power of 1 W and compared to the 1 W reference SAR value in the dipole calibration report. The difference between the measured SAR and the reference SAR is verified to be within $\pm 10\%$.

5.4. Procedure for assessing the peak spatial-average SAR

Step 1: Power reference measurement:

Prior to the SAR test, a local SAR measurement should be taken at a user-selected spatial reference point to monitor power variations during testing.

Step 2: Area scan

The measurement procedures for evaluating SAR associated with wireless handsets typically start with a coarse measurement grid in order to determine the approximate location of the local peak SAR values. This is referred to as the "area scan" procedure. The SAR distribution is scanned along the inside surface of typically half of the head of the phantom but at least larger than the areas projected (normal to the phantom's surface) by the handset and antenna. An example grid is given in Figure 4. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient precision. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. The approximate locations of the peak SARs should be determined from area scan. Since a given amplitude local peak with steep gradients may produce lower spatial-average SAR than slightly lower amplitude peaks with less steep gradients, it is necessary to evaluate the other peaks as well. However, since the spatial gradients of local SAR peaks are a function of wavelength inside the tissue simulating liquid and incident magnetic field strength, it is not necessary to evaluate peaks that are less than -2dB of the local maximum. Two-dimensional spline algorithms [Press, et al, 1996], [Brishoual, 2001] are typically used to determine the peaks and gradients within the scanned area. If the peak is closer than one-half of the linear dimension of the 1 g or 10 g tissue cube to the scan border, the measurement area should be enlarged if possible, e.g., by tilting the probe or the phantom (see Figure 5).

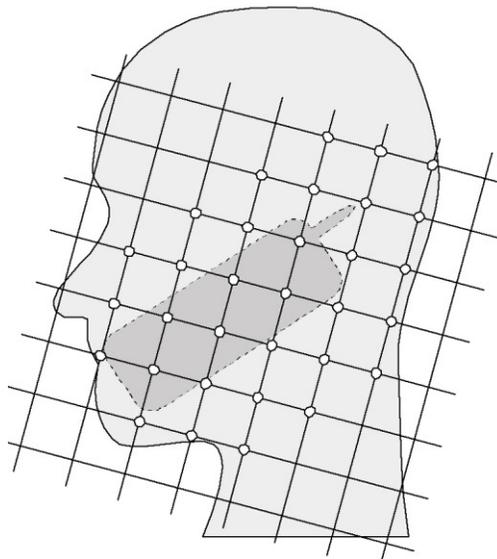


Figure 4 – Example of an area scan including the position of the handset. The scanned area (white dots) should be larger than the area projected by the handset and antenna.

The SPEAG DASY SAR system uses a mechanical sensor detection to find the phantom surface. To decrease test time, the DASY software allows the operator to choose an option where the SAR probe will reuse measurement locations from a previous identical area scan. With this option enabled, the DASY system will not use mechanical sensor detection to find the phantom surface. Locations of each measurement point of the area scan is taken at the same locations as an identical area scan if one is available. Area scans that reused location of measurement points is noted in the result plots under DASY Configuration > Sensor-Surface.

Step 3: Zoom scan

In order to assess the peak spatial SAR values averaged over a 1 g and 10 g cube, fine resolution volume scans, called "zoom scans", are performed at the peak SAR locations determined during the "area scan." The zoom scan volume should have at least 1.5 times the linear dimension of either a 1 g or a 10 g tissue cube for whichever peak spatial-average SAR is being evaluated. The peak local SAR locations that were determined in the area scan (interpolated value) should be on the centerline of the zoom scans. The centerline is the line that is normal to the surface and in the center of the volume scan. If this is not possible, the zoom scan can be shifted but not by more than half the dimension of the 1 g or a 10 g tissue cube.

The maximum spatial-average SAR is determined by a numerical analysis of the SAR values obtained in the volume of the zoom scan, whereby interpolation (between measured points) and extrapolation (between surface and closest measured points) routines should be applied. A 3-D-spline algorithm [Press, et al, 1996], [Kreyszig, 1983], [Brishoual, 2001] can be used for interpolation and a trapezoidal algorithm for the integration (averaging). Scan resolutions of larger than 2 mm can be used provided the uncertainty is evaluated according to E (see E.5).

In some areas of the phantom, such as the jaw and upper head region, the angle of the probe with respect to the line normal to the surface might become large, e.g., at angles larger than $\pm 30^\circ$ (see Figure 5), which may increase the boundary effect to an unacceptable level. In these cases, a change in the orientation of the probe and/or the phantom is recommended during the zoom scan so that the angle between the probe housing tube and the line normal to the surface is significantly reduced ($<30^\circ$).

Step 4: Power reference measurement

The local SAR should be measured at exactly the same location as in Step 1. The absolute value of the measurement drift (the difference between the SAR measured in Step 4 and Step 1) should be recorded in the uncertainty budget. It is recommended that the drift be kept within $\pm 5\%$. If this is not possible, even with repeat testing, additional information may be used to demonstrate the power stability during the test. Power reference measurements can be taken after each zoom scan, if more than one zoom scan is needed. However, the drift should always be referred to the initial state with fully charged battery.

5.5. Determination of the largest peak spatial-average SAR

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes should be tested for each frequency band according to steps 1 to 3 below.

Step 1: The tests of 6.4 should be conducted at the channel that is closest to the center of the transmit frequency band (*f_c*) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom,
- b) all configurations for each device position in (a), e.g. antenna extended and retracted, and
- c) all operational modes for each device position in (a) and configuration in (b) in each frequency band, e.g. analog and digital.

If more than three frequencies need to be tested, (i.e., *N_c* > 3), then all frequencies, configurations and modes must be tested for all of the above positions.

Step 2: For the condition providing highest spatial peak SAR determined in Step 1 conduct all tests of 6.4 at all other test frequencies, e.g. lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the spatial peak SAR value determined in Step 1 is within 3dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak spatial-average SAR found in Steps 1 to 2.

5.6. SAR Scaling Using the Tune-Up Scaling Factor

Conducted output power is tested to check if the EUT is transmitting at the maximum power allowed according to the declared maximum power including tune-up power tolerances. When the conducted output power is less than the maximum output power including tolerance, the measured SAR values are scaled up to the maximum output power including tolerance to ensure all production units are within SAR limits.

The tune-up power scaling factor is a multiplicative factor. The tune-up power scaling factor is calculated as:

$$10^{[(\text{Maximum Output Power Including Tolerance} - \text{Measured Conducted Output Power}) / 10]}$$

Where

Maximum Output Power Including Tolerance: dBm

Measured Conducted Output Power: dBm

Example SAR scaling calculation:


Measured Conducted Output Power (dBm)	Maximum Output Power Including Tolerance (dBm)	Tune-Up Power Scaling Factor	Measured 1g SAR (W/kg)	Scaled/Reported SAR value (W/kg)
32.0	32.5	1.12	1.0	1.12

6. The Measurement System

6.1. Robot system specification

The SAR measurement system being used is the SPEAG DASY5 system, which consists of a Stäubli TX90XL 6-axis robot arm and CS8c controller, SPEAG SAR Probe, Data Acquisition Electronics, and SAM Twin Phantom. The robot is used to articulate the probe to programmed positions inside the phantom to obtain the SAR readings from the EUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

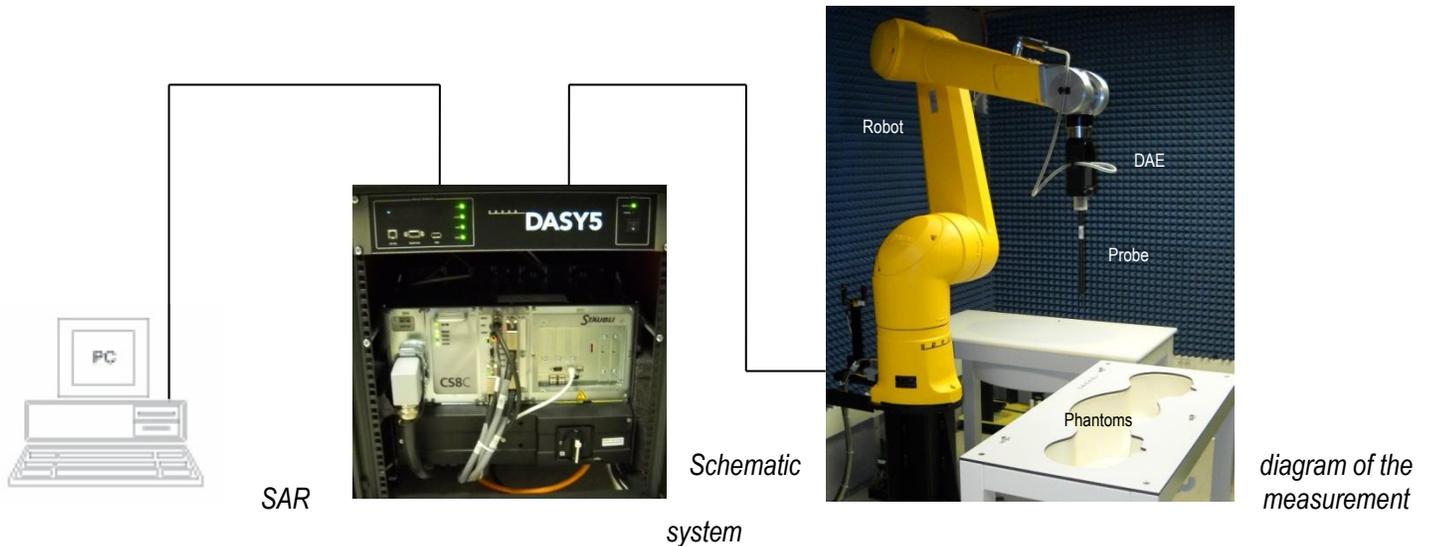

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centered at that point to determine volume averaged SAR level.

Isotropic E-Field Probe for Dosimetric Measurements

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the probe's calibration certificate.

6.2. Data Acquisition Electronics

The DAE contains a signal amplifier, multiplexer, 16bit A/D converter and control logic. It uses an optical link for communication with the DASY5 system. The DAE has a dynamic range of -100 to 300 mV. It also contains a two step probe touch detector for mechanical surface detection and emergency robot stop.

6.3. Phantoms

The Twin SAM V4.0 Phantom is designed to specifications defined in IEEE 1528 and IEC/EN 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. The material shell thickness is 2mm +/- 0.2 mm at the flat section and 6mm +/- 0.2 mm at the ear reference point. The relative permativity is 3.5 +/- 0.5 and the loss tangent is ≤ 0.05 for frequencies ≤ 6 GHz.

Additionally, the Oval Flat ELI V4.0 Phantom is designed to specification defined in IEEE 1528 and IEC/EN 62209-2. It enables the dosimetric evaluation of body mounted usage. The material thickness is 2mm +/- 0.2 mm. For frequencies ≤ 6 GHz, the relative permativity is 4 +/- 1 and the loss tangent is ≤ 0.05 . The bottom plate is 600 x 400 mm elliptical shape with a depth of 190 mm.

6.4. Interpolation and Extrapolation schemes

The interpolation, extrapolation and maximum search routines are all based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. The routines construct a once-continuously differentiable function that interpolates the measurement values.

7. Uncertainty Assessment

The uncertainty budget is included as required by Industry Canada RSS-102.

7.1. Measurement Uncertainty Budget According to IEEE 1528:2013

The uncertainty values for components specified were evaluated according to the procedures of *IEEE 1528-2013*, *NIST 1297 1994 edition* and *ISO Guide to the Expression of Uncertainty in Measurements (GUM)*.

a	b	c	d	e = f(d,k)	f	g	h = c x f / e	i = c x f / e	k
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i (1-g)	c _i (10-g)	1-g u _i (±%)	10-g u _i (±%)	v _i
Measurement System									
Probe Calibration	E2.1	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	E2.2	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E2.2	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	E2.3	2	R	√3	1	1	1.2	1.2	∞
Linearity	E2.4	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limits	E2.4	1	R	√3	1	1	0.6	0.6	∞
Probe Modulation Response	E2.5	2.4	R	√3	1	1	1.4	1.4	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Noise	E6.1	3	R	√3	1	1	1.7	1.7	∞
RF Ambient Reflections	E6.1	3	R	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	√3	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E6.3	6.7	R	√3	1	1	3.9	3.9	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	4	R	√3	1	1	2.3	2.3	∞
Test sample Related									
Test Sample Positioning	E4.2	2.9	N	1	1	1	2.9	2.9	145
Device Holder Uncertainty	E4.1	3.6	N	1	1	1	3.6	3.6	5
Output Power Variation - SAR drift measurement	E2.9	5	R	√3	1	1	2.9	2.9	∞
SAR Power Scaling	E.6.5	0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E3.1	6.6	R	√3	1	1	3.8	3.8	∞
Uncertainty in SAR Correction	E.3.2	1.9	R	√3	1	0.84	1.9	1.6	∞
Liquid Conductivity Target - tolerance	E3.3	2.5	R	√3	0.78	0.71	2.0	1.8	∞
Liquid Permittivity Target tolerance	E3.3	2.5	R	√3	0.26	0.26	0.7	0.7	∞
Liquid Conductivity - Temp uncertainty	E3.4	3.4	N	√3	0.78	0.71	2.7	2.4	∞
Liquid Permittivity - Temp uncertainty	E3.4	0.4	N	√3	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty			RSS				12.7	12.6	748
Expanded Uncertainty (95% CONFIDENCE INTERVAL)			k= 2.00705				25.4	25.2	

7.2. Measurement Uncertainty Budget According to EN 62209-2

A measurement uncertainty assessment has been undertaken following guidance given in IEC/EN-62209-2. Some of the uncertainty contributions are site-specific and, for these, CETECOM, Inc. has assessed the uncertainty contributions arising from local environmental and procedural factors. The resultant uncertainty budget, following the assessment template given IEC/EN-62209-2 is shown below:

Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	c_i (1-g)	c_i (10-g)	1-g u_i (±%)	10-g u_i (±%)	v_i
Measurement System									
Probe Calibration	7.2.2.1	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	7.2.2.2	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	7.2.2.2	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	7.2.2.6	2.0	R	√3	1	1	1.2	1.2	∞
Linearity	7.2.2.3	4.7	R	√3	1	1	2.7	2.7	∞
Probe Modulation Response	7.2.2.4	2.4	R	√3	1	1	1.4	1.4	∞
System Detection Limits	7.2.2.5	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	7.2.2.7	0.3	N	1	1	1	0.3	0.3	∞
Response Time	7.2.2.8	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time	7.2.2.9	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Noise	7.2.4.5	3.0	R	√3	1	1	1.7	1.7	∞
RF Ambient Reflections	7.2.4.5	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	7.2.3.1	0.8	R	√3	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	7.2.3.3	6.7	R	√3	1	1	3.9	3.9	∞
Post Processing	7.2.5	4.0	R	√3	1	1	2.3	2.3	∞
Test sample Related									
Test Sample Positioning	7.2.3.4.3	2.9	N	1	1	1	2.9	2.9	145
Device Holder Uncertainty	7.2.3.4.2	3.6	N	1	1	1	3.6	3.6	5
Power Scaling	L3	0	R	√3	1	1	0.0	0.0	∞
Output Power Variation - SAR drift measurement	7.2.2.10	5.0	R	√3	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	7.2.3.2	7.9	R	√3	1	1	4.6	4.6	∞
Algorithm for correcting SAR for deviations in permittivity and conductivity	7.2.4.3	1.9	R	√3	1	0.84	1.1	0.9	∞
Liquid Conductivity - measurement uncertainty	7.2.4.3	2.5	R	√3	0.78	0.71	1.1	1.0	∞
Liquid Permittivity - measurement uncertainty	7.2.4.3	2.5	R	√3	0.26	0.26	0.3	0.4	∞
Temperature Uncertainty – Conductivity	7.2.4.4	3.4	R	√3	0.78	0.71	1.5	1.4	∞
Temperature Uncertainty – Permittivity	7.2.4.4	0.4	R	√3	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty			RSS				12.5	12.5	748
Expanded Uncertainty (95% CONFIDENCE INTERVAL)			$k=2.00705$				25.1	25.0	

8. Test results summary

8.1. Measured Conducted Average Output Power

Measurement uncertainty for conducted measurements is ± 0.5 dB

Note the Upper Power Tolerance Limit are derived from the Tune-up procedure of Gemalto M2M Module ELS61-US FCC ID: QIPELS61-US Dated 19th January 2016

WCDMA

Average power measured using a Rhode and Schwarz CMU 200.

Band	Channel	Frequency [MHz]	Average Power [dBm]	Upper Power Tolerance Limit
			12.2kbps RMC	
WCDMA FDD V	4132	826.4	23.19	25.0
	4183	836.6	23.22	25.0
	4233	846.6	23.22	25.0
WCDMA FDD II	9262	1852.4	23.51	25.0
	9400	1880	23.64	25.0
	9538	1907.6	23.57	25.0
WCDMA FDDIV	1312	1712.4	23.43	25.0
	1413	1732.6	23.54	25.0
	1513	1752.6	23.4	25.0

HSDPA

Settings are according to FCC KDB 941225 D01, "SAR Measurement Procedures for 3G Devices" section "Release 5 HSDPA Data Devices"

Average power measured using a Rhode and Schwarz CMU 200. Reference Rhode and Schwarz application note 1CM72: Operation Guide for HSDPA Test Setup according to 3GPP TS 34.121, section 2.2.

Band	Channel	Frequency [MHz]	Average Power [dBm]			
			Sub-test 1	Sub-test 2	Sub-test 3	Sub-test 4
WCDMA FDD V	4132	826.4	23.34	23.18	22.89	22.7
	4183	836.6	23.35	23.25	22.92	22.8
	4233	846.6	23.35	23.32	23.03	22.87
WCDMA FDD II	9262	1852.4	23.51	23.32	23.17	22.84
	9400	1880	23.52	23.34	23.21	22.87
	9538	1907.6	23.49	23.43	23.26	22.95
WCDMA FDDIV	1312	1712.4	23.18	23.13	23.09	22.88
	1413	1732.6	23.23	23.18	23.17	22.91
	1513	1752.6	23.15	23.1	23.1	22.99

HSUPA

Settings are according to FCC KDB 941225 D01, "SAR Measurement Procedures for 3G Devices" section "Release 6 HSPA Data Devices"

Average power measured using a Rhode and Schwarz CMU 200. Reference Rhode and Schwarz application note 1CM73: Operation Guide for HSUPA Test Setup according to 3GPP TS 34.121, section 2.1 and 2.2.

Band	Channel	Frequency [MHz]	Average Power [dBm]				
			Sub-test 1	Sub-test 2	Sub-test 3	Sub-test 4	Sub-test 5
WCDMA FDD V	4132	826.4	22.7	22.89	22.94	22.74	22.28
	4183	836.6	22.79	22.89	22.9	22.9	22.44
	4233	846.6	22.91	22.94	22.63	22.66	22.36
WCDMA FDD II	9262	1852.4	23.3	23.11	22.84	22.59	22.45
	9400	1880	23.33	23.24	23.08	22.88	22.53
	9538	1907.6	23.34	23.32	22.71	22.71	22.51
WCDMA FDDIV	1312	1712.4	23.24	23.28	22.79	22.6	22.37
	1413	1732.6	23.23	23.32	22.93	22.69	22.45
	1513	1752.6	23.16	23.26	22.88	22.91	22.55

LTE – QPSK Modulation

Settings are according to FCC KDB 941225 D05, “SAR for LTE Devices v02r05”. Average power measured using a Rhode and Schwarz CMW 500

Band	BW [MHz]	Channel	Frequency [MHz]	# RB / RB Position						
				100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High
				Average Power [dBm]						
2	20	18700	1860	21.94	22.01	21.76	21.71	22.95	22.63	22.45
		18900	1880	21.96	22.05	21.85	21.88	22.97	22.5	22.33
		19100	1900	21.93	21.99	21.65	21.46	22.58	22.38	22.18
		Factory Upper Tolerance		25						
	15	18675	1857.5	21.82	21.98	21.82	21.7	22.87	22.25	22.2
		18900	1880	21.94	21.99	21.9	21.79	22.88	22.63	22.65
		19125	1902.5	21.86	21.91	21.64	21.62	22.88	22.48	22.48
		Factory Upper Tolerance		25						
	10	18650	1855	21.85	21.93	21.8	21.75	22.7	22.35	22.2
		18900	1880	21.91	21.95	21.9	21.88	22.82	22.66	22.59
		19150	1905	21.66	21.81	21.67	21.64	22.91	22.49	22.39
		Factory Upper Tolerance		25						
	5	18625	1852.5	21.82	21.88	21.9	21.81	22.79	22.78	22.7
		18900	1880	21.87	21.76	21.78	21.79	22.56	22.53	22.45
		19175	1907.5	21.68	21.69	21.64	21.62	22.51	22.44	22.31
		Factory Upper Tolerance		25						
	3	18615	1851.5	21.81	21.84	21.79	21.8	22.56	22.53	22.43
		18900	1880	21.84	21.84	21.79	21.82	22.66	22.67	22.58
		19185	1908.5	21.62	21.59	21.59	21.56	22.53	22.41	22.12
		Factory Upper Tolerance		25						
	1.4	18607	1850.7	21.85	22.48	22.22	22.16	22.41	22.34	22.35
		18900	1880	21.88	22.48	22.22	22.18	22.51	22.48	22.5
		19193	1909.3	21.66	22.23	22.02	21.92	22.38	22.22	22.04
		Factory Upper Tolerance		25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
4	20	20050	1720	23.83	23.96	23.79	23.65	24.8	24.72	24.35	
		20175	1732.5	23.85	23.99	23.79	23.65	24.82	24.74	24.45	
		20300	1745	23.73	23.84	23.66	23.63	24.79	24.41	24.34	
		Factory Upper Tolerance			25						
	15	20025	1717.5	23.9	23.88	23.79	23.76	24.71	24.59	24.32	
		20175	1732.5	23.72	23.94	23.74	23.56	24.73	24.38	24.42	
		20325	1747.5	23.74	23.57	23.78	23.79	24.7	24.44	24.63	
		Factory Upper Tolerance			25						
	10	20000	1715	23.8	23.78	23.7	23.71	24.53	24.33	24.4	
		20175	1732.5	23.82	23.86	23.7	23.66	24.71	24.36	24.37	
		20350	1750	23.78	23.85	23.71	23.78	24.72	24.53	24.73	
		Factory Upper Tolerance			25						
	5	19975	1712.5	23.85	23.89	23.83	23.8	24.82	24.77	24.69	
		20175	1732.5	23.68	23.66	23.6	23.67	24.72	24.68	24.49	
		20375	1752.5	23.74	23.77	23.77	23.76	24.61	24.57	24.41	
		Factory Upper Tolerance			25						
	3	19965	1711.5	23.9	23.91	23.83	23.83	24.78	24.64	24.62	
		20175	1732.5	23.63	23.63	23.61	23.62	24.53	24.46	24.43	
		20385	1753.5	23.75	23.75	23.77	23.71	24.71	24.67	24.6	
		Factory Upper Tolerance			25						
	1.4	19957	1710.7	23.91	24.12	24.09	24.14	24.71	24.59	24.65	
		20175	1732.5	23.93	24.14	23.87	23.94	24.46	24.41	24.46	
		20393	1754.3	23.76	23.96	24.03	24.03	24.64	24.62	24.63	
		Factory Upper Tolerance			25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
5	10	20600	844	23.62	23.78	23.71	23.63	24.36	24.39	24.3	
		20525	836.5	23.65	23.8	23.65	23.63	24.64	24.54	24.46	
		20450	829	23.63	23.76	23.66	23.59	24.62	24.56	24.5	
		Factory Upper Tolerance			25						
	5	20625	846.5	23.77	23.77	23.77	23.73	24.61	24.77	24.6	
		20525	836.5	23.86	23.78	23.71	23.66	24.81	24.79	24.78	
		20425	826.5	23.84	23.72	23.7	23.72	24.8	24.79	24.66	
		Factory Upper Tolerance			25						
	3	20635	847.5	23.74	23.75	23.73	23.66	24.36	24.53	24.52	
		20525	836.5	23.76	23.77	23.71	23.67	24.76	24.73	24.57	
		20415	825.5	23.68	23.66	23.64	23.64	24.63	24.66	24.62	
		Factory Upper Tolerance			25						
	1.4	20643	848.3	23.72	24.13	24.11	24.11	24.35	24.38	24.36	
		20525	836.5	23.74	24.13	24.12	24.11	24.4	24.34	24.37	
		20407	824.7	23.53	23.84	23.86	23.87	24.18	24.1	24.19	
		Factory Upper Tolerance			25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
12	10	23060	704	22.87	22.97	22.93	22.85	23.48	23.4	23.26	
		23099	707.5	22.95	22.97	22.96	22.87	23.67	23.55	23.45	
		23130	711	22.54	22.58	22.53	22.5	23.23	23.16	23.16	
		Factory Upper Tolerance			25						
	5	23035	701.5	22.74	22.82	22.8	22.76	23.5	23.45	23.4	
		23095	707.5	22.85	22.84	22.79	22.8	23.76	23.72	23.25	
		23155	713.5	22.61	22.53	22.56	22.59	23.18	23.27	23.24	
		Factory Upper Tolerance			25						
	3	23025	700.5	22.64	22.57	22.55	22.52	23.36	23.35	23.28	
		23095	707.5	22.66	22.62	22.56	22.56	23.39	23.38	23.27	
		23165	714.5	22.61	22.57	22.59	22.52	23.2	23.27	23.28	
		Factory Upper Tolerance			25						
	1.4	23017	699.7	22.78	22.97	22.98	23.02	23.31	23.25	23.23	
		23095	707.5	22.76	23.04	23.02	22.99	23.33	23.28	23.25	
		23173	715.3	22.57	22.98	22.99	22.98	23.18	23.26	23.29	
		Factory Upper Tolerance			25						

LTE – 16QAM Modulation

Settings are according to FCC KDB 941225 D05, “SAR for LTE Devices v02r05”. Average power measured using a Rhode and Schwarz CMW 500

Band	BW [MHz]	Channel	Frequency [MHz]	# RB / RB Position						
				100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High
				Average Power [dBm]						
2	20	18700	1860	21.93	21.96	21.75	21.7	22.58	22.58	22.48
		18900	1880	21.94	22.04	21.89	21.74	22.72	22.48	22.33
		19100	1900	21.92	21.91	21.7	21.61	22.57	22.38	22.21
		Factory Upper Tolerance		25						
	15	18675	1857.5	21.9	22.07	21.81	21.7	22.86	22.21	22.2
		18900	1880	21.97	22.09	21.89	21.84	23.09	22.61	22.64
		19125	1902.5	21.84	21.91	21.69	21.66	22.98	22.46	22.42
		Factory Upper Tolerance		25						
	10	18650	1855	21.88	21.91	21.79	21.75	22.68	22.41	22.2
		18900	1880	21.89	21.99	21.88	21.87	22.85	22.65	22.64
		19150	1905	21.71	21.87	21.66	21.63	22.73	22.53	22.39
		Factory Upper Tolerance		25						
	5	18625	1852.5	21.87	21.71	21.65	21.63	22.59	22.55	22.41
		18900	1880	21.88	21.81	21.77	21.78	22.62	22.59	22.45
		19175	1907.5	21.67	21.69	21.63	21.62	22.49	22.44	22.31
		Factory Upper Tolerance		25						
	3	18615	1851.5	21.79	21.83	21.78	21.8	22.55	22.46	22.37
		18900	1880	21.89	21.83	21.79	21.81	22.65	22.66	22.64
		19185	1908.5	21.62	21.65	21.6	21.55	22.51	22.41	22.37
		Factory Upper Tolerance		25						
	1.4	18607	1850.7	21.77	21.93	21.84	21.78	22.44	22.36	22.44
		18900	1880	21.87	21.95	21.85	21.79	22.73	22.56	22.71
		19193	1909.3	21.6	21.85	21.66	21.53	22.4	22.31	22.44
		Factory Upper Tolerance		25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
4	20	20050	1720	23.71	24.04	23.72	23.64	24.96	24.7	24.39	
		20175	1732.5	23.77	24.05	23.71	23.58	24.98	24.56	24.36	
		20300	1745	23.72	23.84	23.59	23.62	24.78	24.4	24.39	
		Factory Upper Tolerance			25						
	15	20025	1717.5	23.7	23.83	23.85	23.75	24.85	24.38	24.37	
		20175	1732.5	23.75	23.93	23.8	23.61	24.87	24.38	24.21	
		20325	1747.5	23.74	23.9	23.77	23.78	24.82	24.43	24.55	
		Factory Upper Tolerance			25						
	10	20000	1715	23.77	23.83	23.62	23.7	24.52	24.32	24.39	
		20175	1732.5	23.78	23.85	23.71	23.59	24.68	24.46	24.43	
		20350	1750	23.78	23.78	23.71	23.78	24.67	24.53	24.53	
		Factory Upper Tolerance			25						
	5	19975	1712.5	23.65	23.83	23.82	23.77	24.81	24.76	24.68	
		20175	1732.5	23.67	23.84	23.69	23.6	24.83	24.75	24.61	
		20375	1752.5	23.61	23.77	23.71	23.75	24.6	24.5	24.41	
		Factory Upper Tolerance			25						
	3	19965	1711.5	23.82	23.69	23.7	23.72	24.72	24.7	24.61	
		20175	1732.5	23.86	23.76	23.69	23.61	24.72	24.59	24.53	
		20385	1753.5	23.81	23.74	23.61	23.59	24.64	24.6	24.59	
		Factory Upper Tolerance			25						
	1.4	19957	1710.7	23.89	24.06	24.02	24.06	24.64	24.58	24.56	
		20175	1732.5	23.9	24.19	24.17	24.14	24.69	24.57	24.51	
		20393	1754.3	23.88	24.19	24.19	24.16	24.66	24.58	24.67	
		Factory Upper Tolerance			25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
5	10	20600	844	23.68	23.72	23.71	23.63	24.42	24.33	24.35	
		20525	836.5	23.69	23.77	23.65	23.63	24.66	24.57	24.53	
		20450	829	23.67	23.75	23.66	23.73	24.66	24.63	24.55	
		Factory Upper Tolerance			25						
	5	20625	846.5	23.8	23.76	23.76	23.78	24.57	24.47	24.49	
		20525	836.5	23.8	23.78	23.7	23.72	24.81	24.75	24.72	
		20425	826.5	23.72	23.74	23.69	23.72	24.66	24.64	24.63	
		Factory Upper Tolerance			25						
	3	20635	847.5	23.73	23.79	23.79	23.78	24.42	24.52	24.5	
		20525	836.5	23.75	23.81	23.8	23.72	24.6	24.52	24.53	
		20415	825.5	23.67	23.76	23.74	23.73	24.76	24.71	24.7	
		Factory Upper Tolerance			25						
	1.4	20643	848.3	23.63	24.26	24.22	24.2	24.67	24.59	24.66	
		20525	836.5	23.64	24.28	24.22	24.15	24.68	24.63	24.59	
		20407	824.7	23.54	23.94	23.87	24.17	24.45	24.38	24.4	
		Factory Upper Tolerance			25						

Band	BW [MHz]	Channel	Frequency [MHz]	100% / Low	50% / Low	50% / Mid	50% / High	1 / Low	1 / Mid	1 / High	
12	10	23060	704	22.61	22.74	22.73	22.65	23.22	23.26	23.19	
		23099	707.5	22.64	22.76	22.66	22.57	23.47	23.35	23.44	
		23130	711	22.34	22.32	22.33	22.29	23.04	23.1	23.13	
		Factory Upper Tolerance			25						
	5	23035	701.5	22.51	22.56	22.49	22.51	23.24	23.46	23.39	
		23095	707.5	22.7	22.64	22.6	22.54	23.51	23.42	23.25	
		23155	713.5	22.41	22.34	22.35	22.38	22.93	23.07	23.22	
		Factory Upper Tolerance			25						
	3	23025	700.5	22.63	22.46	22.34	22.32	23.09	23.06	23.12	
		23095	707.5	22.63	22.47	22.36	22.36	23.14	23.02	23.13	
		23165	714.5	22.54	22.42	22.46	22.42	23.12	23.08	23.06	
		Factory Upper Tolerance			25						
	1.4	23017	699.7	22.5	23.16	23.22	23.2	23.34	23.29	23.24	
		23095	707.5	22.5	23.24	23.2	23.2	23.41	23.12	23.03	
		23173	715.3	22.32	22.66	22.8	22.81	23.02	22.98	22.96	
		Factory Upper Tolerance			25						

8.2. Stand-Alone SAR Evaluation Exclusion

Antenna	Operation Mode	SAR Evaluation Exclusion Reason
Cellular	HSDPA/ HSPA/ HSPA+	Using KDB 941225 D01, section 2.1 / Section 4.1 WCDMA, Rel. 99 is the primary mode and HSDPA, HSPA, and HSPA+ are the secondary modes. SAR evaluation is not required when the maximum output power and tune-up tolerance for the secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode.
Cellular	LTE 16QAM	Using KDB 941225 D05 SAR for LTE Devices v02r05, section 5.2.4 SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

8.3. Test Positions and Configurations

Exposure Condition	Distance	Position	Positioning Setup Photo (Appendix B)
Body SAR	20 mm	Side	Photo1
	0 mm	Top	Photo 2
	0 mm	Back with Pouch	Photo 3

High and low channels are evaluated for the worst case positions at least once for each exposure condition regardless of the SAR value on the middle channel, according to guidance in Industry Canada Notice 2012-DRS1203. FCC only requires high and low channels be evaluated when the SAR value on the middle channel is less than 3 dB below the limit.

Measured SAR values are scaled up to the manufacturer's stated output power. These SAR values are the reported SAR values as described in FCC KDB 447498.

8.4. SAR Results for Body

Band	Operation Mode	Ch #	Freq.	Position / Distance mm	Measured SAR	Tune Up Power Scaling Factor ¹	Power Drift	Reported SAR	Results (Appendix A)
			(MHz)		1g (W/kg)		(dB)	1g (W/kg)	
FDD II	12.2kbps RMC	9400	1880	Left Side / 20	0.189	1.37	0.04	0.26	Plot 1
FDD II	12.2kbps RMC	9400	1880	Top Edge/ 0mm	0.581	1.37	-0.02	0.80	Plot 2
FDD II	12.2kbps RMC	9400	1880	Back Side / 0mm	0.165	1.37	-0.04	0.23	Plot 3
FDD IV	12.2kbps RMC	1413	1732.6	Left Side / 20	0.122	1.4	-0.14	0.17	Plot 4
FDD IV	12.2kbps RMC	1413	1732.6	Top Edge/ 0mm	0.361	1.4	0.07	0.51	Plot 5
FDD IV	12.2kbps RMC	1413	1732.6	Back Side / 0mm	0.108	1.4	-0.12	0.15	Plot 6
FDD V	12.2kbps RMC	4183	836.6	Left Side / 20	0.378	1.5	0.01	0.57	Plot 7
FDD V	12.2kbps RMC	4183	836.6	Back Side / 0mm	0.0653	1.5	-0.06	0.10	Plot 8
FDD V	12.2kbps RMC	4183	836.6	Top Edge/ 0mm	0.341	1.5	0.14	0.51	Plot 9
LTE 2 (20 MHz BW)	1 RB / Loc 0	18900	1880	Left Side / 20	0.174	1.6	-0.08	0.28	Plot 10
LTE 2 (20 MHz BW)	1 RB / Loc 0	18900	1880	Top Edge/ 0mm	0.712	1.6	0.03	1.14	Plot 11
LTE 2 (20 MHz BW)	1 RB / Loc 0	18900	1880	Back Side / 0mm	0.138	1.6	0.14	0.22	Plot 12
LTE 2 (20 MHz BW)	50% RB / Loc 0	18900	1880	Left Side / 20	0.135	1.6	0.01	0.22	Plot 13
LTE 2 (20 MHz BW)	50% RB / Loc 0	18900	1880	Top Edge/ 0mm	0.448	1.6	-0.14	0.72	Plot 14
LTE 2 (20 MHz BW)	50% RB / Loc 0	18900	1880	Back Side / 0mm	0.119	1.6	0.14	0.19	Plot 15
LTE 2 (20 MHz BW)	1 RB / Loc 0	18700	1860	Top Edge/ 0mm	0.627	1.6	-0.12	1.00	Plot 16
LTE 2 (20 MHz BW)	1 RB / Loc 0	19100	1900	Top Edge/ 0mm	0.813	1.6	-0.17	1.30	Plot 17
LTE 2 (20 MHz BW)	1 RB / Loc 0	19100	1900	Top Edge/ 0mm	0.828	1.6	-0.2	1.32	Plot 18
LTE 2 (20 MHz BW)	100 RB / Loc 0	18900	1880	Top Edge/ 0mm	0.594	1.6	-0.18	0.95	Plot 19
LTE 4 (20 MHz BW)	1 RB / Loc 0	20175	1732.5	Left Side / 20	0.098	1.04	-0.2	0.10	Plot 20
LTE 4 (20 MHz BW)	1 RB / Loc 0	20175	1732.5	Top Edge/ 0mm	0.377	1.04	0.03	0.39	Plot 21
LTE 4 (20 MHz BW)	1 RB / Loc 0	20175	1732.5	Back Side / 0mm	0.091	1.04	-0.16	0.09	Plot 22
LTE 4 (20 MHz BW)	50% RB / Loc 0	20175	1732.5	Left Side / 20	0.078	1.04	-0.07	0.08	Plot 23
LTE 4 (20 MHz BW)	50% RB / Loc 0	20175	1732.5	Top Edge/ 0mm	0.311	1.04	-0.01	0.32	Plot 24

LTE 4 (20 MHz BW)	50% RB / Loc 0	20175	1732.5	Back Side / 0mm	0.0681	1.04	-0.13	0.07	Plot 25
LTE 5 (10 MHz BW)	1 RB / Loc 0	20525	836.5	Left Side / 20	0.354	1.09	-0.10	0.39	Plot 26
LTE 5 (10 MHz BW)	1 RB / Loc 0	20525	836.5	Top Edge/ 0mm	0.315	1.09	-0.02	0.34	Plot 27
LTE 5 (10 MHz BW)	1 RB / Loc 0	20525	836.5	Back Side / 0mm	0.314	1.09	-0.01	0.34	Plot 28
LTE 5 (10 MHz BW)	50% RB / Loc 0	20525	836.5	Left Side / 20	0.281	1.09	0.00	0.31	Plot 29
LTE 5 (10 MHz BW)	50% RB / Loc 0	20525	836.5	Top Edge/ 0mm	0.252	1.09	-0.04	0.27	Plot 30
LTE 5 (10 MHz BW)	50% RB / Loc 0	20525	836.5	Back Side / 0mm	0.248	1.09	0.03	0.27	Plot 31
LTE 12 (10 MHz BW)	1 RB / Loc 0	23099	707.5	Left Side / 20	0.242	1.36	0.1	0.33	Plot 32
LTE 12 (10 MHz BW)	1 RB / Loc 0	23099	707.5	Top Edge/ 0mm	0.167	1.36	0.05	0.23	Plot 33
LTE 12 (10 MHz BW)	1 RB / Loc 0	23099	707.5	Back Side / 0mm	0.0546	1.36	-0.07	0.07	Plot 34
LTE 12 (10 MHz BW)	50% RB / Loc 0	23099	707.5	Left Side / 20	0.224	1.36	0.02	0.30	Plot 35
LTE 12 (10 MHz BW)	50% RB / Loc 0	23099	707.5	Top Edge/ 0mm	0.155	1.36	0.02	0.21	Plot 36
LTE 12 (10 MHz BW)	50% RB / Loc 0	23099	707.5	Back Side / 0mm	0.0457	1.36	-0.07	0.06	Plot 37

Notes:

1. The tune up power scaling factor is a multiplicative factor. See section 5.6 of this report for more details.

8.5. SAR Measurement Variability

SAR measurement variability is assessed when the initial measured 1g SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to affirm that the results are not expected to have substitution variations. A second repeated measurement is required only if the measured results for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%. Measures SAR values were below 0.8 so SAR variability test were not applicable.

8.1. SAR Measurement Variability

SAR measurement variability is assessed when the initial measured 1g SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to affirm that the results are not expected to have substitution variations. A second repeated measurement is required only if the measured results for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%.

Band	Operation Mode	Frequency (MHz)	Position	Measured 1g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio of max SAR from repeated and initial measurement
LTE 2	1 RB / Loc 0	1900	Top / 0mm	0.813	0.828	+ 1.84%

8.2. Dipole verification

Prior to formal testing at each frequency band, system verification was performed in accordance with IEEE 1528 and IEC 62209-1/2. The 1 Watt reference SAR value is taken from the SPEAG dipole calibration report. All of the testing described in this report was performed within 24 hours of the system verification. The following results were obtained:

Date	Liquid Type	Frequency (MHz)	CW input at dipole feed (Watts)	1g SAR (W/kg) ¹	1 Watt reference SAR value (W/kg)	Difference reference SAR value to normalized SAR	Results (Appendix A)
8/9/2016	MSL	1900	1	35.8	38.8	-7.7%	Plot 38
8/8/2016	MSL	1900	1	35.5	38.8	-8.5%	Plot 39
8/16/2016	MSL	1900	1	35	38.8	-9.8%	Plot 40
8/18/2016	MSL	1750	1	34.2	36.7	-6.8%	Plot 41
8/19/2016	MSL	900	1	9.27	9.45	-1.9%	Plot 42
8/22/2016	MSL	750	1	8.4	8.57	-2.0%	Plot 43
9/14/2016	MSL	1900	1	36.5	38.8	-5.9%	Plot 44
9/15/2016	MSL	1900	1	38.6	38.8	-0.5%	Plot 45

Note: Verification performed with 100 mW (20 dBm) input power to the dipole. The measured SAR values are scaled to 1 W (30 dBm)

9. References

1. [IEEE 1999] IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., December 1998.
2. [IEEE 2013] IEEE Std 1528-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques. Inst. of Electrical and Electronics Engineers, Inc., June 2013.
3. [NIST 1994] NIST: Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results, Technical Note 1297 (TN1297), United States Department of Commerce Technology Administration, National Institute of Standards and Technology, September 1994.
4. [FCC 20XX] Various FCC KDB Publications,
< <http://transition.fcc.gov/oet/ea/eameasurements.html#sar> >
5. [IC 2015] Safety Code 6: Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz
6. [IC 2010] RSS-102: Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands), Industry Canada, Issue 5, March 2015.
7. [IC 2012] Notice 2012-DRS1203: RE: APPLICABILITY OF LATEST FCC RF EXPOSURE KDB PROCEDURES (PUBLICATION DATE: OCTOBER 24, 2012) AND OTHER PROCEDURES, Industry Canada, December 2012
8. EN 62209-2:2010, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

10. Report History

Date	Report Name	Changes to Report	Report prepared by
2016-09-16	CONNE-051-16001-SAR-FCC	First Version	James Donnellan
2016-10-20	CONNE-051-16001-SAR-FCC-Rev1	Updated Comments in 8.1, 8.2 for LTE and 8.4 Band 5, 12 Operating mode description.	James Donnellan