





5.5.6 LTE Band 25


| LTE Band 25 | | | |
|-------------|------------|----------------|--------|
| Bandwidth | Modulation | Bandwidth(MHz) | |
| | | 99% Power | -26dBc |
| 1.4MHz | QPSK | 1.12 | 1.34 |
| | 16QAM | 0.95 | 1.17 |
| 3MHz | QPSK | 1.13 | 1.39 |
| | 16QAM | 0.96 | 1.18 |
| 5MHz | QPSK | 1.13 | 1.36 |
| | 16QAM | 0.96 | 1.18 |
| 10MHz | QPSK | 1.13 | 1.36 |
| | 16QAM | 0.96 | 1.29 |
| 15MHz | QPSK | 1.13 | 1.41 |
| | 16QAM | 1.01 | 1.47 |
| 20MHz | QPSK | 1.12 | 1.41 |
| | 16QAM | 1.03 | 1.44 |

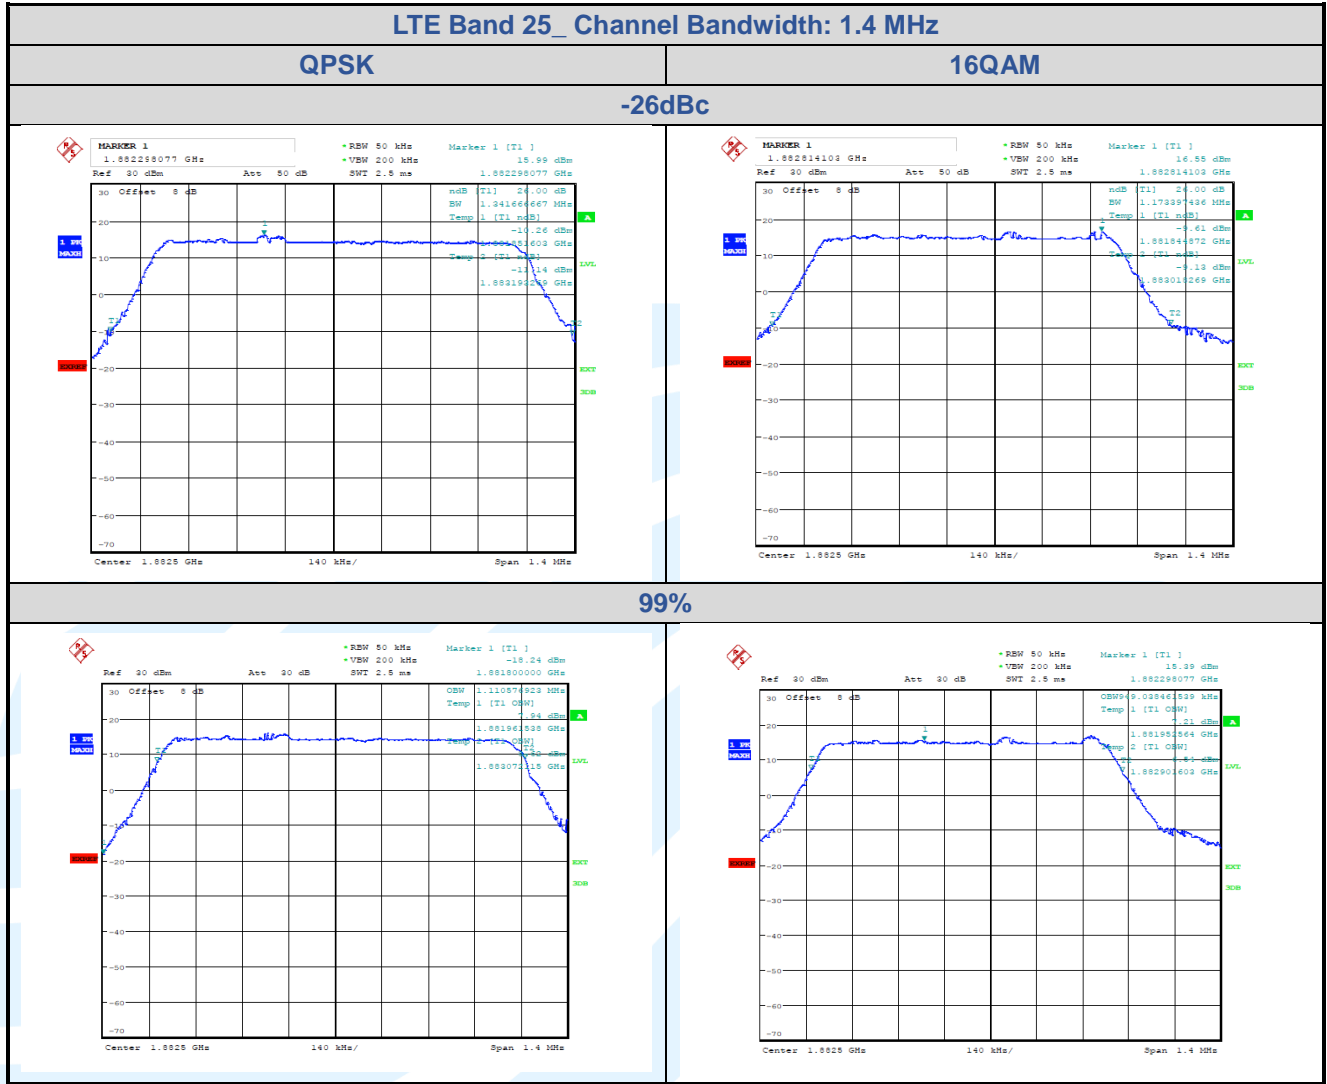


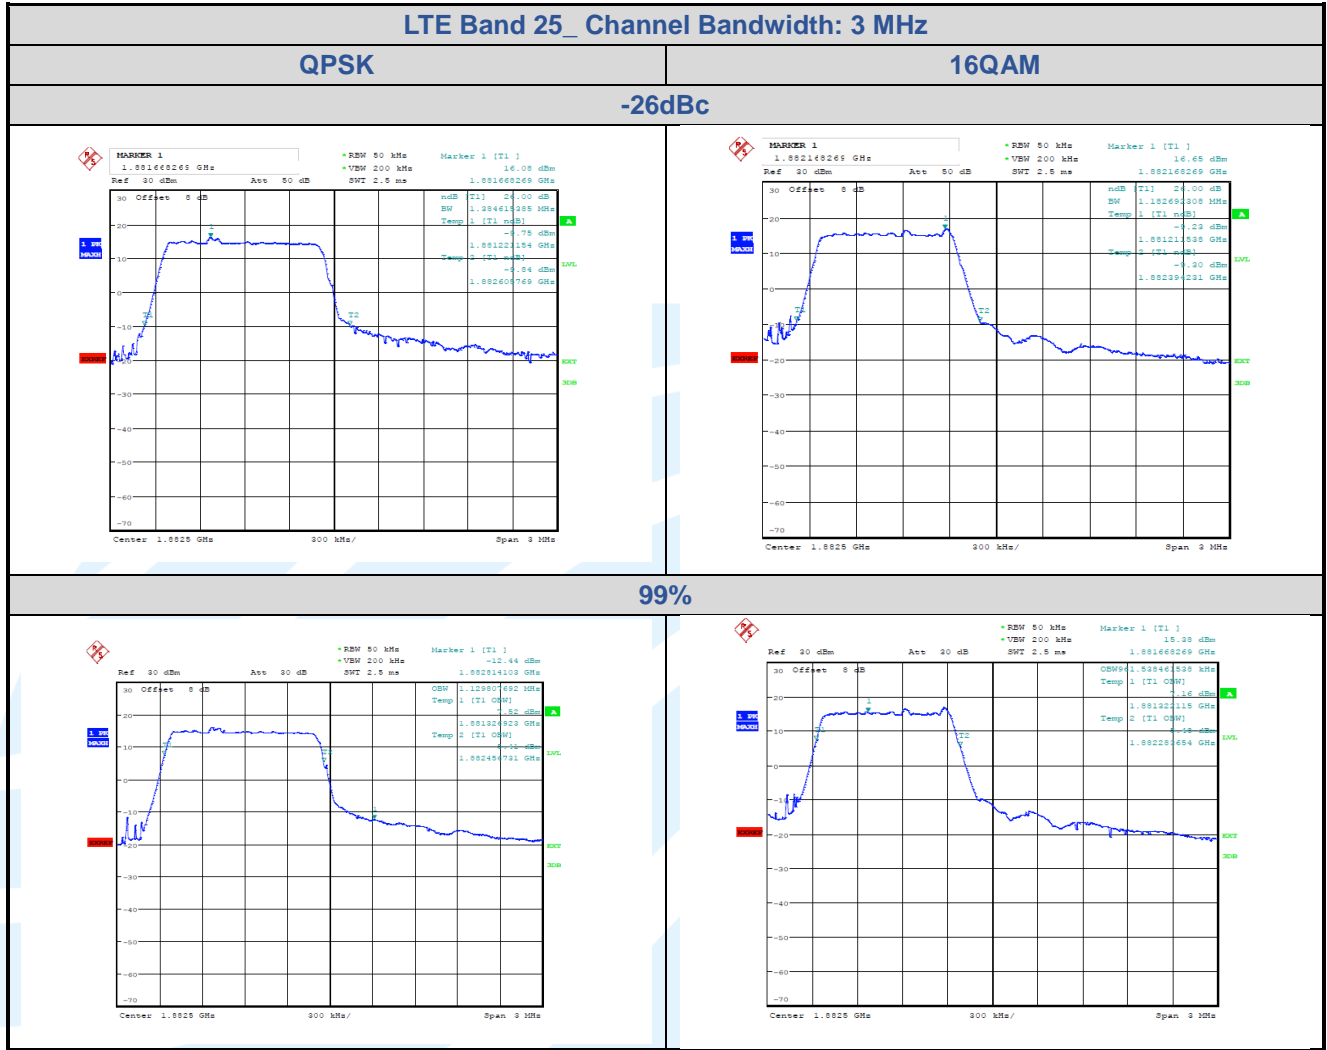

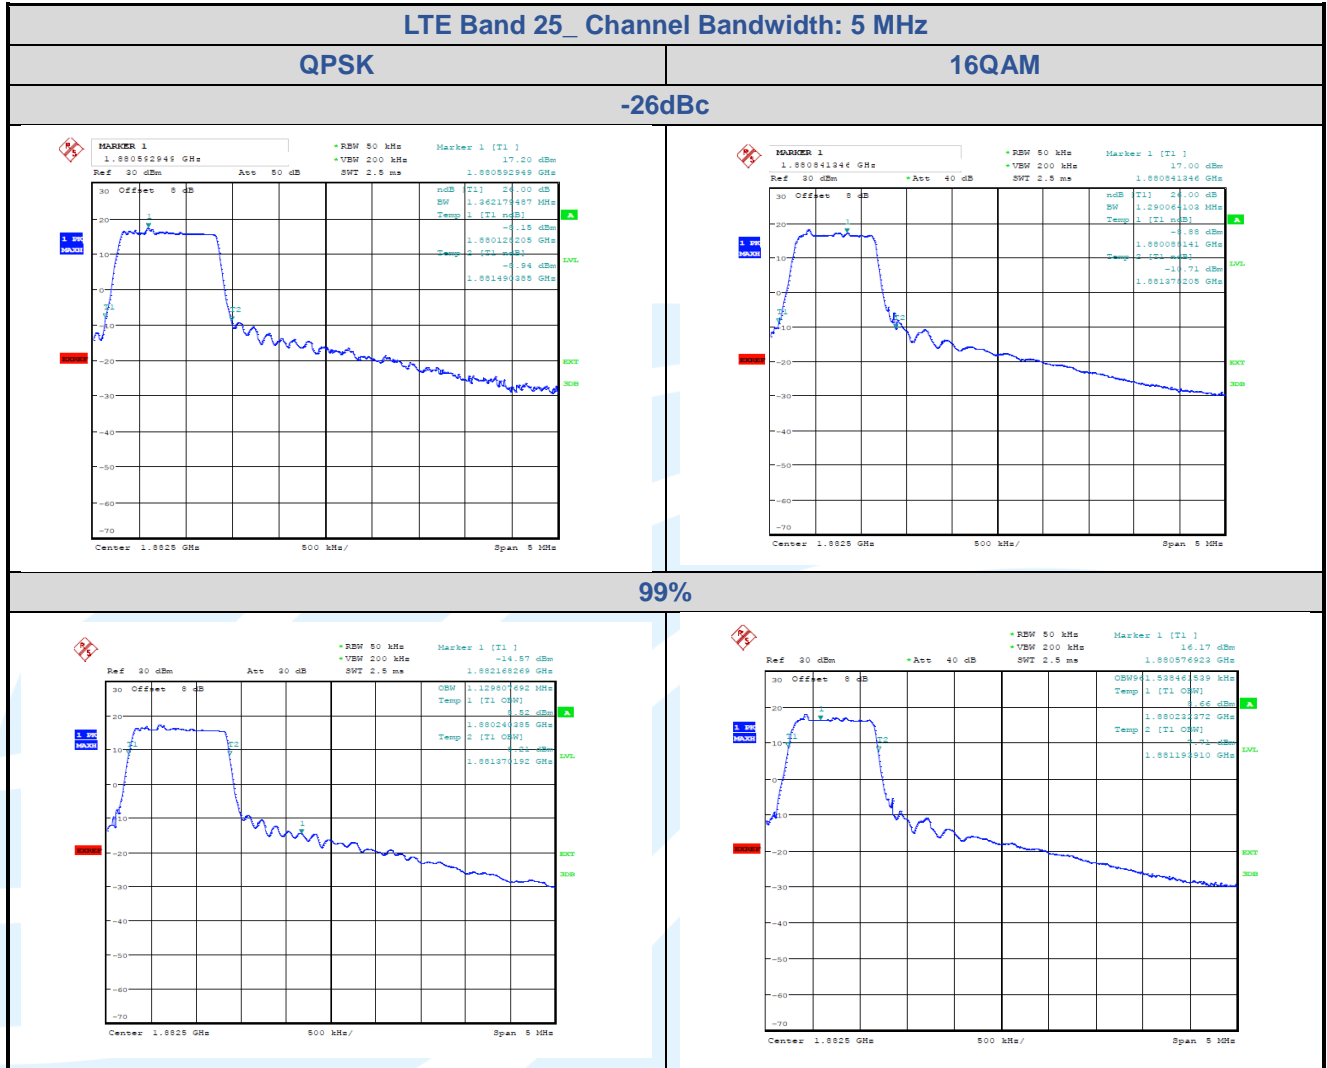

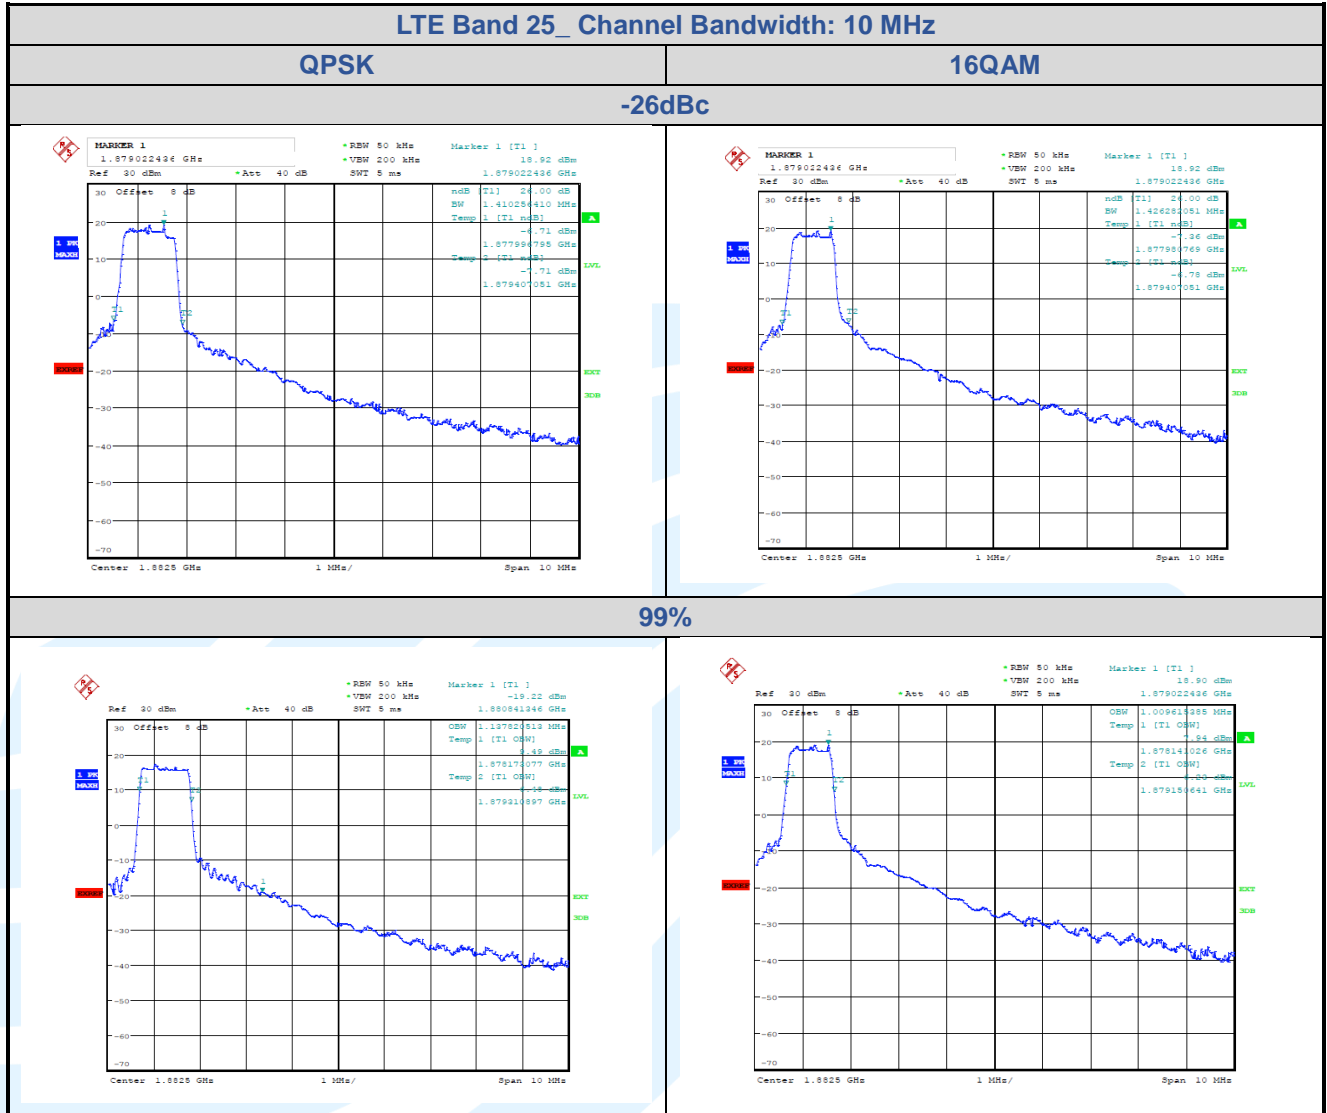


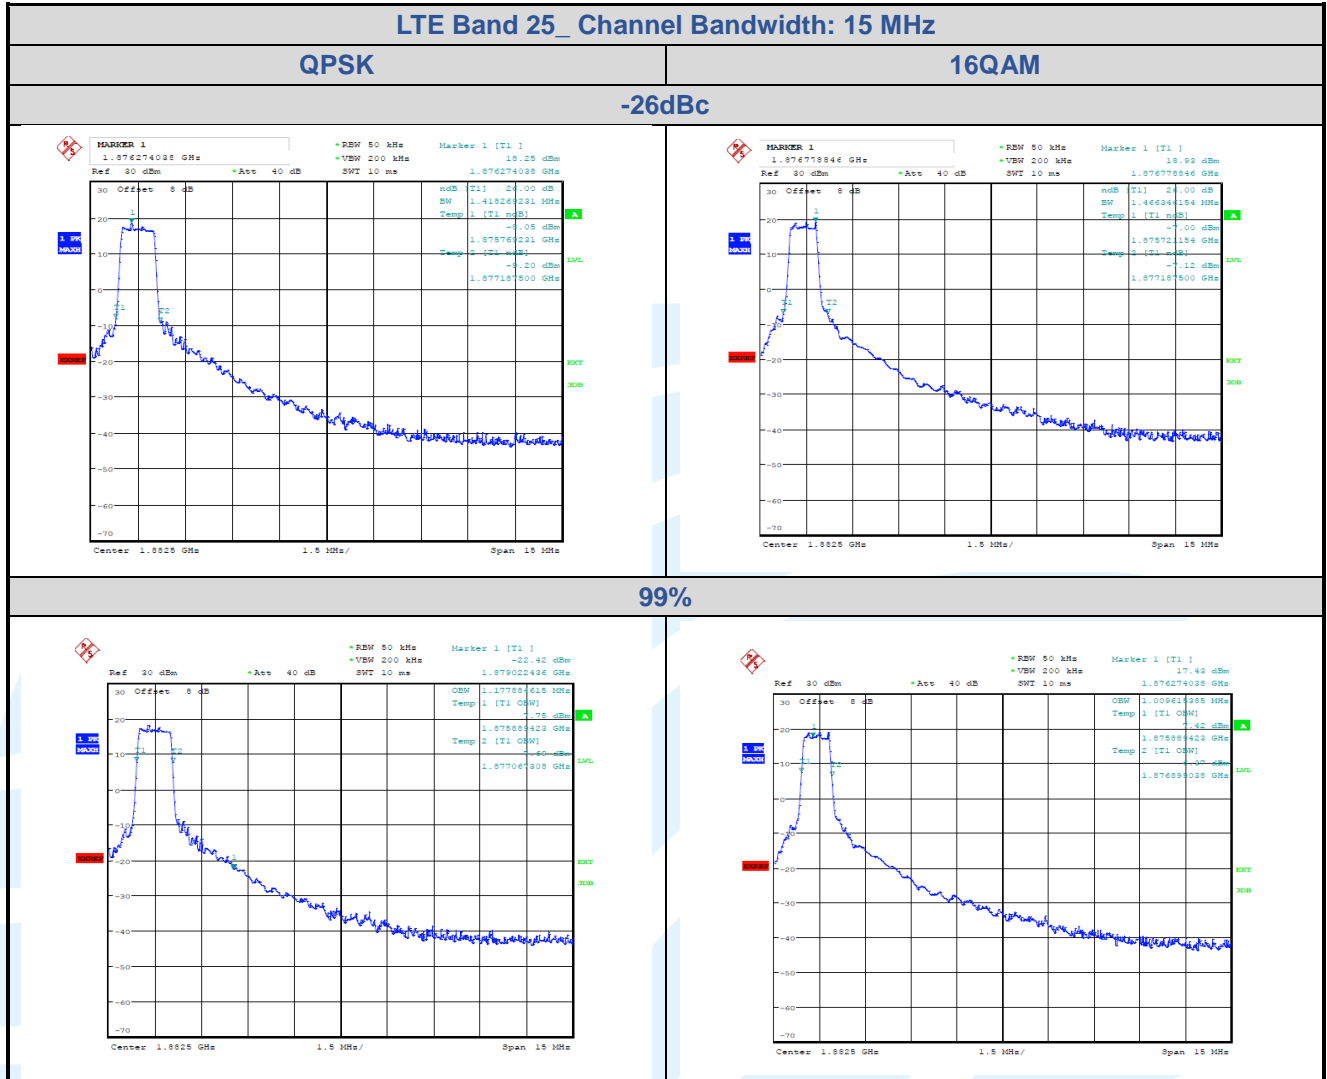


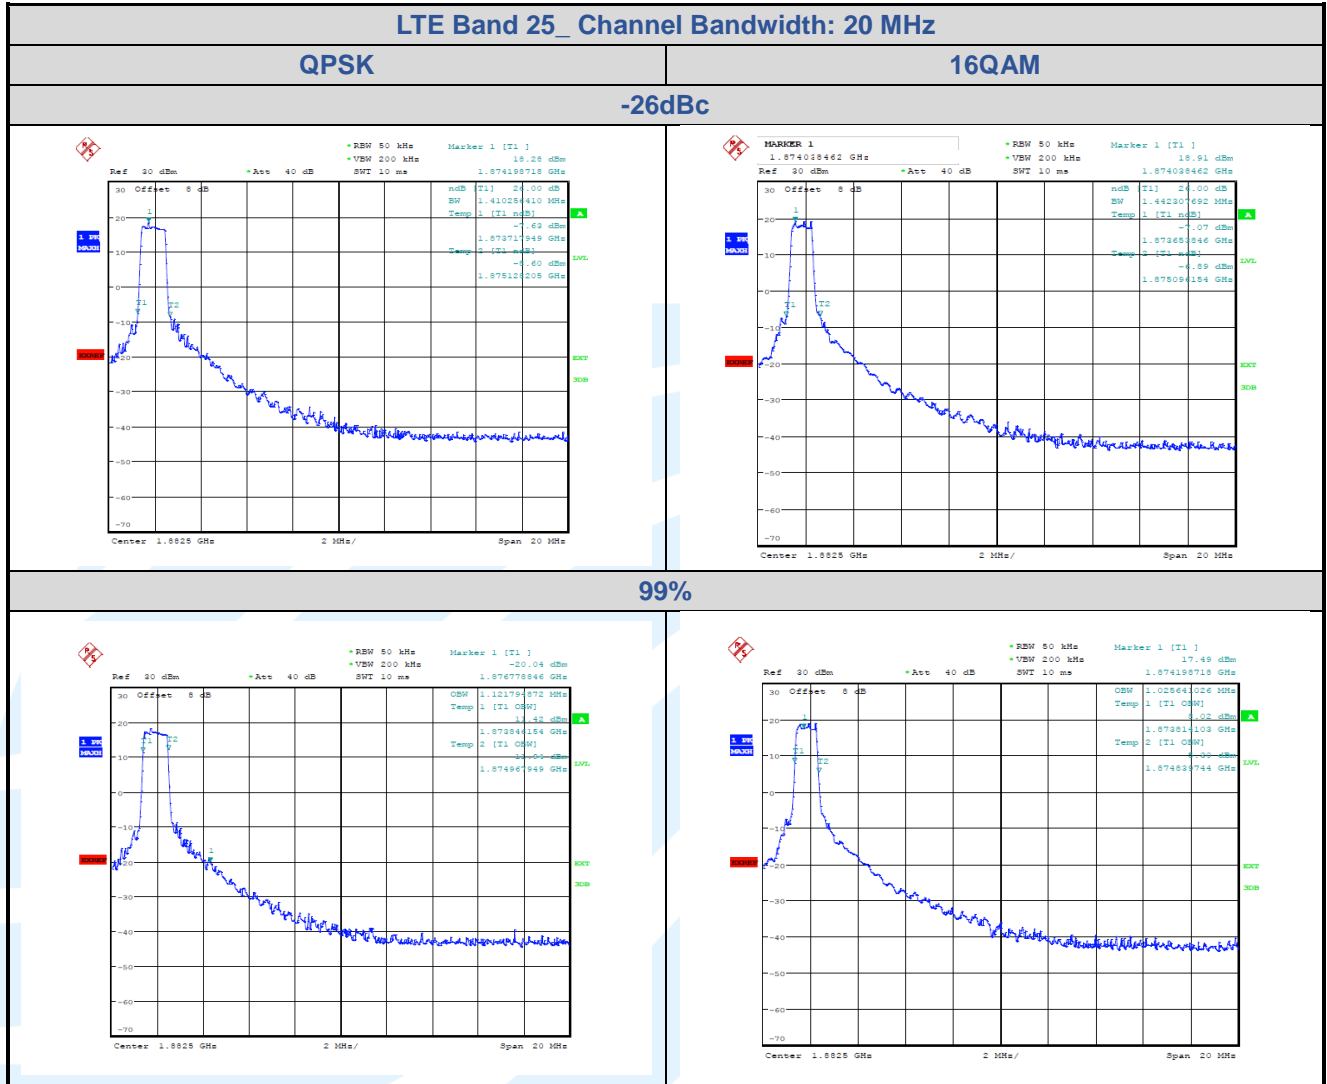



5.5.7 LTE Band 26


| LTE Band 26 | | | |
|-------------|------------|----------------|--------|
| Bandwidth | Modulation | Bandwidth(MHz) | |
| | | 99% Power | -26dBc |
| 1.4MHz | QPSK | 1.12 | 1.33 |
| | 16QAM | 0.96 | 1.20 |
| 3MHz | QPSK | 1.12 | 1.38 |
| | 16QAM | 0.95 | 1.20 |
| 5MHz | QPSK | 1.13 | 1.35 |
| | 16QAM | 0.97 | 1.23 |
| 10MHz | QPSK | 1.12 | 1.33 |
| | 16QAM | 0.98 | 1.35 |
| 15MHz | QPSK | 1.15 | 1.39 |
| | 16QAM | 0.99 | 1.42 |

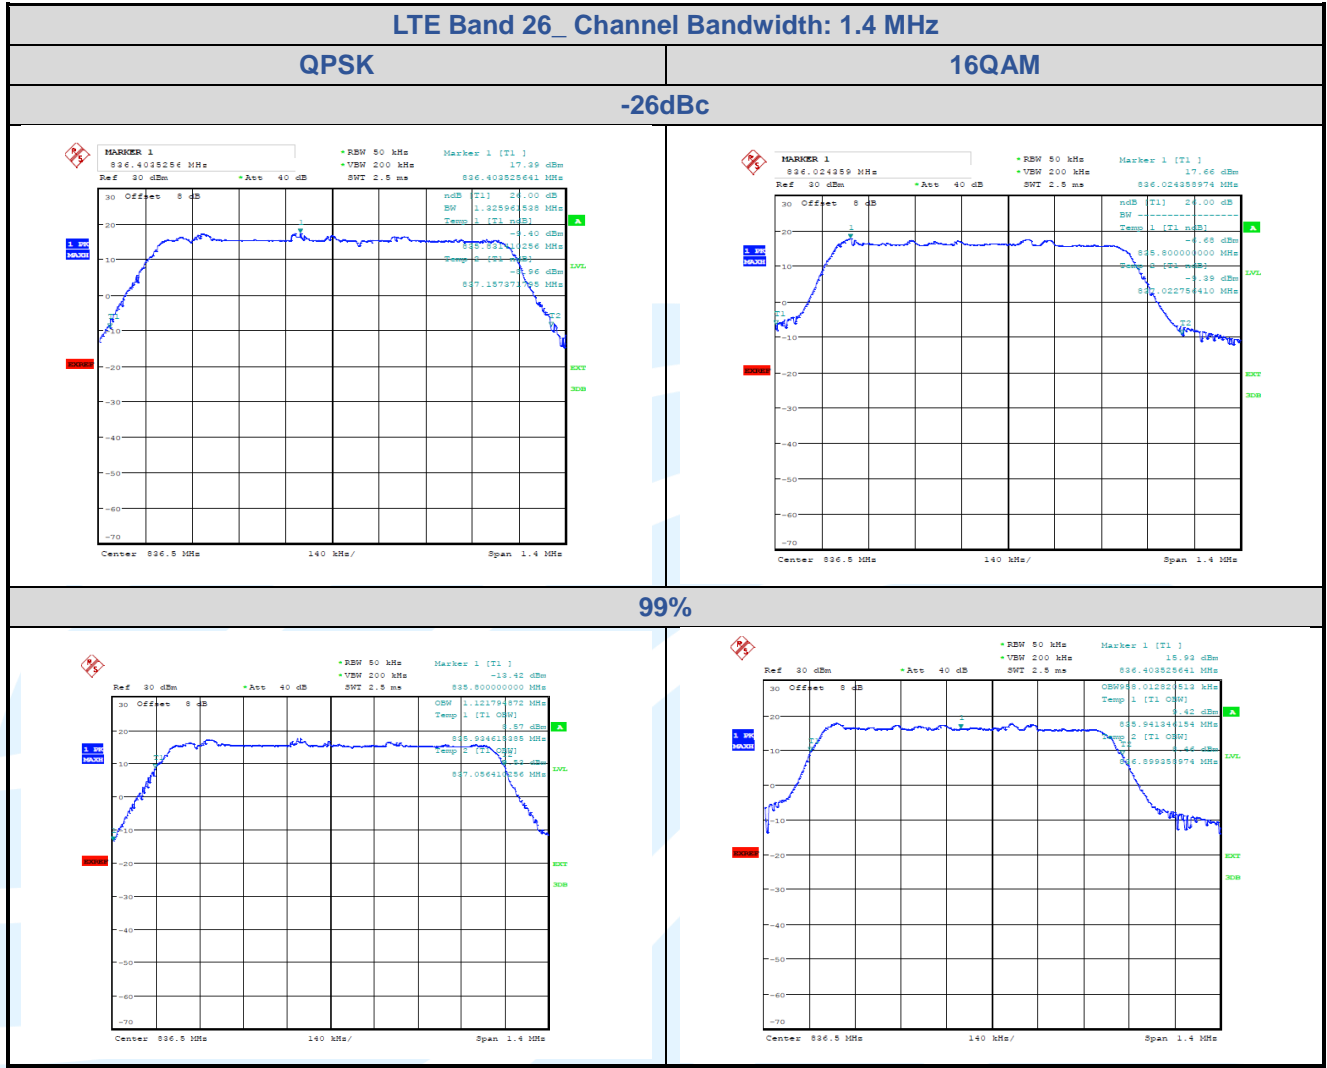

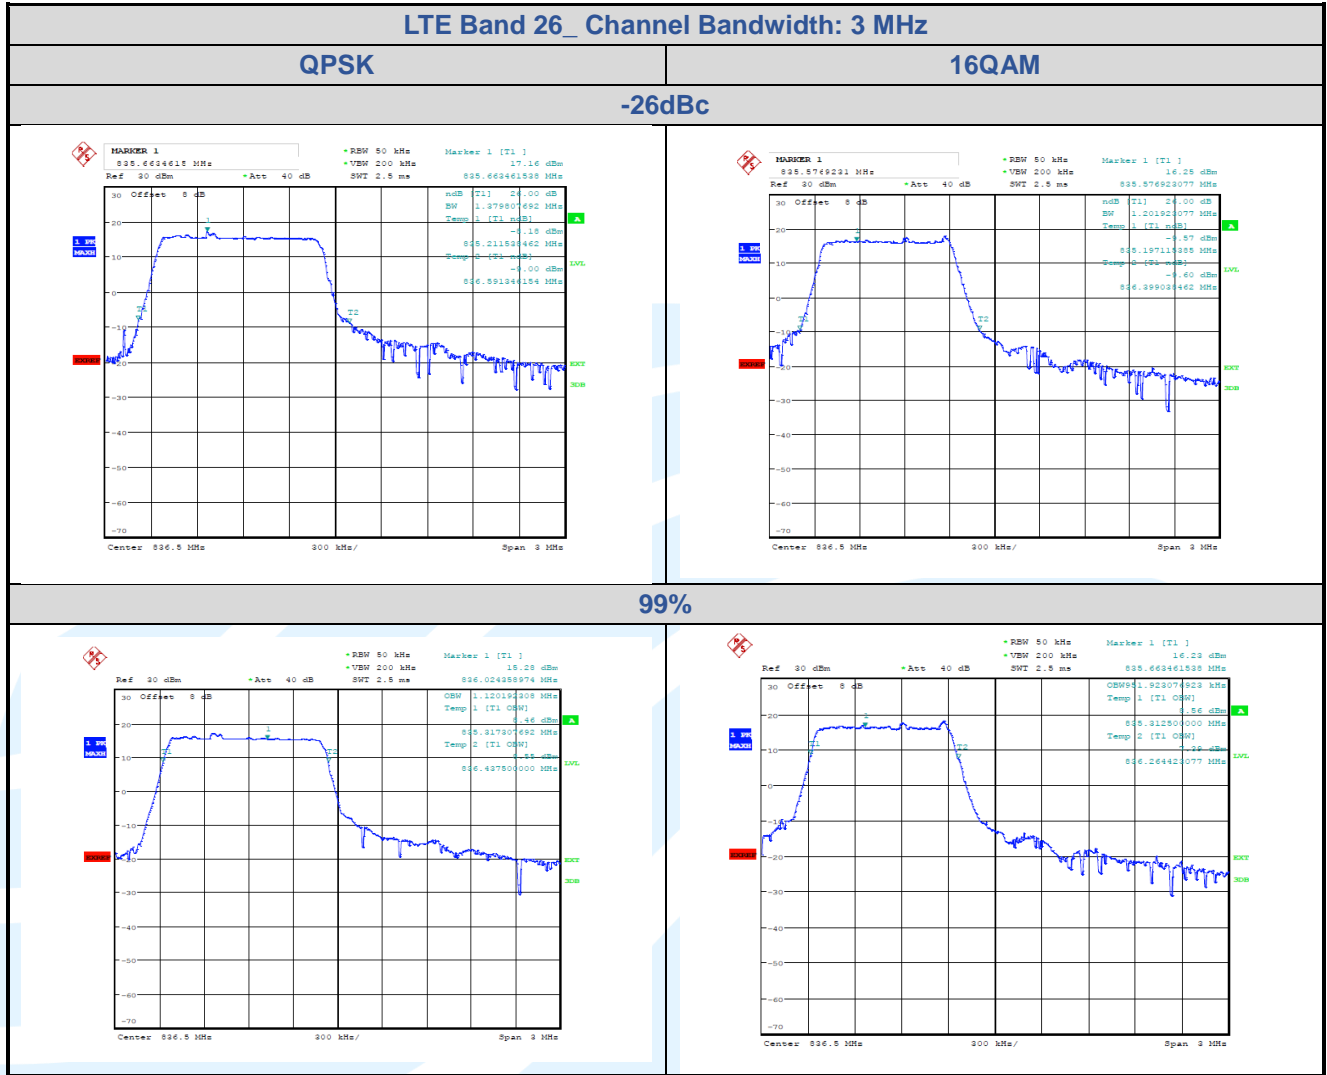

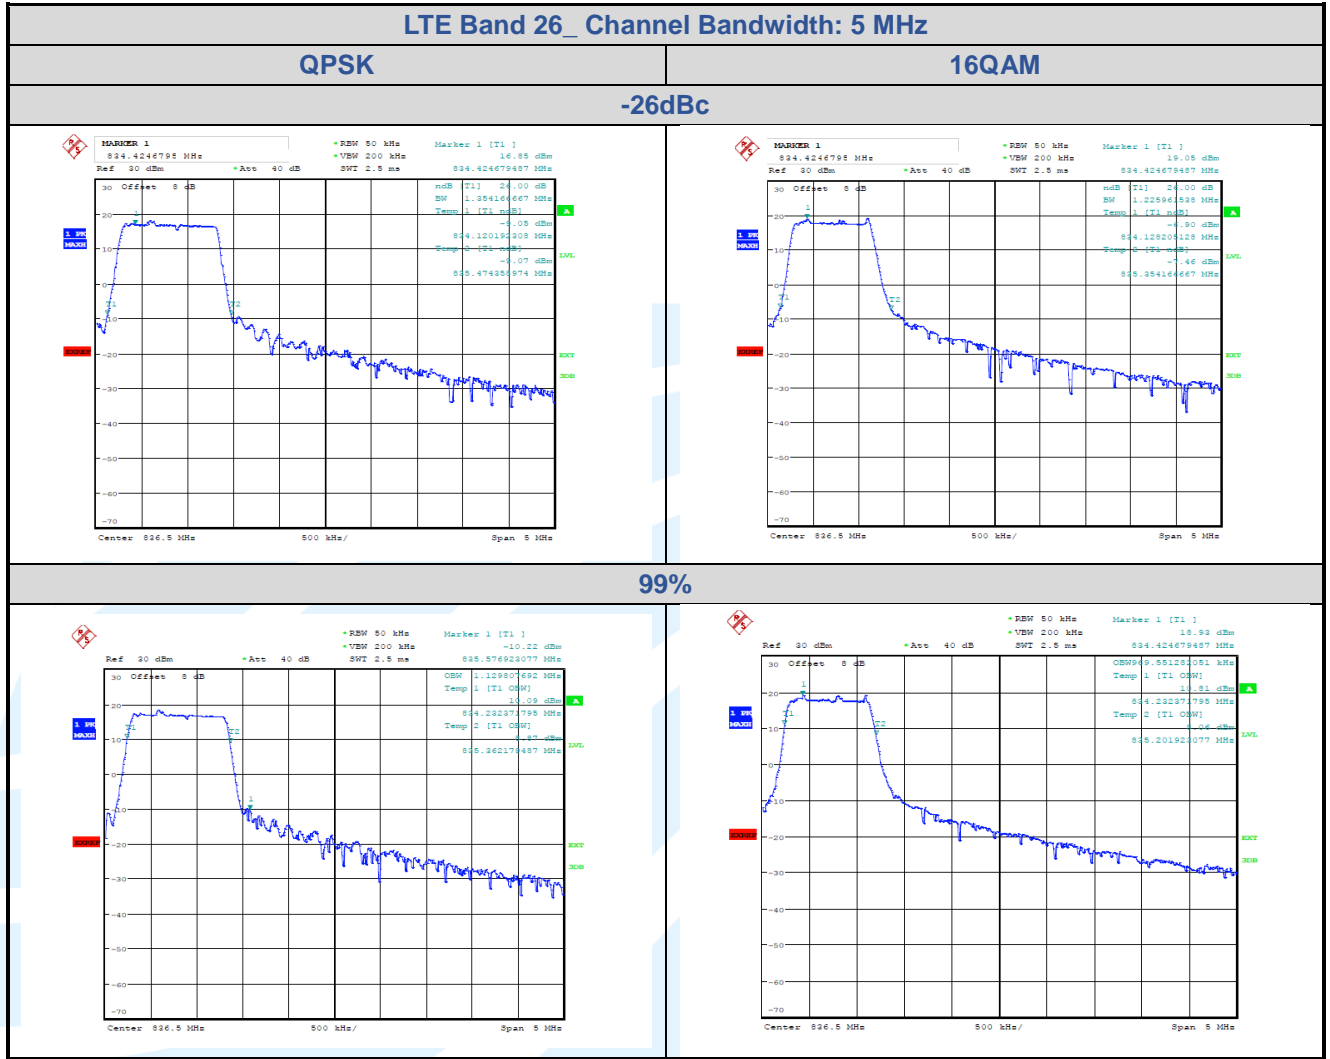


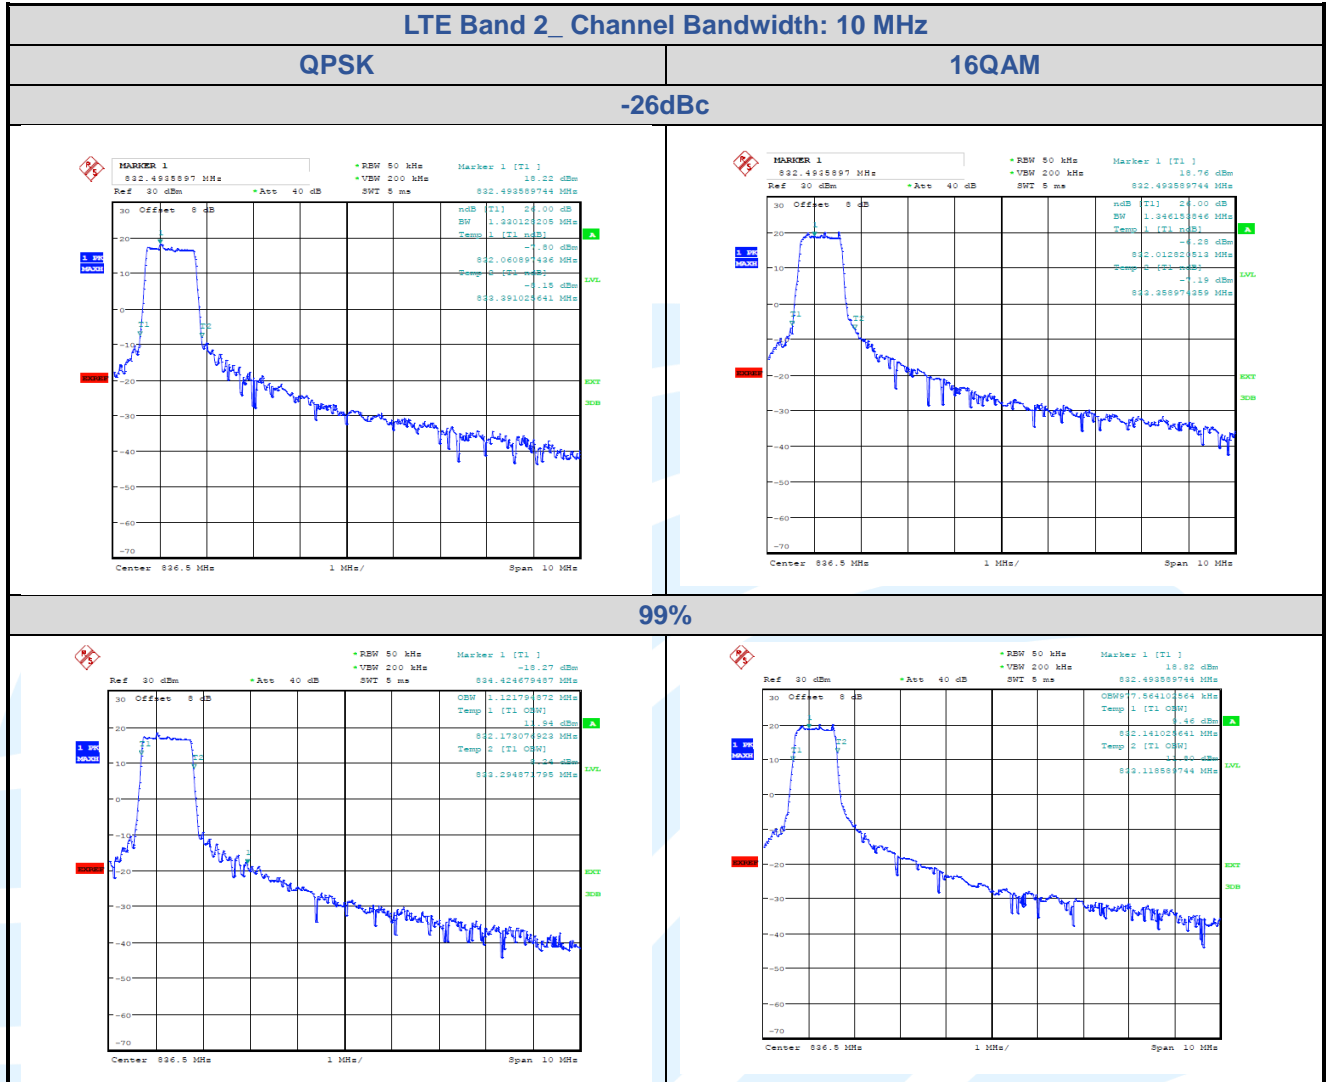


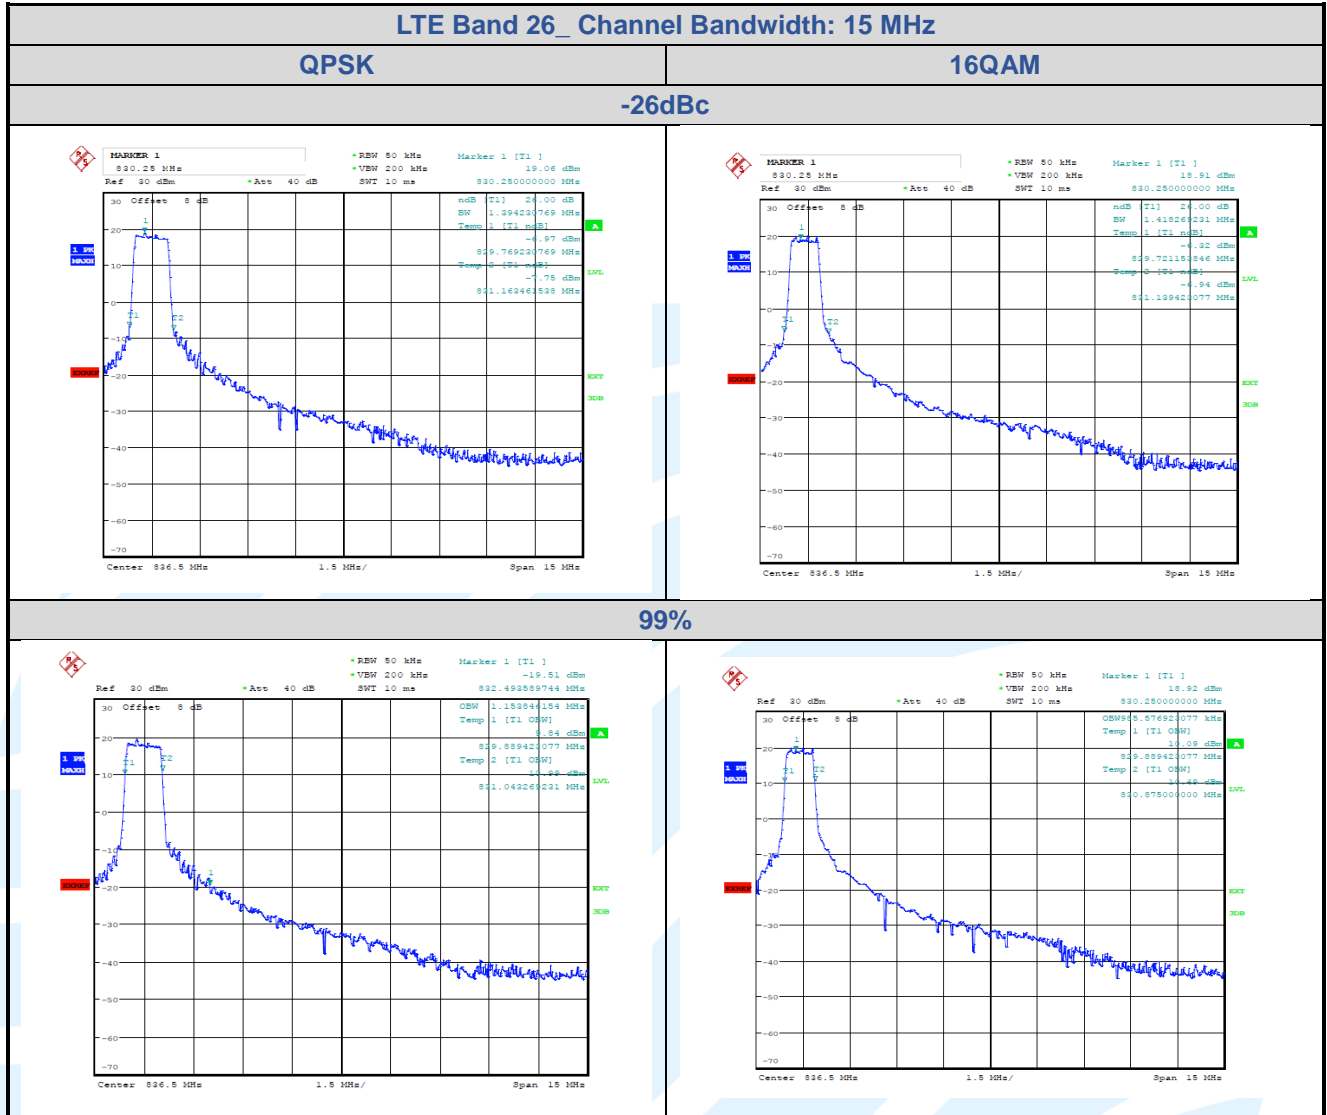



5.5.8 LTE Band 26 (Part 90S)

| LTE Band 26 | | | |
|-------------|------------|----------------|--------|
| Bandwidth | Modulation | Bandwidth(MHz) | |
| | | 99% Power | -26dBc |
| 1.4MHz | QPSK | 1.11 | 1.32 |
| | 16QAM | 0.99 | 1.17 |
| 3MHz | QPSK | 1.12 | 1.40 |
| | 16QAM | 1.00 | 1.19 |
| 5MHz | QPSK | 1.13 | 1.35 |
| | 16QAM | 0.97 | 1.25 |
| 10MHz | QPSK | 1.14 | 1.33 |
| | 16QAM | 0.98 | 1.35 |

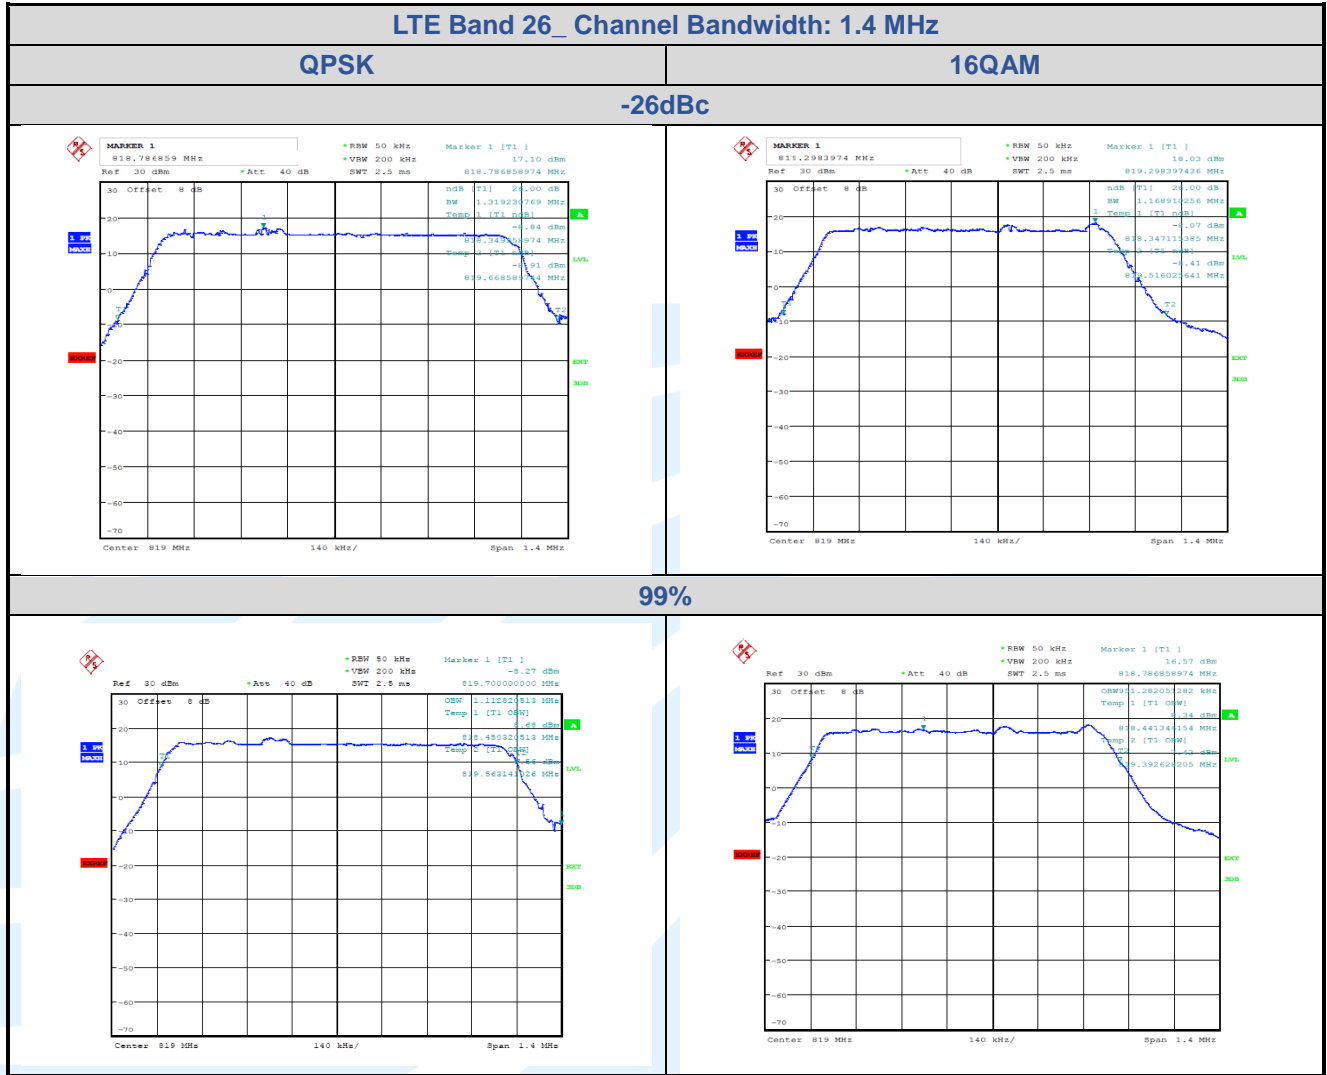

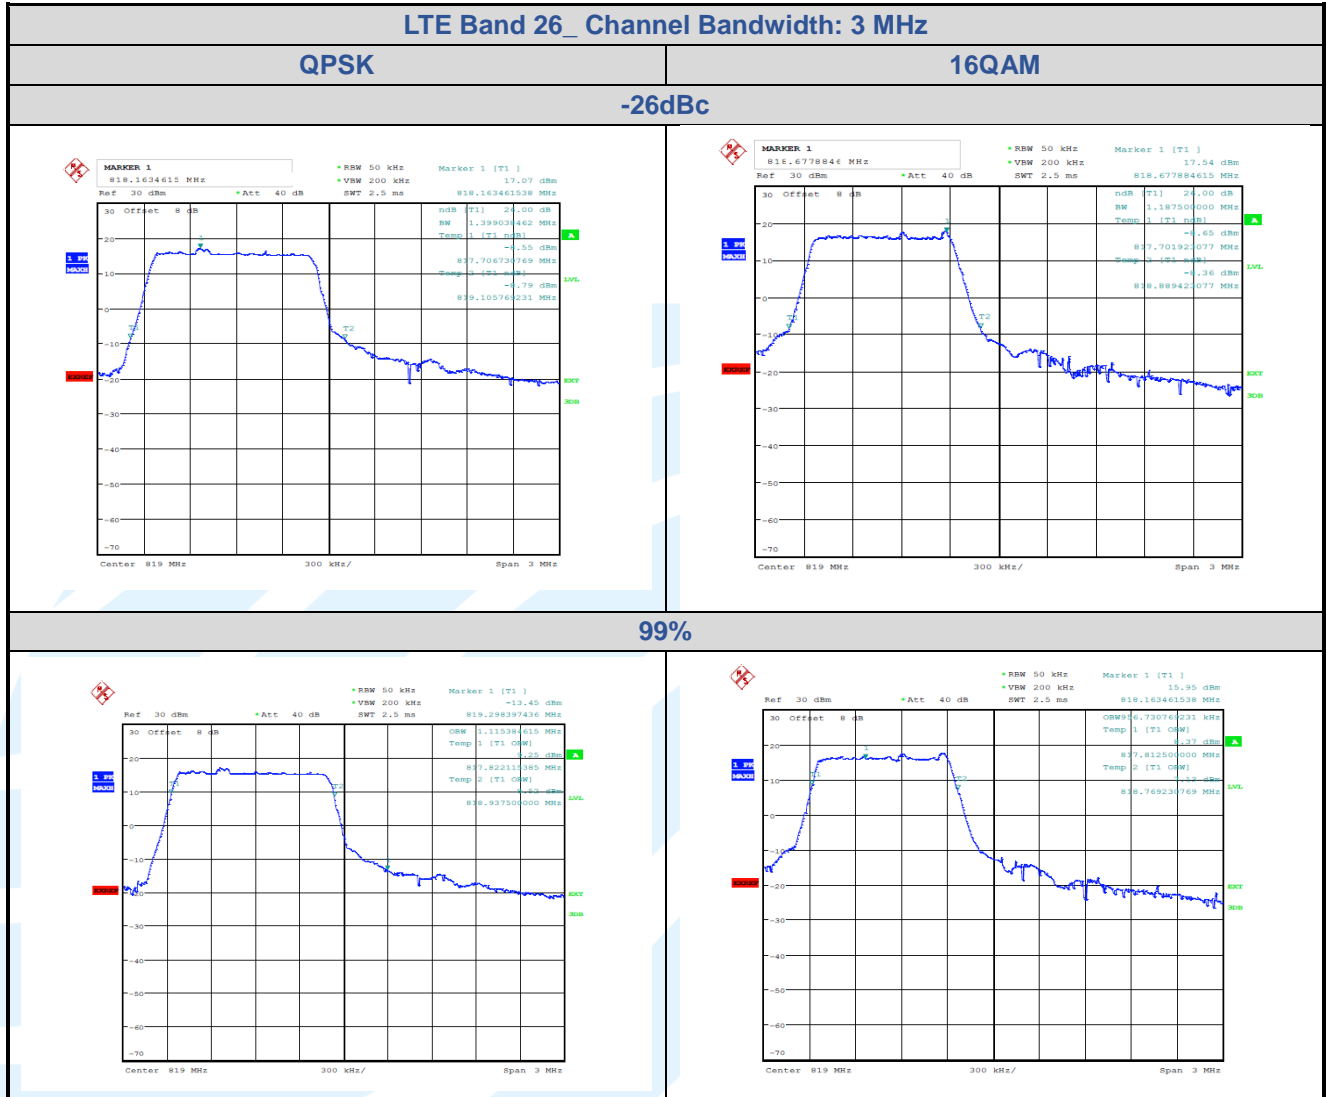


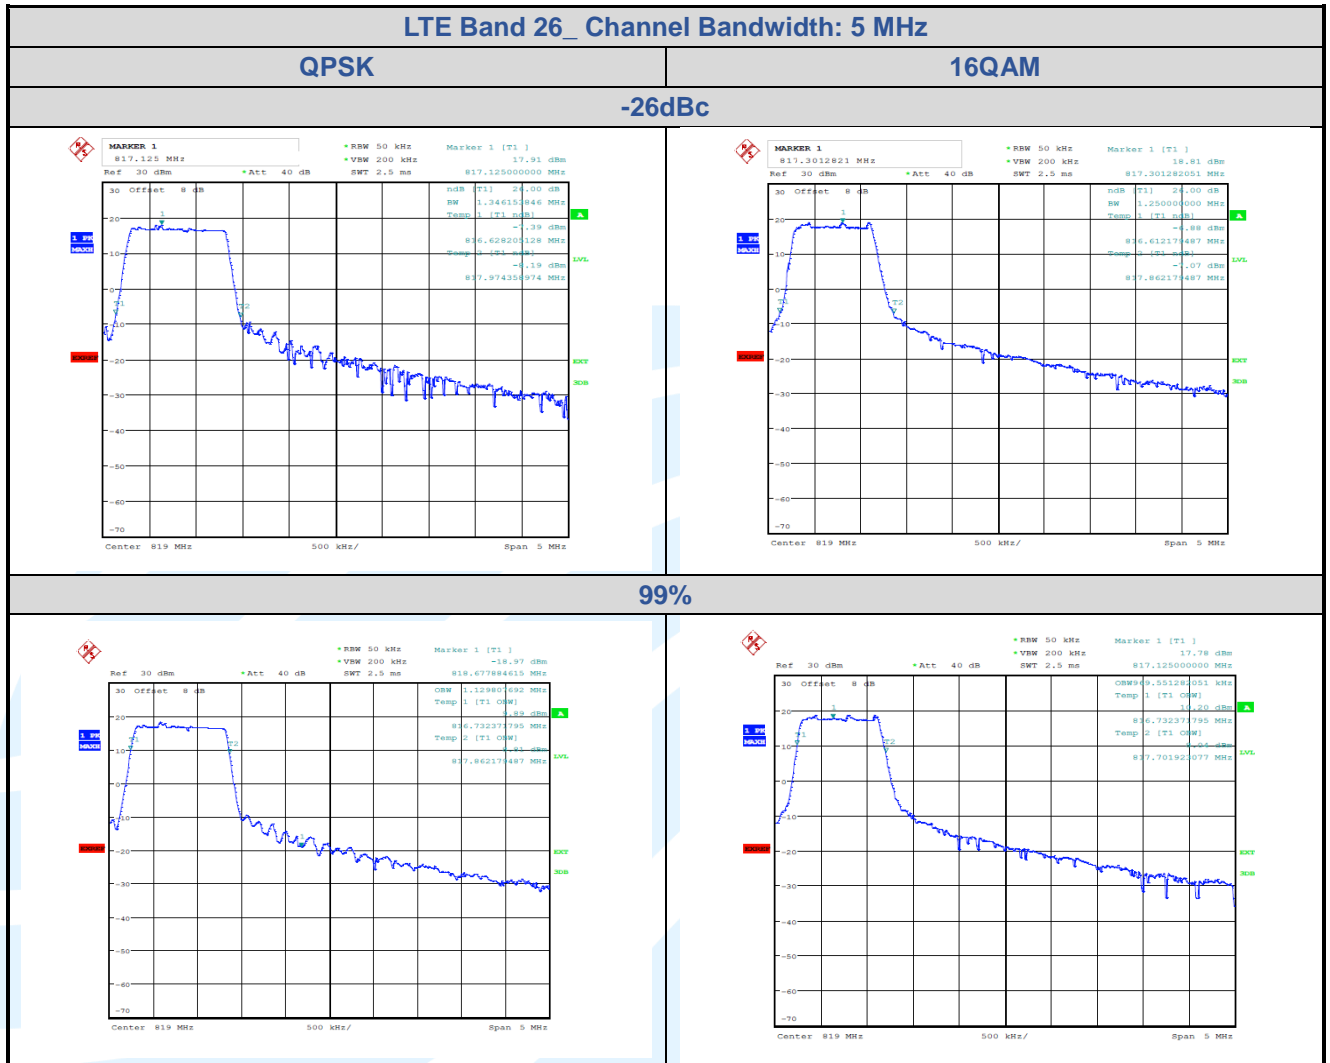


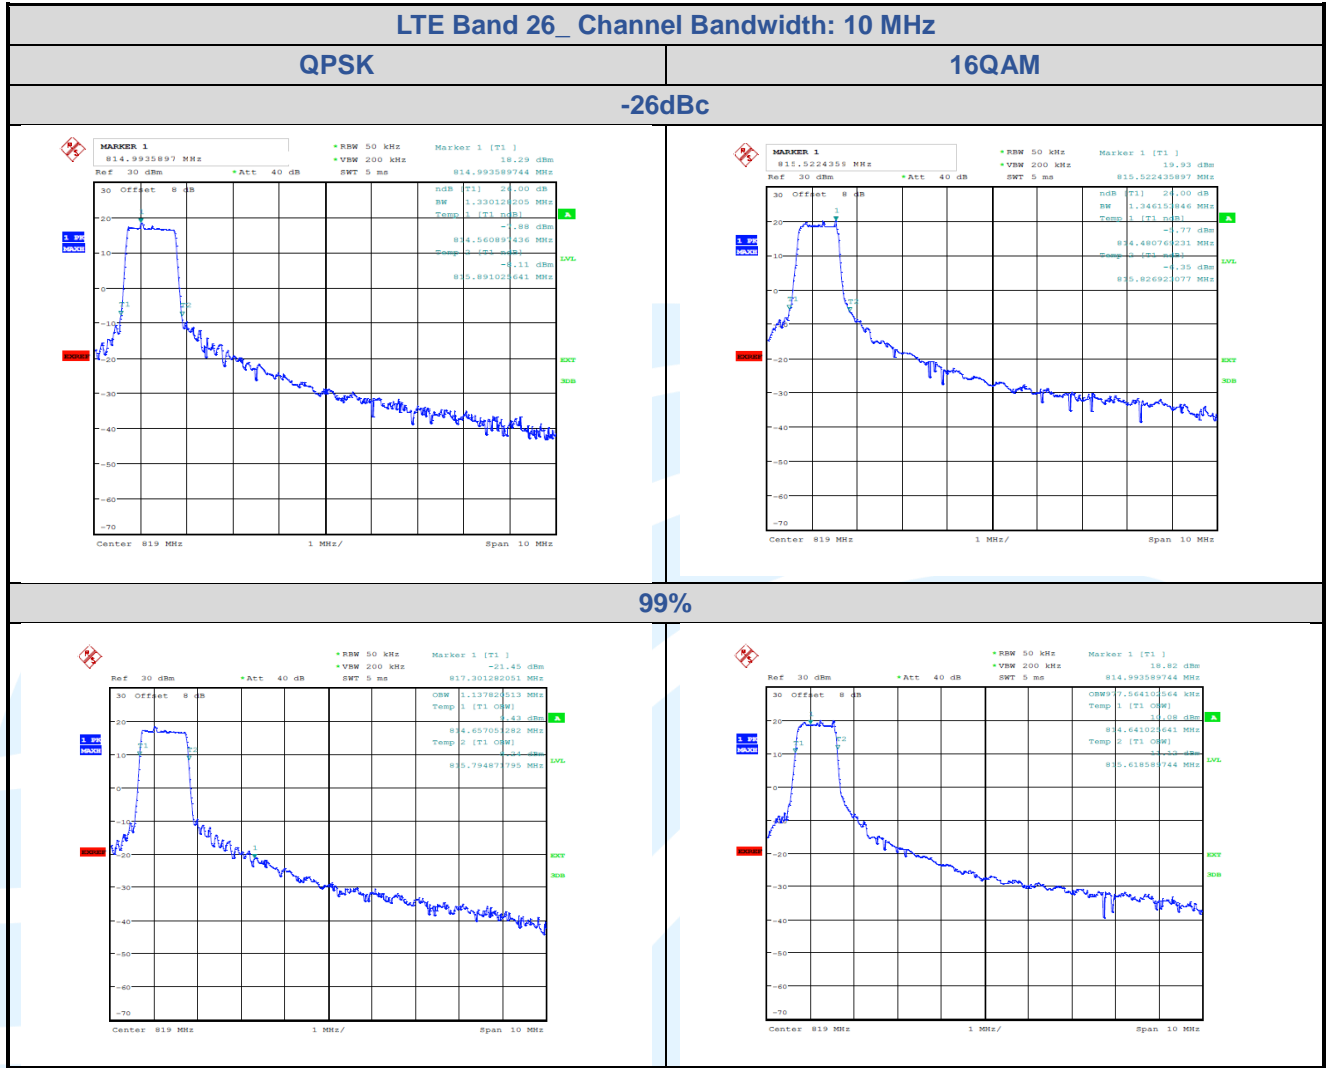



5.5.9 LTE Band 66


| LTE Band 66 | | | |
|-------------|------------|----------------|--------|
| Bandwidth | Modulation | Bandwidth(MHz) | |
| | | 99% Power | -26dBc |
| 1.4MHz | QPSK | 1.11 | 1.32 |
| | 16QAM | 0.95 | 1.17 |
| 3MHz | QPSK | 1.12 | 1.39 |
| | 16QAM | 0.96 | 1.17 |
| 5MHz | QPSK | 1.12 | 1.38 |
| | 16QAM | 0.96 | 1.18 |
| 10MHz | QPSK | 1.12 | 1.33 |
| | 16QAM | 0.99 | 1.30 |
| 15MHz | QPSK | 1.13 | 1.39 |
| | 16QAM | 1.01 | 1.30 |
| 20MHz | QPSK | 1.12 | 1.38 |
| | 16QAM | 1.03 | 1.31 |

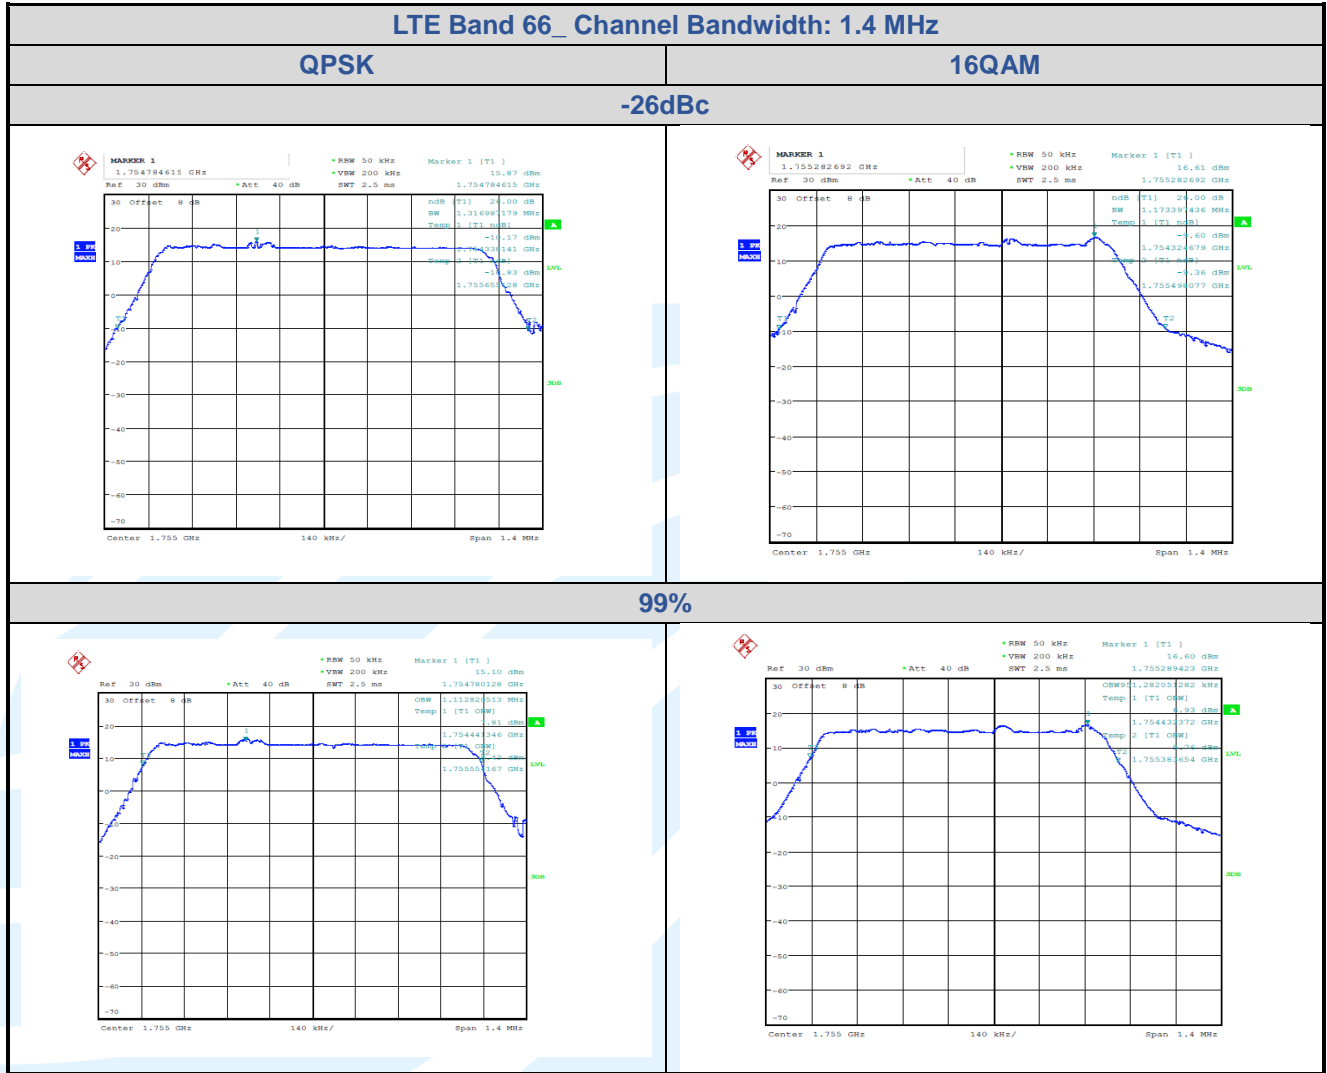


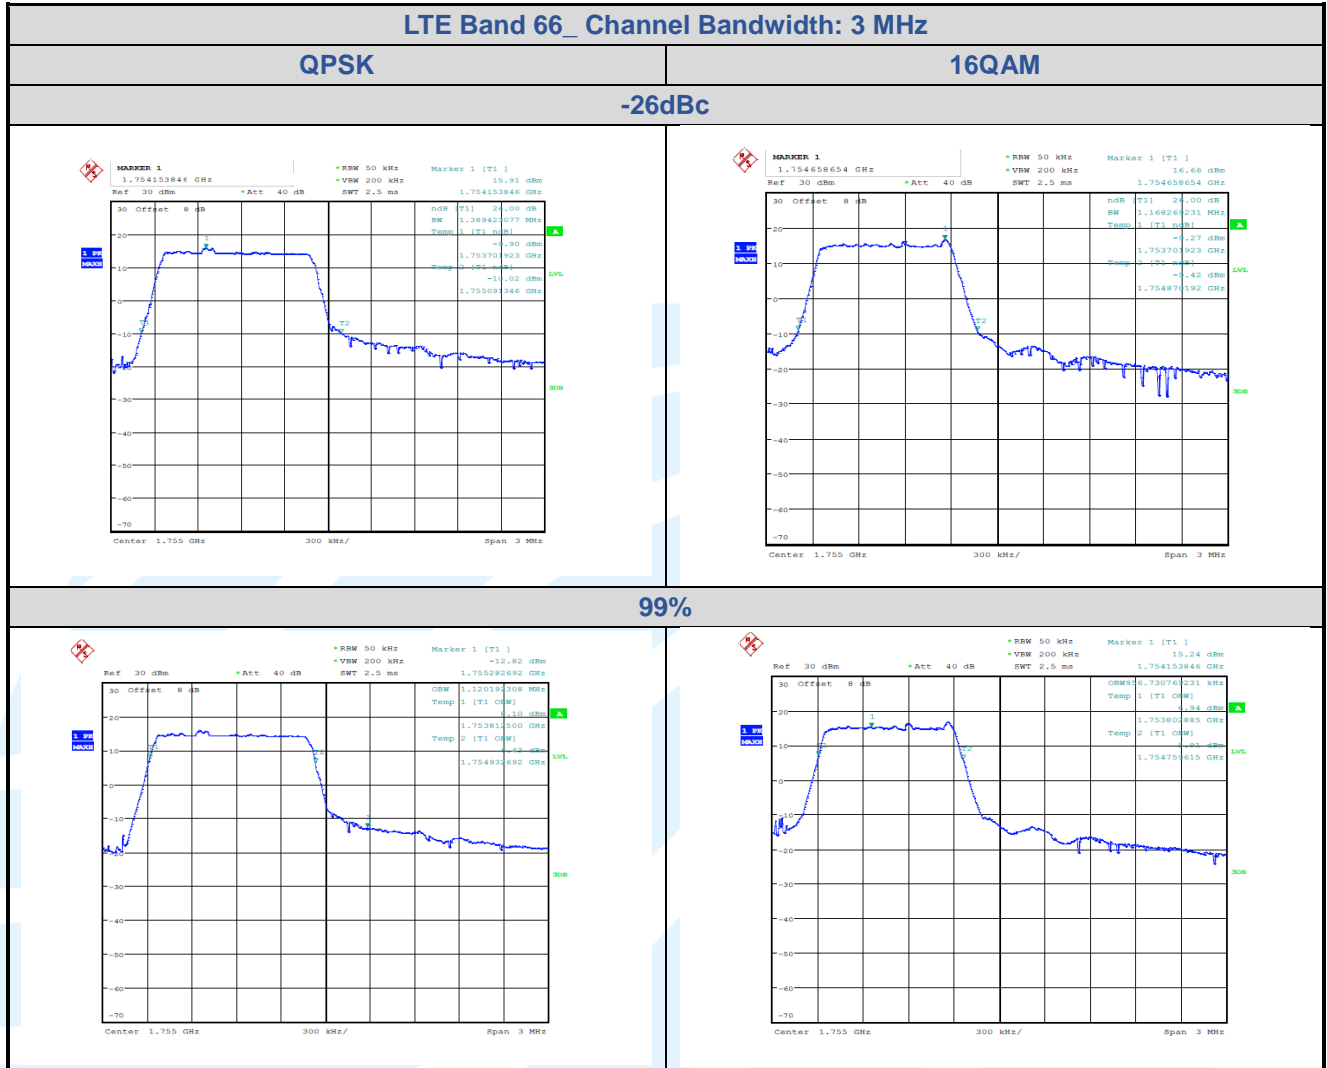

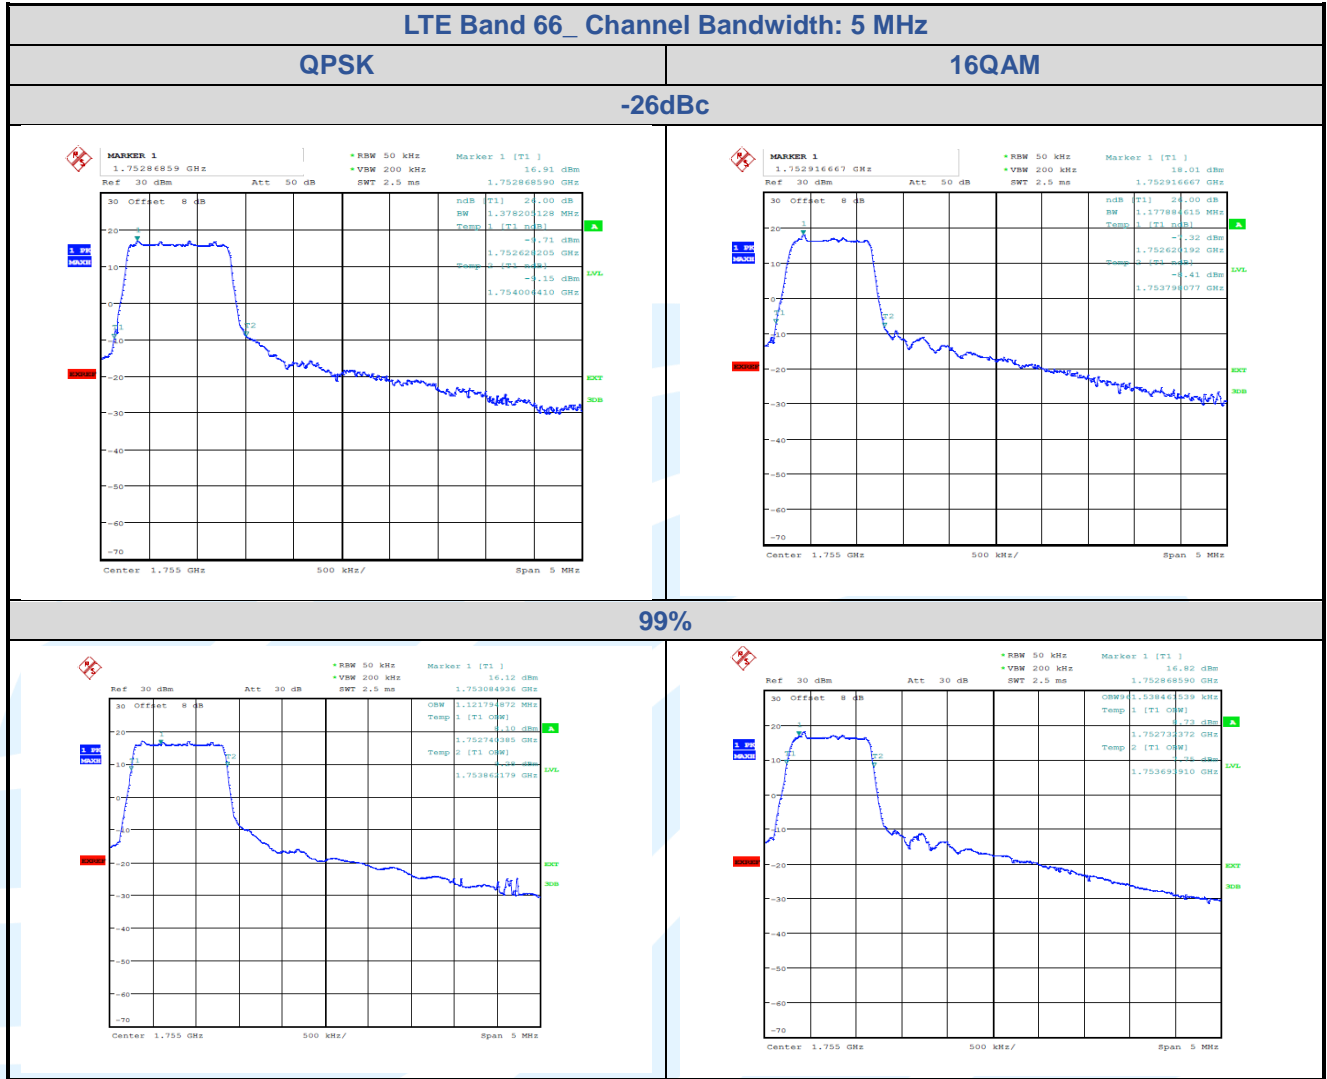

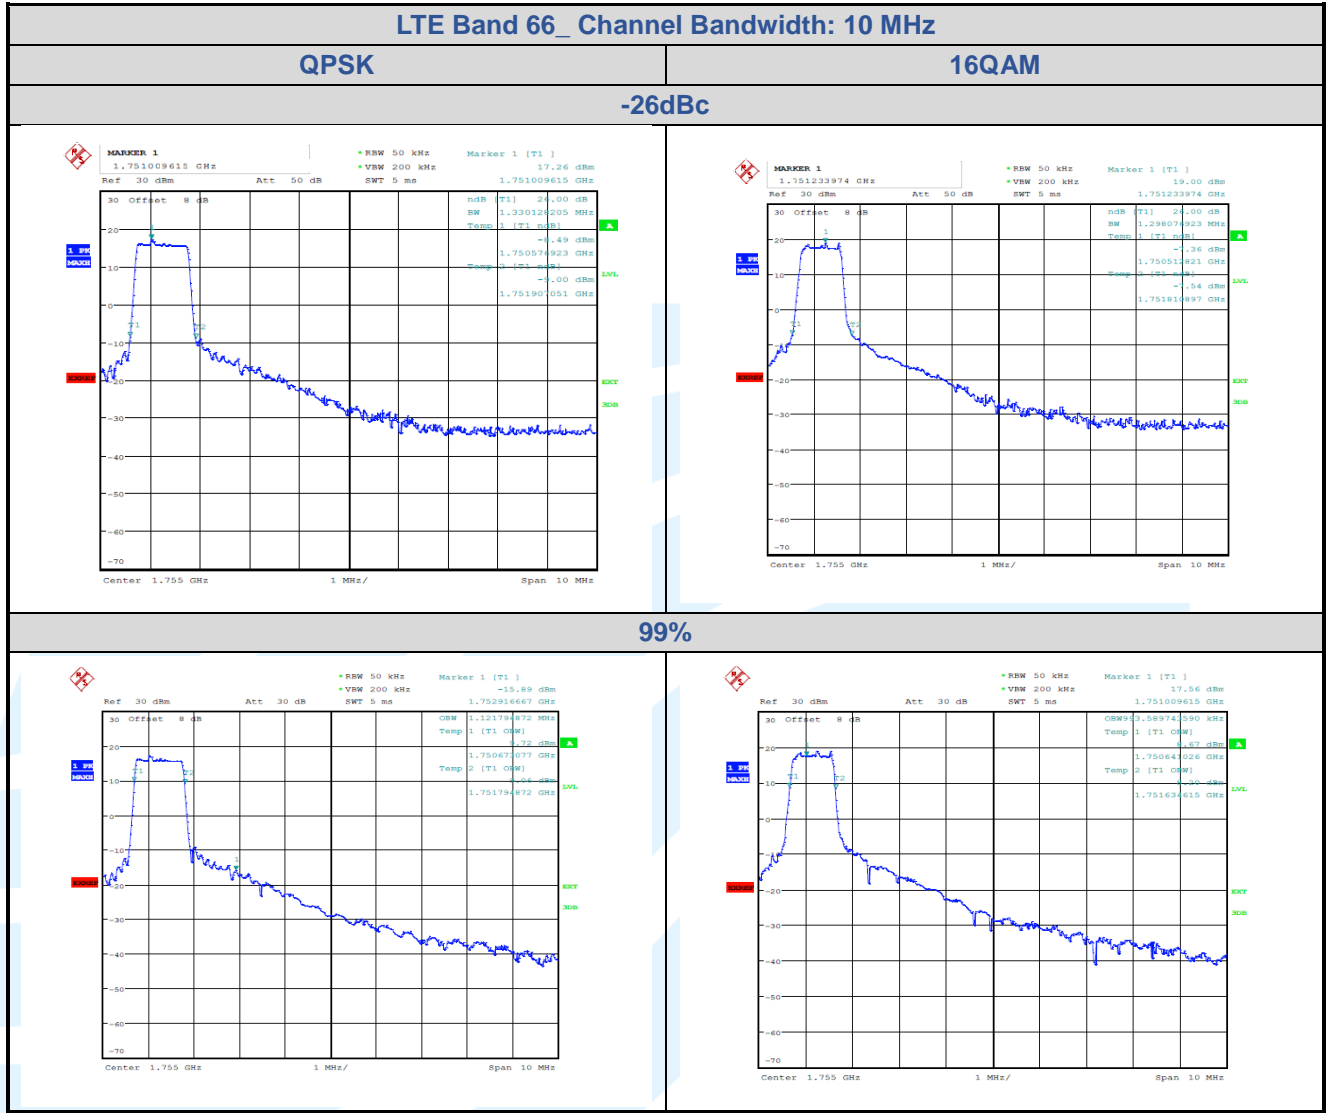

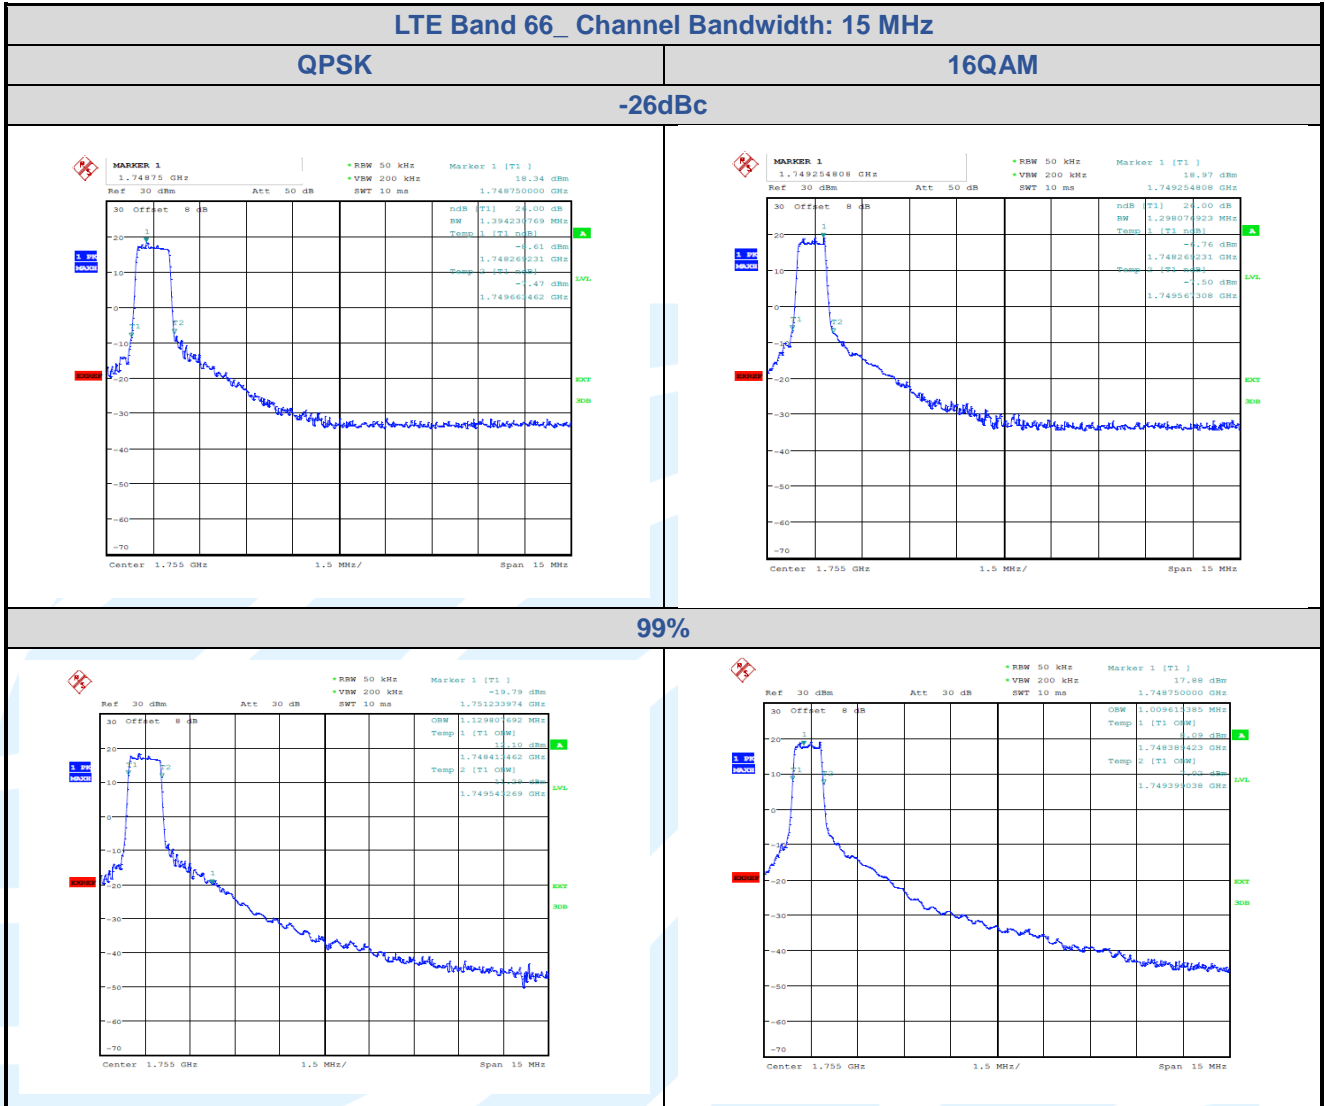

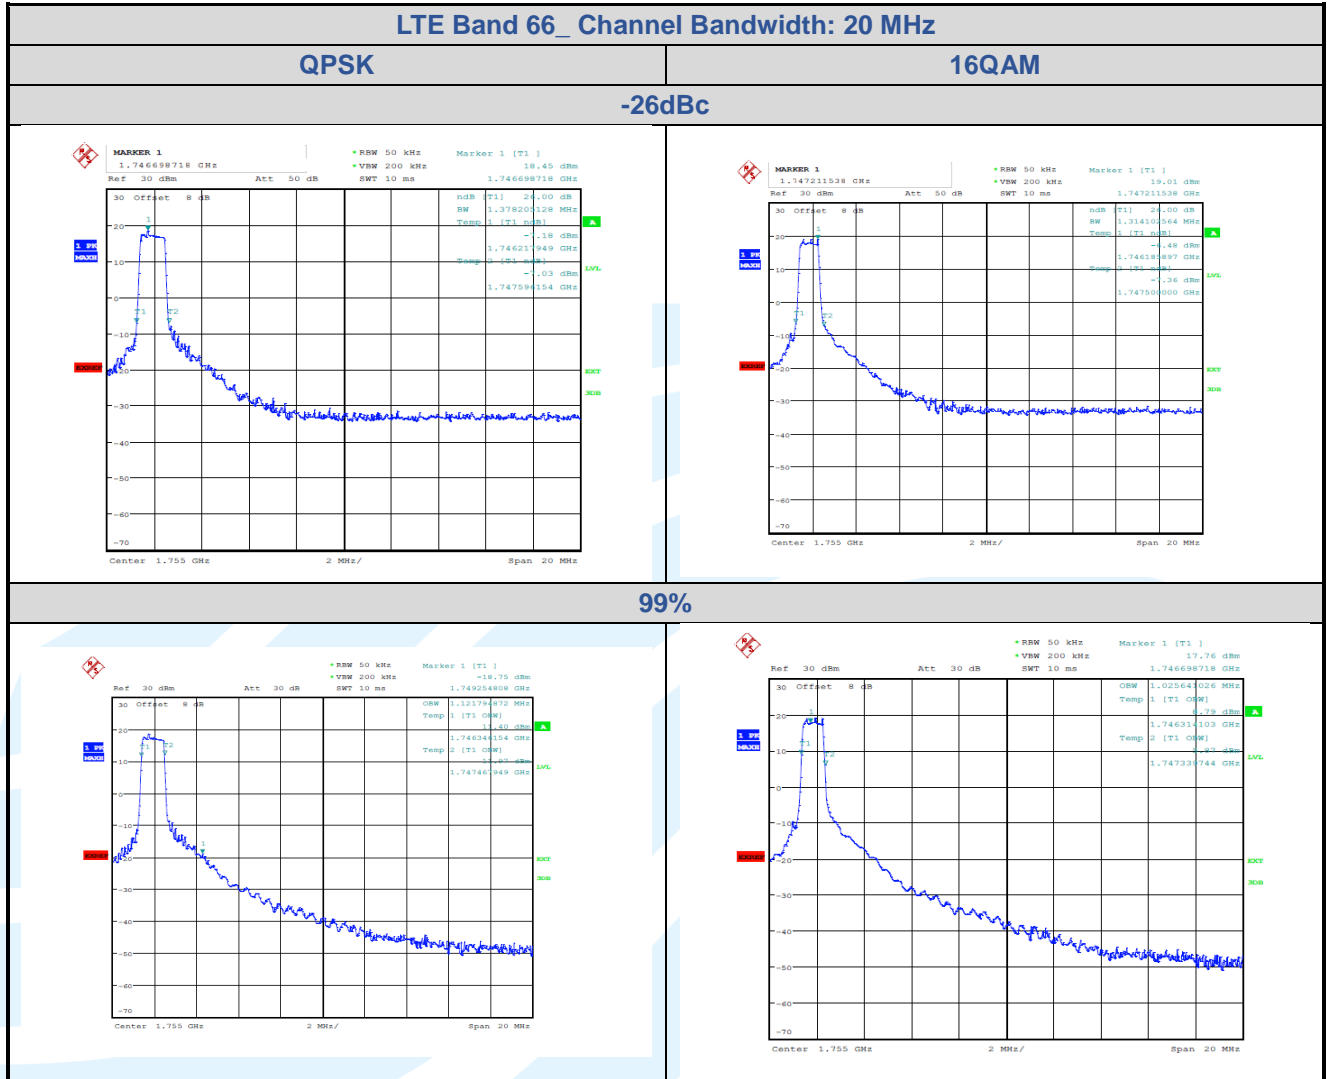

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: **LTE Band 2 & LTE Band 25:** FCC 47 CFR Part 24.238(a)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)(1)
LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.917(a)
LTE Band 12 : FCC 47 CFR Part 27.53(g)
LTE Band 13: FCC 47 CFR Part 27.53(c)(2)
LTE Band 26: FCC 47 CFR Part 90.691

LTE Band 2 & LTE Band 25: RSS-133 Issue 6, Section 6.5
LTE Band 4 & LTE Band 66: RSS-139 Issue 3, Section 6.6
LTE Band 5: RSS-132 Issue 3, Section 5.5
LTE Band 12 & LTE Band 13: RSS-130 Issue 2, Section 4.7

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a) :

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(g):

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27.53(c)(2):

On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

FCC 47 CFR Part 90.691:

(a)(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(a)(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

RSS-130 Issue 2, Section 4.7,

General unwanted emissions limits: The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

Additional unwanted emissions limits:

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746- 756 MHz and 777-787 MHz shall also comply with the following restrictions:

- a) The power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment, and
 - ii. $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment.
- b) The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

RSS-132 Issue 3, Section 5.5,

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-RSS4G-V1.1

In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS-133 Issue 6, Section 6.5,

In the 1.0 MHz bands immediately outside and adjacent to the equipment’s operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139 Issue 3, Section 6.6,

In the first 1.0 MHz bands immediately outside and adjacent to the equipment’s smallest operating frequency block,2 which can contain the equipment’s occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

After the first 1.0 MHz outside the equipment’s smallest operating frequency block, which can contain the equipment’s occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details


Test Mode: Link mode

Test Results: Pass


5.6.1 LTE Band 2

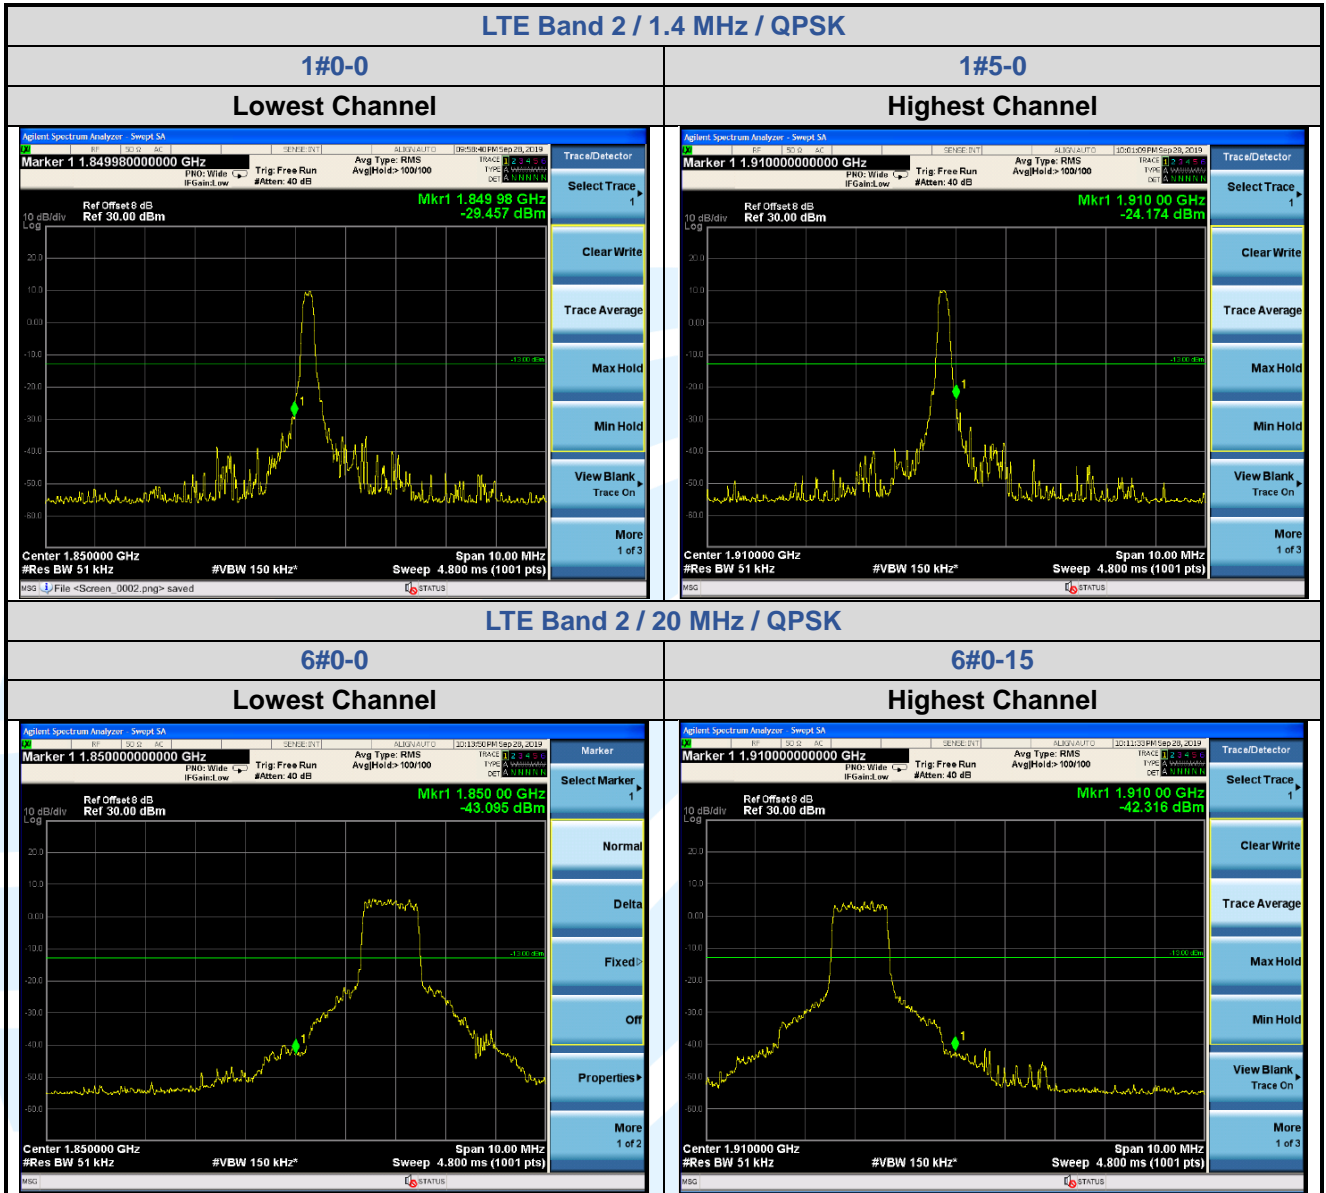


5.6.2 LTE Band 4

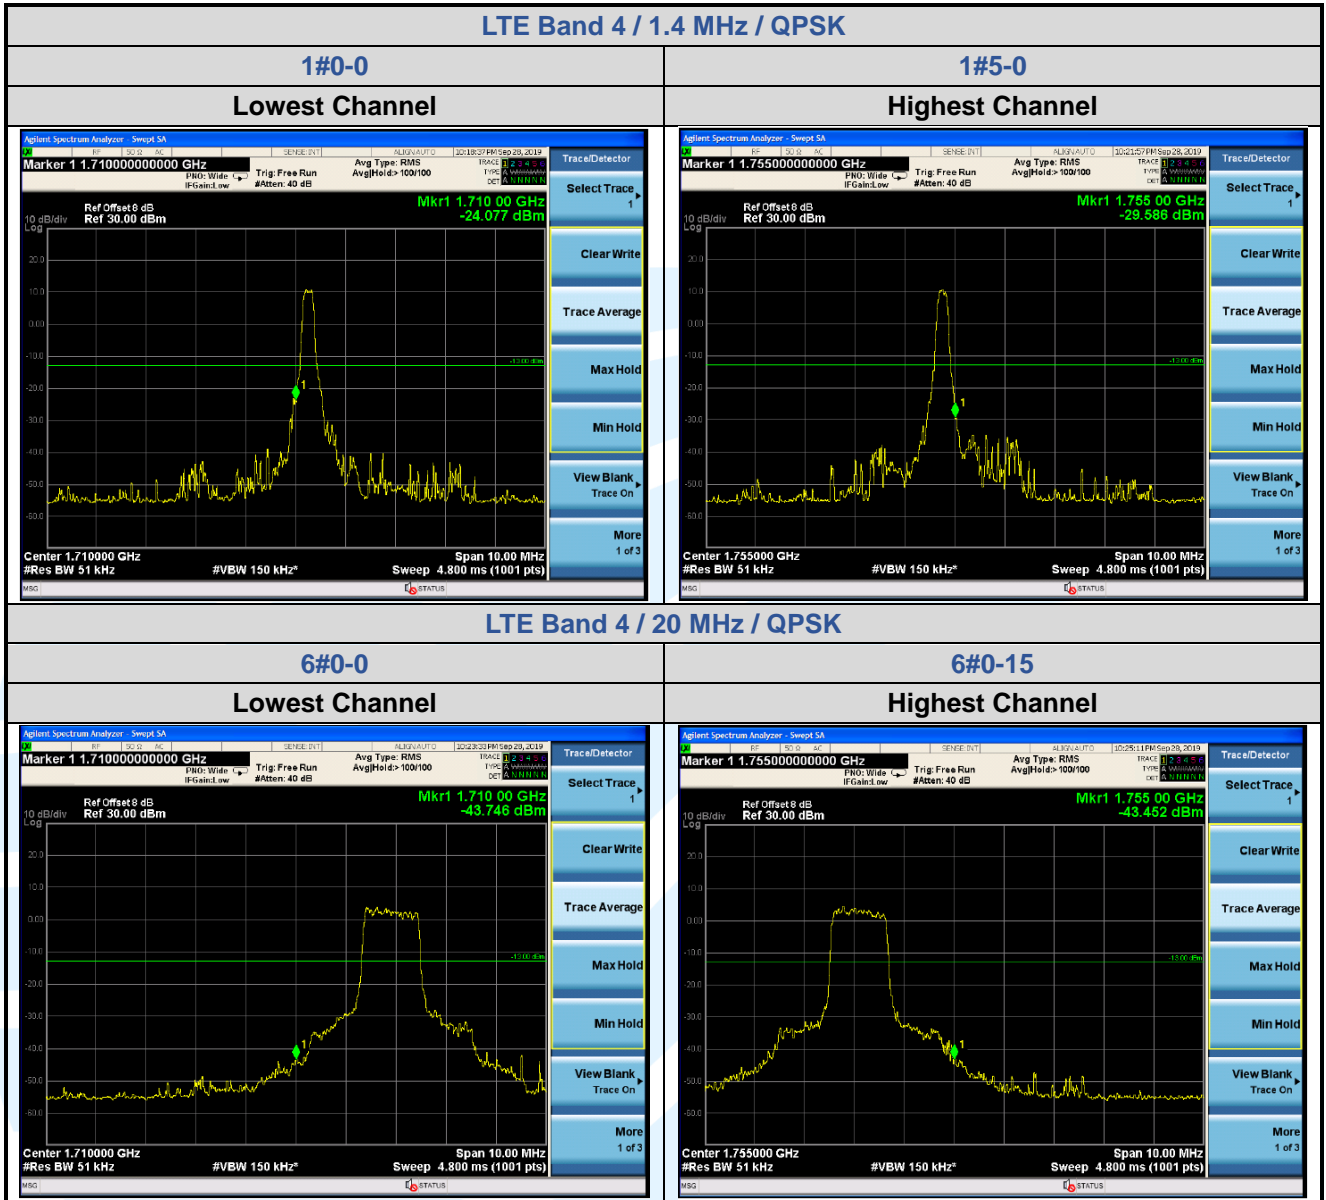


5.6.3 LTE Band 5

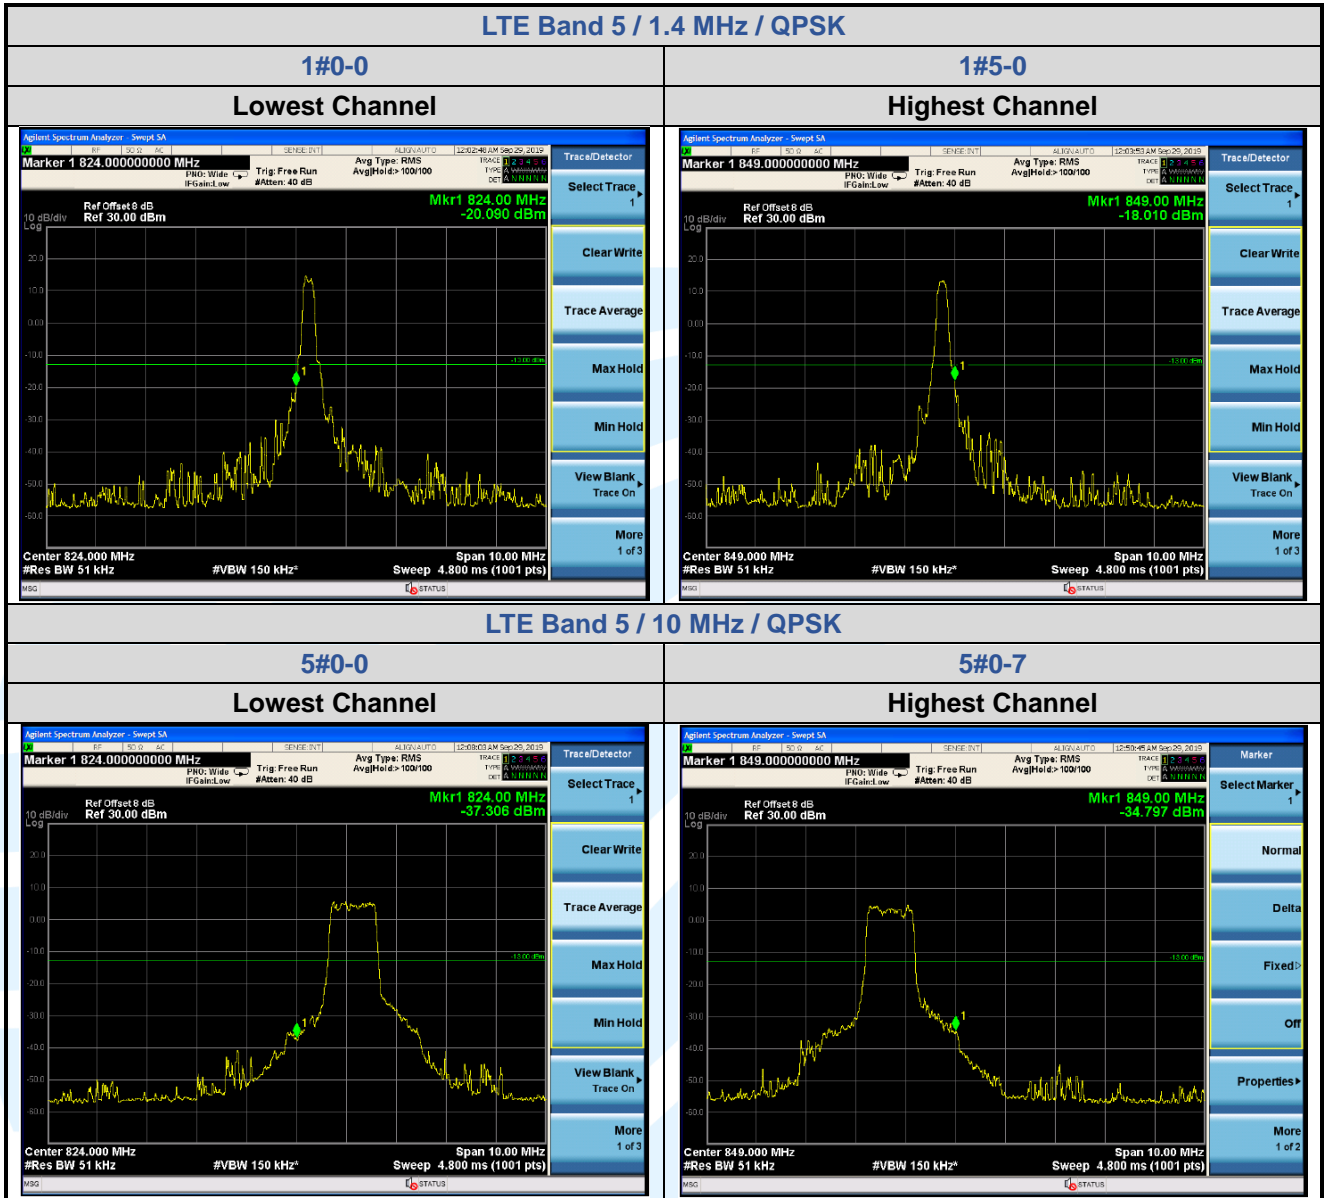


5.6.4 LTE Band 12

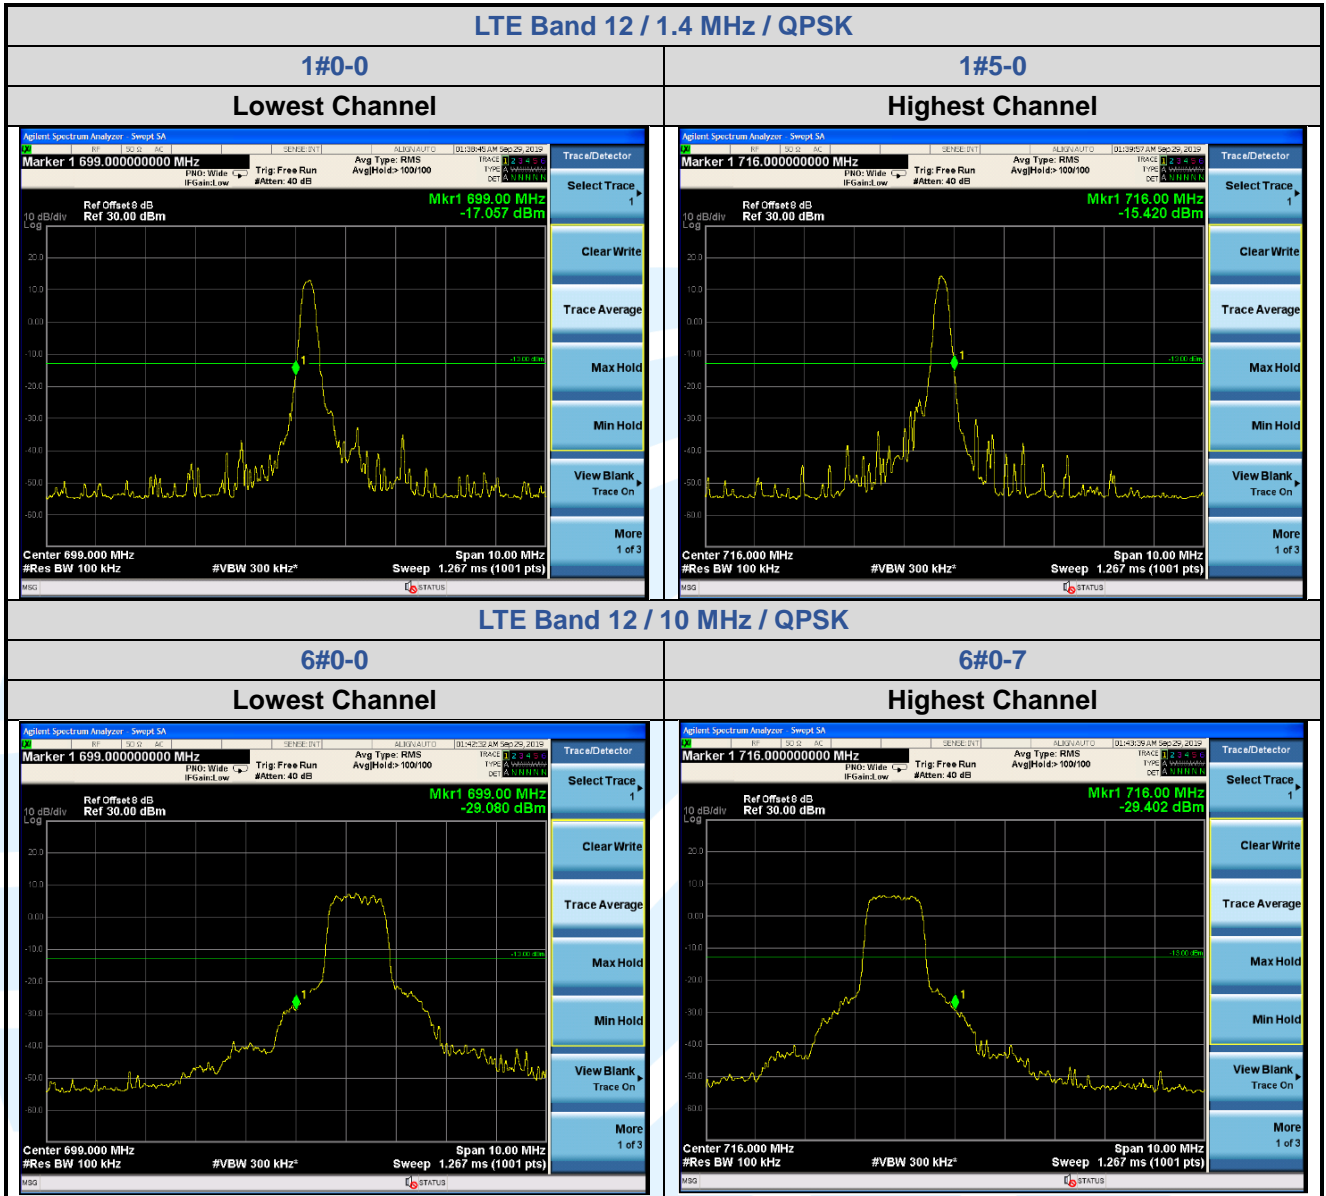


5.6.5 LTE Band 13

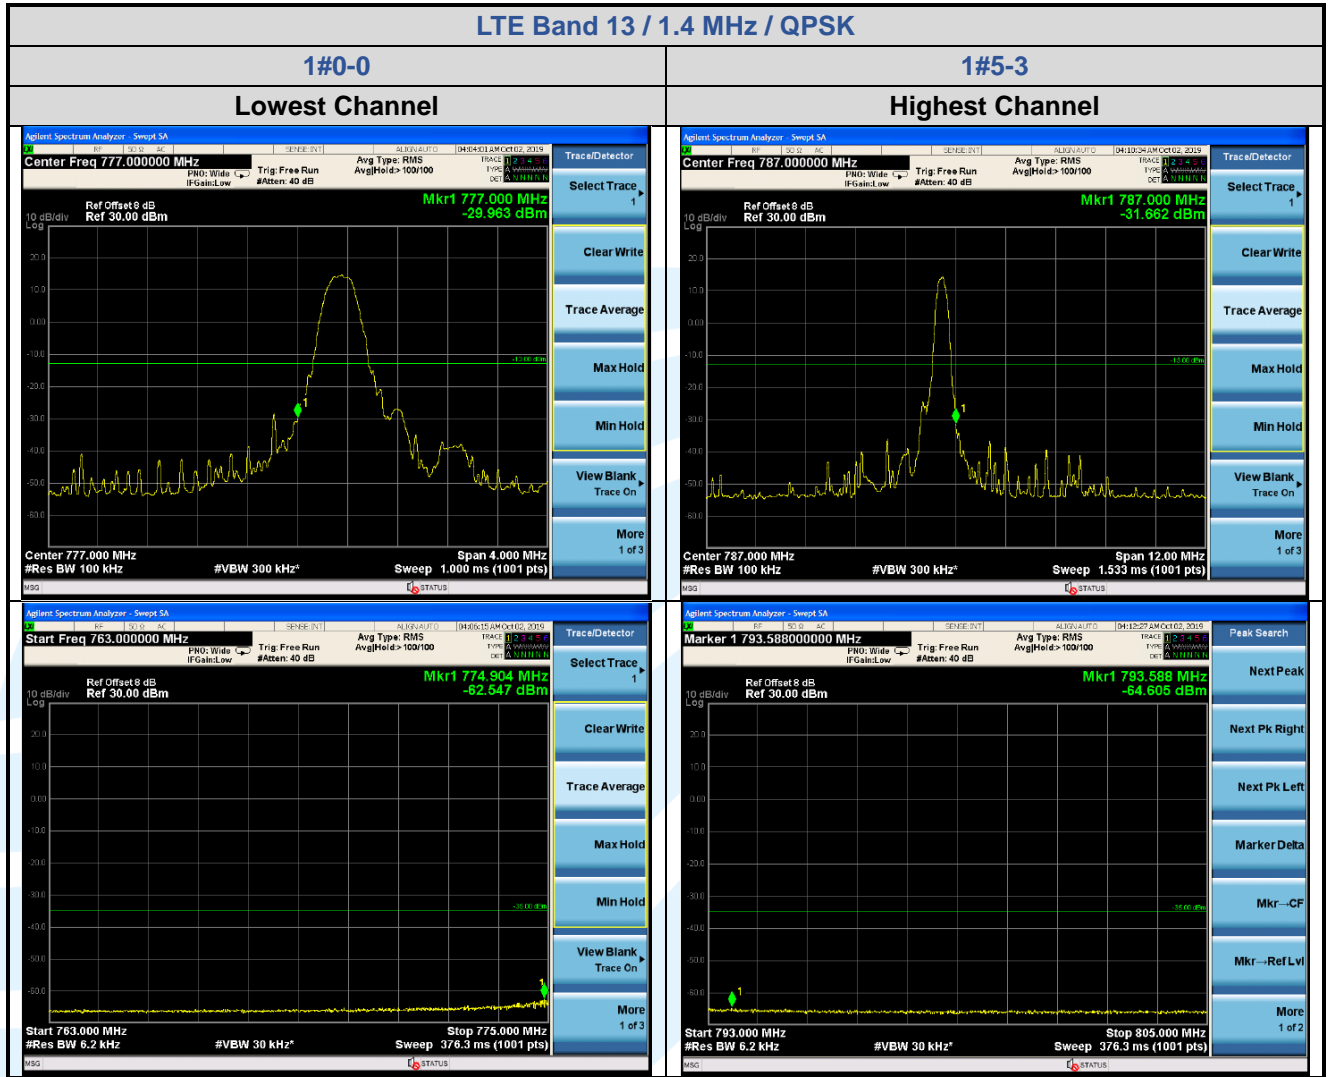


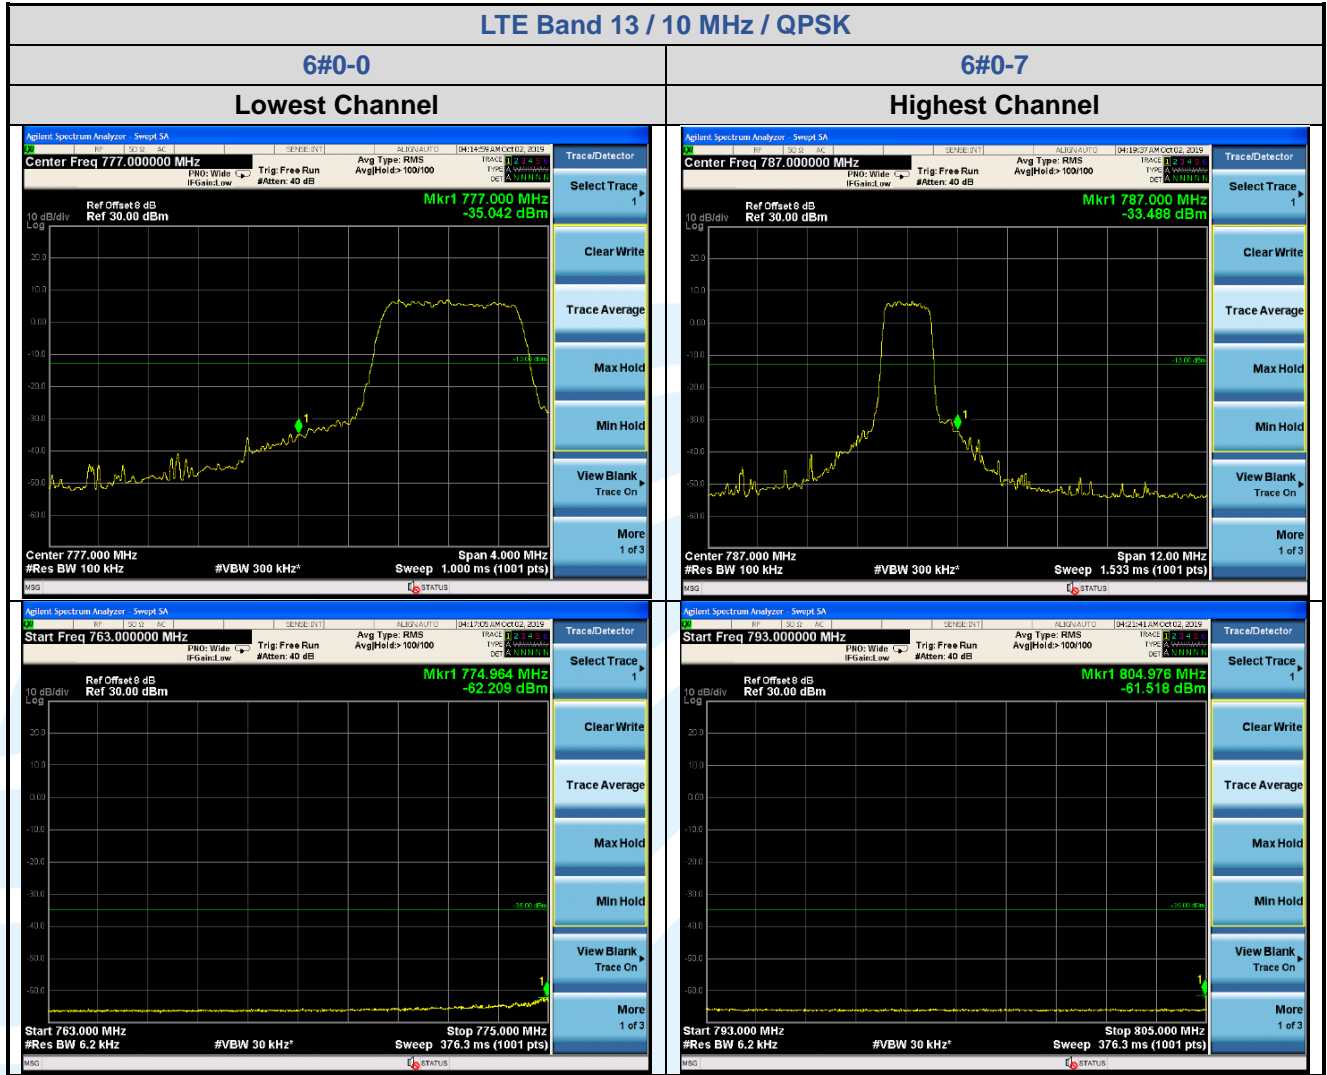


5.6.6 LTE Band 25

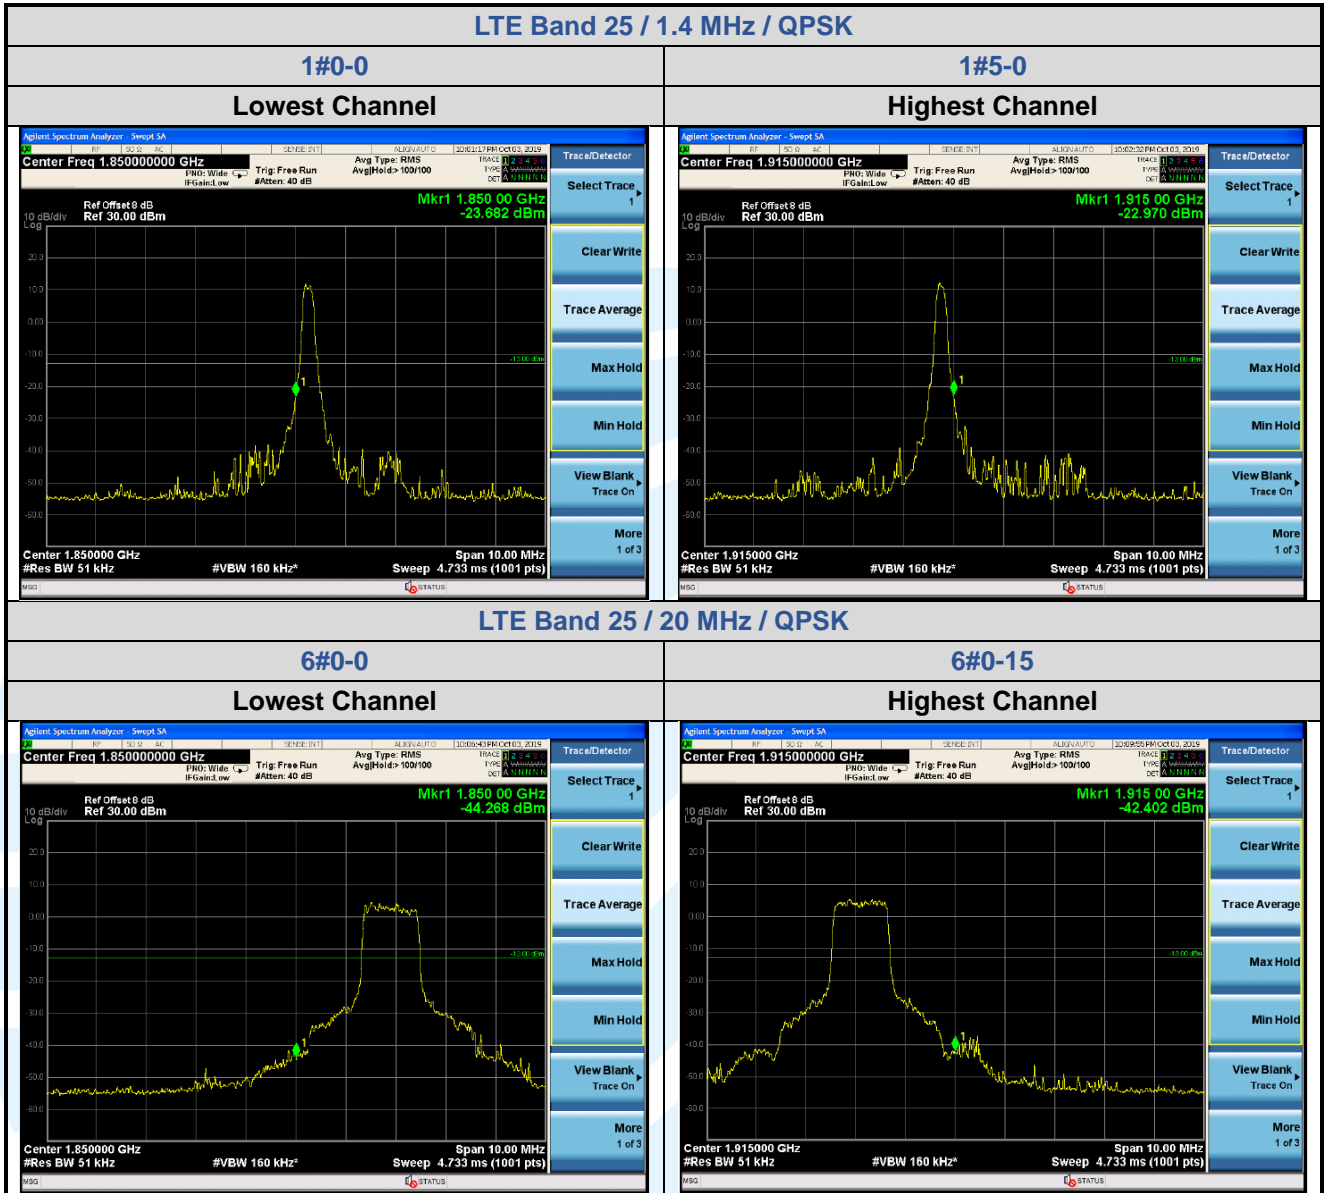


5.6.7 LTE Band 26

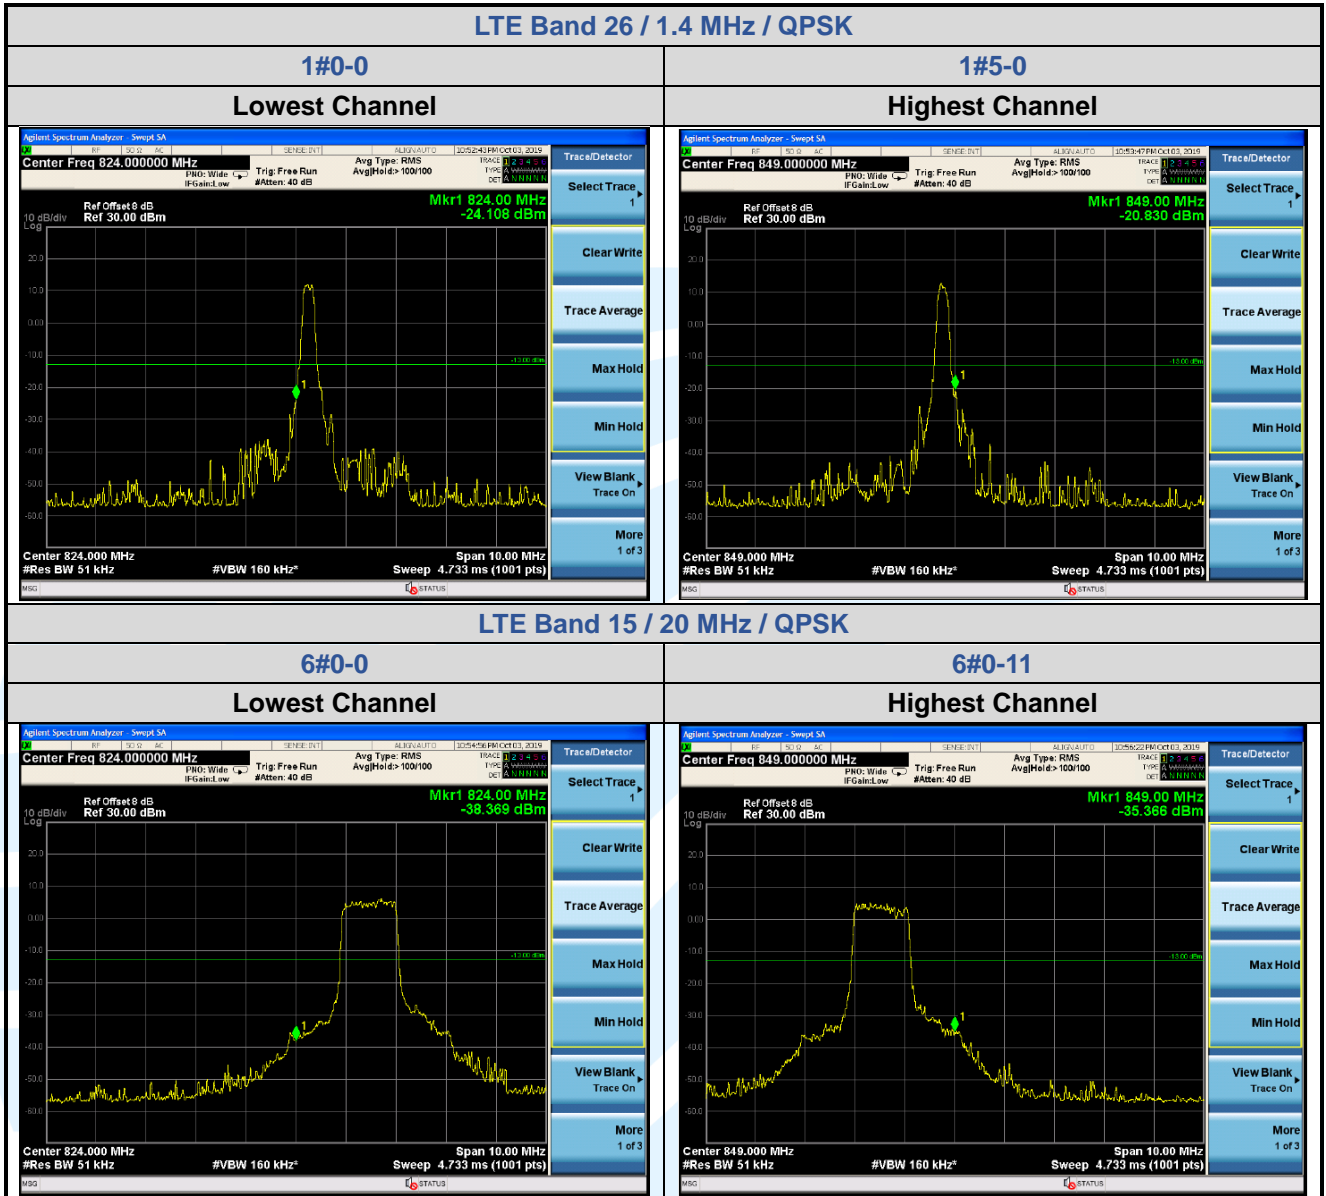

5.6.8 LTE Band 26 (Part 90S)

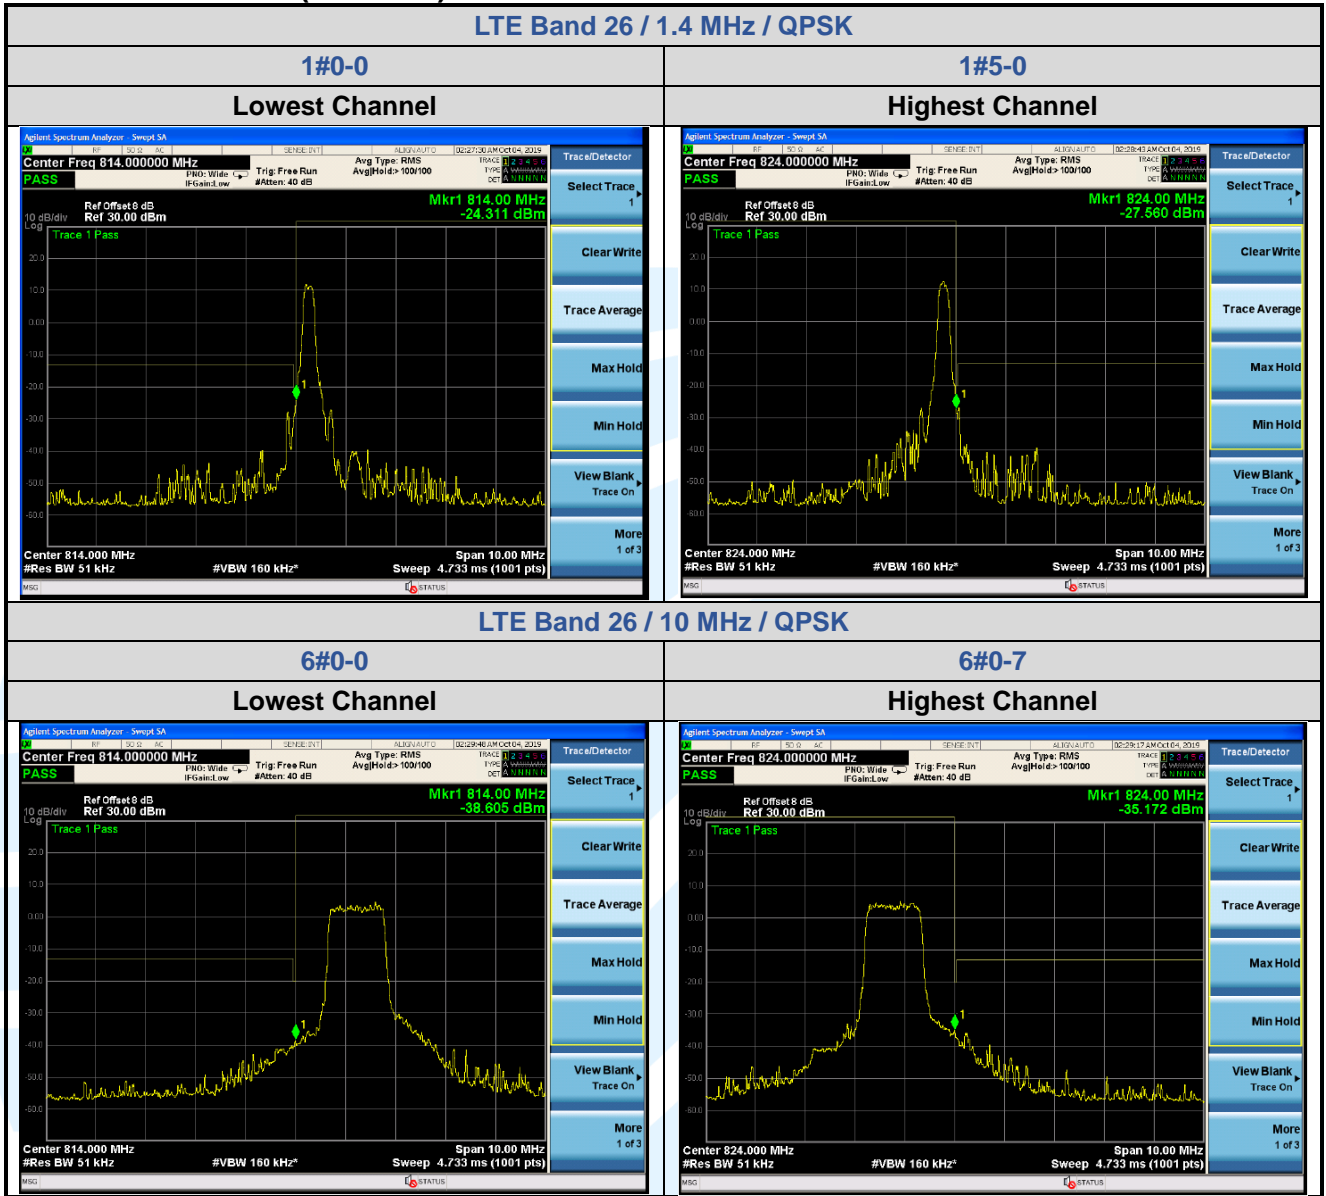

5.6.9 LTE Band 66

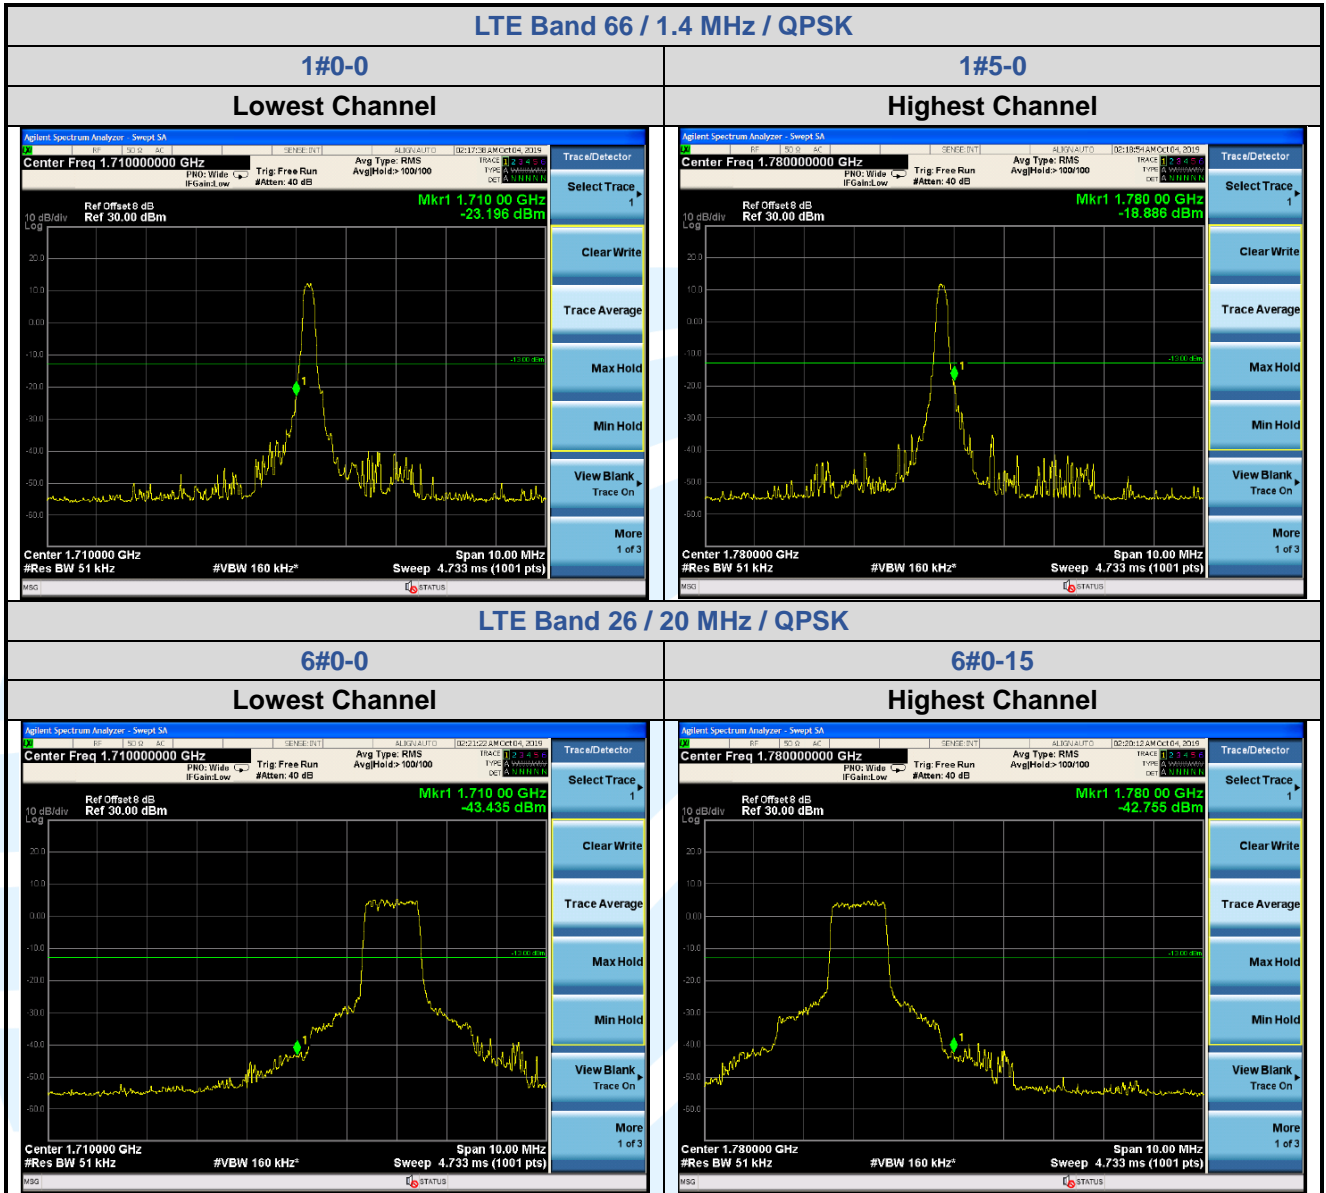

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.238(a)
 LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)
 LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.917(a)
 LTE Band 12: FCC 47 CFR Part 27.53(g)
 LTE Band 13: FCC 47 CFR Part 27.53
 LTE Band 26: FCC 47 CFR Part 90.691

LTE Band 2 & LTE Band 25: RSS-133 Issue 6, Section 6.5
 LTE Band 4 & LTE Band 66: RSS-139 Issue 3, Section 6.6
 LTE Band 5: RSS-132 Issue 3, Section 5.5
 LTE Band 12 & LTE Band 13 : RSS-130 Issue 2, Section 4.7

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g), 27.53(c)(2), 90.691:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

RSS-132 Issue 3, Section 5.5, RSS-133 Issue 6, Section 6.6, RSS-139 Issue 3, Section 6.5, RSS-130 Issue 2, Section 4.7:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:

The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details


Test Mode: Link mode

Test Results: Pass


5.7.1 LTE Band 2

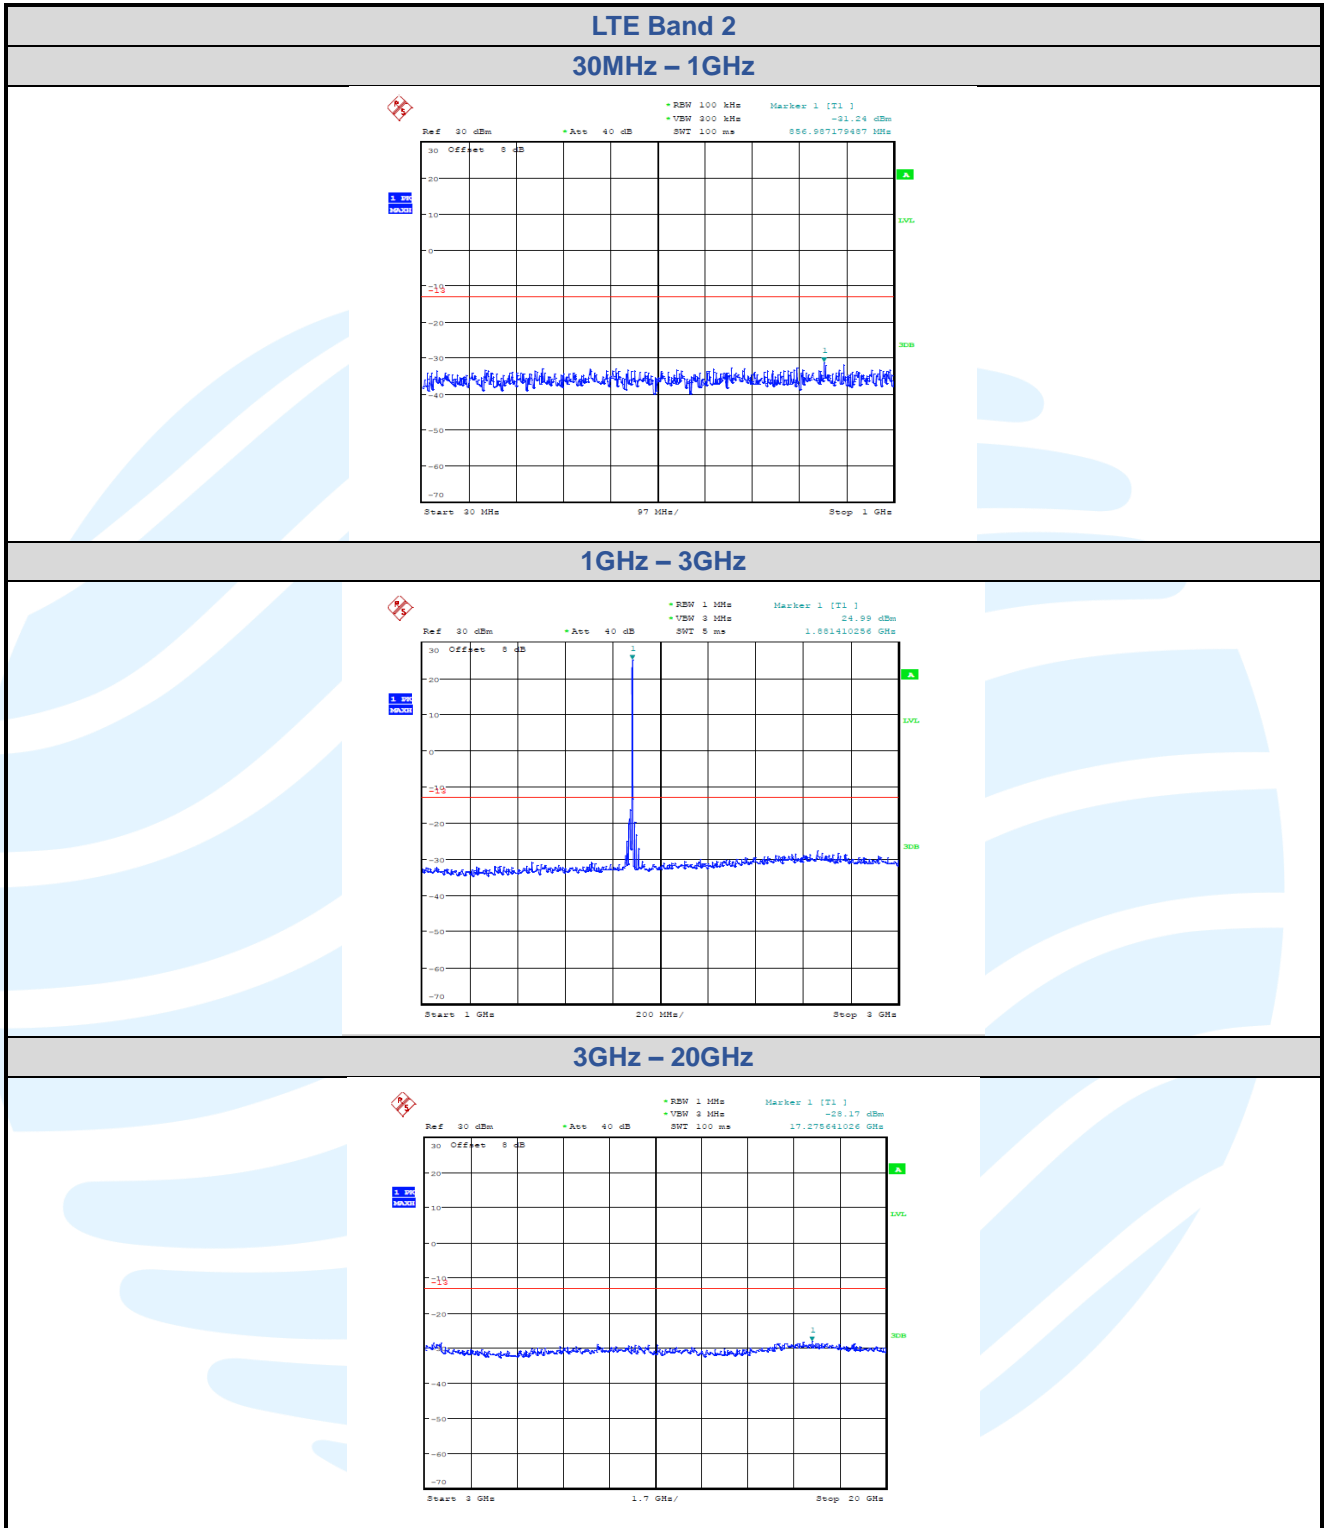


5.7.2 LTE Band 4

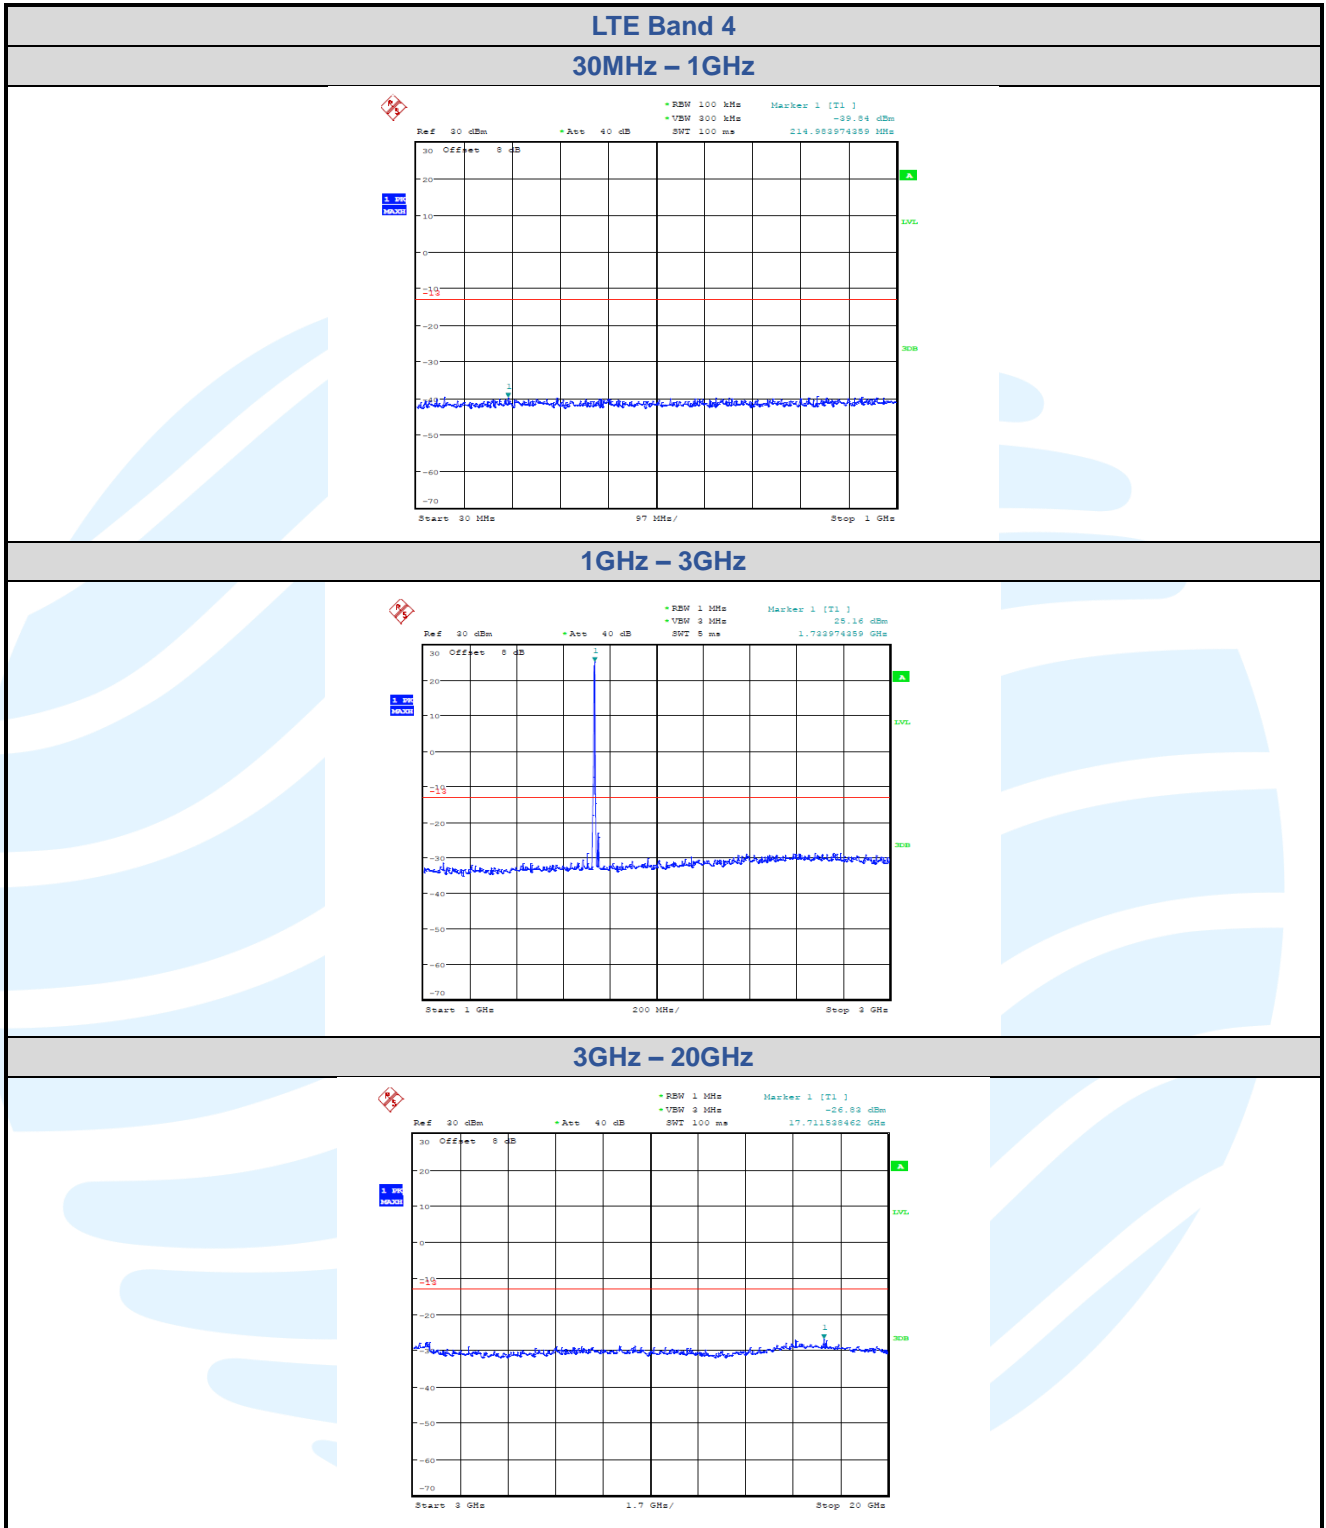


5.7.3 LTE Band 5

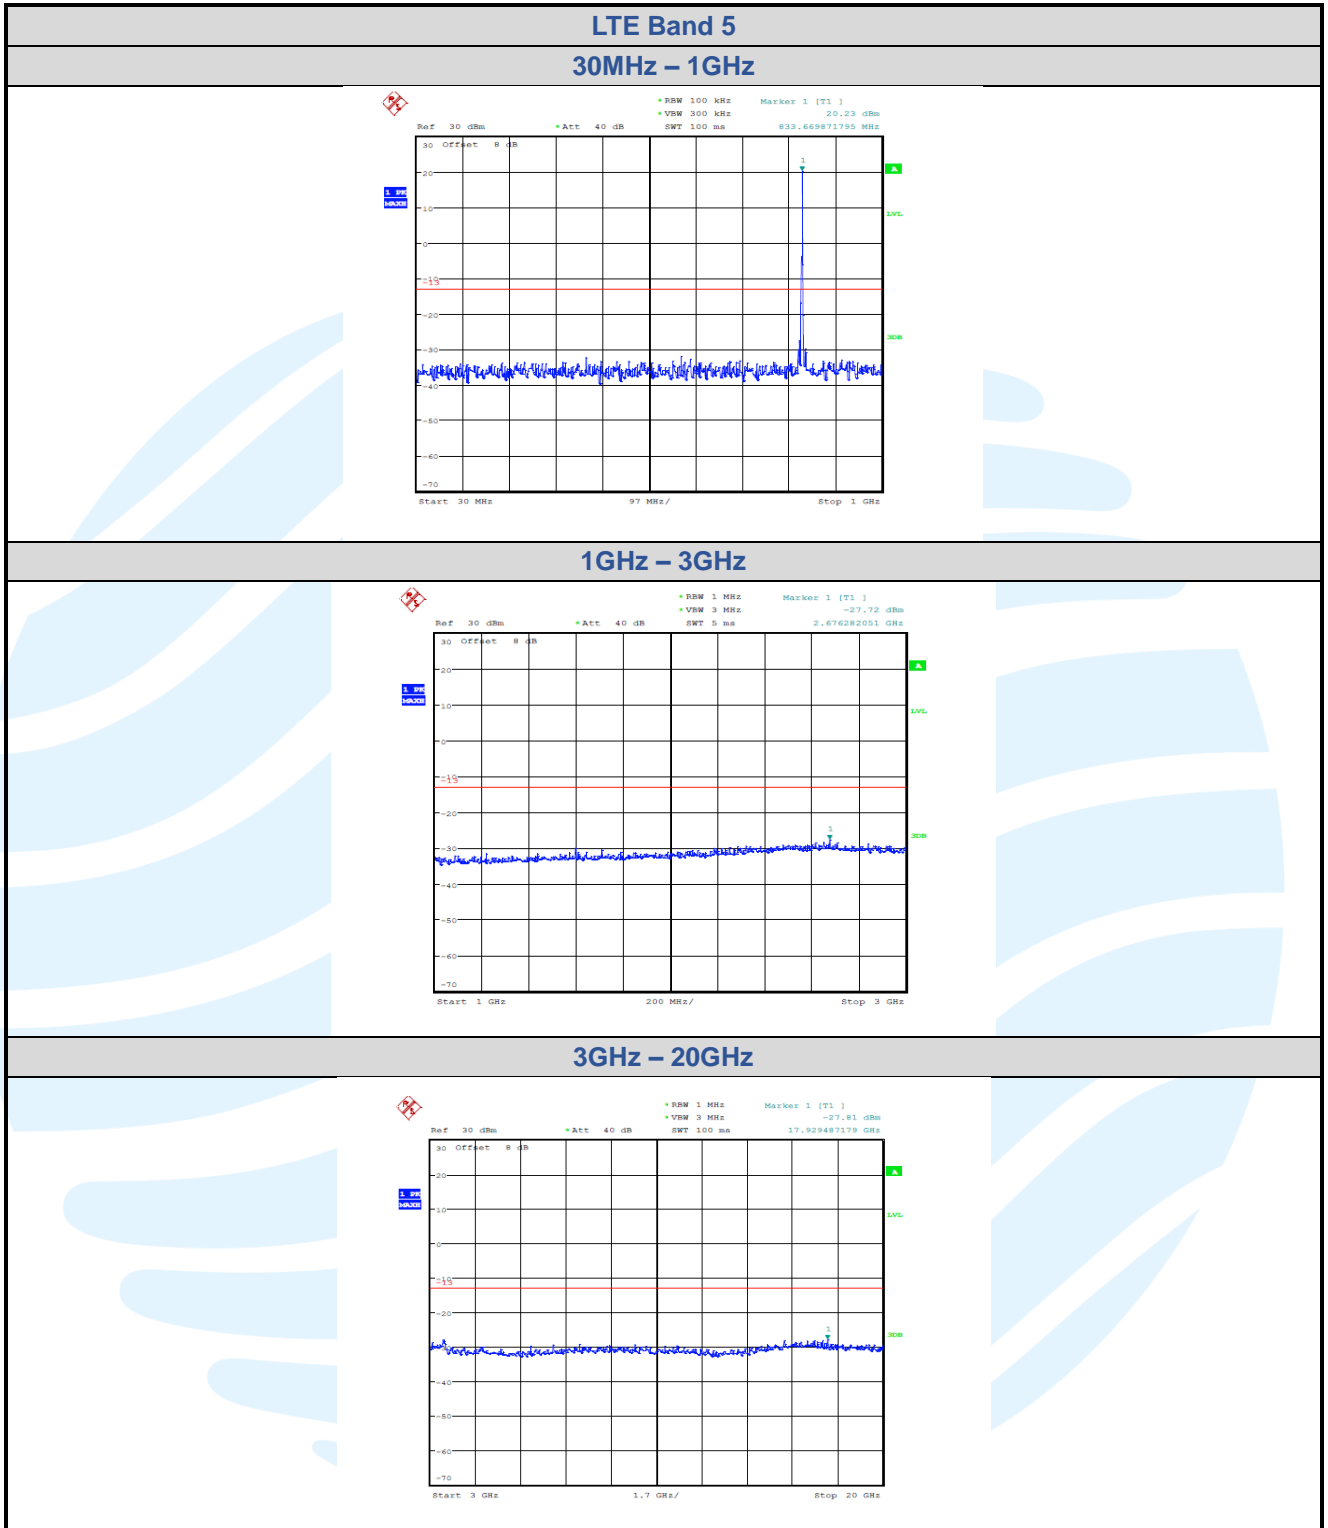


5.7.4 LTE Band 12

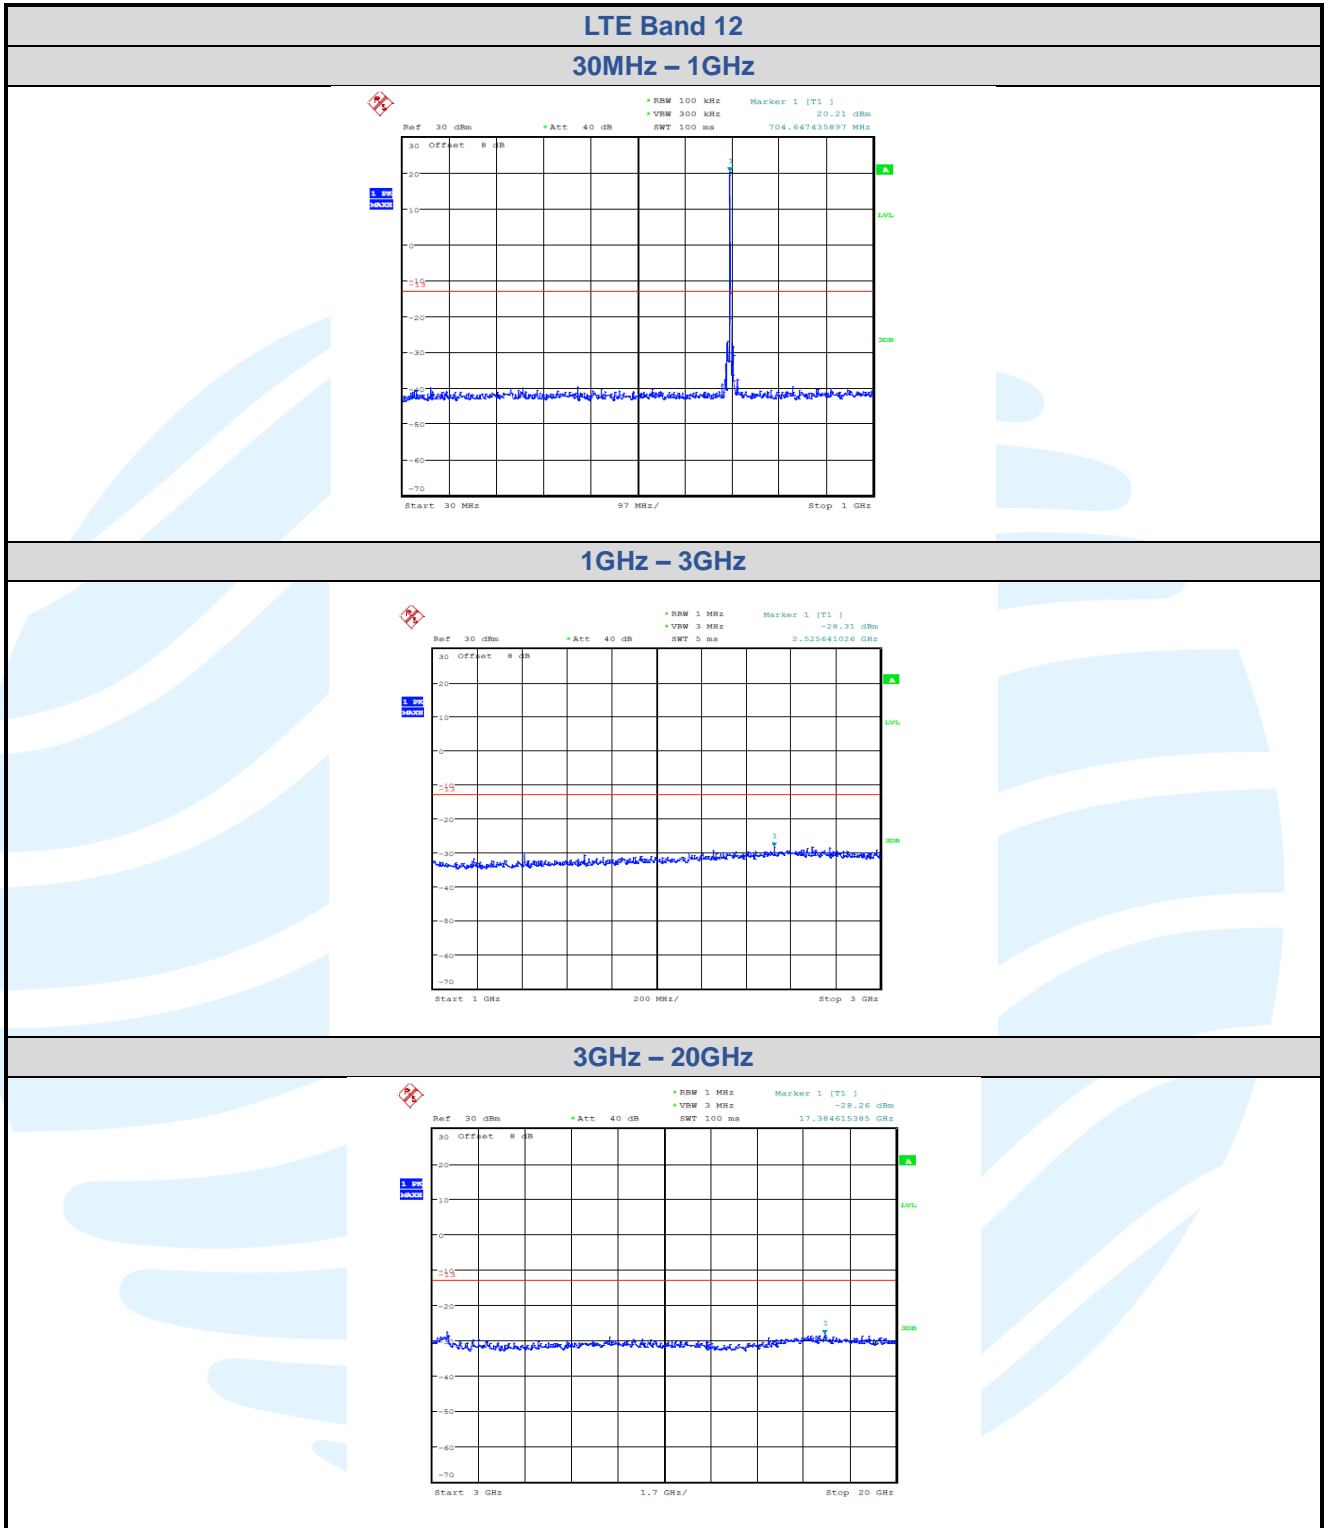


5.7.5 LTE Band 13

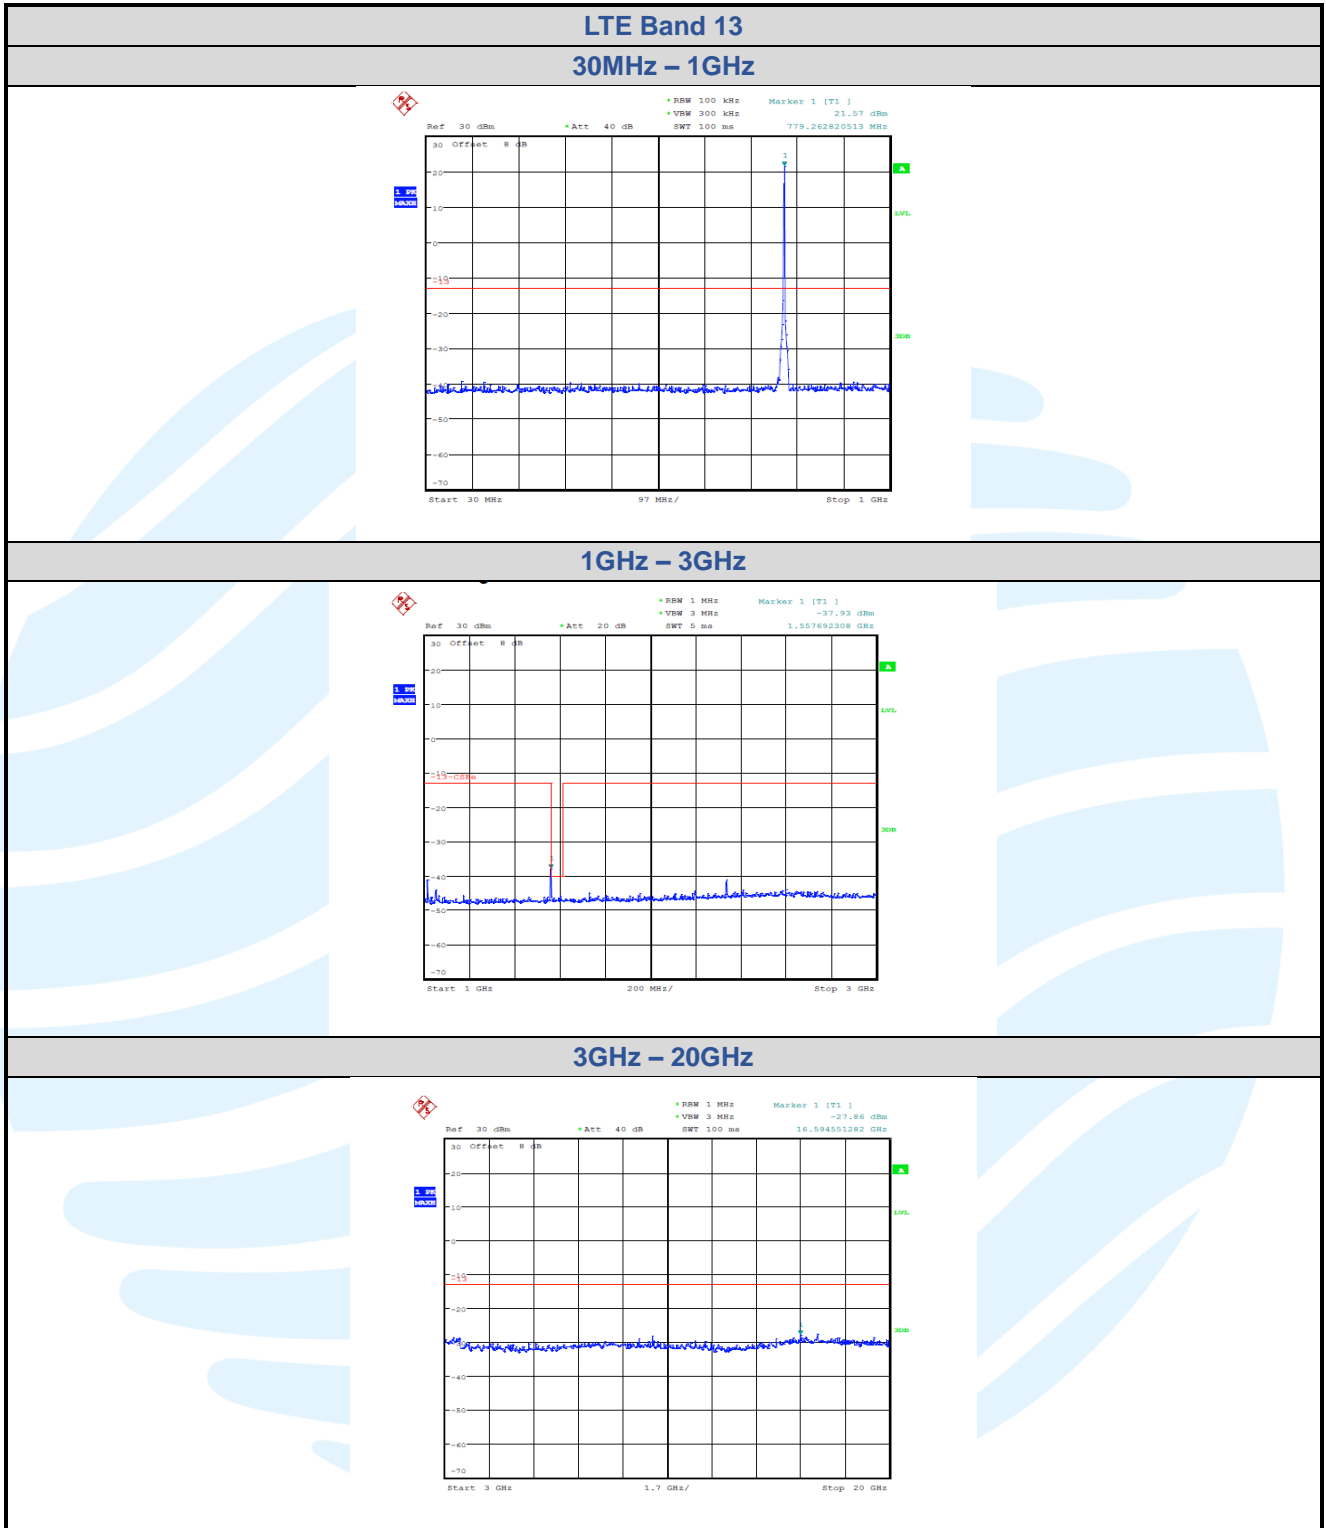


5.7.6 LTE Band 25

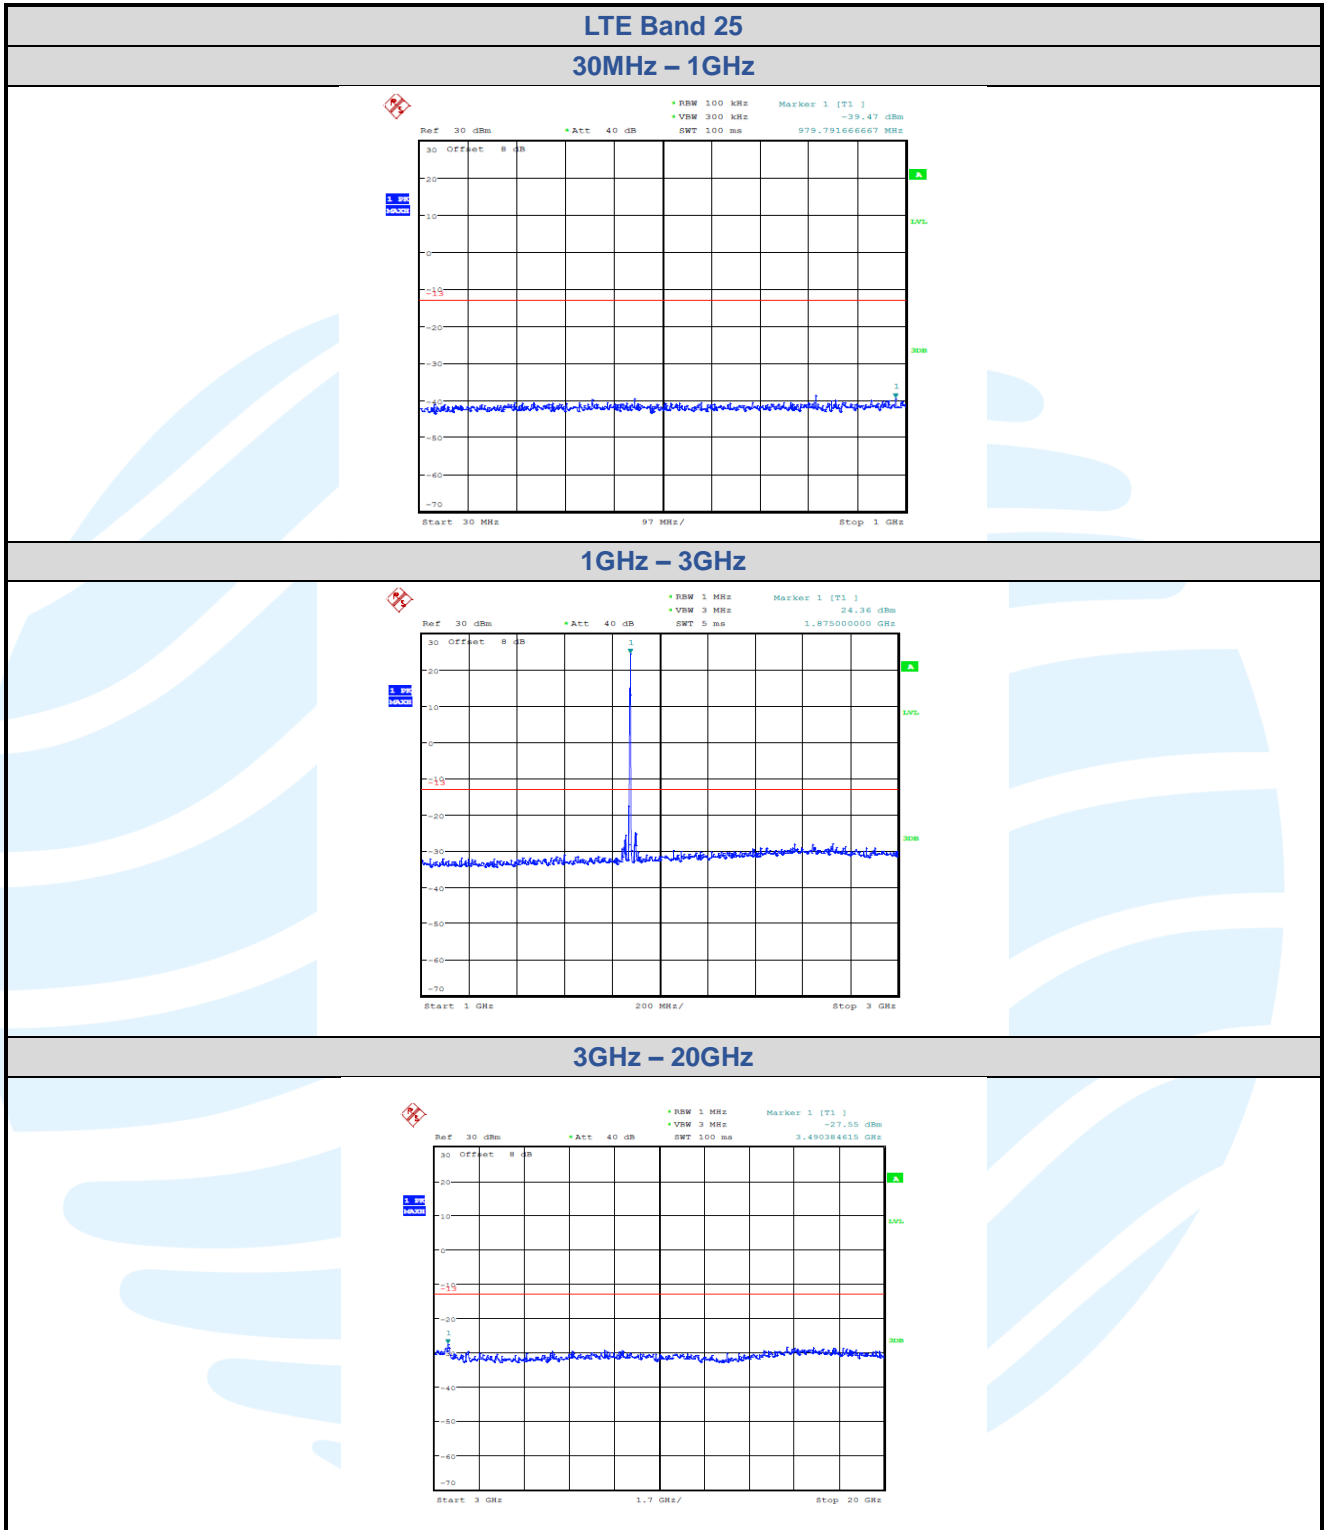


5.7.7 LTE Band 26

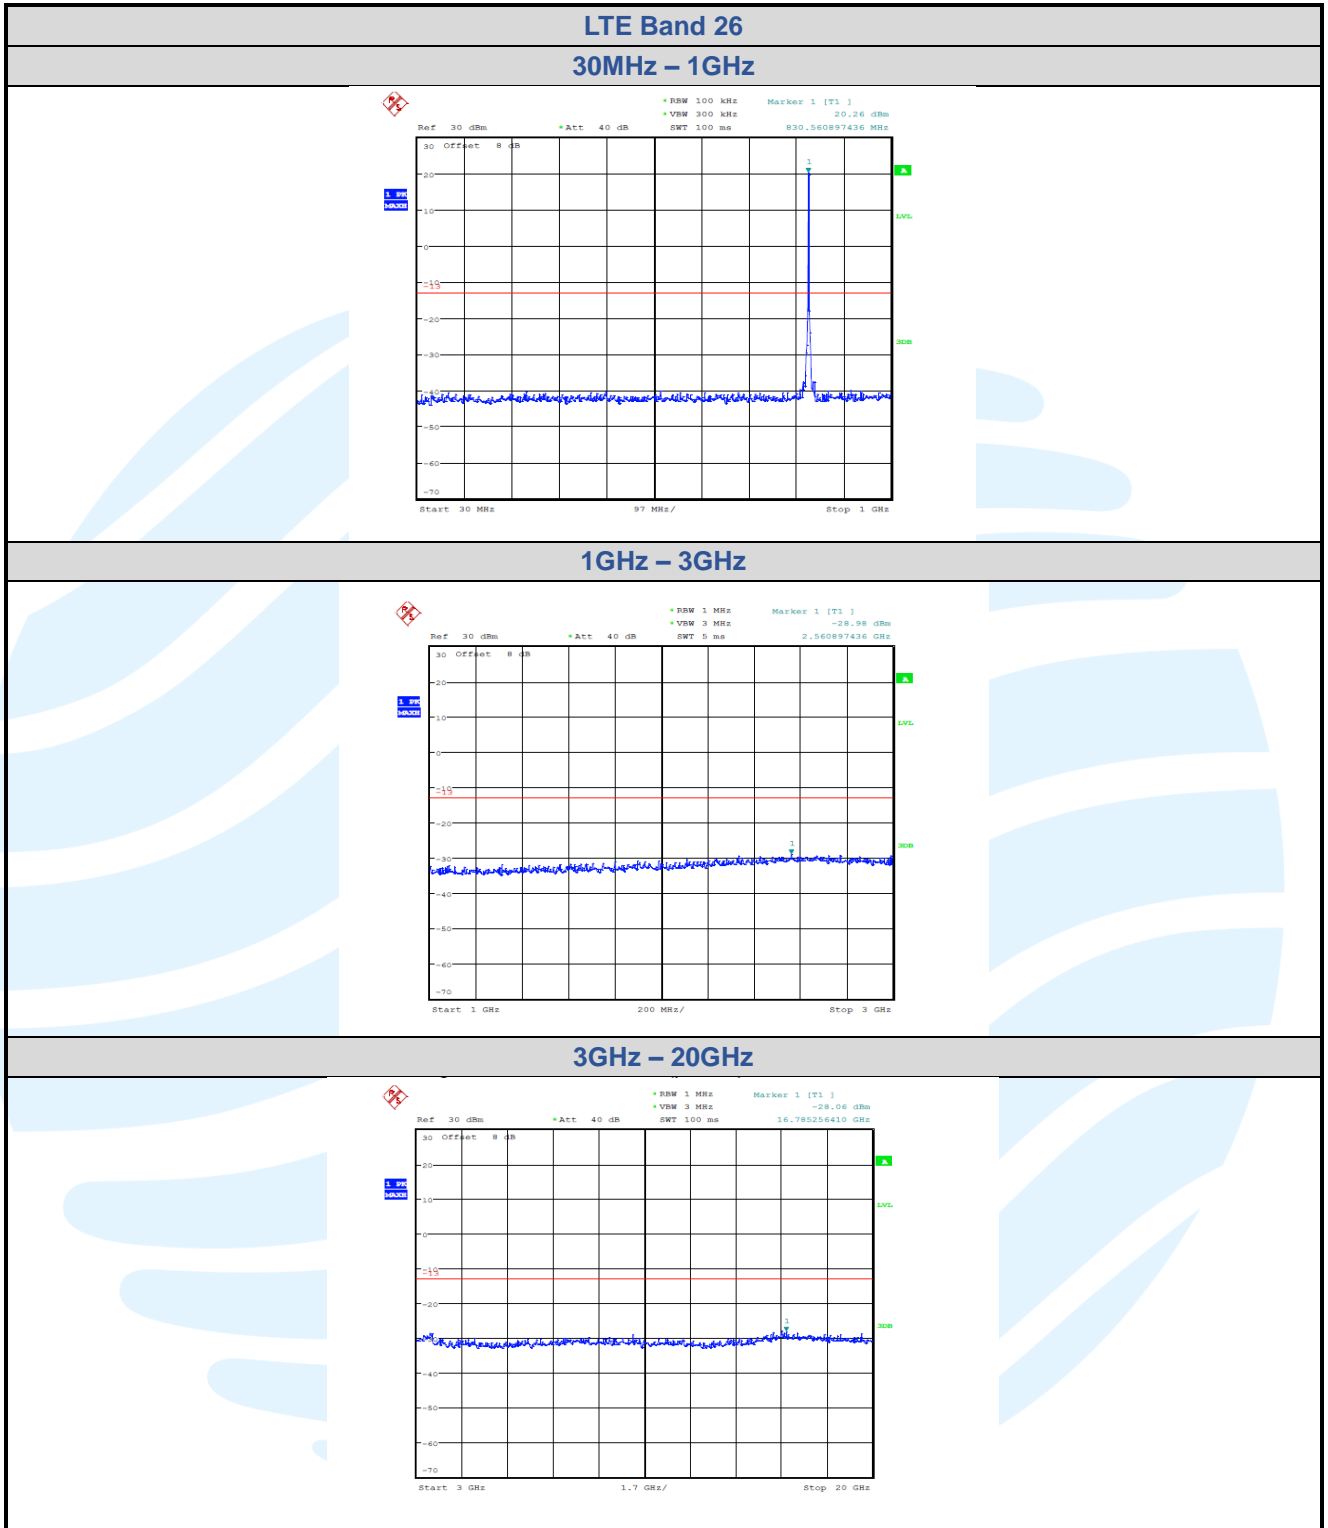

5.7.8 LTE Band 26 (Part 90S)

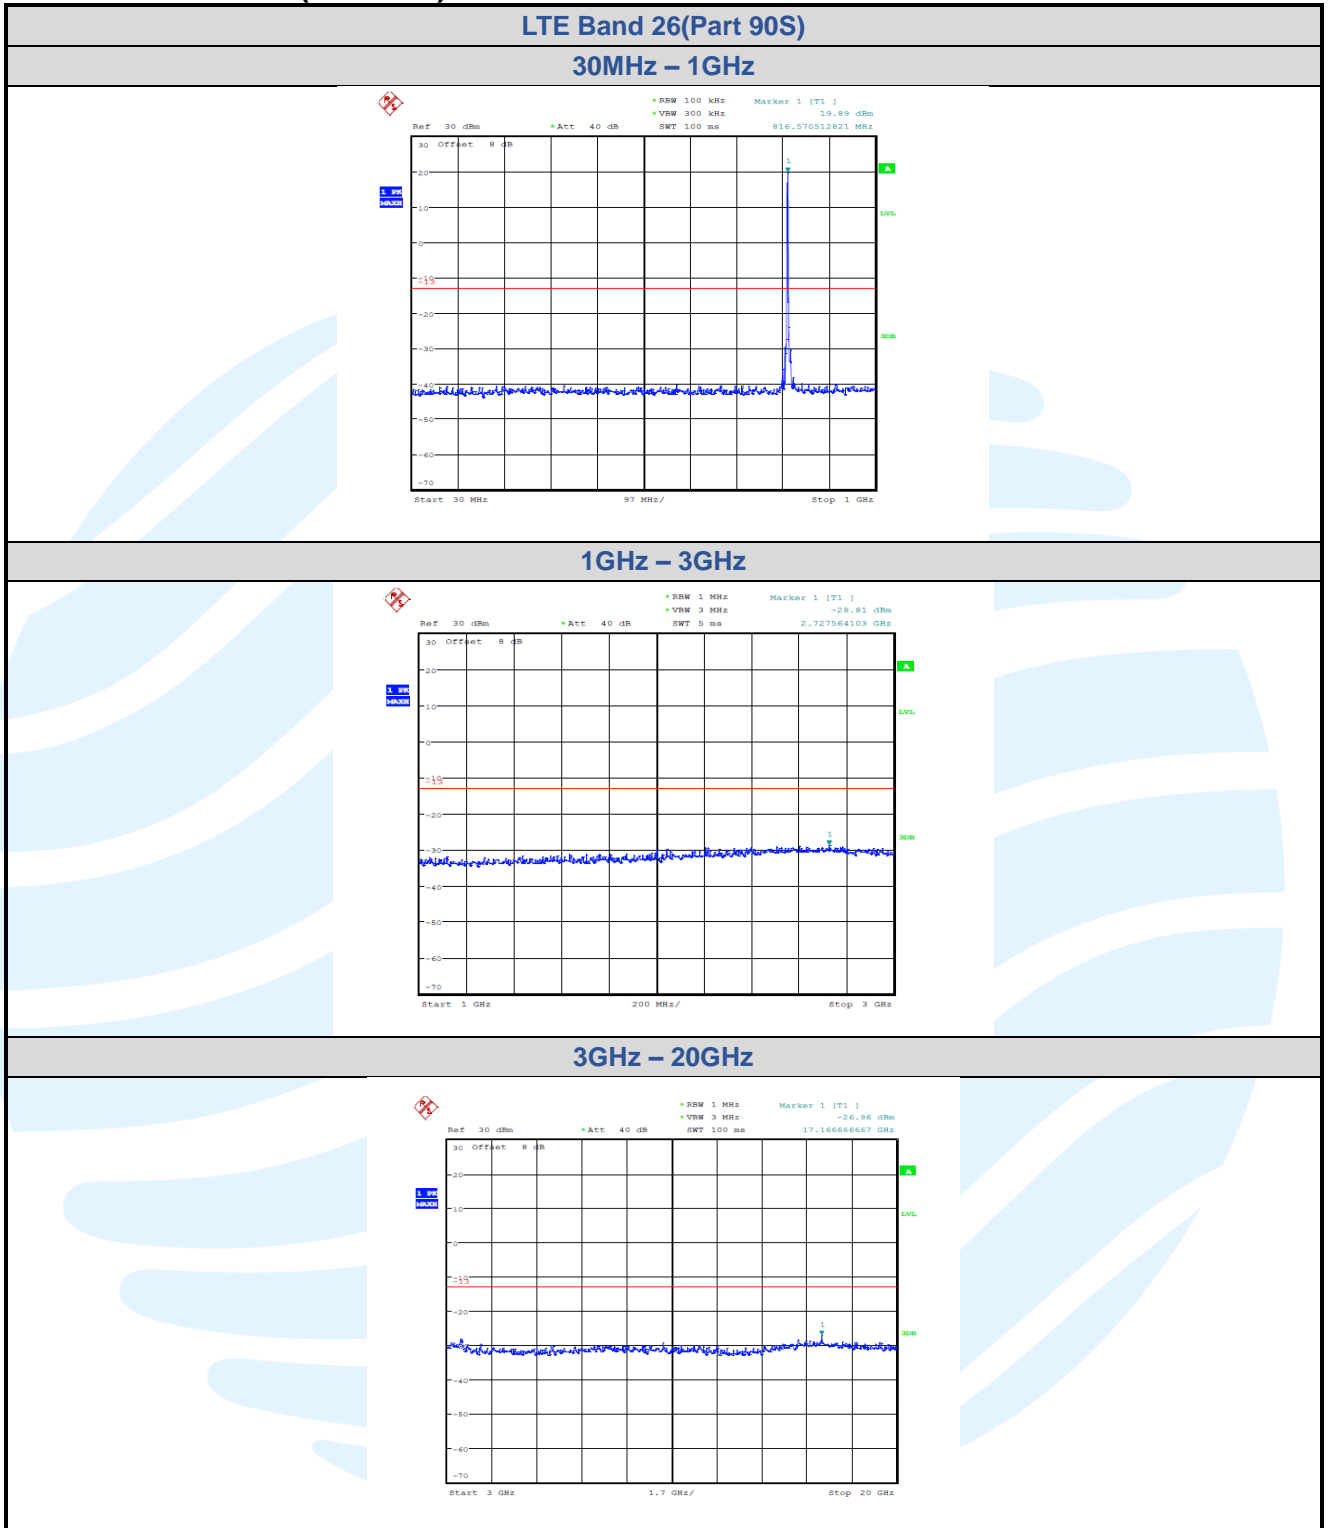

5.7.9 LTE Band 66

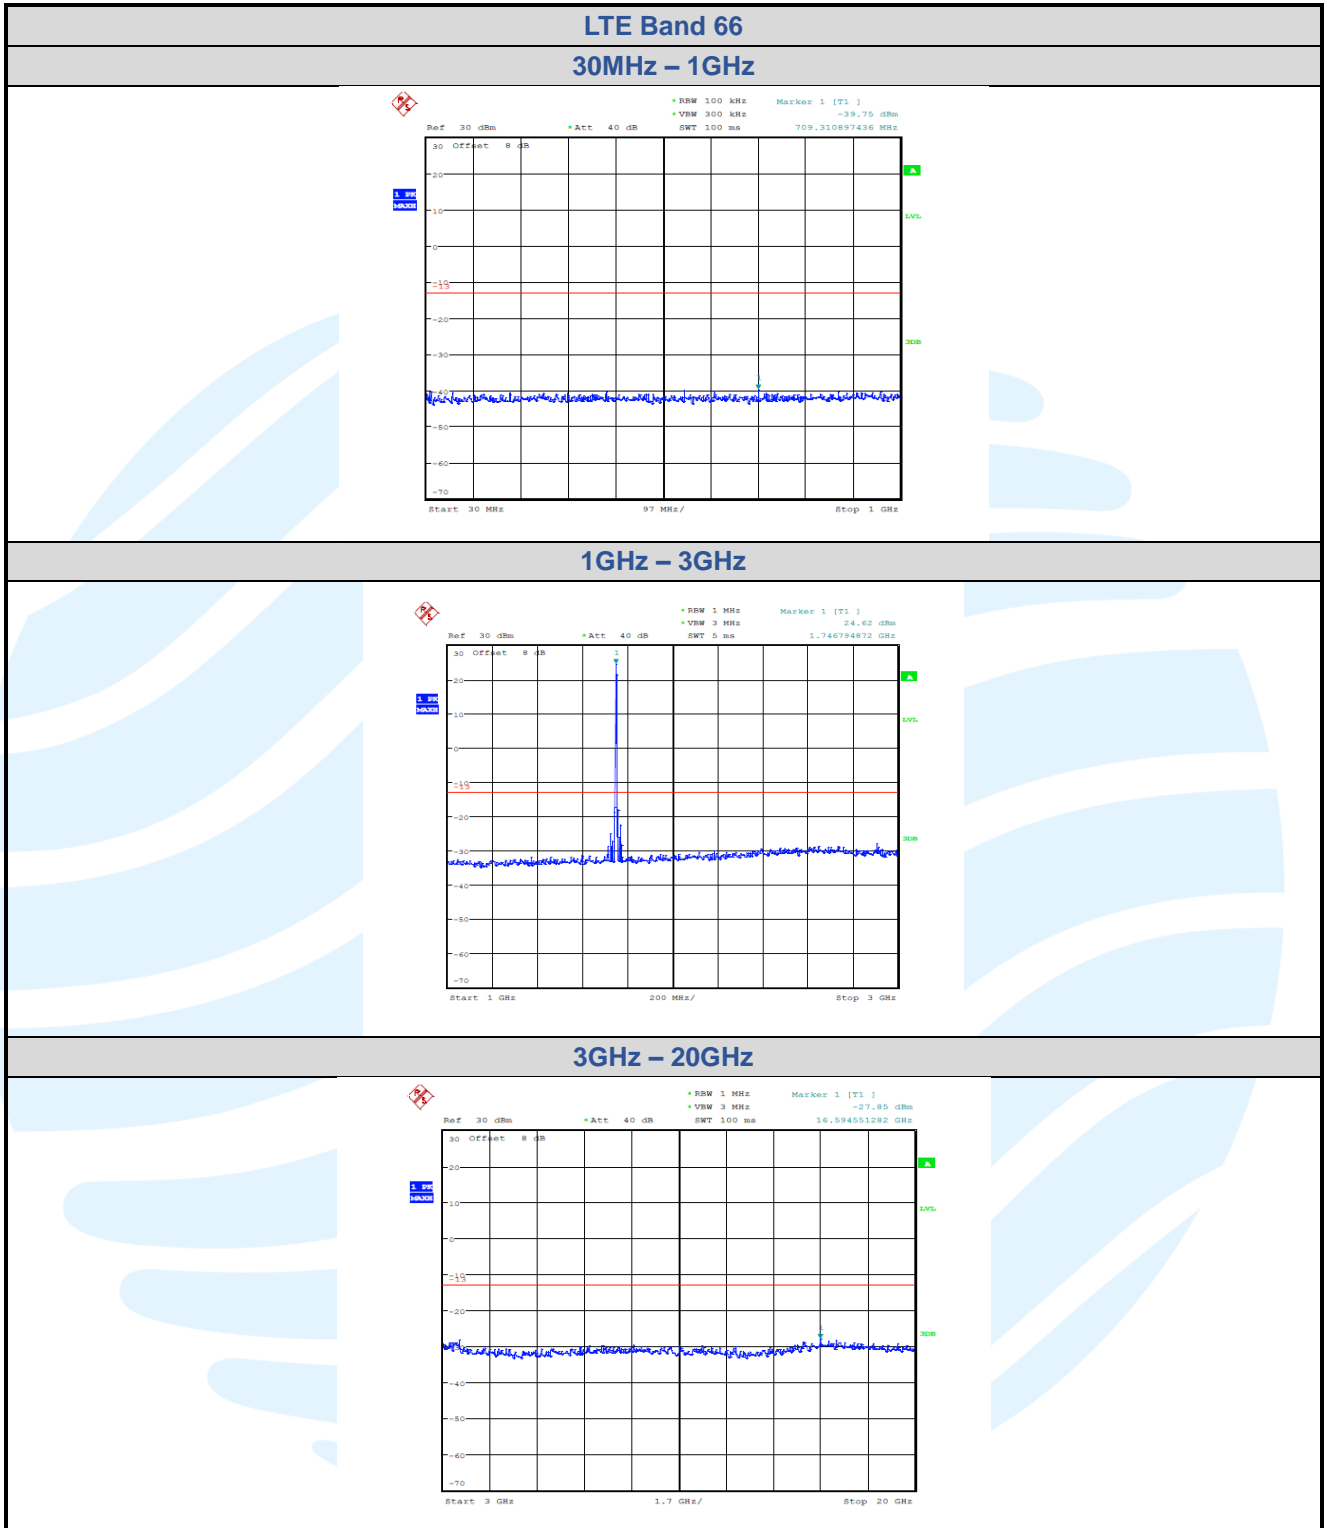

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.238(a)
 LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)
 LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.917(a)
 LTE Band 12 : FCC 47 CFR Part 27.53(g)
 LTE Band 13: FCC 47 CFR Part 27.53
 LTE Band 26: FCC 47 CFR Part 90.691

LTE Band 2 & LTE Band 25: RSS-133 Issue 6, Section 6.5
 LTE Band 4 & LTE Band 66: RSS-139 Issue 3, Section 6.6
 LTE Band 5: RSS-132 Issue 3, Section 5.5
 LTE Band 12 & LTE Band 13: RSS-130 Issue 2, Section 4.7

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Receiver Setup:

| Frequency | Detector | RBW | VBW | Remark |
|------------------|------------|---------|---------|--------|
| 0.009 MHz-30 MHz | Peak | 10 kHz | 30 KHz | Peak |
| 30 MHz-1 GHz | Quasi-peak | 100 kHz | 300 KHz | Peak |
| Above 1 GHz | Peak | 1 MHz | 3 MHz | Peak |

Limits:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g), 27.53(c)(2), 90.691:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53:

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

RSS-132 Issue 3, Section 5.5, RSS-133 Issue 6, Section 6.6, RSS-139 Issue 3, Section 6.5, RSS-130 Issue 2, Section 4.7:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to -13 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

5.8.1 LTE Band 12
worst case of the bandwidth

| No. | Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBi) | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|------------------------|-----------------|------------|-----------|----------|-----------------|-------------|--------------|
| Lowest Channel | | | | | | | |
| 1 | 1411.9 | -41.08 | 4.0 | 3.4 | -41.68 | -13 | Vertical |
| 2 | 2218.8 | -40.68 | 5.0 | 3.3 | -42.38 | -13 | Horizontal |
| 3 | 3568.0 | -50.31 | 6.4 | 4.7 | -52.01 | -13 | Horizontal |
| 4 | 4564.8 | -50.46 | 7.4 | 7.3 | -50.56 | -13 | Horizontal |
| 5 | 5831.6 | -53.61 | 8.4 | 10.5 | -51.51 | -13 | Horizontal |
| 6 | 7478.2 | -54.03 | 9.7 | 14.6 | -49.13 | -13 | Horizontal |
| Middle Channel | | | | | | | |
| 1 | 1419.2 | -40.79 | 4.0 | 3.4 | -41.39 | -13 | Vertical |
| 2 | 2128.8 | -42.37 | 5.0 | 3.3 | -44.07 | -13 | Vertical |
| 3 | 2800.8 | -37.38 | 5.7 | 4.1 | -38.98 | -13 | Vertical |
| 4 | 3573.6 | -49.88 | 6.4 | 4.7 | -51.58 | -13 | Horizontal |
| 5 | 4286.4 | -53.39 | 7.1 | 7.7 | -52.79 | -13 | Vertical |
| 6 | 5639.2 | -54.21 | 8.3 | 10.5 | -52.01 | -13 | Horizontal |
| Highest Channel | | | | | | | |
| 1 | 1411.2 | -41.04 | 4.0 | 3.4 | -41.64 | -13 | Vertical |
| 2 | 2125.8 | -43 | 5.0 | 3.3 | -44.7 | -13 | Vertical |
| 3 | 2817.7 | -37.72 | 5.7 | 4.1 | -39.32 | -13 | Vertical |
| 4 | 3506.0 | -51.7 | 6.4 | 4.7 | -53.4 | -13 | Horizontal |
| 5 | 4211.6 | -53.29 | 7.0 | 7.7 | -52.59 | -13 | Horizontal |
| 6 | 5618.4 | -53.11 | 8.3 | 9.5 | -51.91 | -13 | Vertical |

5.9 FREQUENCY STABILITY

FCC 47 CFR Part 2.1055 &
 FCC 47 CFR Part 22.355 &
 FCC 47 CFR Part 24.235 &
 FCC 47 CFR Part 27.54,

Test Requirement:

LTE Band 2 & LTE Band 25: RSS-133 Issue 6, Section 6.3
LTE Band 4 & LTE Band 66: RSS-139 Issue 3, Section 6.4
LTE Band 5: RSS-132 Issue 3, Section 5.3
LTE Band 12 & LTE Band 13: RSS-130 Issue 2, Section 4.5

Test Method:

ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:

FCC 47 CFR Part 22.355, FCC 47 CFR Par 90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS-132 Issue 3, Section 5.3:

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations and ± 1.5 ppm for base stations

RSS-133 Issue 6, Section 6.3:

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

RSS-139 Issue 3, Section 6.4, RSS-130 Issue 2, Section 4.5:

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

- 1) Use CMW 500 or CMU 200 with Frequency Error measurement capability.
 - a) Temp. = -30° to $+50^{\circ}\text{C}$
 - b) Voltage = low voltage, 2.8 Vdc, Normal, 3.8 Vdc and High voltage, 4.6Vdc.
- 2) Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

- 3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

5.9.1 LTE Band 2

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Pass/ Fail |
|-------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|------------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 2 / 20MHz / Full RB | | | | | | | |
| QPSK | 18900 / 1880.0 | VL | TN | 2.35 | 0.0013 | N/A | Pass |
| | | VN | | 5.12 | 0.0027 | | Pass |
| | | VH | | 4.32 | 0.0023 | | Pass |
| | | VN | 50 | 4.31 | 0.0023 | | Pass |
| | | | 40 | 4.23 | 0.0023 | | Pass |
| | | | 30 | 2.45 | 0.0013 | | Pass |
| | | | 20 | 6.47 | 0.0034 | | Pass |
| | | | 10 | 7.32 | 0.0039 | | Pass |
| | | | 0 | 4.39 | 0.0023 | | Pass |
| | | | -10 | 3.98 | 0.0021 | | Pass |
| | | | -20 | 4.09 | 0.0022 | | Pass |
| | | | -30 | 4.60 | 0.0024 | | Pass |

5.9.2 LTE Band 4

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Pass/ Fail |
|-------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|------------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 4 / 20MHz / Full RB | | | | | | | |
| QPSK | 20175 / 1732.5 | VL | TN | 3.21 | 0.0019 | N/A | Pass |
| | | VN | | 2.50 | 0.0014 | | Pass |
| | | VH | | 2.76 | 0.0016 | | Pass |
| | | VN | 50 | 2.76 | 0.0016 | | Pass |
| | | | 40 | 3.72 | 0.0021 | | Pass |
| | | | 30 | 3.67 | 0.0021 | | Pass |
| | | | 20 | 4.31 | 0.0025 | | Pass |
| | | | 10 | 2.17 | 0.0013 | | Pass |
| | | | 0 | 2.76 | 0.0016 | | Pass |
| | | | -10 | 3.51 | 0.0020 | | Pass |
| | | | -20 | 2.31 | 0.0013 | | Pass |
| | | | -30 | 1.12 | 0.0006 | | Pass |

5.9.3 LTE Band 5

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Result |
|-------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|--------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 5 / 10MHz / Full RB | | | | | | | |
| QPSK | 20525 / 836.5 | VL | TN | 0.09 | 0.0001 | ± 2.5 | Pass |
| | | VN | | 1.02 | 0.0012 | ± 2.5 | Pass |
| | | VH | | -1.23 | -0.0015 | ± 2.5 | Pass |
| | | VN | 50 | 4.66 | 0.0056 | ± 2.5 | Pass |
| | | | 40 | 0.92 | 0.0011 | ± 2.5 | Pass |
| | | | 30 | 4.92 | 0.0059 | ± 2.5 | Pass |
| | | | 20 | 0.31 | 0.0004 | ± 2.5 | Pass |
| | | | 10 | 5.19 | 0.0062 | ± 2.5 | Pass |
| | | | 0 | 1.59 | 0.0019 | ± 2.5 | Pass |
| | | | -10 | -0.94 | -0.0011 | ± 2.5 | Pass |
| | | | -20 | 1.10 | 0.0013 | ± 2.5 | Pass |
| | | | -30 | 1.60 | 0.0019 | ± 2.5 | Pass |

5.9.4 LTE Band 12

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Result |
|--------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|--------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 12 / 10MHz / Full RB | | | | | | | |
| QPSK | 23095 / 707.5 | VL | TN | -0.37 | -0.0005 | N/A | Pass |
| | | VN | | -4.06 | -0.0057 | | Pass |
| | | VH | | -3.06 | -0.0043 | | Pass |
| | | VN | 50 | -5.45 | -0.0077 | | Pass |
| | | | 40 | -2.96 | -0.0042 | | Pass |
| | | | 30 | -6.02 | -0.0085 | | Pass |
| | | | 20 | -1.44 | -0.0020 | | Pass |
| | | | 10 | -5.12 | -0.0072 | | Pass |
| | | | 0 | -1.62 | -0.0023 | | Pass |
| | | | -10 | -4.22 | -0.0060 | | Pass |
| | | | -20 | -3.36 | -0.0047 | | Pass |
| | | | -30 | -1.83 | -0.0026 | | Pass |

5.9.5 LTE Band 13

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Result |
|--------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|--------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 13 / 10MHz / Full RB | | | | | | | |
| QPSK | 23230 / 782 | VL | TN | -2.43 | -0.0031 | N/A | Pass |
| | | VN | | -4.12 | -0.0053 | | Pass |
| | | VH | | -7.20 | -0.0092 | | Pass |
| | | VN | 50 | -2.56 | -0.0033 | | Pass |
| | | | 40 | -1.87 | -0.0024 | | Pass |
| | | | 30 | -2.59 | -0.0033 | | Pass |
| | | | 20 | -0.89 | -0.0011 | | Pass |
| | | | 10 | -4.75 | -0.0061 | | Pass |
| | | | 0 | -2.55 | -0.0033 | | Pass |
| | | | -10 | -3.24 | -0.0041 | | Pass |
| | | | -20 | -2.46 | -0.0031 | | Pass |
| | | | -30 | -5.02 | -0.0064 | | Pass |

5.9.6 LTE Band 25

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Result |
|--------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|--------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 25 / 20MHz / Full RB | | | | | | | |
| QPSK | 26340 / 1880.0 | VL | TN | 3.45 | 0.0018 | N/A | Pass |
| | | VN | | 5.82 | 0.0031 | | Pass |
| | | VH | | 3.87 | 0.0021 | | Pass |
| | | VN | 50 | 0.79 | 0.0004 | | Pass |
| | | | 40 | 0.14 | 0.0001 | | Pass |
| | | | 30 | -3.23 | -0.0017 | | Pass |
| | | | 20 | -3.18 | -0.0017 | | Pass |
| | | | 10 | 1.81 | 0.0010 | | Pass |
| | | | 0 | 2.8 | 0.0015 | | Pass |
| | | | -10 | -3.72 | -0.0020 | | Pass |
| | | | -20 | -4.33 | -0.0023 | | Pass |
| | | | -30 | 3.76 | 0.0020 | | Pass |

5.9.7 LTE Band 26

| Modulation | Channel/ Frequency (MHz) | Voltage | Temperature | Deviation | Deviation | Limit | Result |
|--------------------------------------|--------------------------------|---------|-------------|-----------|-----------|-------|--------|
| | | (Vdc) | (°C) | (Hz) | (ppm) | (ppm) | |
| LTE Band 26 / 15MHz / Full RB | | | | | | | |
| QPSK | 26915 / 836.5 | VL | TN | -4.59 | -0.0055 | ± 2.5 | Pass |
| | | VN | | 0.28 | 0.0003 | ± 2.5 | Pass |
| | | VH | | 2.19 | 0.0026 | ± 2.5 | Pass |
| | | VN | 50 | -2.45 | -0.0029 | ± 2.5 | Pass |
| | | | 40 | -2.77 | -0.0033 | ± 2.5 | Pass |
| | | | 30 | -1.66 | -0.0020 | ± 2.5 | Pass |
| | | | 20 | 0.98 | 0.0012 | ± 2.5 | Pass |
| | | | 10 | 2.78 | 0.0033 | ± 2.5 | Pass |
| | | | 0 | -1.55 | -0.0019 | ± 2.5 | Pass |
| | | | -10 | -1.54 | -0.0018 | ± 2.5 | Pass |
| | | | -20 | 0.34 | 0.0004 | ± 2.5 | Pass |
| | | | -30 | -2.23 | -0.0027 | ± 2.5 | Pass |

5.9.8 LTE Band 26 (Part 90S)

| Modulation | Channel/ Frequency (MHz) | Voltage (Vdc) | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
|------------|--------------------------------|------------------|---------------------|-------------------|--------------------|----------------|--------|
| | | | | | | | |
| QPSK | 26740 / 819 | VL | TN | 4.98 | 0.0061 | ± 2.5 | Pass |
| | | VN | | -0.79 | -0.0010 | ± 2.5 | Pass |
| | | VH | | -3.70 | -0.0045 | ± 2.5 | Pass |
| | | VN | 50 | -3.40 | -0.0042 | ± 2.5 | Pass |
| | | | 40 | -3.14 | -0.0038 | ± 2.5 | Pass |
| | | | 30 | -5.82 | -0.0071 | ± 2.5 | Pass |
| | | | 20 | 0.66 | 0.0008 | ± 2.5 | Pass |
| | | | 10 | -0.29 | -0.0004 | ± 2.5 | Pass |
| | | | 0 | 4.45 | 0.0054 | ± 2.5 | Pass |
| | | | -10 | -5.37 | -0.0066 | ± 2.5 | Pass |
| | | | -20 | -9.11 | -0.0111 | ± 2.5 | Pass |
| | | | -30 | -11.34 | -0.0138 | ± 2.5 | Pass |

5.9.9 LTE Band 66

| Modulation | Channel/ Frequency (MHz) | Voltage (Vdc) | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
|------------|--------------------------------|------------------|---------------------|-------------------|--------------------|----------------|--------|
| | | | | | | | |
| QPSK | 132322 / 1745 | VL | TN | -4.59 | -0.0026 | N/A | Pass |
| | | VN | | -4.26 | -0.0024 | | Pass |
| | | VH | | -7.40 | -0.0042 | | Pass |
| | | VN | 50 | -6.84 | -0.0039 | | Pass |
| | | | 40 | -7.79 | -0.0045 | | Pass |
| | | | 30 | -5.79 | -0.0033 | | Pass |
| | | | 20 | -4.35 | -0.0025 | | Pass |
| | | | 10 | -5.55 | -0.0032 | | Pass |
| | | | 0 | -3.22 | -0.0018 | | Pass |
| | | | -10 | -2.53 | -0.0014 | | Pass |
| | | | -20 | -6.59 | -0.0038 | | Pass |
| | | | -30 | -7.00 | -0.0040 | | Pass |

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
