


EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 110V/60Hz

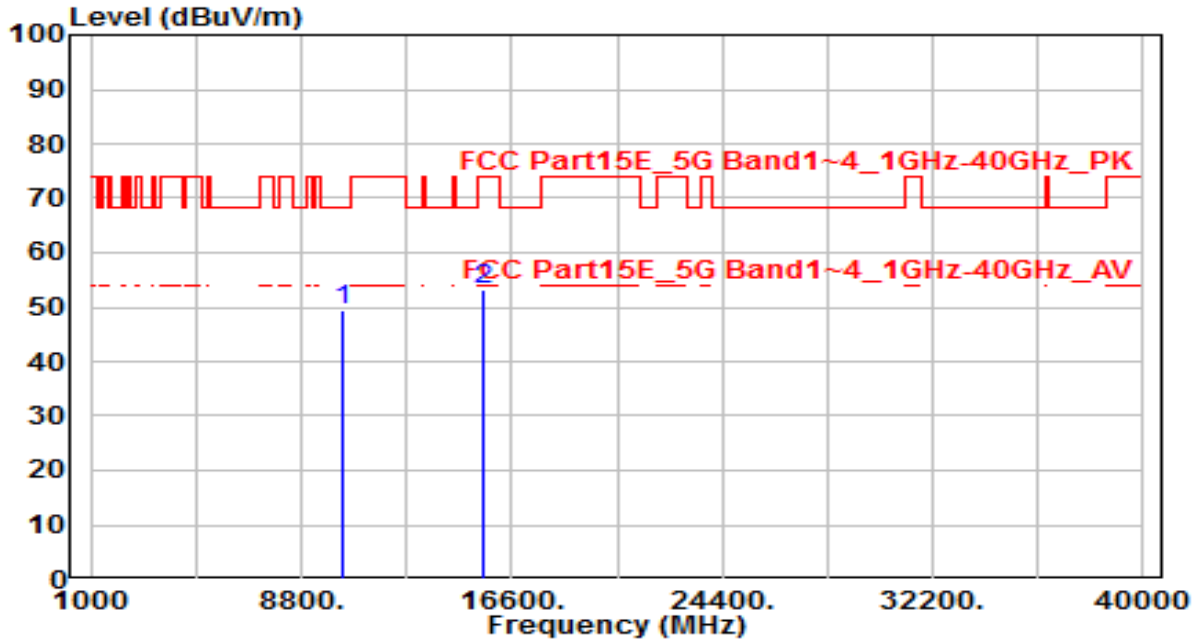


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	31.43	18.01	49.44	-18.76	68.20	150	360	Peak
2	15540.000	32.06	21.25	53.31	-20.69	74.00	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 110V/60Hz

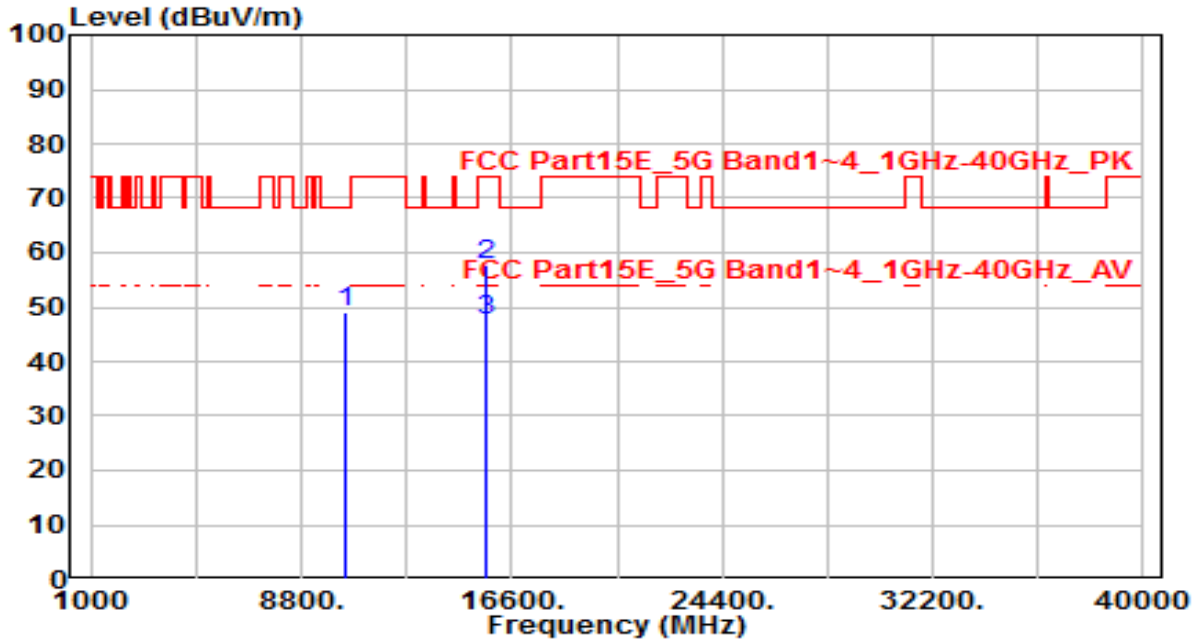


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	30.81	18.33	49.14	-19.06	68.20	150	360	Peak
2	* 15660.000	36.74	20.95	57.70	-16.30	74.00	150	40	Peak
3	* 15660.000	26.75	20.95	47.70	-6.30	54.00	150	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 110V/60Hz

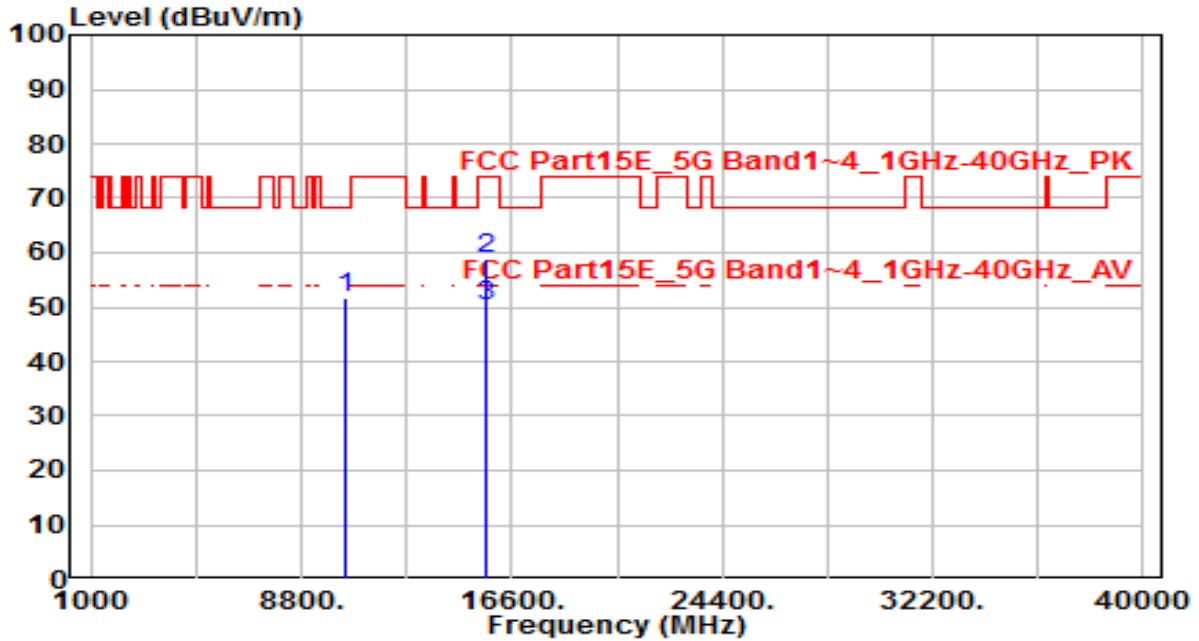


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	33.25	18.33	51.58	-16.62	68.20	150	360	Peak
2	* 15660.000	37.75	20.95	58.70	-15.30	74.00	150	15	Peak
3	* 15660.000	29.26	20.95	50.21	-3.79	54.00	150	15	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 110V/60Hz

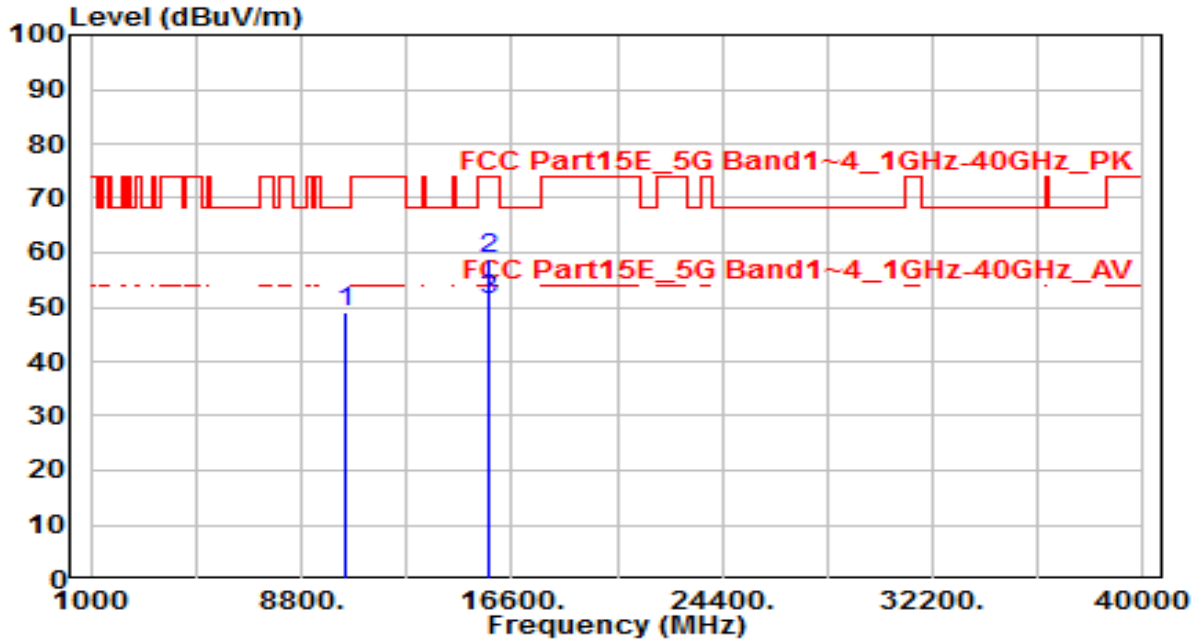


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	30.47	18.49	48.96	-19.24	68.20	150	360	Peak
2	* 15720.000	38.23	20.80	59.03	-14.97	74.00	150	50	Peak
3	* 15720.000	30.62	20.80	51.42	-2.58	54.00	150	50	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 110V/60Hz

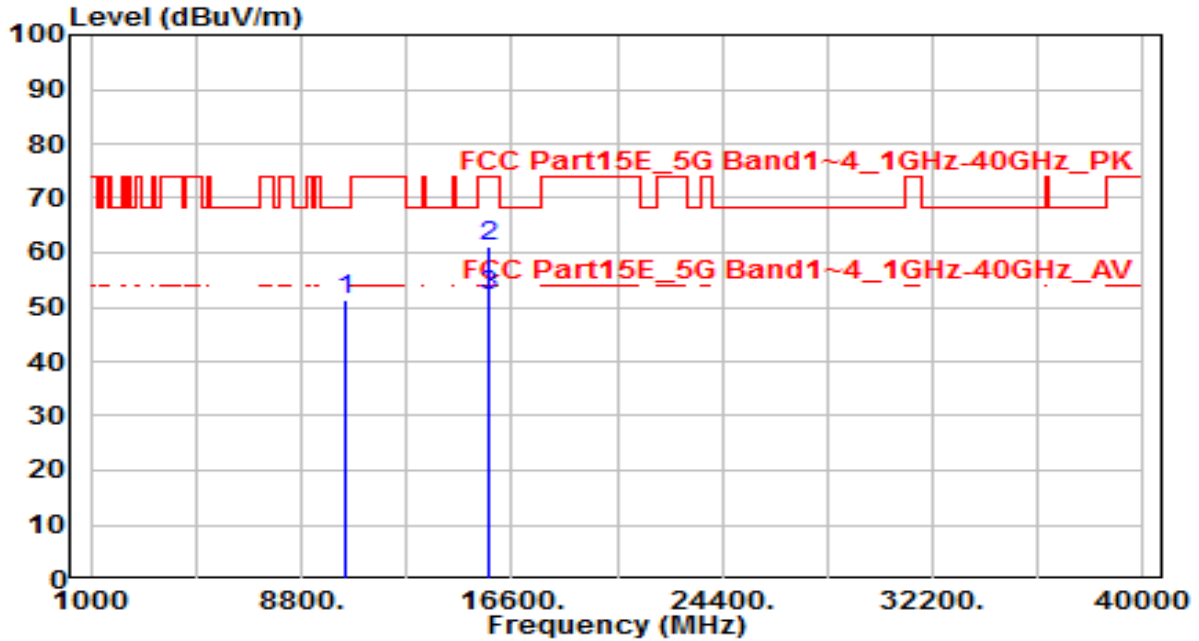


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	32.72	18.49	51.21	-16.99	68.20	150	360	Peak
2	* 15720.000	40.50	20.80	61.31	-12.69	74.00	150	15	Peak
3	* 15720.000	31.25	20.80	52.05	-1.95	54.00	150	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

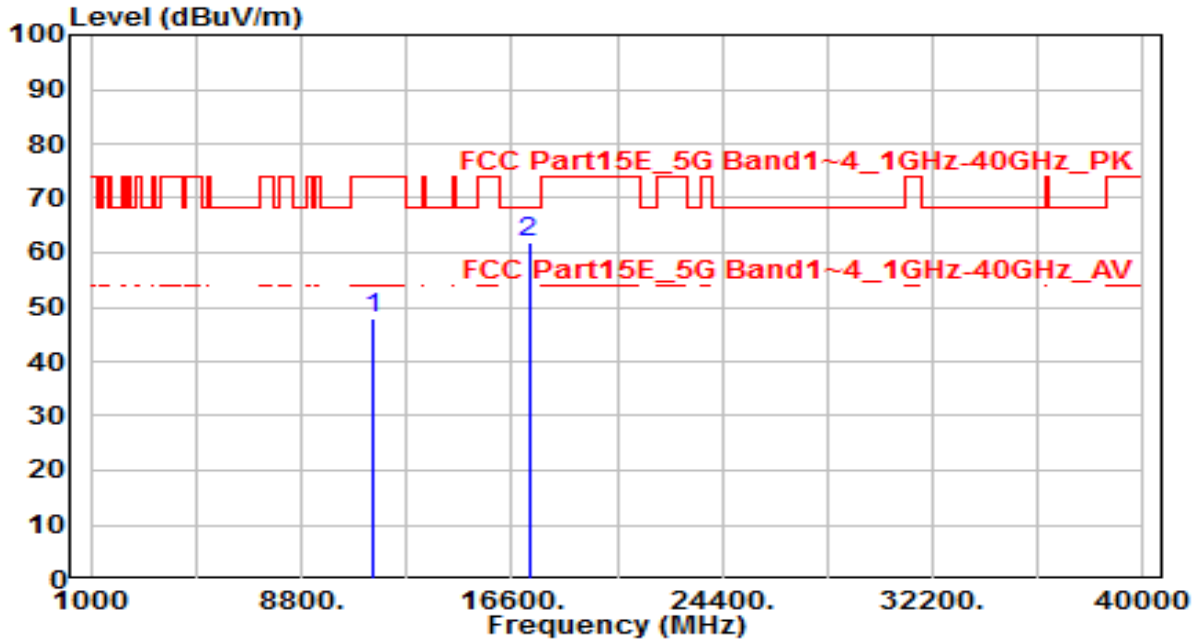


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	27.82	20.03	47.86	-26.14	74.00	150	360	Peak
2	* 17235.000	35.99	26.08	62.07	-6.13	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

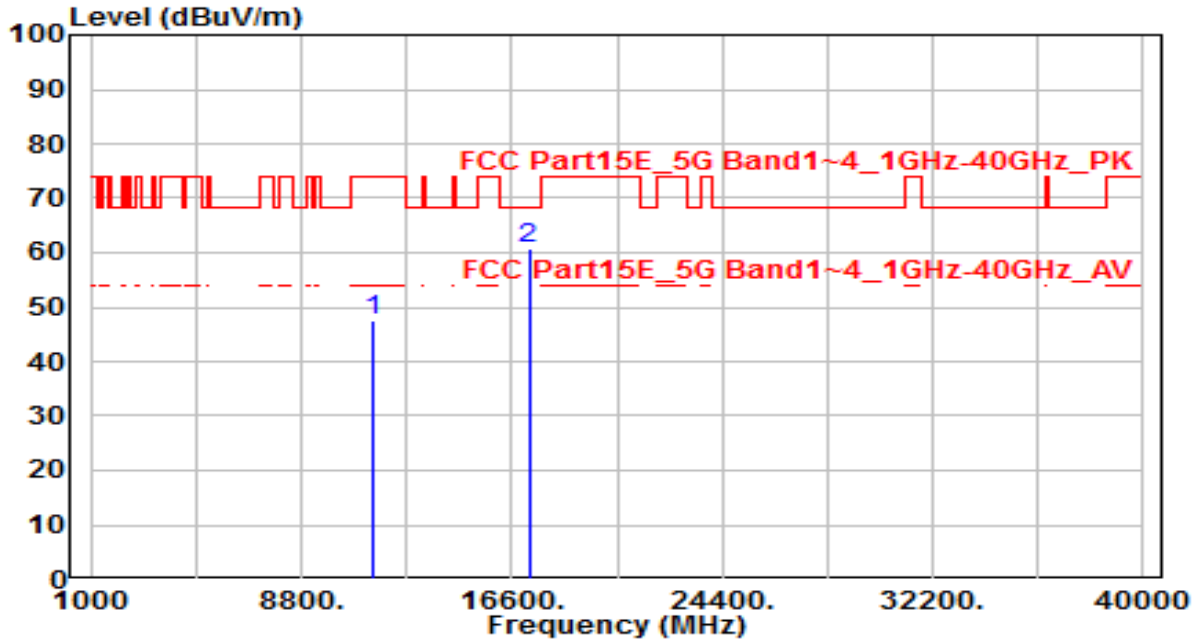


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	27.64	20.03	47.67	-26.33	74.00	150	360	Peak
2	* 17235.000	34.59	26.08	60.67	-7.53	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

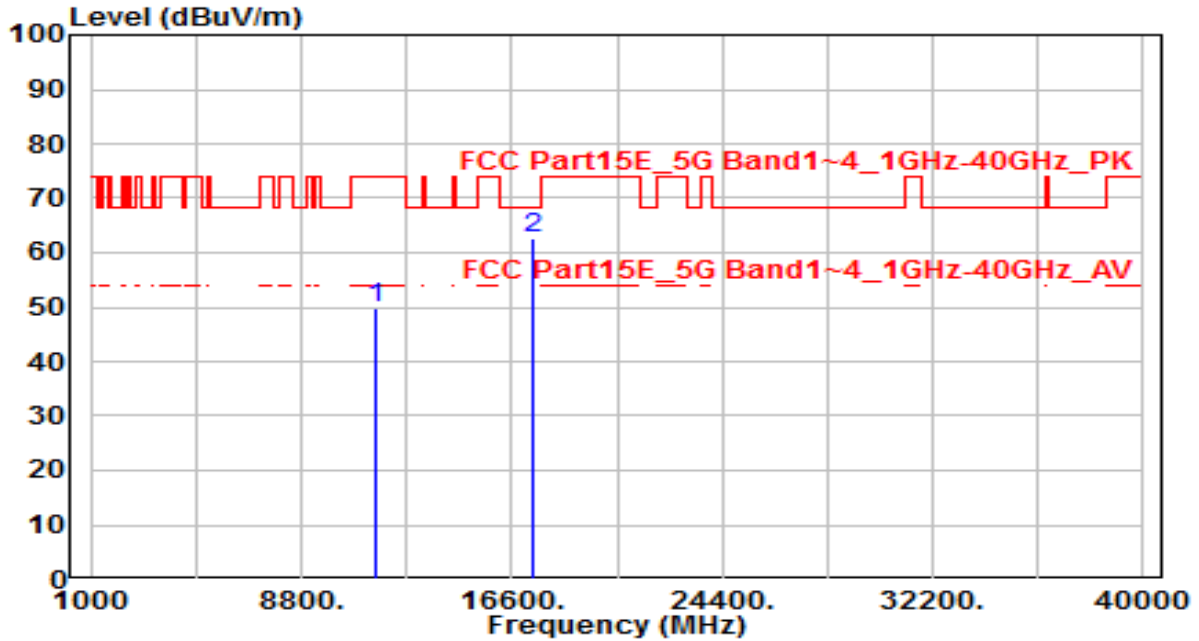


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	29.95	19.89	49.85	-24.15	74.00	150	360	Peak
2	* 17355.000	35.71	26.87	62.58	-5.62	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

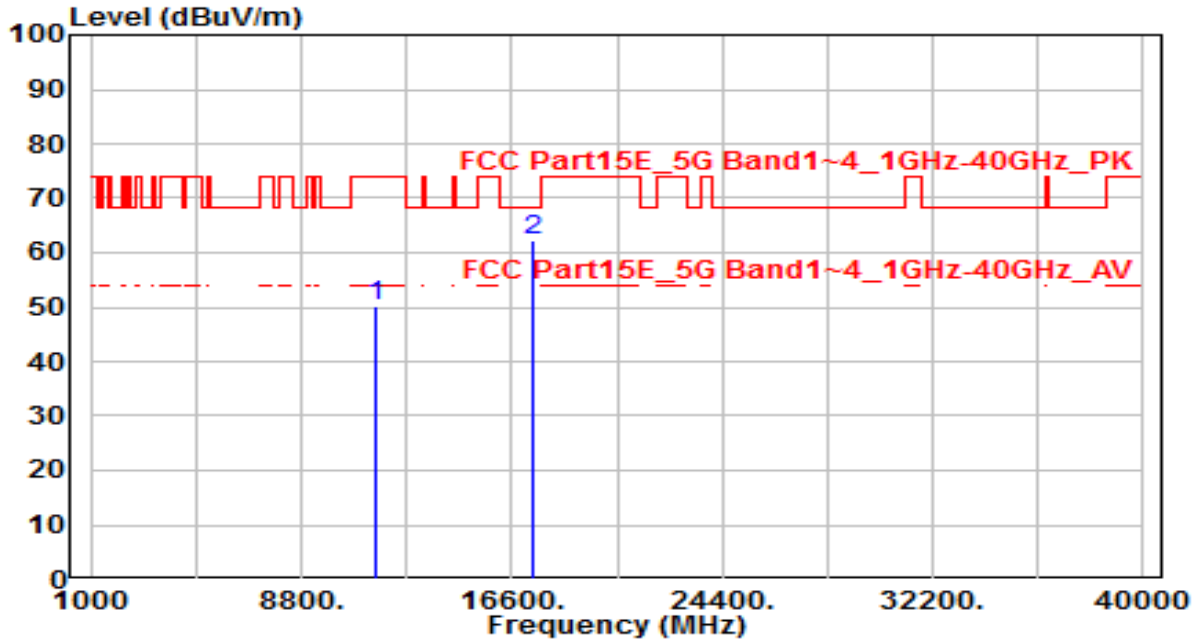


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	30.32	19.89	50.21	-23.79	74.00	150	360	Peak
2	* 17355.000	35.46	26.87	62.33	-5.87	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

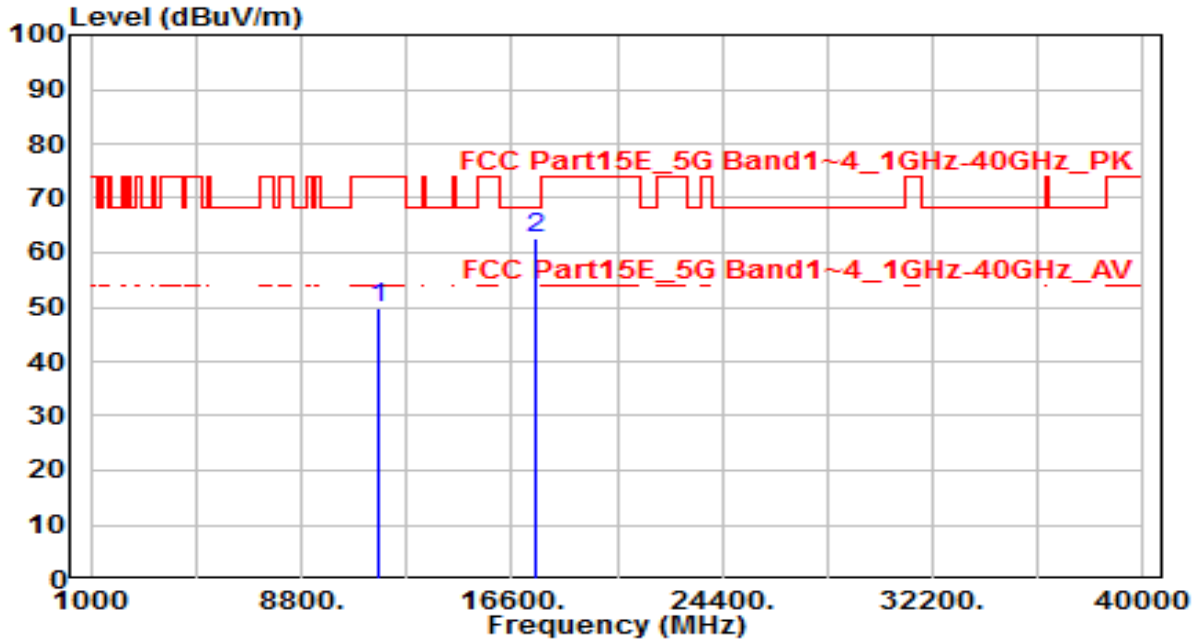


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	30.15	19.71	49.87	-24.13	74.00	150	360	Peak
2	* 17475.000	34.94	27.67	62.61	-5.59	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

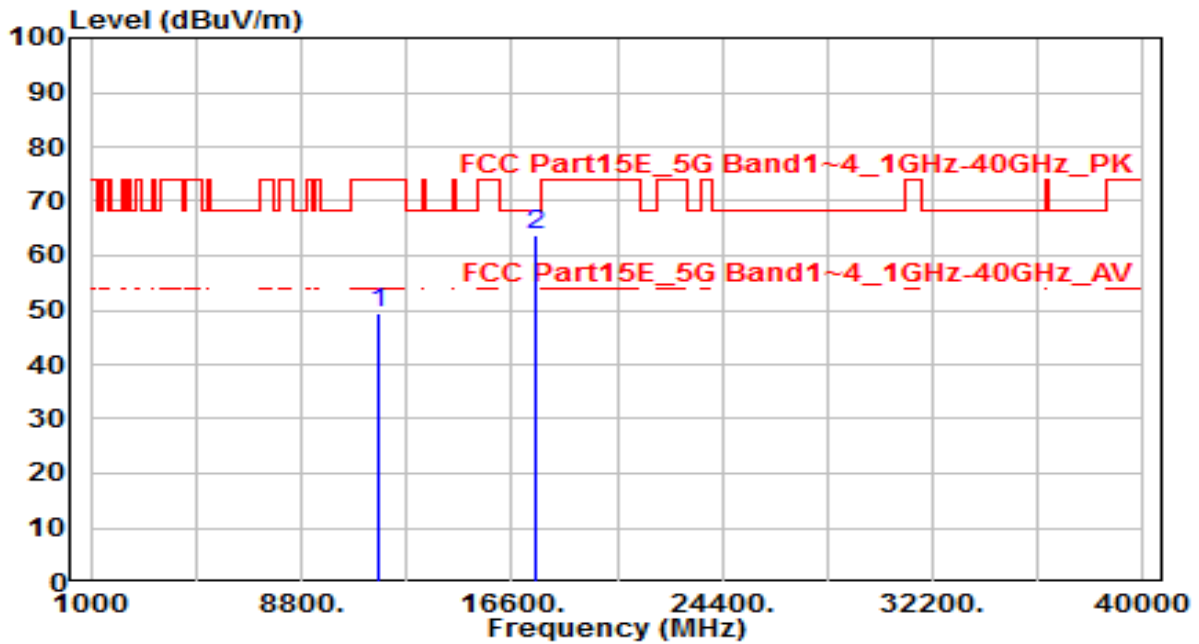


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.73	19.71	49.44	-24.56	74.00	150	360	Peak
2	* 17475.000	36.12	27.67	63.79	-4.41	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 110V/60Hz

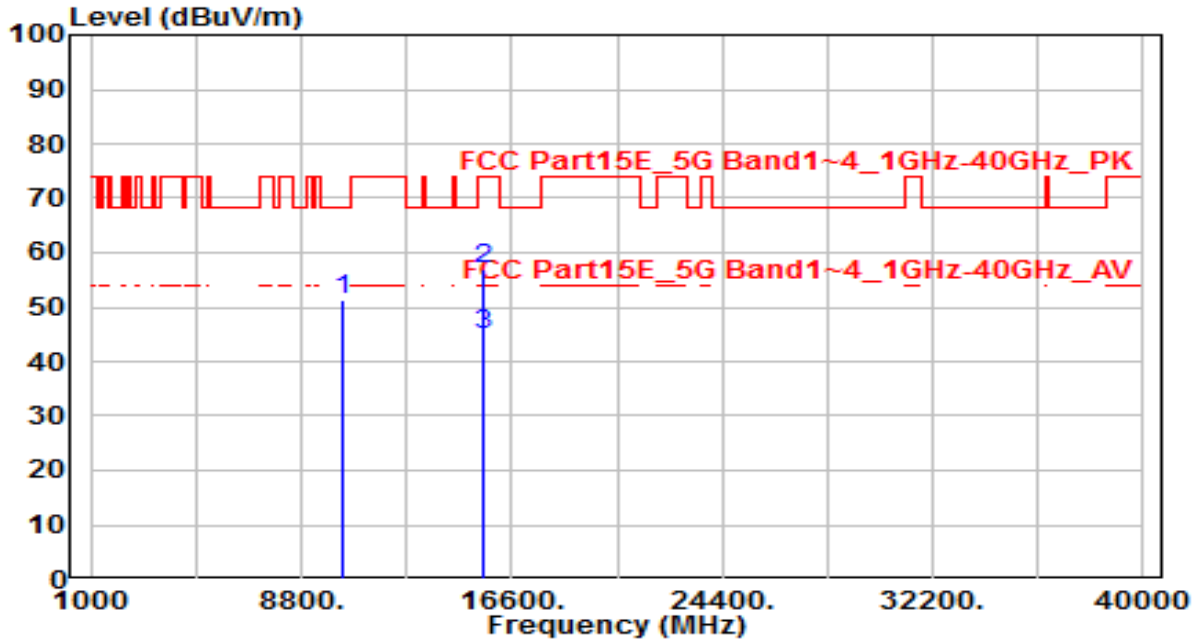


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10360.000	33.13	18.01	51.14	-17.06	68.20	150	360	Peak
2	* 15540.000	35.62	21.25	56.87	-17.13	74.00	150	40	Peak
3	* 15540.000	23.62	21.25	44.87	-9.13	54.00	150	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 110V/60Hz

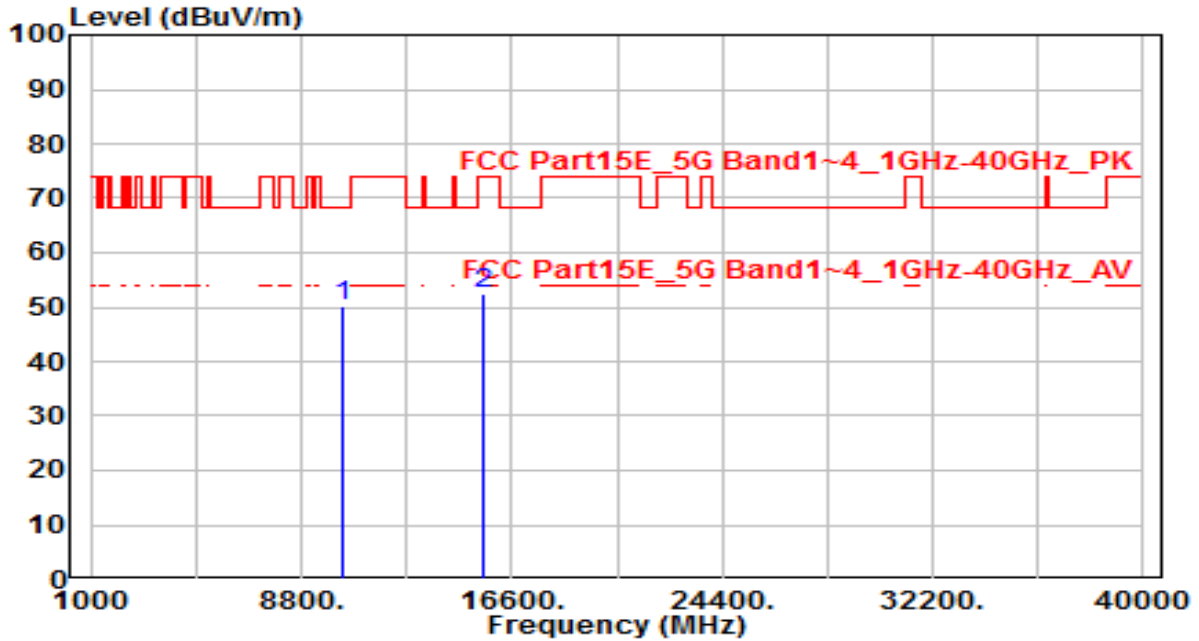


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	32.09	18.01	50.09	-18.11	68.20	150	360	Peak
2	15540.000	31.32	21.25	52.57	-21.43	74.00	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 110V/60Hz

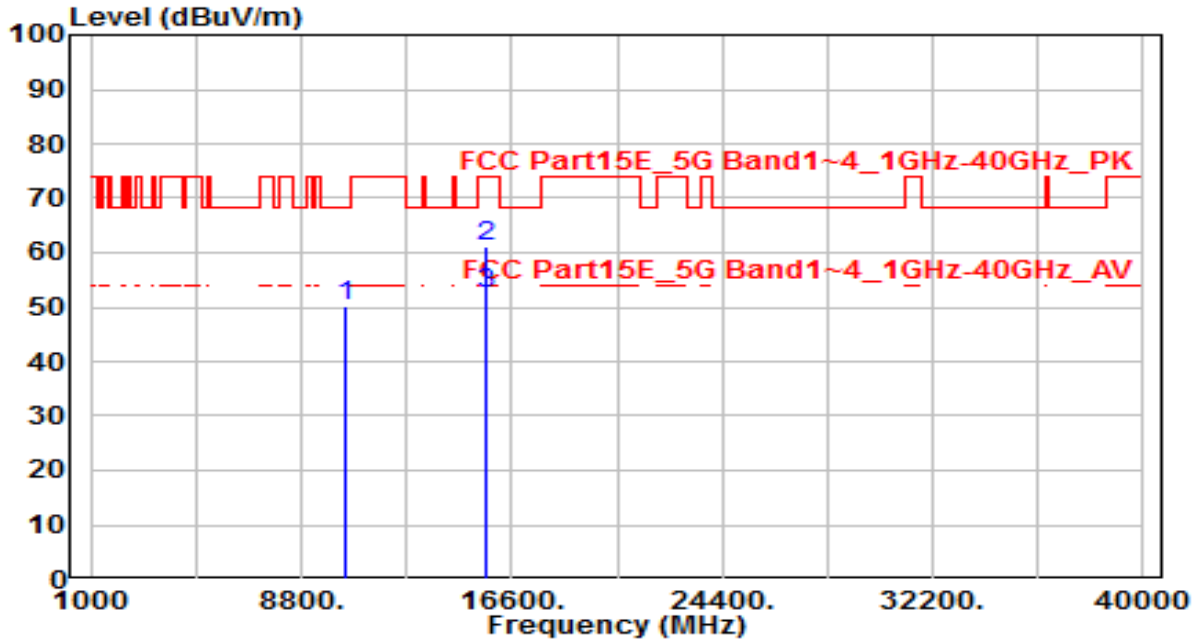


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	31.76	18.33	50.09	-18.11	68.20	150	360	Peak
2	* 15660.000	40.36	20.95	61.31	-12.69	74.00	150	50	Peak
3	* 15660.000	31.54	20.95	52.49	-1.51	54.00	150	50	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 110V/60Hz

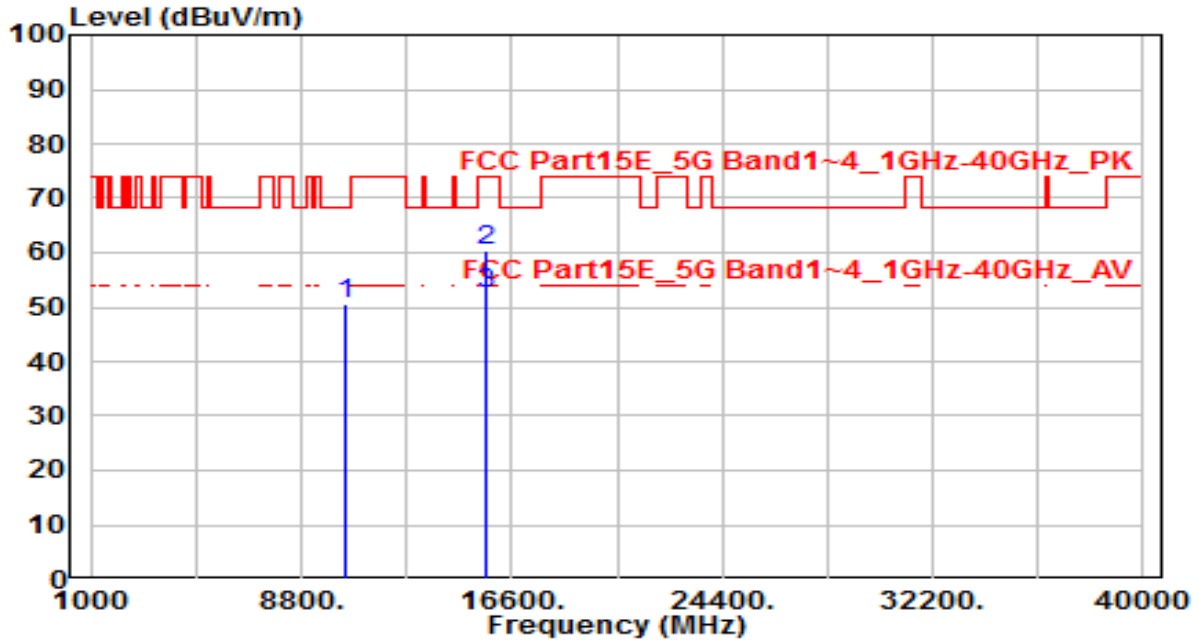


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	32.12	18.33	50.45	-17.75	68.20	150	360	Peak
2	* 15660.000	39.28	20.95	60.23	-13.77	74.00	150	10	Peak
3	* 15660.000	31.65	20.95	52.60	-1.40	54.00	150	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 110V/60Hz

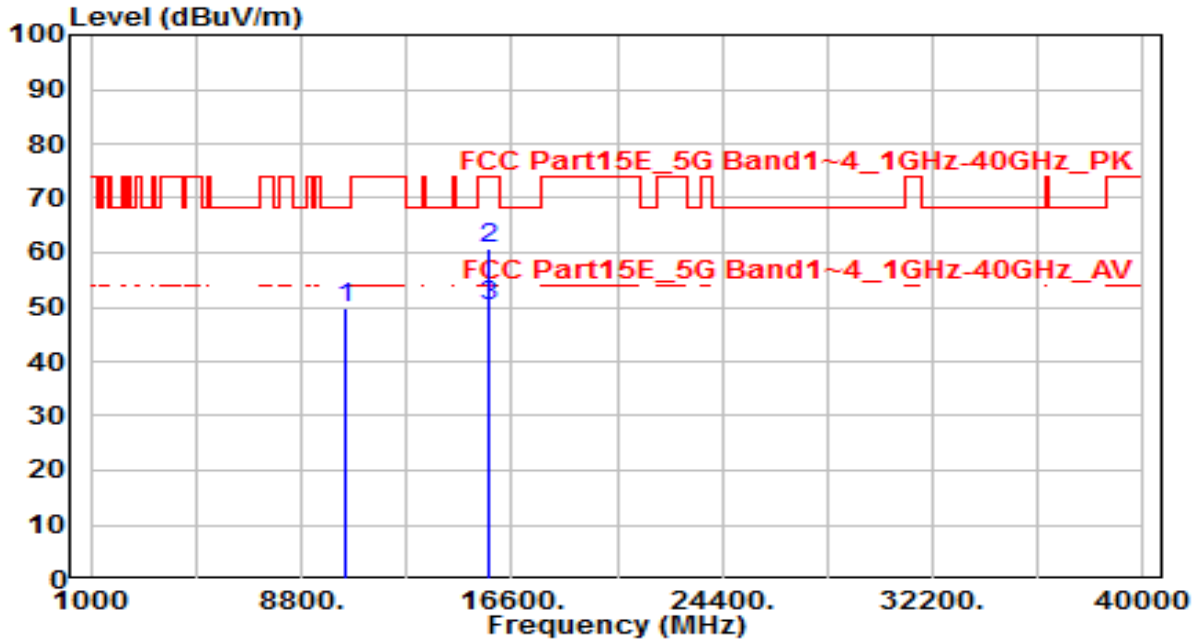


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	31.48	18.49	49.97	-18.23	68.20	150	360	Peak
2	* 15720.000	39.81	20.80	60.61	-13.39	74.00	150	50	Peak
3	* 15720.000	29.24	20.80	50.04	-3.96	54.00	150	50	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 110V/60Hz

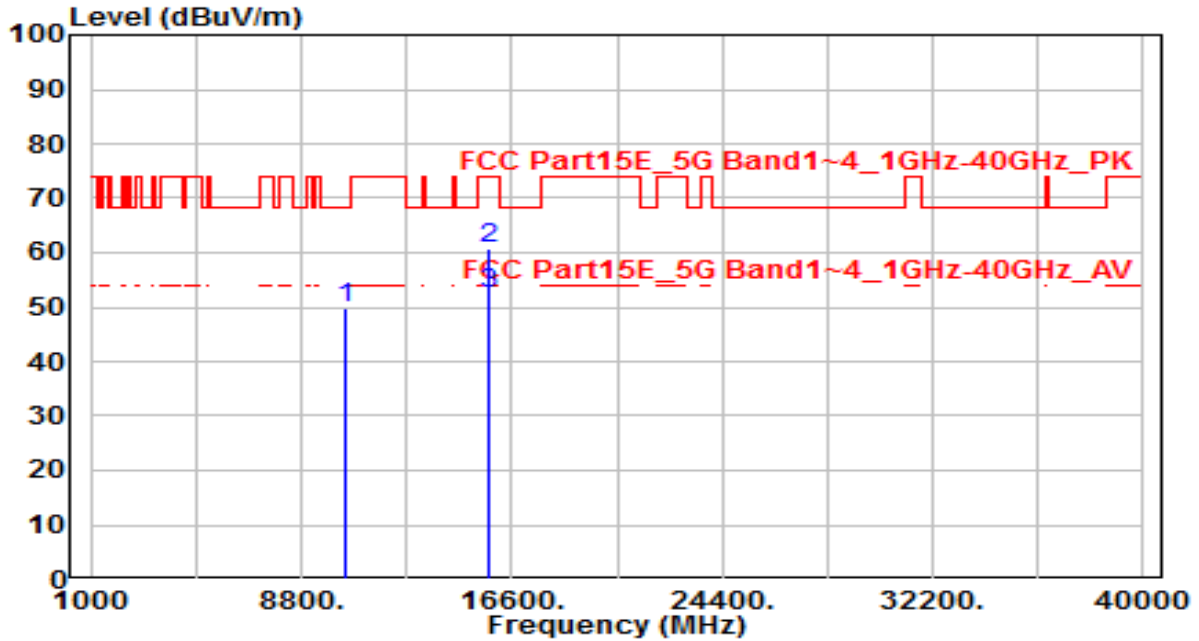


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	31.39	18.49	49.88	-18.32	68.20	150	360	Peak
2	* 15720.000	40.08	20.80	60.88	-13.12	74.00	150	10	Peak
3	* 15720.000	31.63	20.80	52.43	-1.57	54.00	150	10	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

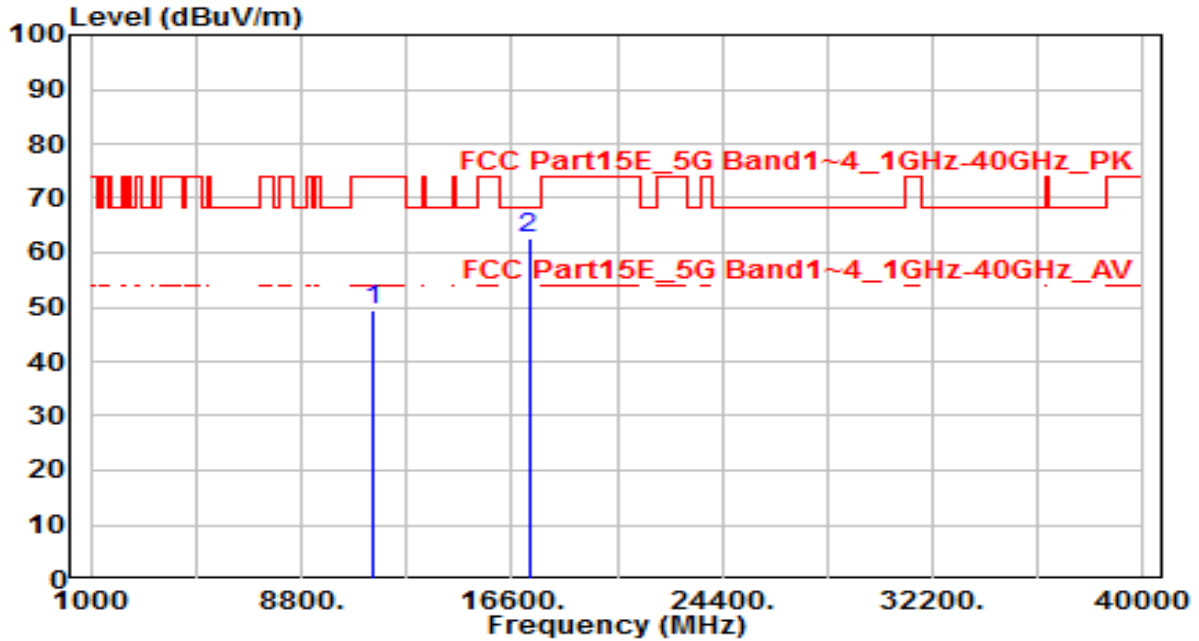


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	29.38	20.03	49.41	-24.59	74.00	150	360	Peak
2	* 17235.000	36.69	26.08	62.77	-5.43	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

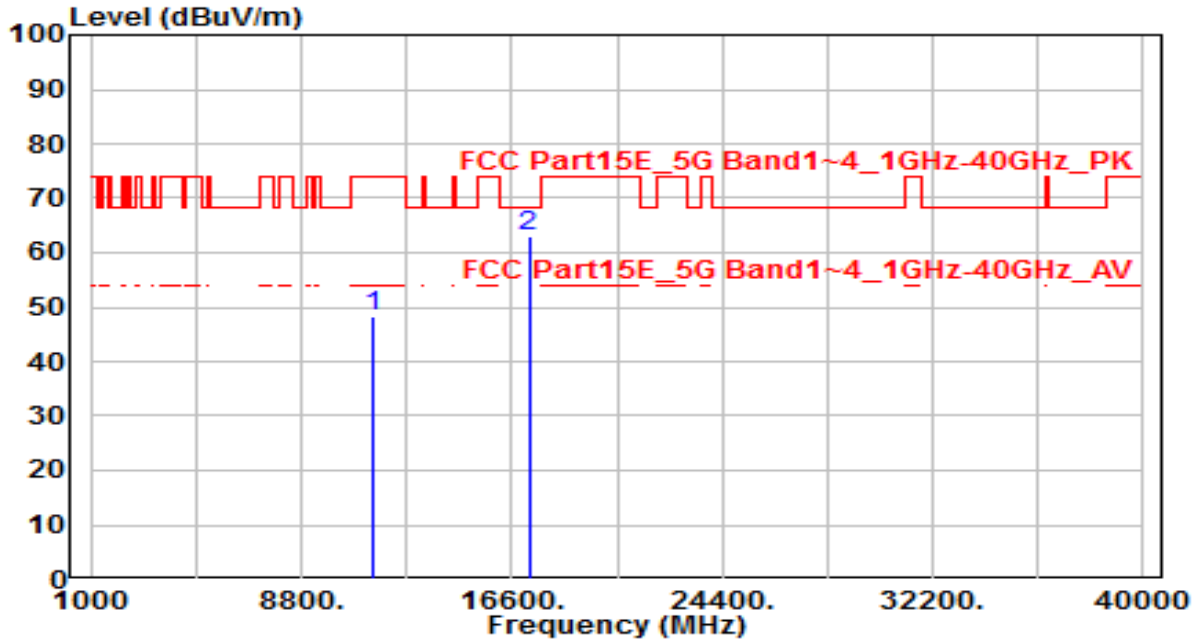


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	28.45	20.03	48.49	-25.51	74.00	150	360	Peak
2	* 17235.000	36.97	26.08	63.05	-5.15	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

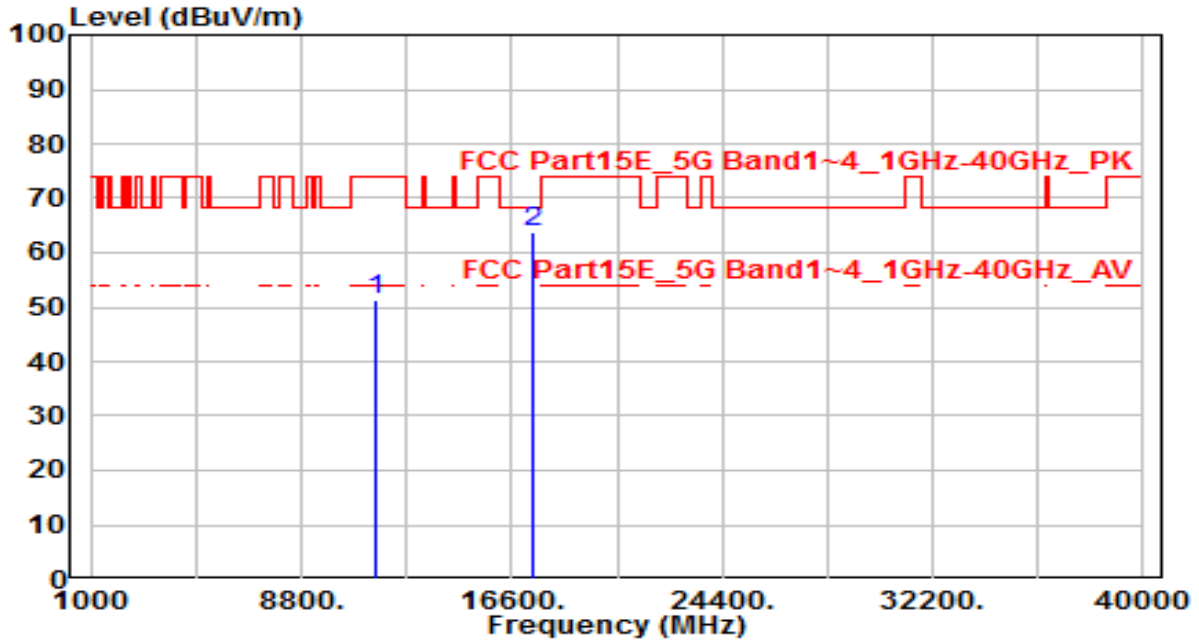


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.57	19.89	51.46	-22.54	74.00	150	360	Peak
2	* 17355.000	36.74	26.87	63.62	-4.58	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

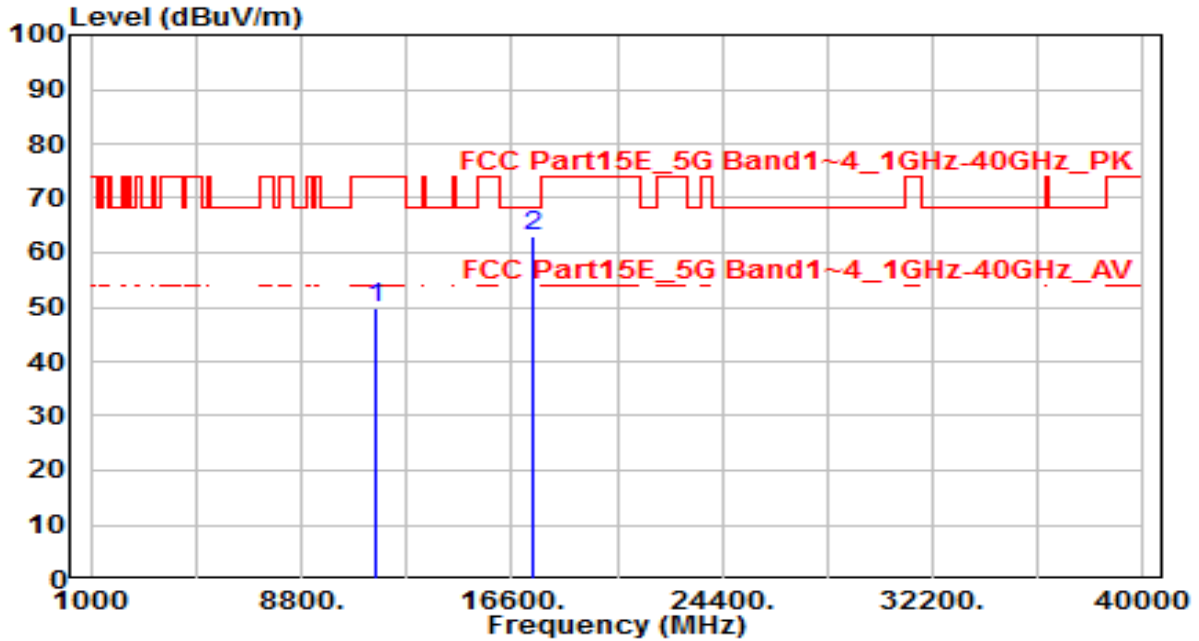


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	29.90	19.89	49.79	-24.21	74.00	150	360	Peak
2	* 17355.000	36.05	26.87	62.93	-5.27	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

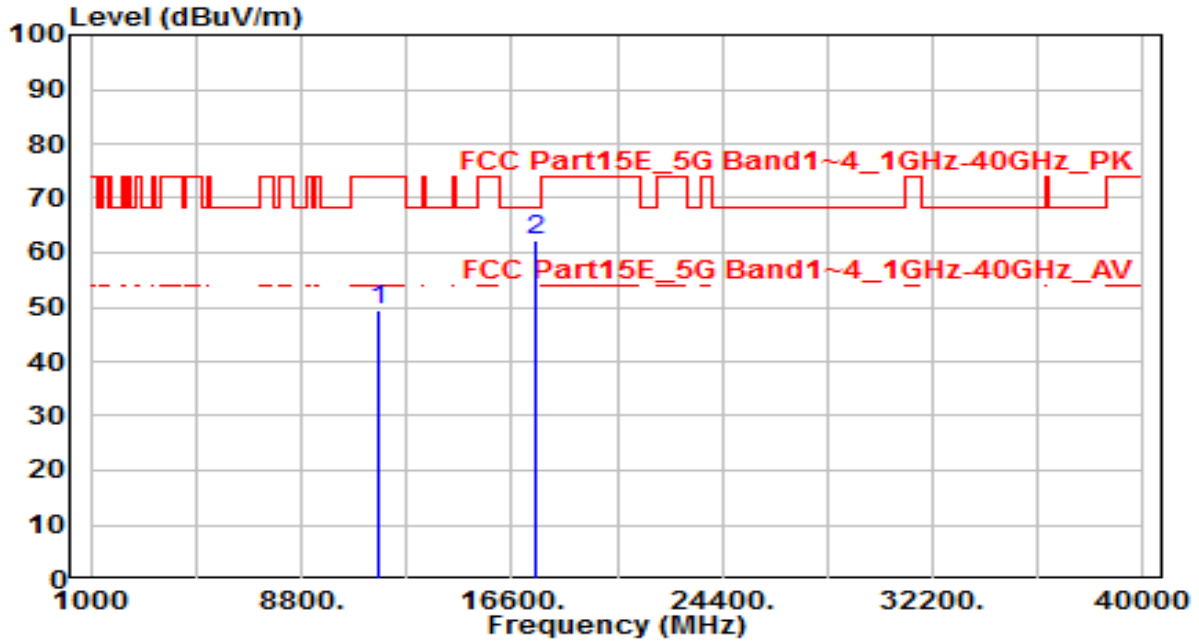


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.63	19.71	49.34	-24.66	74.00	150	360	Peak
2	* 17475.000	34.63	27.67	62.31	-5.89	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

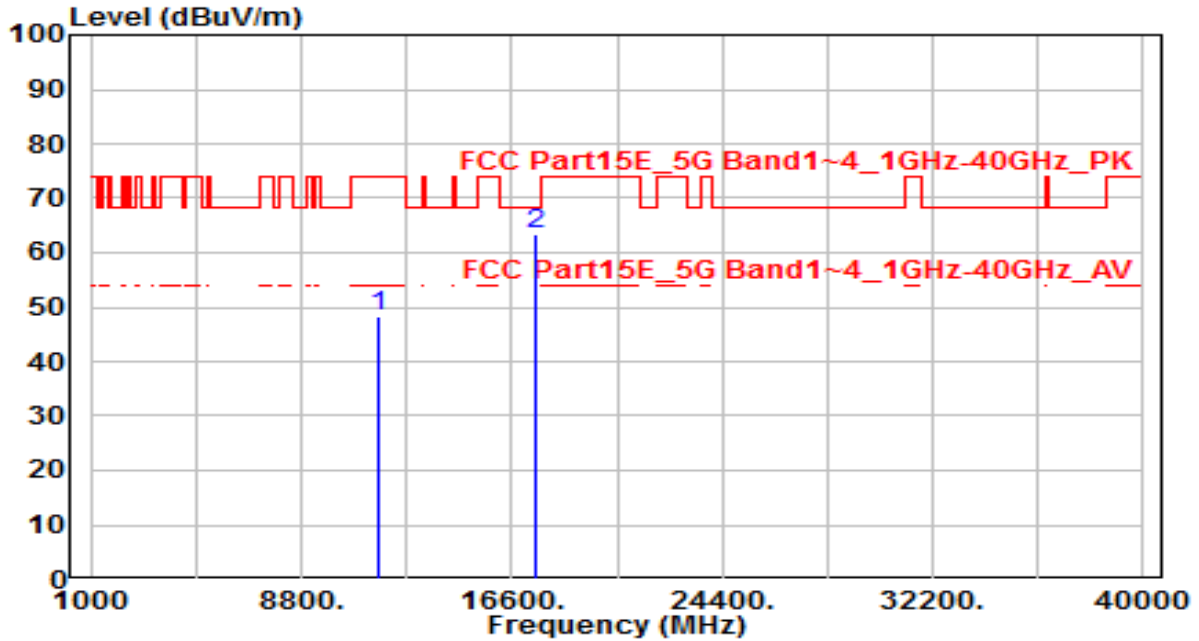


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	28.65	19.71	48.36	-25.64	74.00	150	360	Peak
2	* 17475.000	35.76	27.67	63.43	-4.77	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 110V/60Hz

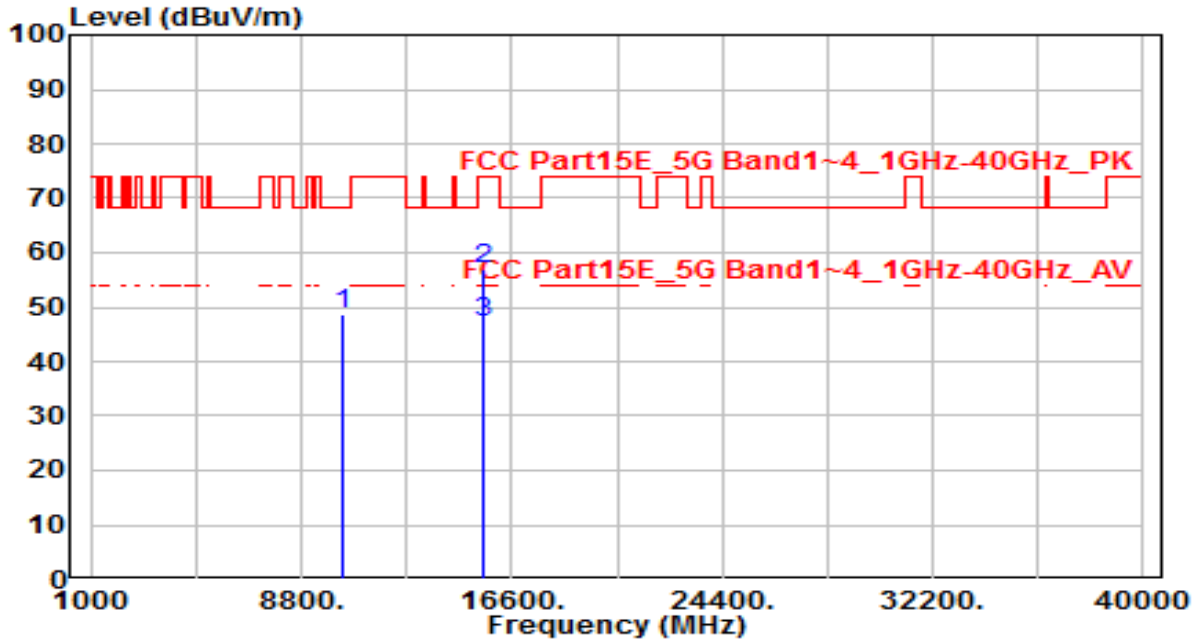


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10380.000	30.53	18.09	48.62	-19.58	68.20	150	360	Peak
2	* 15570.000	35.88	21.18	57.06	-16.94	74.00	150	50	Peak
3	* 15570.000	26.04	21.18	47.22	-6.78	54.00	150	50	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 110V/60Hz

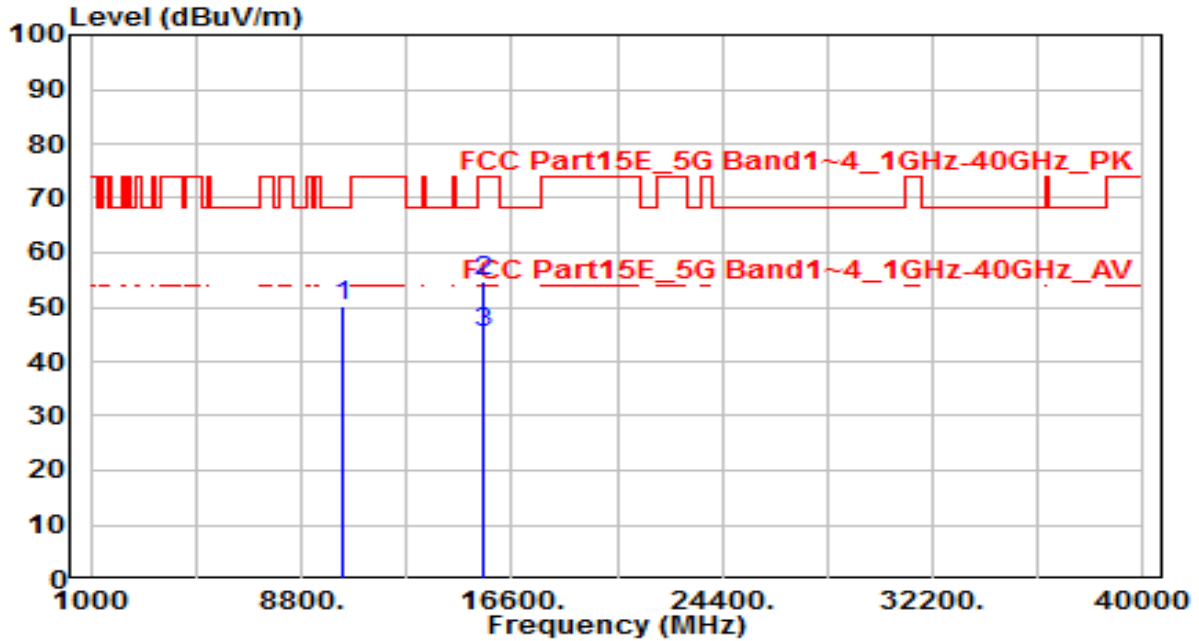


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10380.000	32.18	18.09	50.26	-17.94	68.20	150	360	Peak
2	* 15570.000	33.69	21.18	54.86	-19.14	74.00	150	10	Peak
3	* 15570.000	24.16	21.18	45.34	-8.66	54.00	150	10	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 110V/60Hz

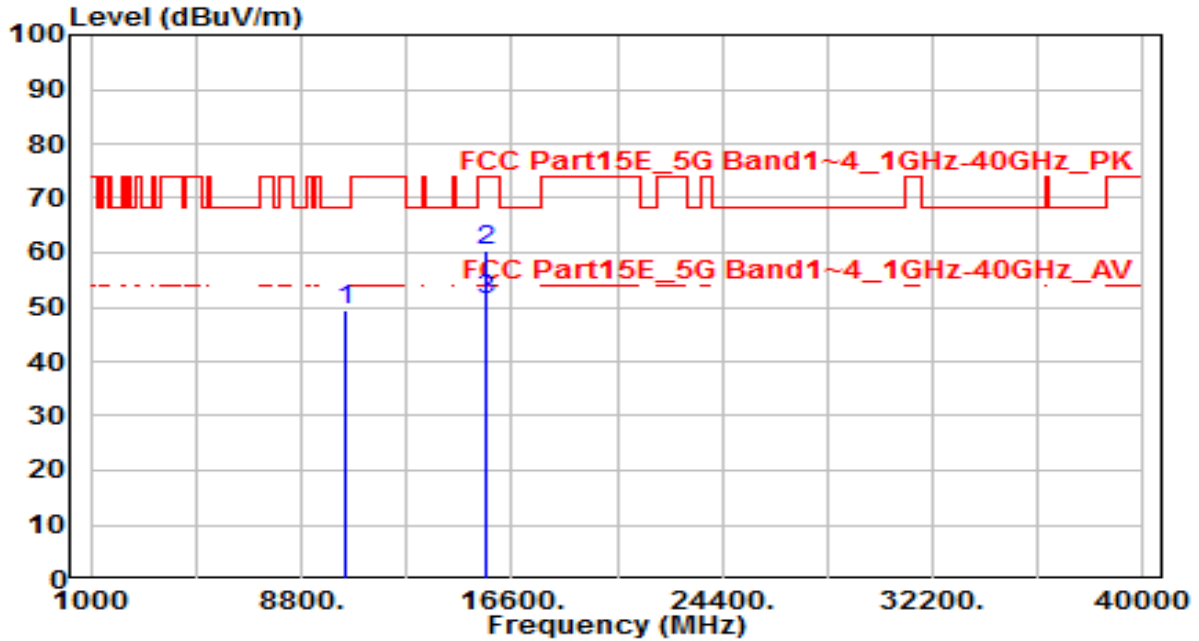


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	30.97	18.41	49.38	-18.82	68.20	150	360	Peak
2	* 15690.000	39.65	20.88	60.53	-13.47	74.00	150	50	Peak
3	* 15690.000	30.27	20.88	51.15	-2.85	54.00	150	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 110V/60Hz

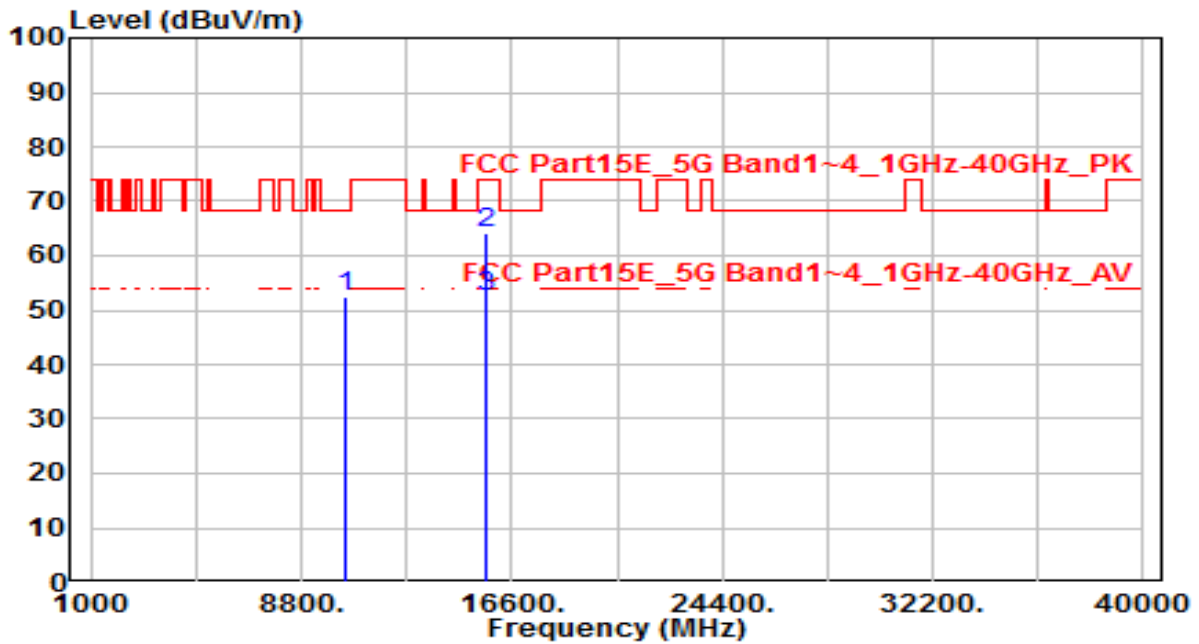


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	34.20	18.41	52.61	-15.59	68.20	150	360	Peak
2	* 15690.000	43.30	20.88	64.17	-9.83	74.00	150	10	Peak
3	* 15690.000	31.62	20.88	52.50	-1.50	54.00	150	10	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

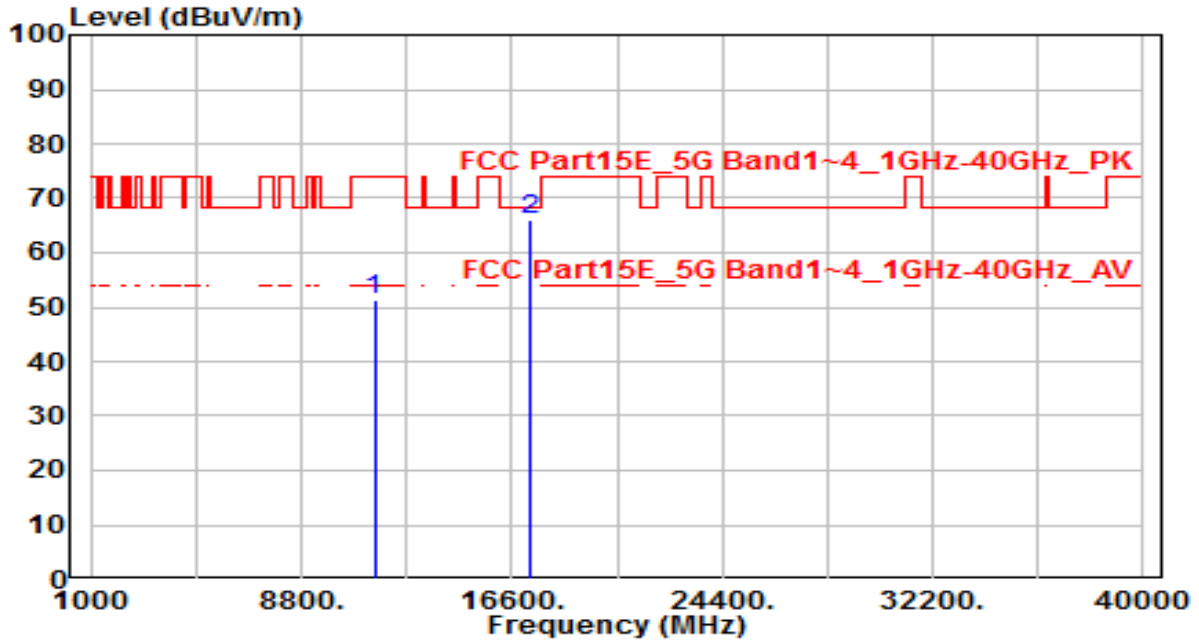


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	31.14	20.03	51.17	-22.83	74.00	150	360	Peak
2	* 17265.000	39.84	26.27	66.11	-2.09	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

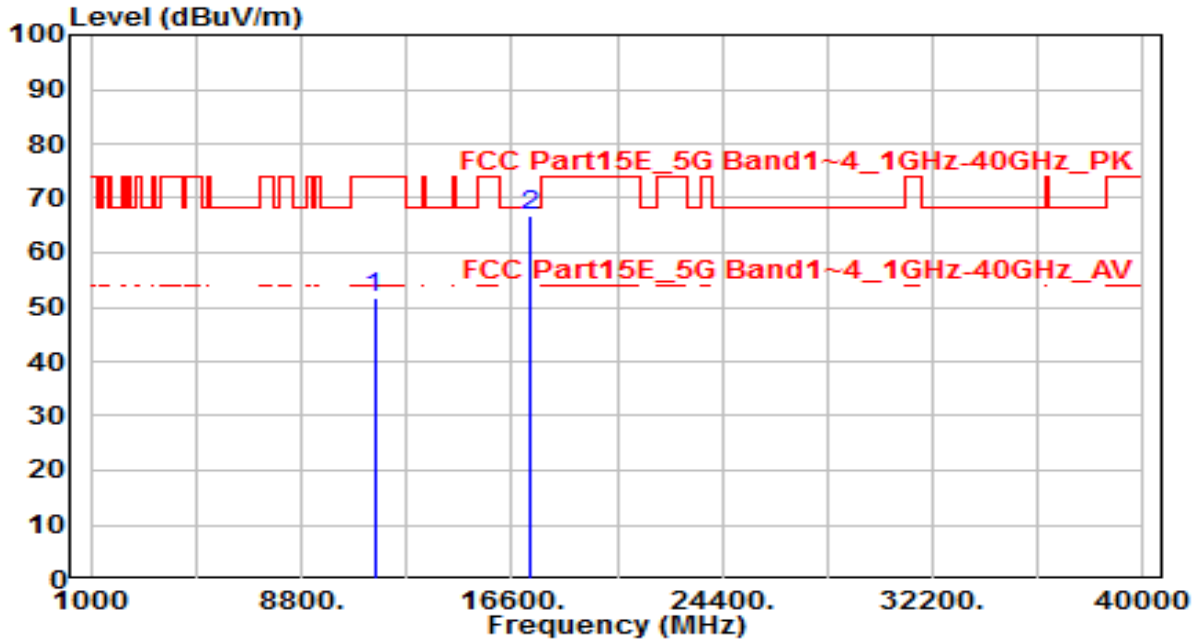


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	31.52	20.03	51.55	-22.45	74.00	150	360	Peak
2	* 17265.000	40.55	26.27	66.83	-1.37	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

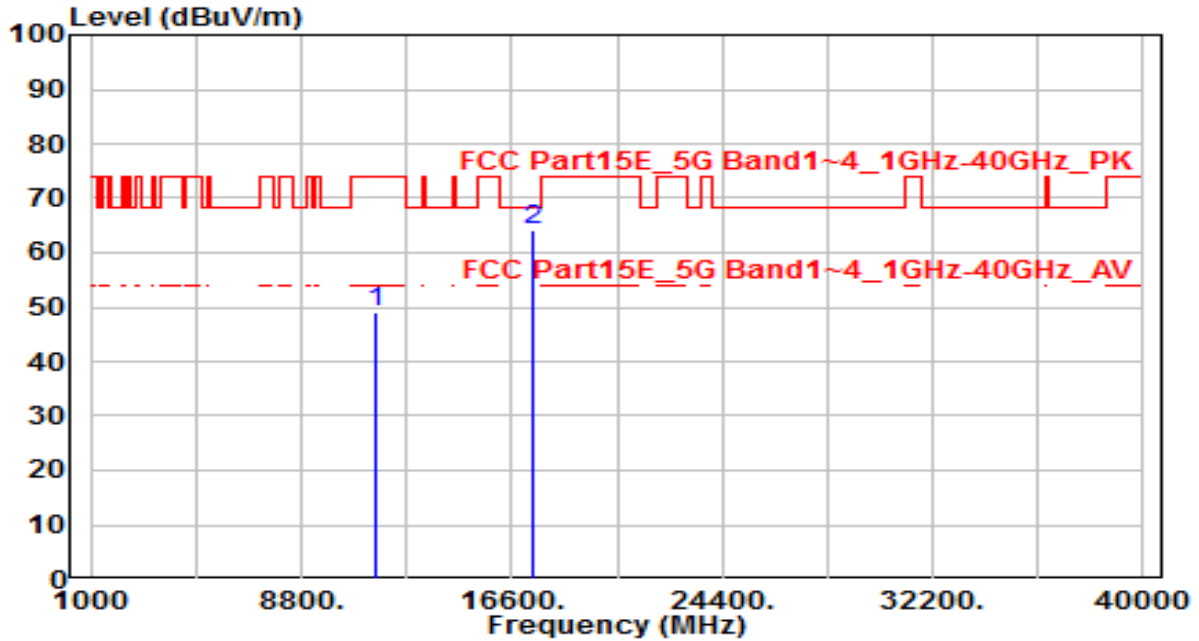


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	29.05	19.85	48.90	-25.10	74.00	150	360	Peak
2	* 17385.000	36.97	27.07	64.05	-4.15	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

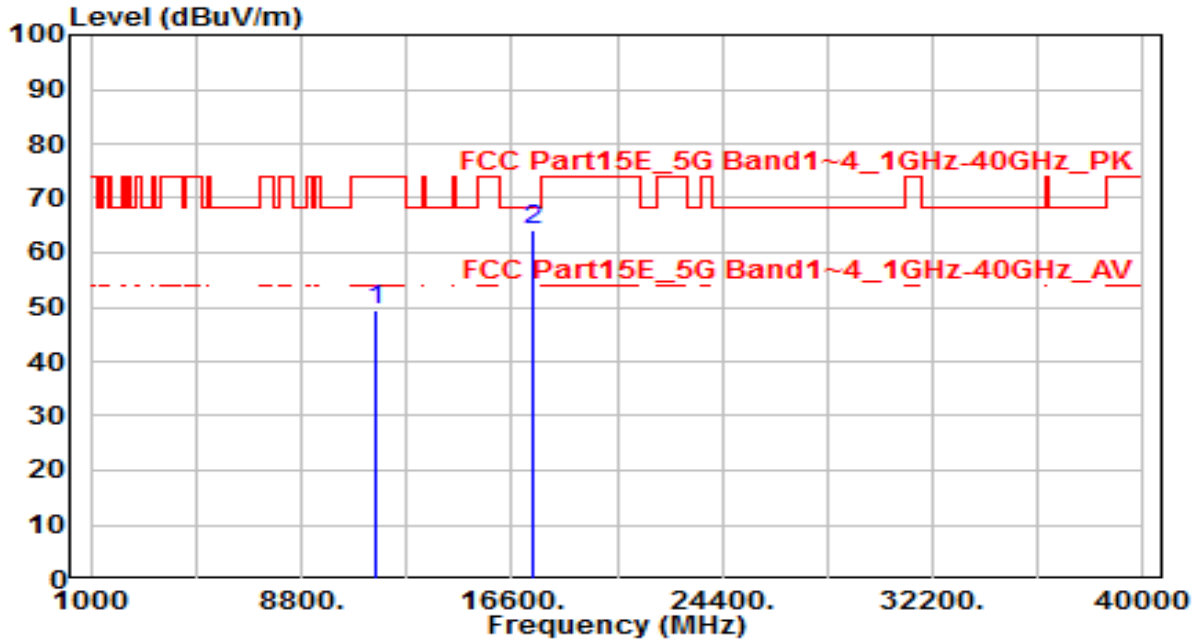


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	29.44	19.85	49.28	-24.72	74.00	150	360	Peak
2	* 17385.000	37.14	27.07	64.22	-3.98	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

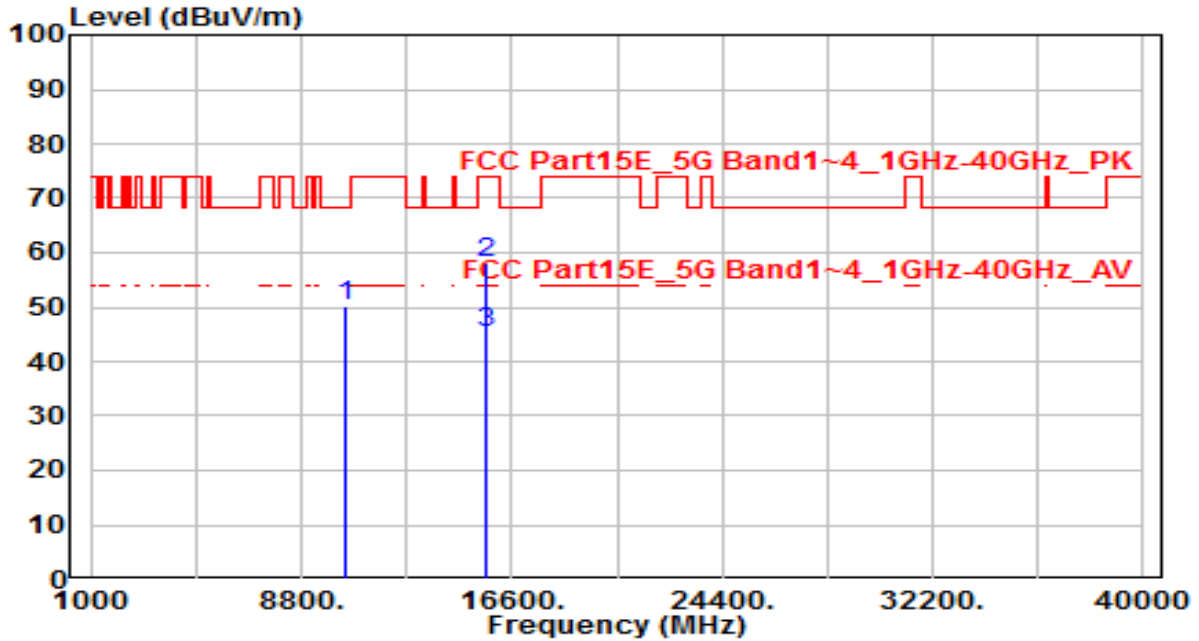


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10420.000	31.83	18.25	50.08	-18.12	68.20	150	360	Peak
2	* 15630.000	37.01	21.03	58.04	-15.96	74.00	150	45	Peak
3	* 15630.000	24.37	21.03	45.40	-8.60	54.00	150	45	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

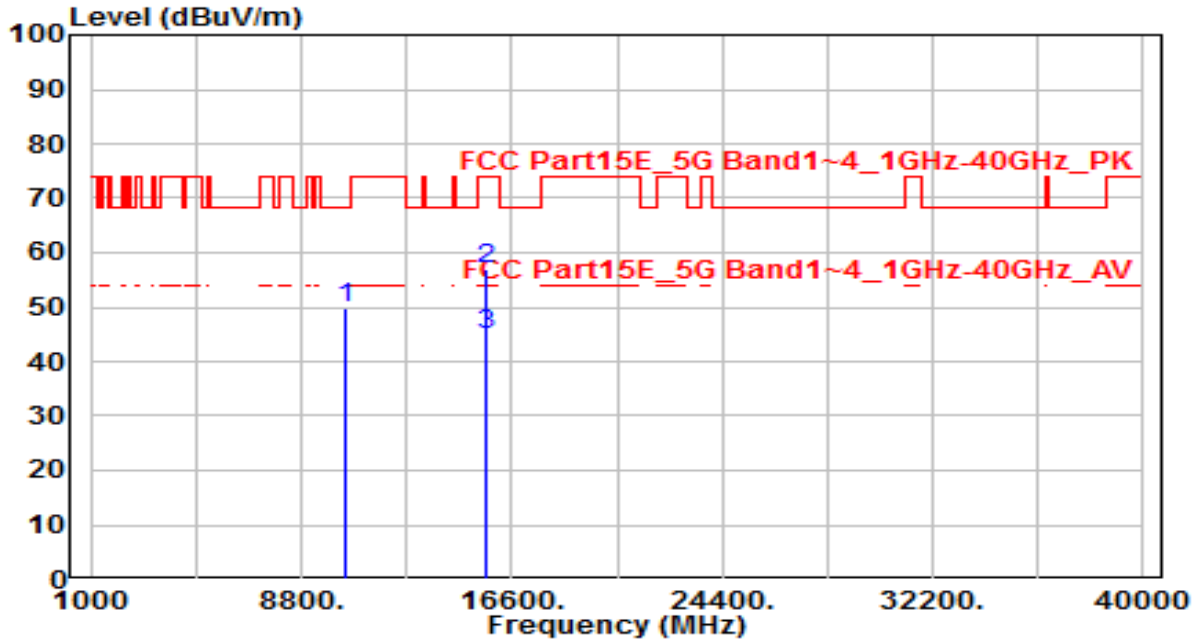


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10420.000	31.75	18.25	50.00	-18.20	68.20	150	360	Peak
2	* 15630.000	35.88	21.03	56.91	-17.09	74.00	150	10	Peak
3	* 15630.000	23.91	21.03	44.94	-9.06	54.00	150	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

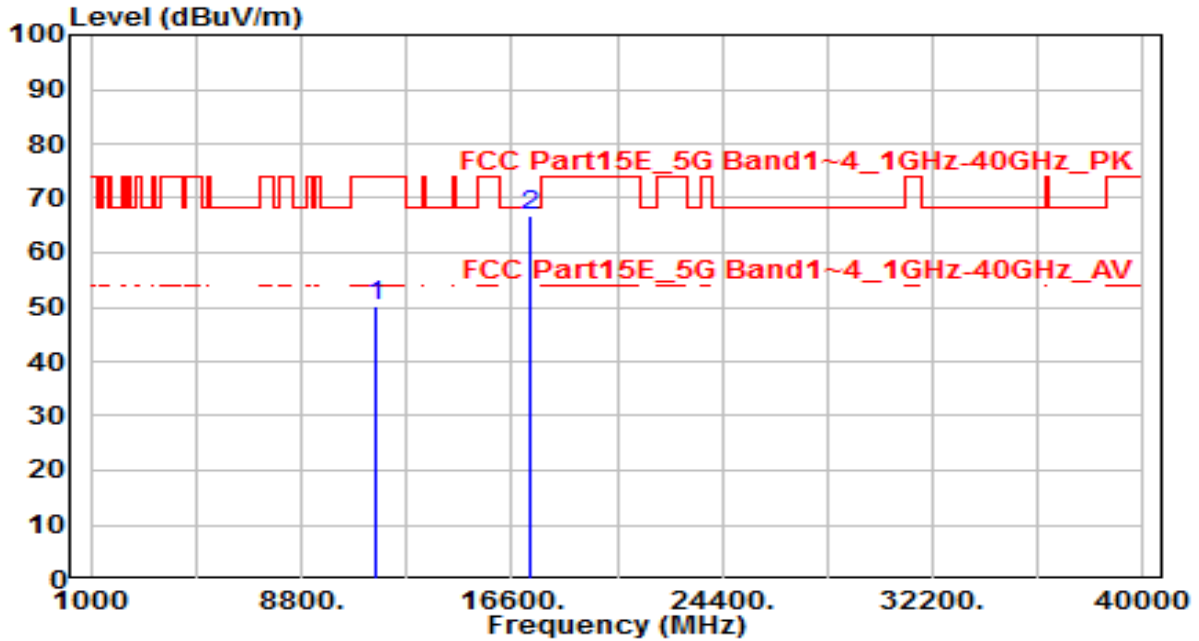


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	30.15	19.94	50.09	-23.91	74.00	150	360	Peak
2	* 17325.000	40.24	26.67	66.92	-1.28	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

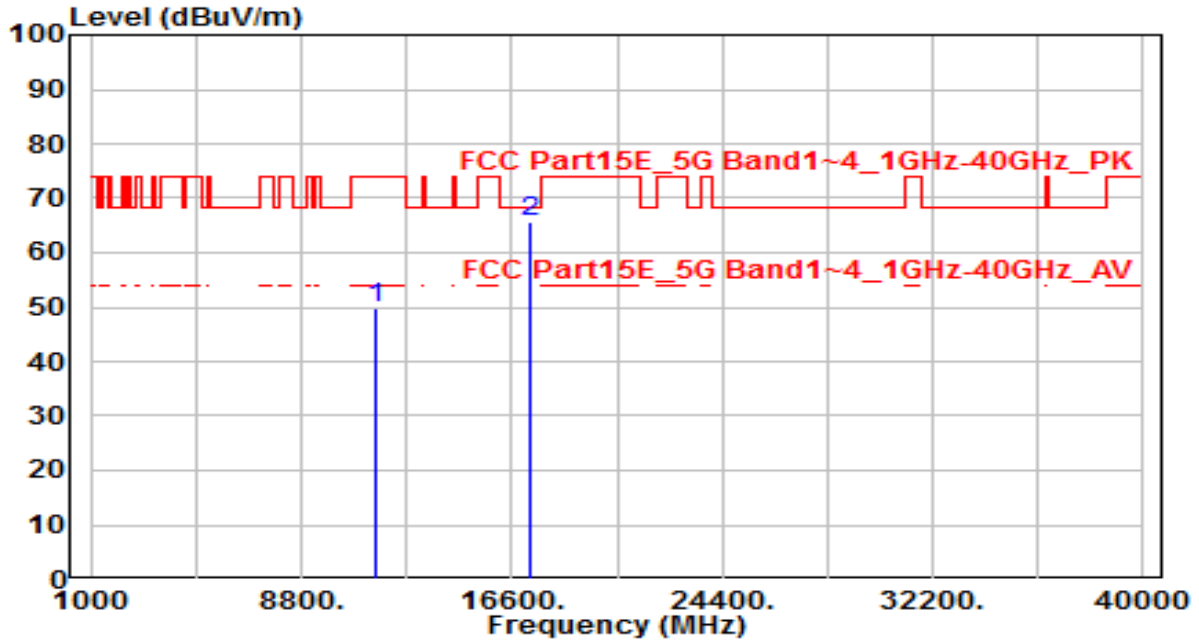

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	29.75	19.94	49.69	-24.31	74.00	150	360	Peak
2	* 17325.000	38.92	26.67	65.60	-2.60	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

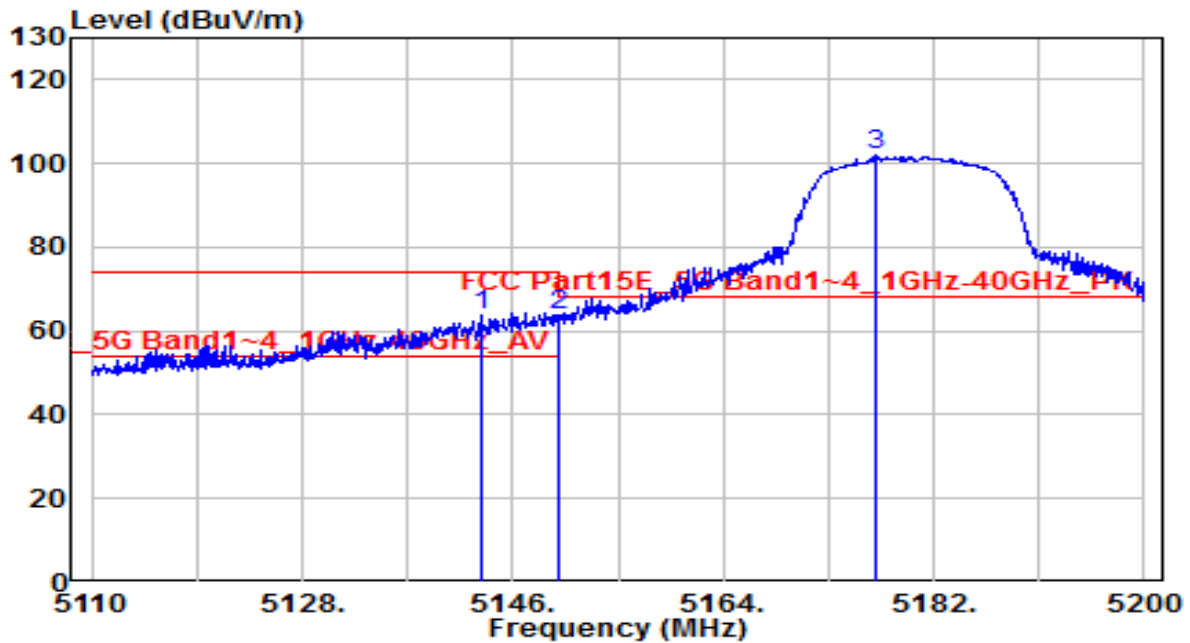


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.300	59.37	4.19	63.55	-10.45	74.00	150	15	Peak
2	* 5150.000	59.58	4.20	63.77	-10.23	74.00	150	15	Peak
3	5177.140	97.71	4.24	101.95	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

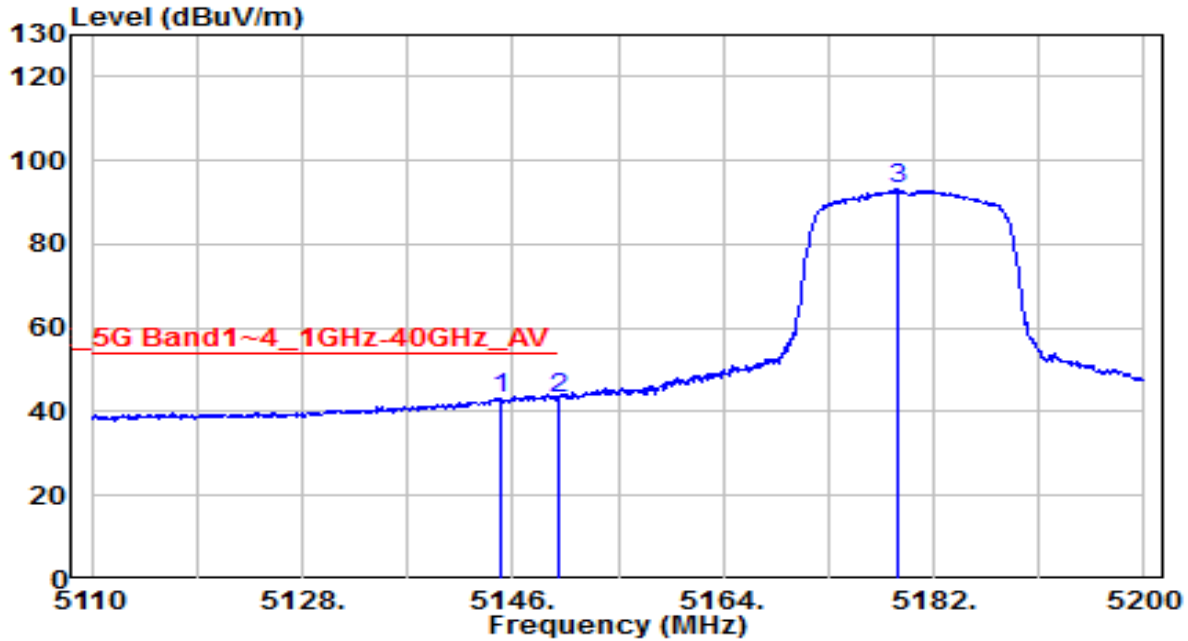


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5145.010	39.10	4.19	43.29	-10.71	54.00	150	15	Average
2	5150.000	38.96	4.20	43.15	-10.85	54.00	150	15	Average
3	5179.030	88.95	4.24	93.19	N/A	N/A	150	15	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

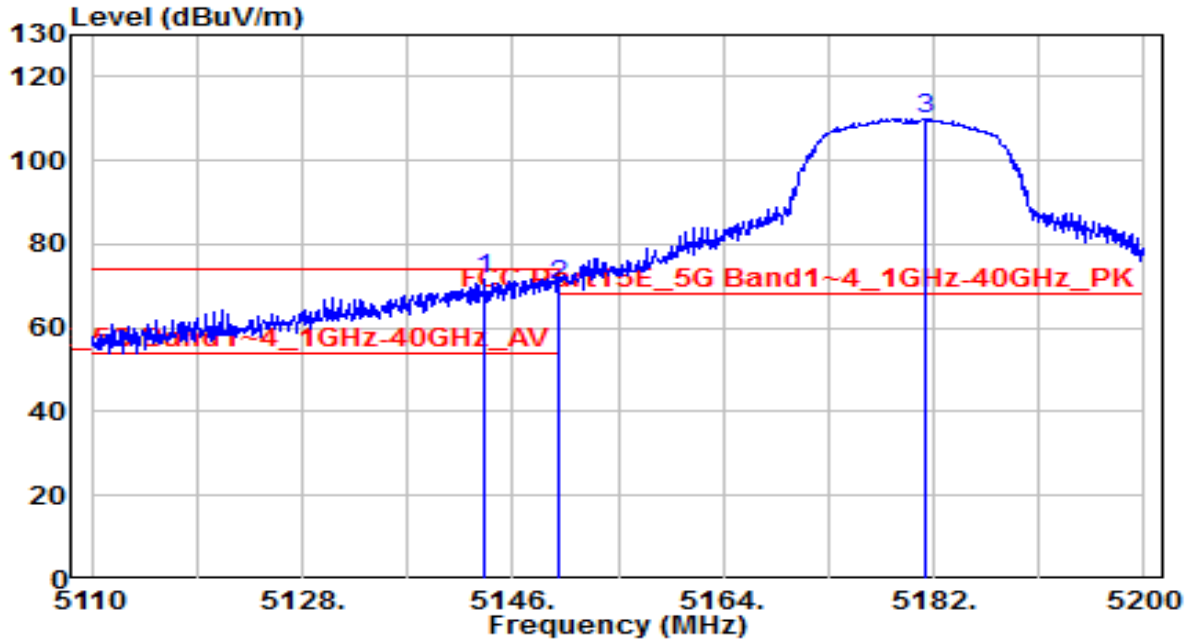


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.570	67.28	4.19	71.46	-2.54	74.00	160	30	Peak
2	5150.000	66.10	4.20	70.30	-3.70	74.00	160	30	Peak
3	5181.280	105.81	4.25	110.05	N/A	N/A	160	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

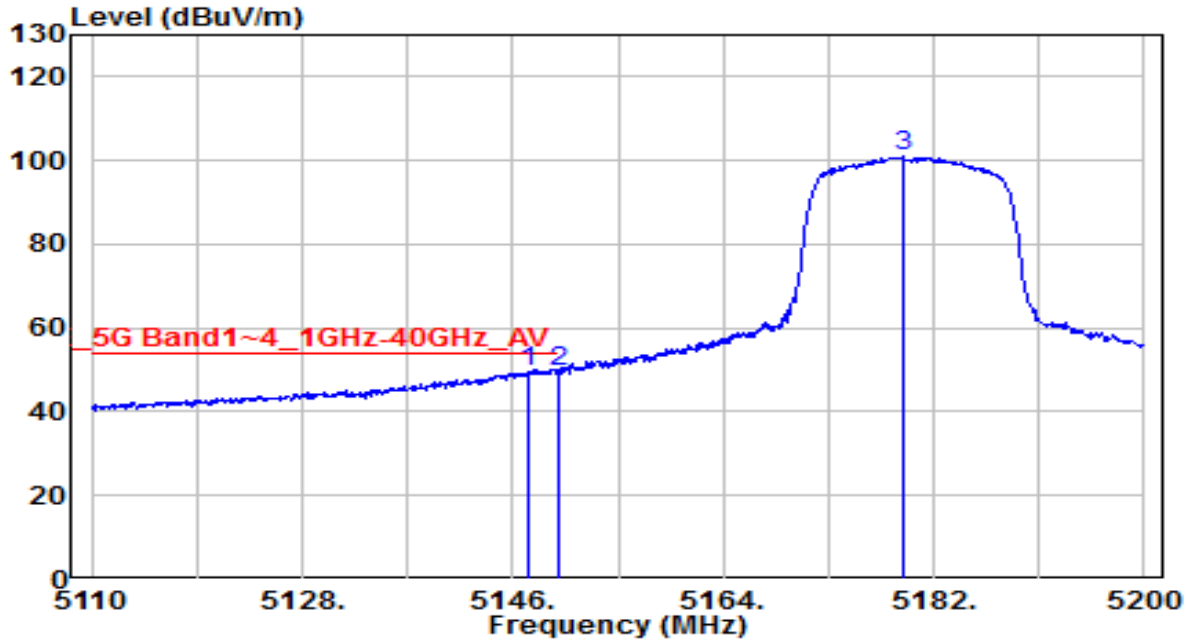


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.260	45.34	4.19	49.53	-4.47	54.00	160	30	Average
2	5150.000	45.31	4.20	49.51	-4.49	54.00	160	30	Average
3	5179.390	96.92	4.24	101.17	N/A	N/A	160	30	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

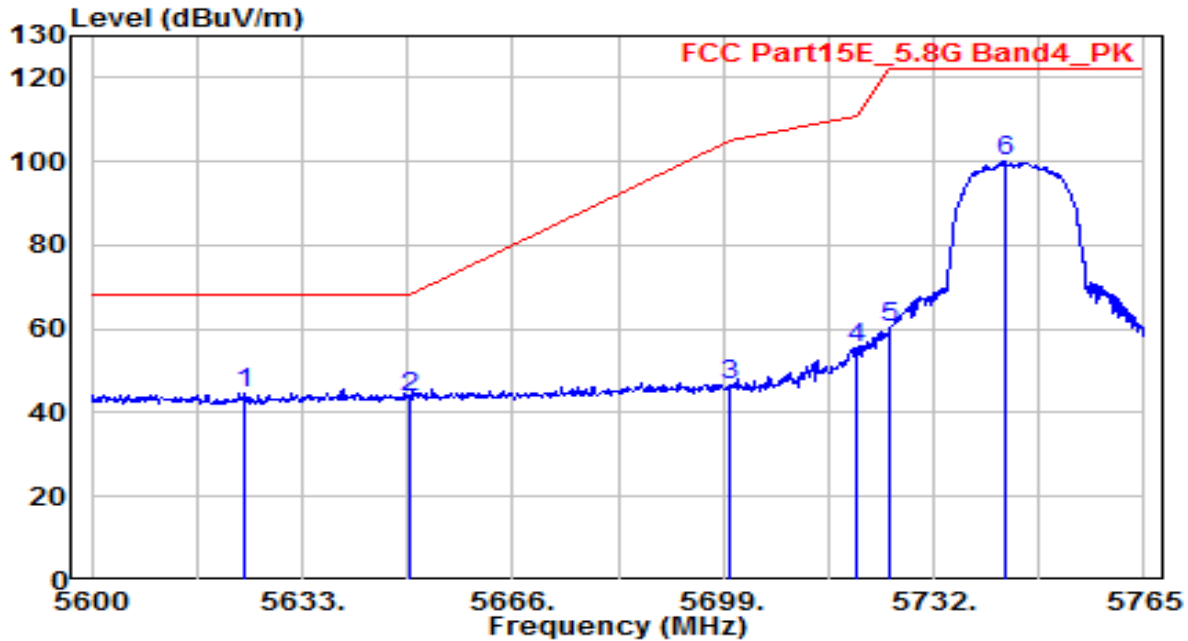


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5624.090	39.60	5.22	44.82	-23.38	68.20	175	315	Peak
2	5650.000	38.37	5.32	43.69	-24.51	68.20	175	315	Peak
3	5700.000	40.92	5.50	46.41	-58.79	105.20	175	315	Peak
4	5720.000	49.82	5.57	55.39	-55.41	110.80	175	315	Peak
5	5725.000	54.77	5.59	60.36	-61.84	122.20	175	315	Peak
6	5743.055	94.28	5.65	99.93	N/A	N/A	175	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

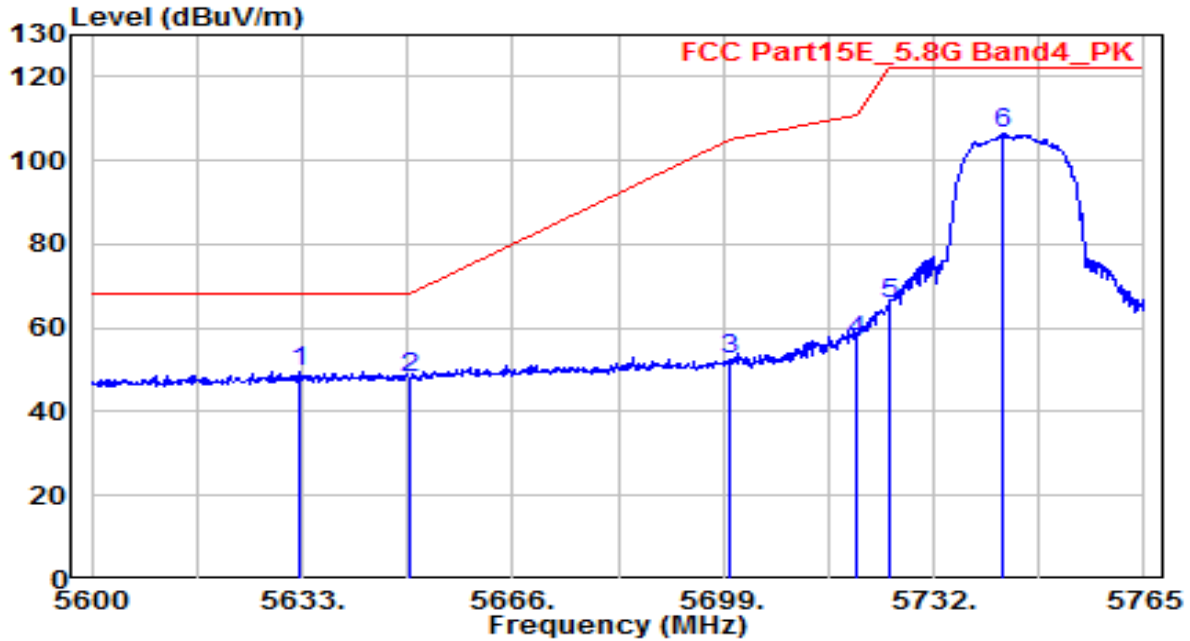


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5632.670	44.38	5.25	49.64	-18.56	68.20	200	50	Peak
2	5650.000	42.52	5.32	47.84	-20.36	68.20	200	50	Peak
3	5700.000	46.95	5.50	52.45	-52.75	105.20	200	50	Peak
4	5720.000	51.57	5.57	57.15	-53.65	110.80	200	50	Peak
5	5725.000	60.30	5.59	65.89	-56.31	122.20	200	50	Peak
6	5742.725	100.91	5.65	106.56	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

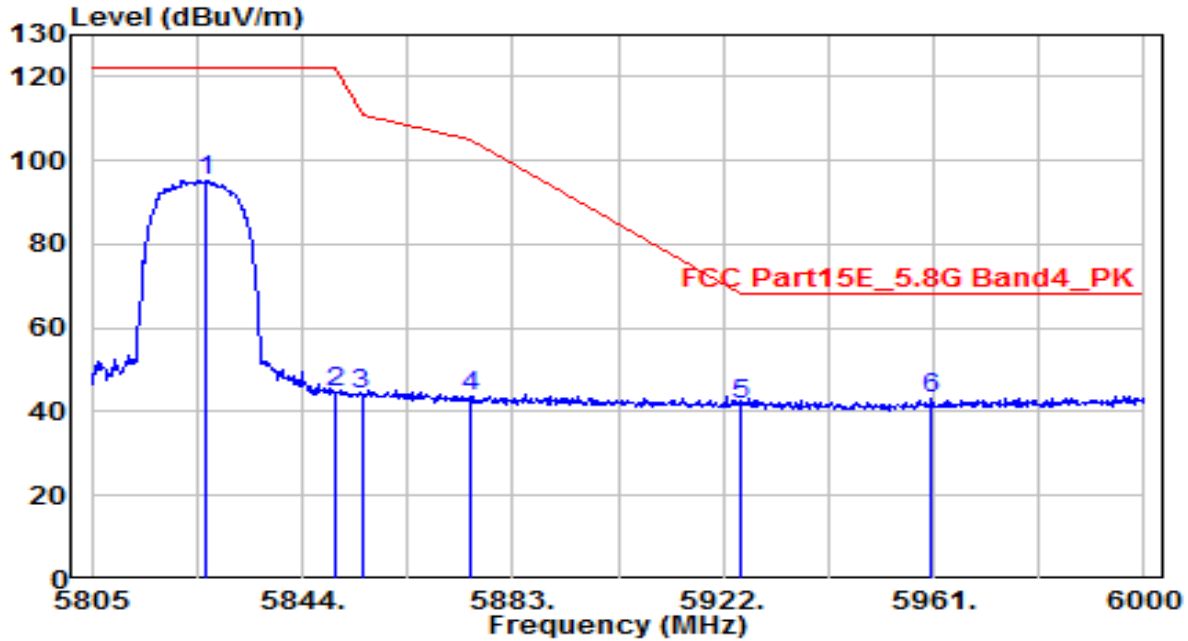


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.060	89.32	5.96	95.28	N/A	N/A	150	85	Peak
2	5850.000	38.82	6.04	44.86	-77.34	122.20	150	85	Peak
3	5855.000	38.10	6.06	44.16	-66.64	110.80	150	85	Peak
4	5875.000	37.52	6.13	43.66	-61.54	105.20	150	85	Peak
5	5925.000	35.45	6.32	41.76	-26.44	68.20	150	85	Peak
6	* 5960.610	36.48	6.45	42.93	-25.27	68.20	150	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

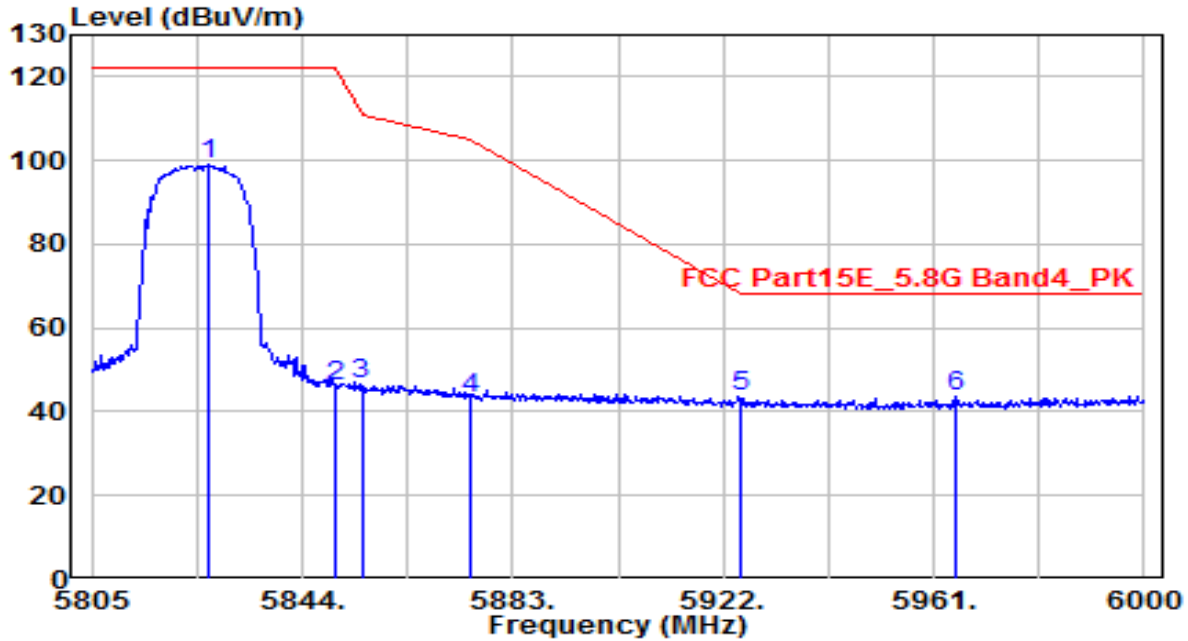


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	93.16	5.96	99.12	N/A	N/A	165	0	Peak
2	5850.000	40.31	6.04	46.36	-75.84	122.20	165	0	Peak
3	5855.000	40.43	6.06	46.49	-64.31	110.80	165	0	Peak
4	5875.000	36.86	6.13	43.00	-62.20	105.20	150	0	Peak
5	5925.000	37.30	6.32	43.62	-24.58	68.20	165	0	Peak
6	* 5965.095	36.97	6.46	43.43	-24.77	68.20	165	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

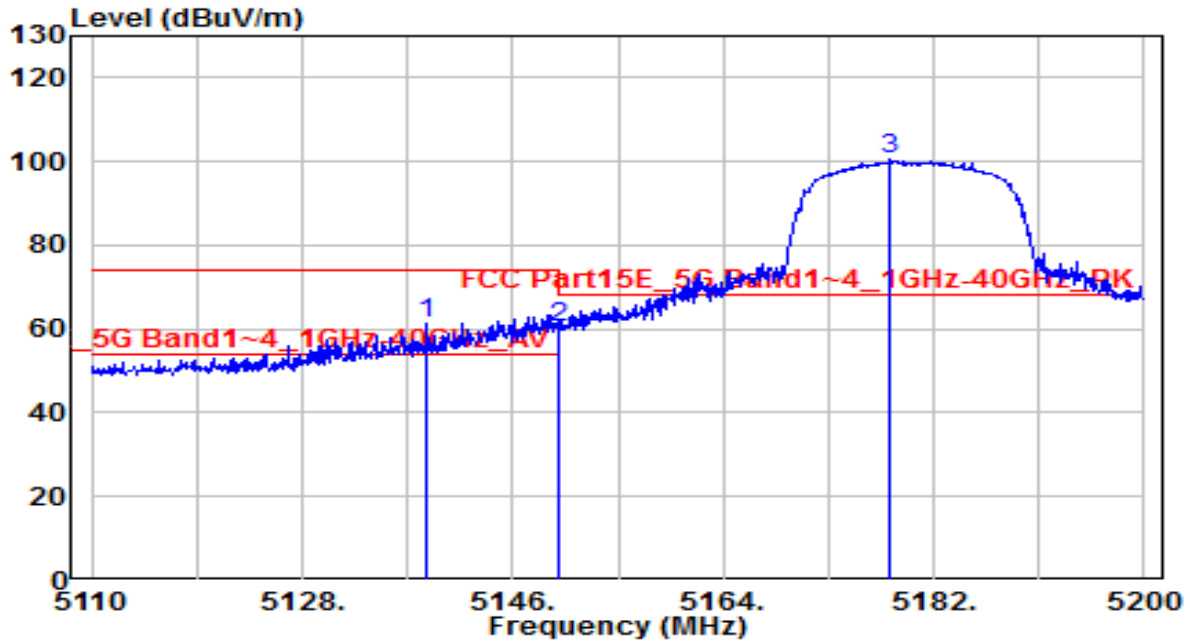


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5138.710	57.30	4.18	61.48	-12.52	74.00	150	15	Peak
2	5150.000	55.97	4.20	60.17	-13.83	74.00	150	15	Peak
3	5178.220	96.10	4.24	100.34	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

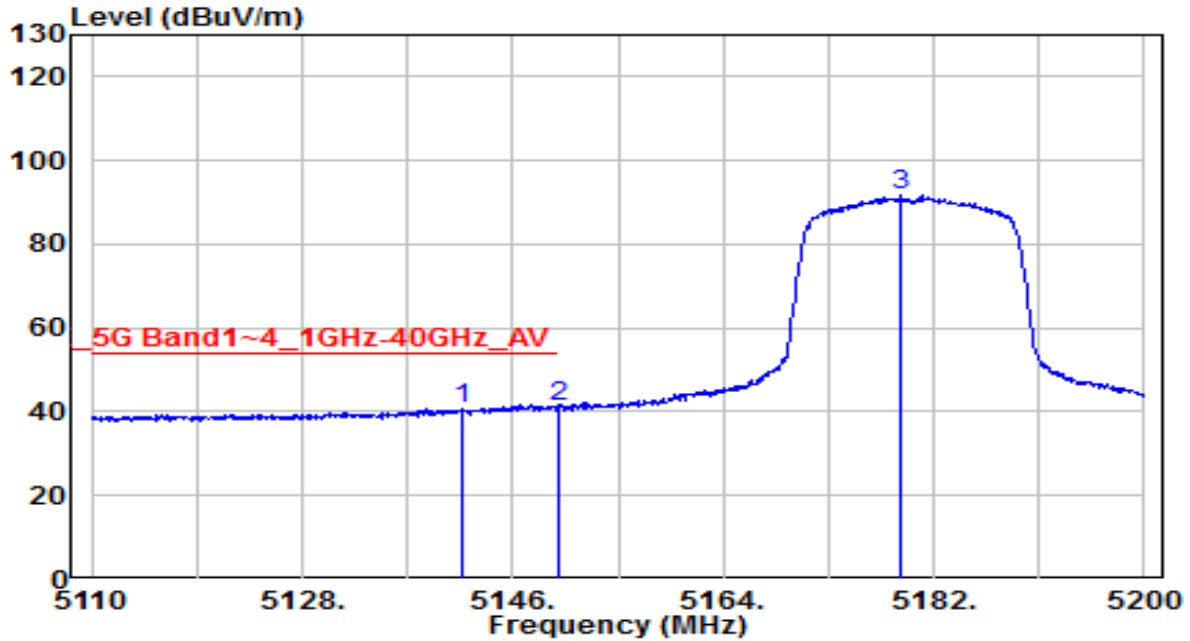


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.680	36.66	4.18	40.84	-13.16	54.00	150	15	Average
2	* 5150.000	36.92	4.20	41.12	-12.88	54.00	150	15	Average
3	5179.210	87.41	4.24	91.65	N/A	N/A	150	15	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

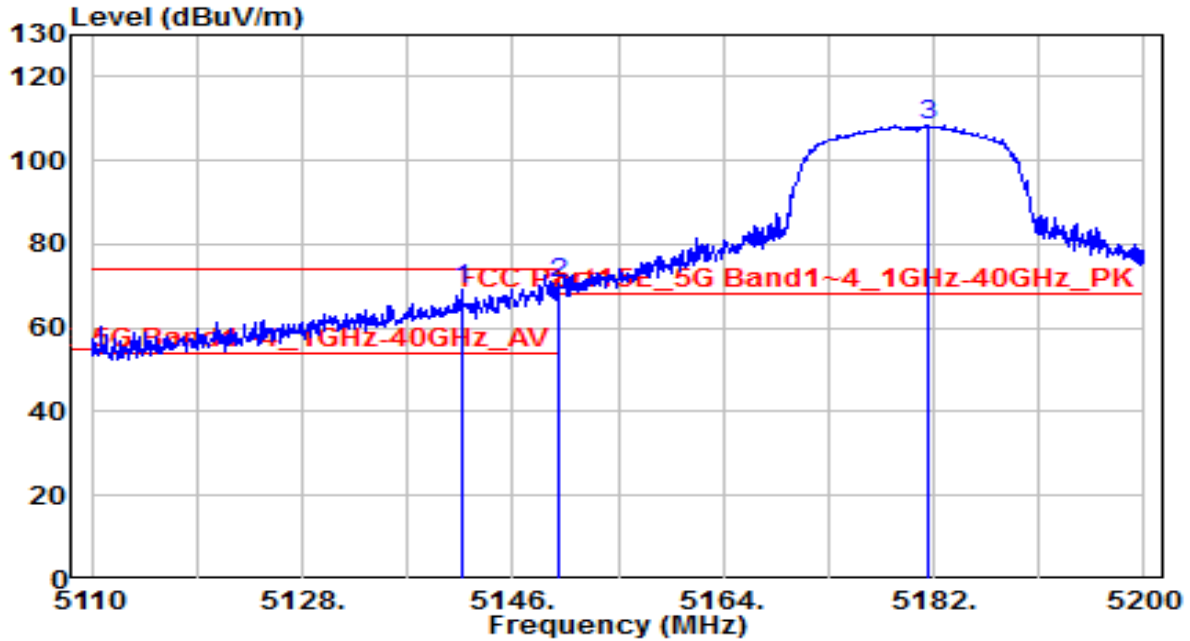


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.590	64.81	4.18	68.99	-5.01	74.00	160	30	Peak
2	* 5150.000	66.25	4.20	70.45	-3.55	74.00	160	30	Peak
3	5181.460	104.11	4.25	108.36	N/A	N/A	160	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

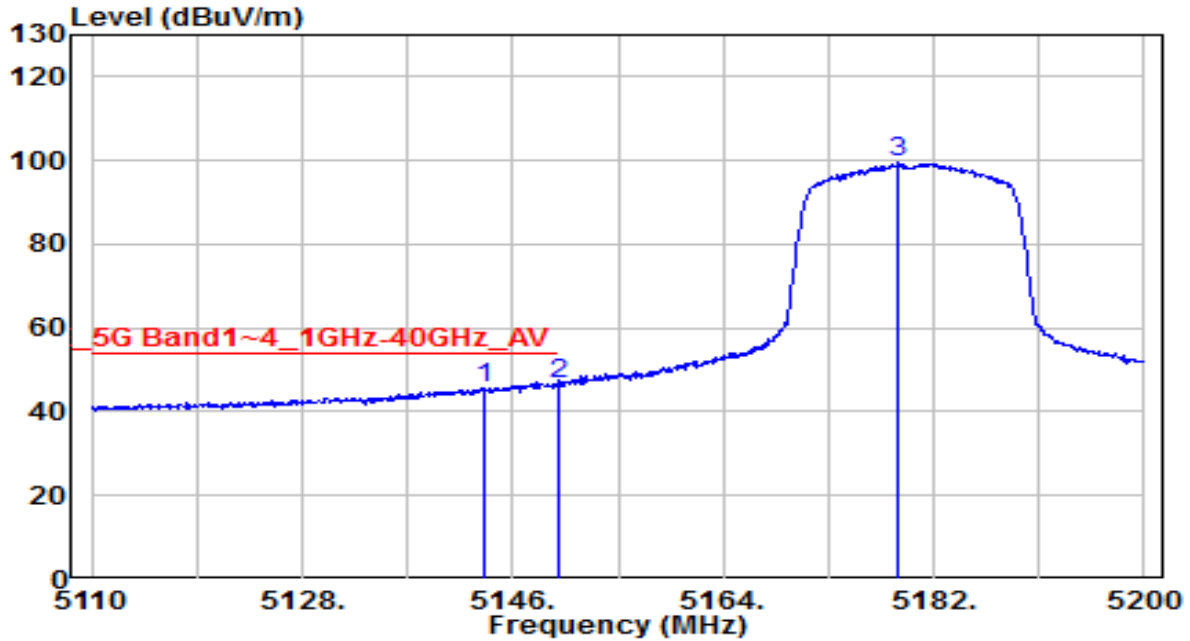


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.570	41.40	4.19	45.58	-8.42	54.00	160	30	Average
2	* 5150.000	42.34	4.20	46.54	-7.46	54.00	160	30	Average
3	5179.030	95.20	4.24	99.44	N/A	N/A	160	30	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

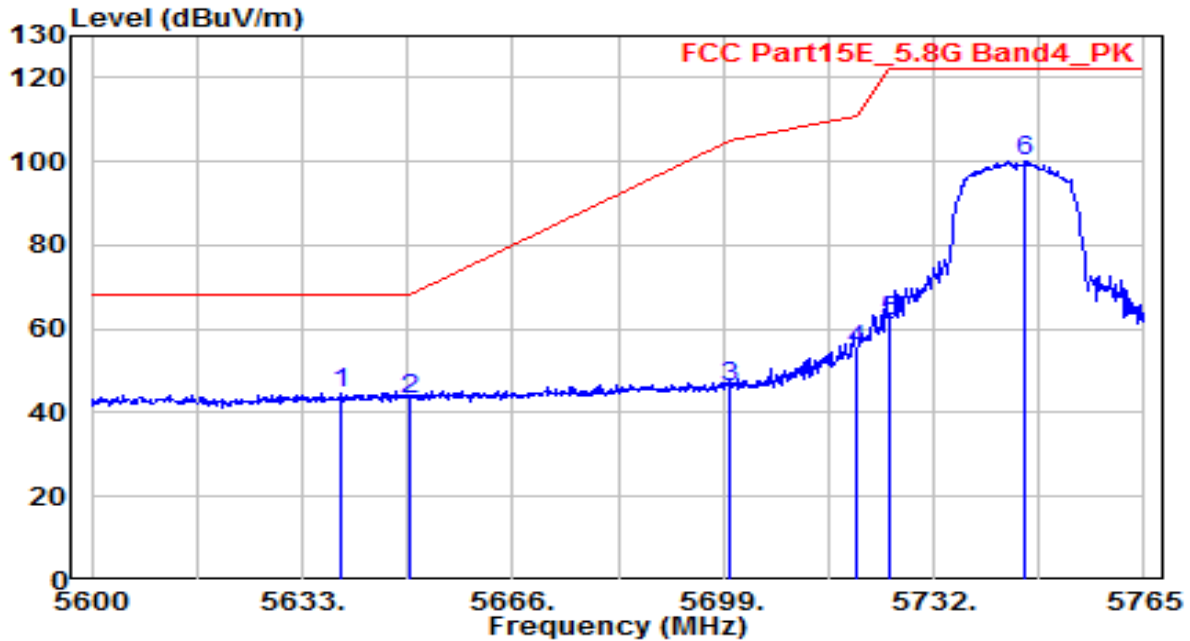


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5639.270	39.54	5.28	44.82	-23.38	68.20	175	315	Peak
2	5650.000	37.91	5.32	43.23	-24.97	68.20	175	315	Peak
3	5700.000	40.66	5.50	46.15	-59.05	105.20	175	315	Peak
4	5720.000	49.32	5.57	54.89	-55.91	110.80	175	315	Peak
5	5725.000	56.01	5.59	61.60	-60.60	122.20	175	315	Peak
6	5746.355	94.32	5.67	99.99	N/A	N/A	175	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

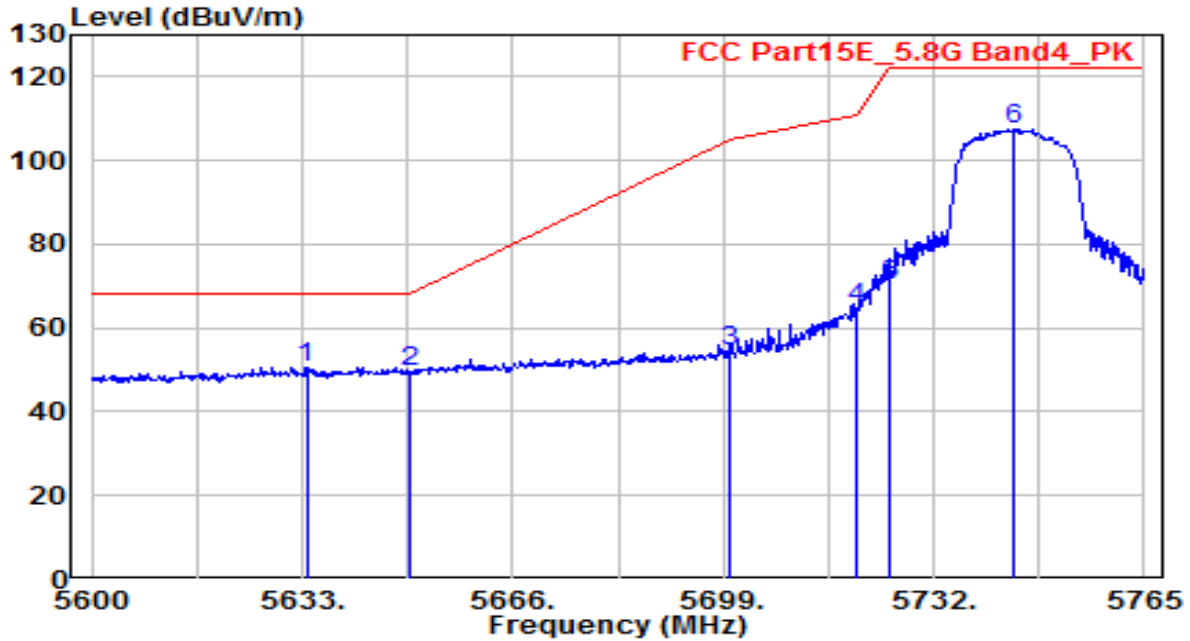


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5633.660	45.41	5.26	50.66	-17.54	68.20	200	50	Peak
2	5650.000	44.03	5.32	49.35	-18.85	68.20	200	50	Peak
3	5700.000	49.10	5.50	54.60	-50.60	105.20	200	50	Peak
4	5720.000	59.17	5.57	64.74	-46.06	110.80	200	50	Peak
5	5725.000	64.59	5.59	70.18	-52.02	122.20	200	50	Peak
6	5744.540	102.00	5.66	107.66	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

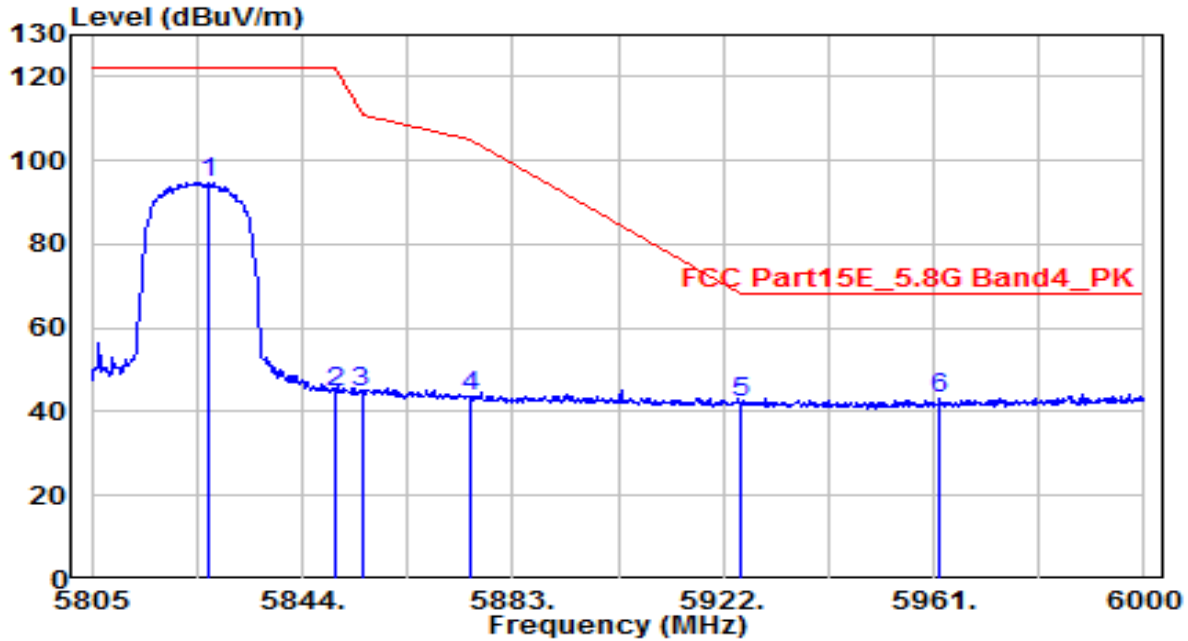


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	88.87	5.96	94.82	N/A	N/A	150	85	Peak
2	5850.000	38.72	6.04	44.76	-77.44	122.20	150	85	Peak
3	5855.000	38.61	6.06	44.68	-66.12	110.80	150	85	Peak
4	5875.000	37.66	6.13	43.80	-61.40	105.20	150	85	Peak
5	5925.000	35.76	6.32	42.08	-26.12	68.20	150	85	Peak
6	* 5961.975	36.96	6.45	43.41	-24.79	68.20	150	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

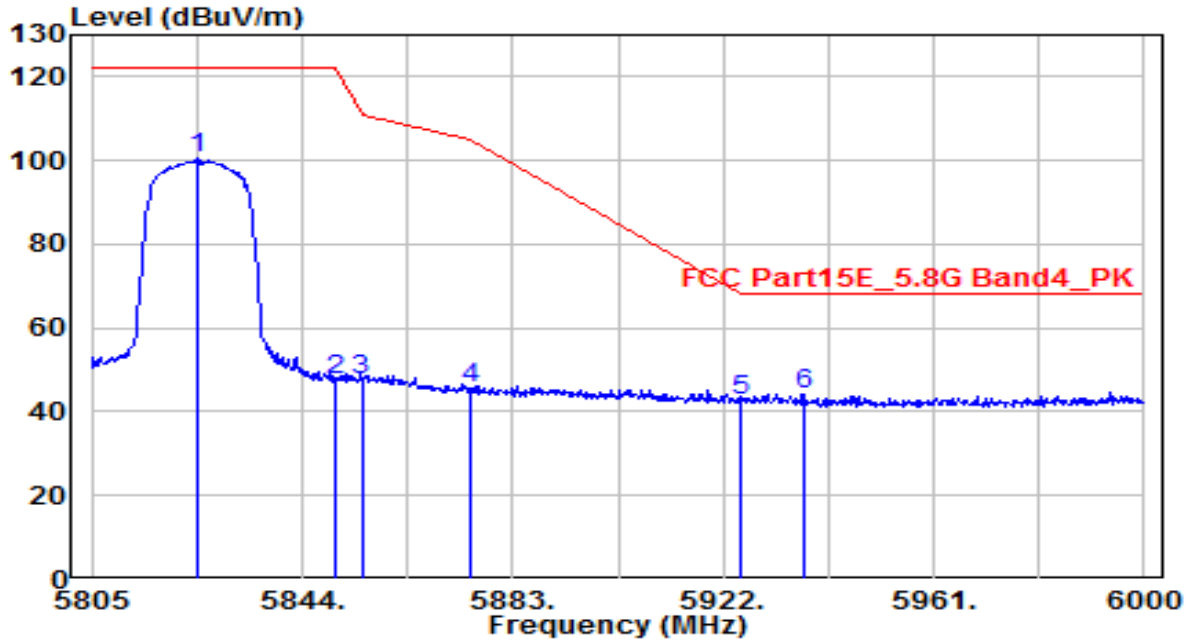


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.500	94.46	5.95	100.41	N/A	N/A	165	0	Peak
2	5850.000	41.71	6.04	47.75	-74.45	122.20	165	0	Peak
3	5855.000	41.41	6.06	47.47	-63.33	110.80	165	0	Peak
4	5875.000	39.68	6.13	45.82	-59.38	105.20	165	0	Peak
5	5925.000	36.19	6.32	42.50	-25.70	68.20	165	0	Peak
6 *	5937.210	37.91	6.36	44.27	-23.93	68.20	165	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

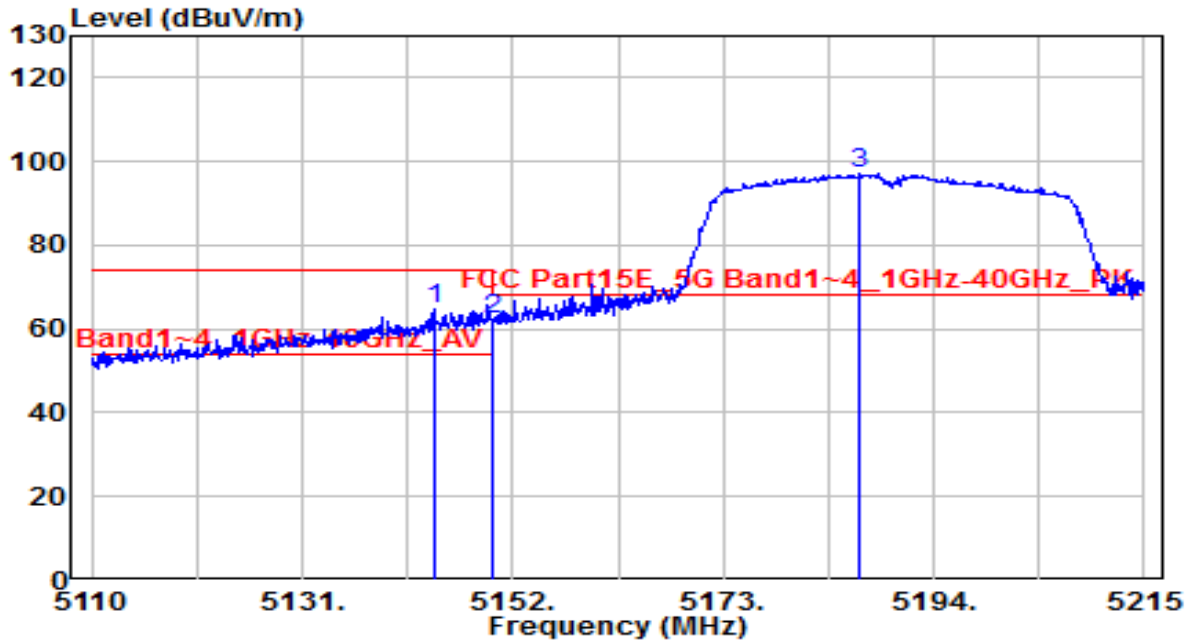


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5144.125	60.65	4.19	64.83	-9.17	74.00	150	15	Peak
2	5150.000	58.28	4.20	62.47	-11.53	74.00	150	15	Peak
3	5186.650	93.12	4.26	97.38	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

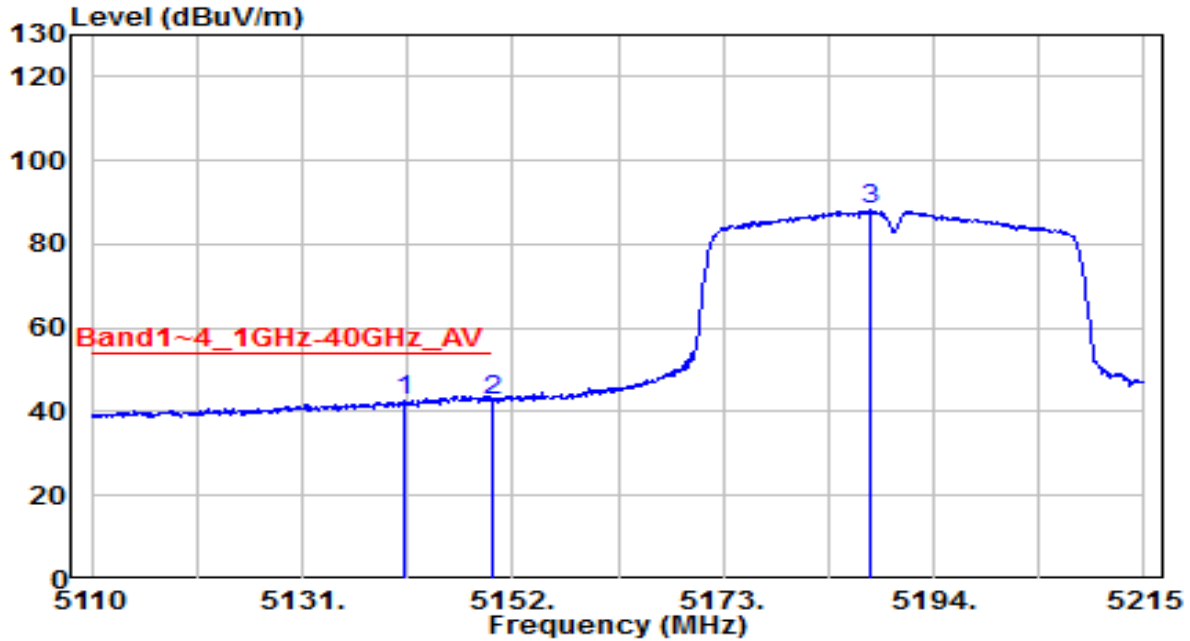


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5141.290	38.40	4.18	42.58	-11.42	54.00	150	15	Average
2	5150.000	38.37	4.20	42.57	-11.43	54.00	150	15	Average
3	5187.700	83.82	4.26	88.08	N/A	N/A	150	15	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

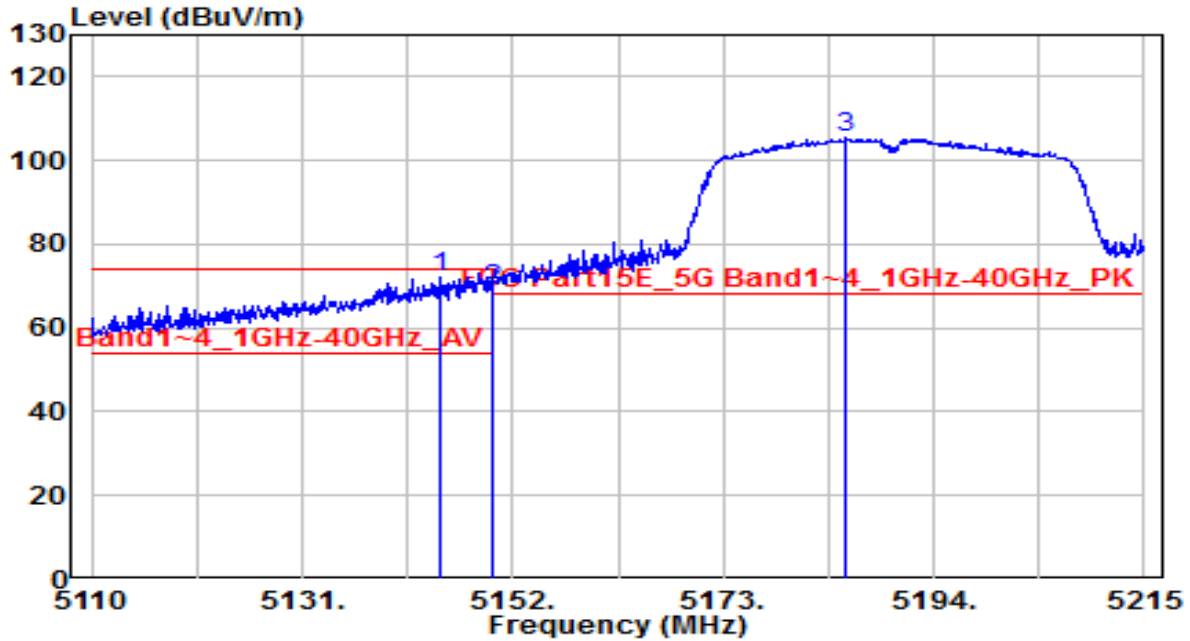


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5144.650	67.84	4.19	72.03	-1.97	74.00	160	30	Peak
2	5150.000	65.20	4.20	69.40	-4.60	74.00	160	30	Peak
3	5185.285	100.98	4.25	105.24	N/A	N/A	160	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

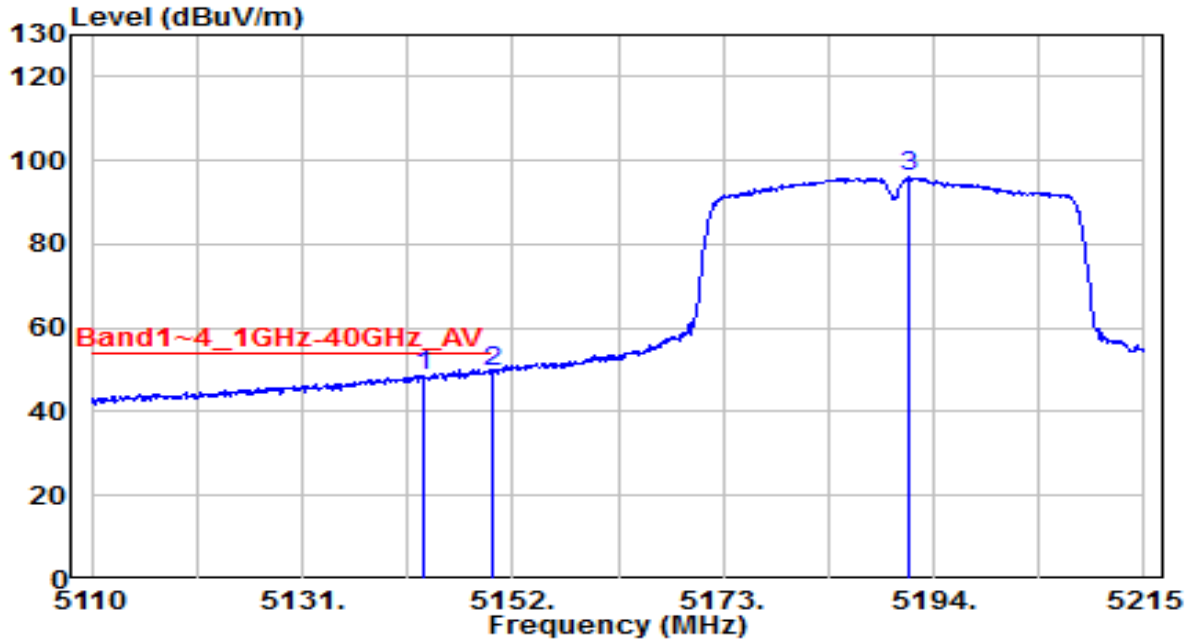


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.180	44.23	4.18	48.41	-5.59	54.00	160	30	Average
2	* 5150.000	45.26	4.20	49.45	-4.55	54.00	160	30	Average
3	5191.585	91.91	4.26	96.18	N/A	N/A	160	30	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

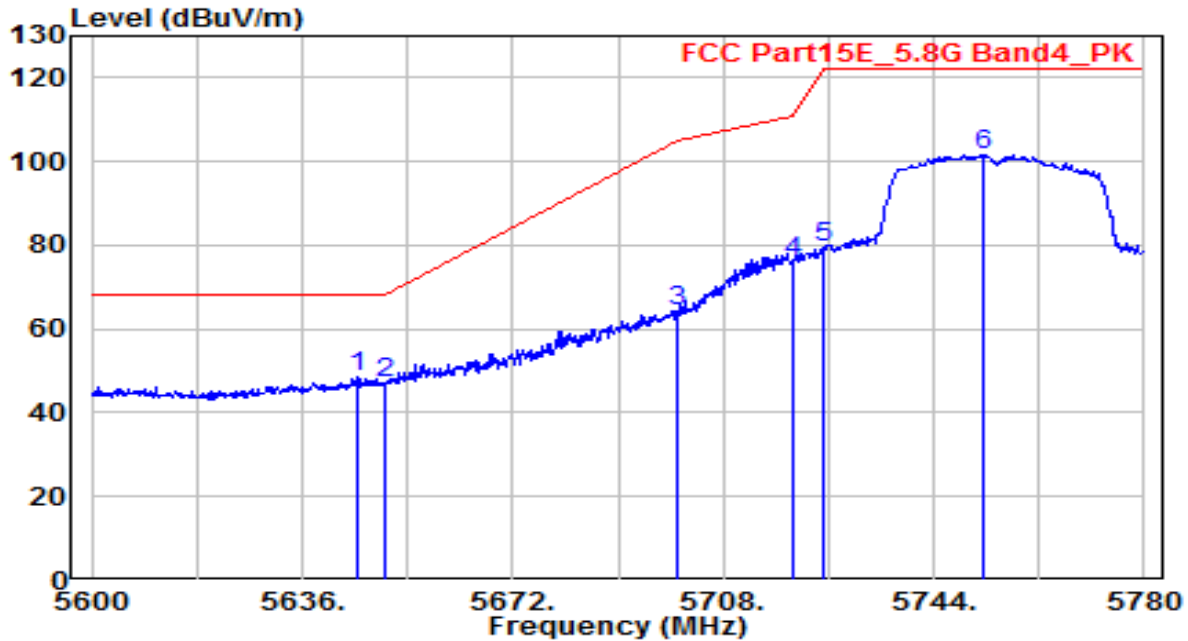


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.360	43.25	5.30	48.55	-19.65	68.20	175	315	Peak
2	5650.000	41.59	5.32	46.91	-21.29	68.20	175	315	Peak
3	5700.000	58.63	5.50	64.13	-41.07	105.20	175	315	Peak
4	5720.000	70.64	5.57	76.21	-34.59	110.80	175	315	Peak
5	5725.000	73.73	5.59	79.32	-42.88	122.20	175	315	Peak
6	5752.460	95.87	5.69	101.56	N/A	N/A	175	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

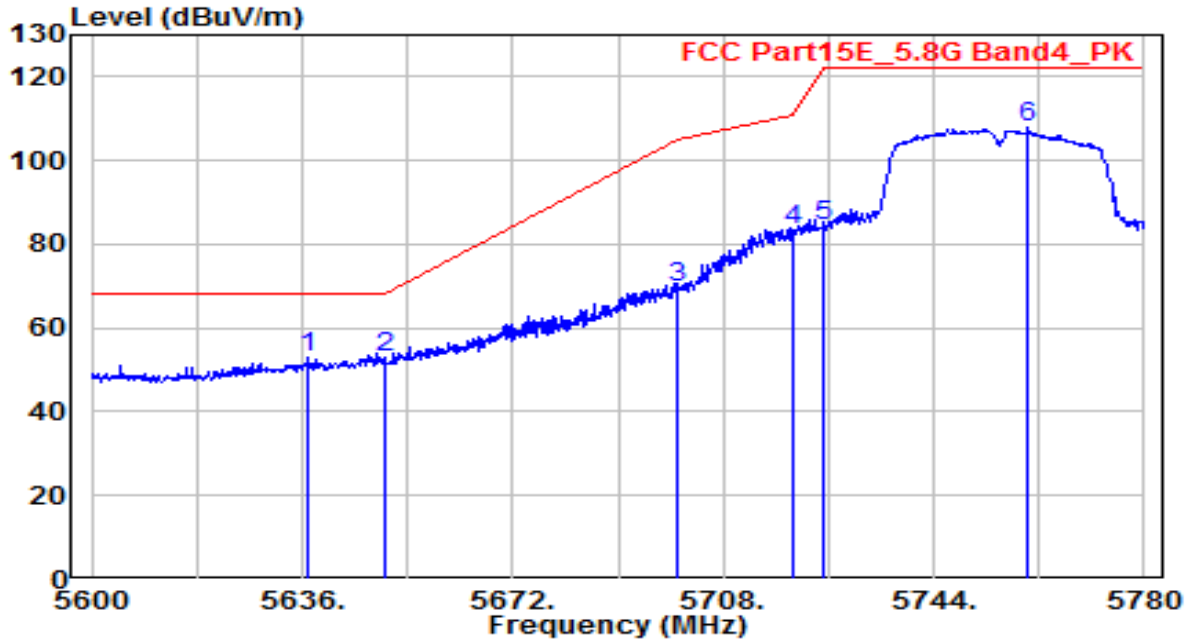


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5636.900	47.53	5.27	52.80	-15.40	68.20	200	50	Peak
2	* 5650.000	47.84	5.32	53.16	-15.04	68.20	200	50	Peak
3	5700.000	63.97	5.50	69.46	-35.74	105.20	200	50	Peak
4	5720.000	77.86	5.57	83.43	-27.37	110.80	200	50	Peak
5	5725.000	79.01	5.59	84.60	-37.60	122.20	200	50	Peak
6	5760.200	101.96	5.72	107.68	N/A	N/A	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

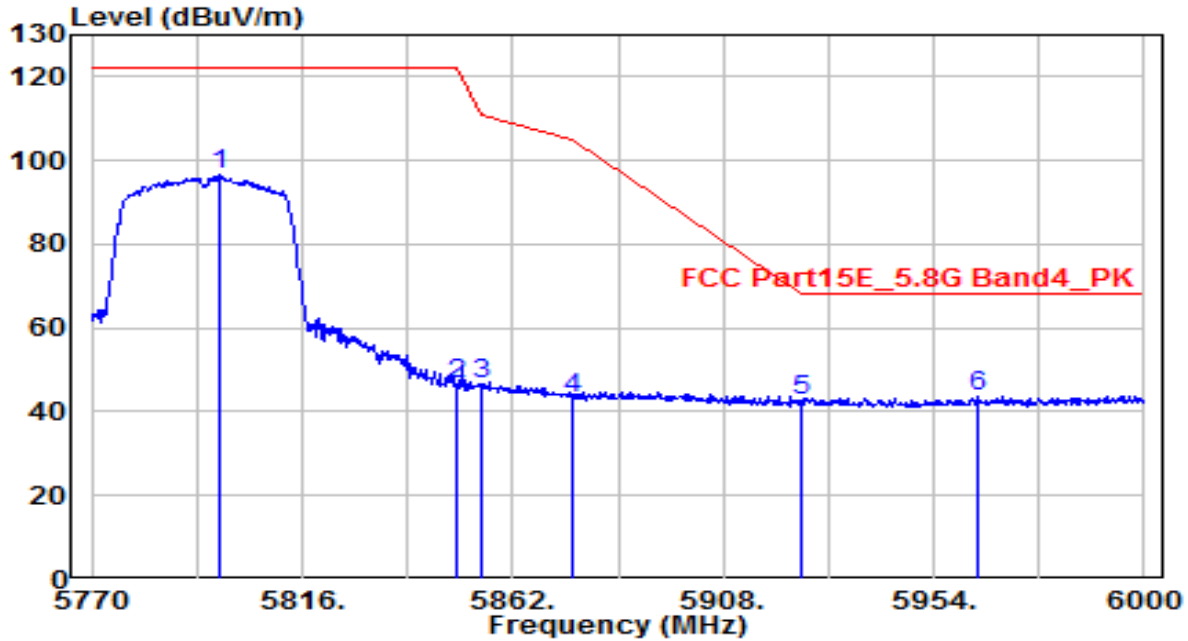


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.060	90.70	5.85	96.55	N/A	N/A	150	85	Peak
2	5850.000	40.46	6.04	46.50	-75.70	122.20	150	85	Peak
3	5855.000	40.76	6.06	46.82	-63.98	110.80	150	85	Peak
4	5875.000	37.24	6.13	43.38	-61.82	105.20	150	85	Peak
5	5925.000	36.35	6.32	42.67	-25.53	68.20	150	85	Peak
6	* 5963.660	37.12	6.46	43.58	-24.62	68.20	150	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

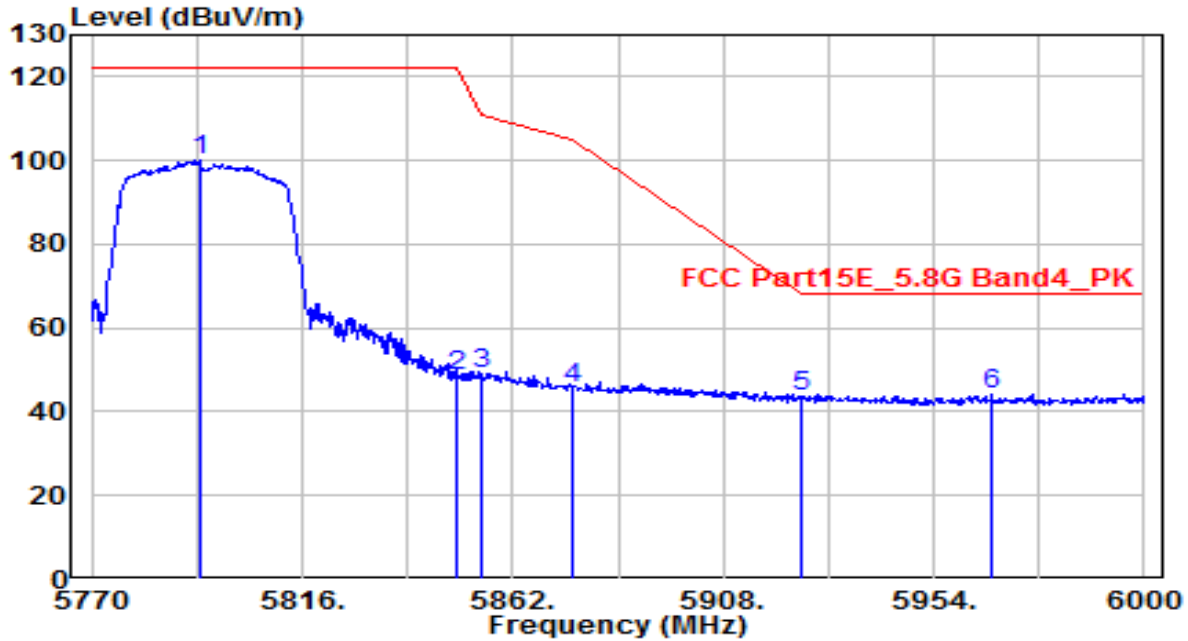


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.460	94.19	5.84	100.03	N/A	N/A	165	0	Peak
2	5850.000	42.52	6.04	48.56	-73.64	122.20	165	0	Peak
3	5855.000	42.77	6.06	48.83	-61.97	110.80	165	0	Peak
4	5875.000	39.26	6.13	45.39	-59.81	105.20	165	0	Peak
5	5925.000	37.34	6.32	43.66	-24.54	68.20	165	0	Peak
6	* 5966.880	37.56	6.47	44.03	-24.17	68.20	165	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

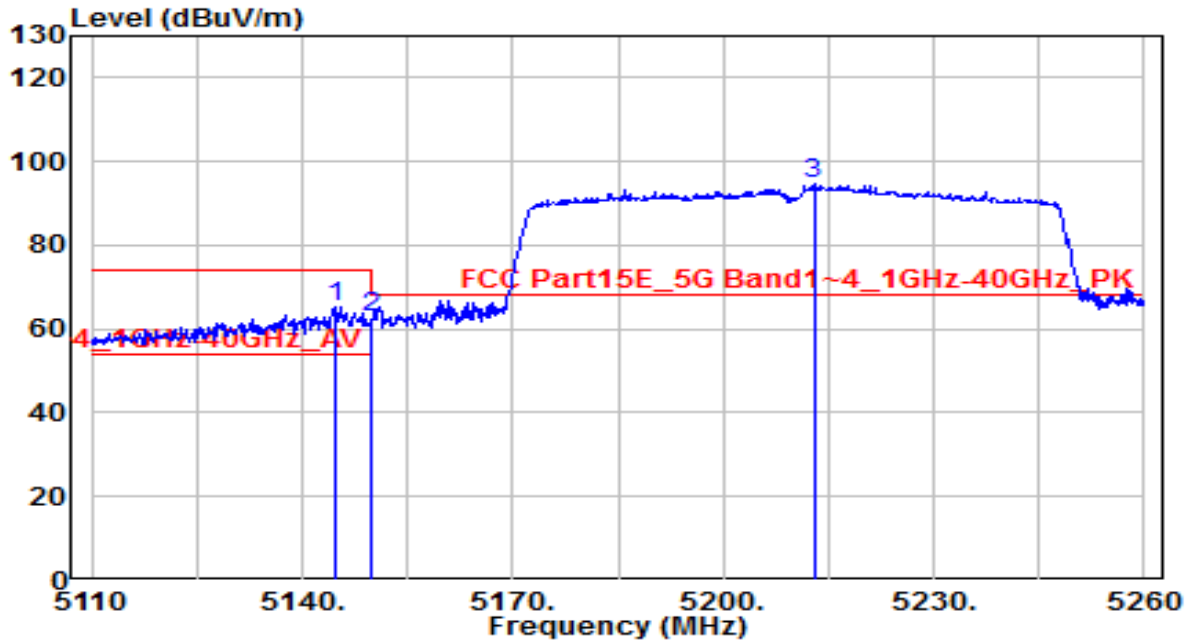


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5144.650	61.24	4.19	65.43	-8.57	74.00	150	15	Peak
2	5150.000	58.41	4.20	62.61	-11.39	74.00	150	15	Peak
3	5212.900	90.49	4.30	94.79	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

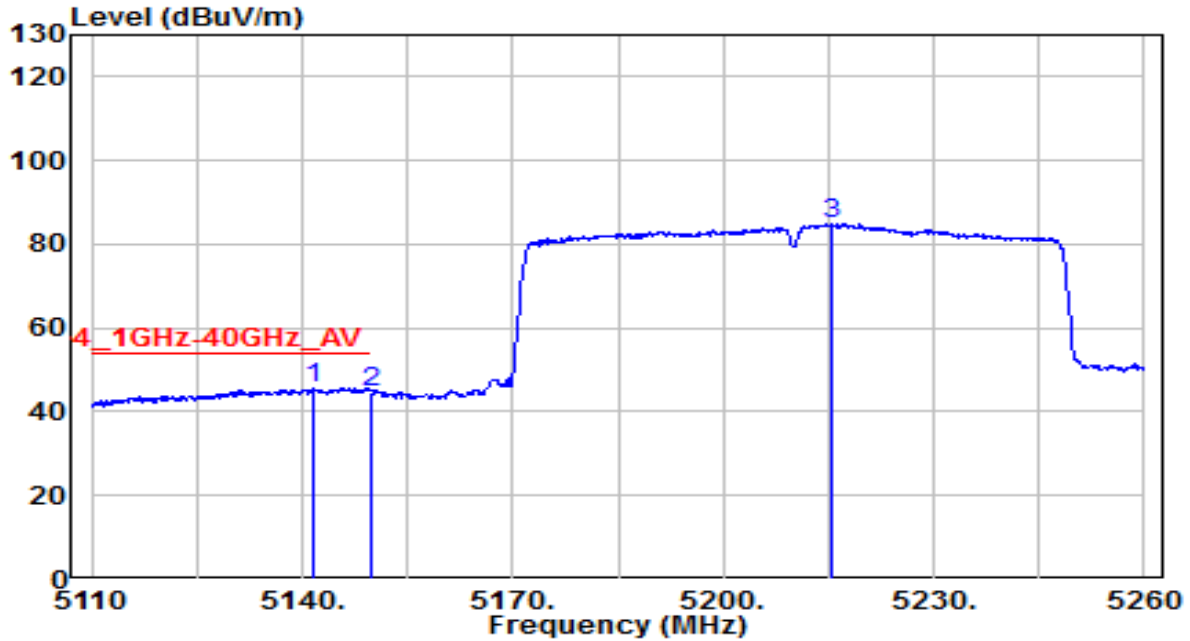


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.650	41.20	4.18	45.39	-8.61	54.00	150	15	Average
2	5150.000	40.35	4.20	44.55	-9.45	54.00	150	15	Average
3	5215.300	80.62	4.30	84.92	N/A	N/A	150	15	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

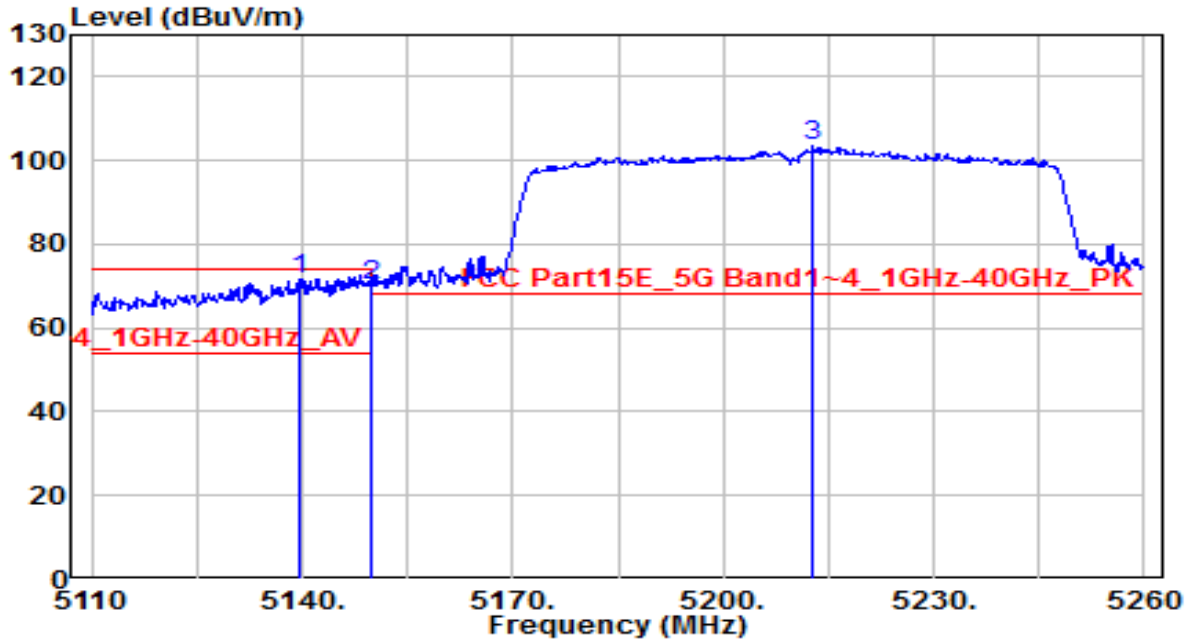


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5139.700	67.67	4.18	71.85	-2.15	74.00	160	30	Peak
2	5150.000	66.15	4.20	70.34	-3.66	74.00	160	30	Peak
3	5212.750	99.37	4.30	103.67	N/A	N/A	160	30	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

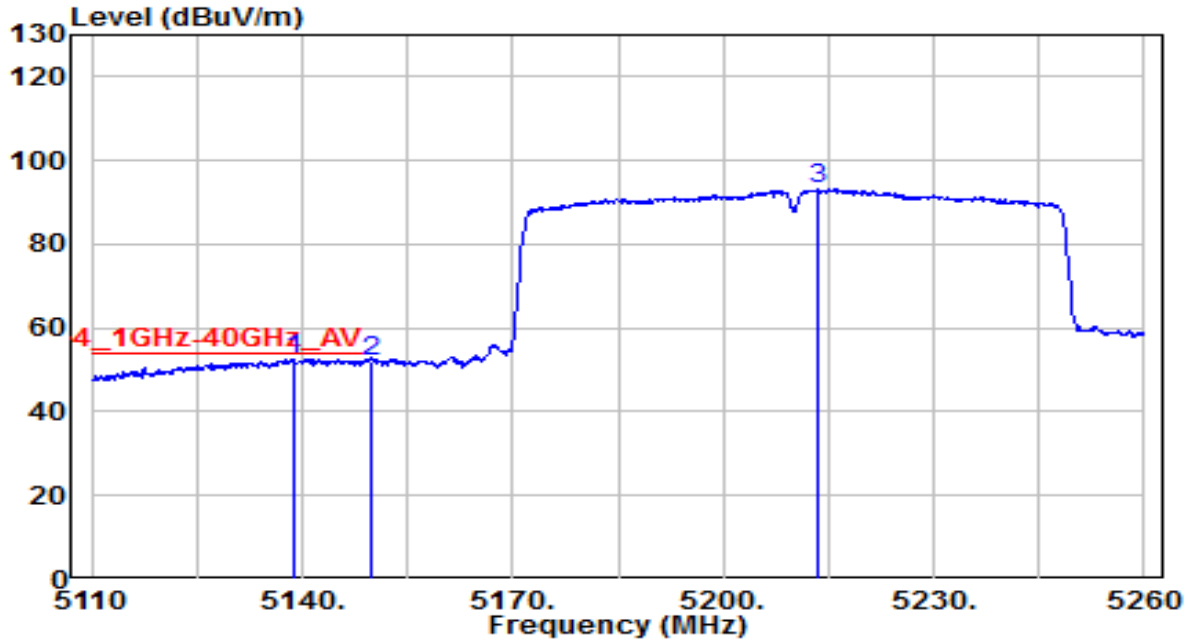


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.650	48.26	4.18	52.44	-1.56	54.00	160	30	Average
2	5150.000	47.83	4.20	52.02	-1.98	54.00	160	30	Average
3	5213.500	88.80	4.30	93.10	N/A	N/A	160	30	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

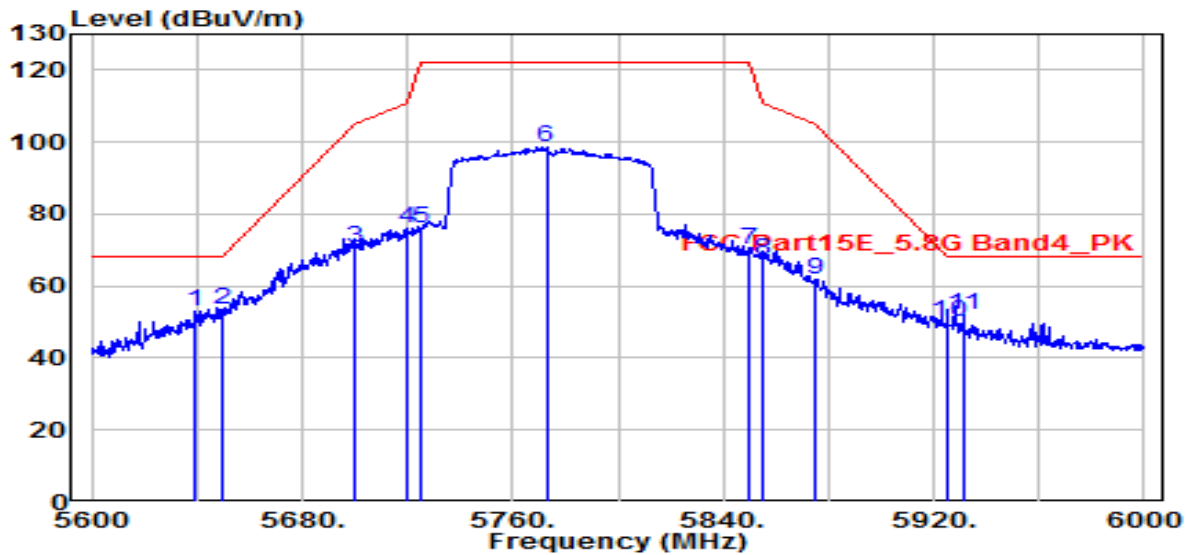


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5639.600	47.91	5.28	53.19	-15.01	68.20	150	85	Peak
2	* 5650.000	48.35	5.32	53.66	-14.54	68.20	150	85	Peak
3	5700.000	65.00	5.50	70.49	-34.71	105.20	150	85	Peak
4	5720.000	70.25	5.57	75.82	-34.98	110.80	150	85	Peak
5	5725.000	70.49	5.59	76.08	-46.12	122.20	150	85	Peak
6	5772.800	92.78	5.76	98.54	N/A	N/A	150	85	Peak
7	5850.000	64.29	6.04	70.33	-51.87	122.20	150	85	Peak
8	5855.000	61.32	6.06	67.38	-43.42	110.80	150	85	Peak
9	5875.000	55.80	6.13	61.94	-43.26	105.20	150	85	Peak
10	5925.000	43.59	6.32	49.91	-18.29	68.20	150	85	Peak
11	5931.600	45.74	6.34	52.08	-16.12	68.20	150	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-07-10
Factor	BBHA 9120D	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

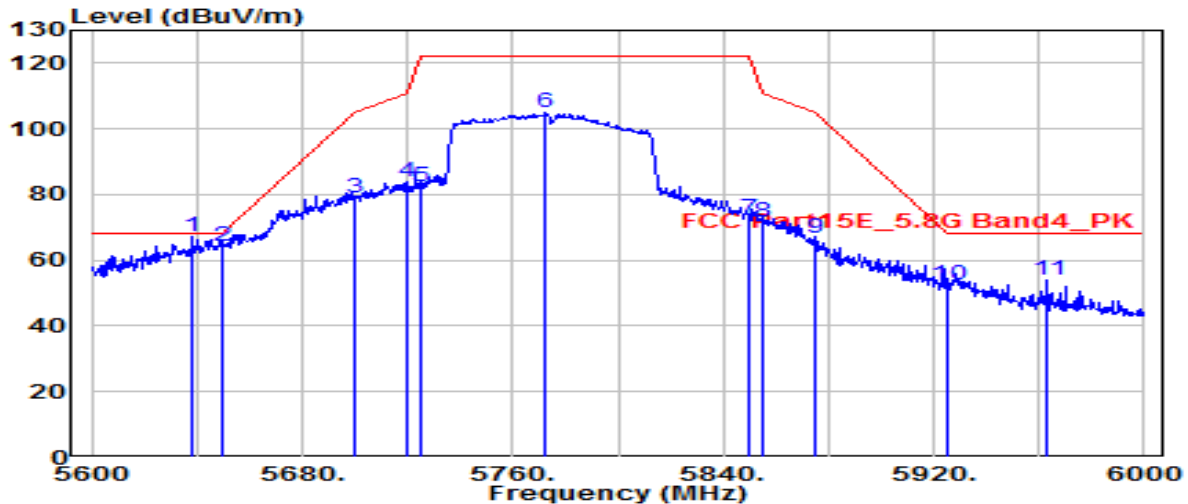

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5638.400	61.80	5.27	67.07	-1.13	68.20	200	50	Peak
2	5650.000	59.04	5.32	64.35	-3.85	68.20	200	50	Peak
3	5700.000	73.68	5.50	79.18	-26.02	105.20	200	50	Peak
4	5720.000	78.25	5.57	83.82	-26.98	110.80	200	50	Peak
5	5725.000	76.76	5.59	82.35	-39.85	122.20	200	50	Peak
6	5772.400	99.13	5.76	104.89	N/A	N/A	200	50	Peak
7	5850.000	66.67	6.04	72.71	-49.49	122.20	200	50	Peak
8	5855.000	65.50	6.06	71.56	-39.24	110.80	200	50	Peak
9	5875.000	60.35	6.13	66.49	-38.71	105.20	200	50	Peak
10	5925.000	46.33	6.32	52.65	-15.55	68.20	200	50	Peak
11	5963.200	47.63	6.46	54.08	-14.12	68.20	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

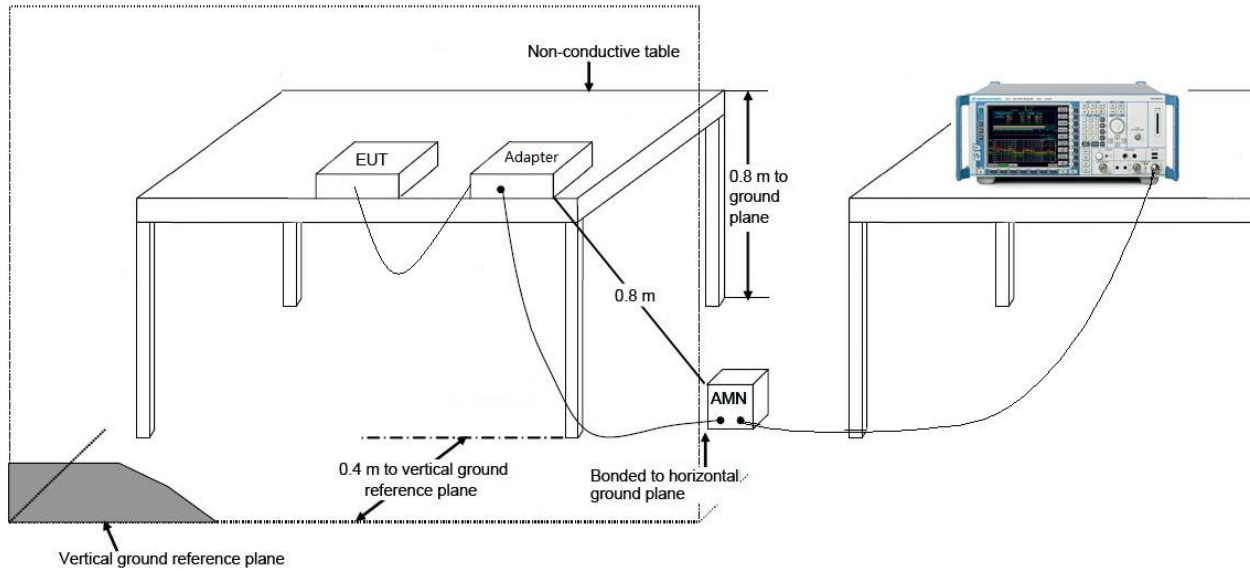

7.9.4. Test Result

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-06-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	28.4°C /49%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

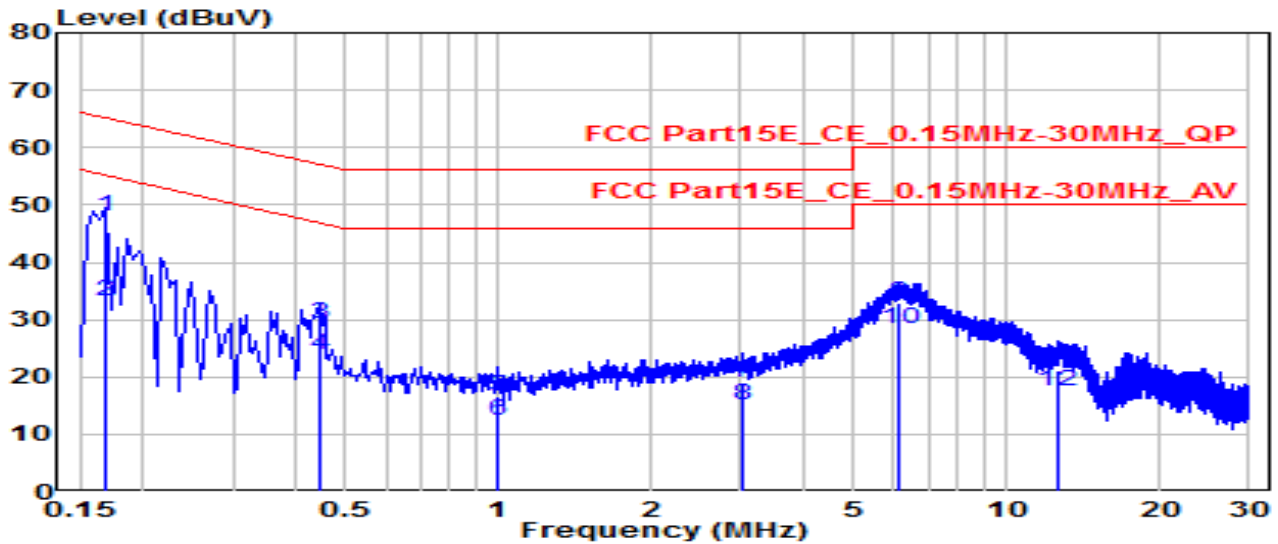


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.168	38.44	9.61	48.05	-17.00	65.06	QP
2	*	0.168	23.55	9.61	33.16	-21.90	55.06	Average
3		0.442	19.65	9.63	29.27	-27.74	57.02	QP
4		0.442	14.36	9.63	23.98	-23.03	47.02	Average
5		0.996	7.00	9.66	16.66	-39.34	56.00	QP
6		0.996	2.75	9.66	12.41	-33.59	46.00	Average
7		3.034	9.40	9.71	19.11	-36.89	56.00	QP
8		3.034	5.52	9.71	15.22	-30.78	46.00	Average
9		6.103	23.11	9.77	32.88	-27.12	60.00	QP
10		6.103	18.61	9.77	28.38	-21.62	50.00	Average
11		12.542	11.30	9.90	21.20	-38.80	60.00	QP
12		12.542	7.67	9.90	17.57	-32.43	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-06-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	28.4°C /49%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

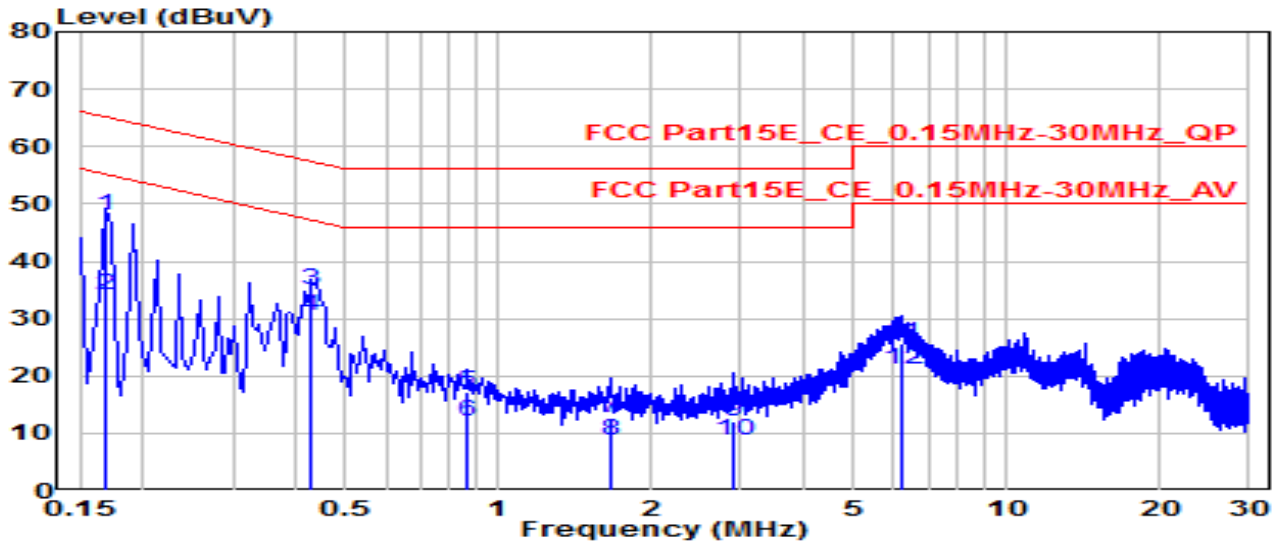


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.168	38.36	9.62	47.98	-17.08	65.06	QP
2	0.168	24.38	9.62	34.00	-21.06	55.06	Average
3	* 0.429	25.25	9.63	34.88	-22.39	57.27	QP
4	* 0.429	20.99	9.63	30.62	-16.65	47.27	Average
5	0.865	7.49	9.66	17.15	-38.85	56.00	QP
6	0.865	2.45	9.66	12.11	-33.89	46.00	Average
7	1.657	2.88	9.68	12.56	-43.44	56.00	QP
8	1.657	-0.84	9.68	8.85	-37.15	46.00	Average
9	2.913	2.31	9.71	12.02	-43.98	56.00	QP
10	2.913	-1.01	9.71	8.70	-37.30	46.00	Average
11	6.206	15.93	9.78	25.71	-34.29	60.00	QP
12	6.206	11.36	9.78	21.14	-28.86	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-06-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	28.4°C /49%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

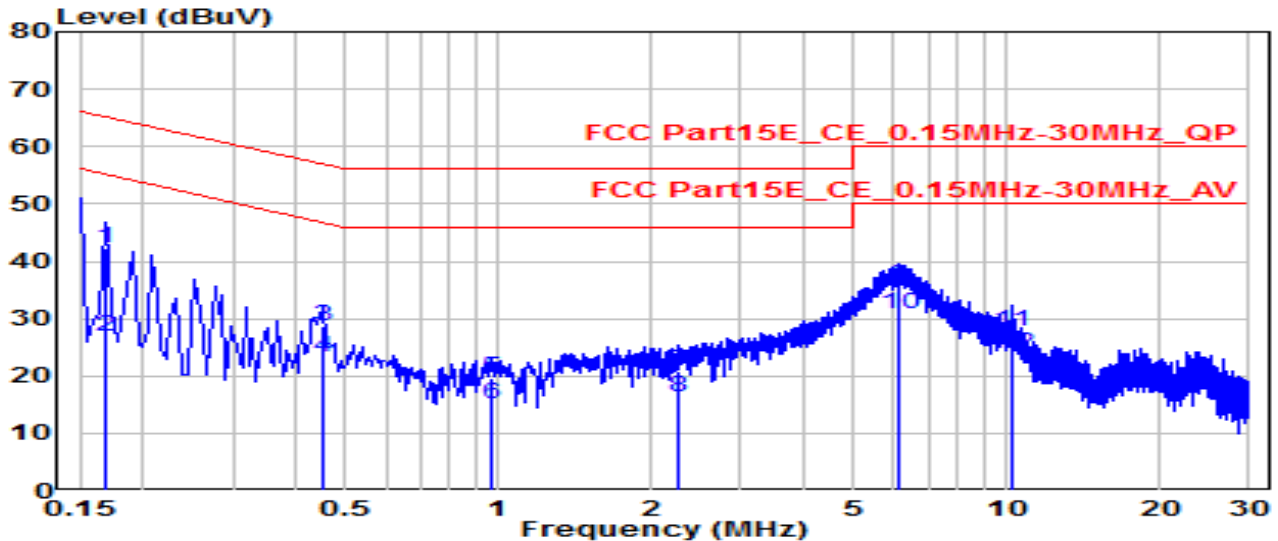


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.168	32.79	9.61	42.40	-22.66	65.06	QP
2	0.168	17.28	9.61	26.89	-28.17	55.06	Average
3	0.451	19.00	9.63	28.63	-28.22	56.85	QP
4	0.451	13.74	9.63	23.37	-23.48	46.85	Average
5	0.964	9.89	9.66	19.55	-36.45	56.00	QP
6	0.964	5.37	9.66	15.03	-30.97	46.00	Average
7	2.269	11.10	9.69	20.80	-35.20	56.00	QP
8	2.269	6.68	9.69	16.38	-29.62	46.00	Average
9	* 6.121	25.89	9.77	35.66	-24.34	60.00	QP
10	* 6.121	21.03	9.77	30.80	-19.20	50.00	Average
11	10.238	17.88	9.87	27.75	-32.25	60.00	QP
12	10.238	13.92	9.87	23.79	-26.21	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Unibody Fever & Mask Screening Solution	Date of Test	2021-06-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	28.4°C /49%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

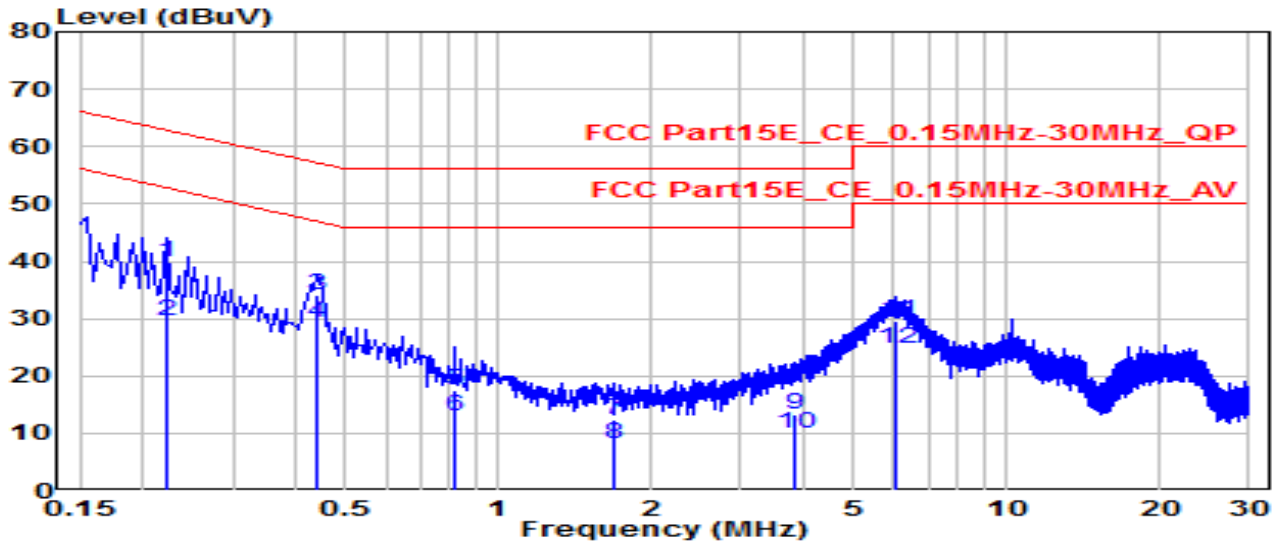

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.222	30.21	9.61	39.82	-22.92	62.74	QP
2	0.222	20.07	9.61	29.68	-23.06	52.74	Average
3	* 0.438	24.59	9.63	34.22	-22.88	57.10	QP
4	* 0.438	19.59	9.63	29.22	-17.88	47.10	Average
5	0.820	7.92	9.66	17.58	-38.42	56.00	QP
6	0.820	3.47	9.66	13.13	-32.87	46.00	Average
7	1.693	2.72	9.68	12.40	-43.60	56.00	QP
8	1.693	-1.64	9.68	8.04	-37.96	46.00	Average
9	3.826	3.46	9.73	13.18	-42.82	56.00	QP
10	3.826	0.32	9.73	10.04	-35.96	46.00	Average
11	6.062	19.75	9.78	29.53	-30.47	60.00	QP
12	6.062	14.85	9.78	24.63	-25.37	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Unibody Fever & Mask Screening Solution, Model Number: S409** is in compliance with Part 15E of the FCC Rules.

————— The End —————