

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER: CGZ3140611-00614-EFI



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





TEST REPORT For FCC ID/IC 47 CFR PART 15 OCT, 2013

RSS-210 Issue 8 Report Reference No. CGZ3140611-00614-EFI Testing Laboratory Name CENTRE OF TESTING SERVICE CO., LTD. Testing location/ procedure Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method Applicant's name CHINA TOPWIN INDUSTRY CO., LTD. Test specification Standard ANSI C 63.4:2009, 47 CFR PART 15 OCT, 2013 RSS-210 Issue 8,RSS-Gen Issue 3 Test Report Form No. CTSEMC-1.0

TRF Originator CENTRE OF TESTING SERVICE CO., LTD.

Master TRF...... Dated 2009-01

CENTRE OF TESTING SERVICE CO., LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the CENTRE OF TESTING SERVICE CO., LTD is acknowledged as copyright owner and source of the material. CENTRE OF TESTING SERVICE CO., LTD takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description...... 2.4G 4CH Nano quadcopter

Trade Mark..... CTW

Manufacturer...... CHINA TOPWIN INDUSTRY CO., LTD.

Model/Type reference...... REH67395

Ratings..... Battery 1.5V*2

Operating Frequency 2405.0MHz ~2475.0MHz

Result Positive

Compiled by:

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





FCC ID/IC -- TEST REPORT

Test Report No. : CGZ3140611-00614-EFI

25 June 2014
Date of issue

Type / Model	REH67395
EUT	2.4G 4CH Nano quadcopter
Applicant	CHINA TOPWIN INDUSTRY CO., LTD.
Address	A-G of 3/F, Block B, CENTRAL Building, Xixiang Road, BaoAn District, Shenzhen, Guangdong, China
Telephone	+86-755-83660365
Fax	+86-755-83660251
Contact	David Zheng
	CUINA TORWIN INDUSTRY OF LTD
Manufacturer	CHINA TOPWIN INDUSTRY CO., LTD.
Address	A-G of 3/F, Block B, CENTRAL Building, Xixiang Road, BaoAn District, Shenzhen, Guangdong, China
Telephone	+86-755-83660365
Fax	+86-755-83660251
Contact	David Zheng
Test report holder	CHINA TOPWIN INDUSTRY CO., LTD.
Address	A-G of 3/F, Block B, CENTRAL Building, Xixiang Road, BaoAn District, Shenzhen, Guangdong, China
Telephone	+86-755-83660365
Fax	+86-755-83660251
Contact	David Zheng

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.



TABLE OF CONTENTS

<u>Description</u>	Page
1.TEST STANDARDS	5
1.1201 GTANDANDG	
2.SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3.EQUIPMENT UNDER TEST	5
3.1 Power supply system utilised	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	5
3.4 EUT CONFIGURATION	6
4.TEST ENVIRONMENT	7
4.1 Address of the test laboratory	
4.2 TEST FACILITY	
4.3 Environmental conditions	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	8
5.SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	g
6.2. BLOCK DIAGRAM OF TEST SETUP	
6.3. Power Line Conducted Emission Test Limits	
6.4.Test Procedure	
6.5. Power Line Conducted Emission Test Results	9
7.RADIATED DISTURBANCE (ELECTRIC FIELD)	10
7.1.Test Equipment	
7.2.BLOCK DIAGRAM OF TEST SETUP	
7.3.RADIATED EMISSION LIMIT:	
7.4.Test Procedure	
7.5.RADIATED EMISSION TEST RESULTS	12
8.BAND EDGE COMPLIANCE TEST	22
8.1. TEST EQUIPMENT	
8.2. TEST PROCEDURE	
8.3. TEST RESULTS	
copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approva	a or the issuing company.

CENTRE OF TESTING SERVICE CO., LTD.





9. 99% BANDWIDTH	27
9.1 Test procedure	2
9.2. TEST EQUIPMENT	
9.3. TEST RESULTS	2 ⁻
10.DEVIATION TO TEST SPECIFICATIONS	30

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





1.TEST STANDARDS

The tests were performed according to following standards:

- RSS-210 Issue 8
- RSS-Gen Issue 3
- 47 CFR PART 15 OCT, 2013
- ANSI C63.4-2009

2.SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	11 June 2014
Testing commenced on	11~25 June 2014
Testing concluded on	25 June 2014

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- □ **not** fulfilled.

The equipment under test

- fulfils the IC requirements cited on page 1.
- does not fulfil the IC requirements cited on page 1.

3.EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ Battery 1.5V*2

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- □ Standby
- ☐ TX- Y position
- ☐ TX- Zposition
- TX- X position

Operation mode 1:TX-X Position Low (2405MHz) , TX-X Position Middle (2445MHz), TX-X Position High (2475MHz)

Note:Operation mode 1 TX -X position of EUT is the radiated test worst case; so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	2.4G 4CH Nano quadcopter
Model Number	:	REH67395
Operation frequency	:	2405~ 2475 MHz ISM Band
Radio Technology	:	GFSK
Modulation Technology	:	GFSK modulation
Antenna	:	Internal antenna, met requirement of FCC 15.203

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





4.TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on May 22, 2014.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3140611-00614-EFI Page 7 of 30





4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
	30MHz~300MHz	±3.14dB	(1)
Radiation emission (3m)	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item Standard Re			
Conducted Emission Test	RSS-Gen:7.2.4 FCC Part 15 : 15.207 ANSI C63.4-2009	N/A	
Radiated Emission Test	RSS-Gen:7.2 RSS-210 A2.9 FCC Part 15 : 15.209&249 ANSI C63.4-2009	PASSED	
RSS-210 Annex 8			
99% Bandwidth RSS-210 Annex 8 RSS-Gen 4.6.1 PASSED			
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





6. Power Line Conducted Emission Test

6.1.Test Equipment

Conduc	ted Disturbance				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2013/11
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2013/11
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2013/11
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2013/11
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2013/11

6.2. Block Diagram of Test Setup

EUT

(EUT: 2.4G 4CH Nano quadcopter)

6.3. Power Line Conducted Emission Test Limits Standard:RSS-Gen:7.2.4, ANSI C63.4-2009

		Maximum RF Line Voltage	
Frequency		Quasi-Peak Level	Average Level
	,	dB(μV)	dB(μV)
150kHz ~	500kHz	66 ~ 56*	56 ~ 46*
500kHz ~	5MHz	56	46
5MHz ~	30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

6.4.Test Procedure

The XBOX Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

PASSED.

The EUT power supply by battery, Not applicable.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3140611-00614-EFI Page 9 of 30

^{2.} The lower limit shall apply at the transition frequencies.






7. Radiated disturbance (electric field)

7.1.Test Equipment

Radia	Radiated disturbance (electric field)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2013/11	
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2014/03	
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2014/03	
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2014/03	
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2014/03	
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2013/11	

7.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

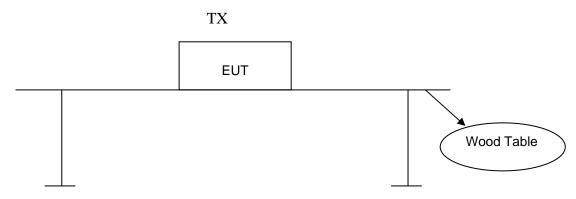

(EUT: 2.4G 4CH Nano quadcopter)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





7.2.2 Anechoic Chamber Setup Diagram

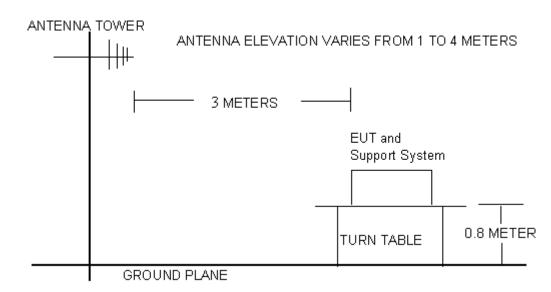

7.3. Radiated Emission Limit:

Standard: RSS-Gen: 7.2; RSS-210 A2.9; FCC Part 15C.209 & 249

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

FRE	QUEN	CY	DISTANCE	FIELD STREN	GTHS LIMIT
	MHz		Meters	μV/m	dB(μV)/m
0.009	~	0.490	300	2400/F(kHz)	
0.490	~	1.705	30	24000/F(kHz)	
1.705	~	30	30	30	
30	~	88	3	100	40.0
88	~	216	3	150	43.5
216	~	960	3	200	46.0
960	~	1000	3	500	54.0
٨١	Above 1000		3	Other:74.0 dB(μV)/m (Peak)	
At	ove II	000	3	54.0 dB(μV)/m	n (Average)

Remark:

- (1) Emission level $dB\mu V = 20 log Emission level <math>\mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 2MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5. Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





Test Mode: TX −X Position Mode Result: □ - passed Frequency range: 9KHz~30MHz □ - not passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
Rem	ark: The test re	sult readi	ng value is to l	ow, margin a	II > 10dB of t	he limit.	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Channel:	TX –X Position	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30MHz-1GHz		

EUT	2.4G 4CH Nano quadcopter
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	11~25 June 2014
Operator	Duke
MODEL NO	REH67395

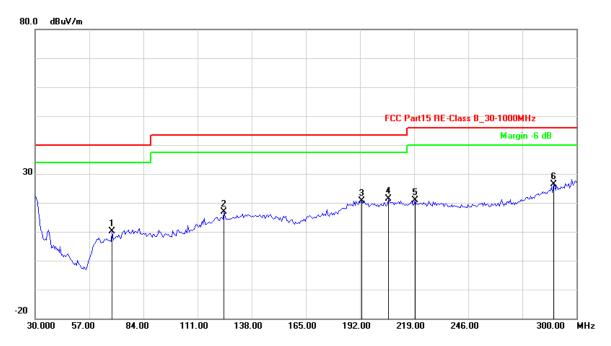

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	68.4168	-23.35	33.53	10.18	40.00	-29.82	QP			
2	124.1483	-17.69	34.49	16.80	43.50	-26.70	QP			
3	192.8657	-12.20	32.92	20.72	43.50	-22.78	QP			
4	206.3928	-12.28	33.69	21.41	43.50	-22.09	QP			
5	219.3788	-12.41	33.20	20.79	46.00	-25.21	QP			
6	288.6373	-7.37	33.82	26.45	46.00	-19.55	QP			
Remark:	Remark: Other frequency mini margin all >6 dB of Limit									

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





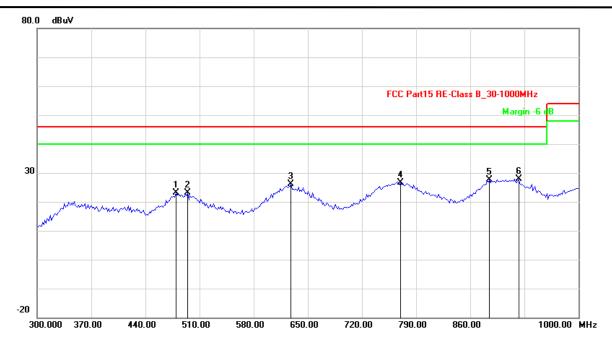

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	479.5591	-9.77	32.82	23.05	46.00	-22.95	QP
2	494.9900	-10.05	33.25	23.20	46.00	-22.80	QP
3	628.2565	-7.29	33.34	26.05	46.00	-19.95	QP
4	769.9399	-5.72	32.30	26.58	46.00	-19.42	QP
5	884.9699	-4.69	32.22	27.53	46.00	-18.47	QP
6	922.8457	-4.87	32.82	27.95	46.00	-18.05	QP
Remark	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Channel:	TX –X Position Low CH	Result:	- passed	
Test point:	Horizontal		□ - not passed	
Frequency range:	1GHz-26.5GHz		_ not pacced	

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2405.00	2.84	85.92	88.76	114.00	-25.24	Peak
2	2405.00	2.84	76.12	78.96	94.00	-15.04	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	4810.627	11.71	47.51	59.22	74.00	-14.78	peak			
2	4810.627	11.71	38.52	50.23	54.00	-3.77	AVG			
3	6048.096	15.50	40.02	55.52	74.00	-18.48	peak			
4	6048.096	15.50	26.12	41.62	54.00	-12.38	AVG			
5	7591.182	18.62	38.81	57.43	74.00	-16.57	peak			
6	7591.182	18.62	25.36	43.98	54.00	-10.02	AVG			
Remark	Remark: Other frequency mini margin all >6 dB of Limit									

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2445.00	3.23	86.49	89.72	114.00	-24.28	Peak
2	2445.00	3.23	77.72	80.95	94.00	-13.05	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3711.423	8.88	41.14	50.02	74.00	-23.98	peak
2	3711.423	8.88	26.81	35.69	54.00	-18.31	AVG
3	4889.760	11.90	47.60	59.50	74.00	-14.50	peak
4	4889.760	11.90	38.28	50.18	54.00	-3.82	AVG
5	7304.609	18.22	37.60	55.82	74.00	-18.18	peak
6	7304.609	18.22	23.00	41.22	54.00	-12.78	AVG
Remark	: Other frequen	ncv mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Page 16 of 30





Channel:	TX –X Position High CH	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2475.00	3.52	84.63	88.15	114.00	-25.85	Peak
2	2475.00	3.52	74.21	77.73	94.00	-16.27	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3733.467	8.95	40.12	49.07	74.00	-24.93	peak
2	3733.467	8.95	25.72	34.67	54.00	-19.33	AVG
3	4949.892	12.04	50.81	62.85	74.00	-11.15	peak
4	4949.892	12.04	38.81	50.85	54.00	-3.15	AVG
5	7392.786	18.35	36.89	55.24	74.00	-18.76	peak
6	7392.786	18.35	22.01	40.36	54.00	-13.64	AVG
Remark	: Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3140611-00614-EFI






 Channel:
 TX –X Position
 Result:
 ■ - passed

 Test point:
 Vertical
 □ - not passed

 Frequency range:
 30MHz-1GHz

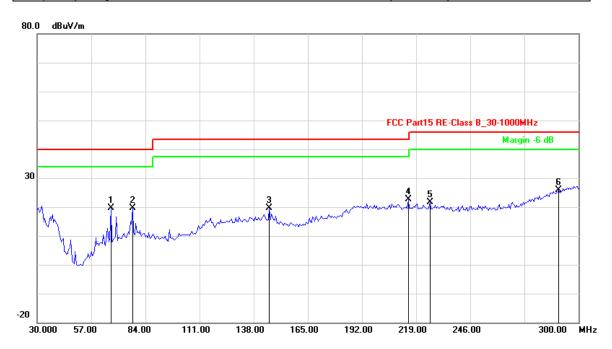


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	66.7936	-23.58	43.28	19.70	40.00	-20.30	QP
2	77.6152	-21.43	41.10	19.67	40.00	-20.33	QP
3	145.7916	-16.94	36.59	19.65	43.50	-23.85	QP
4	215.0501	-12.25	34.92	22.67	43.50	-20.83	QP
5	225.8717	-12.38	33.92	21.54	46.00	-24.46	QP
6	290.2605	-7.02	32.78	25.76	46.00	-20.24	QP
Remark	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





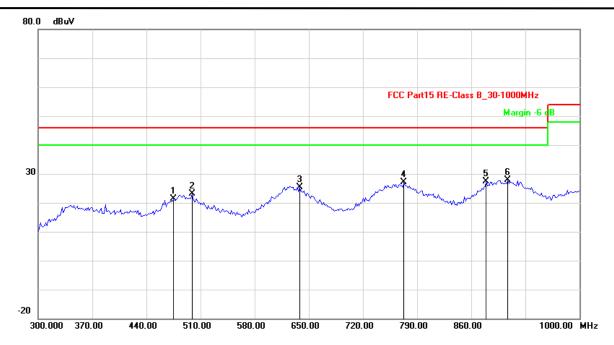

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	475.3507	-10.54	31.91	21.37	46.00	-24.63	QP			
2	499.1984	-10.15	33.25	23.10	46.00	-22.90	QP			
3	638.0762	-7.56	33.00	25.44	46.00	-20.56	QP			
4	772.7455	-5.78	32.85	27.07	46.00	-18.93	QP			
5	879.3587	-5.09	32.48	27.39	46.00	-18.61	QP			
6	907.4148	-4.14	32.02	27.88	46.00	-18.12	QP			
Remark	Remark: Other frequency mini margin all >6 dB of Limit									

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Channel:	TX –X Position Low CH	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2405.00	2.84	88.98	91.82	114.00	-22.18	Peak
2	2405.00	2.84	78.81	81.65	94.00	-12.35	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.				
1	4810.627	11.71	49.61	61.32	74.00	-12.68	peak				
2	4810.627	11.71	38.67	50.38	54.00	-3.62	AVG				
3	5959.920	15.25	40.39	55.64	74.00	-18.36	peak				
4	5959.920	15.25	26.01	41.26	54.00	-12.74	AVG				
5	7547.094	18.56	38.17	56.73	74.00	-17.27	peak				
6	7547.094	18.56	23.83	42.39	54.00	-11.61	AVG				
Remark:	Remark: Other frequency mini margin all >6 dB of Limit										

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2445.00	3.23	88.25	91.48	114.00	-22.52	Peak
2	2445.00	3.23	77.78	81.01	94.00	-12.99	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4042.084	9.91	39.34	49.25	74.00	-24.75	peak
2	4042.084	9.91	25.76	35.67	54.00	-18.33	AVG
3	4889.760	11.90	48.89	60.79	74.00	-13.21	peak
4	4889.760	11.90	38.34	50.24	54.00	-3.76	AVG
5	7525.050	18.53	37.81	56.34	74.00	-17.66	peak
6	7525.050	18.53	23.12	41.65	54.00	-12.35	AVG
Remark:	: Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3140611-00614-EFI Page 20 of 30





Channel: TX –X Position High CH
Test point: Vertical
Frequency range: 1GHz-26.5GHz

Result: □ - passed □ - not passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2475.00	3.52	87.94	91.46	114.00	-22.54	Peak
2	2475.00	3.52	77.37	80.89	94.00	-13.11	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3601.202	8.53	41.62	50.15	74.00	-23.85	peak
2	3601.202	8.53	27.09	35.62	54.00	-18.38	AVG
3	4949.892	12.04	51.21	63.25	74.00	-10.75	peak
4	4949.892	12.04	38.85	50.89	54.00	-3.11	AVG
5	7921.844	19.08	36.94	56.02	74.00	-17.98	peak
6	7921.844	19.08	22.67	41.75	54.00	-12.25	AVG
Remark	Remark: Other frequency mini margin all >6 dB of Limit						

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3140611-00614-EFI





8. Band Edge Compliance test

8.1. Test Equipment

Band Edge Compliance test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2013/11
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2014/03
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2014/03

8.2. Test procedure

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz / Sweep=AUTO

8.3. Test Results

PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

Test Mode	Channel Marked Frequency	Test Result Highest Emission (dBuv/m)			
		Horizontal		Vertical	
		Peak	Average	Peak	Average
Low Channel	2390MHz	40.43	36.81	37.09	33.34
	2400MHz	46.23	39.22	43.20	32.98
High Channel	2483.5MHz	35.98	24.18	33.28	22.19
	2500MHz	30.94	20.37	29.65	19.21

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


Page 22 of 30





Band Edges(CH Low) Detector mode:Peak


Polarity:Horizontal

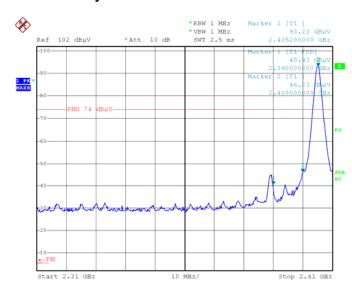

Date: 25.JUN.2014 08:12:22

Band Edges(CH Low) Detector mode: Average

Polarity: Horizontal



Date: 25.JUN.2014 08:15:16

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Band Edges(CH Low) Detector mode:Peak


Polarity:Vertical

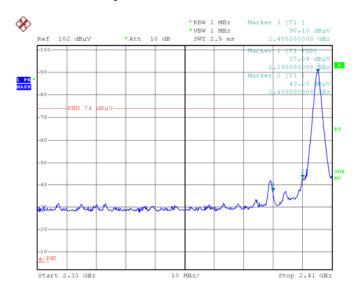

Date: 25.JUN.2014 08:13:11

Band Edges(CH Low) Detector mode:Average

Polarity:Vertical

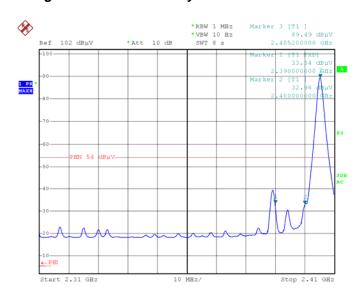

Date: 25.JUN.2014 08:13:41

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





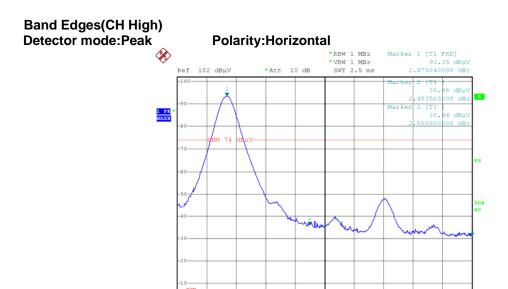


Date: 25.JUN.2014 08:19:05

Start 2.47 GHz

Band Edges(CH High) Detector mode: Average

Polarity:Horizontal

Stop 2.5 GHz

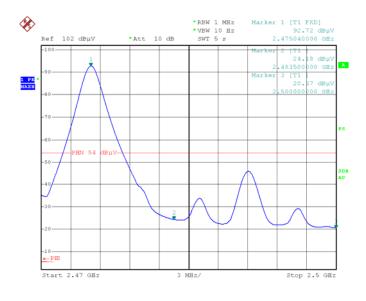

Date: 25.JUN.2014 08:16:55

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn






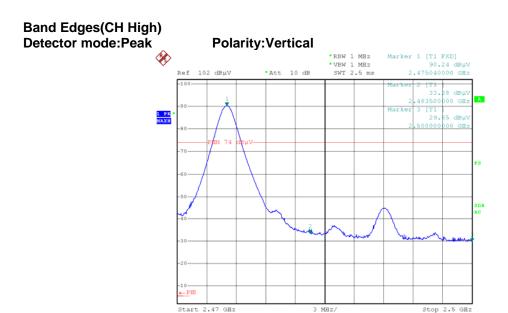

Date: 25.JUN.2014 08:18:15

Band Edges(CH High) Detector mode:Average

Polarity:Vertical

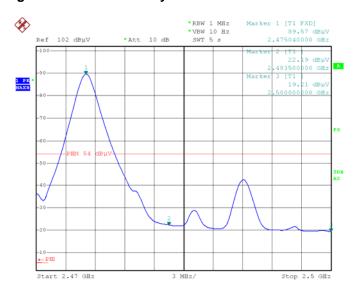

Date: 25.JUN.2014 08:17:45

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





9. 99% bandwidth

9.1 Test procedure

According to RSS-210 Annex 8 and RSS-Gen 4.6.1 The Receiver output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

9.2. Test Equipment

Band Edge Compliance test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2014/03/30
2	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2014/03/25

9.3. Test Results

PASSED.

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2405	0.480
Middle	2445	0.408
High	2475	0.360

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn






99% Bandwidth 2405MHz

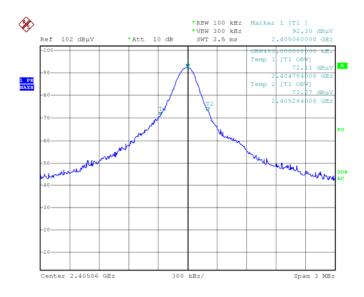

Date: 25.JUN.2014 08:32:15

99% Bandwidth 2445 MHz

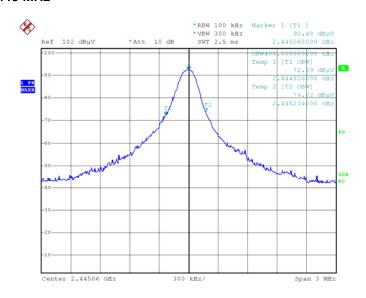

Date: 25.JUN.2014 08:31:05

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





99% Bandwidth 2475 MHz

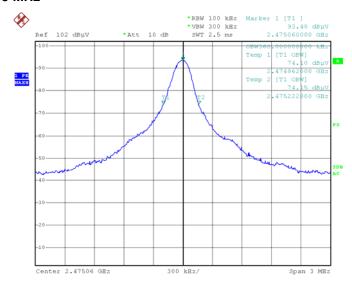

Date: 25.JUN.2014 08:29:56

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





10. Deviation to test specifications

The following identical model(s):

N/A

Belong to the tested device:

Product description: **2.4G 4CH Nano quadcopter**Model name: **REH67395**

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.