

FCC - TEST REPORT

Report Number : 68.950.19.2665.01 Date of Issue: August 15, 2019

Model : PX7

Product Type : Adaptive noise cancelling wireless headphone

Applicant : B&W Group Ltd.

Address : Dale Road Worthing United Kingdom BN11 2BH

Factory : Charter Media (Dongguan) Co., Ltd.

Address : Dabandi industrial Zone, Daning District, Humen Town, 523930
Dongguan City, Guangdong Province, PEOPLE'S REPUBLIC OF
CHINA

Test Result : **Positive** **Negative**

Total pages including Appendices : 52

TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power.....	13
9.3	20 dB bandwidth and 99% Occupied Bandwidth.....	20
9.4	Carrier Frequency Separation.....	30
9.5	Number of hopping frequencies.....	33
9.6	Dwell Time.....	35
9.7	Spurious RF conducted emissions.....	38
9.8	Band edge testing.....	42
9.9	Spurious radiated emissions for transmitter.....	47
10	Test Equipment List.....	51
11	System Measurement Uncertainty.....	52



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint
Road 2, Nanshan District
Shenzhen 518052
P.R. China

Telephone: 86 755 8828 6998
Fax: 86 755 8288 5299

FCC Registration No.: 514049

3 Description of the Equipment Under Test

Product:	Adaptive noise cancelling wireless headphone
Model no.:	PX7
FCC ID:	2ACIX-PX7
Options and accessories:	USB Cable, Aux in Cable
Rating:	3.8VDC,600mAh (Supplied by rechargeable Li-ion battery) 5VDC, 0.5A, 2.5W (Charged by USB port)
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Integrated antenna
Antenna Gain:	2.7dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Adaptive noise cancelling wireless headphone operated at 2.4GHz



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2017 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure, KDB558074 D01 v05r02 and ANSI C63.10-2013.

5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Result	Test Site
§15.207	Conducted emission AC power port	10	Pass	Site 1
§15.247(b)(1)	Conducted peak output power	13	Pass	Site 1
§15.247(e)	Power spectral density*	--	N/A	--
§15.247(a)(2)	6dB bandwidth	--	N/A	--
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	20	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation	30	Pass	Site 1
§15.247(a)(1)(iii)	Number of hopping frequencies	33	Pass	Site 1
§15.247(a)(1)(iii)	Dwell Time	35	Pass	Site 1
§15.247(d)	Spurious RF conducted emissions	38	Pass	Site 1
§15.247(d)	Band edge	42	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter and receiver	47	Pass	Site 1
§15.203	Antenna requirement	See note 2	Pass	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a Integrated antenna, which gain is 2.7dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ACIX-PX7 complies with Section 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C.

PX7 is a Bluetooth Headset with Bluetooth 5.0. The TX and RX range is 2402MHz-2480MHz.

Note: The report is for BR+EDR only.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 27, 2019

Testing Start Date: June 27, 2019

Testing End Date: July 27, 2019

Reviewed by:

Prepared by:

Tested by:

Laurent Yuan
EMC Project Manager


Mark Chen
EMC Project Engineer

Carry Cai
EMC Test Engineer


7 Test Setups

7.1 Radiated test setups


Below 1GHz

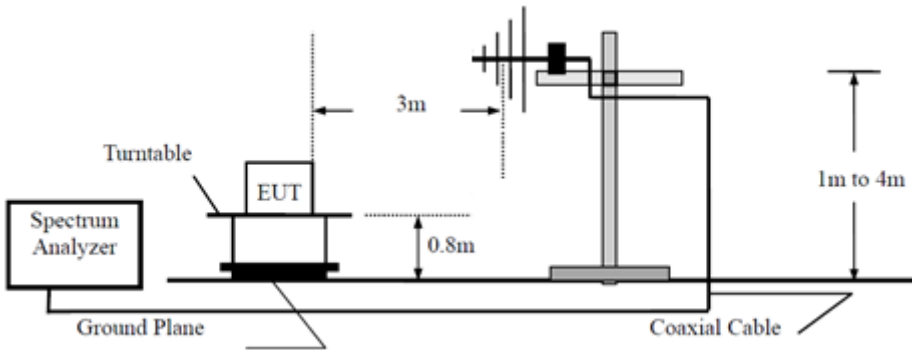


Above 1GHz

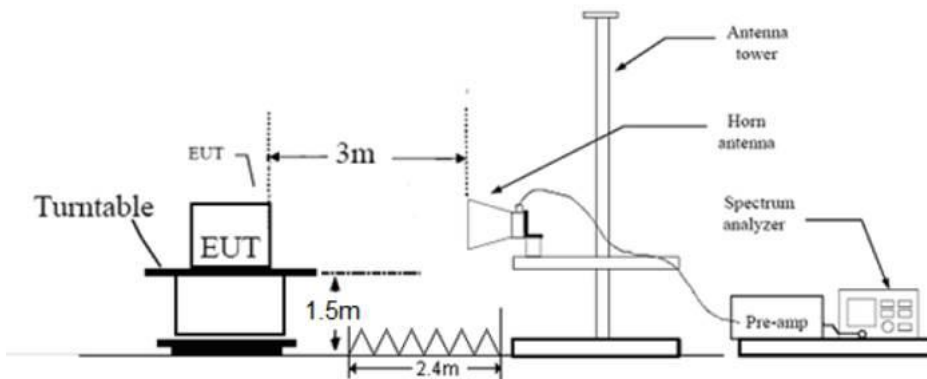

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

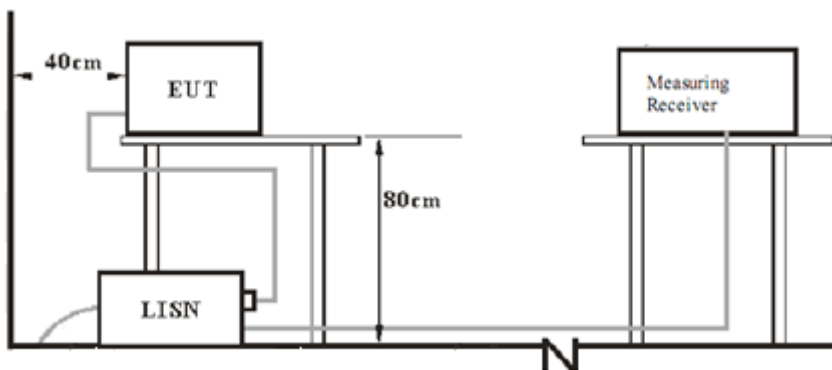

8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Notebook	Lenovo	X220	---

Test software: InstallBlueSuiteCda_3_2_0_898 Test Tool, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method


1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linea

Product Type : Adaptive noise cancelling wireless headphone
 M/N : PX7
 Operating Condition : Charging+ BT Link
 Test Specification : Line
 Comment : 5VDC (Supplied by USB Port)

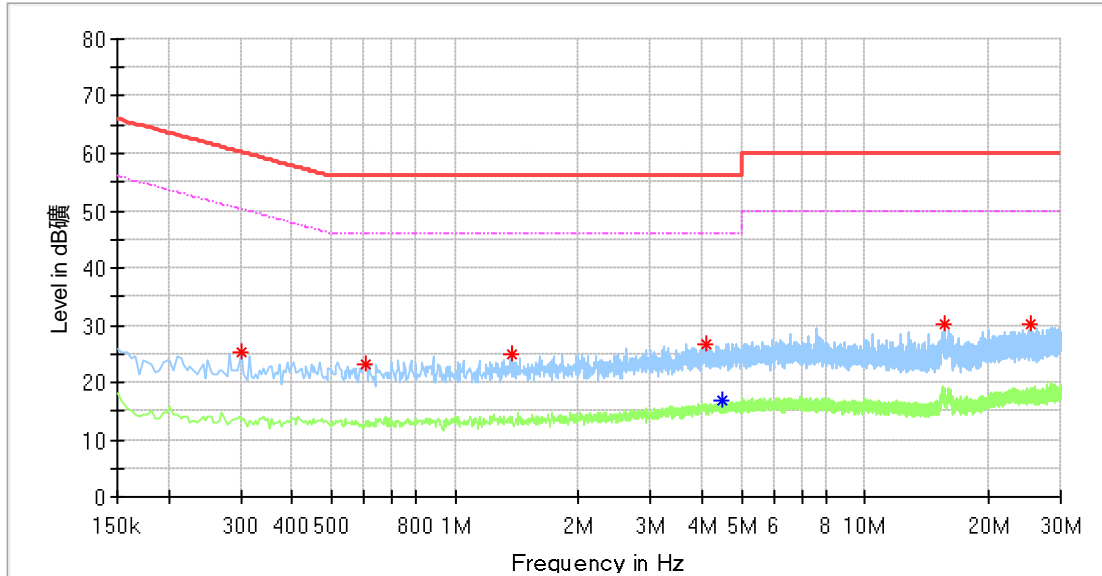

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB/m)
0.302000	25.22	---	60.19	34.97	L1	10.2
0.602000	23.20	---	56.00	32.80	L1	10.3
1.370000	24.87	---	56.00	31.13	L1	10.3
4.094000	26.82	---	56.00	29.18	L1	10.4
4.506000	---	17.00	46.00	29.00	L1	10.4
15.558000	30.34	---	60.00	29.66	L1	10.8
25.218000	30.28	---	60.00	29.72	L1	11.0


Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Product Type : Adaptive noise cancelling wireless headphone
 M/N : PX7
 Operating Condition : Charging+ BT Link
 Test Specification : Neutral
 Comment : 5VDC (Supplied by USB Port)

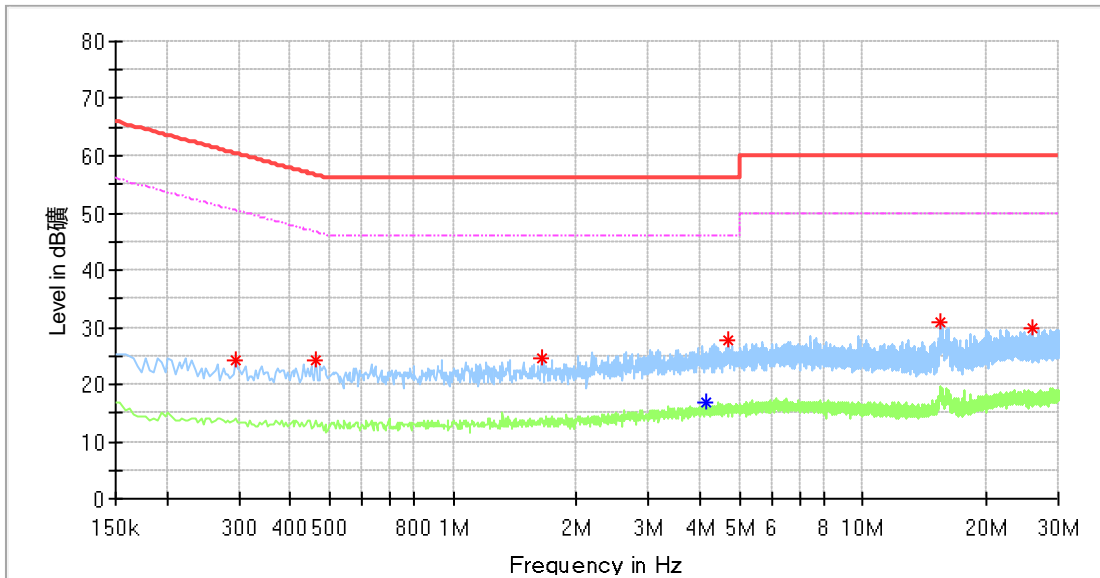

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB/m)
0.294000	24.22	---	60.41	36.19	N	10.2
0.462000	24.28	---	56.66	32.38	N	10.3
1.638000	24.55	---	56.00	31.45	N	10.3
4.162000	---	16.85	46.00	29.15	N	10.4
4.682000	27.59	---	56.00	28.41	N	10.4
15.390000	30.85	---	60.00	29.15	N	10.9
25.830000	29.65	---	60.00	30.35	N	11.2

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Conducted peak output power

Bluetooth Mode GFSK modulation Test Result


Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	2.8	Pass
Middle channel 2441MHz	2.91	Pass
High channel 2480MHz	2.9	Pass

Low channel 2402MHz

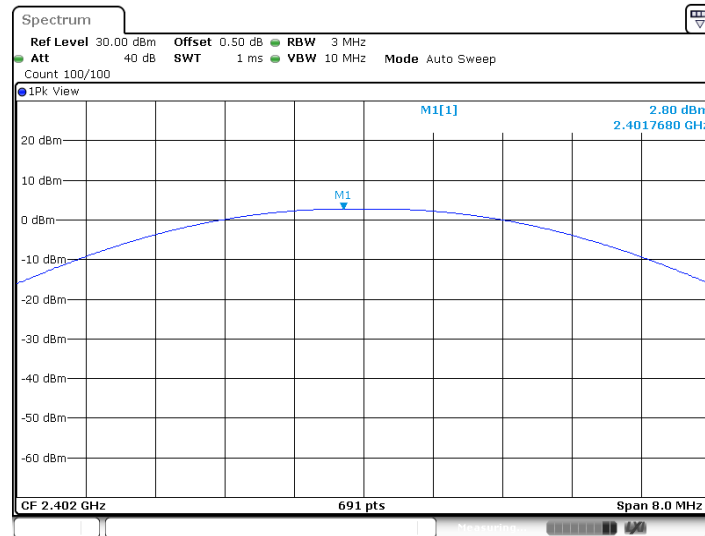


Date: 23 JUL 2019 18:40:34

Middle channel 2441MHz

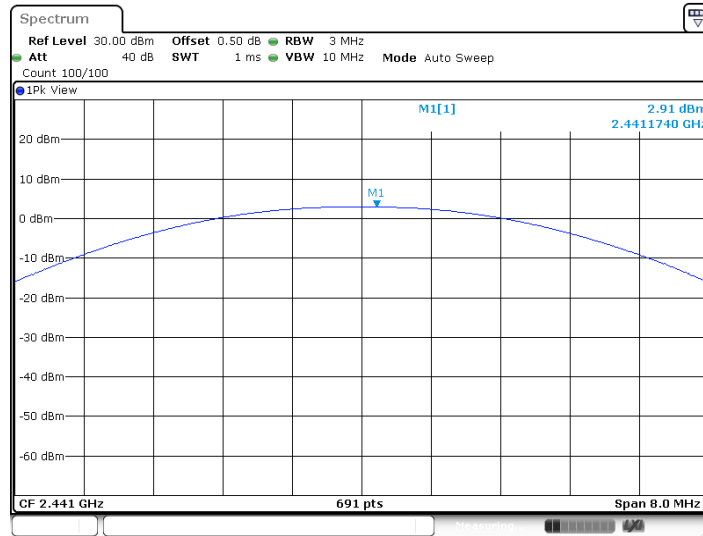

Date: 23_JUL_2019 18:41:06

High channel 2480MHz

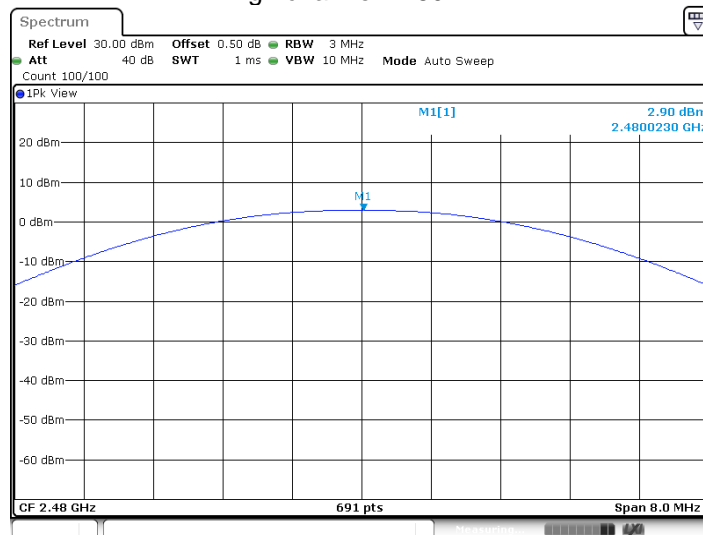


Date: 23_JUL_2019 18:41:32

Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result


Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	2.39	Pass
Middle channel 2441MHz	2.52	Pass
High channel 2480MHz	2.21	Pass

Low channel 2402MHz

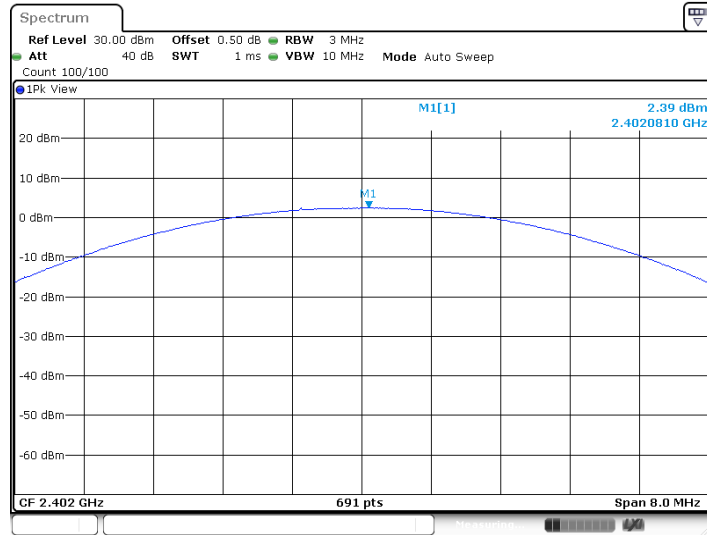


Date: 23 JUL 2019 18:53:14

Middle channel 2441MHz

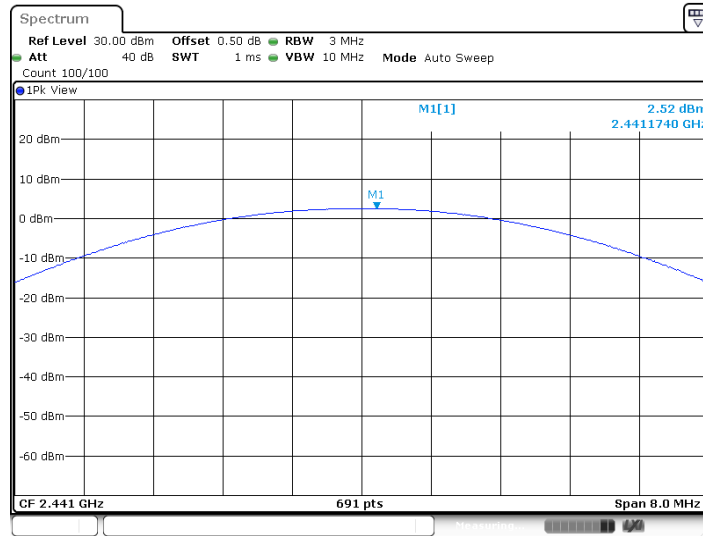

Date: 23_JUL_2019 18:53:48

High channel 2480MHz

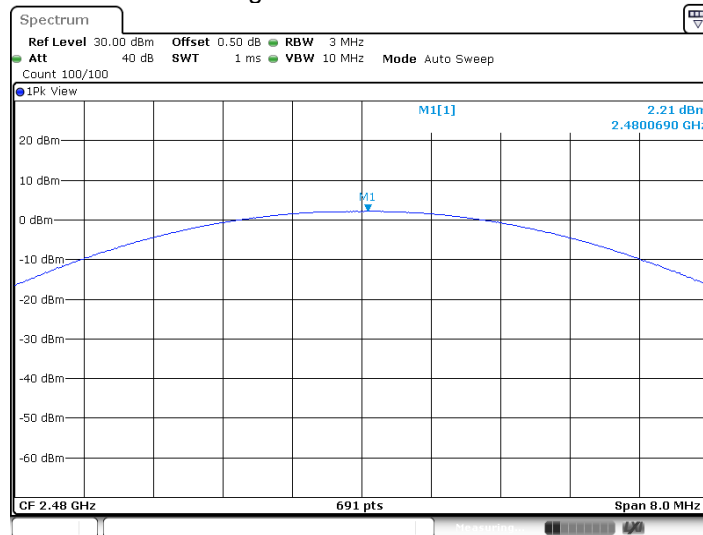


Date: 23_JUL_2019 18:54:33

Bluetooth Mode 8DPSK modulation Test Result


Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	2.75	Pass
Middle channel 2441MHz	3.13	Pass
High channel 2480MHz	2.72	Pass

Low channel 2402MHz

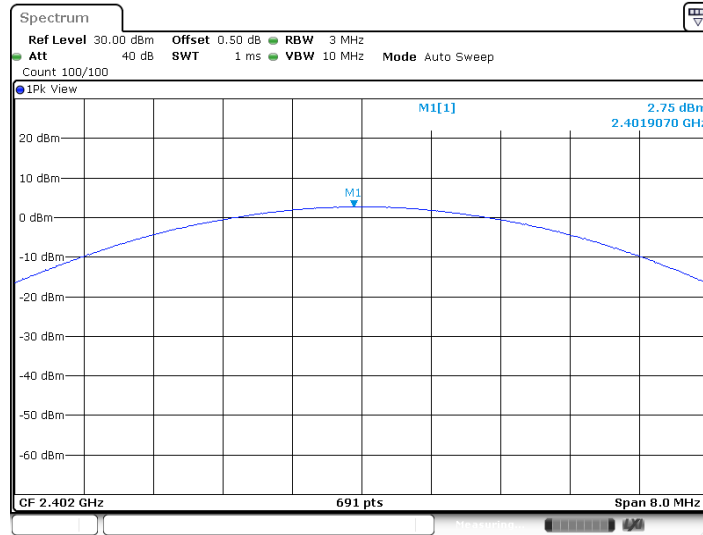


Date: 23 JUL 2019 18:49:56

Middle channel 2441MHz

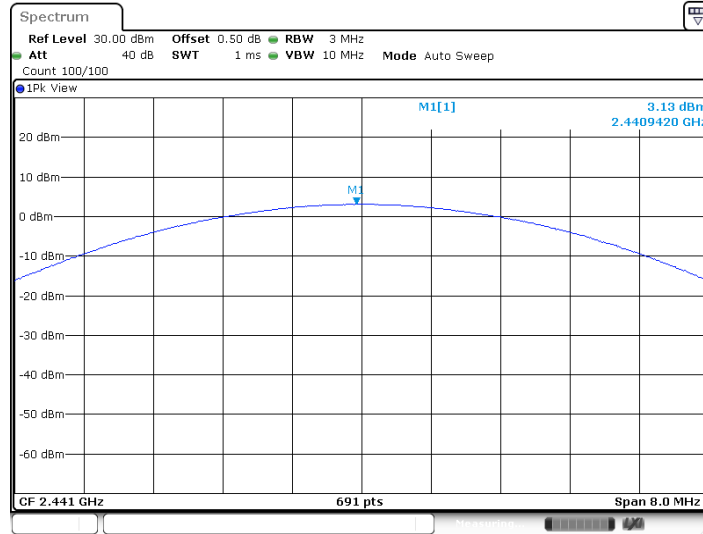

Date: 23_JUL_2019 18:51:02

High channel 2480MHz

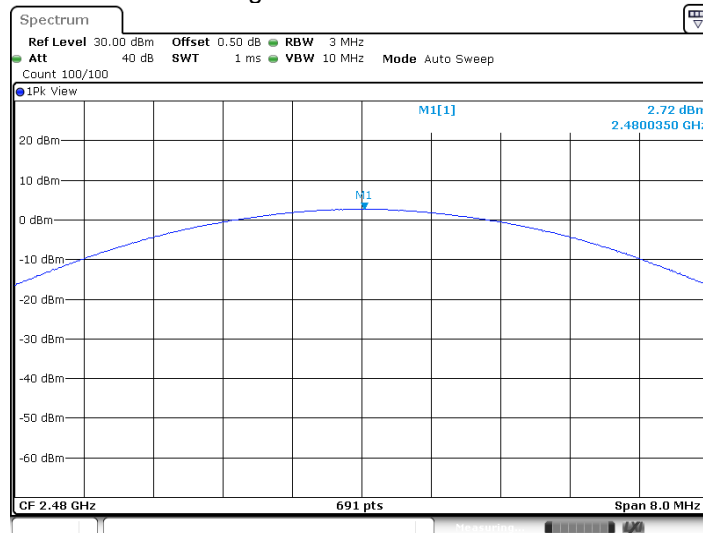

Date: 23_JUL_2019 18:51:39



9.3 20 dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit [kHz]


N/A

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode GFSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1119	869	--	Pass
2441	1119	869	--	Pass
2480	1116	866	--	Pass

Low channel 2402MHz

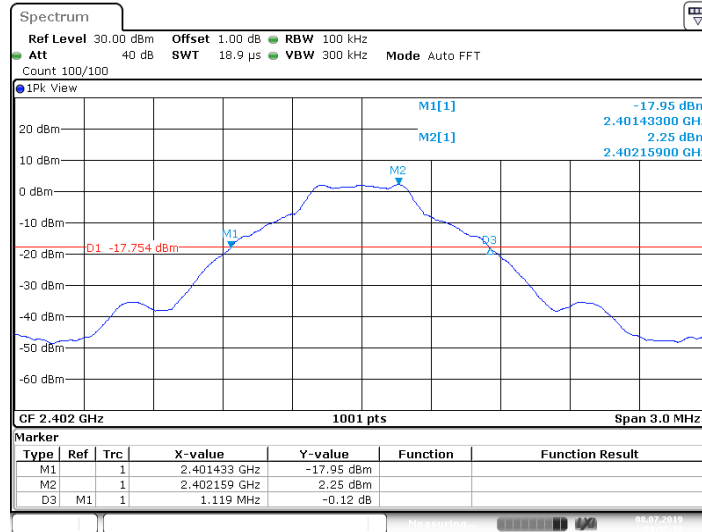


Date: 8 JUL 2019 21:32:18

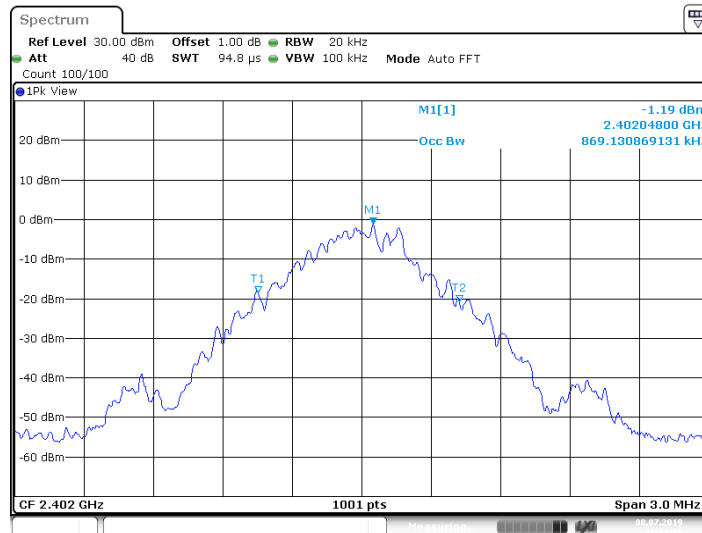


Date: 8 JUL 2019 21:32:29

Middle channel 2441MHz

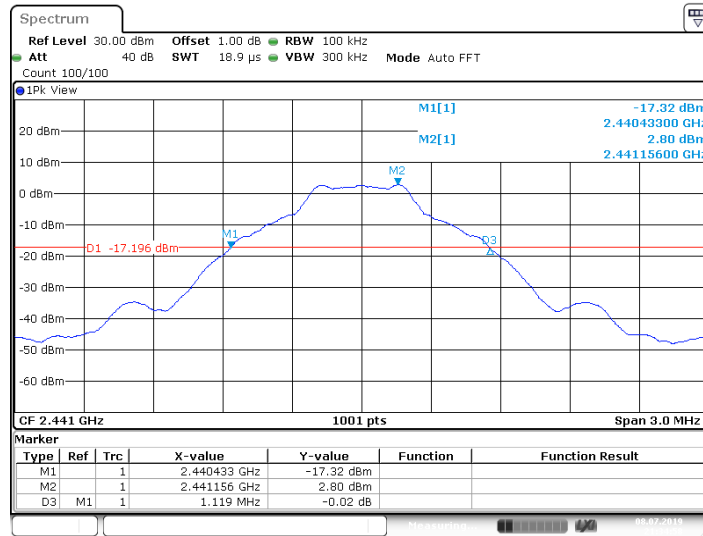


Date: 8 JUL 2019 21:34:59

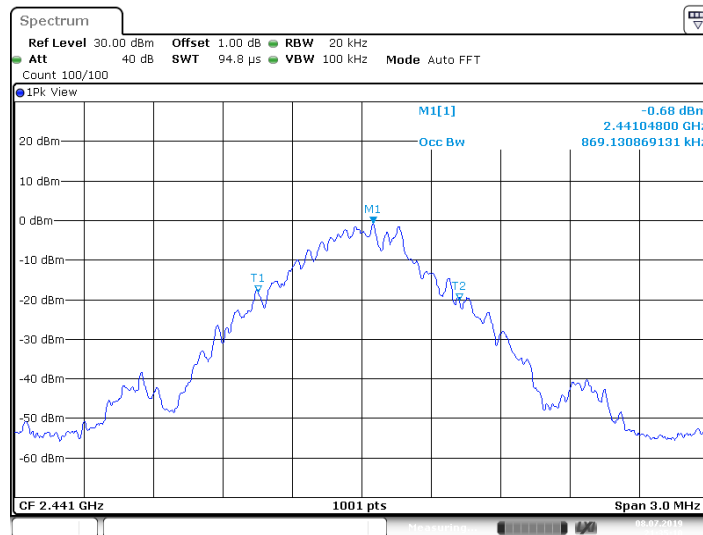


Date: 8 JUL 2019 21:35:10

High channel 2480MHz

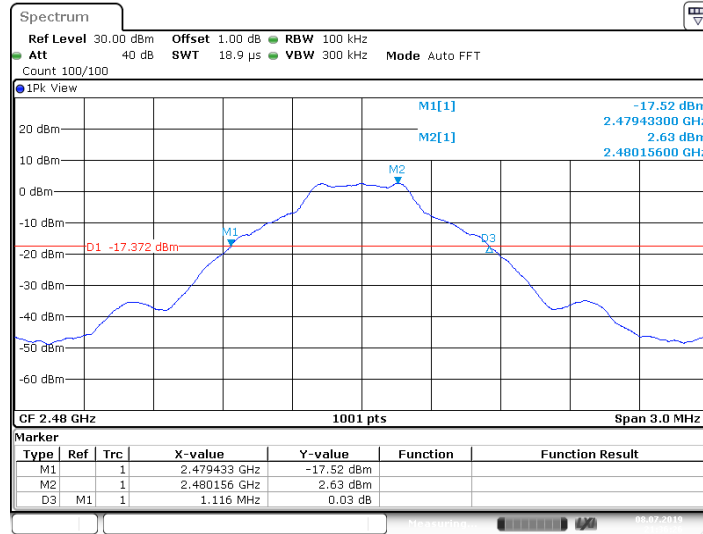

Date: 8 JUL 2019 21:36:26

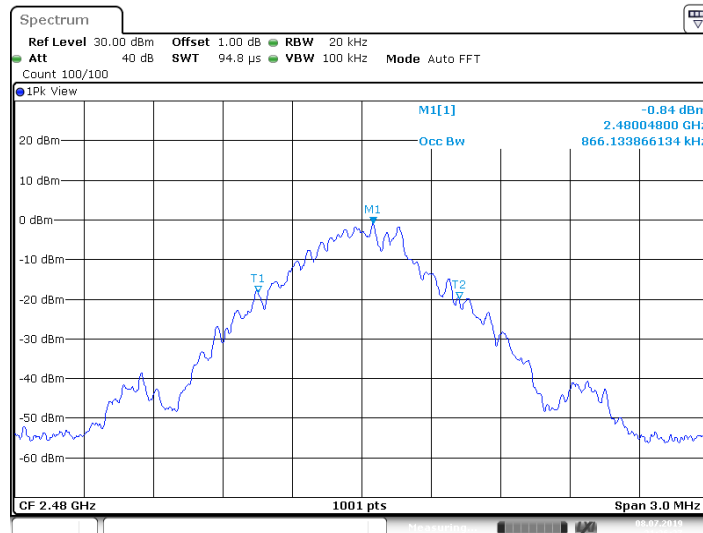


Date: 8 JUL 2019 21:36:37

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1413	1196	--	Pass
2441	1410	1196	--	Pass
2480	1416	1196	--	Pass

Low channel 2402MHz

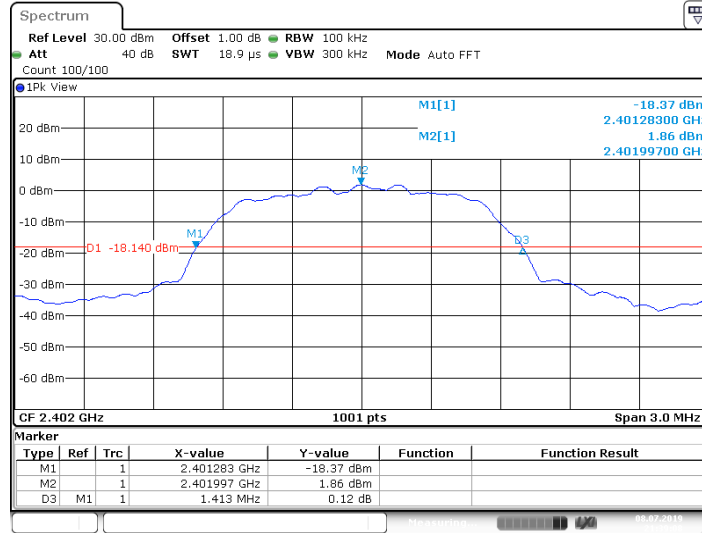


Date: 8 JUL 2019 21:39:08

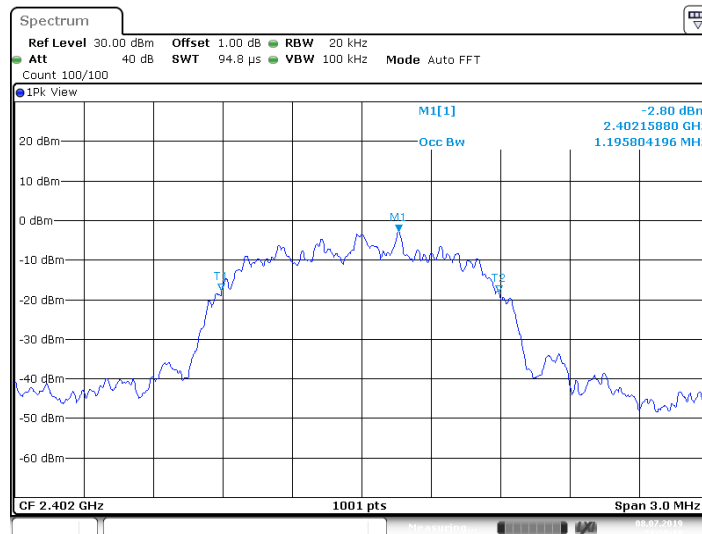


Date: 8 JUL 2019 21:39:19

Middle channel 2441MHz

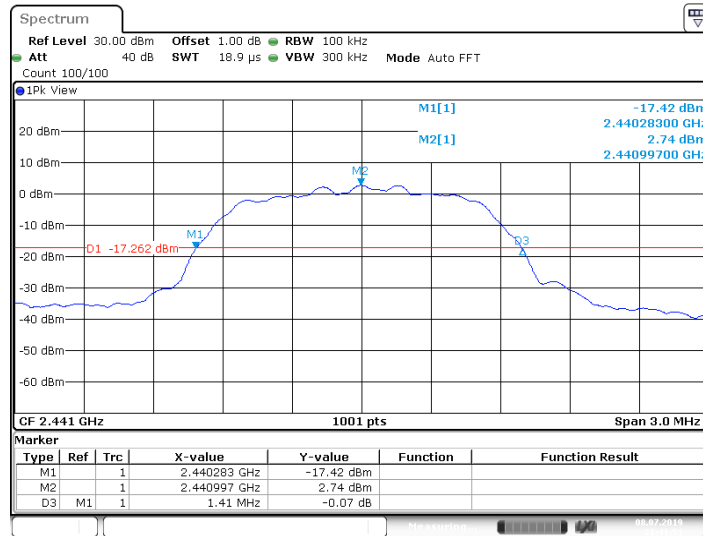


Date: 8.JUL.2019 21:41:51

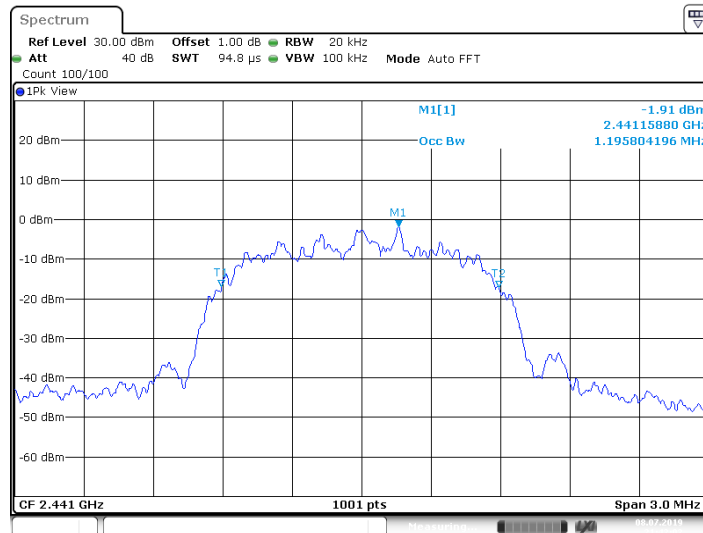


Date: 8.JUL.2019 21:42:02

High channel 2480MHz

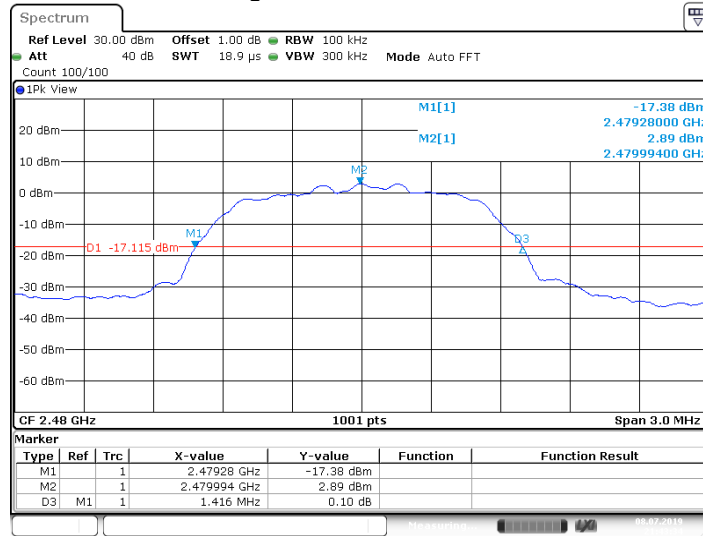

Date: 8 JUL 2019 21:43:35

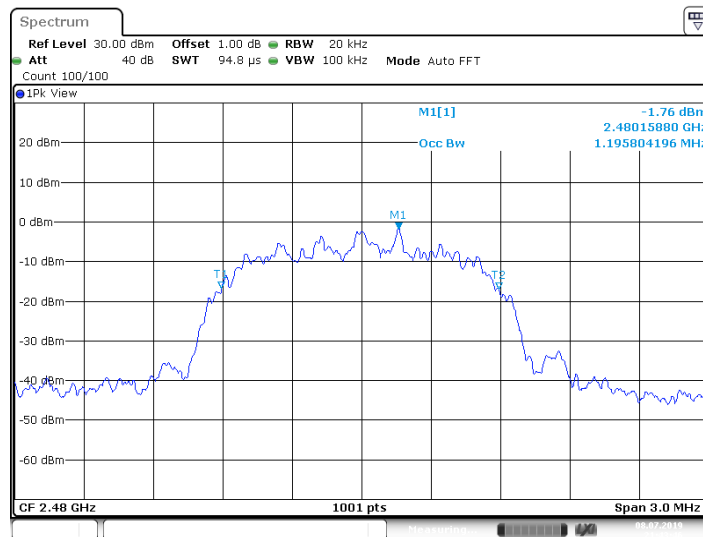


Date: 8 JUL 2019 21:43:46

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode 8DPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1398	1193	--	Pass
2441	1398	1193	--	Pass
2480	1401	1193	--	Pass

Low channel 2402MHz

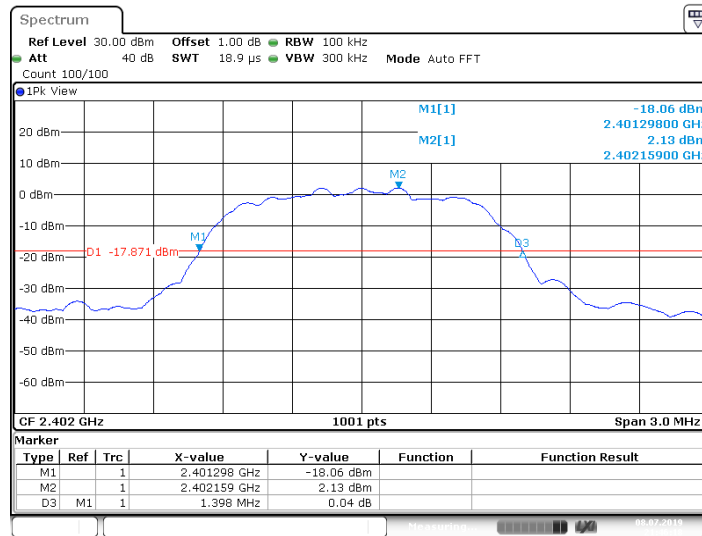


Date: 8 JUL 2019 21:46:18

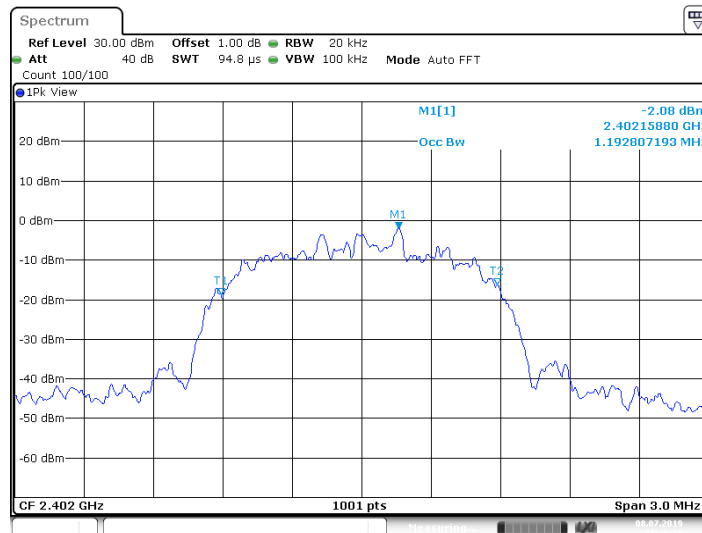


Date: 8 JUL 2019 21:46:29

Middle channel 2441MHz

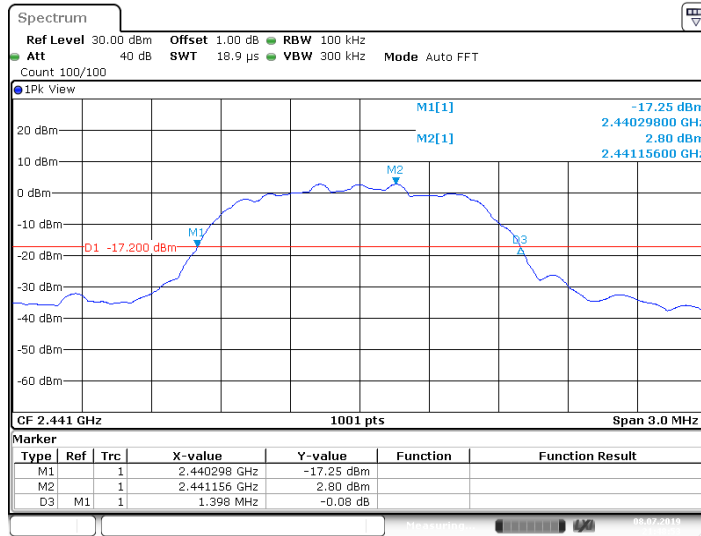


Date: 8 JUL 2019 21:48:53

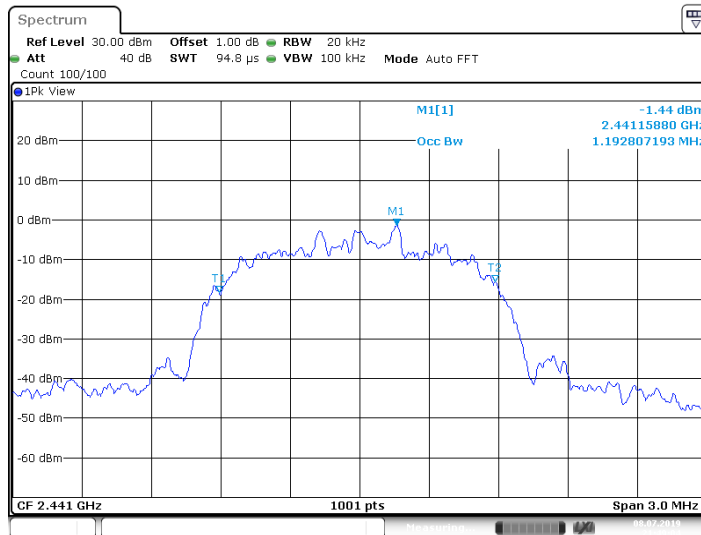


Date: 8 JUL 2019 21:49:04

High channel 2480MHz

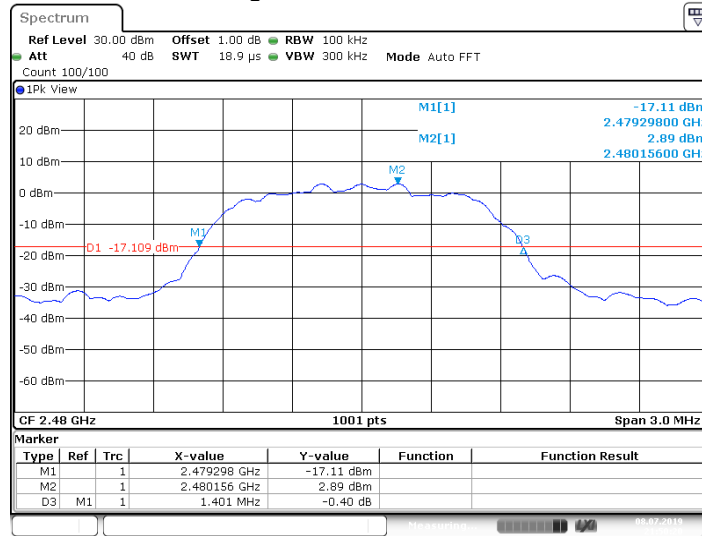

Date: 8 JUL 2019 21:50:21

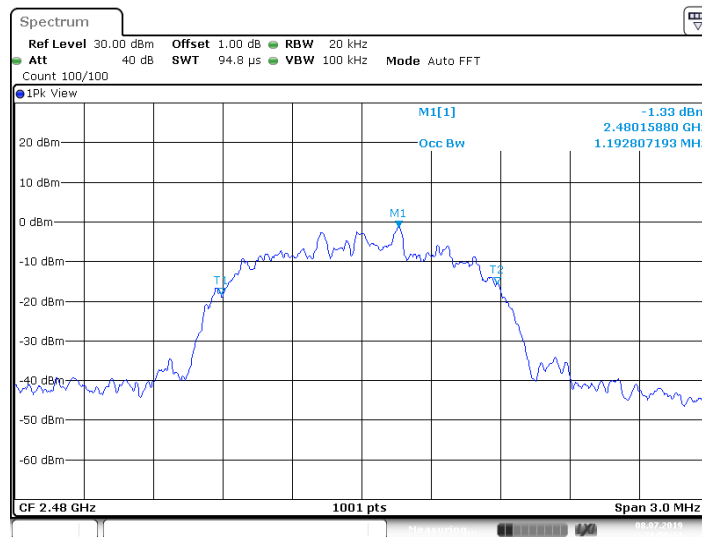

Date: 8 JUL 2019 21:50:22



9.4 Carrier Frequency Separation

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, RBW \geq 1% of the span, VBW) \geq RBW, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit
kHz

≥25KHz or 2/3 of the 20 dB bandwidth which is greater

GFSK Modulation Limit


Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	746
2441	746
2480	744

Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.


GFSK Modulation test result

Test Mode	Carrier Frequency Separation kHz	Result
DH5	1162	Pass
2DH5	1000	Pass
3DH5	1003	Pass

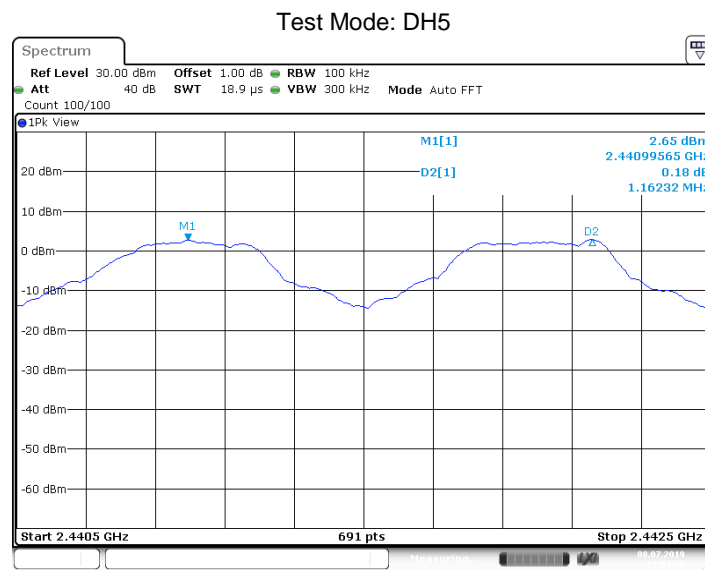


Date: 8 JUL 2019 21:54 x3

Test Mode: 2DH5

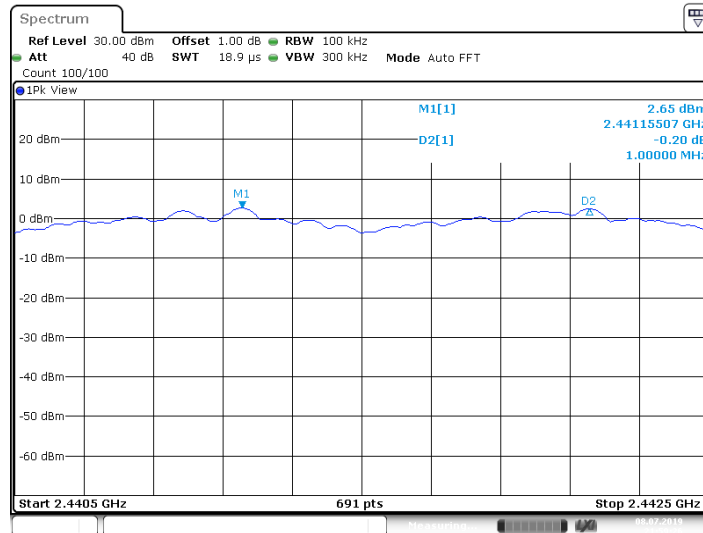

Date: 8 JUL 2019 21:59:26

Test Mode: 3DH5

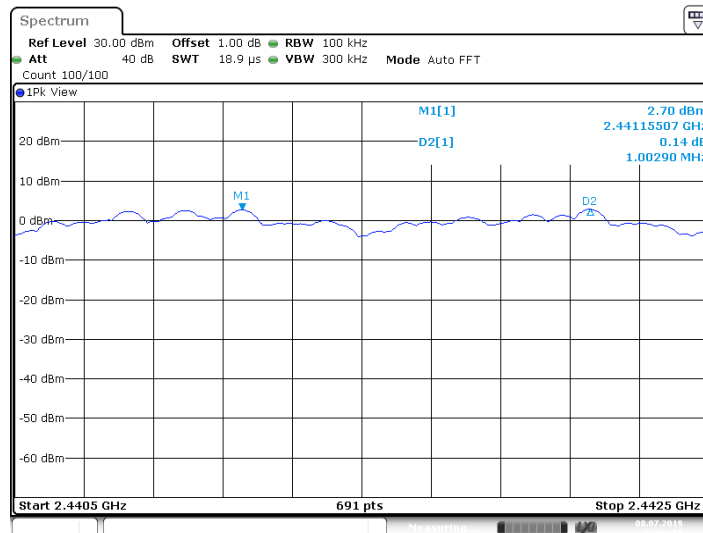

Date: 8 JUL 2019 22:05:00

9.5 Number of hopping frequencies

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

Limit


**Limit
number**

≥ 15

Number of hopping frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

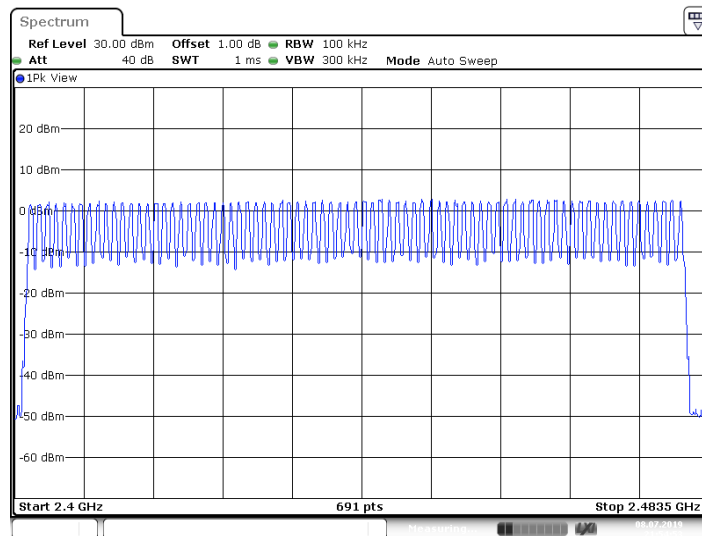

Date: 8 JUL 2019 21:54:53

9.6 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time

The maximum dwell time shall be 0.4 s.


According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:
 The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 79 [ch] = 31.6 [s*ch];
 The burst width, which is directly measured, refers to the duration on one channel hop.
 The maximum number of hopping channels in 31.6s for DH5=1600 / 6 / 79 *31.6=106.67

Test Result


Modulation	Mode	Reading (us)	Total Hops	Test Result (ms)	Limit (ms)	Result
GFSK	DH5	2870	106.67	306.14	< 400	Pass
$\pi/4$ -DQPSK	2DH5	2880	106.67	307.21	< 400	Pass
8-DPSK	3DH5	2880	106.67	307.21	< 400	Pass

GFSK Modulation

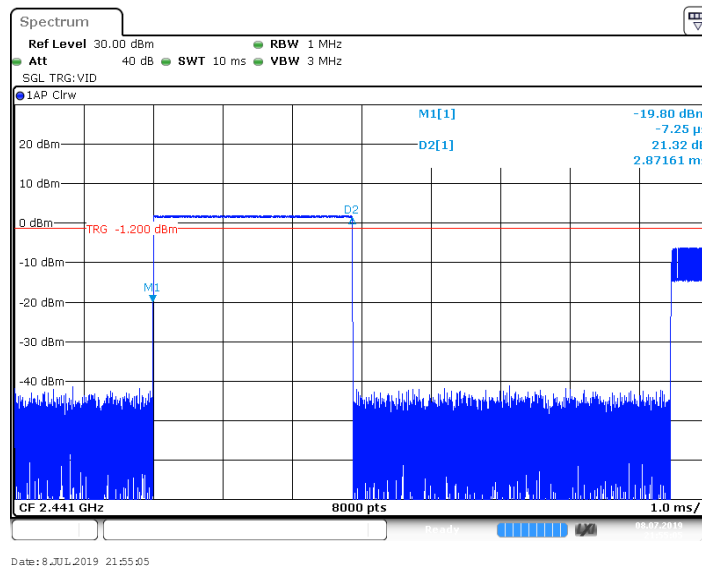


DH5

$\pi/4$ -DQPSK Modulation

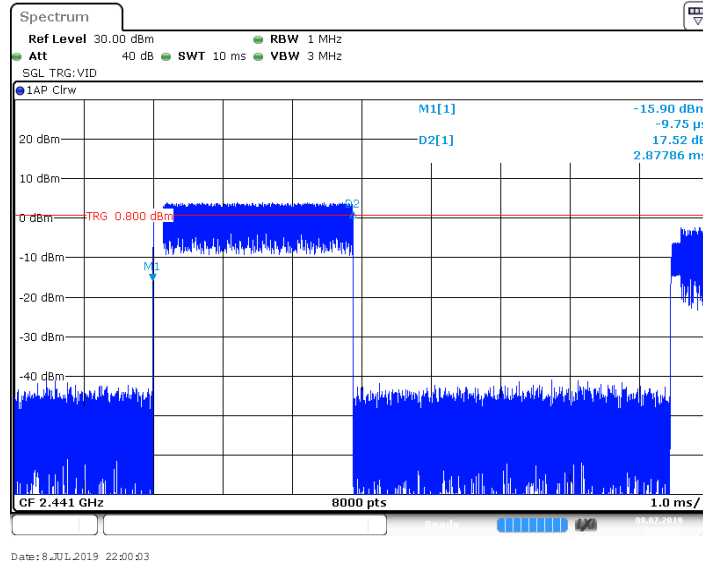

2DH5

8-DPSK Modulation

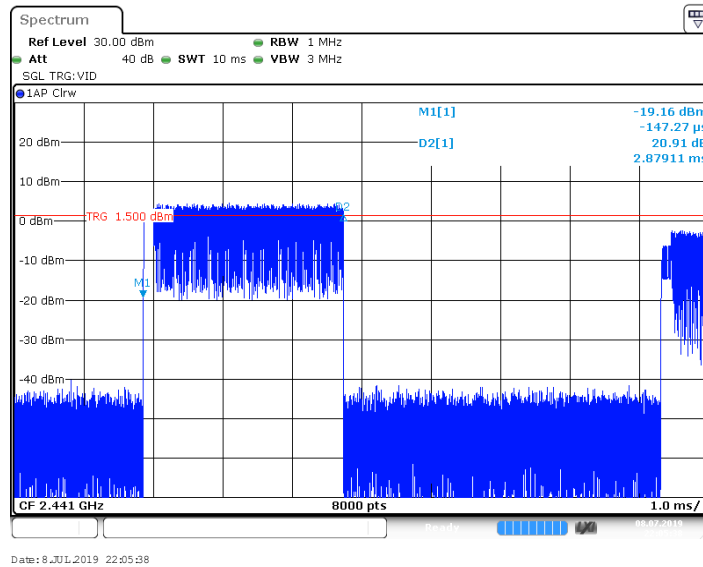

3DH5

9.7 Spurious RF conducted emissions

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.

Limit



Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Only the worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

GFSK Modulation:


Low channel 2402MHz

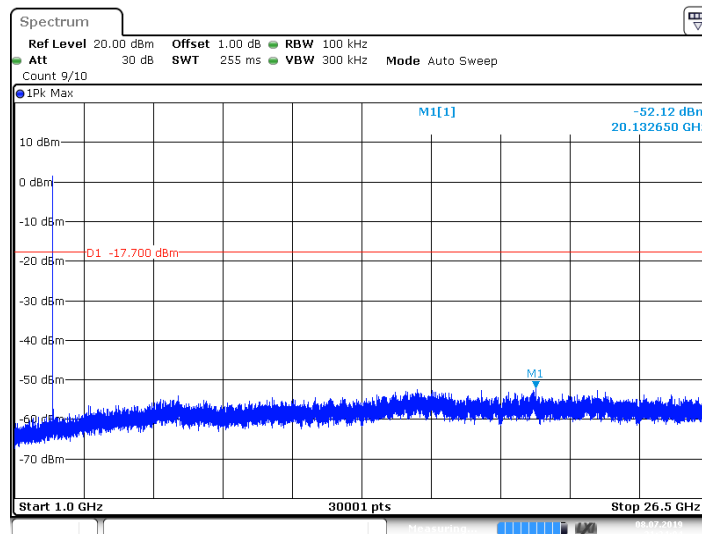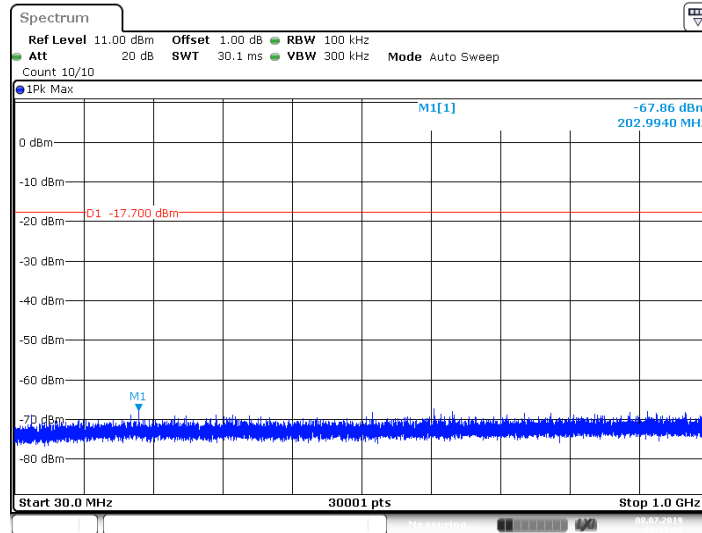

Middle channel 2441MHz

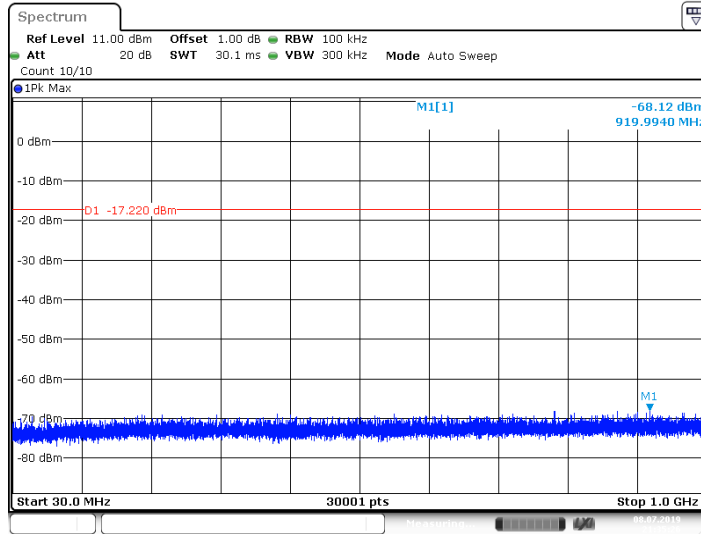


Date: 8 JUL 2019 21:35:26

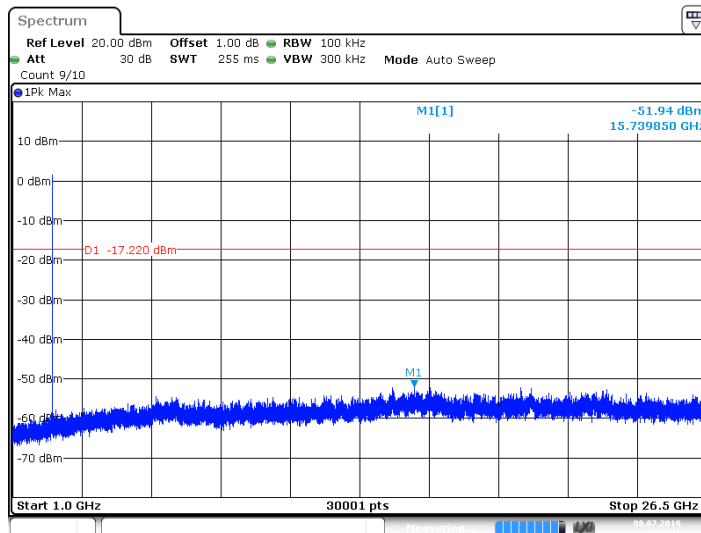


Date: 8 JUL 2019 21:35:37

High channel 2480MHz

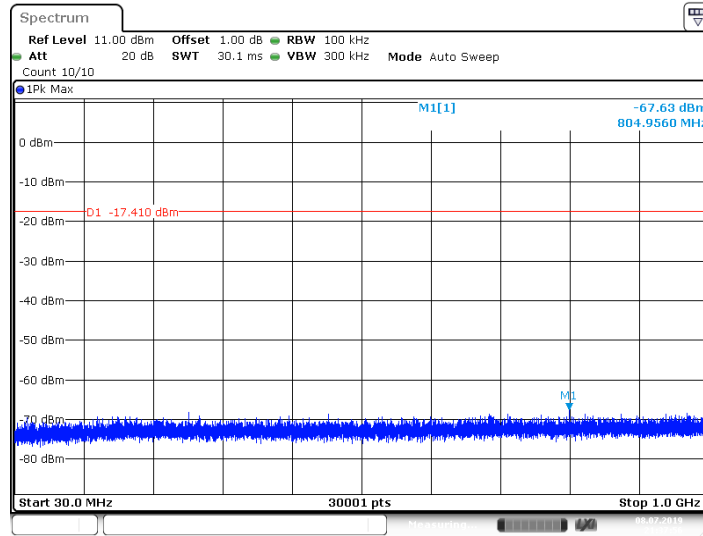

Date: 8 JUL 2019 21:37:56

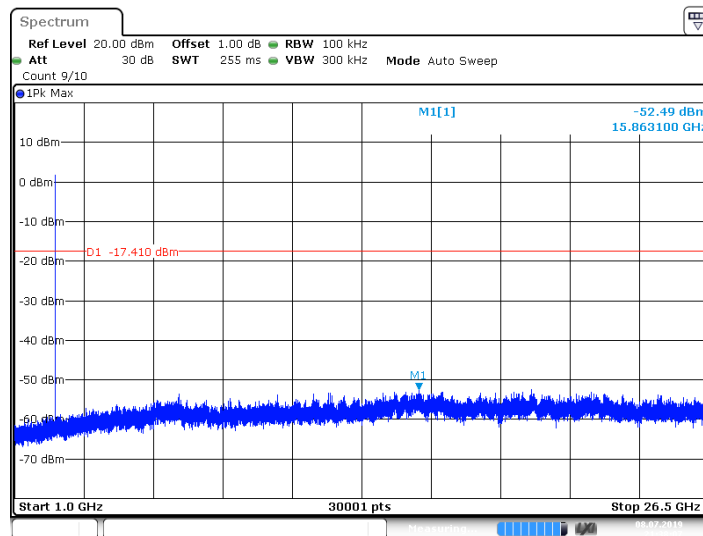

Date: 8 JUL 2019 21:38:08

9.8 Band edge testing


Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.


Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

GFSK mode: Hopping off


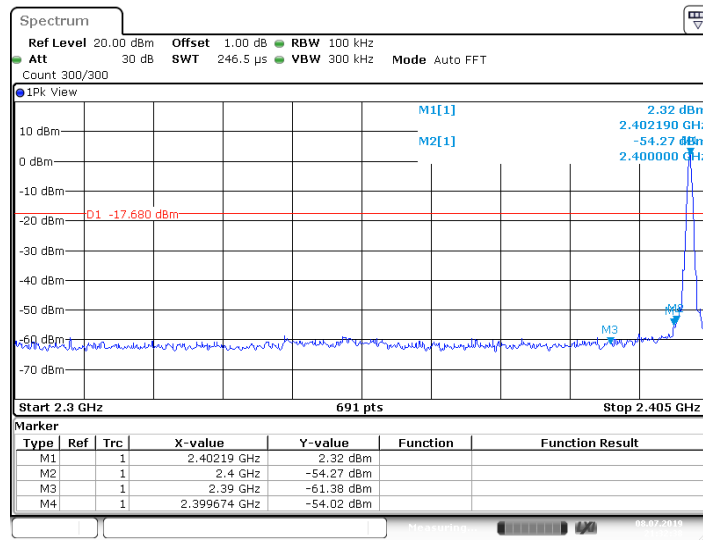


Date: 8 JUL 2019 21:52:59

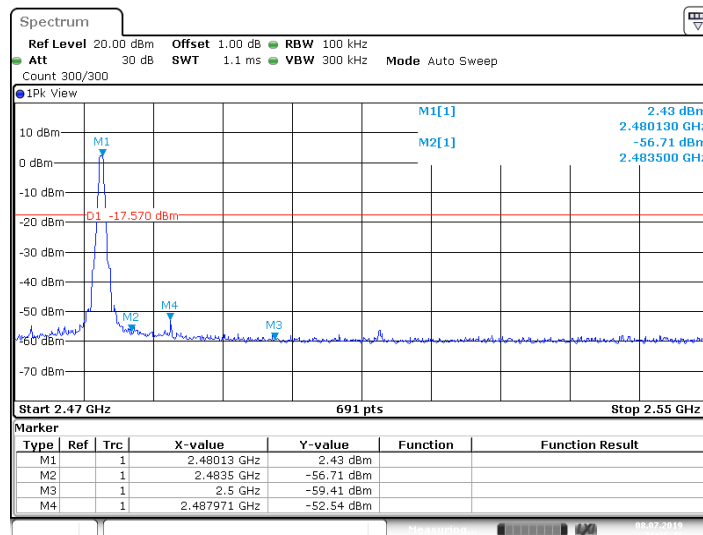


Date: 8 JUL 2019 21:56:46


GFSK mode: Hopping on

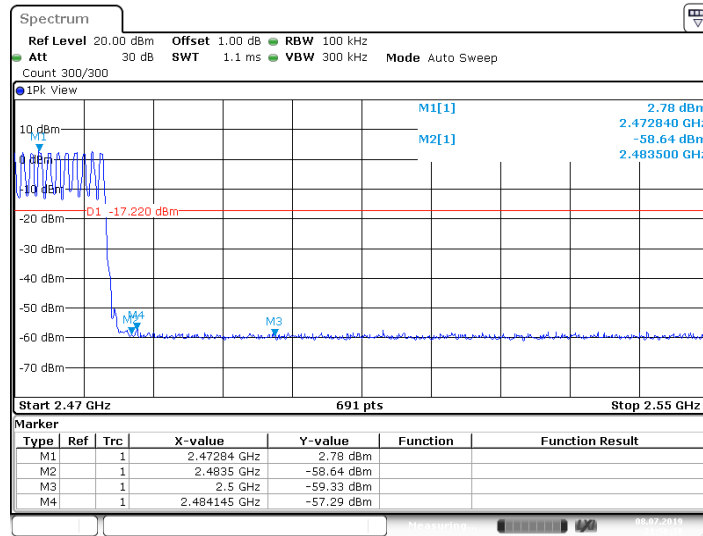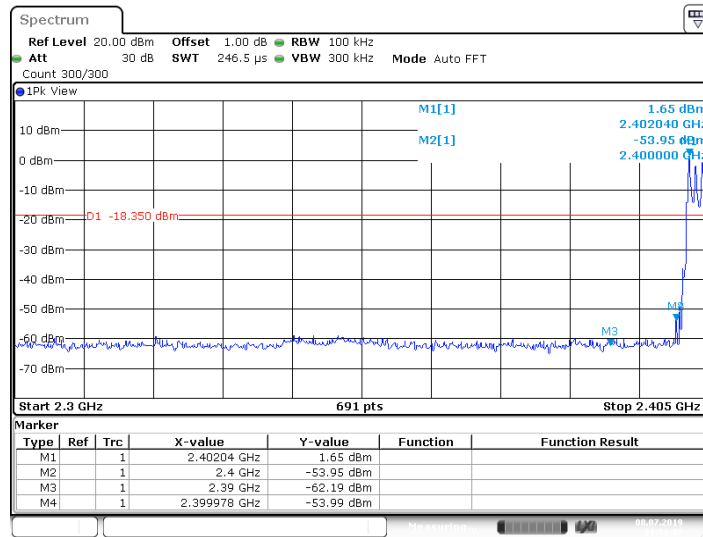

8DPSK mode: Hopping off

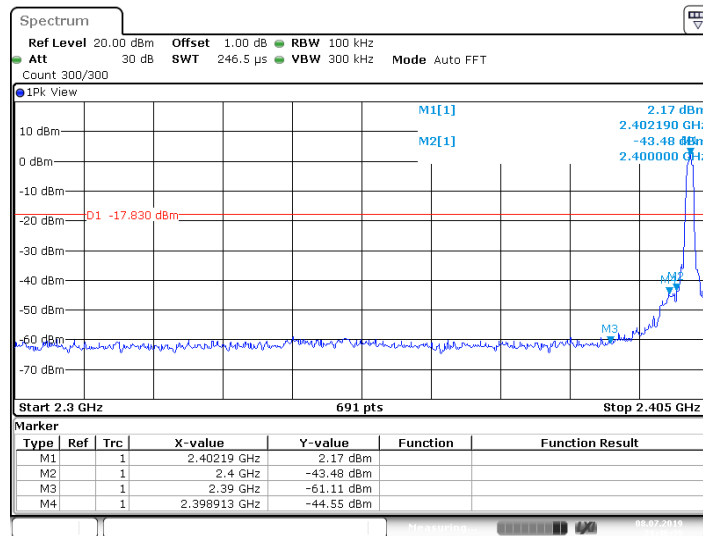


Date: 8 JUL 2019 21:46:39

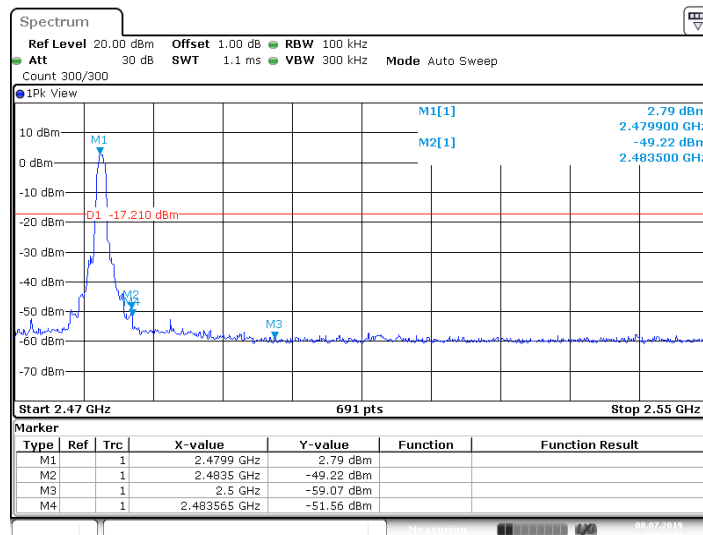


Date: 8 JUL 2019 21:50:41

8DPSK mode: Hopping on

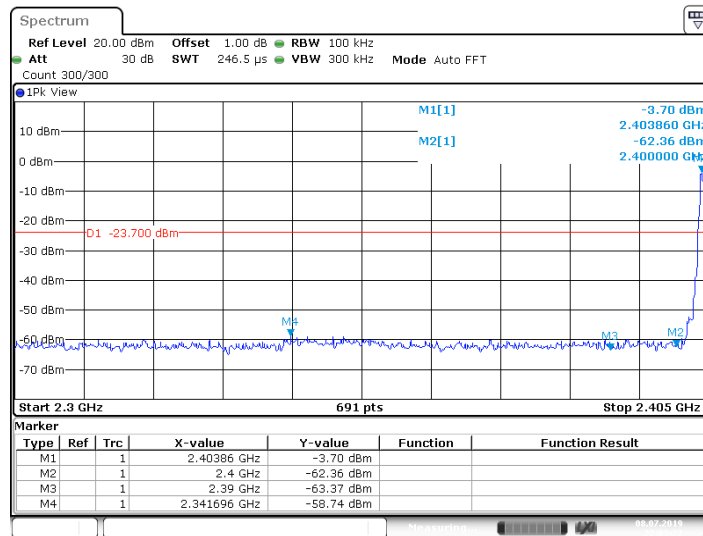

Date: 8 JUL 2019 22:03:27

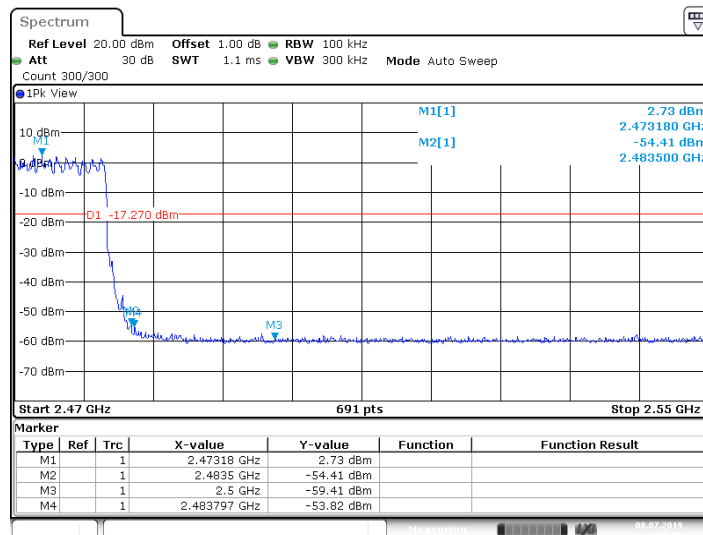

Date: 8 JUL 2019 22:07:26

9.9 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB μ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

Transmitting spurious emission test result as below:

BT3.0 GFSK Modulation 2402MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	(dB/m)	
30-1000MHz	883.38*	33.59	H	46	QP	12.41	-15.7	Pass
	943.15*	34.98	V	46	QP	11.02	-15.3	Pass
1000-25000MHz	4804*	40.28	H	74	PK	33.72	2.7	Pass
	--	--	H	54	AV	--	--	Pass
	7206*	39.47	V	74	PK	34.26	2.7	Pass
	--	--	V	54	AV	--	--	Pass

BT3.0 GFSK Modulation 2441MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	(dB/m)	
30-1000MHz	--	--	H	43.5	QP	--	--	Pass
	--	--	H	46	QP	--	--	Pass
1000-25000MHz	4882*	39.47	H	74	PK	34.53	2.9	Pass
	--	--	H	54	AV	--	--	Pass
	4882*	39.29	V	74	PK	34.71	2.9	Pass
	--	--	V	54	AV	--	--	Pass

BT3.0 GFSK Modulation 2480MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor (dB/m)	Result
	MHz	dBuV/m		dBμV/m		dBuV/m		
30-1000MHz	--	--	H	43.5	QP	--	--	Pass
	--	--	H	46	QP	--	--	Pass
1000-25000MHz	4960*	40.80	H	74	PK	33.20	3.3	Pass
	--	--	H	54	AV	--	--	Pass
	4960*	39.84	V	74	PK	34.16	3.3	Pass
	--	--	V	54	AV	--	--	Pass

Remark:

- (1) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.
- (3) Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Radiated Spurious Emission Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-003	101031	2020-6-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	68-4-80-14-003	708	2020-7-5
Horn Antenna	Rohde & Schwarz	HF907	68-4-80-14-004	102295	2020-7-5
Wideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	2020-7-5
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	2020-7-7
Pre-amplifier	Rohde & Schwarz	SCU 18	68-4-29-14-001	102230	2020-6-28
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	2020-7-16
Fully Anechoic Chamber	TDK	8X4X4	68-4-90-14-002	--	2020-7-7
Test software	Rohde & Schwarz	EMC32	68-4-90-14-002-A10	Version 9.15.00	N/A

RF Conducted Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	2020-6-28

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.80dB; Vertical: 4.87dB;
Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.59dB; Vertical: 4.58dB;
Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.05dB; Vertical: 5.04dB;
Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6x10 ⁻⁷ or 1%