



FCC/IC - TEST REPORT

Report Number : 68.950.17.457.01 Date of Issue: July 10, 2017

Model : PX

Product Type : Wireless Headphones

Applicant : B&W Group Ltd

Address : Dale Road, Worthing, United Kingdom, BN11 2BH

Production Facility : Charter Media (Dongguan) Co., Ltd.

Address : Dabandi Industrial Zone, Daning District, Humen Town, 523930
 : Dongguan City, Guangdong Province, PEOPLE'S REPUBLIC
 : OF CHINA

Test Result : **Positive** **Negative**

Total pages including Appendices : 49

TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power.....	15
9.3	20 dB bandwidth and 99% Occupied Bandwidth.....	22
9.4	Carrier Frequency Separation	29
9.5	Number of hopping frequencies.....	32
9.6	Dwell Time	34
9.7	Spurious RF conducted emissions.....	37
9.8	Band edge testing	41
9.9	Spurious radiated emissions for transmitter	44
10	Test Equipment List.....	48
11	System Measurement Uncertainty.....	49



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint
Road 2, Nanshan District
Shenzhen 518052
P.R. China

Telephone: 86 755 8828 6998

Fax: 86 755 828 5299

FCC Registration 502708

No.:

IC Registration 10320A -1

No.:

3 Description of the Equipment Under Test

Product:	Wireless Headphones
Model no.:	PX
FCC ID:	2ACIXPXWH
IC:	11946B-PXWH
Options and accessories:	Nil
Rating:	3.7VDC (Supplied by Li-ion rechargeable battery) 5VDC, 0.5A (Charged by USB port)
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Integrated antenna
Antenna Gain:	1.0dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Wireless Headphones operated at 2.4GHz

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2016 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 4 November 2014	General Requirements for the Certification of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure released by FCC on March 30, 2000 and ANSI C63.10-2013.



5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C/RSS-247 Issue 2/RSS-Gen Issue 4					
Test Condition			Pages	Test Result	Test Site
§15.207	RSS-GEN 8.8	Conducted emission AC power port	10	Pass	Site 1
§15.247(b)(1)	RSS-247 Clause 5.4(d)	Conducted peak output power	15	Pass	Site 1
§15.247(e)	RSS-247 Clause 5.2(b)	Power spectral density*	--	N/A	--
§15.247(a)(2)	RSS-247 Clause 5.2(a)	6dB bandwidth	--	N/A	--
§15.247(a)(1)	RSS-247 Clause 5.1(a) & RSS-Gen 6.6	20dB bandwidth and 99% Occupied Bandwidth	22	Pass	Site 1
§15.247(a)(1)	RSS-247 Clause 5.1(b)	Carrier frequency separation	29	Pass	Site 1
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Number of hopping frequencies	32	Pass	Site 1
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Dwell Time	34	Pass	Site 1
§15.247(d)	RSS-247 Clause 5.5	Spurious RF conducted emissions	37	Pass	Site 1
§15.247(d)	RSS-247 Clause 5.5	Band edge	41	Pass	Site 1
§15.247(d) & §15.209 &	RSS-247 Clause 5.5 & RSS-GEN 6.13	Spurious radiated emissions for transmitter and receiver	44	Pass	Site 1
§15.203	RSS-GEN 8.3	Antenna requirement	See note 1	Pass	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a Integrated antenna, which gain is1.0dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ACIXPXWH, IC: 11946B-PXWH complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C, RSS-247 and RSS-Gen rules.

PX is a Wireless Headphones with Bluetooth function. The TX and RX range is 2402MHz-2480MHz. there are two bluetooth modules in the product, one is CSR8675 which supports BDR+EDR and BLE, another is Cypress which supports BLE only.

Note: The report is for CSR8675 BDR+EDR part only.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- Not Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: June 7, 2017

Testing Start Date: June 7, 2017

Testing End Date: June 27, 2017

Reviewed by:

Phoebe Hu
EMC Section Manager

Prepared by:


Mark Chen
EMC Project Engineer

Tested by:


Endy Xie
EMC Test Engineer

7 Test Setups


7.1 Radiated test setups Below 1GHz

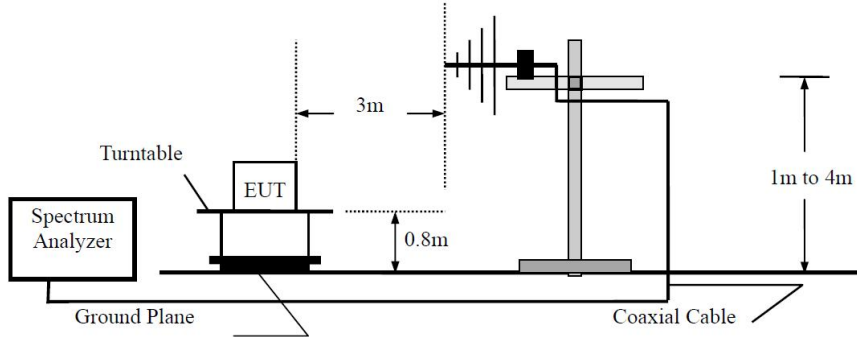


Above 1GHz

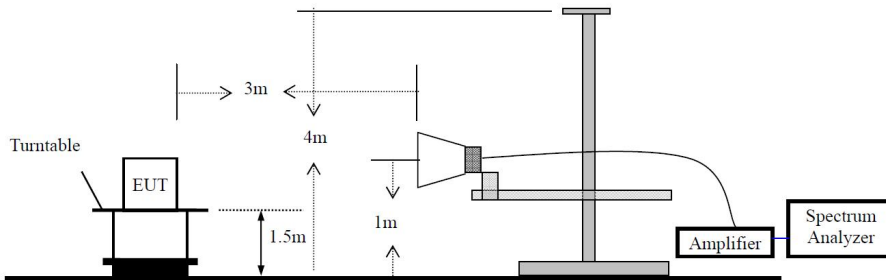

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

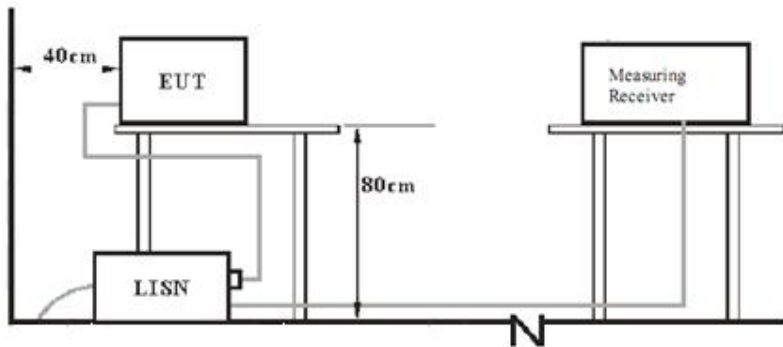

8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Notebook	lenovo	X220	---
Adapter	---	---	---

Test software: CRS test tool, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linea



Product Type : Wireless Headphones
 M/N : PX
 Operating Condition : Charging+ Aux In Playing
 Test Specification : Line
 Comment : AC 120V/60Hz

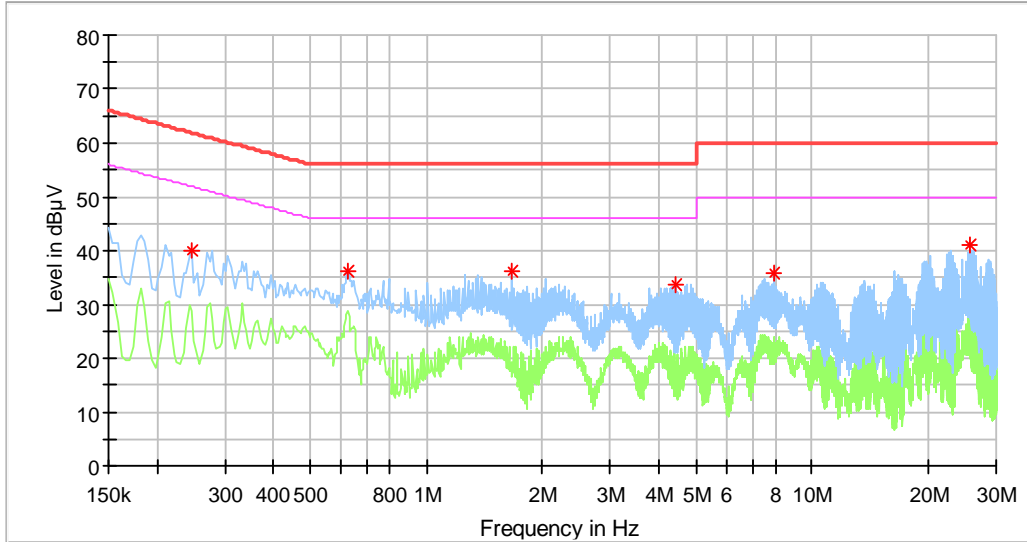

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.246000	39.89	---	61.89	22.00	L1	10.3
0.626000	36.05	---	56.00	19.95	L1	10.3
1.662000	35.99	---	56.00	20.01	L1	10.4
4.434000	33.66	---	56.00	22.34	L1	10.5
7.974000	35.66	---	60.00	24.34	L1	10.6
25.550000	41.16	---	60.00	18.84	L1	10.9

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---



Product Type : Wireless Headphones
 M/N : PX
 Operating Condition : Charging+ Aux In Playing
 Test Specification : Neutral
 Comment : AC 120V/60Hz

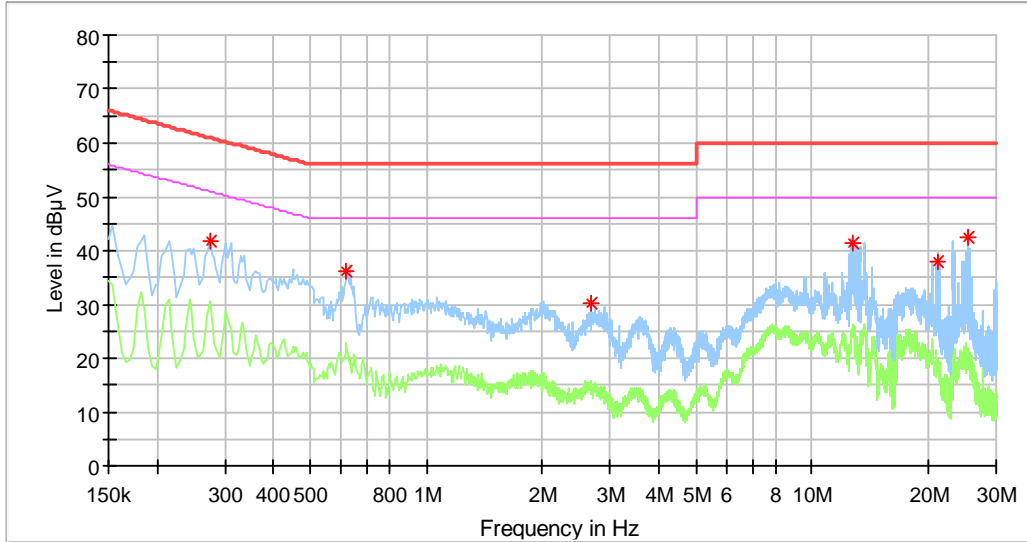

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.274000	41.65	---	61.00	19.35	N	10.3
0.622000	36.02	---	56.00	19.98	N	10.3
2.666000	30.15	---	56.00	25.85	N	10.4
12.782000	41.39	---	60.00	18.61	N	10.8
21.174000	37.89	---	60.00	22.11	N	11.2
25.230000	42.51	---	60.00	17.49	N	11.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---



Product Type : Wireless Headphones
 M/N : PX
 Operating Condition : Charging+ BT Link
 Test Specification : Line
 Comment : AC 120V/60Hz

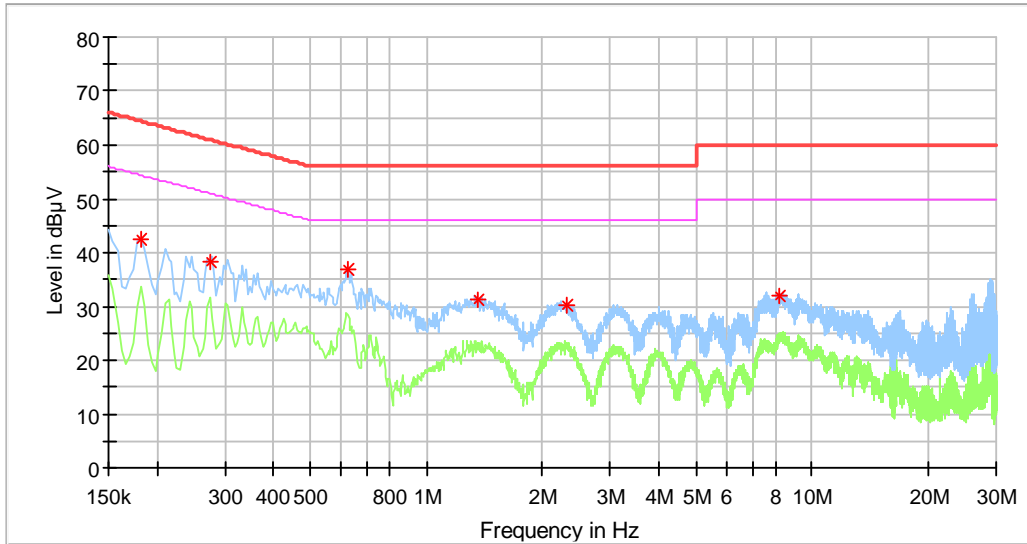

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.182000	42.62	---	64.39	21.77	L1	10.3
0.274000	38.11	---	61.00	22.89	L1	10.3
0.626000	36.72	---	56.00	19.28	L1	10.3
1.358000	31.21	---	56.00	24.79	L1	10.4
2.302000	30.02	---	56.00	25.98	L1	10.4
8.246000	31.78	---	60.00	28.22	L1	10.6

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---



Product Type : Wireless Headphones
 M/N : PX
 Operating Condition : Charging+ BT Link
 Test Specification : Neutral
 Comment : AC 120V/60Hz

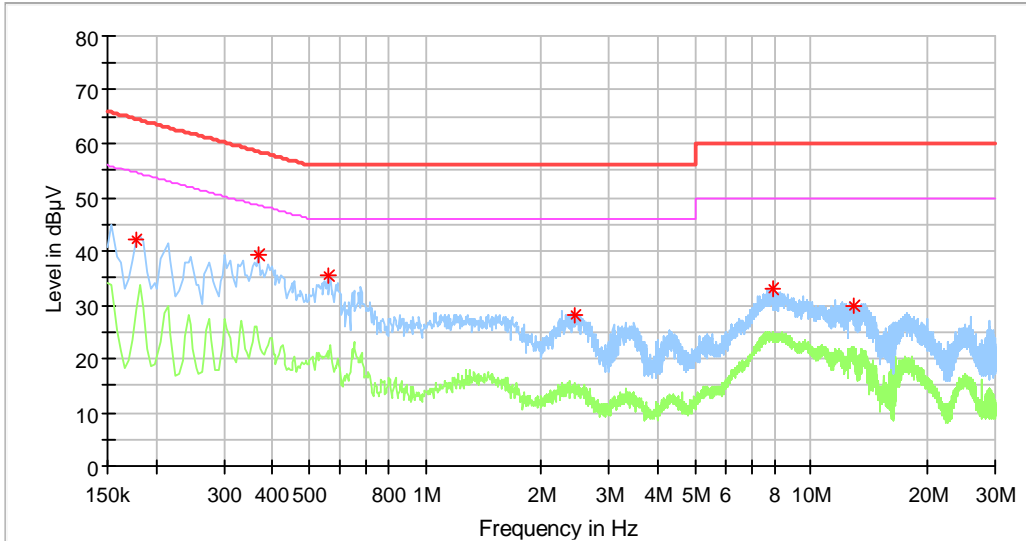

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.178000	41.95	---	64.58	22.63	N	10.3
0.370000	39.20	---	58.50	19.30	N	10.3
0.558000	35.39	---	56.00	20.61	N	10.3
2.438000	28.21	---	56.00	27.79	N	10.4
7.954000	32.85	---	60.00	27.15	N	10.7
12.938000	29.83	---	60.00	30.17	N	10.8

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30




Conducted peak output power

Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	0.89	Pass
Middle channel 2441MHz	3.46	Pass
High channel 2480MHz	3.89	Pass


Low channel 2402MHz

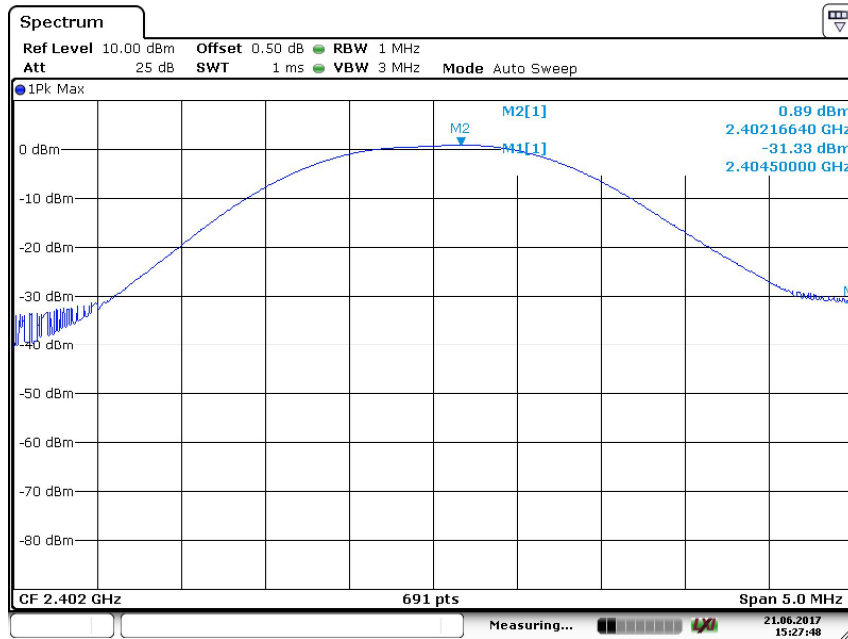

Date: 21.JUN.2017 15:27:48




Middle channel 2441MHz

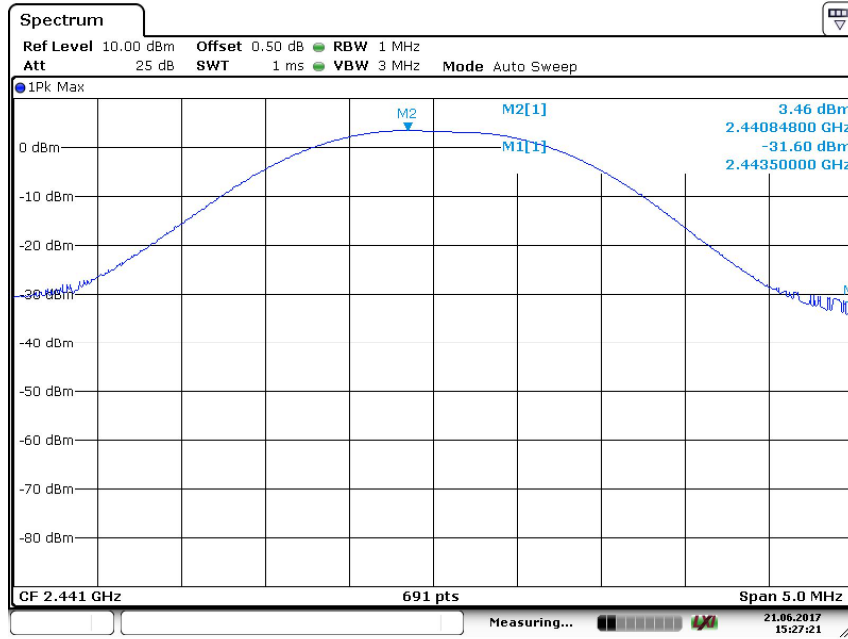

Date: 21.JUN.2017 15:27:21

High channel 2480MHz

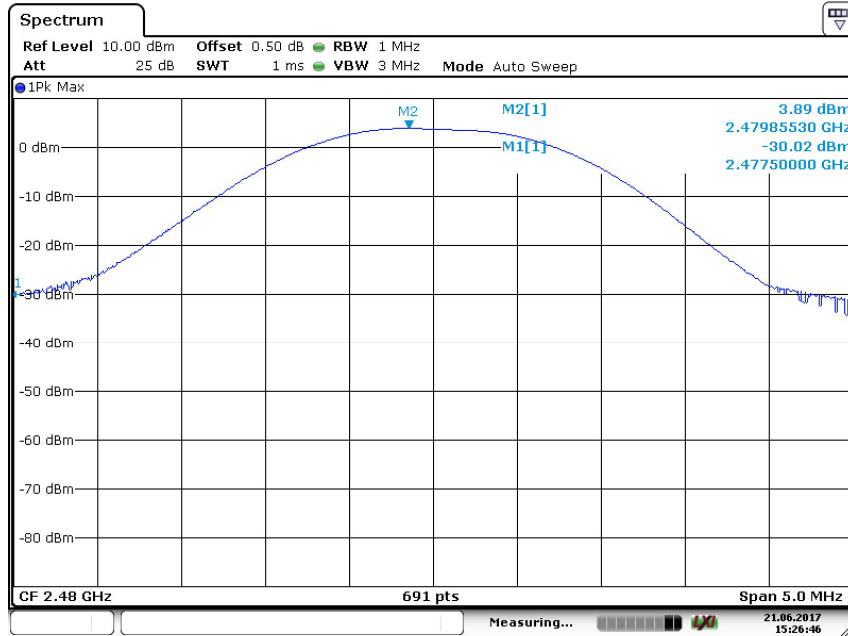


Date: 21.JUN.2017 15:26:46



Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	0.34	Pass
Middle channel 2441MHz	2.87	Pass
High channel 2480MHz	2.98	Pass


Low channel 2402MHz

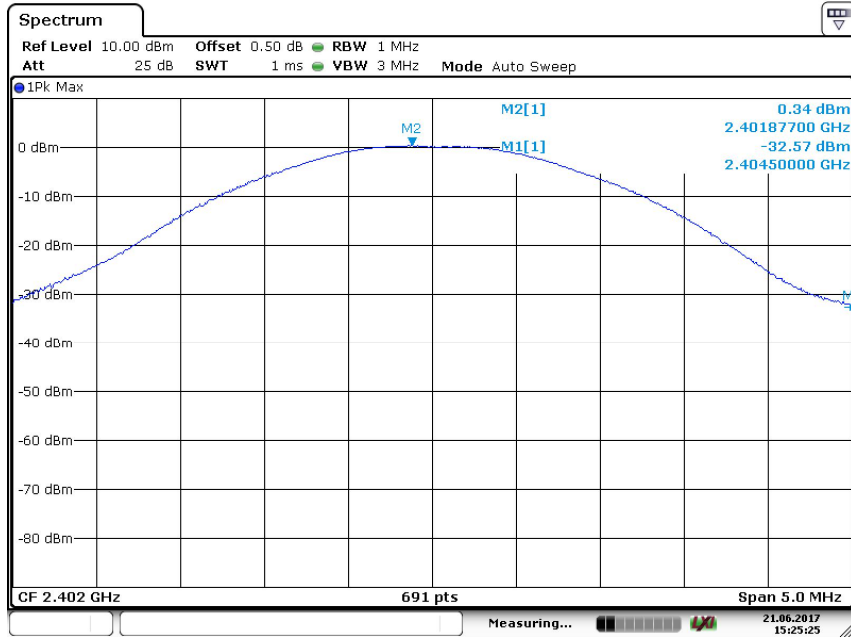

Date: 21.JUN.2017 15:25:25




Middle channel 2441MHz

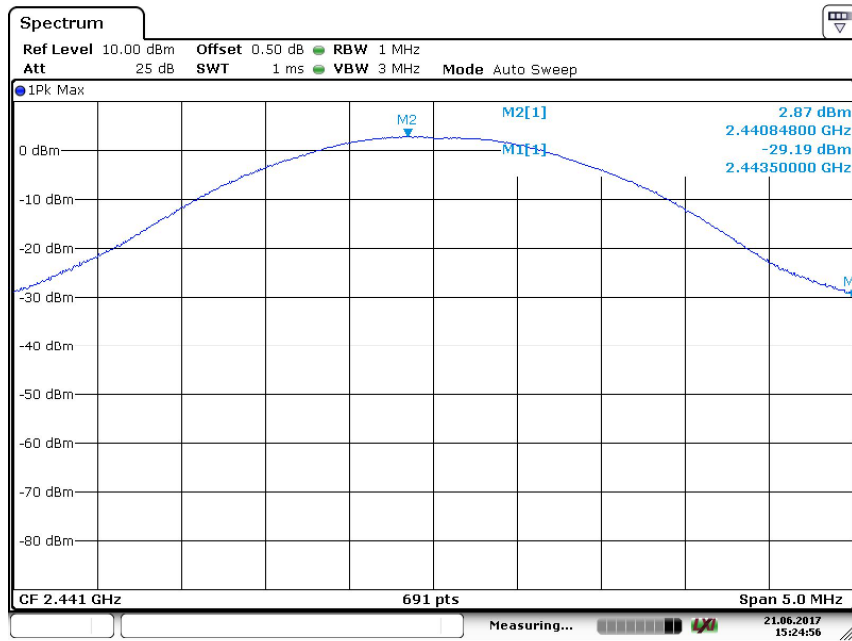

Date: 21.JUN.2017 15:24:56

High channel 2480MHz

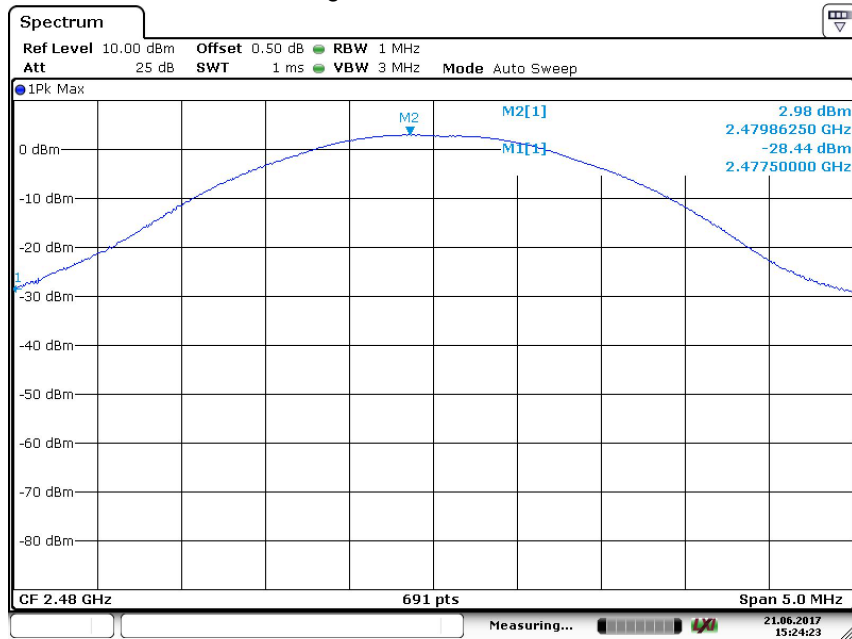


Date: 21.JUN.2017 15:24:23



Bluetooth Mode 8DPSK modulation Test Result Conducted Peak

Frequency MHz	Output Power dBm	Result
Low channel 2402MHz	2.32	Pass
Middle channel 2441MHz	3.82	Pass
High channel 2480MHz	3.23	Pass


Low channel 2402MHz

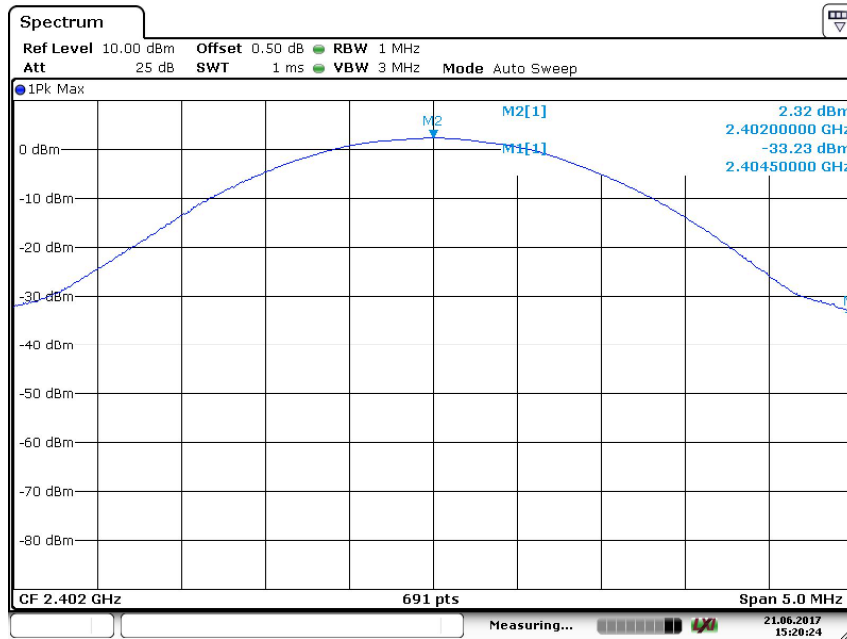

Date: 21.JUN.2017 15:20:24




Middle channel 2441MHz

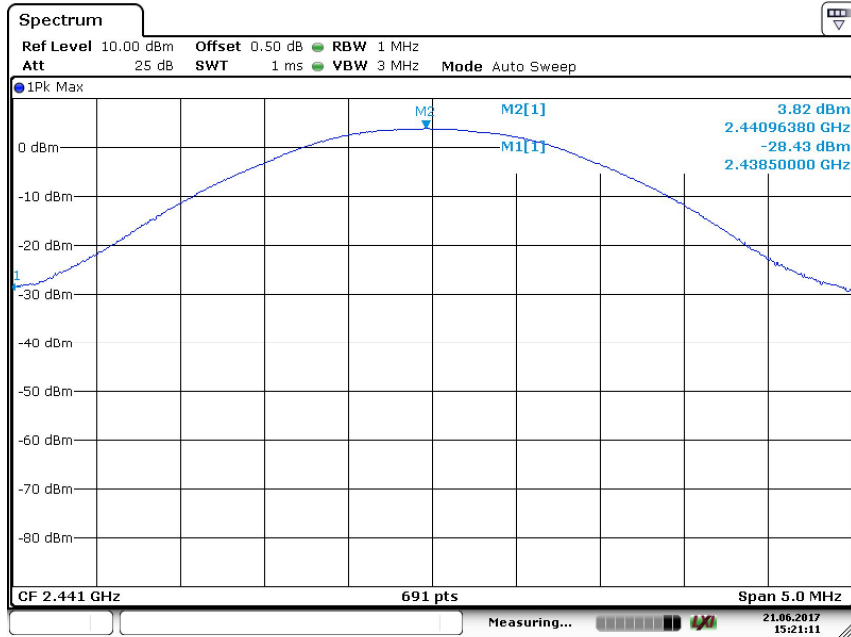

Date: 21.JUN.2017 15:21:11

High channel 2480MHz

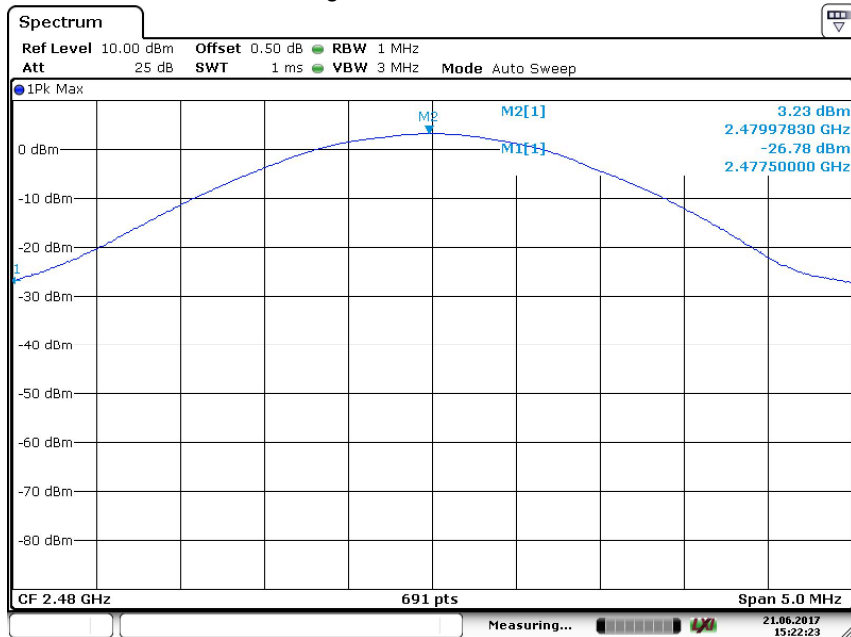

Date: 21.JUN.2017 15:22:23



9.3 20 dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit [kHz]

N/A




20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode GFSK Modulation test result


Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1158	967.8	--	Pass
2441	1120.1	972.5	--	Pass
2480	1337.2	1198.3	--	Pass

Low channel 2402MHz

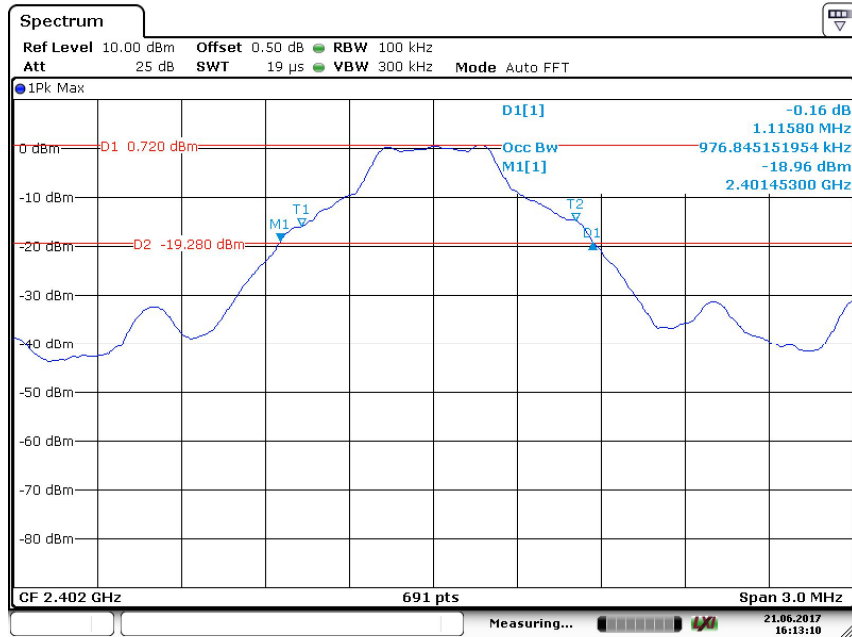




Middle channel 2441MHz

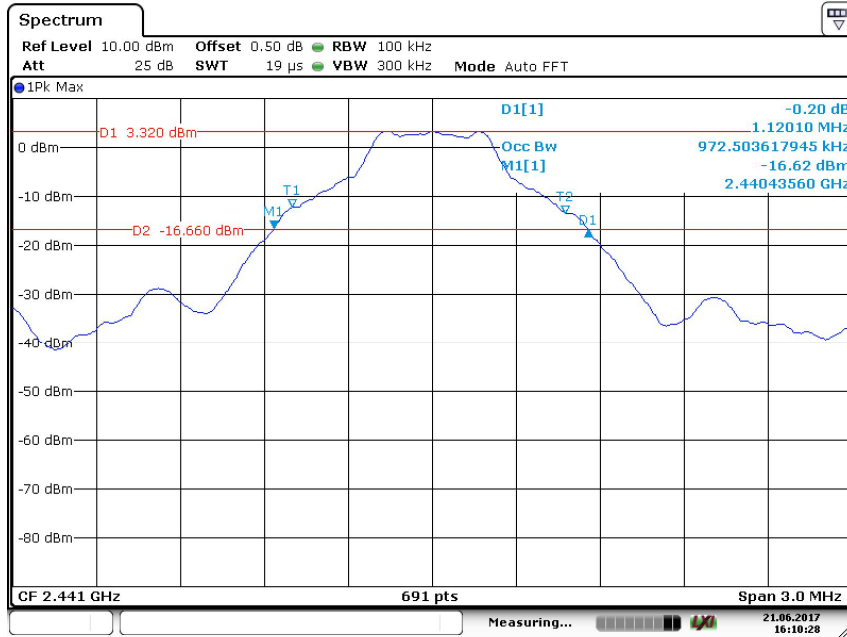

Date: 21.JUN.2017 16:10:28

High channel 2480MHz

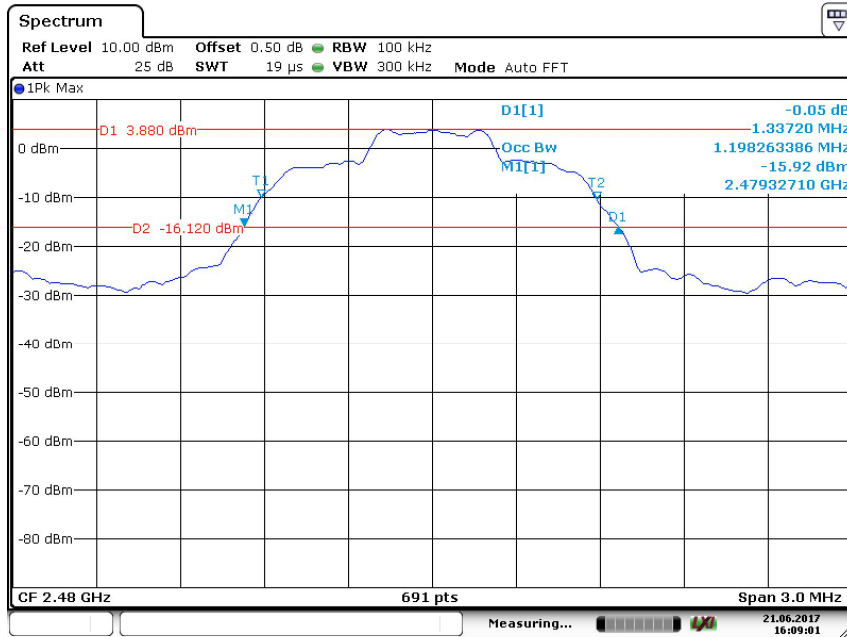


Date: 21.JUN.2017 16:09:01

20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1384.9	1246	--	Pass
2441	1363.2	1254.7	--	Pass
2480	1389.3	1254.7	--	Pass


Low channel 2402MHz

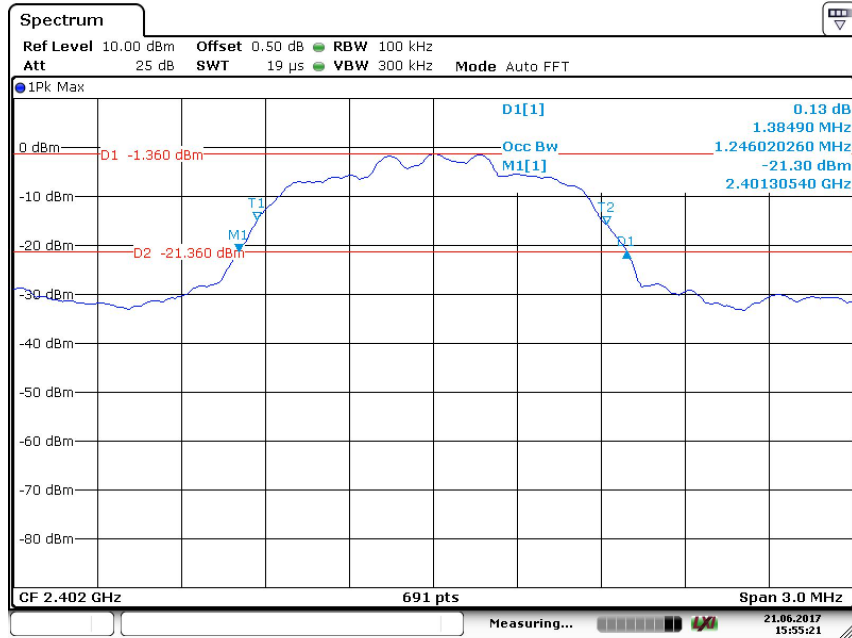

Date: 21.JUN.2017 15:55:21




Middle channel 2441MHz

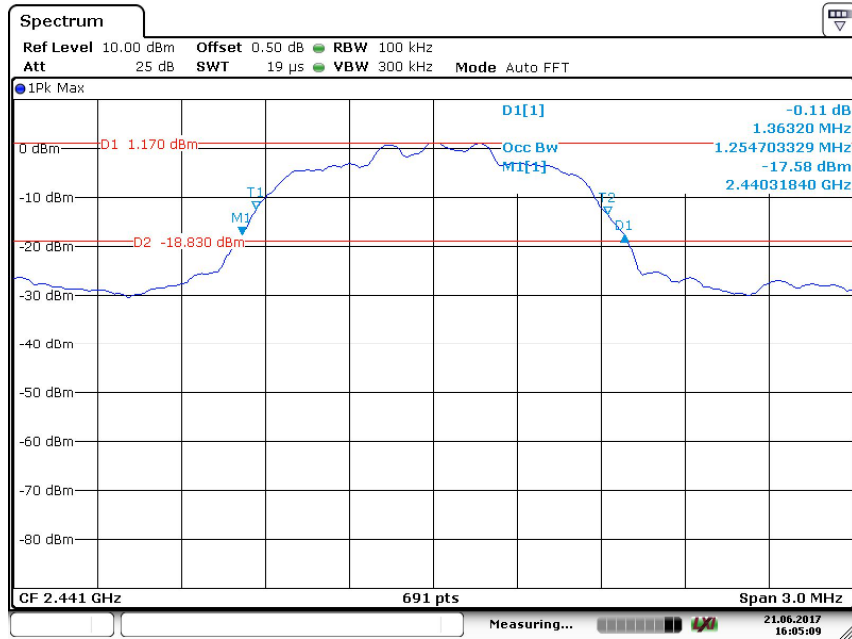

Date: 21.JUN.2017 16:05:09

High channel 2480MHz

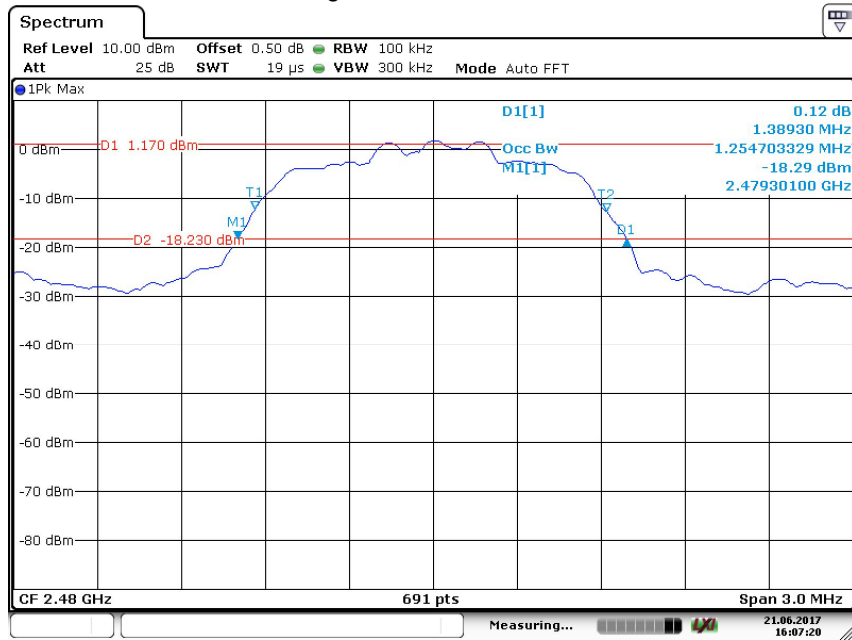


Date: 21.JUN.2017 16:07:20

20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode 8DPSK Modulation test result


Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1371.9	1250.4	--	Pass
2441	1367.6	1254.7	--	Pass
2480	1371.9	1254.7	--	Pass

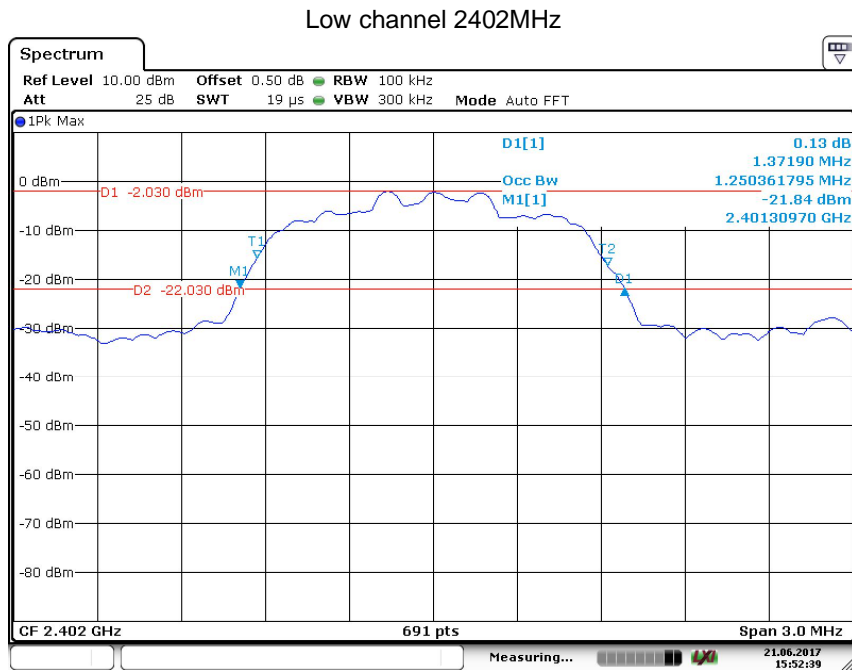

Date: 21.JUN.2017 15:52:39




Middle channel 2441MHz

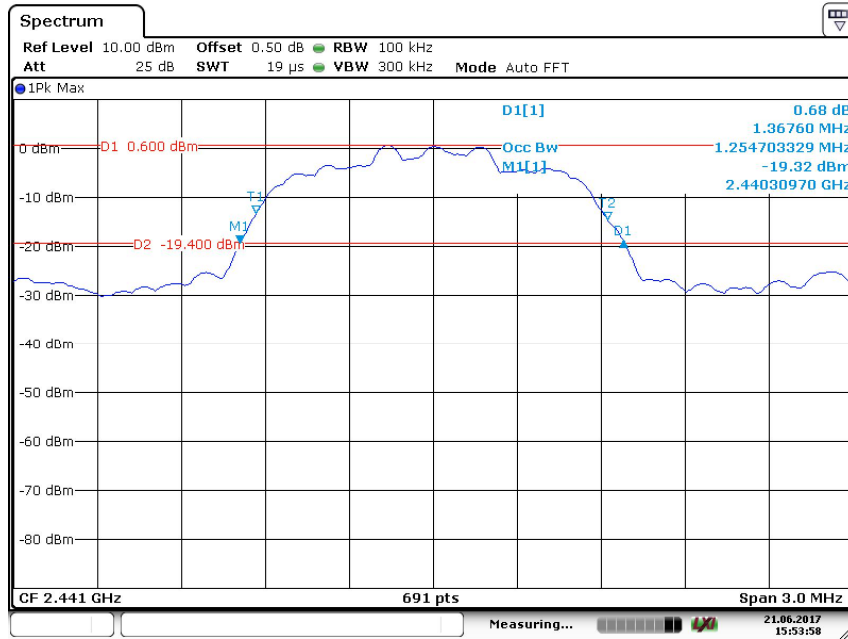

Date: 21.JUN.2017 15:53:59

High channel 2480MHz

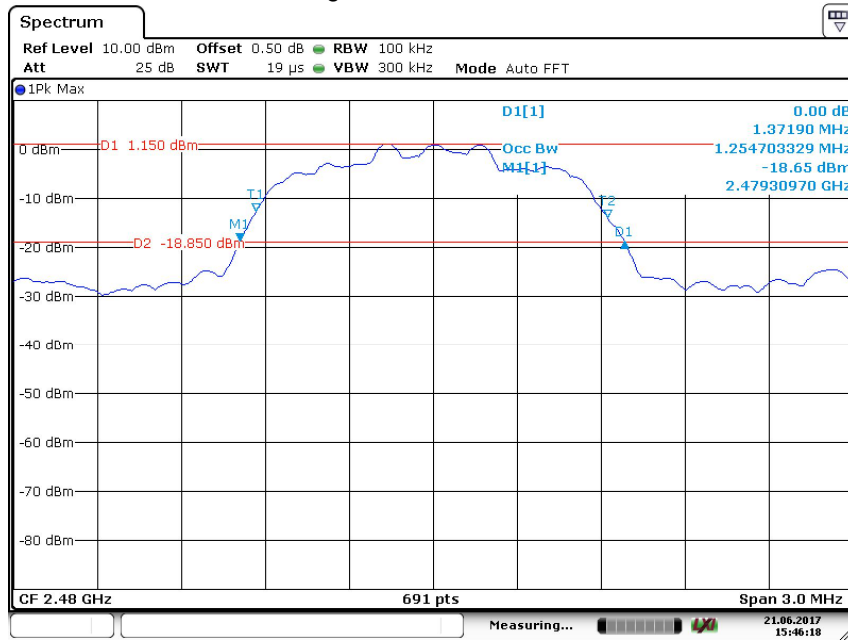

Date: 21.JUN.2017 15:46:19



9.4 Carrier Frequency Separation

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, RBW \geq 1% of the span, VBW) \geq RBW, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

$$\frac{\text{Limit}}{\text{kHz}} \geq 25\text{kHz or } 2/3 \text{ of the } 20 \text{ dB bandwidth which is greater}$$

GFSK Modulation Limit

Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	772
2441	746.73
2480	891.47


Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.

GFSK Modulation test result

Frequency MHz	Carrier Frequency Separation kHz	Result
2402	1002.9	Pass
2441	1002.9	Pass
2480	1002.9	Pass


Low channel 2402MHz

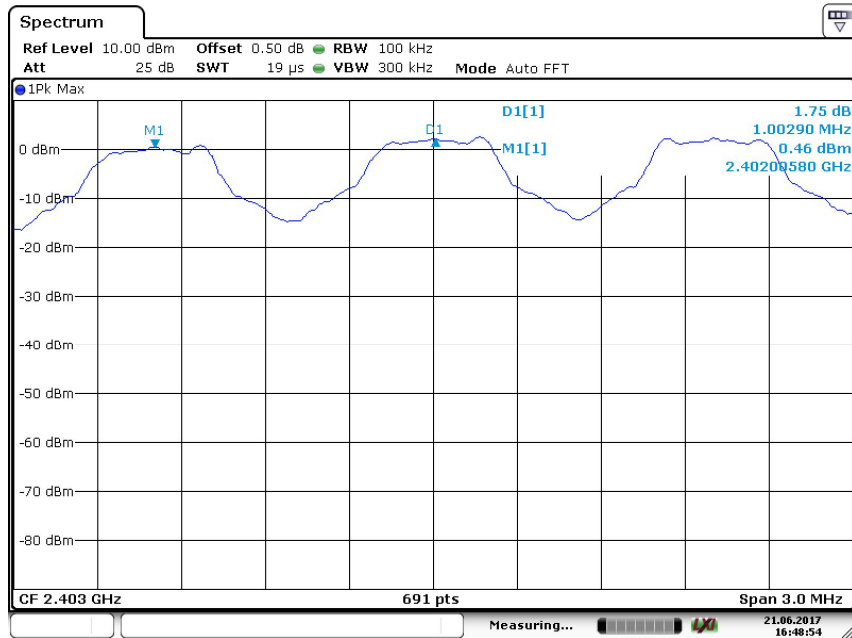

Date: 21.JUN.2017 16:48:54




Middle channel 2441MHz

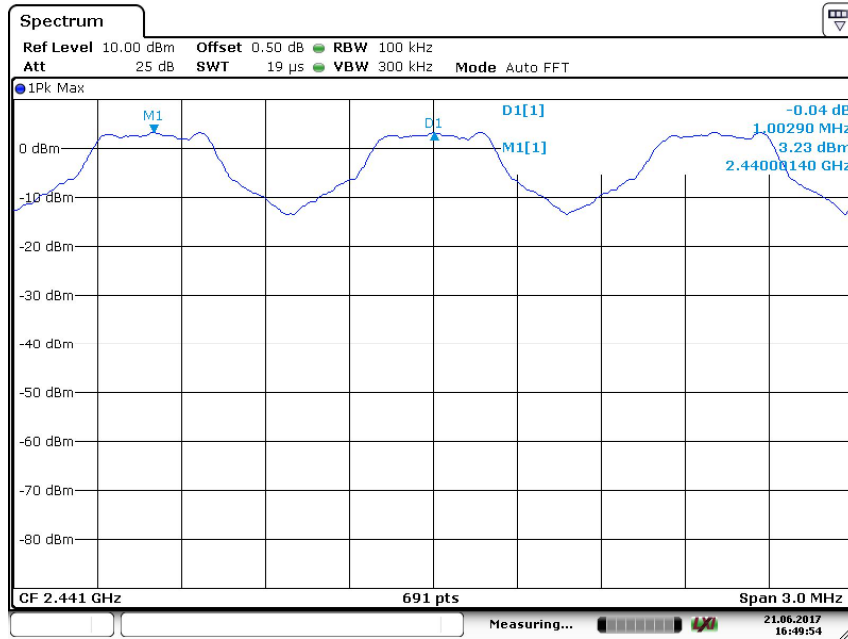

Date: 21.JUN.2017 16:49:54

High channel 2480MHz

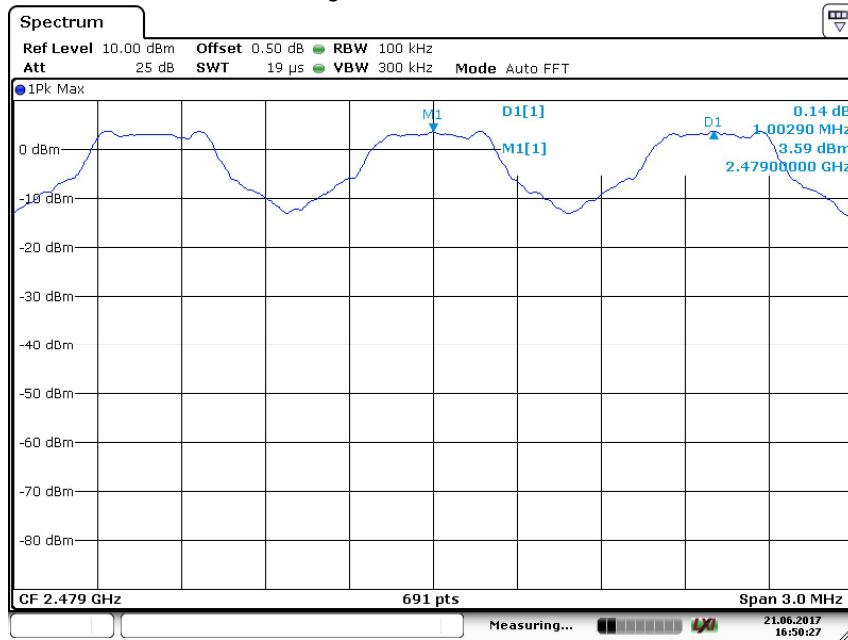

Date: 21.JUN.2017 16:50:27

9.5 Number of hopping frequencies

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

Limit

**Limit
number**


≥ 15



Number of hopping frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

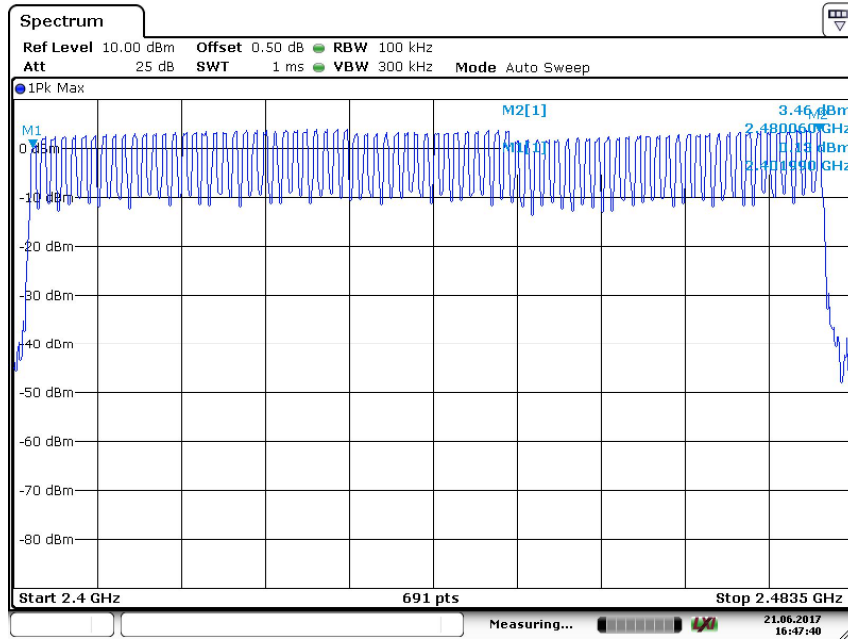

Date: 21.JUN.2017 16:47:40

9.6 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time

The maximum dwell time shall be 0.4 s.

According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;


The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 31.6s for DH5= $1600 / 6 / 79 * 31.6 = 106.67$

Test Result

Modulation	Mode	Reading (us)	Total Hops	Test Result (ms)	Limit (ms)	Result
GFSK	DH5	2898.6	106.67	309.19	< 400	Pass
$\pi/4$ -DQPSK	2DH5	2913	106.67	310.73	< 400	Pass
8-DPSK	3DH5	2898.6	106.67	309.19	< 400	Pass

GFSK Modulation

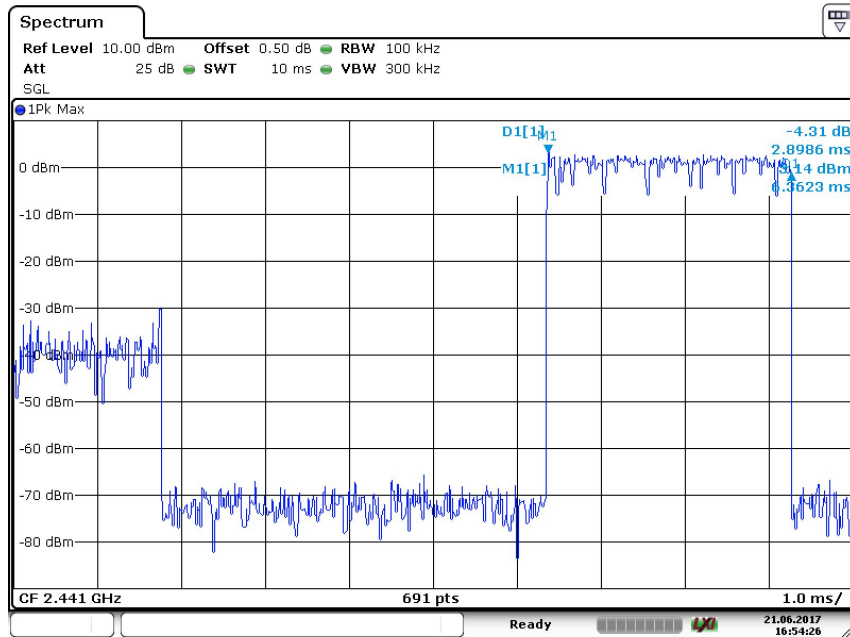


Date: 21.JUN.2017 16:54:27

DH5




$\pi/4$ -DQPSK Modulation

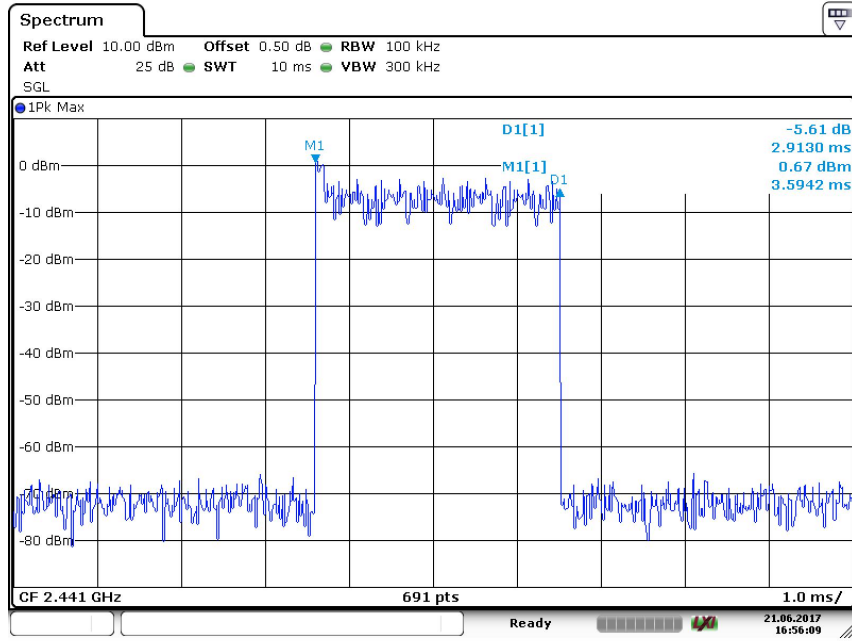

Date: 21.JUN.2017 16:56:09

2DH5

8-DPSK Modulation

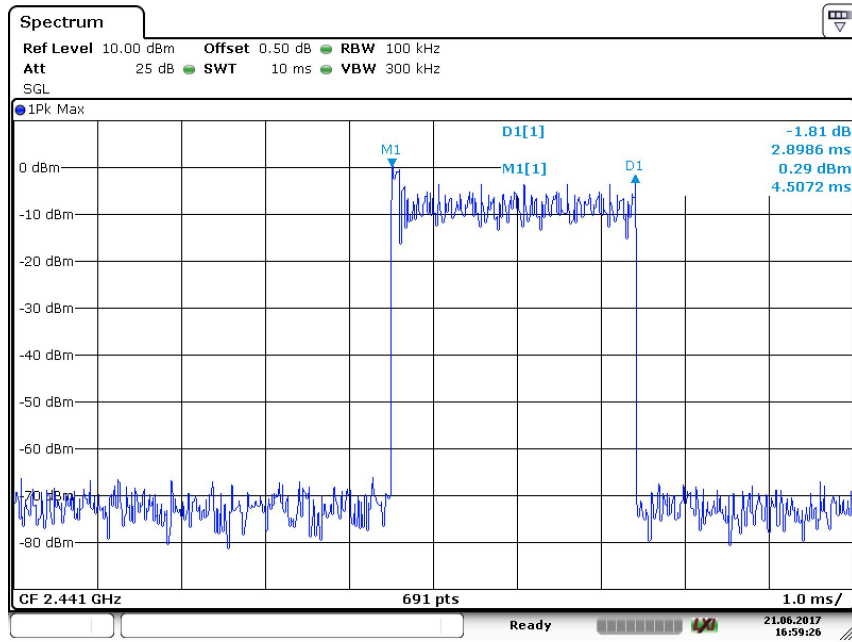

Date: 21.JUN.2017 16:59:25

3DH5



9.7 Spurious RF conducted emissions

Test Method

1. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
 RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Only the worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

BT3.0 GFSK Modulation:

Low channel 2402MHz

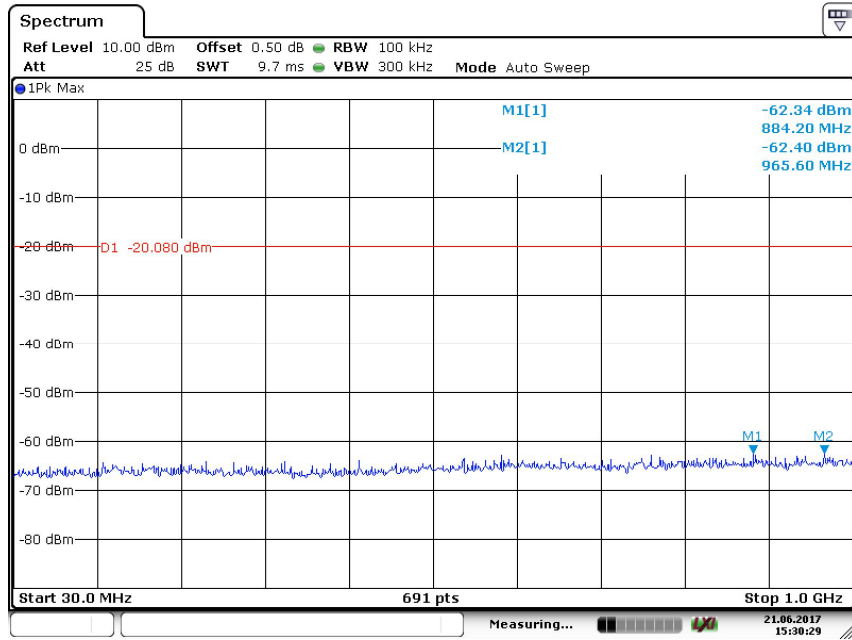


Date: 21.JUN.2017 15:30:29

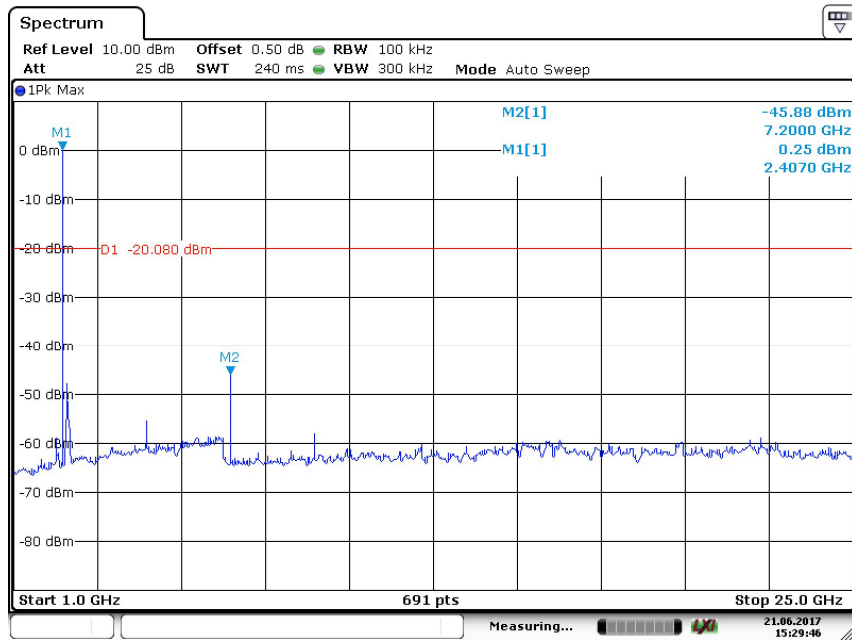


Date: 21.JUN.2017 15:29:47



Middle channel 2441MHz

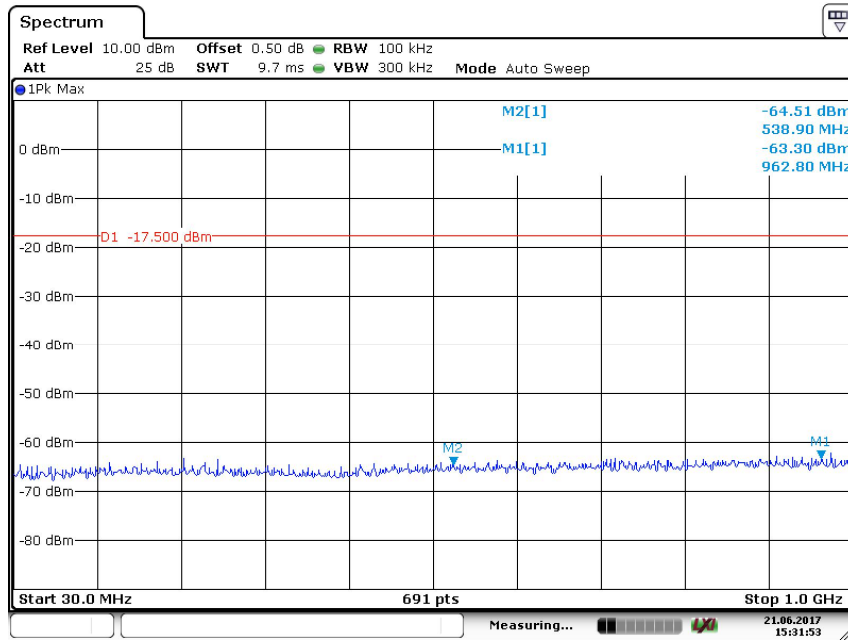


Date: 21.JUN.2017 15:31:53

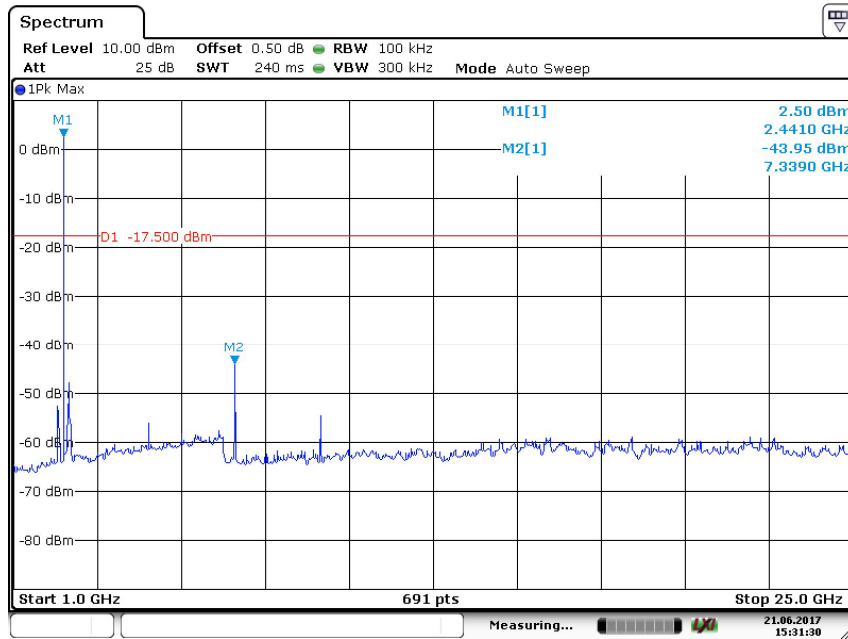


Date: 21.JUN.2017 15:31:30



High channel 2480MHz

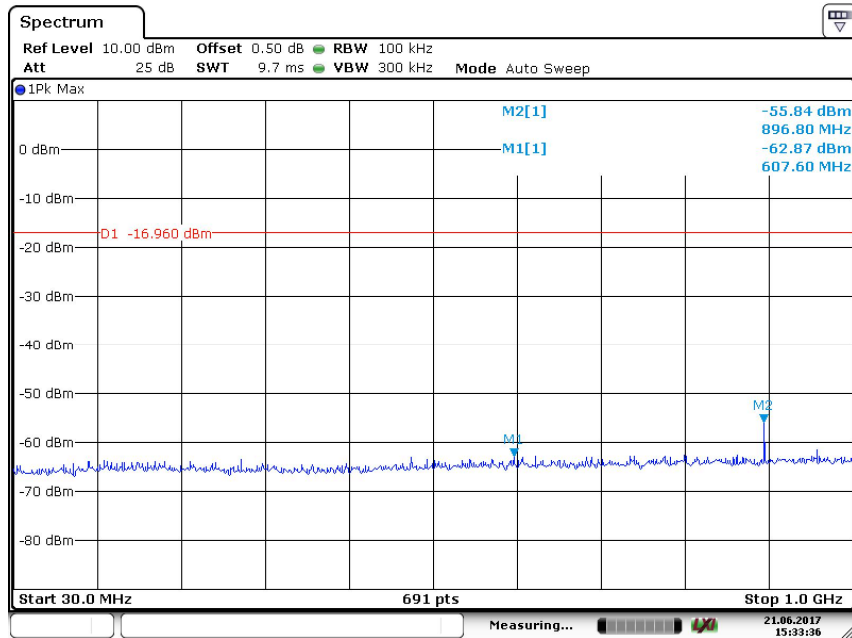

Date: 21.JUN.2017 15:33:37

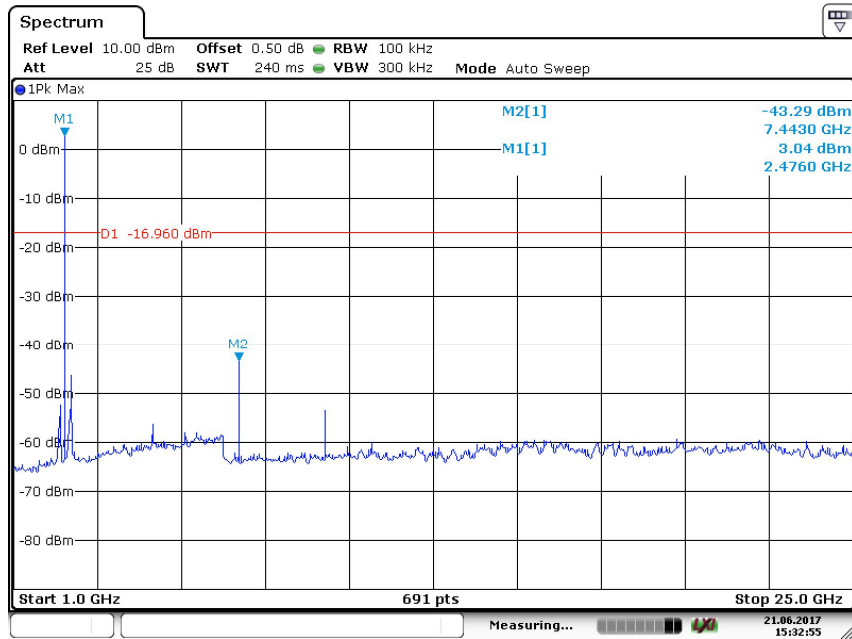

Date: 21.JUN.2017 15:32:55

9.8 Band edge testing

Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.



GFSK mode:

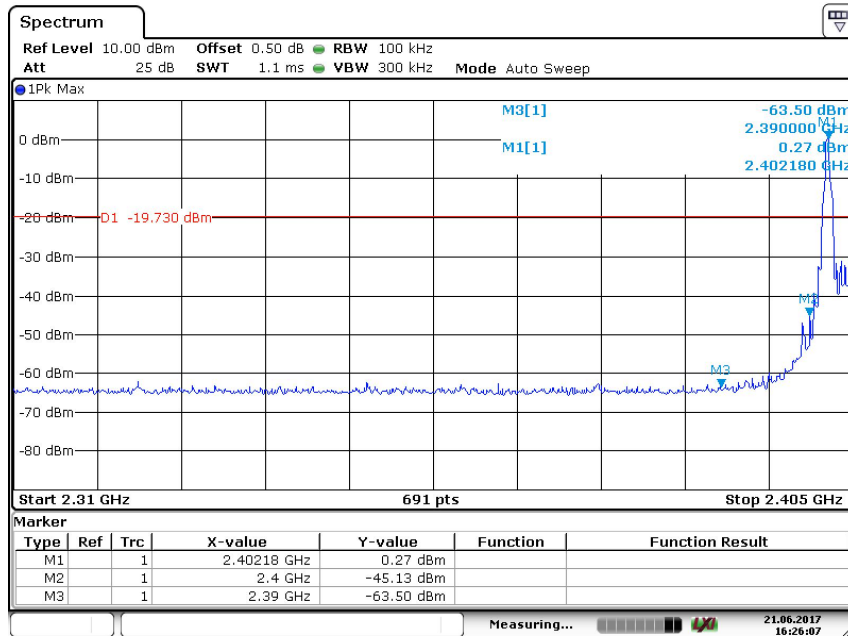


Date: 21.JUN.2017 16:26:07

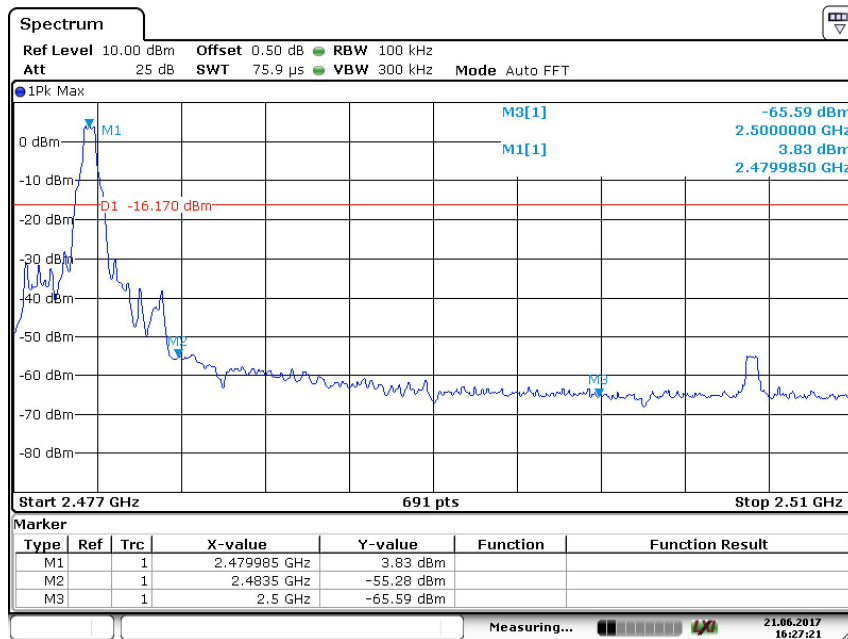


Date: 21.JUN.2017 16:27:21

8DPSK mode:

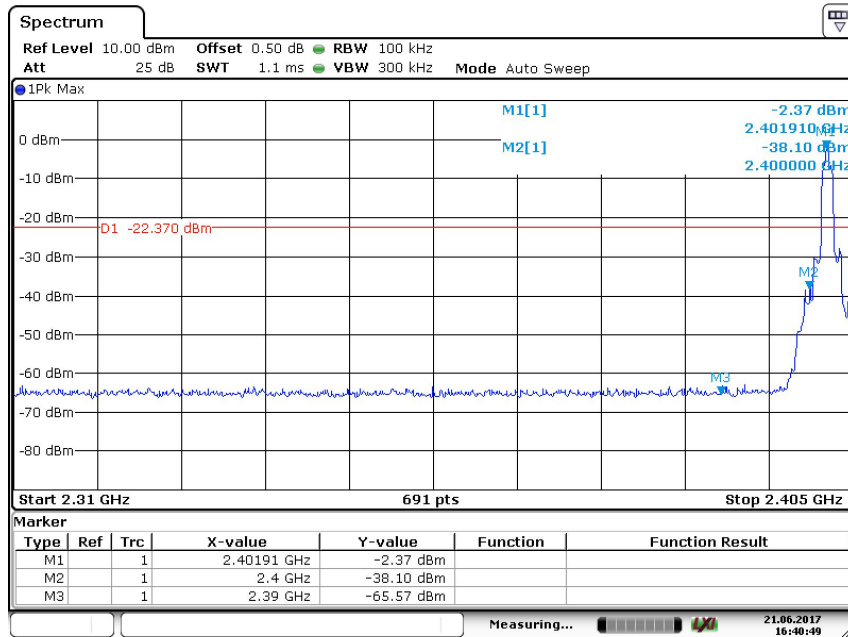

Date: 21.JUN.2017 16:40:50

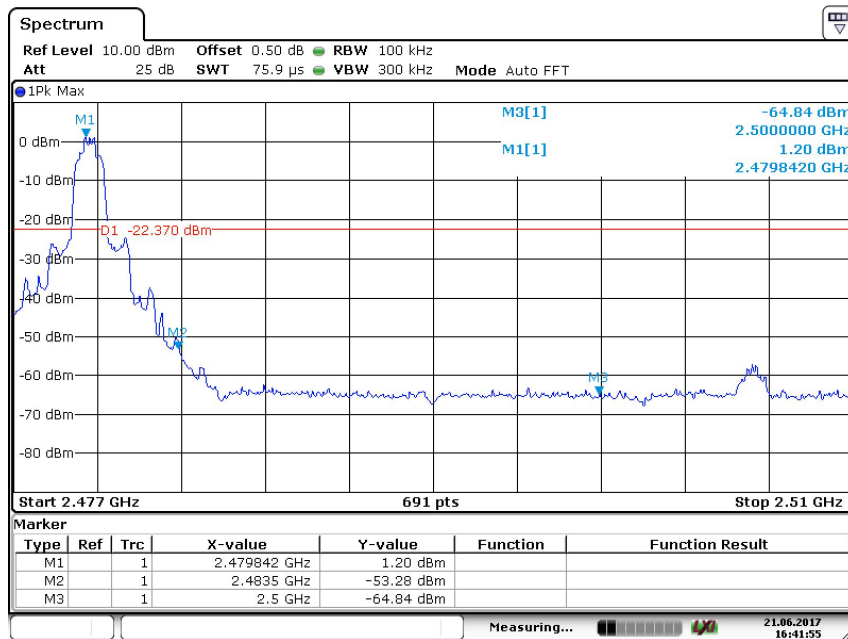

Date: 21.JUN.2017 16:41:55

9.9 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:
For Above 1GHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.
For Below 1GHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

Transmitting spurious emission test result as below:

BT3.0 GFSK Modulation 2402MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	348.05	31.65	H	46	QP	14.35	Pass
	813.98	25.87	V	46	QP	20.13	Pass
1000-25000MHz	--	---	H	74	PK	--	Pass
	--	--	H	54	AV	--	Pass
	--	--	V	74	PK	--	Pass
	--	--	V	54	AV	--	Pass

BT3.0 GFSK Modulation 2441MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	--	---	H	74	PK	--	Pass
	--	--	H	54	AV	--	Pass
	--	--	V	74	PK	--	Pass
	--	--	V	54	AV	--	Pass

BT3.0 GFSK Modulation 2480MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dB μ V/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	--	---	H	74	PK	--	Pass
	--	--	H	54	AV	--	Pass
	--	--	V	74	PK	--	Pass
	--	--	V	54	AV	--	Pass

Remark:

- (1) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.

10 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
CE	EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2017-7-15
	LISN	Rohde & Schwarz	ENV4200	100249	2017-7-15
	LISN	Rohde & Schwarz	ENV216	100326	2017-7-15
	ISN	Rohde & Schwarz	ENY81	100177	2017-7-15
	ISN	Rohde & Schwarz	ENY81-CAT6	101664	2017-7-15
	High Voltage Probe	Rohde & Schwarz	TK9420(VT9420)	9420-58	2017-7-15
	RF Current probe	Rohde & Schwarz	EZ-17	100816	2017-7-15
C	Signal Generator	Rohde & Schwarz	SMB100A	108272	2017-7-15
	Signal Analyzer	Rohde & Schwarz	FSV40	101030	2017-7-15
	Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	2017-7-15
	RF Switch Module	Rohde & Schwarz	OSP120/OS P-B157	101226/100851	2017-7-15
RE	EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
	Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15
	Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2017-7-15
	3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.83dB; Vertical: 4.91dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-18000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;
Uncertainty for Conducted RF test with TS 8997	2.04dB