



**FCC 47 CFR PART 15 SUBPART C 15.247**

**TEST REPORT**

**FOR**

**iDip Meter**

Model : eXact iDip®, eXact iDip® 570, eXact iDip® 638,  
eXact iDip® 2, eXact iDip® Pro

Issued to

Metertech Inc.  
63-2, Cheng Gong Road, Sec.1, NanGang, Taipei, Taiwan(R.O.C.)

Issued by

Global Certification Corp.  
No.146, Sec. 2, Xiangzhang Rd., Xizhi Dist., New Taipei City 221,  
Taiwan (R.O.C.)



*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.*



---

<b>TABLE OF CONTENTS</b>	-----	2
<b>1. GENERAL INFORMATION</b>	-----	4
1.1 DESCRIPTION OF THE TESTED SAMPLES	-----	5
1.2 LIST OF MEASUREMENTS AND EXAMINATIONS	-----	6
<b>2. TEST METHODOLOGY</b>	-----	7
2.1 GENERAL TEST PROCEDURES	-----	7
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	-----	7
2.3 DESCRIPTION OF TEST MODES	-----	8
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	-----	8
<b>3. TEST AND MEASUREMENT EQUIPMENT</b>	-----	9
3.1 CALIBRATION	-----	9
3.2 EQUIPMENT	-----	9
<b>4. ANTENNA REQUIREMENTS</b>	-----	10
4.1 STANDARD APPLICABLE	-----	10
4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	-----	10
<b>5. PEAK OUTPUT POWER</b>	-----	11
5.1 TEST SETUP	-----	11
5.2 LIMIT	-----	11
5.3 TEST PROCEDURE	-----	11
5.4 TEST RESULT	-----	11
5.5 TEST DATA	-----	11
<b>6. AVERAGE POWER</b>	-----	12
6.1 TEST SETUP	-----	12
6.2 LIMIT	-----	12
6.3 TEST PROCEDURE	-----	12
6.4 TEST RESULT	-----	12
6.5 TEST DATA	-----	12
<b>7. BAND EDGE</b>	-----	13
7.1 TEST SETUP	-----	13
7.2 LIMIT	-----	14
7.3 RESULT	-----	14
7.4 TEST DATA	-----	15
<b>8. 6DB BANDWIDTH</b>	-----	20
8.1 TEST LIMIT	-----	20
8.2 TEST SETUP LAYOUT	-----	20
8.3 TEST RESULT AND DATA	-----	20
8.4 TEST DATA	-----	20
<b>9. RADIATED EMISSION</b>	-----	22
9.1 TEST SETUP	-----	22
9.2 LIMIT	-----	23
9.3 TEST PROCEDURE	-----	23
9.4 RESULT	-----	23
9.5 TEST DATA	-----	24
<b>10. CONDUCTED EMISSIONS</b>	-----	28
10.1 TEST SETUP	-----	28



---

10.2	LIMIT -----	28
10.3	TEST PROCEDURE-----	28
10.4	TEST SPECIFICATION -----	29
10.5	RESULT -----	29
10.6	TEST DATA -----	29
<b>11.</b>	<b>PEAK POWER SPECTRAL DENSITY-----</b>	<b>30</b>
11.1	LIMIT -----	30
11.2	TEST PROCEDUGE-----	30
11.3	TEST RESULTS-----	30

**APPENDIX 1**  
**RADIO FREQUENCY EXPOSURE**

**APPENDIX 2**  
**PHOTOS OF TEST CONFIGURATION**

**PHOTOS OF EUT**



## 1. GENERAL INFORMATION

Applicant : Metertech Inc.

Address : 63-2, Cheng Gong Road, Sec.1, NanGang, Taipei, Taiwan(R.O.C.)

Manufacturer : Metertech Inc.

Address : 63-2, Cheng Gong Road, Sec.1, NanGang, Taipei, Taiwan(R.O.C.)

EUT : iDip Meter

Model No. : eXact iDip<sup>®</sup>, eXact iDip<sup>®</sup> 570, eXact iDip<sup>®</sup> 638, eXact iDip<sup>®</sup> 2,  
eXact iDip<sup>®</sup> Pro

Model Differences : The major electrical and mechanical constructions of series models are identical to the basic model, except different marketing purpose. The model, eXact iDip<sup>®</sup> is the testing sample, and the final test data are shown on this test report.

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2009. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

### FCC part 15 subpart C

Receipt Date : May. 07, 2014

Issue Date : May. 16, 2014

New Taipei City, Taiwan  
(Place)

May. 16, 2014  
(Date)

*Adam Chou, Manager*  
(Signature) Designation Number: TW1069

**1.1 DESCRIPTION OF THE TESTED SAMPLES**

EUT Name : iDip Meter  
Model Number : eXact iDip®  
FCC ID : 2ACJ4IDIP1  
Input Voltage : 3Vdc  
Power From : Inside Outside  
Adapter  
Battery :1.5Vdc x 4  
AC Power Source  
DC Power Source  
Support Unit PC  
Operate Frequency : Refer to the channel list as described below  
2.4GHz  
Modulation Technique : GFSK  
Number of Channels : 40  
Channel spacing : 1MHz  
Operating Mode : Duplex  
Antenna Type : PCB (Inverted-F)  
Antenna gain : -5.45 dBi

Channels	Frequencies (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



## 1.2 LIST OF MEASUREMENTS AND EXAMINATIONS

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	N/A
15.209	Radiated Emission	Pass
15.247(a)(1)	6dB Bandwidth Measurement	Pass
15.247(a)(1)	Peak power spectral density	Pass
15.247(b)	Peak Output Power Measurement Data	Pass
15.247(b)	Band Edges Measurement Data	Pass

## 2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.4:2009 and FCC CFR 47 Part 15 Subpart C.

### 2.1 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4:2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

### 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209

shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## **2.3 DESCRIPTION OF TEST MODES**

The EUT was tested under following modes:

**Modes:**

**1. Full System**

**Channels:**

- 1. 2.402GHz** (Lowest Channel)
- 2. 2.440GHz** (Middle Channel)
- 3. 2.480GHz** (Highest Channel)

## **2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS**

**Setup Diagram**

See test photographs attached in **appendix 1** for the actual connections between EUT and support equipment.

**Support Equipment**



Peripherals Devices:

<b>OUTSIDE SUPPORT EQUIPMENT</b>							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>EUT</b>							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	PCB	UPC-1-V0	N/A	N/A	N/A	Unshielded 1.2m	N/A

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



### **3. TEST AND MEASUREMENT EQUIPMENT**

#### **3.1 CALIBRATION**

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

#### **3.2 EQUIPMENT**

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

**TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT**

Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
EMC Test Receiver	R&S	ESCI	100438	Aug. 28, 2014	
Bilog Antenna	SUNOL	JB1	A052204	Nov. 21, 2014	
Turn table	EMCO	2080	9508-1805	N/A	
Controller	EMCO	2090	9804-1328	N/A	
RF Cable	JYE BAO	RG214/U	Cable-002	Nov. 22, 2014	
Thermo-Hygro meter	WISEWIND	4-IN-1	050100378	Apr. 08, 2015	
Wideband Peak Power Meter	Anritsu	ML2495A	0841006	Oct. 03, 2014	
Pre-Amplifier	WIRELESS	FPA-6592G	60028	Sep. 06, 2014	
Microwave Preamplifier	EMC INSTRUMENT	EMC051845	980059	Dec. 05, 2014	
EMC Test Receiver	LIG	ER-265	L0907B006	Nov. 22, 2014	
RF Cable_NSA_Rx	HUBER + UHNER	RG213/U	Cable-004	May 21, 2015	
Double Ridged Guide HORN ANTENNA	EST.LINDGREN	3117	00119028	May. 21, 2015	
Microwave Cable	HUBER SUHNER	SUCOFLEX 104	Cable-003-4M	Dec. 05, 2014	
Microwave Cable	HUBER SUHNER	SUCOFLEX 104	Cable-003-3M	Dec. 03, 2014	

※ Calibration interval of instruments listed above is one year



---

## **4. ANTENNA REQUIREMENTS**

### **4.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(b), if transmitting antennas of direction gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN**

Antenna type: PCB (Inverted-F)

Antenna Gain: -5.45 dBi

## 5. PEAK OUTPUT POWER

### 5.1 TEST SETUP



### 5.2 LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to § 15.247(b)(3) , for systems using digital modulation in the bands of 902 – 928 MHz , 2400 – 2483.5 MHz: 1 Watt.
2. According to § 15.247(b)(4) , the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used , the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) , (b)(2) , and (b)(3) of this section , as appropriate , by the amount in dB that directional gain of the antenna exceeds 6 dBi.

### 5.3 TEST PROCEDURE

1. Peak power is measured using the wideband power meter.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


### 5.4 TEST RESULT: PASS

### 5.5 TEST DATA:

Channel No.	Frequency (MHz)	Measurement Level (dbm)	Required Limit (dbm)	Result
low	2402	-14.56	<30 dbm	PASS
middle	2441	-16.52	<30 dbm	PASS
high	2480	-15.73	<30 dbm	PASS

## 6. AVERAGE POWER

### 6.1 TEST SETUP



### 6.2 LIMIT

None ; for reporting purposes only.

### 6.3 TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.


### 6.4 TEST RESULT: PASS

### 6.5 TEST DATA:

Channel No.	Frequency (MHz)	Measurement Level (dbm)	Required Limit (dbm)	Result
low	2402	-14.10	<30 dbm	PASS
middle	2441	-15.73	<30 dbm	PASS
high	2480	-17.24	<30 dbm	PASS

## 7. BAND EDGE

### 7.1 TEST SETUP

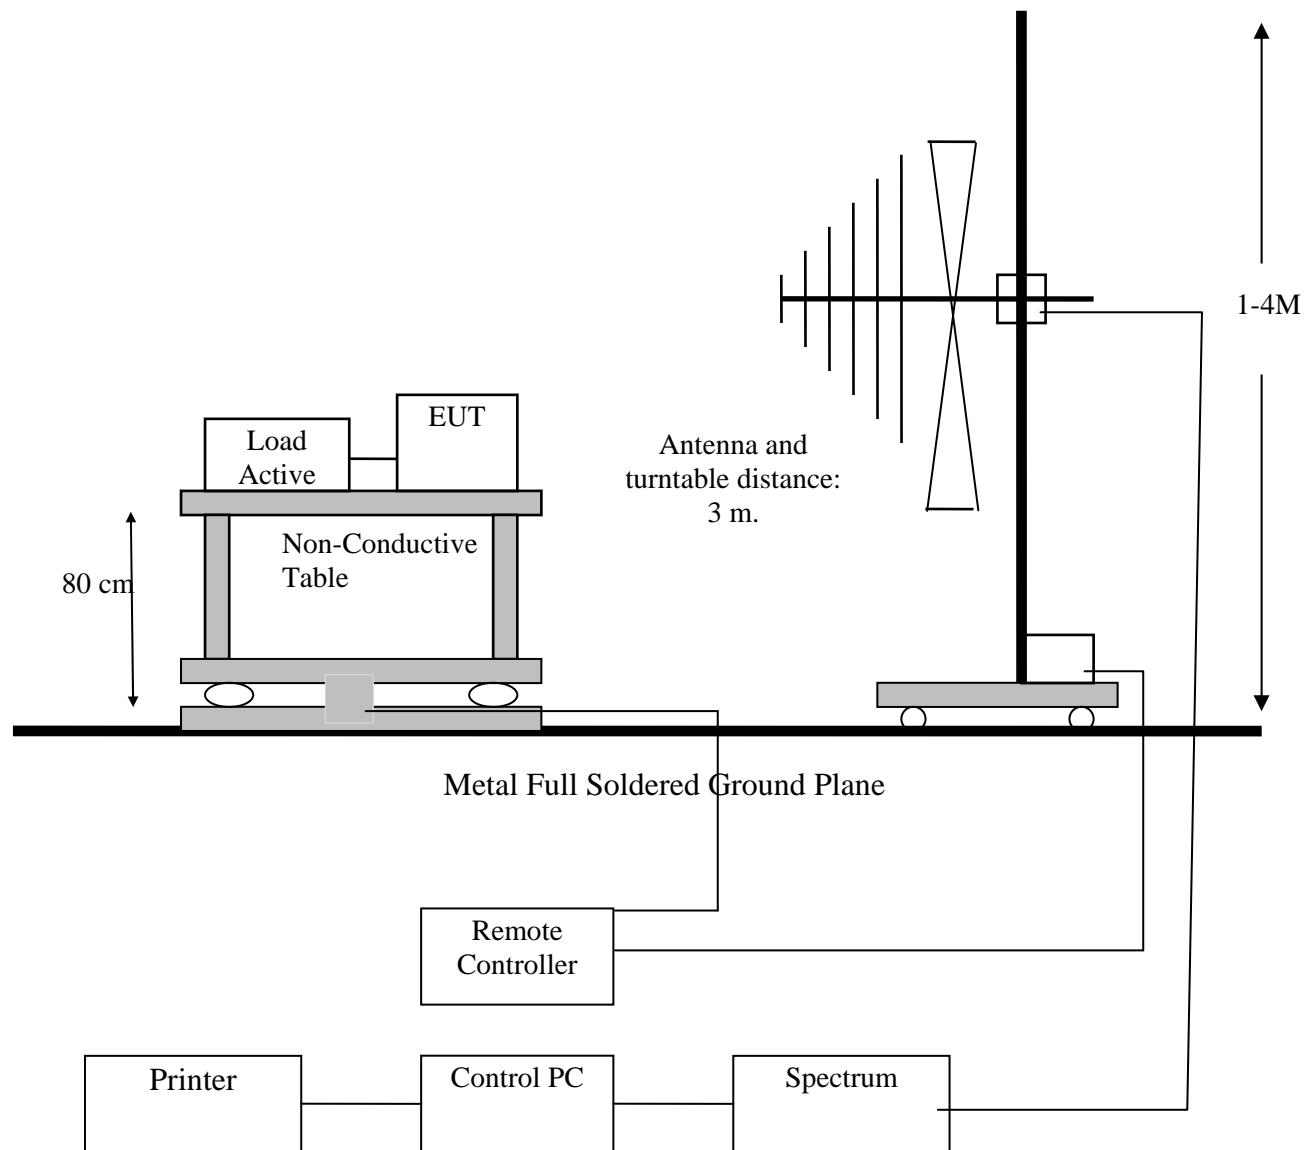

## 7.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

## 7.3 RESULT: PASS



#### 7.4 TEST DATA:

Lowest Channel- Horizontal




Global Certification Corp.  
No.146, Sec. 2, Xiangzhang Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
TEL:886-2-26426992 FAX:886-2-26487450  
WebSite: <http://www.gcc.tw>

Data:5

File:C:\Users\GCC\Desktop\c3 DATA\報告\450702\_EM6

Time:09:42:16 Date:2014-5-8

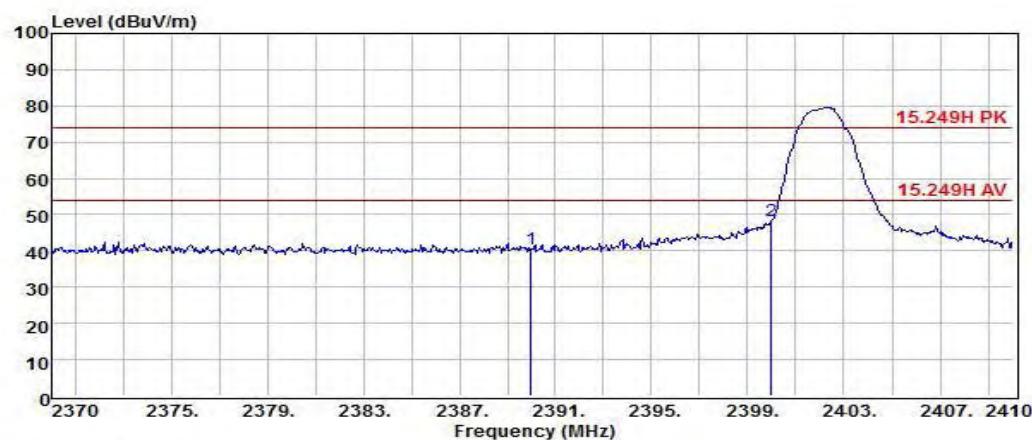

Site : GCC\_RE-02  
Condition : 15.249H PK HORIZONTAL  
: RBW:1000 KHz VBW:1000 KHz  
EUT : See Page 1 of EMC Report  
MODEL : See Page 1 for Details  
Test Mode : 3Vdc 21 °C 54%  
CH L

Freq	Meter Level	System Factor	Cable Loss	Antenna Factor	Preamp Gain	Real Level	Limit Line	Over Line	Remark
1 2390.00	59.36	-18.86	5.09	31.65	55.60	40.50	74.00	-33.50	Peak
2 2400.00	67.09	-18.84	5.10	31.66	55.60	48.25	74.00	-25.75	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
Real Level = Meter Level + System Factor  
Over Limit = Real Level - Limit Line



## Lowest Channel-Vertical




Global Certification Corp.  
No.146, Sec. 2, Xiangzhang Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
TEL:886-2-26426992 FAX:886-2-26487450  
WebSite: <http://www.gcc.tw>

Data:2

File:C:\Users\GCC\Desktop\c3 DATA\報告\450702.EM6

Time:09:36:50 Date:2014-5-8

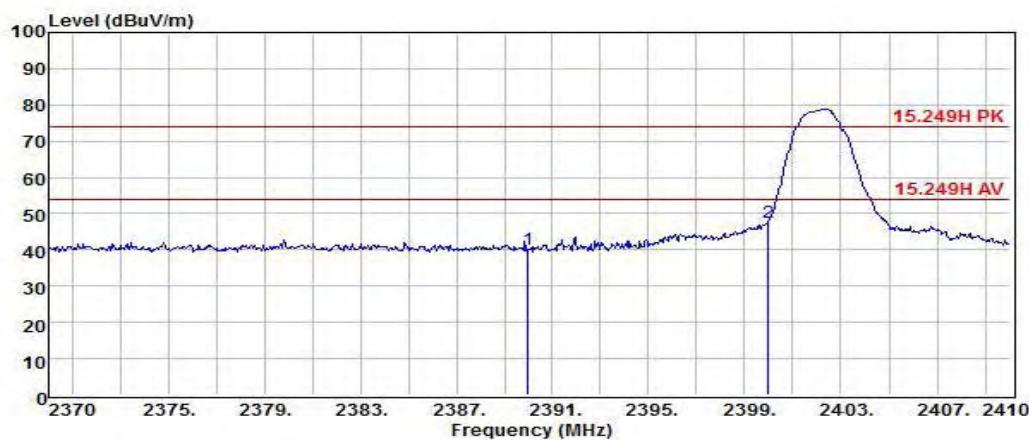

Site : GCC\_RE-02  
Condition : 15.249H PK VERTICAL  
: RBW:1000 KHz VBW:1000 KHz  
EUT : See Page 1 of EMC Report  
MODEL : See Page 1 for Details  
Test Mode : 3Vdc 21 °C 54%  
CH L

Freq	Meter Level	System			Antenna	Preamp	Real Level	Limit Line	Over Limit	Remark
		Cable Factor	Cable Loss	Antenna Factor						
1 2390.00	59.09	-18.86	5.09	31.65	55.60	40.23	74.00	-33.77	Peak	
2 2400.00	66.58	-18.84	5.10	31.66	55.60	47.74	74.00	-26.26	Peak	

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
Real Level = Meter Level + System Factor  
Over Limit = Real Level - Limit Line



## Highest Channel- Horizontal




Global Certification Corp.  
No.146, Sec. 2, Xiangzhang Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
TEL:886-2-26426992 FAX:886-2-26487450  
WebSite: <http://www.gcc.tw>

Data:15

File:C:\Users\GCC\Desktop\e3 DATA\報告\450702.EM6

Time:11:16:23 Date:2014-5-8

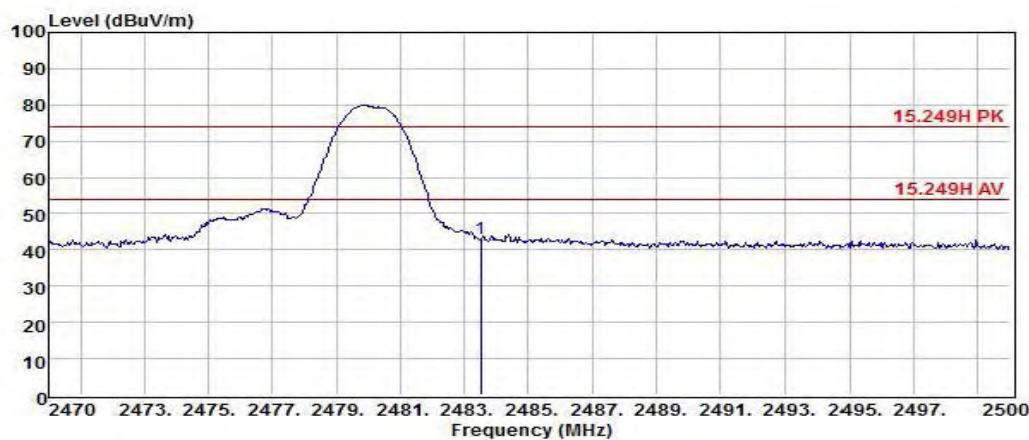

Site : GCC\_RE-02  
Condition : 15.249H PK HORIZONTAL  
: RBW:1000 KHz VBW:1000 KHz  
EUT : See Page 1 of EMC Report  
MODEL : See Page 1 for Details  
Test Mode : 3Vdc 21 °C 54%  
CH H

Meter Freq	System	Cable	Antenna	Preamp	Real	Limit	Over	Remark
MHz	dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB
1 2483.50	61.58	-18.59	5.19	31.78	55.56	42.99	74.00	-31.01 Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
Real Level = Meter Level + System Factor  
Over Limit = Real Level - Limit Line



## Highest Channel- Vertical




Global Certification Corp.  
No.146, Sec. 2, Xiangzhang Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
TEL:886-2-26426992 FAX:886-2-26487450  
WebSite: <http://www.gcc.tw>

Data:12

File:C:\Users\GCC\Desktop\e3 DATA\報告\450702.EM6

Time:11:02:06 Date:2014-5-8

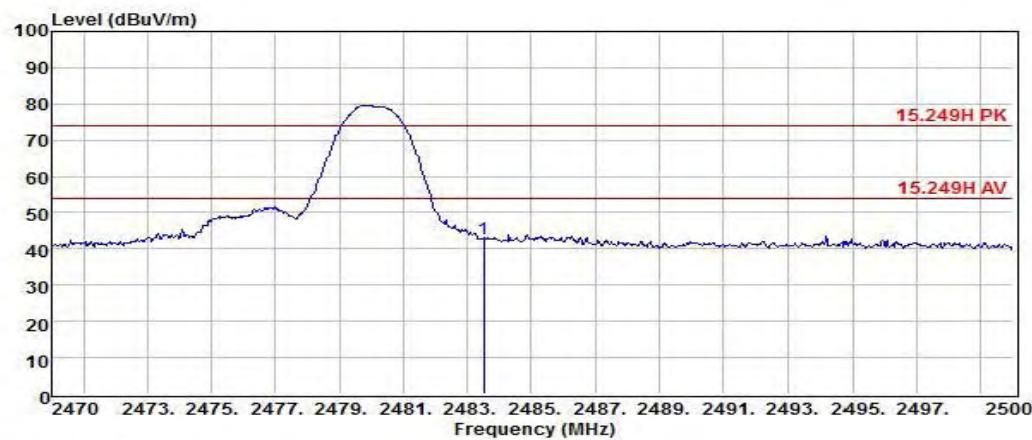

Site : GCC\_RE-02  
Condition : 15.249H PK VERTICAL  
: RBW:1000 KHz VBW:1000 KHz  
EUT : See Page 1 of EMC Report  
MODEL : See Page 1 for Details  
Test Mode : 3Vdc 21 °C 54%  
CH H

Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Over	Remark
	Level	Factor	Loss	Factor	Gain	Level	Line	Limit	
2483.50	61.45	-18.59	5.19	31.78	55.56	42.86	74.00	-31.14	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
Real Level = Meter Level + System Factor  
Over Limit = Real Level - Limit Line



Note:


1. Emission level = Reading level + Correction factor
2. Correction factor = Antenna factor + Cable loss – Preamp factor.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.

## 8. 6DB BANDWIDTH

## 8.1 TEST LIMIT

According to §15.247(a)(2) & RSS-210 §A8.2(a), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

## 8.2 TEST SETUP LAYOUT

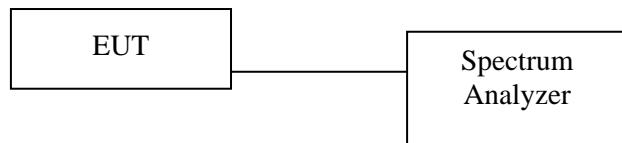




### 8.3 TEST RESULT AND DATA

Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)	Result
low	2402	680KHz	>500	PASS
middle	2441	676KHz		PASS
high	2480	673KHz		PASS

## 8.4 TEST DATA:


## LOW FREQUENCY

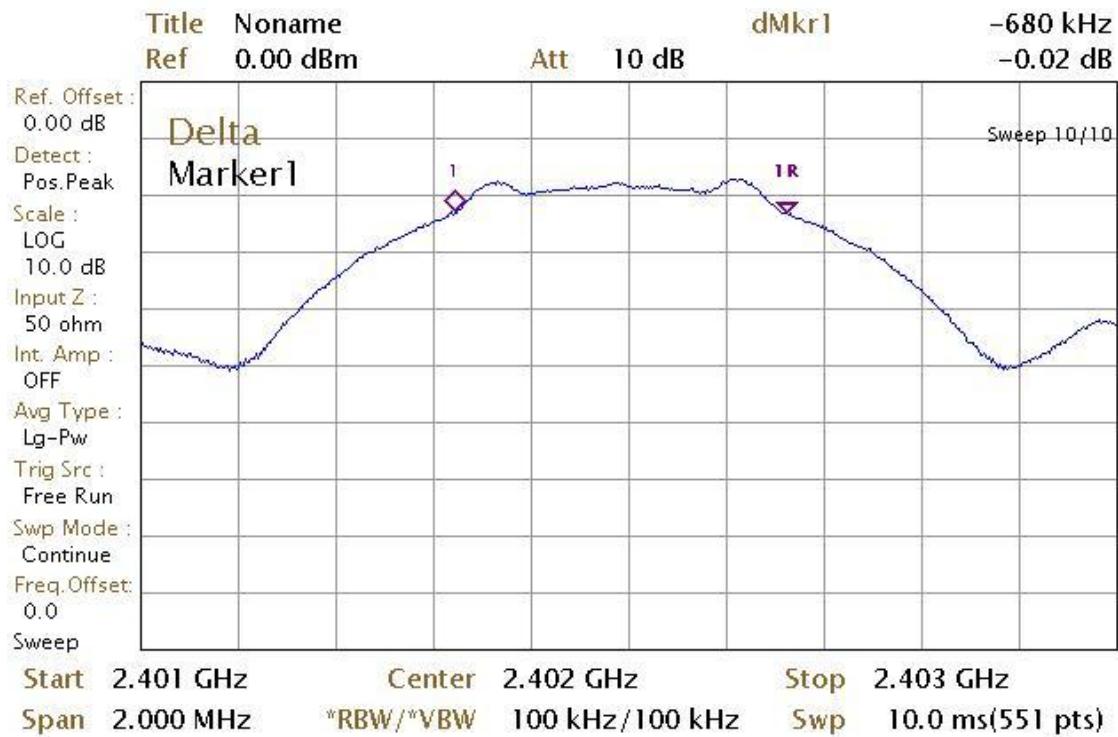

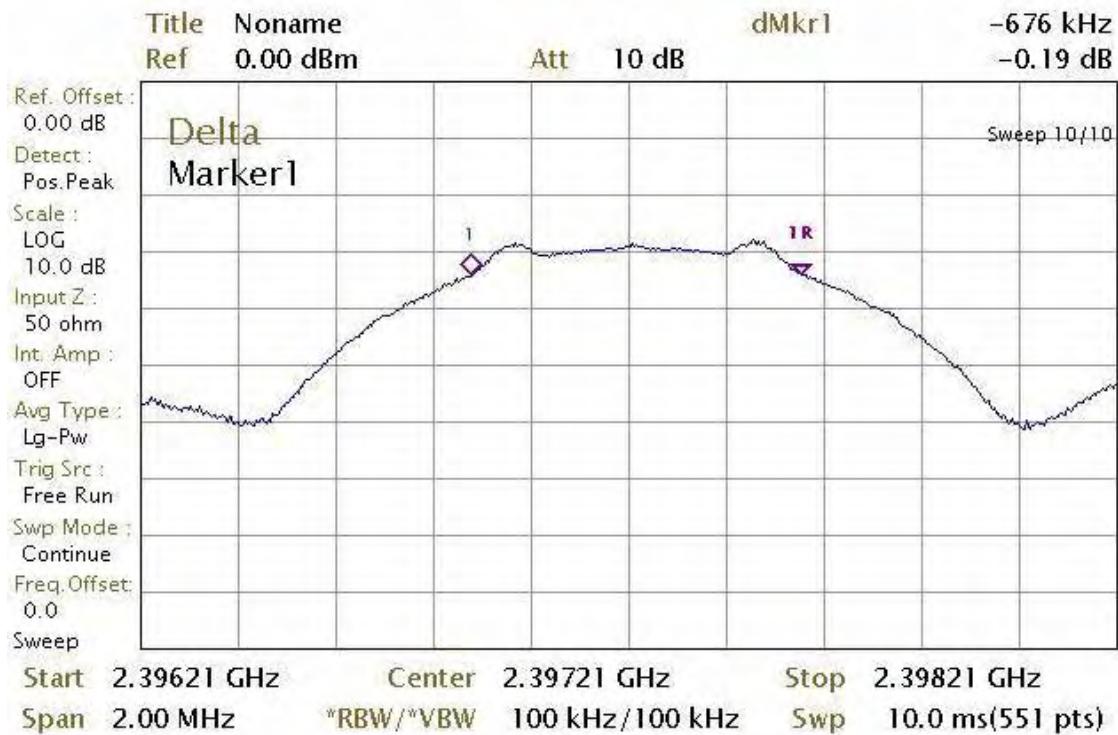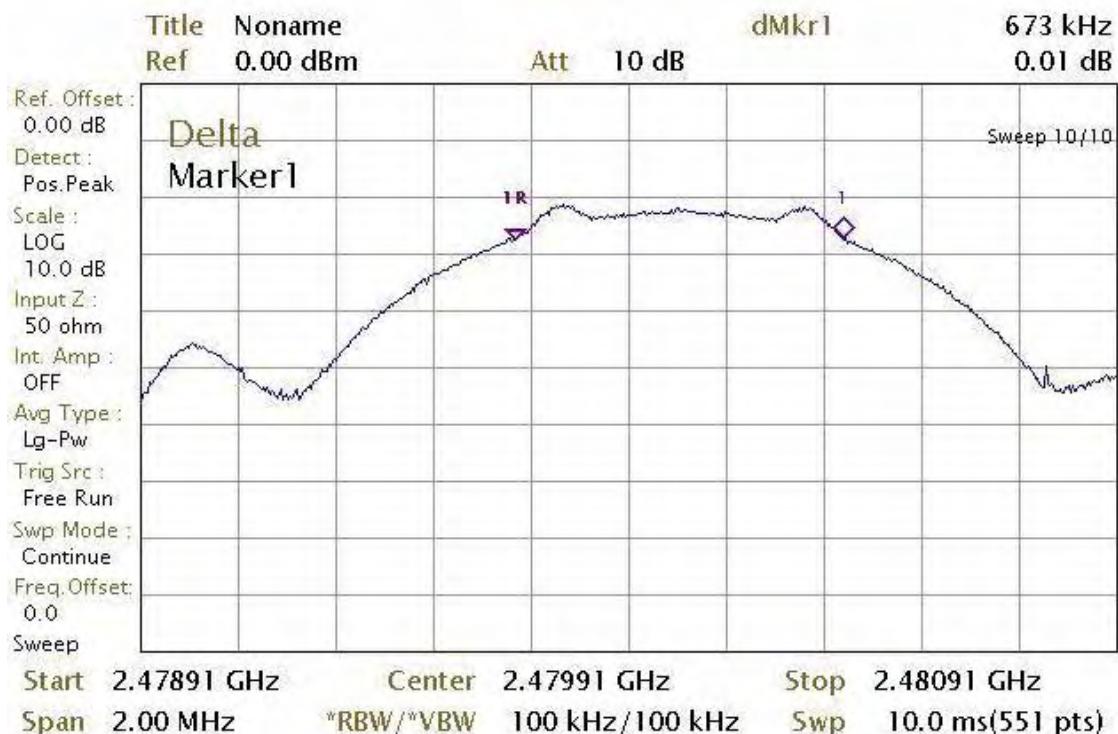**MIDDLE FREQUENCY**

**HIGH FREQUENCY**


## 9. RADIATED EMISSION
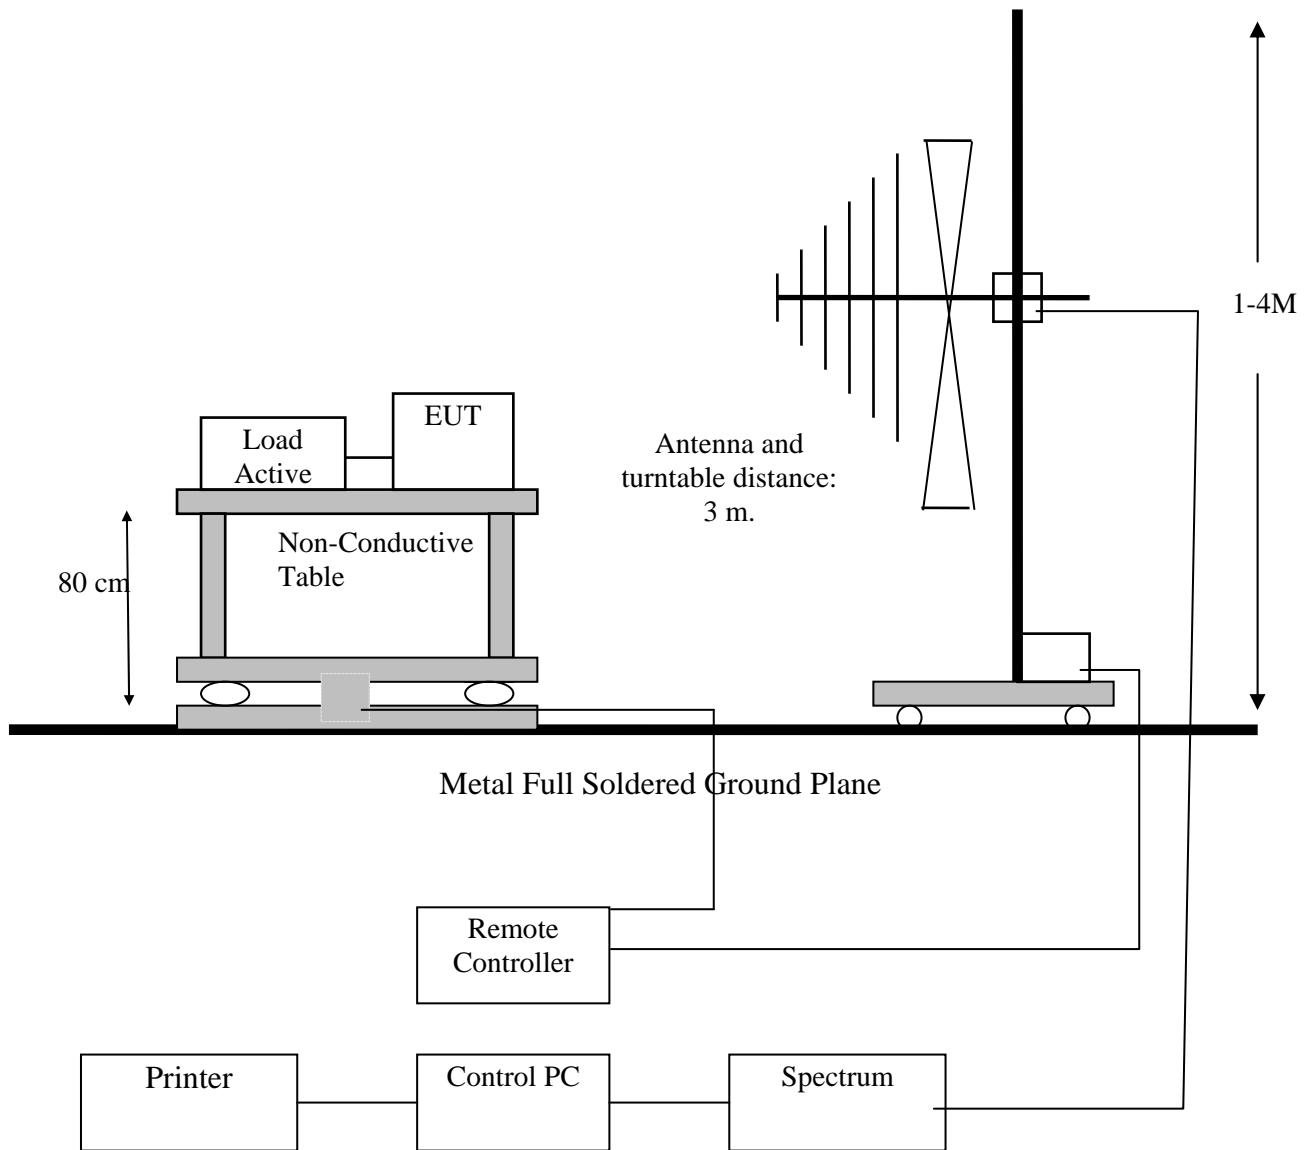
### 9.1 TEST SETUP



## 9.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

*In the above emission table, the tighter limit applies at the band edges.*

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

## 9.3 TEST PROCEDURE

- 1、 The EUT was placed on a turntable, which was 0.8m above ground plane.
- 2、 The turntable was rotated for 360 degrees to determine the position of maximum emission level.
- 3、 EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
- 4、 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5、 And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
- 6、 Repeated above procedures until the measurements for all frequencies are completed.

## 9.4 RESULT: PASS



## 9.5 TEST DATA:

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.

Lowest Channel (worst emissions found)

### Horizontal

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
40.67	28.48	-14.54	13.94	40.00	Peak
64.52	18.96	-20.13	-1.17	40.00	Peak
150.28	19.06	-14.59	4.47	43.00	Peak
199.75	17.17	-14.60	2.57	43.00	Peak
398.60	19.09	-10.23	8.86	46.00	Peak
547.01	21.88	-6.53	15.35	46.00	Peak
4810.00	39.50	-14.84	24.66	74.00	Peak
7180.00	39.98	-11.24	28.74	74.00	Peak
9655.00	45.86	-9.60	36.26	74.00	Peak

### Vertical

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
34.85	26.11	-10.17	15.94	40.00	Peak
70.74	17.67	-19.97	-2.3	40.00	Peak
199.75	16.31	-14.60	1.71	43.00	Peak
353.01	17.73	-11.54	6.19	43.00	Peak
480.08	20.10	-8.03	12.07	46.00	Peak
613.94	22.21	-4.87	17.34	46.00	Peak
4802.50	43.19	-14.84	28.35	74.00	Peak
7247.50	38.97	-11.21	27.76	74.00	Peak
9670.00	46.57	-9.60	36.97	74.00	Peak



**Middle Channel**

**Horizontal**

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
30.97	19.26	-7.17	12.09	40.00	Peak
165.80	19.07	-15.13	3.94	43.00	Peak
239.52	17.49	-15.13	2.36	46.00	Peak
398.60	19.28	-10.23	9.05	46.00	Peak
538.28	22.34	-6.72	15.62	46.00	Peak
670.20	23.79	-3.66	20.13	46.00	Peak
4885.00	42.15	-14.74	27.41	74.00	Peak
7412.50	41.77	-11.13	30.64	74.00	Peak
9587.50	46.36	-9.73	36.63	74.00	Peak

**Vertical**

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
42.61	27.70	-15.87	11.83	40.00	Peak
70.74	18.55	-19.97	-1.42	40.00	Peak
165.80	22.71	-15.13	7.58	43.00	Peak
239.52	17.05	-15.13	1.92	46.00	Peak
480.08	20.86	-8.03	12.83	46.00	Peak
539.39	22.62	-5.23	17.39	46.00	Peak
4885.00	44.26	-14.74	29.52	74.00	Peak
7937.50	43.33	-10.90	32.43	74.00	Peak
9632.50	47.27	-9.70	37.57	74.00	Peak



Highest Channel

**Horizontal**

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
30.00	19.96	-6.41	13.55	40.00	Peak
123.12	23.80	-13.26	10.54	43.00	Peak
239.52	16.90	-15.13	1.77	46.00	Peak
398.60	19.99	-10.23	9.76	46.00	Peak
557.68	21.51	-6.28	15.23	46.00	Peak
735.19	25.59	-2.46	23.13	46.00	Peak
4967.50	44.33	-14.65	29.68	74.00	Peak
8252.50	43.12	-10.80	32.32	74.00	Peak
9737.50	47.04	-9.64	37.4	74.00	Peak

**Vertical**

Frequency (MHz)	Reading (dBuV)	Correction factor(dB)	Spurious Emissions (dBuV/m)	Limit (dBuV/m)	Remark
40.67	26.13	-14.54	11.59	40.00	Peak
128.94	20.66	-13.36	7.3	43.00	Peak
165.80	22.54	-15.13	7.41	43.00	Peak
398.60	19.51	-10.23	9.28	46.00	Peak
596.48	23.66	-5.30	18.36	46.00	Peak
754.59	25.16	-2.06	23.1	46.00	Peak
4967.50	44.59	-14.65	29.94	74.00	Peak
8020.00	44.89	-10.86	34.03	74.00	Peak
9902.50	47.51	-9.54	37.97	74.00	Peak




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor + Cable loss – Preamp factor.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.

## 10. CONDUCTED EMISSIONS

### 10.1 TEST SETUP

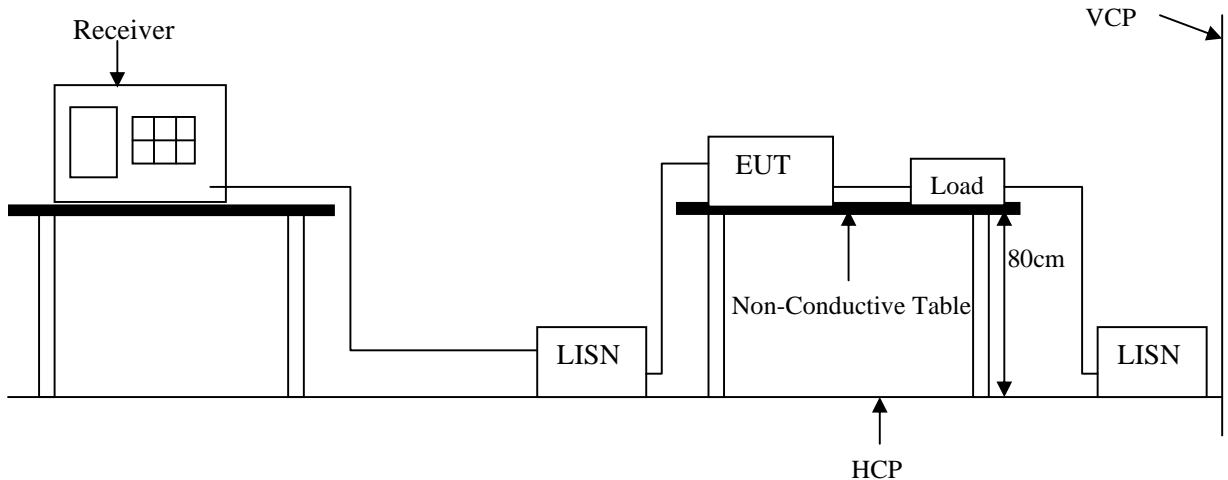

### 10.2 LIMIT

Frequency range (MHz)	CLASS A		CLASS B	
	QP dB(uV)	Average dB(uV)	QP dB(uV)	Average dB(uV)
0.15-0.5	79 dBuV	66 dBuV	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	73 dBuV	60 dBuV	56 dBuV	46 dBuV
5.0-30.0	73 dBuV	60 dBuV	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

### 10.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50  $\mu$ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.



**10.4 TEST SPECIFICATION**

According to PART 15.207

**10.5 RESULT:**

Not applicable, because the EUT doesn't connect with the AC power source directly.

**10.6 TEST DATA: N/A**




## 11. PEAK POWER SPECTRAL DENSITY

### 11.1 LIMIT

1. According to §15.247(e) & RSS-210 §A8.2, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-210 §A8.3, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### **Test Configuration**

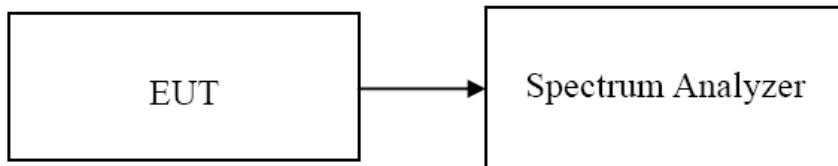

### 11.2 TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 100 kHz, VBW 300 kHz, span 5-30% greater than EBW, Detector = peak, Trace mode = max hold, Sweep = auto couple. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ . Record the maximum reading. Repeat the above procedure until the measurements for all frequencies are completed.


### 11.3 TEST RESULTS

#### TEST DATA


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
low	2402	29.90	8	PASS
middle	2440	33.83		PASS
high	2480	34.12		PASS



### LOW CHANNEL

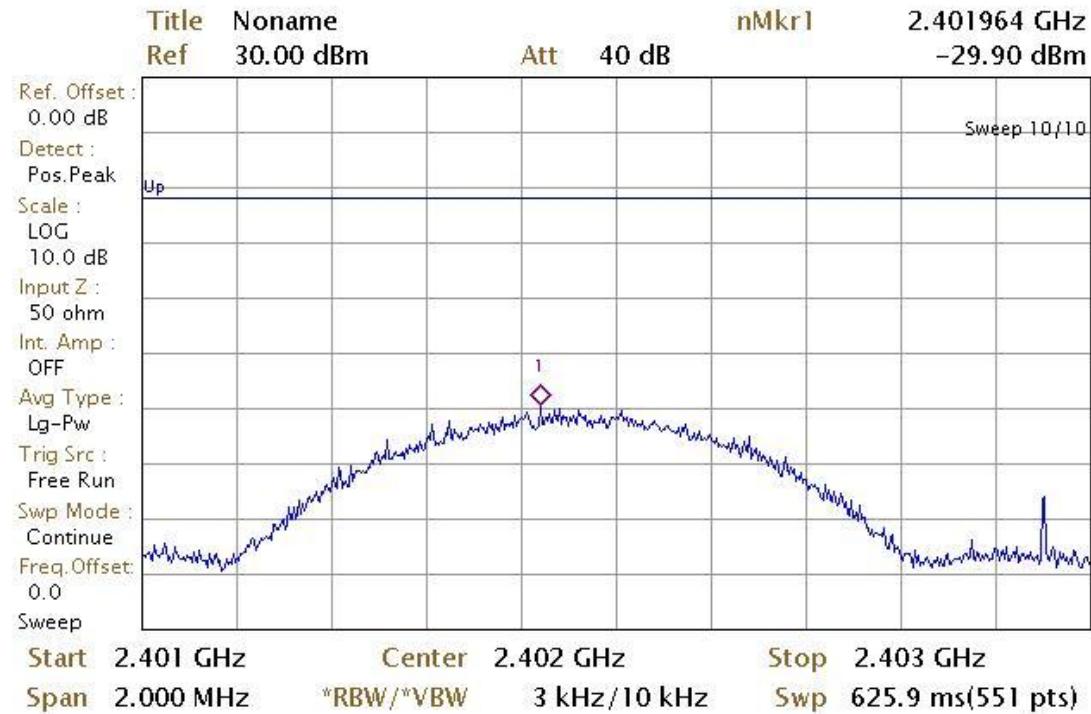

### MIDDLE CHANNEL

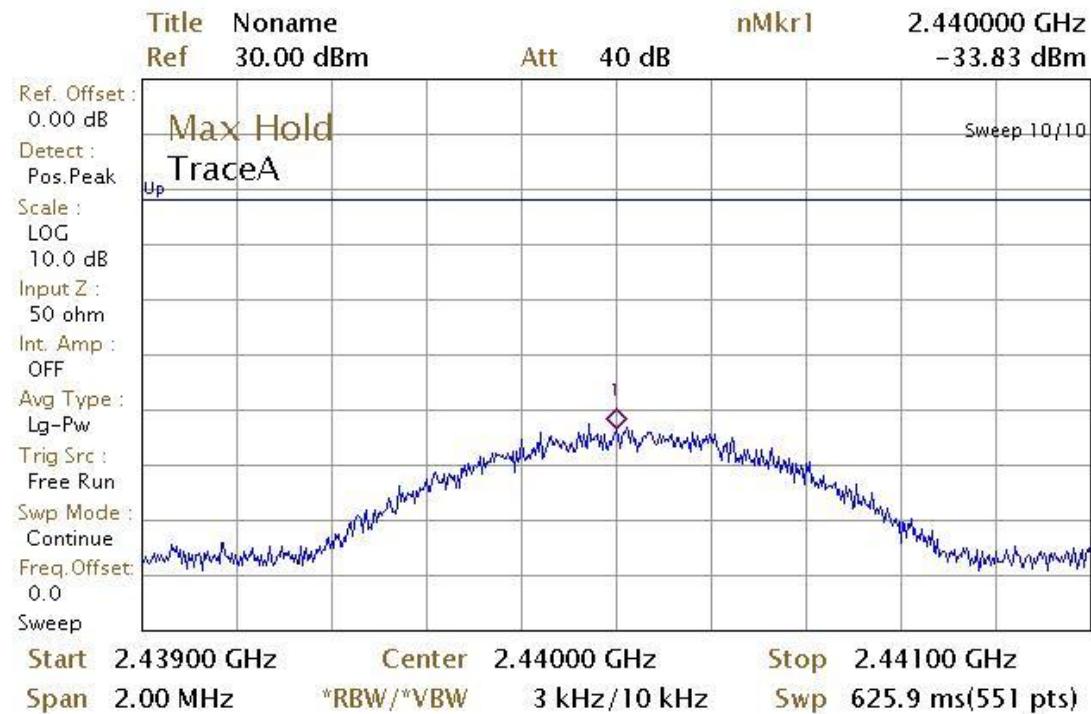



**HIGH CHANNEL**

