

FCC &ISED Radio Test Report**FCC ID: 2ACK6-CD68T2****IC: 29050-8A1C6D****The report concerns: Original Grant**

Report Reference No.....: 22EFSS07109 06701
Date Sample(s) Received.....: 2022-06-27
Date of Tested.....: 2022-06-27 to 2022-08-10
Date of issue.....: 2022-08-10
Testing Laboratory: DongGuanShuoXin Electronic Technology Co., Ltd.
Zone A, 1F, No. 6, XinGang Road YuanGang Street,
Address: XinAn District, ChangAn Town, DongGuan City,
GuangDong, China

Applicant's name: CABASSE SAS
Address: 210 rue René Descartes, 29280 Plouzane, France
Manufacturer.....: CABASSE SAS

Equipment.....: MOZART3 v2 module
Trade Mark: CABASSE
Model: MOZART3 v2 module
Ratings: I/P: DC 5V

Test Engineer:




Blue Qiu

Responsible Engineer :



Smile Wang

Authorized Signatory:



King Wang

Table of Contents	Page
1 . TEST REPORT DECLARE	4
2 . SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 PARAMETERS OF TEST SOFTWARE	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 SUPPORT UNITS	10
3.6 TEST ENVIRONMENT CONDITIONS	10
3.7 DUTY CYCLE	11
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 MEASUREMENT INSTRUMENTS LIST	12
4.4 TEST SETUP	13
4.5 EUT OPERATION CONDITIONS	13
4.6 TEST RESULTS	14
5 . RADIATED EMISSIONS TEST	16
5.1 LIMIT	16
5.2 TEST PROCEDURE	17
5.3 MEASUREMENT INSTRUMENTS LIST	18
5.4 TEST SETUP	18
5.5 EUT OPERATION CONDITIONS	19
5.6 TEST RESULTS - 9KHZ TO 30MHZ	20
5.7 TEST RESULTS - 30MHZ TO 1000MHZ	21
5.8 TEST RESULTS- ABOVE 1000MHZ(BAND EDGE)	23
5.9 TEST RESULTS- ABOVE 1000MHZ(HARMONIC)	35
6 . BANDWIDTH TEST	59
6.1 LIMIT	59
6.2 TEST PROCEDURE AND SETTING	59
6.3 MEASUREMENT INSTRUMENTS LIST	59
6.4 TEST SETUP	59

Table of Contents	Page
6.5EUT OPERATION CONDITIONS	59
6.6TESTRESULTS	60
7 .MAXIMUM OUTPUT POWER TEST	64
7.1LIMIT	64
7.2TEST PROCEDURE AND SETTING	64
7.3MEASUREMENT INSTRUMENTS LIST	64
7.4TEST SETUP	64
7.5EUT OPERATION CONDITIONS	64
7.6TESTRESULTS	65
8 .CONDUCTED SPURIOUS EMISSIONS	68
8.1 LIMIT	68
8.2TEST PROCEDURE AND SETTING	68
8.3MEASUREMENT INSTRUMENTS LIST	68
8.4TEST SETUP	68
8.5EUT OPERATION CONDITIONS	68
8.6TESTRESULTS	69
9 .POWER SPECTRAL DENSITY TEST	73
9.1LIMIT	73
9.2TEST PROCEDURE AND SETTING	73
9.3MEASUREMENT INSTRUMENTS LIST	73
9.4TEST SETUP	73
9.5EUT OPERATION CONDITIONS	73
9.6TESTRESULTS	74
10 .FREQUENCY STABILITY MEASUREMENT	77
10.1LIMIT	77
10.2TEST PROCEDURE AND SETTING	77
10.3MEASUREMENT INSTRUMENTS LIST	77
10.4TEST SETUP	77
10.5EUT OPERATION CONDITIONS	77
10.6 TEST RESULTS	78

1TEST REPORT DECLARE

Applicant	CABASSE SAS
Address	210 rue René Descartes, 29280 Plouzane, France
Manufacturer	CABASSE SAS
Address	210 rue René Descartes, 29280 Plouzane, France
Factory	CABASSE SAS
Address	210 rue René Descartes, 29280 Plouzane, France
Equipment	MOZART3 v2 module
Model No.	MOZART3 v2 module
Trade Mark	CABASSE
Standard	FCC Part15, Subpart C (15.247) RSS-247 Issue 2, Feb. 2017 RSS-Gen Issue 5, Apr. 2018 ANSI C63.10-2013

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2444 SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	ISED			
15.207	RSS-Gen8.8	AC Power Line Conducted Emissions	PASS	-----
15.247(d) 15.205(a) 15.209(a)	RSS-247 5.5 RSS-Gen8.9 RSS-Gen8.10	Radiated Emissions	PASS	-----
15.247(a)(2)	RSS-247 5.2 (a) RSS-Gen6.7	Bandwidth	PASS	-----
15.247(b)(3)	RSS-247 5.4 (d)	Maximum Output Power	PASS	-----
15.247(d)	RSS-247 5.5	ConductedSpurious Emission	PASS	-----
15.247(e)	RSS-247 5.2 (b)	Power Spectral Density	PASS	-----
-	RSS-Gen 6.11	Frequency Stability	PASS	-----
15.203	-	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient tocomply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test Facility:

The Test site used by DongGuan ShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2024-08-27
A2LA	4893.01	2022-08-30
Innovation, Science and Economic Development Canada (ISED)	11033A	2022-08-30
Federal Communications Commission (FCC)	171688 Designation No.: CN1235	2022-08-30

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	MOZART3 v2 module	
Brand Name	CABASSE	
Test Model	MOZART3 v2 module	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	V1.0	
Software Version	V1.0	
PowerSource	Supplied from USB.	
Power Rating	DC 5V	
Operation Frequency	2412 MHz~ 2462 MHz	
Modulation Technology	IEEE 802.11b:DSSS IEEE 802.11g:OFDM IEEE 802.11n:OFDM	
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps	
Operating Mode	IEEE 802.11b:1TX(Ant 1 or Ant 2) IEEE 802.11g:1TX(Ant 1 or Ant 2) IEEE 802.11n (HT20):2TX(Ant 1+Ant 2) IEEE 802.11n (HT40):2TX(Ant 1+Ant 2)	
Antenna Information	Antenna Type:PIFA	Maximum Peak Gain:0.41 dBi
Max. Output Power	IEEE 802.11b: 17.77dBm(0.0598W) IEEE 802.11g: 16.63dBm(0.0460W) IEEE 802.11n (HT20):18.67dBm(0.0736W) IEEE 802.11n (HT40):18.68dBm(0.0738W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20) CH03-CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09
Mode 5	TX N-40 MHz Mode Channel 09

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX B MHz Mode Channel 01

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 5	TX N-40 MHz Mode Channel 09

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel03/06/09

NOTE:

(1) The measurements are performed at the high, middle, low available channels.

(2) 802.11b mode: DBPSK (1Mbps)

802.11g mode: OFDM (6Mbps)

802.11n HT20 mode : BPSK (13Mbps)

802.11n HT40mode : BPSK (27Mbps)


For radiated emission tests, the highest output powers were set for final test.

(3) For radiated emission below 1GHz and AC power line conducted emissions test, the IEEE 802.11n20 channel 11 is found to be the worst case and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

Test Software	N/A		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	93/95	93/95	93/95
IEEE 802.11g	74/75	74/78	74/78
IEEE 802.11n (HT20)	74/78	79/80	79/80
Test Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	74/81	76/81	76/81

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

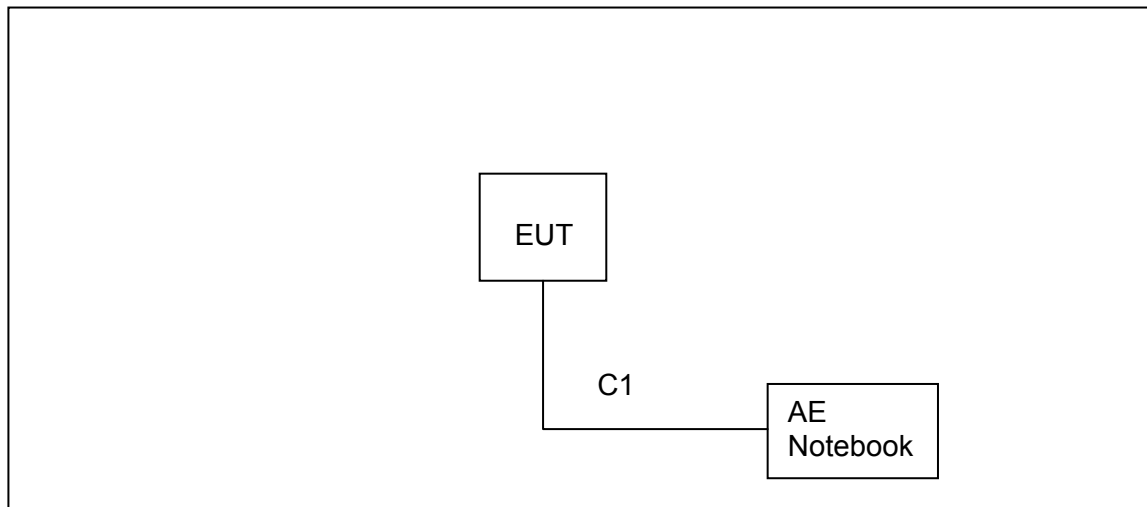

3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	Lenovo	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	0.8m

3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 5V
Radiated Emissions-9K-30MHz	25°C	60%	DC 5V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	DC 5V
Radiated Emissions-Above 1000 MHz	24°C	68%	DC 5V
Bandwidth	24.8°C	40.9%	DC 5V
Maximum Output Power	24.8°C	40.9%	DC 5V
Conducted Spurious Emission	24.8°C	40.9%	DC 5V
Power Spectral Density	24.8°C	40.9%	DC 5V

3.7 DUTY CYCLE

All tests were performed under the condition of 100% Duty Cycle

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20)

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40)

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

4AC POWER LINE CONDUCTED EMISSIONS TEST

4.1LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.2TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Date	Calibration Due Date
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/12/2021	12/11/2022
2	EMI Test Receiver	R&S	ESCI	101308	12/12/2021	12/11/2022
3	LISN	AFJ	LS16	16011103219	06/09/2022	06/08/2023
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/11/2021	12/10/2022
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A	N/A

4.4TESTSETUP

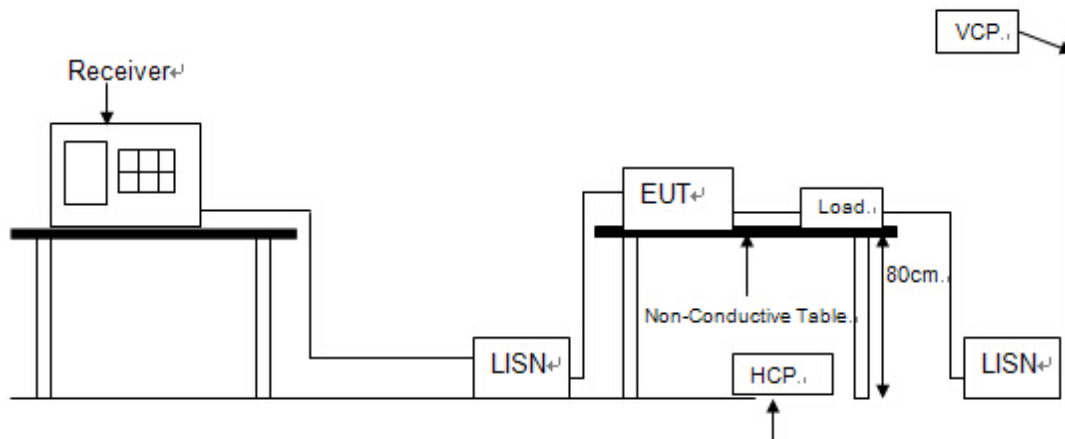


4.5EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Test Mode: TX 802.11b Mode

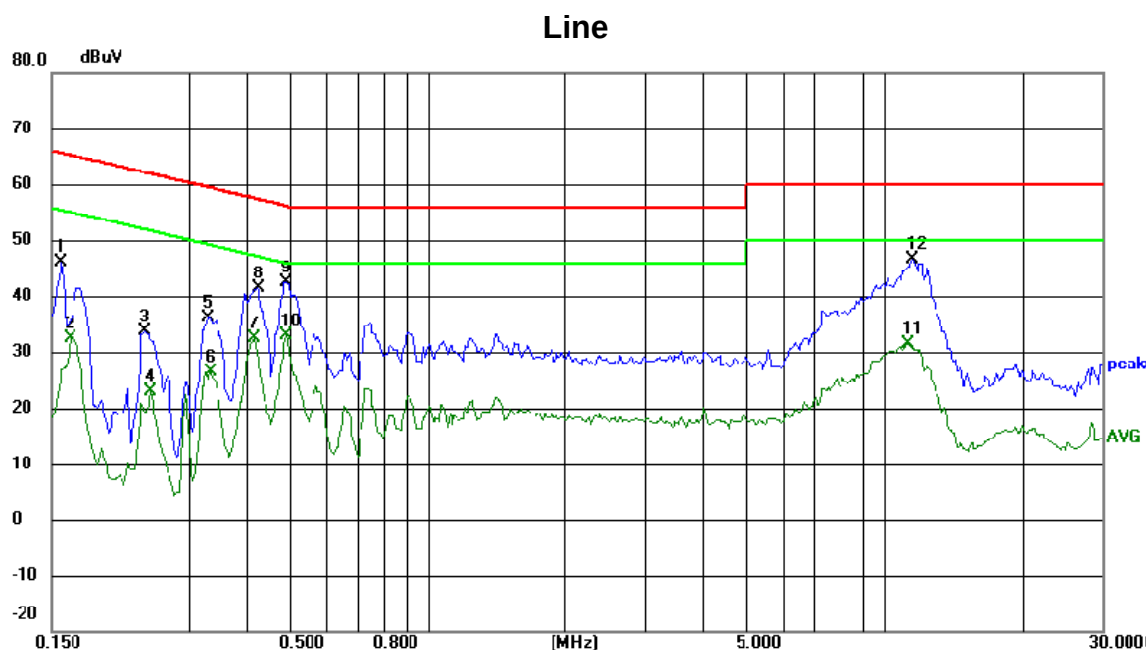

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1577	36.37	9.78	46.15	65.58	-19.43	peak	P
2	0.1655	22.65	9.77	32.42	55.18	-22.76	AVG	P
3	0.2396	23.96	9.75	33.71	62.11	-28.40	peak	P
4	0.2474	13.03	9.75	22.78	51.84	-29.06	AVG	P
5	0.3294	26.35	9.76	36.11	59.47	-23.36	peak	P
6	0.3332	16.64	9.76	26.40	49.37	-22.97	AVG	P
7	0.4152	22.51	9.76	32.27	47.54	-15.27	AVG	P
8	0.4229	31.63	9.76	41.39	57.39	-16.00	peak	P
9	0.4893	32.55	9.77	42.32	56.18	-13.86	peak	P
10 *	0.4893	23.00	9.77	32.77	46.18	-13.41	AVG	P
11	11.3147	9.82	21.53	31.35	50.00	-18.65	AVG	P
12	11.5020	24.79	21.73	46.52	60.00	-13.48	peak	P


Remarks:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40 MHz Mode

Neutral

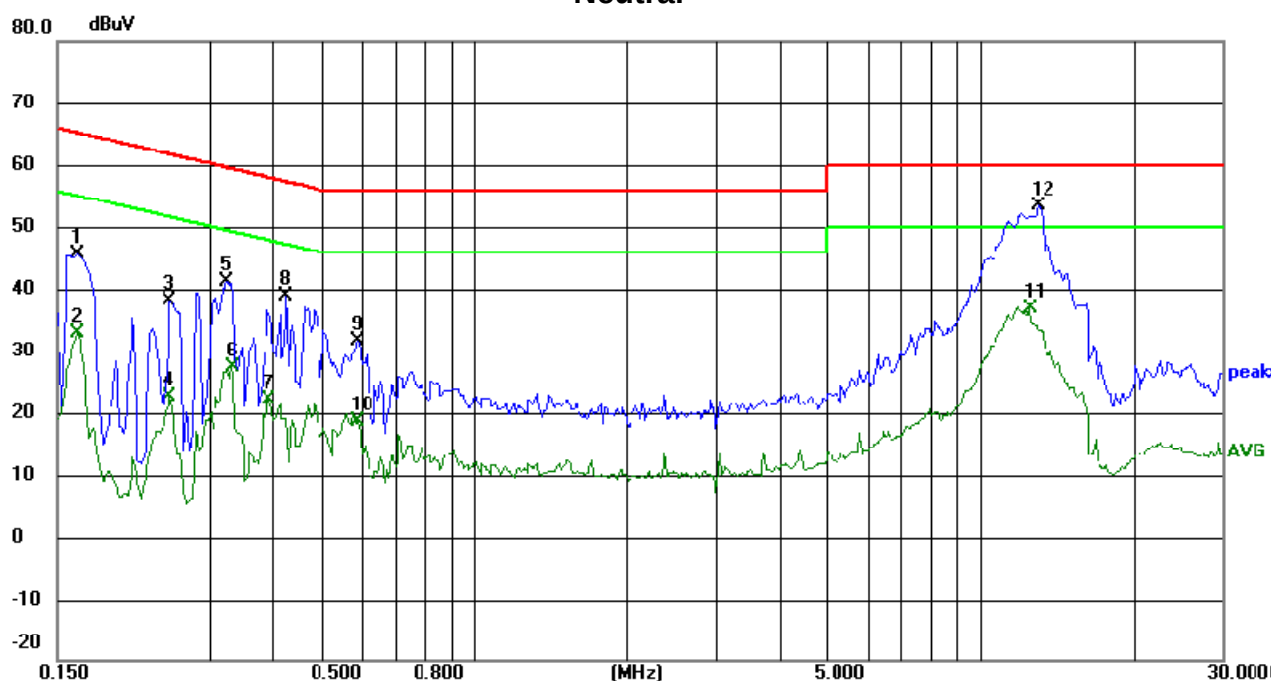

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	35.75	9.77	45.52	65.18	-19.66	peak	P
2	0.1655	23.22	9.77	32.99	55.18	-22.19	AVG	P
3	0.2514	28.43	9.75	38.18	61.71	-23.53	peak	P
4	0.2514	12.79	9.75	22.54	51.71	-29.17	AVG	P
5	0.3255	31.47	9.76	41.23	59.57	-18.34	peak	P
6	0.3332	17.67	9.76	27.43	49.37	-21.94	AVG	P
7	0.3933	12.38	9.76	22.14	47.99	-25.85	AVG	P
8	0.4269	29.21	9.76	38.97	57.31	-18.34	peak	P
9	0.5907	21.90	9.77	31.67	56.00	-24.33	peak	P
10	0.5907	8.76	9.77	18.53	46.00	-27.47	AVG	P
11	12.4574	14.04	22.73	36.77	50.00	-13.23	AVG	P
12 *	13.0386	30.05	23.33	53.38	60.00	-6.62	peak	P

Remarks:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

5 RADIATED EMISSIONSTEST

5.1LIMIT

In case the emission fall within the restricted band specified on 15.205(a) and RSS-Gen 8.10, then the 15.209(a) andRSS-Gen 8.9limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) (μ A/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength (μ V/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (μ V/m).

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
 - (1) Result = Reading + Correct Factor
 - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
 - (3) Margin = Result - Limit

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	101307	12/12/2021	12/11/2022
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2021	11/16/2022
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	12/14/2021	12/13/2022
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	08/06/2021	08/05/2022
4*	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	08/05/2022	08/04/2023
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/21/2022	04/20/2023
6	Preamplifier Amplifier	HP	8447F	3113A05680	12/11/2021	12/10/2022
7	PRE-AMPLIFIER	CY	EMC011830	980136	12/11/2021	12/10/2022
8	RF Cable	R&S	Test Cable 4	4	12/11/2021	12/10/2022
9	RF Cable	R&S	Test Cable 5	5	12/11/2021	12/10/2022
10	RF Cable	R&S	Test Cable 9	9	04/21/2022	04/20/2023
11	RF Cable	R&S	Test Cable 10	10	12/11/2021	12/10/2022
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A	N/A

5.4 TEST SETUP


9 kHz-30 MHz

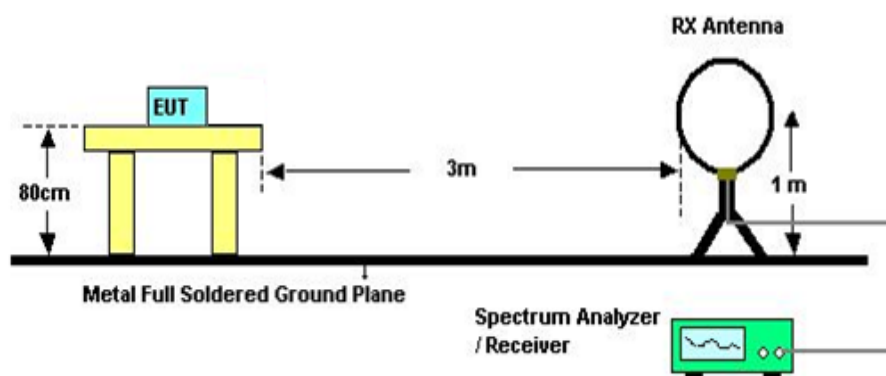

30 MHz to 1 GHz

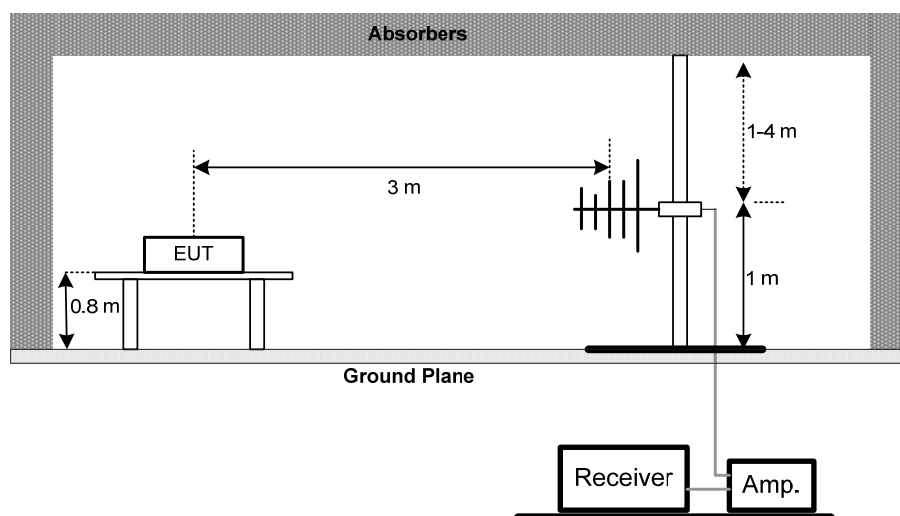

Above 1 GHz

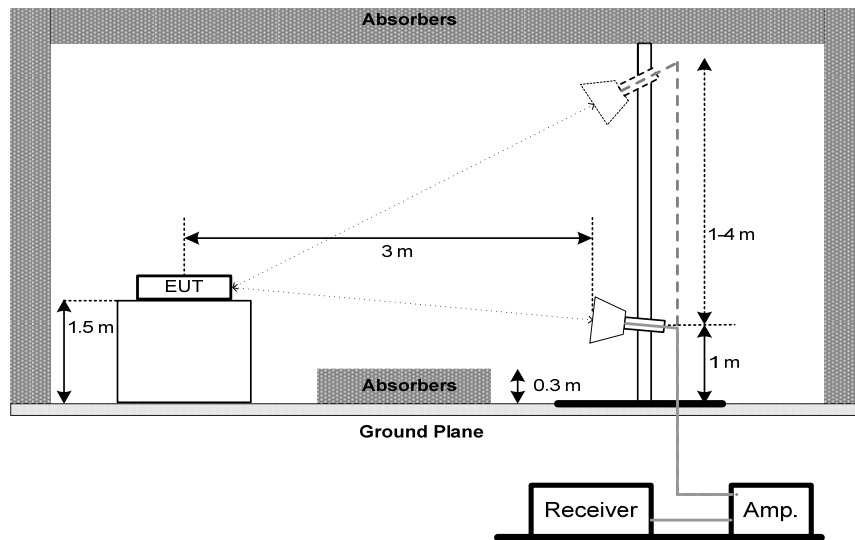

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9kHz TO 30MHz

Test Mode:	TX N-40 MHz Mode Channel 09
------------	-----------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULTS - 30MHz TO 1000MHz

Test Mode : TX 802.11b Mode Channel 01

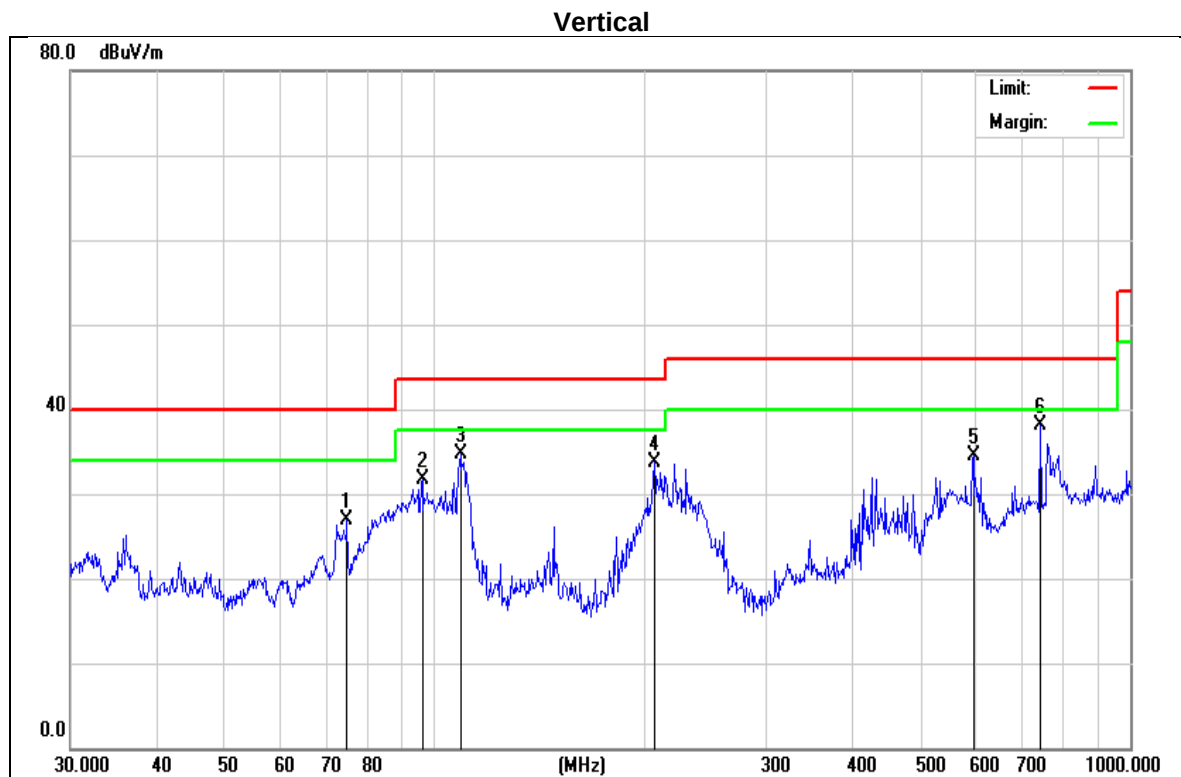


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		74.9191	37.25	-10.30	26.95	40.00	-13.05	peak
2		96.0986	41.10	-9.48	31.62	43.50	-11.88	peak
3		109.0286	42.29	-7.67	34.62	43.50	-8.88	peak
4		207.1226	38.34	-4.69	33.65	43.50	-9.85	peak
5		595.1329	31.81	2.75	34.56	46.00	-11.44	peak
6	*	742.2587	32.92	5.14	38.06	46.00	-7.94	peak

Test Mode : TX B MHz Mode Channel 01

Horizontal

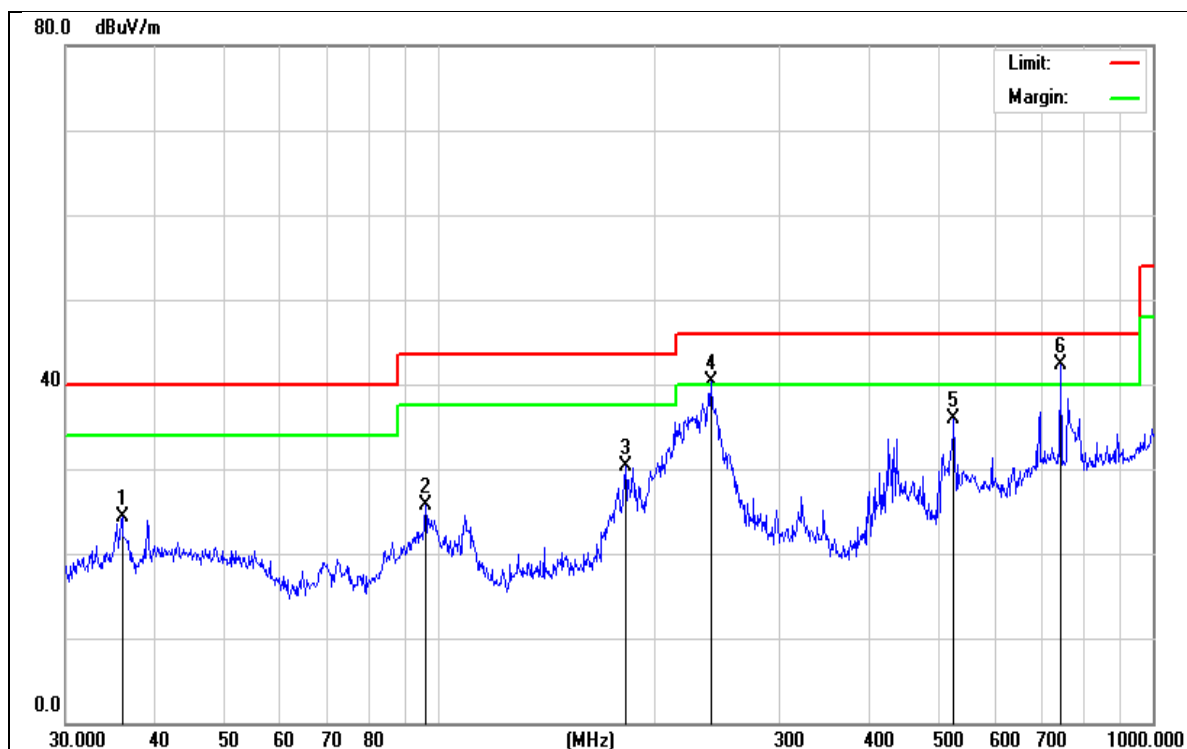

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.0007	27.71	-3.45	24.26	40.00	-15.74	peak
2		95.7622	34.04	-8.33	25.71	43.50	-17.79	peak
3		182.5592	35.56	-5.33	30.23	43.50	-13.27	peak
4	!	240.8304	46.73	-6.51	40.22	46.00	-5.78	peak
5		526.3967	32.24	3.65	35.89	46.00	-10.11	peak
6	*	742.2587	35.38	7.00	42.38	46.00	-3.62	peak

5.8 TEST RESULTS- ABOVE 1000MHz(BAND EDGE)


Orthogonal Axis	X
Test Mode:	TX B Mode

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	49.76	--	-5.79	43.97	--	74.00	54.00	CH01
2390.00	V	49.3	--	-5.79	43.51	--	74.00	54.00	CH01
2483.50	H	49.75	--	-4.98	44.77	--	74.00	54.00	CH11
2483.50	V	49.75	--	-4.98	44.77	--	74.00	54.00	CH11


Horizontal

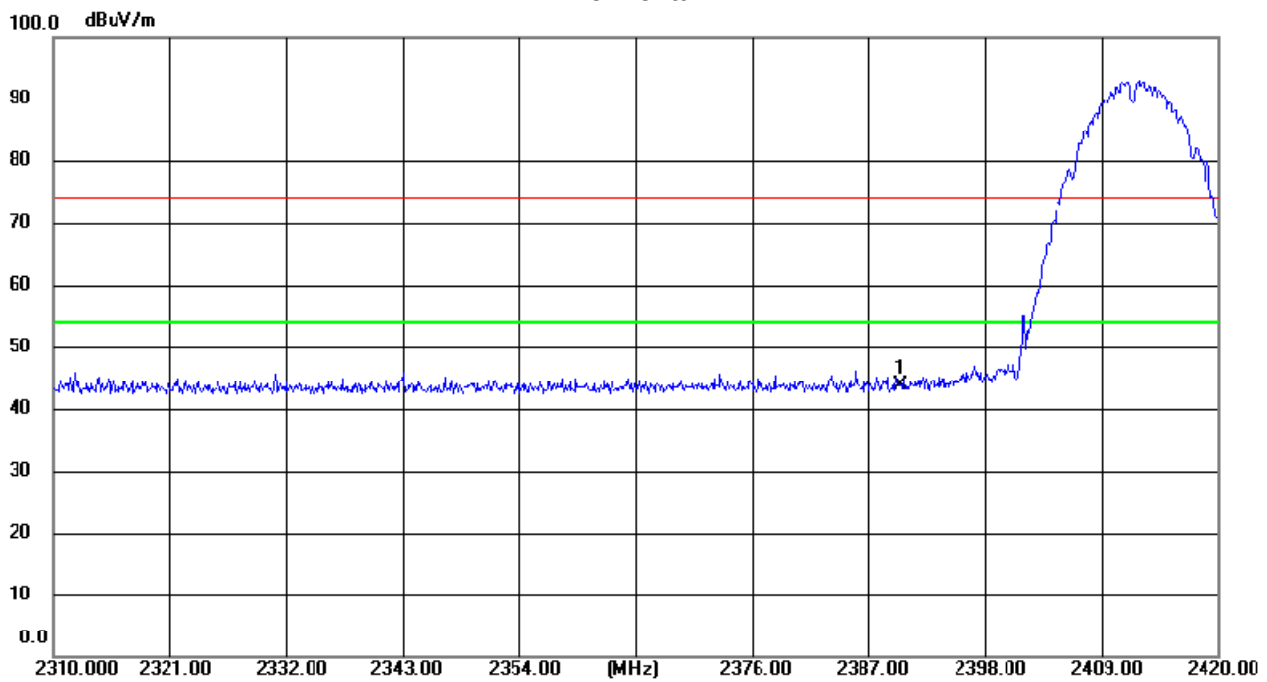


Vertical

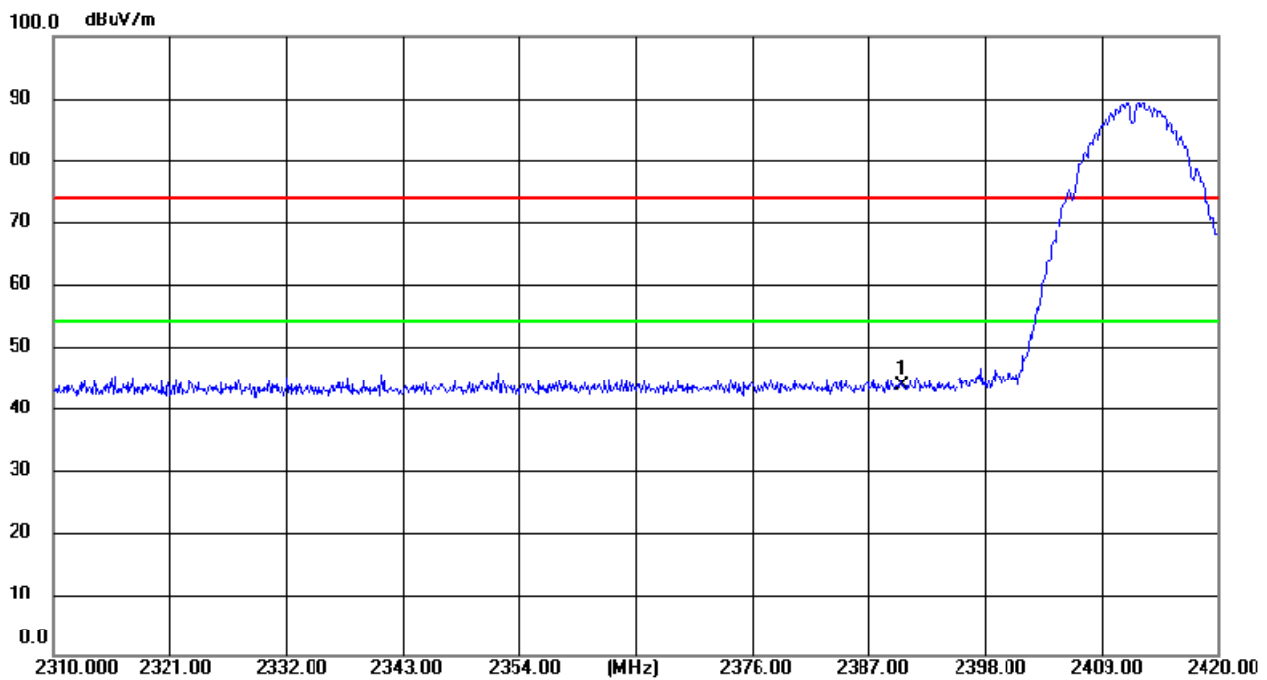

Horizontal

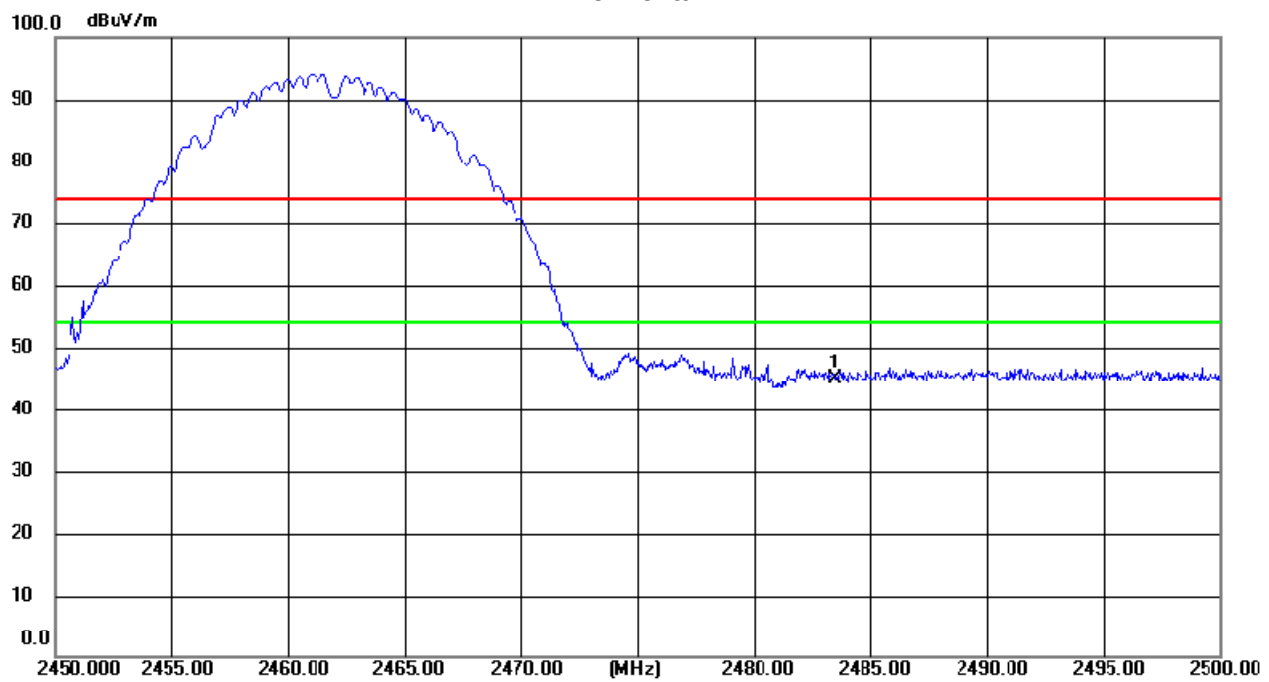


Vertical

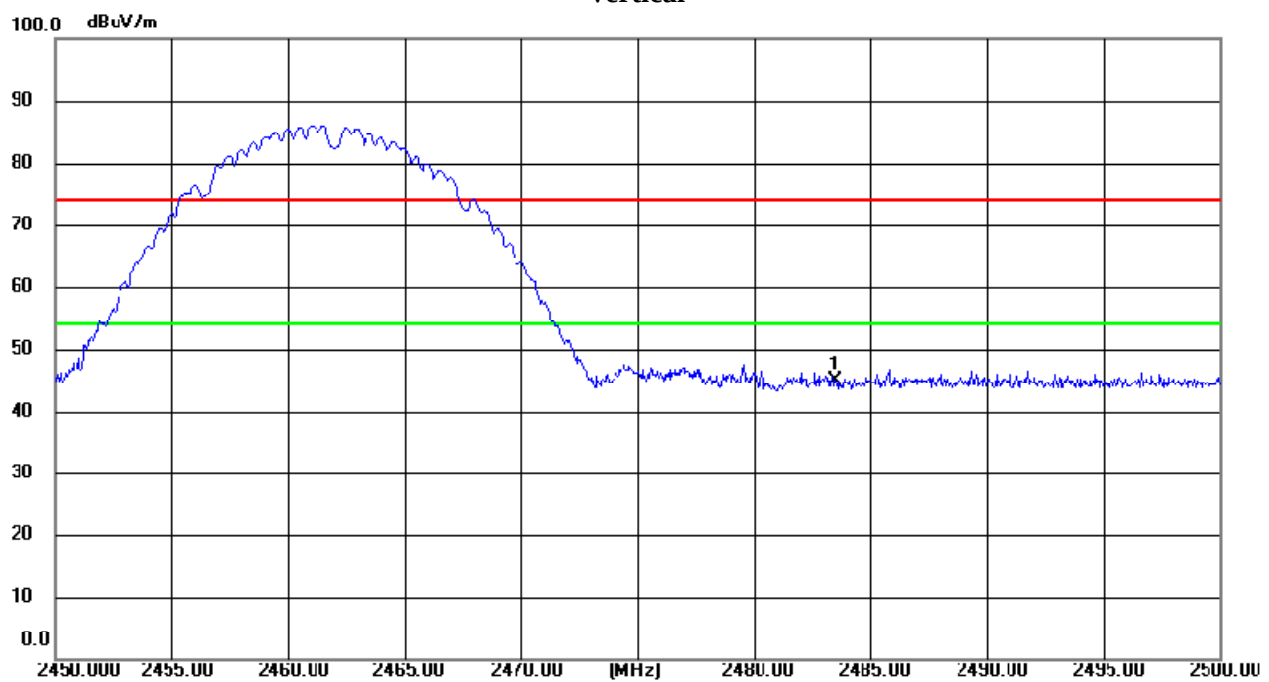


Orthogonal Axis	X
Test Mode:	TX G Mode

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	52.29	--	-5.79	46.50	--	74.00	54.00	CH01
2390.00	V	51.33	--	-5.79	45.54	--	74.00	54.00	CH01
2483.50	H	57.16	--	-4.98	52.18	--	74.00	54.00	CH11
2483.50	V	54.9	--	-4.98	49.92	--	74.00	54.00	CH11


Horizontal

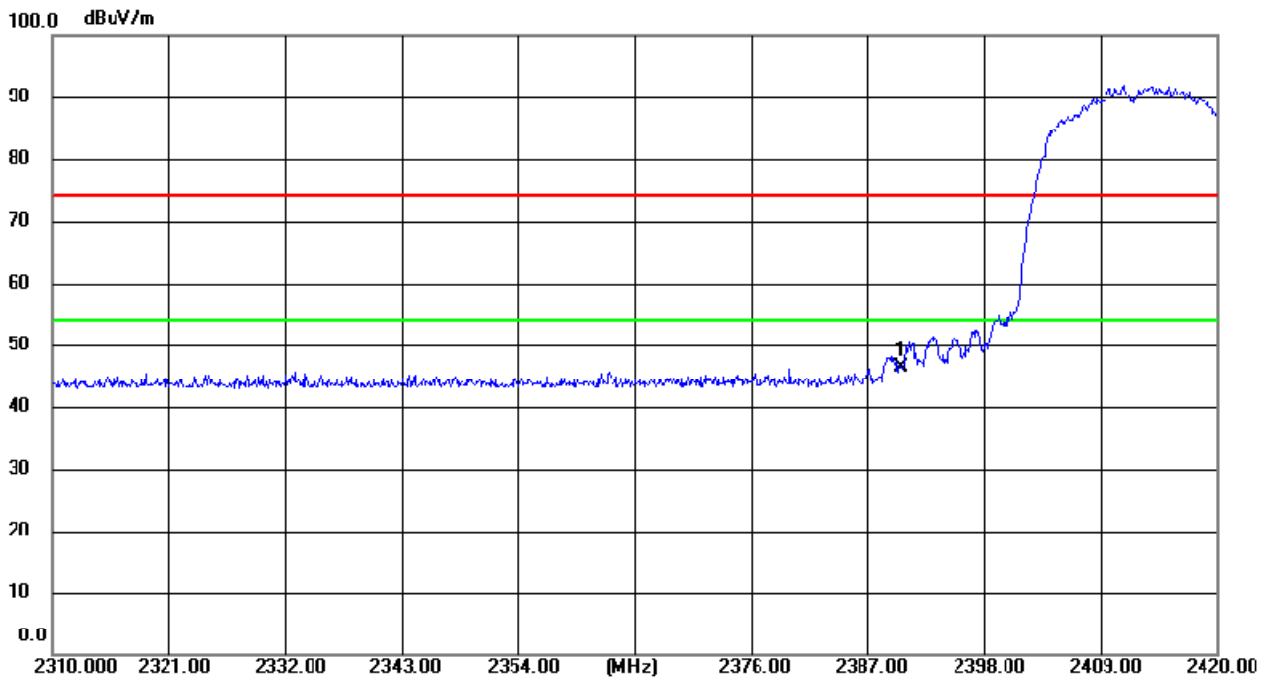


Vertical

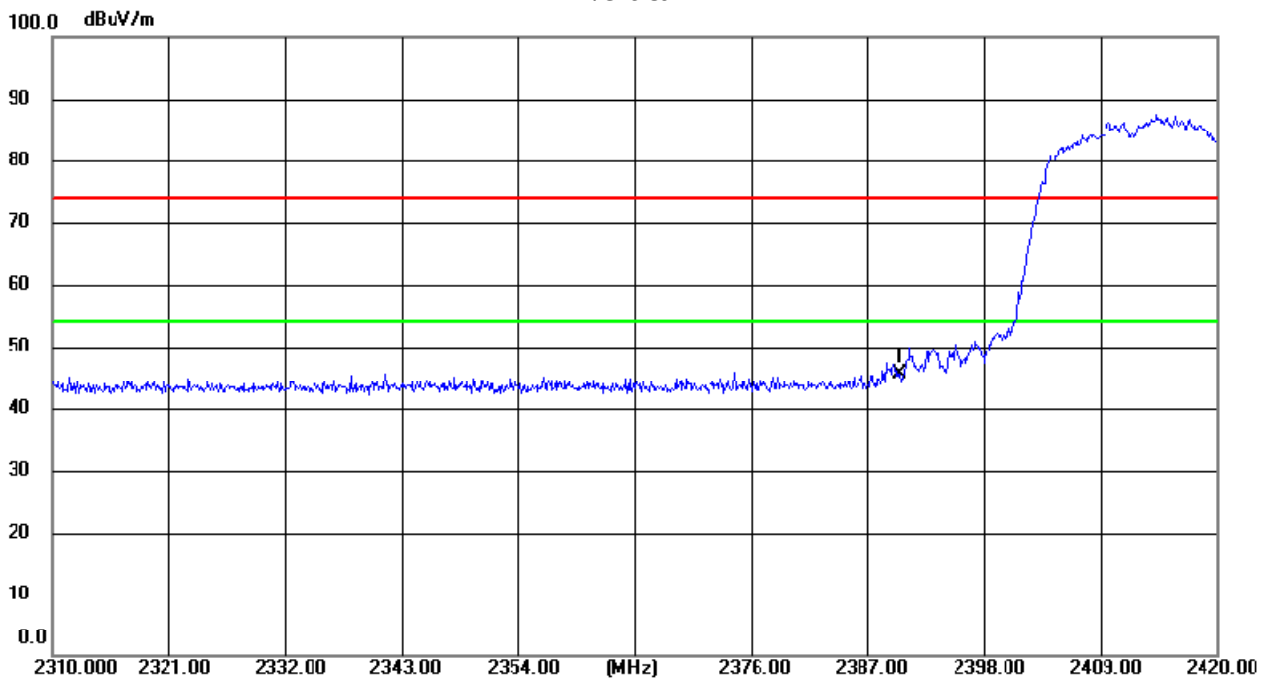

Horizontal

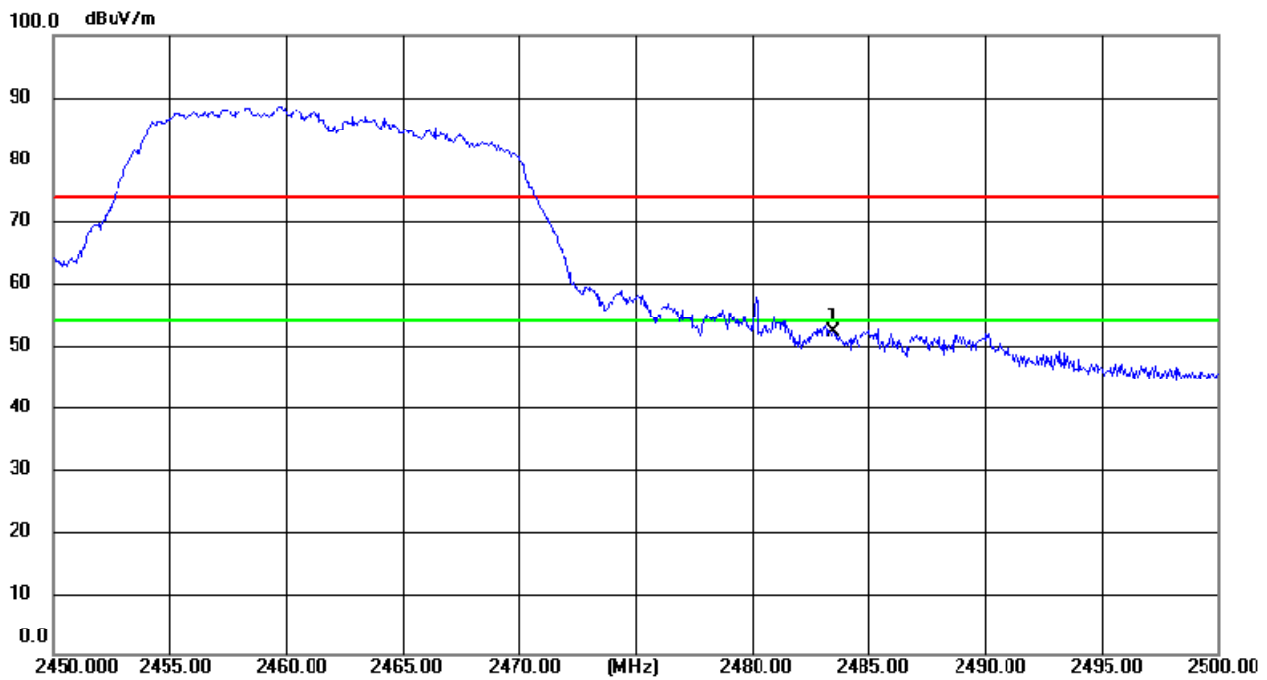


Vertical

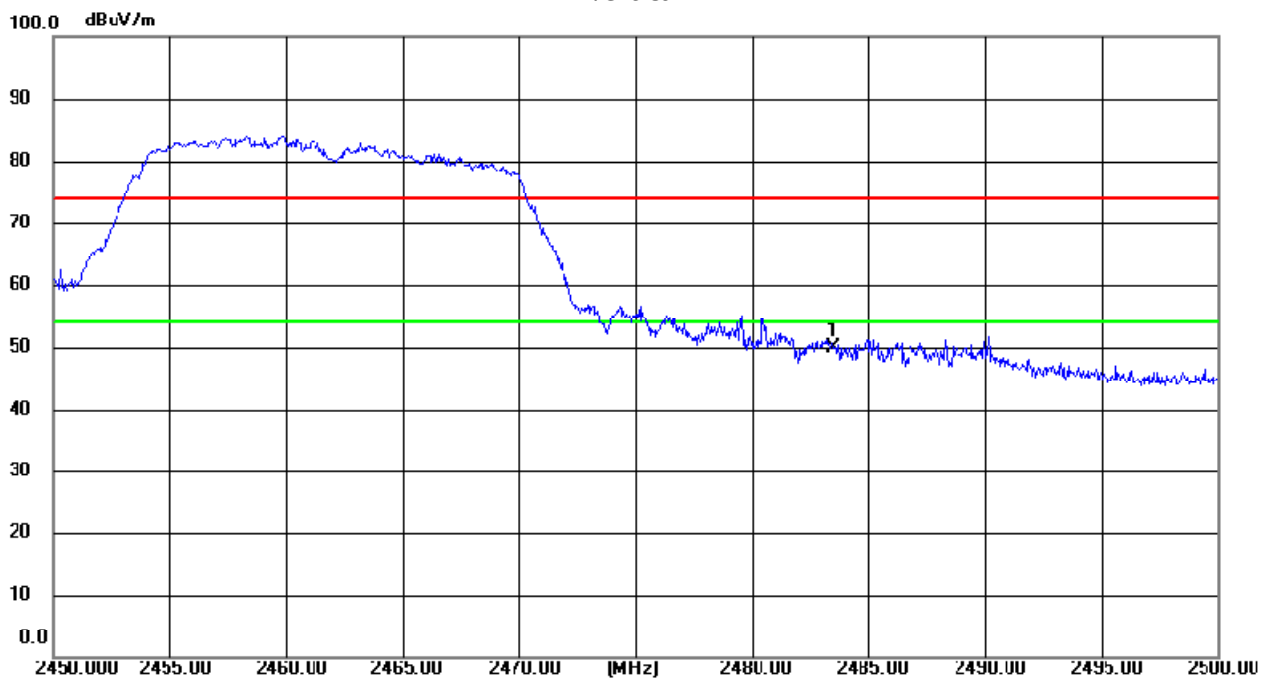


Orthogonal Axis	X
Test Mode:	TX N-20M Mode

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	54.15	--	-5.79	48.36	--	74.00	54.00	CH01
2390.00	V	54.27	--	-5.79	48.48	--	74.00	54.00	CH01
2483.50	H	49.35	--	-4.98	44.37	--	74.00	54.00	CH11
2483.50	V	48.64	--	-4.98	43.66	--	74.00	54.00	CH11


Horizontal

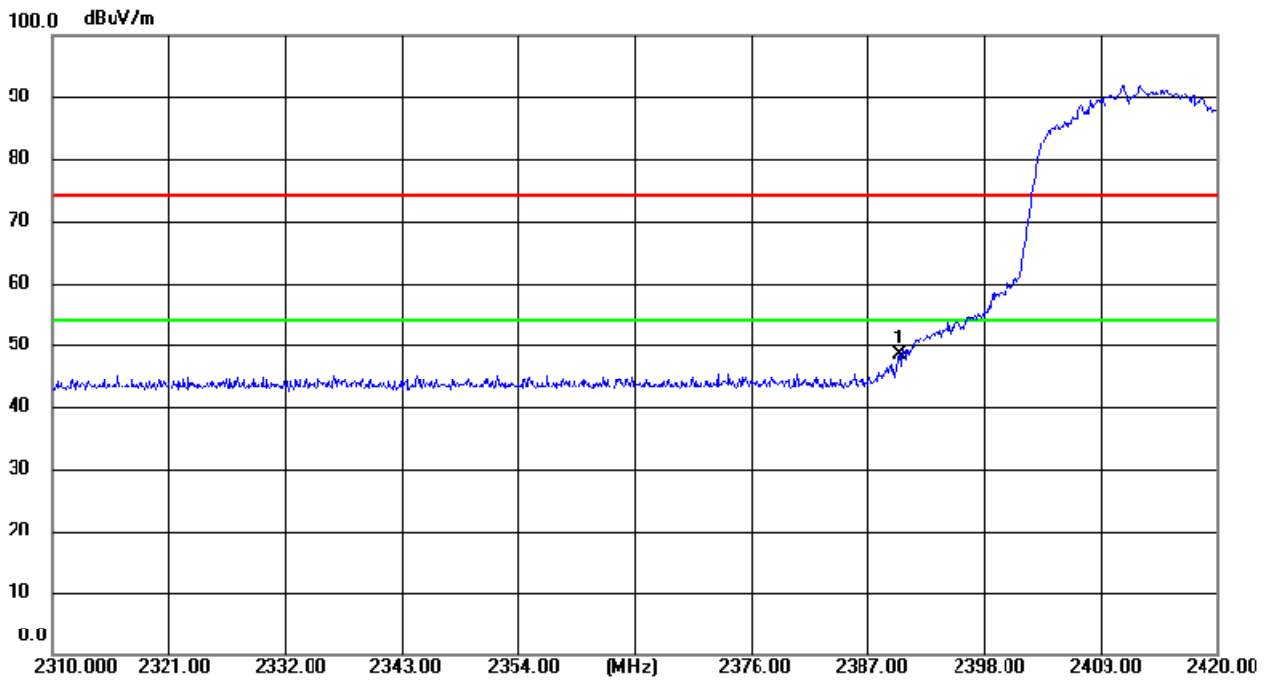


Vertical

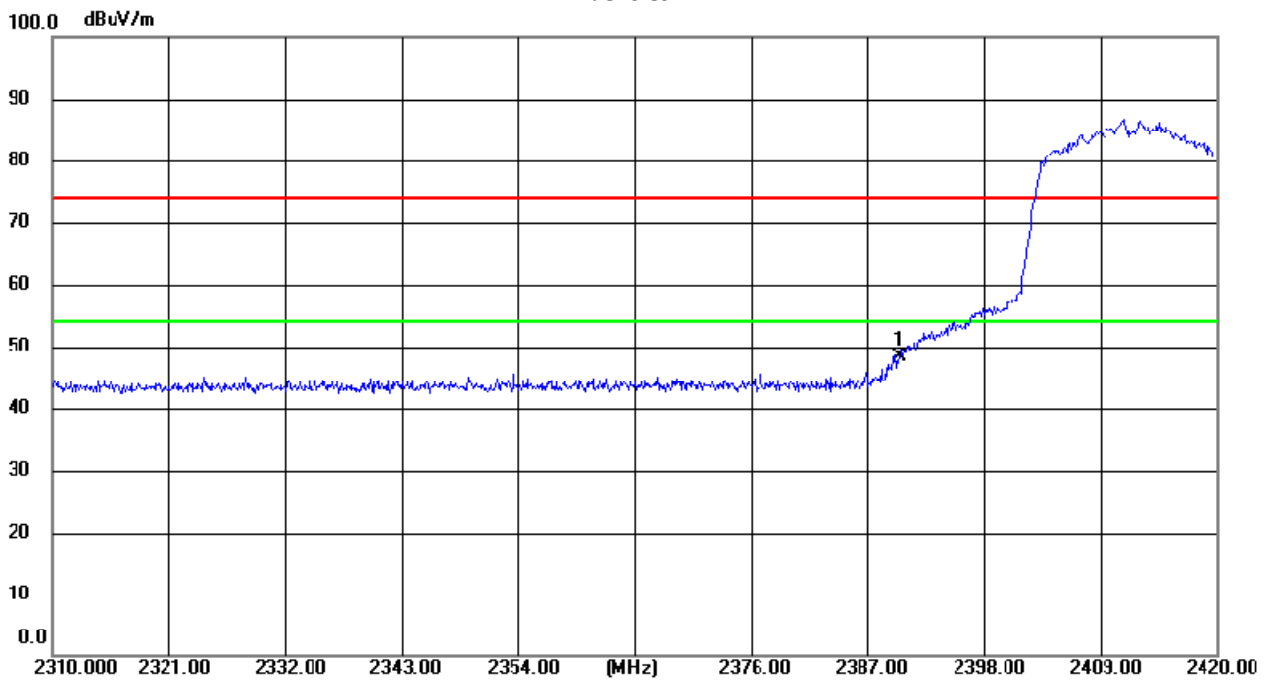

Horizontal

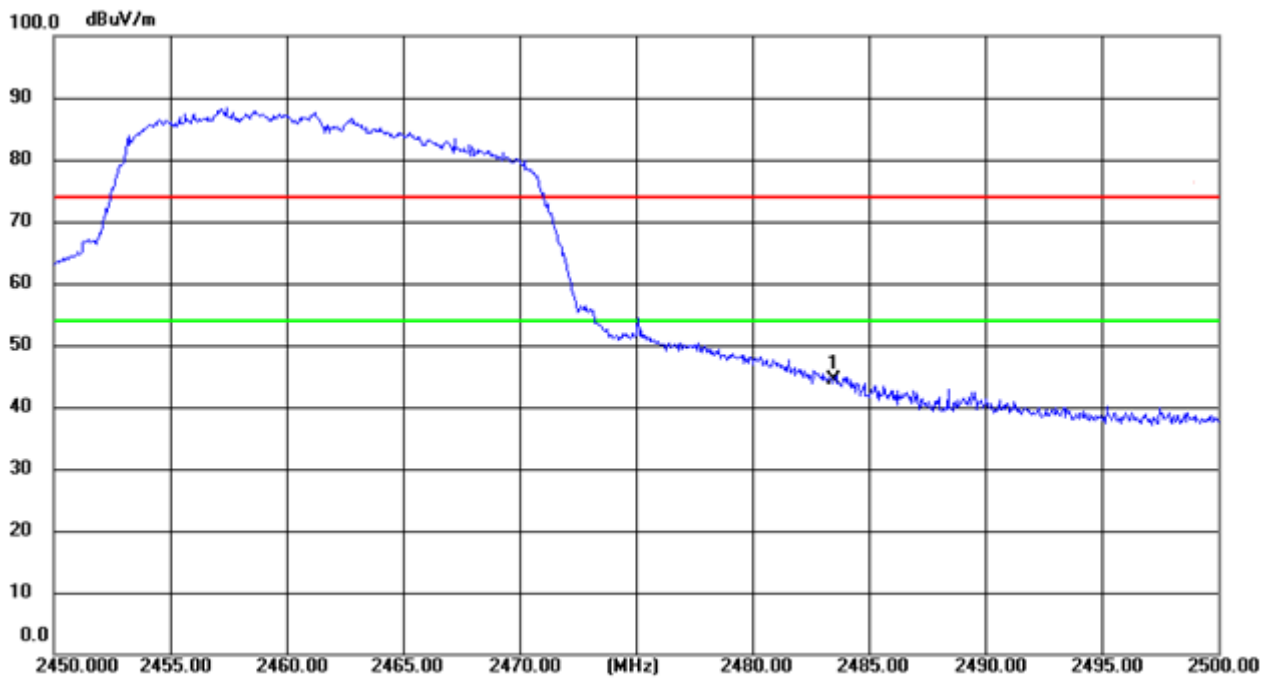


Vertical

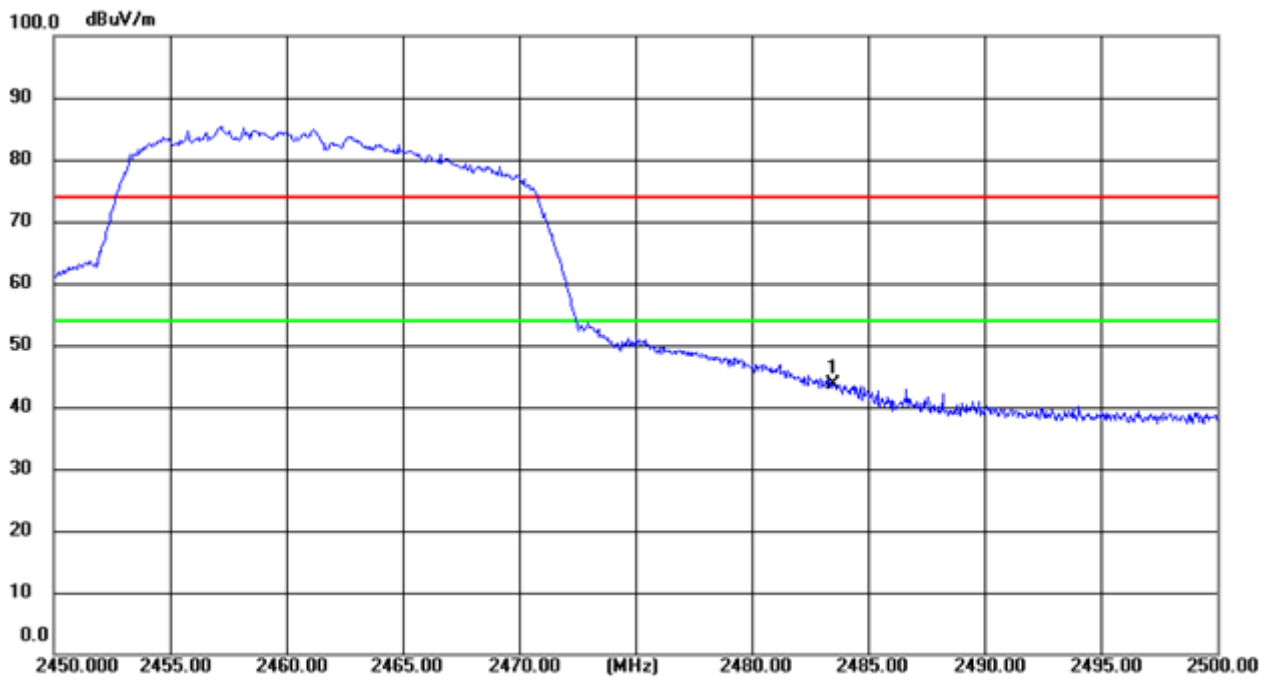


Orthogonal Axis	X
Test Mode:	TX N-40M Mode

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	54.6	--	-5.79	48.81	--	74.00	54.00	CH01
2390.00	V	52.64	--	-5.79	46.85	--	74.00	54.00	CH01
2483.50	H	50.46	--	-4.98	45.48	--	74.00	54.00	CH11
2483.50	V	50.94	--	-4.98	45.96	--	74.00	54.00	CH11


Horizontal

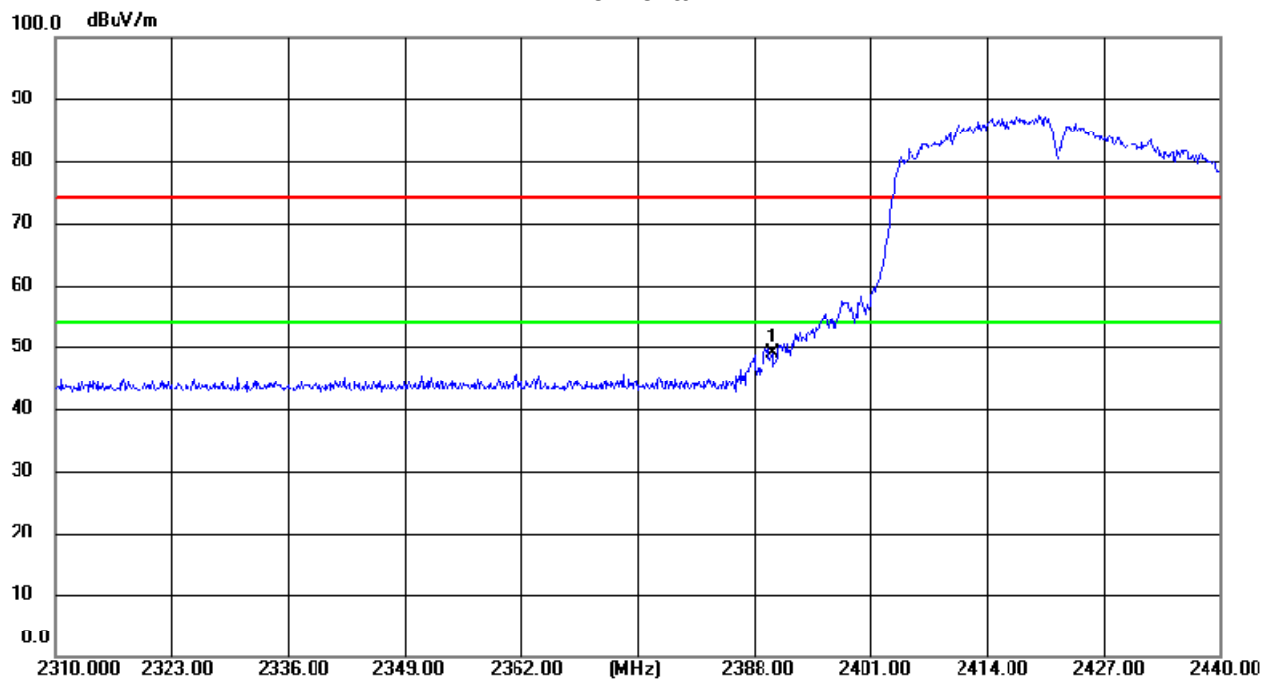


Vertical

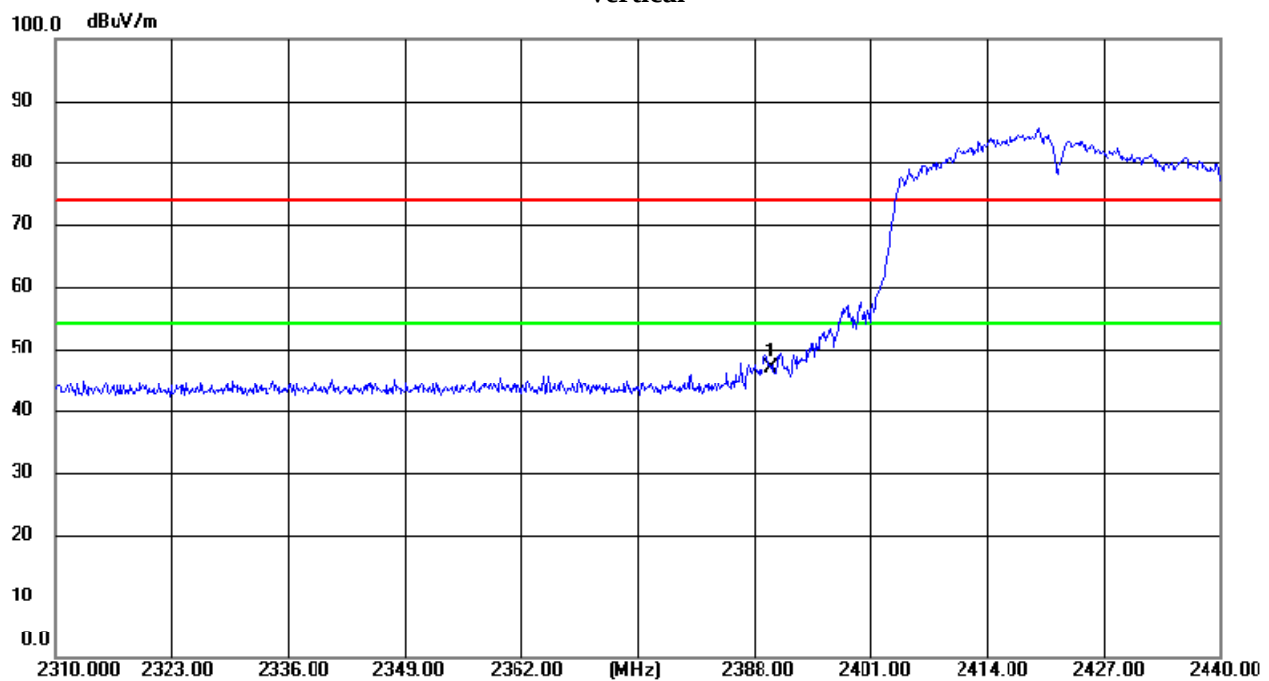

Horizontal

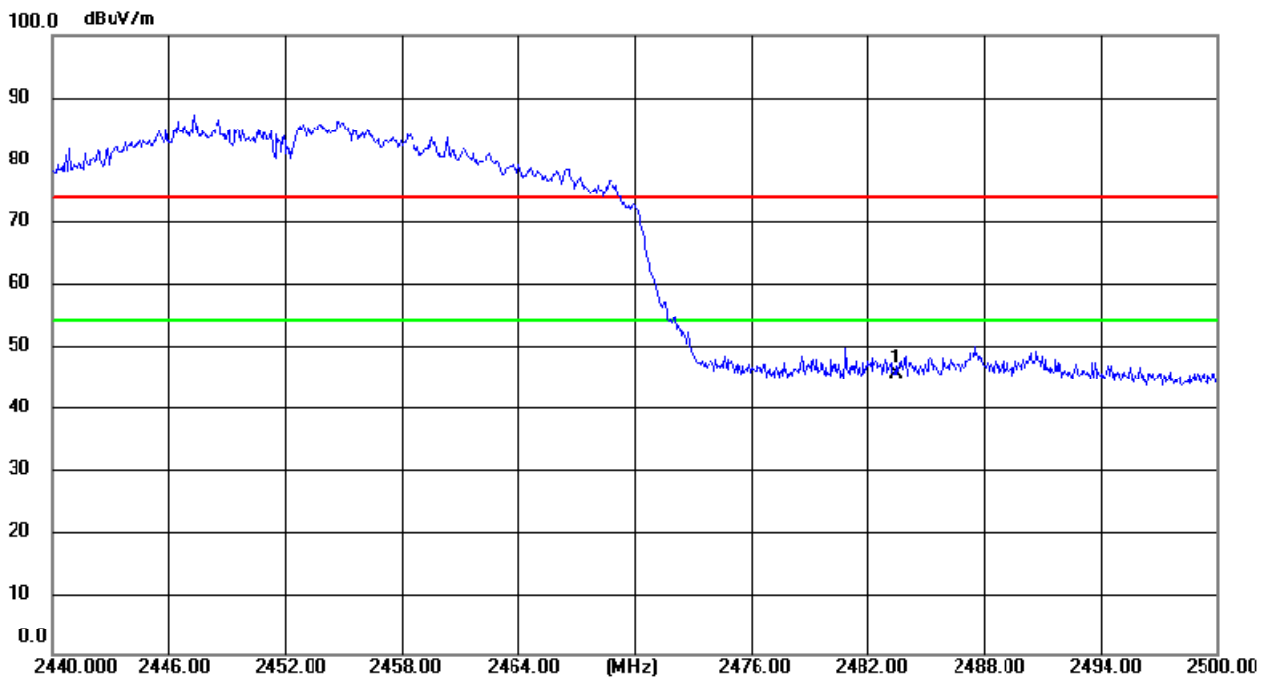

Vertical

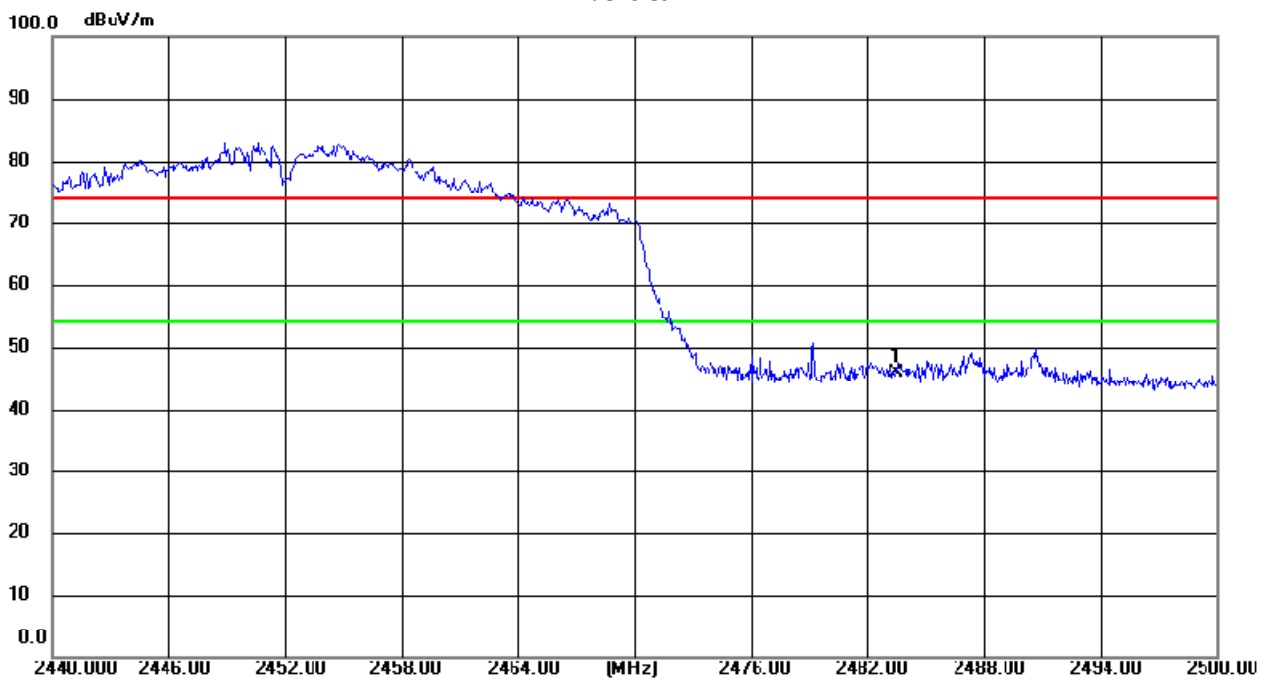


5.9TEST RESULTS- ABOVE 1000MHz(HARMONIC)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.000	43.15	5.08	48.23	74.00	-25.77	peak
7236.000	33	7.16	40.16	74.00	-33.84	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

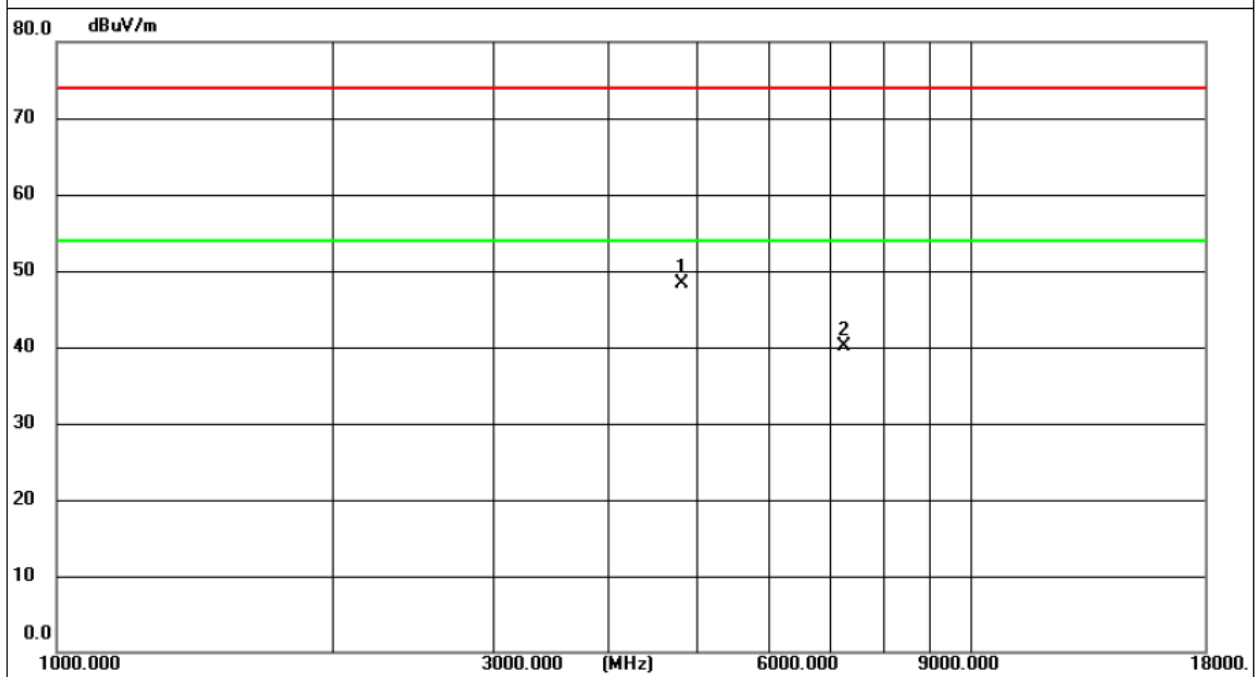


Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.000	43.08	5.08	48.16	74.00	-25.84	peak
7236.000	31.09	7.16	38.25	74.00	-35.75	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

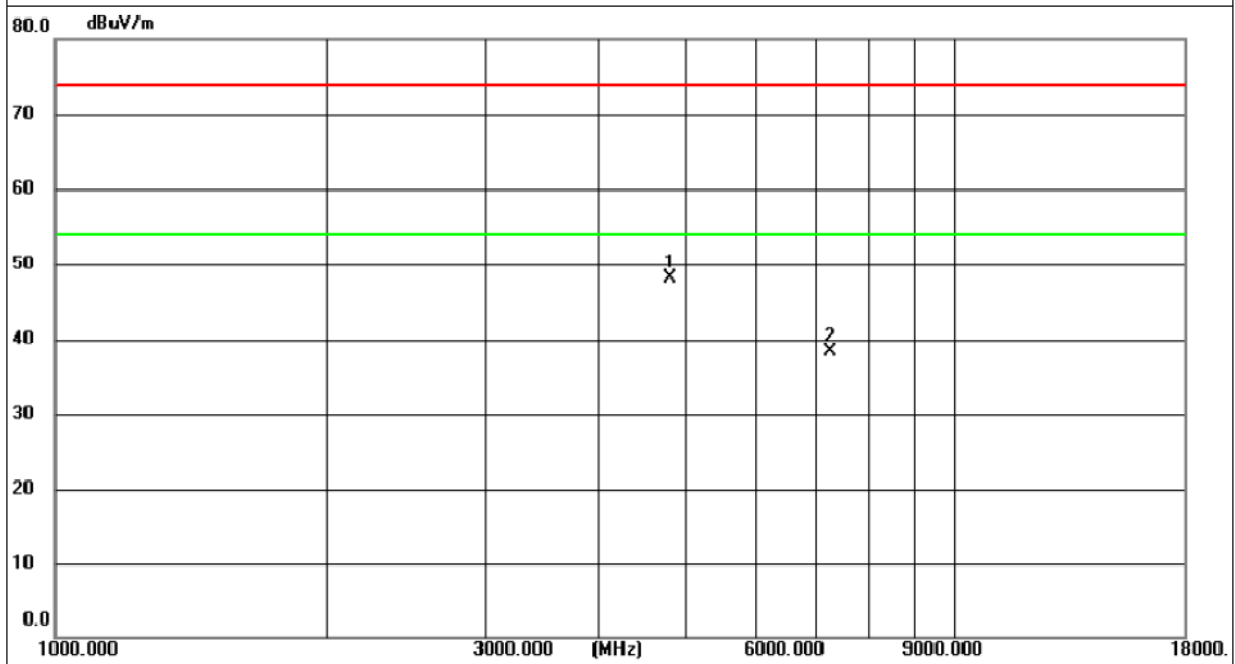


Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.000	43.03	5.13	48.16	74.00	-25.84	peak
7311.000	29.53	7.49	37.02	74.00	-36.98	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

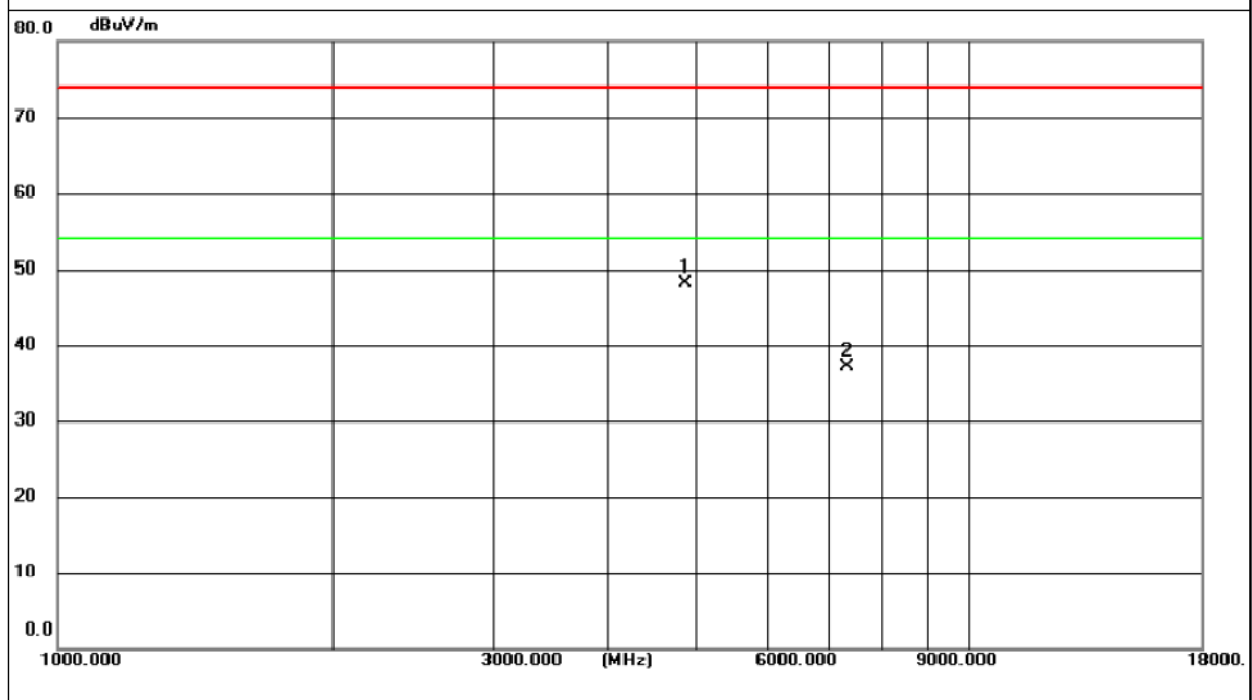


Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.000	41.11	5.13	46.24	74.00	-27.76	peak
7311.000	30.78	7.49	38.27	74.00	-35.73	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

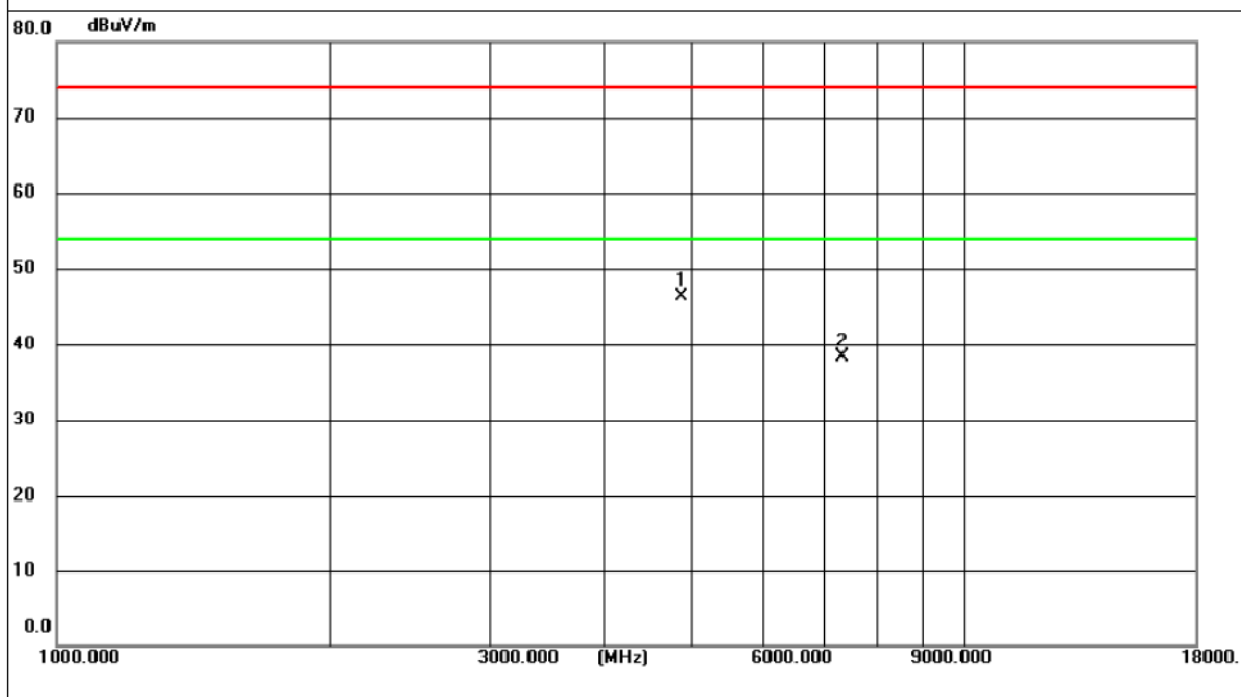


Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924.000	43.1	5.18	48.28	74.00	-25.72	peak
7386.000	33.43	7.82	41.25	74.00	-32.75	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

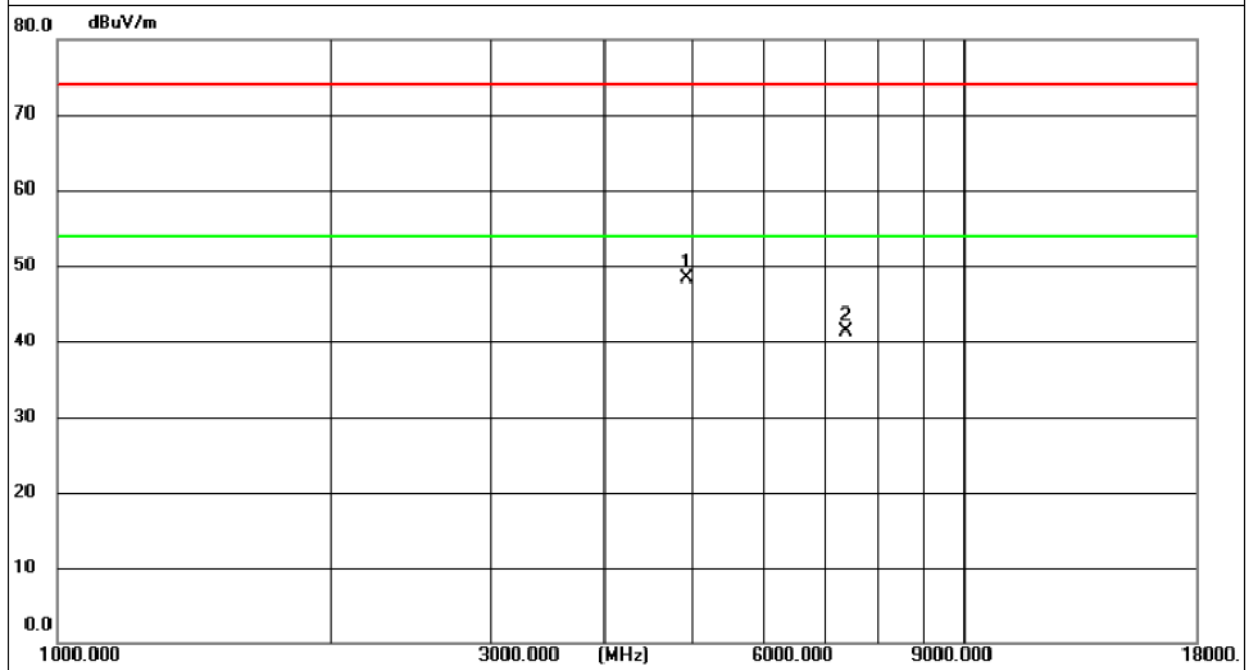


Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924.000	40.09	5.18	45.27	74.00	-28.73	peak
7386.000	28.64	7.82	36.46	74.00	-37.54	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

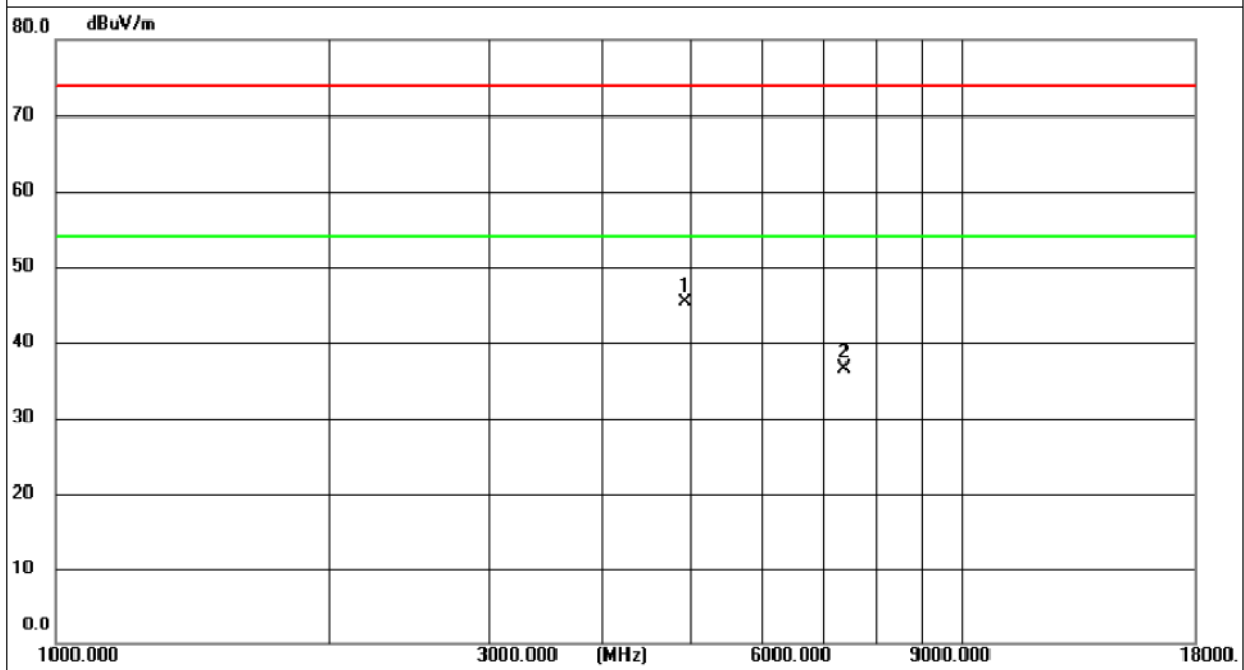


Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.000	44.17	5.08	49.25	74.00	-24.75	peak
7236.000	33.89	7.16	41.05	74.00	-32.95	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

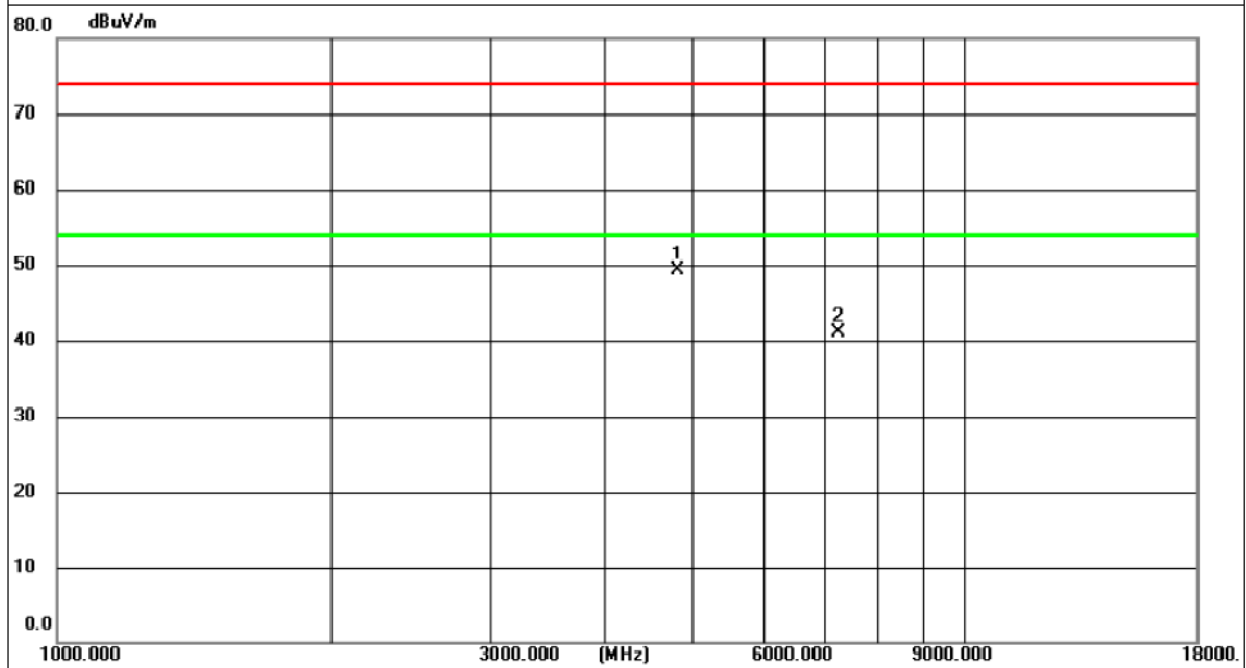


Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.0000	40.64	5.08	45.72	74.00	-28.28	peak
7236.0000	30.47	7.16	37.63	74.00	-36.37	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

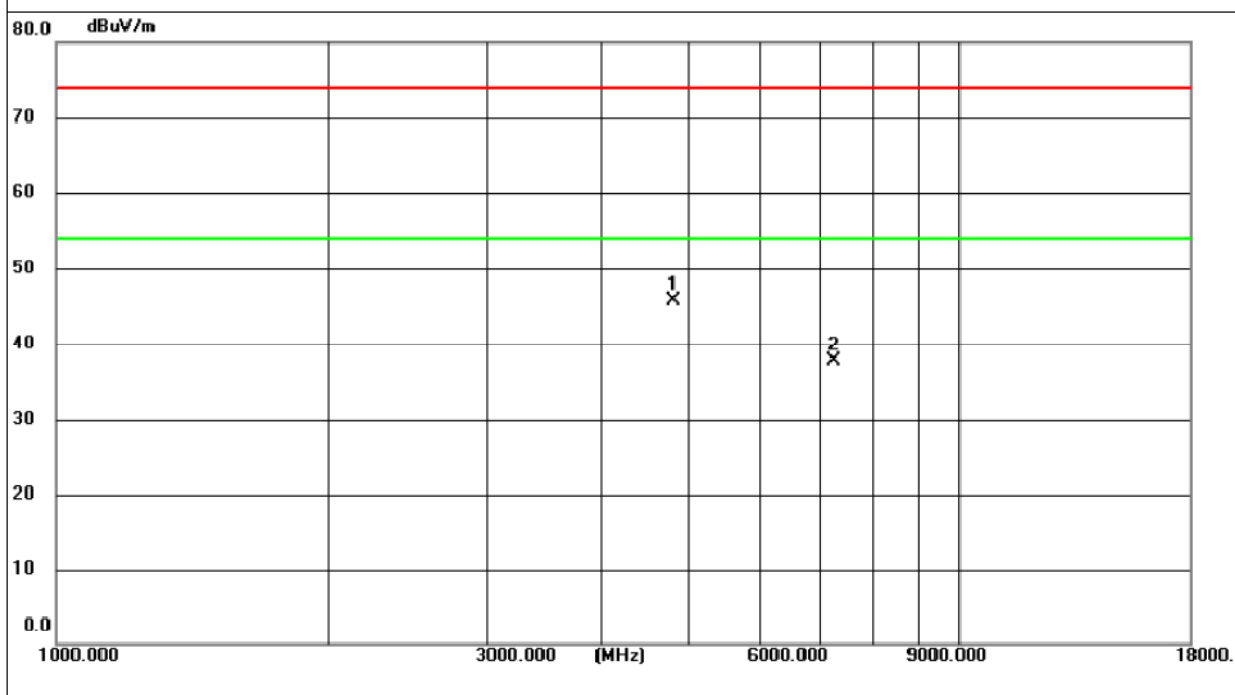


Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.0000	41.64	5.13	46.77	74.00	-27.23	peak
7311.0000	32.8	7.49	40.29	74.00	-33.71	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

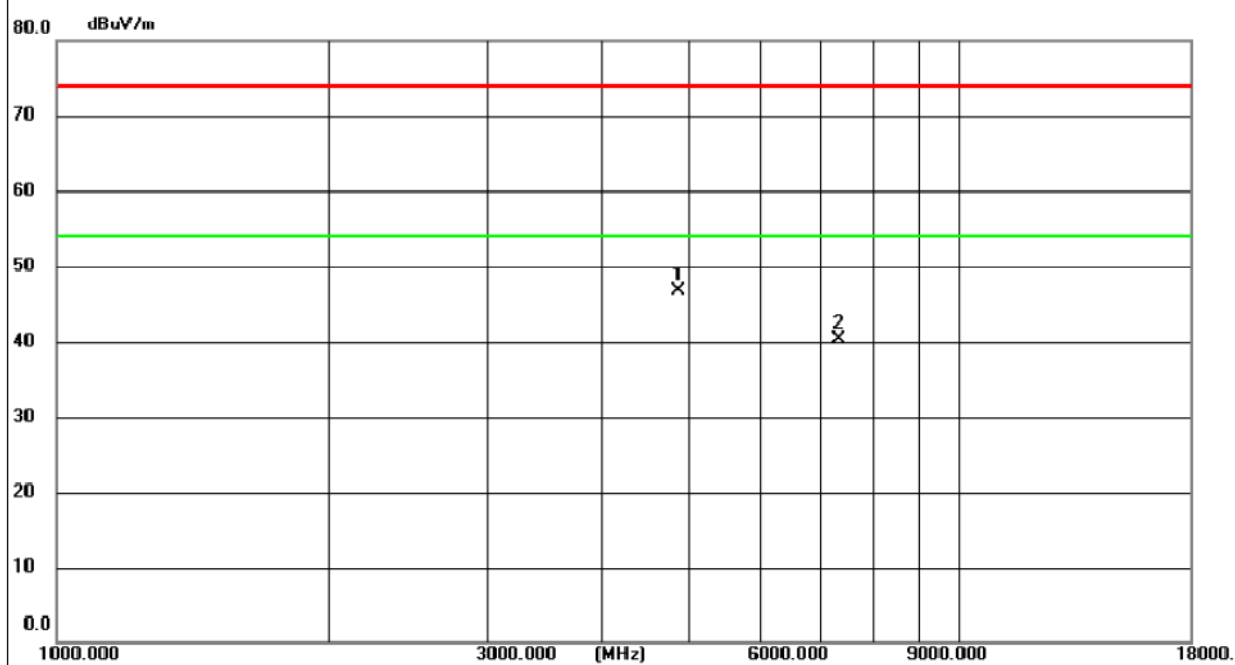


Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.0000	43.36	5.13	48.49	74.00	-25.51	peak
7311.0000	34.57	7.49	42.06	74.00	-31.94	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

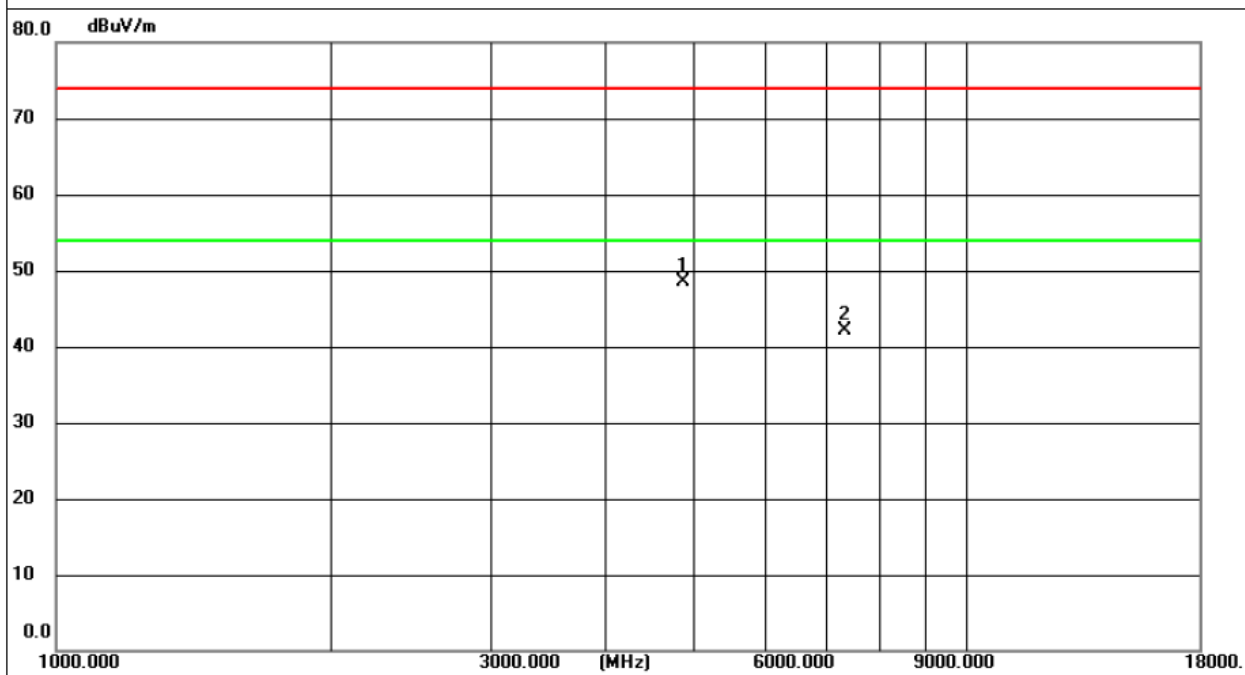


Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.0000	40.75	5.18	45.93	74.00	-28.07	peak
7386.0000	31.85	7.82	39.67	74.00	-34.33	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

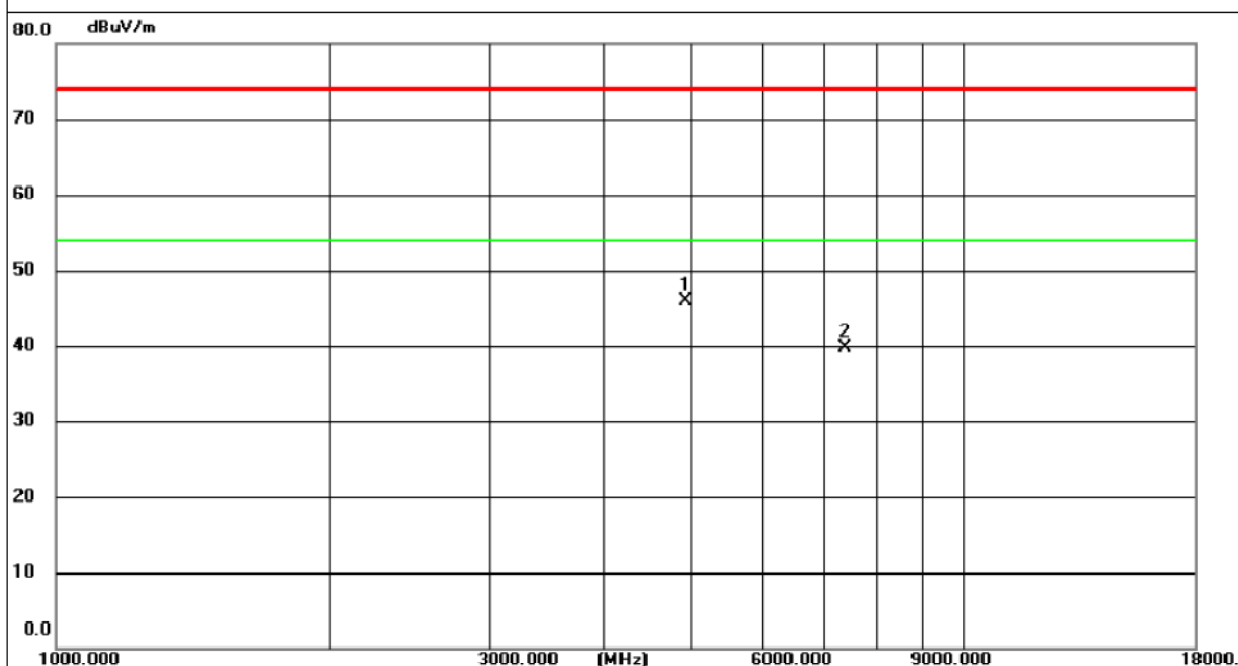


Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.0000	42.33	5.18	47.51	74.00	-26.49	peak
7386.0000	32.36	7.82	40.18	74.00	-33.82	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

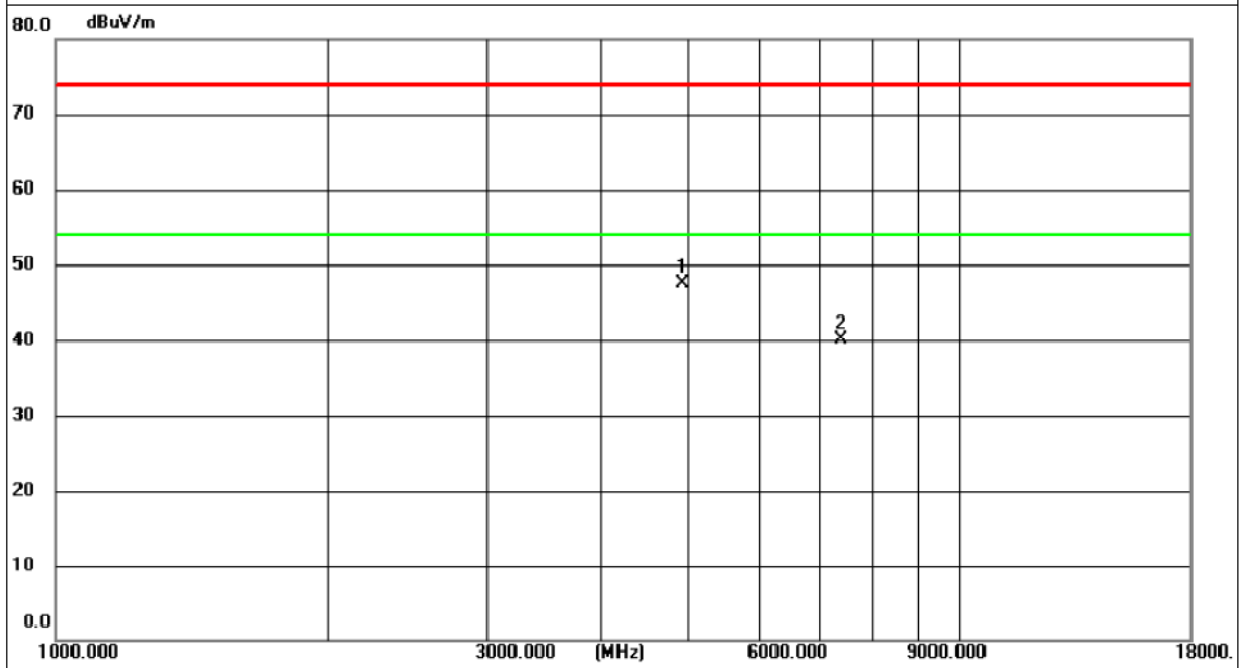


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.0000	44.26	5.08	49.34	74.00	-24.66	peak
7236.0000	34.87	7.16	42.03	74.00	-31.97	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

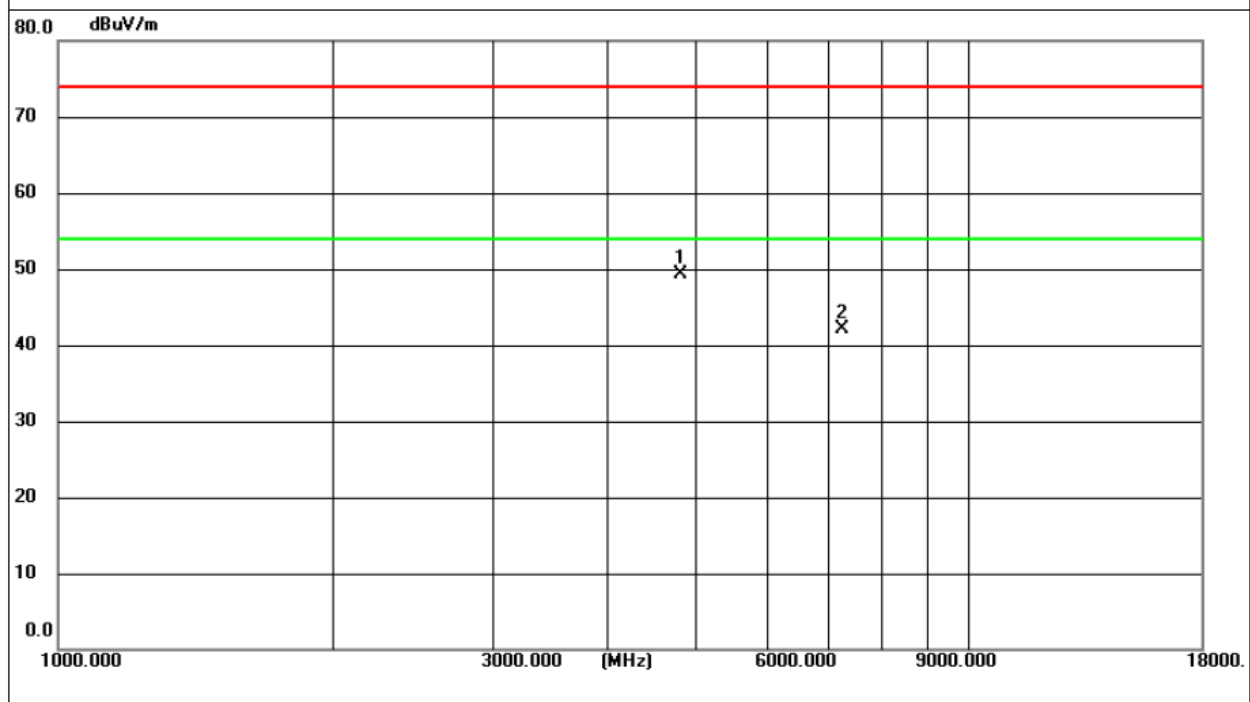


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.0000	39.44	5.08	44.52	74.00	-29.48	peak
7236.0000	34.97	7.16	42.13	74.00	-31.87	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

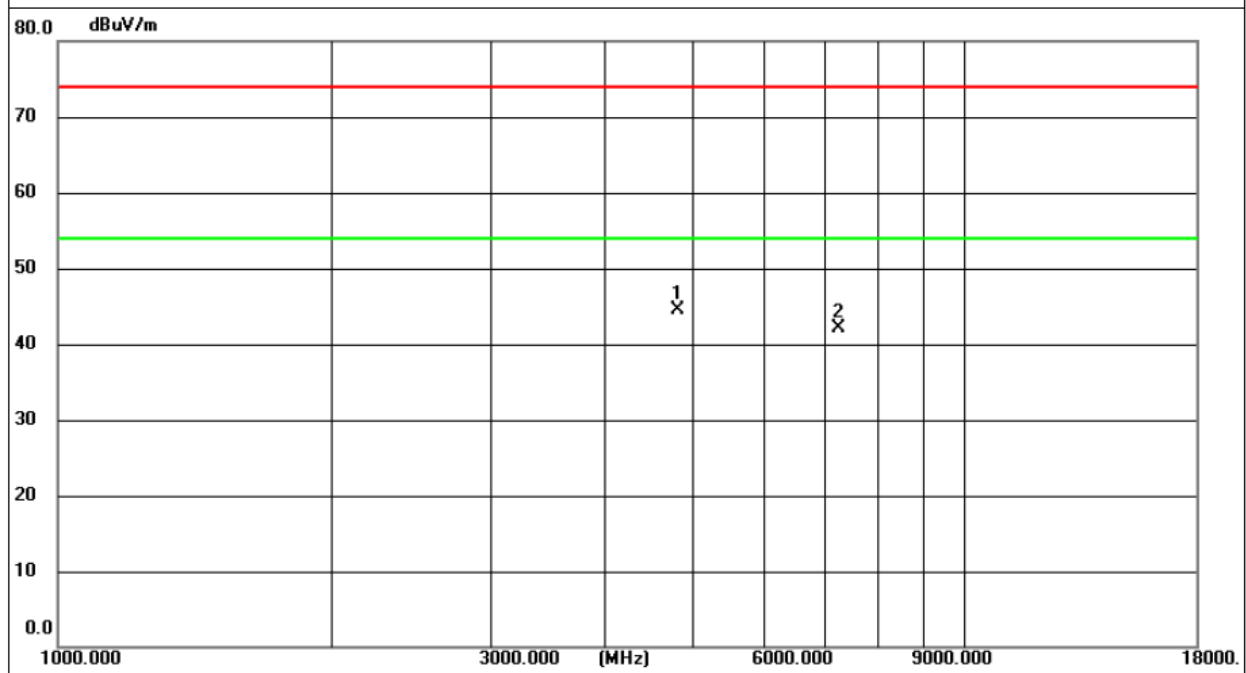


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.000	42.71	5.13	47.84	74.00	-26.16	peak
7311.000	32.55	7.49	40.04	74.00	-33.96	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

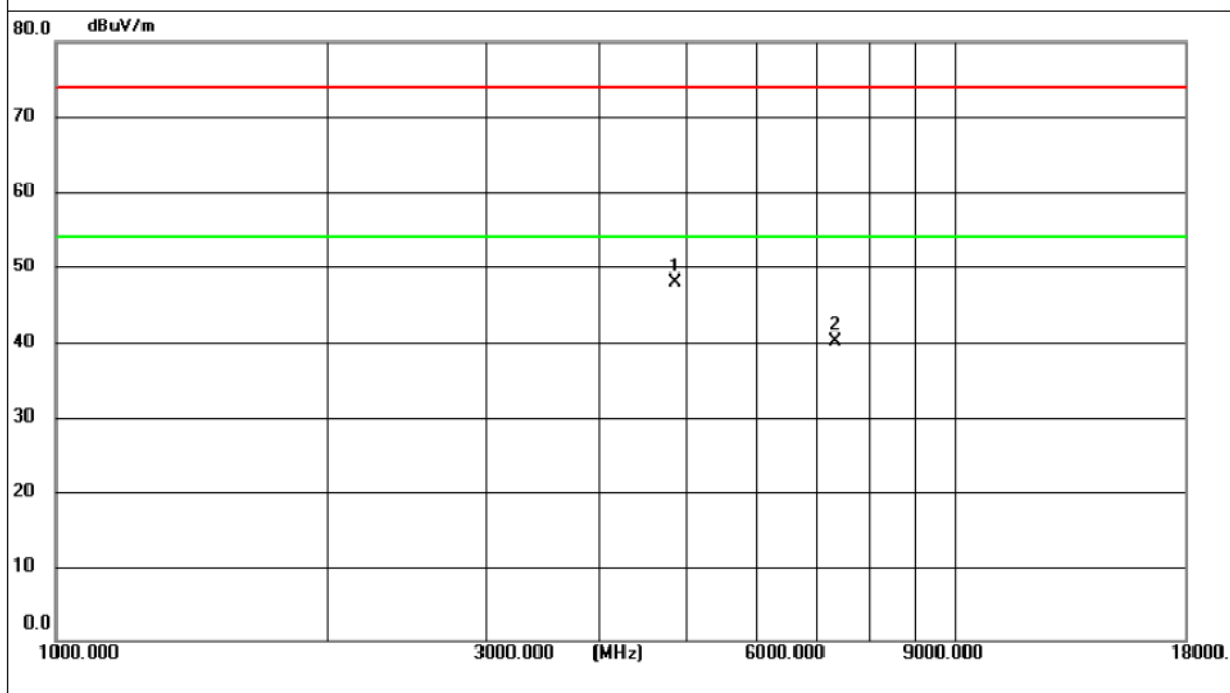


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.000	40.27	5.13	45.4	74.00	-28.60	peak
7311.000	29.66	7.49	37.15	74.00	-36.85	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

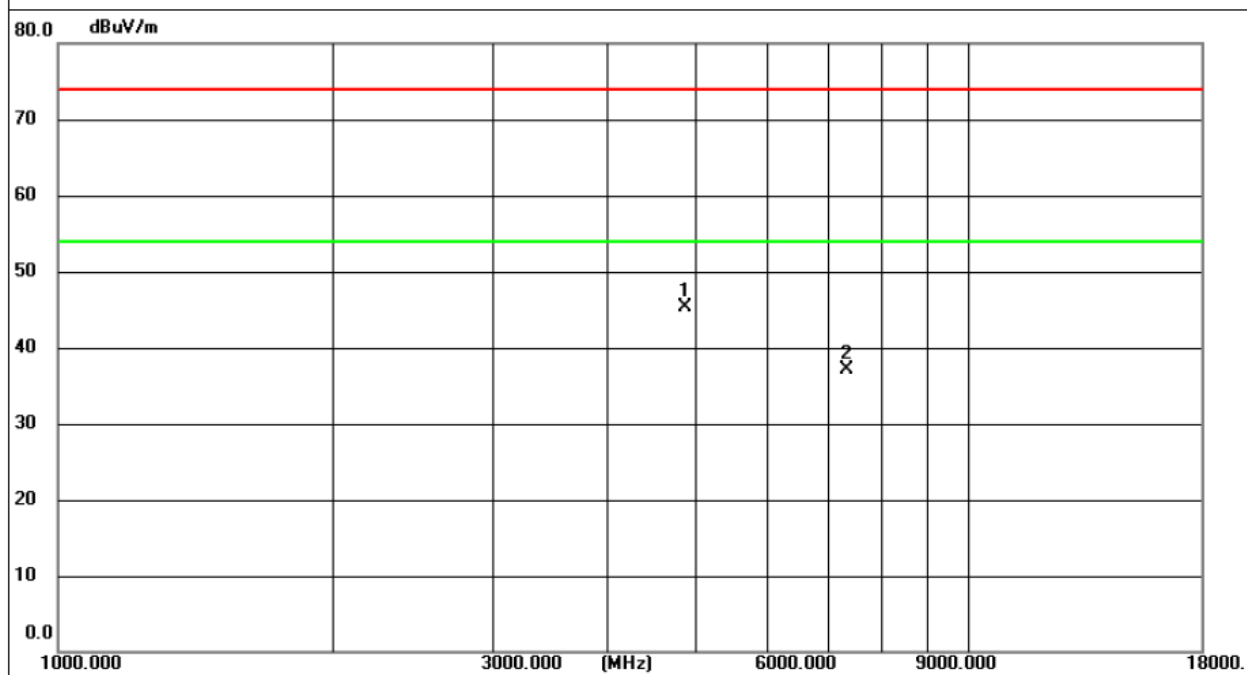


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.0000	42.24	5.18	47.42	74.00	-26.58	peak
7386.0000	32.45	7.82	40.27	74.00	-33.73	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

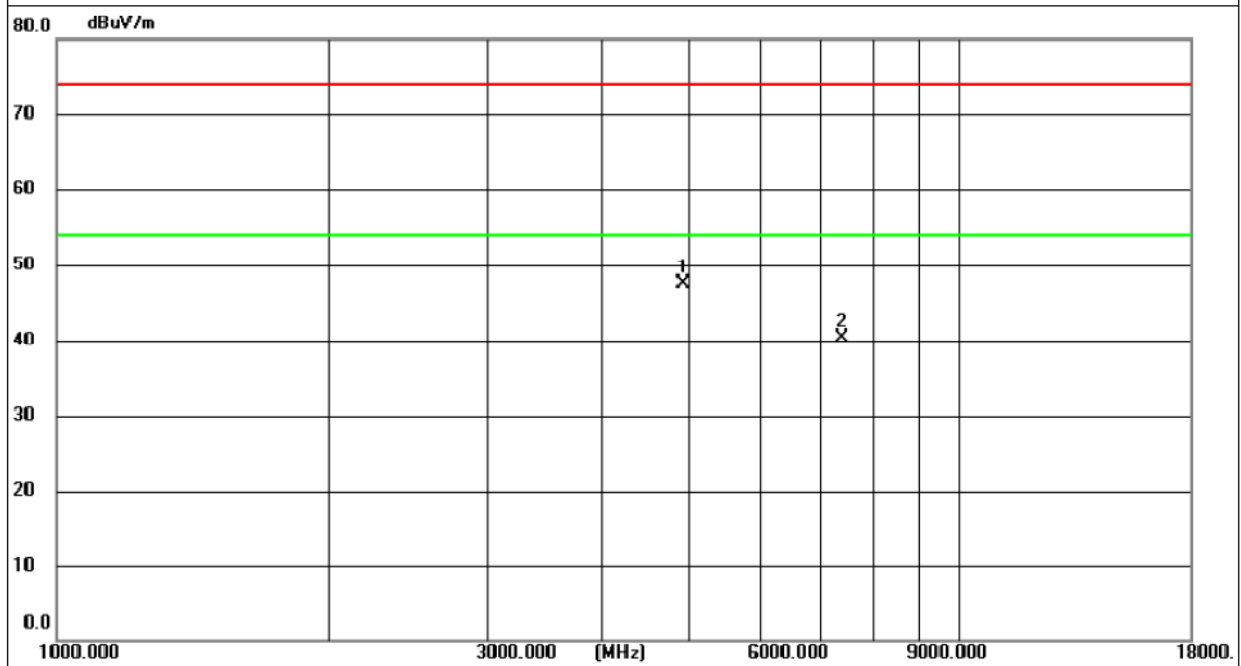


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.0000	44.27	5.18	49.45	74.00	-24.55	peak
7386.0000	33.42	7.82	41.24	74.00	-32.76	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

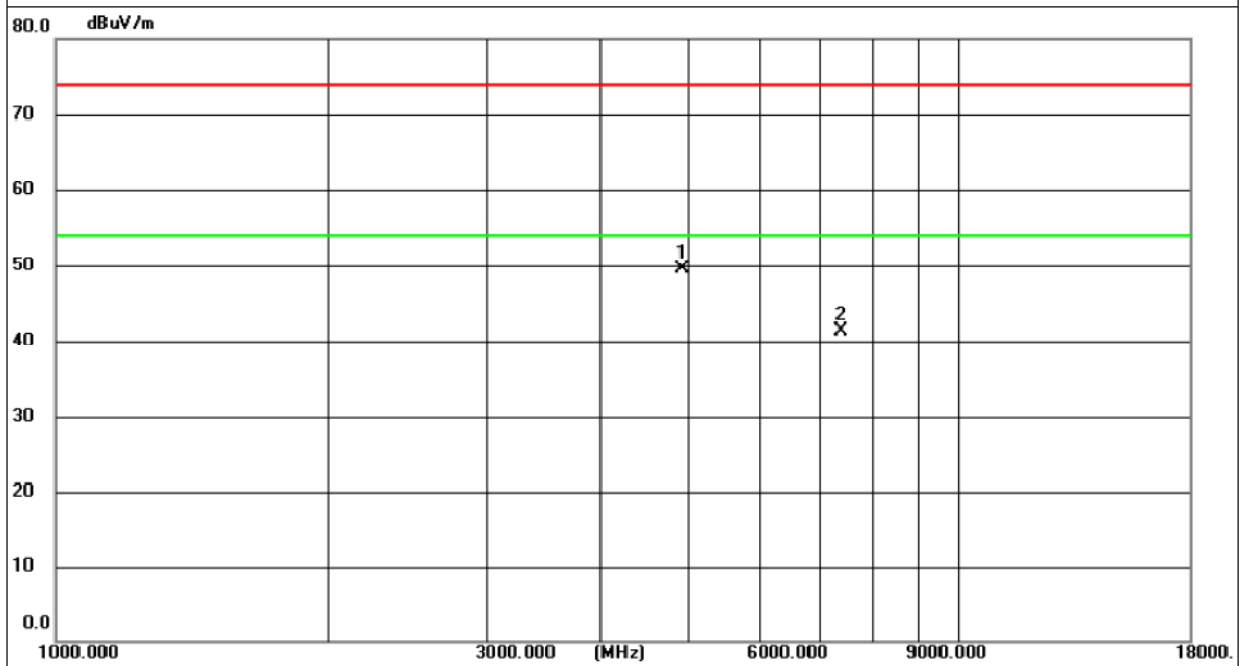


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844.0000	40.34	5.11	45.45	74.00	-28.55	peak
7266.0000	30.25	7.29	37.54	74.00	-36.46	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

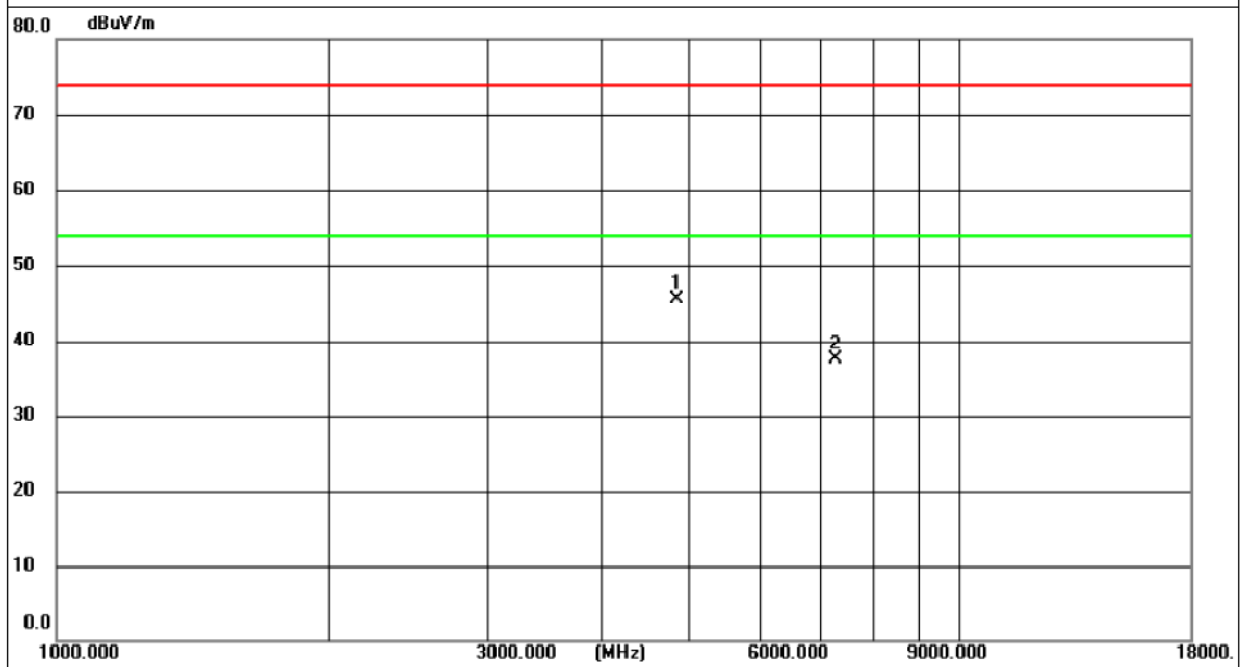


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844.0000	42.1	5.11	47.21	74.00	-26.79	peak
7266.0000	35.11	7.29	42.4	74.00	-31.60	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

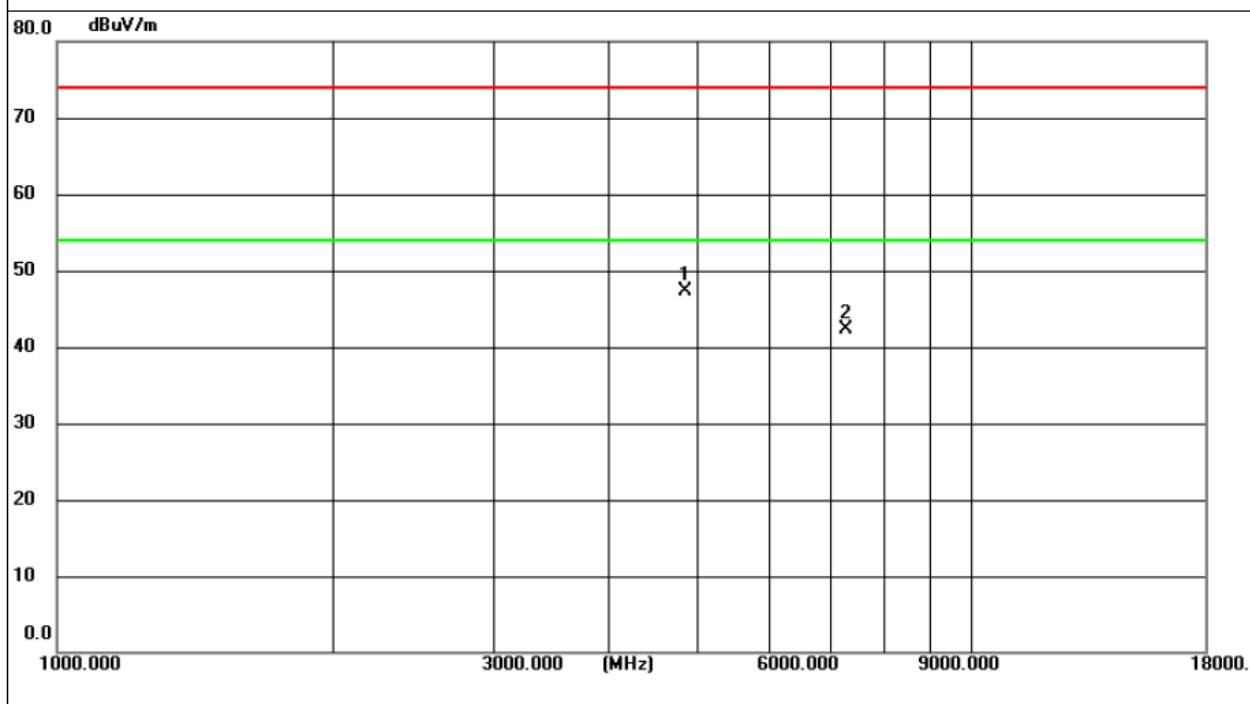


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.0000	42.55	5.13	47.68	74.00	-26.32	peak
7311.0000	32.79	7.49	40.28	74.00	-33.72	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

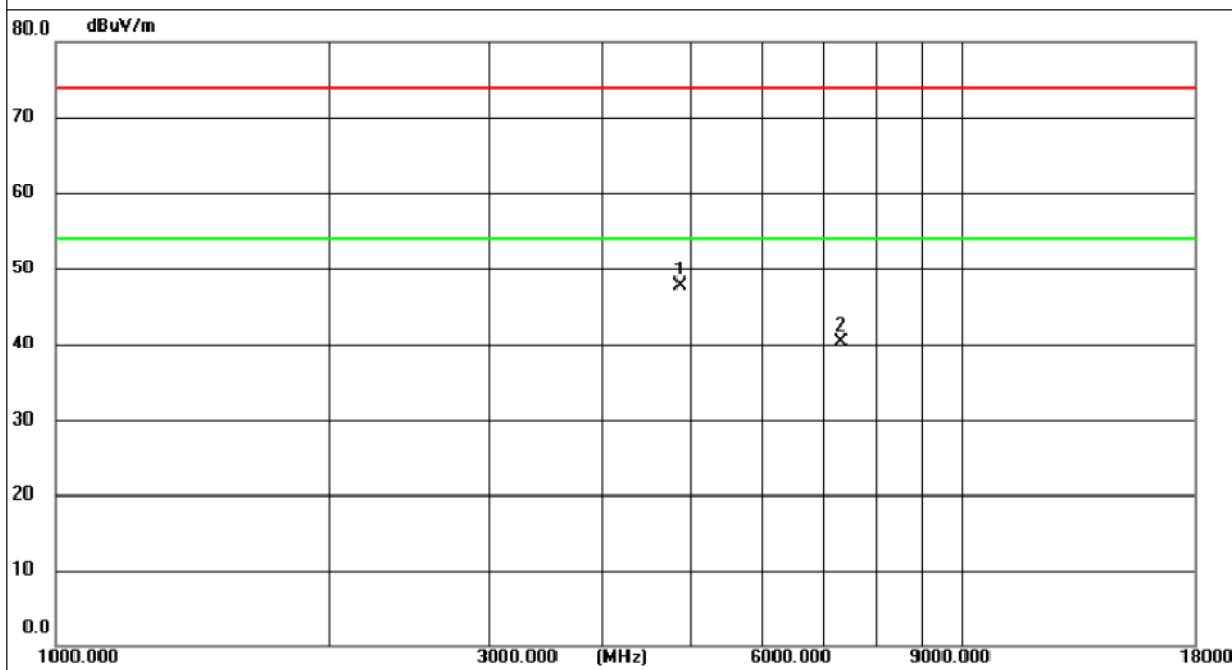


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.0000	44.61	5.13	49.74	74.00	-24.26	peak
7311.0000	34.96	7.49	42.45	74.00	-31.55	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

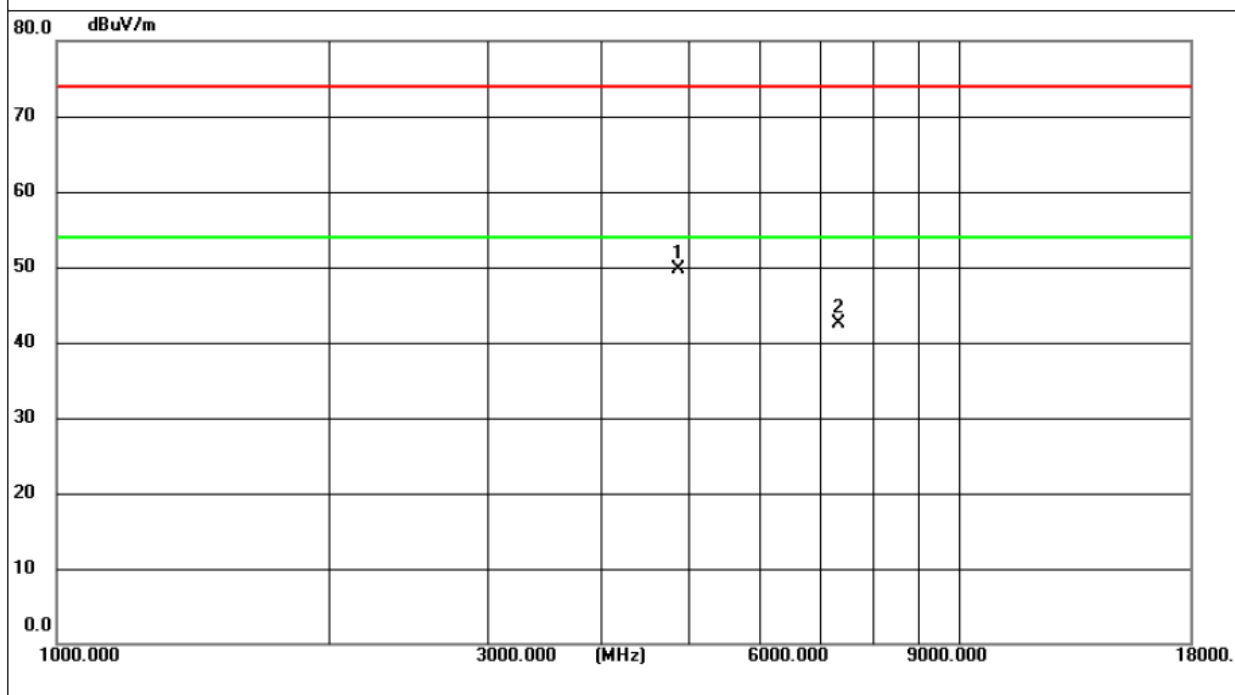


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904.0000	43.56	5.16	48.72	74.00	-25.28	peak
7356.0000	33.62	7.69	41.31	74.00	-32.69	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

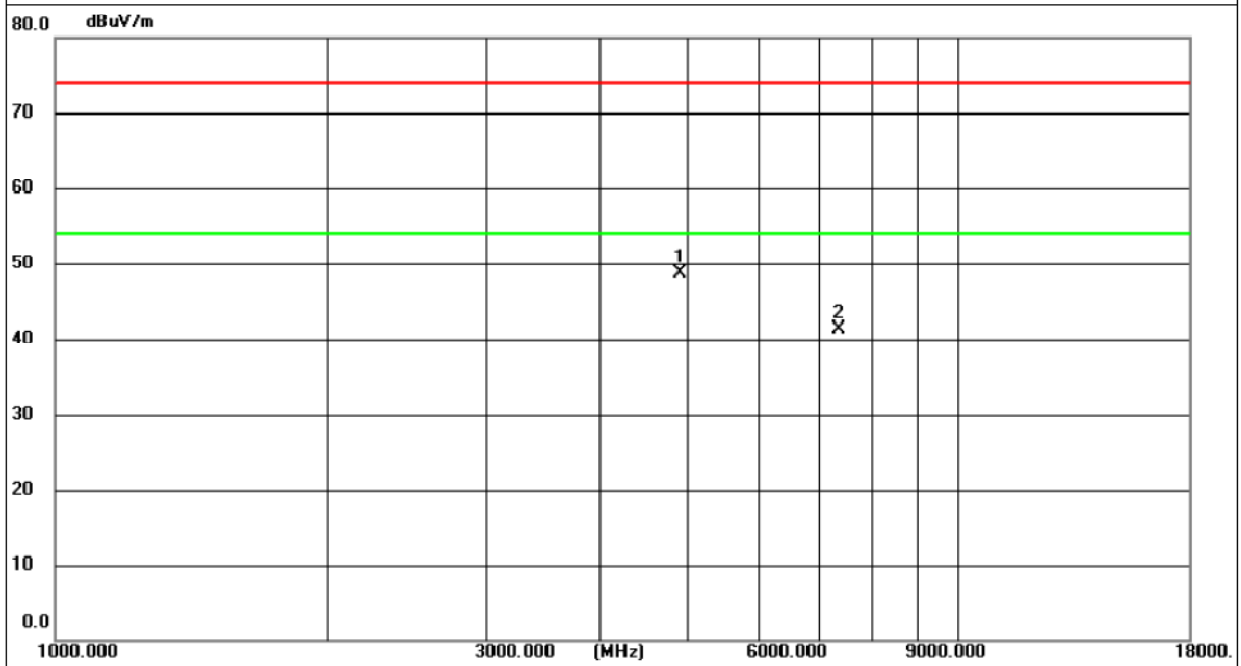


Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904.0000	40.54	5.16	45.7	74.00	-28.30	peak
7356.0000	32.49	7.69	40.18	74.00	-33.82	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

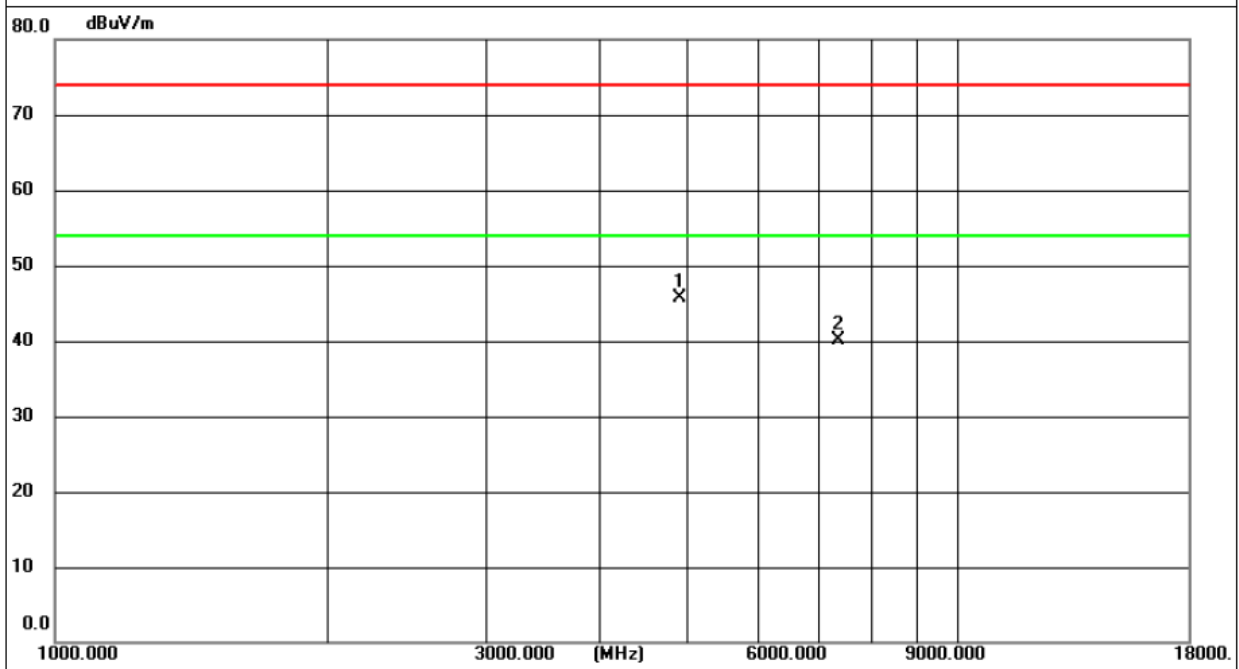

6BANDWIDTH TEST**6.1LIMIT**

FCC Part15, Subpart C (15.247)&RSS-Gen and RSS-247		
Section	Test Item	Limit
15.247(a)(2) RSS-Gen6.7 RSS-247 5.2 (a)	6dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- For 6dB Bandwidth Spectrum setting:RBW= 100KHz, VBW=300KHz, Sweep time = 2.5ms.
For 99% OBW Spectrum Setting: RBW= 300KHz, VBW=1MHz,Sweep time = 2.5ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

6.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2022/05/23	2023/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A	N/A

6.4TEST SETUP**6.5EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS


ANT 1(2) Represent the value of antenna 1 and 2, The worst data is 1 Antenna a ,only shown Antenna 1 Plot.

TX B Mode					
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth (MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	9.527	13.954	500	PASS
06	2437	9.850	14.095	500	PASS
11	2462	9.175	14.211	500	PASS

CH01

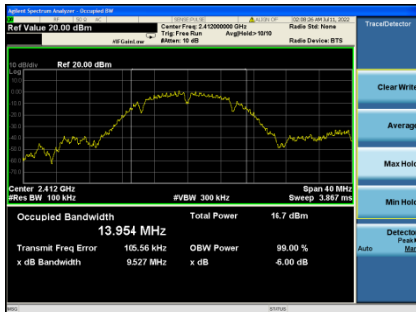

CH06

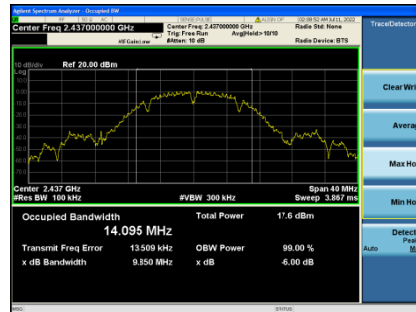


CH11




TX G Mode					
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth (MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	16.38	16.733	500	PASS
06	2437	16.35	16.817	500	PASS
11	2462	16.36	16.991	500	PASS


CH01

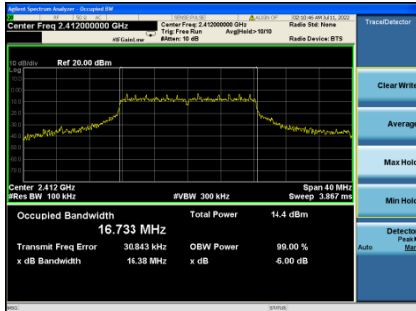

CH06

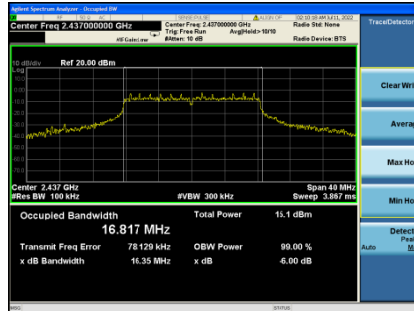


CH11

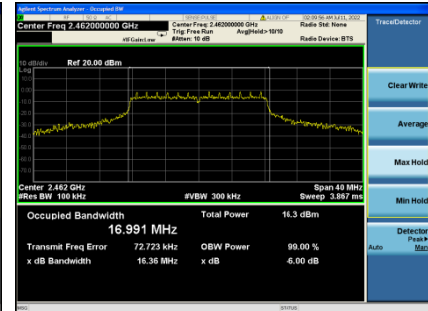


TX N (HT20) Mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth (MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	17.27	17.915	500	PASS
06	2437	17.53	17.953	500	PASS
11	2462	17.59	18.160	500	PASS


CH01

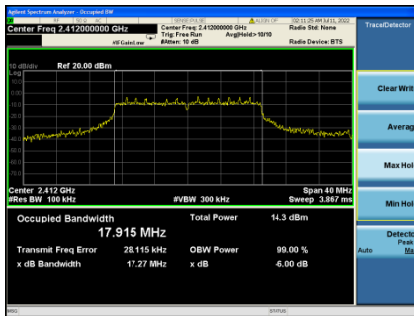

CH06

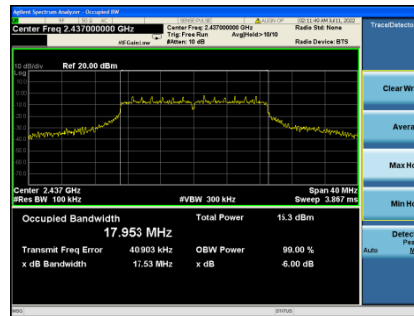


CH11

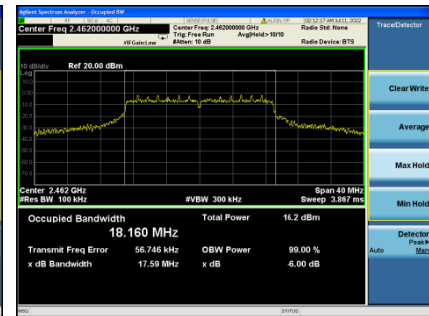


TX N (HT40) Mode					
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth (MHz)	6dB Bandwidth Min. Limit(kHz)	Result
03	2422	36.00	36.363	500	PASS
06	2437	36.38	36.383	500	PASS
09	2452	35.94	36.437	500	PASS


CH03

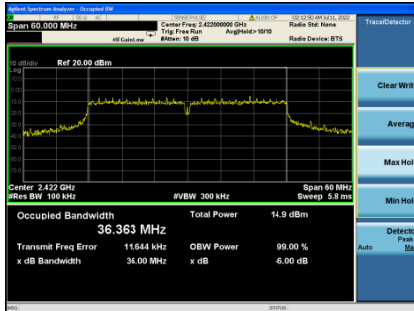

CH06

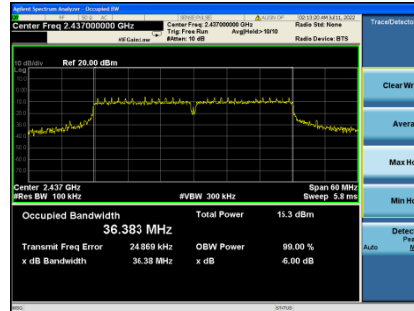

CH09

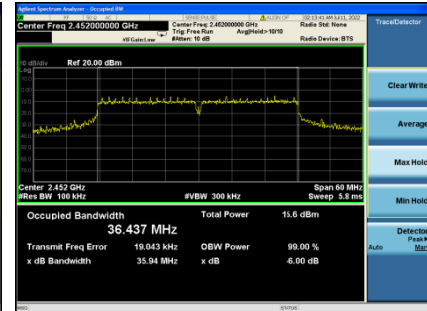

7 MAXIMUM OUTPUT POWER TEST**7.1 LIMIT**


FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(b)(3) RSS-2475.4 (d)	Maximum Output Power	1 Watt or 30dBm

7.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.1.3 of ANSI C63.10-2013.and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Power Sensor	KEYSIGHT	U2021XA	MY552400 09	2022/05/23	2023/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Micable	C10-01-01-1	100309	N/A	N/A
4	Test Software	KEYSIGHT	Power Panel	V3.11	N/A	N/A

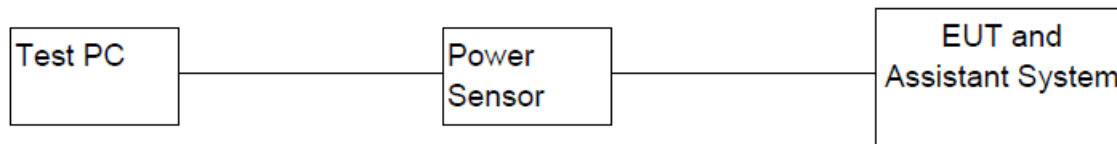7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

TX B Mode_Ant 1				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	17.58	0.0573	PASS
06	2437	17.69	0.0587	PASS
11	2462	17.77	0.0598	PASS
Limit	30dBm / 1W			

TX B Mode_Ant 2				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	17.15	0.0519	PASS
06	2437	17.23	0.0528	PASS
11	2462	17.41	0.0551	PASS
Limit	30dBm / 1W			

TX G Mode_Ant 1				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	16.63	0.0460	PASS
06	2437	16.48	0.0445	PASS
11	2462	16.29	0.0426	PASS
Limit	30dBm / 1W			

TX G Mode_Ant 2				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	16.24	0.0421	PASS
06	2437	16.18	0.0415	PASS
11	2462	16.05	0.0403	PASS
Limit	30dBm / 1W			

TX N (HT20) _Ant 1				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	15.71	0.0372	PASS
06	2437	15.88	0.0387	PASS
11	2462	15.62	0.0365	PASS
Limit	30dBm / 1W			

TX N (HT20) _Ant 2				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	15.27	0.0337	PASS
06	2437	15.42	0.0348	PASS
11	2462	15.23	0.0333	PASS
Limit	30dBm / 1W			

TX N (HT20) _Total				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	18.51	0.0710	PASS
06	2437	18.67	0.0736	PASS
11	2462	18.44	0.0698	PASS
Limit	30dBm / 1W			

Note: For MIMO mode: Directional gain=GANT +10log(N)dBi =3.42dBi

TX N (HT40) _Ant 1				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
03	2422	15.27	0.0337	PASS
06	2437	15.69	0.0371	PASS
09	2452	15.84	0.0384	PASS
Limit	30dBm / 1W			

TX N (HT40) _Ant 2				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
03	2422	15.26	0.0336	PASS
06	2437	15.37	0.0344	PASS
09	2452	15.49	0.0354	PASS
Limit	30dBm / 1W			

TX N (HT40) _Total				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
03	2422	18.28	0.0673	PASS
06	2437	18.54	0.0715	PASS
09	2452	18.68	0.0738	PASS
Limit	30dBm / 1W			

Note: For MIMO mode: Directional gain=GANT +10log(N)dBi =3.42dBi

8 CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

For ISSED

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2022/05/23	2023/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A	N/A

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

ANT 1(2) Represent the value of antenna 1 and 2, The worst data is 1 Antenna a ,only shown Antenna 1 Plot.

TX B Mode_Ant 1

Bandedge-CH01

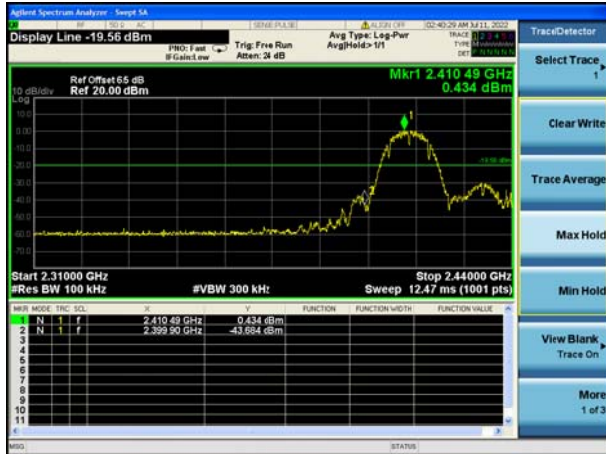


Bandedge-CH11




10th Harmonic of the fundamental frequency


CH01

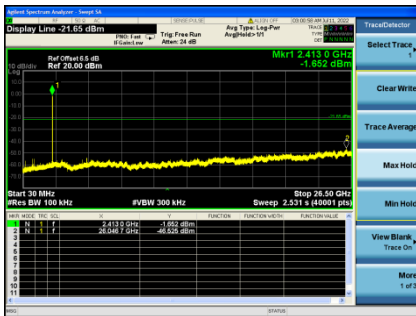

CH06

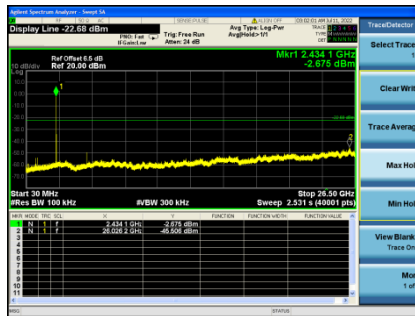

CH11

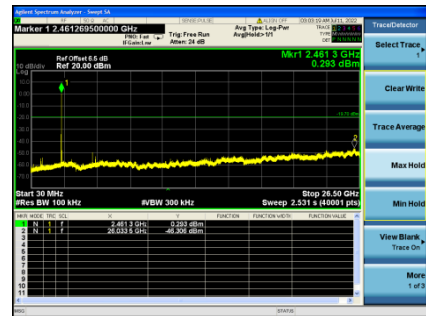

TX GMode_Ant 1

Bandedge-CH01




Bandedge-CH11




10th Harmonic of the fundamental frequency


CH01

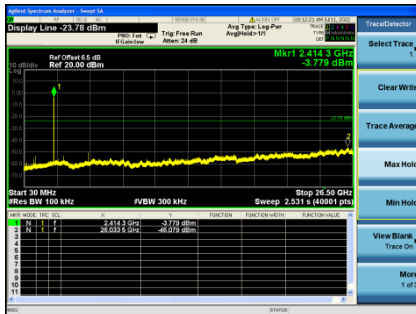

CH06

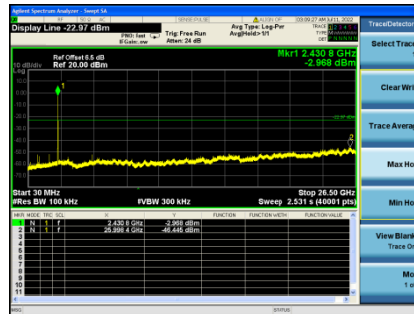

CH11

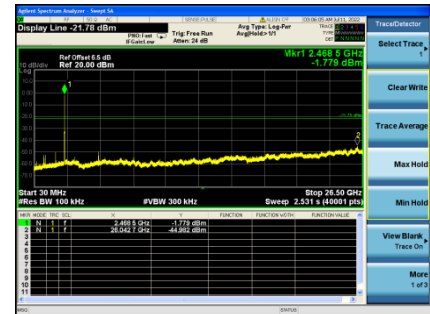

TX N (HT20) Mode _Ant 1

Bandedge-CH01




Bandedge-CH11




10th Harmonic of the fundamental frequency


CH01

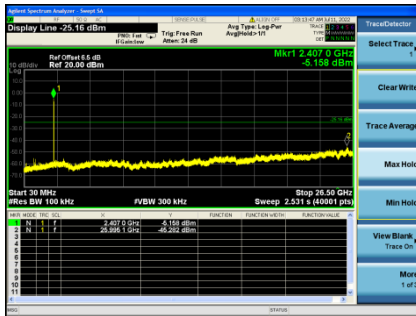

CH06

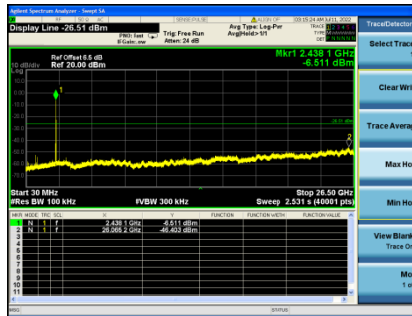

CH11

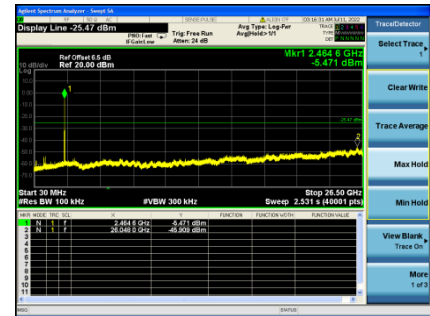

TX N (HT40) Mode _Ant 1

Bandedge-CH03




Bandedge-CH09




10th Harmonic of the fundamental frequency


CH03

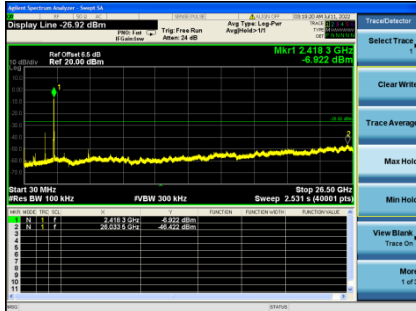

CH06

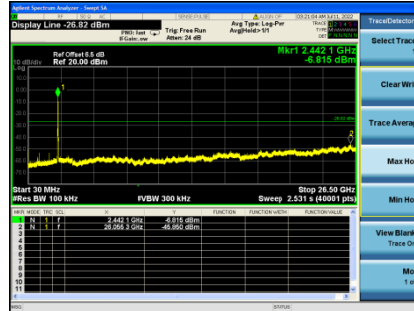

CH09

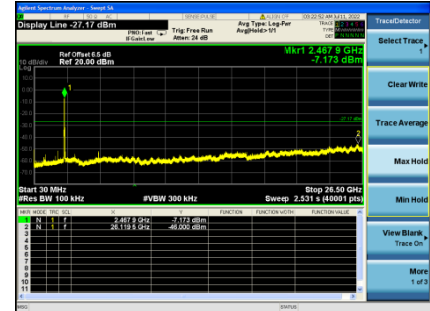

9 POWER SPECTRAL DENSITY TEST**9.1 LIMIT**

FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(e) RSS-2475.2 (b)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method11.10.2 of ANSI C63.10-2013.

9.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2022/05/23	2023/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A	N/A

9.4 TEST SETUP**9.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS


ANT 1(2) Represent the value of antenna 1 and 2, The worst data is 1 Antenna a ,only shown Antenna 1 Plot.

TX B Mode_Ant 1				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-15.326	8	PASS
06	2437	-13.979	8	PASS
11	2462	-12.201	8	PASS


CH01

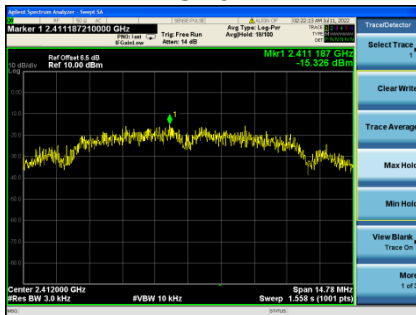

CH06

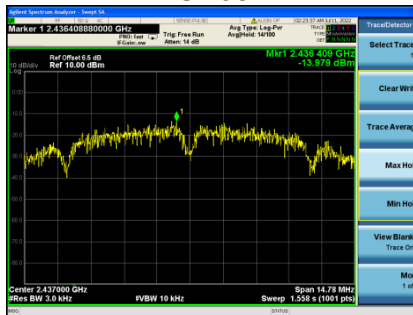


CH11

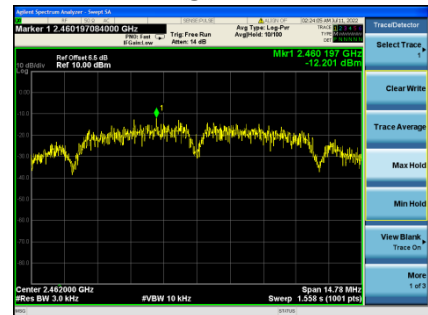


TX GMode_Ant 1				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-18.975	8	PASS
06	2437	-18.168	8	PASS
11	2462	-17.732	8	PASS


CH01

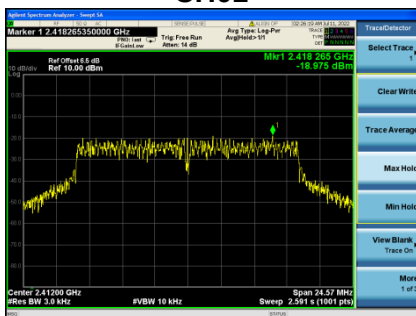

CH06

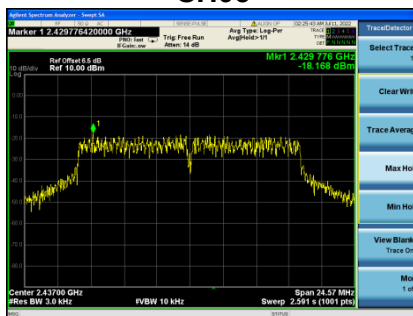


CH11

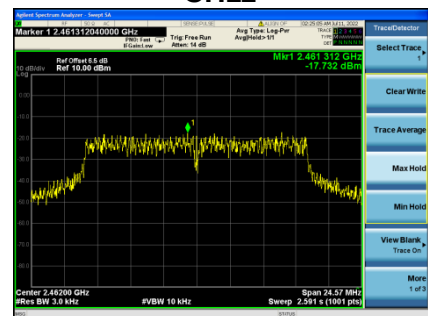


TX N (HT20) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-18.091	8	PASS
06	2437	-17.452	8	PASS
11	2462	-17.031	8	PASS


CH01

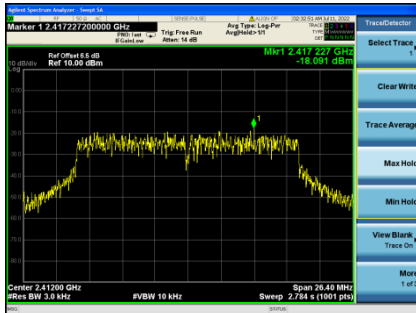

CH06

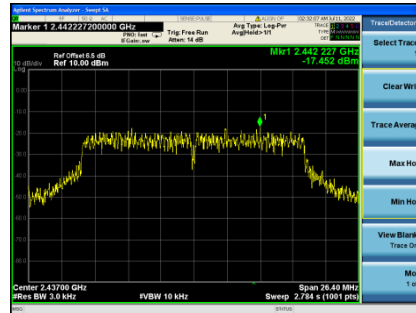

CH11

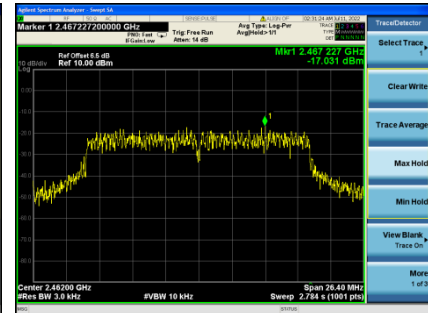

TX N (HT20) Mode_Ant 2

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-19.36	8	PASS
06	2437	-18.56	8	PASS
11	2462	-18.22	8	PASS

TX N (HT20) Mode_Total


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-15.67	8	PASS
06	2437	-14.96	8	PASS
11	2462	-14.57	8	PASS

Note: For MIMO mode: Directional gain=GANT +10log(N)dBi =3.42dBi


TX N (HT40) Mode_Ant 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
03	2412	-19.476	8	PASS
06	2437	-19.532	8	PASS
09	2452	-20.410	8	PASS


CH03

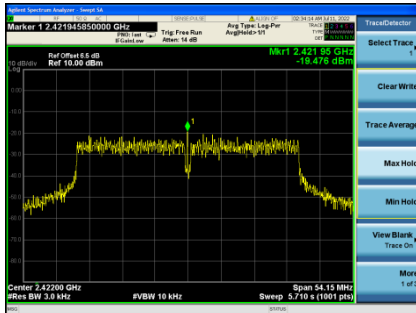

CH06

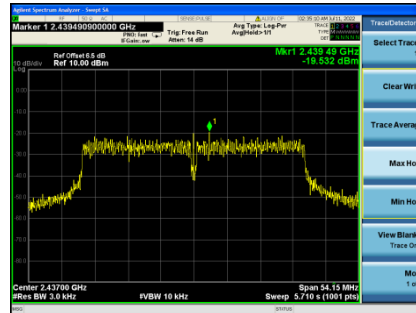

CH09

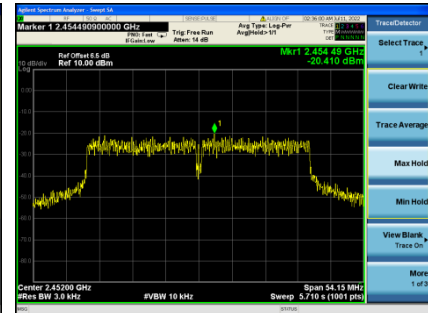

TX N (HT40) Mode_Ant 2

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
03	2412	-20.211	8	PASS
06	2437	-20.025	8	PASS
09	2452	-20.557	8	PASS

TX N (HT40) Mode_Total

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
03	2412	-16.82	8	PASS
06	2437	-16.76	8	PASS
09	2452	-17.47	8	PASS

Note: For MIMO mode: Directional gain=GANT +10log(N)dBi =3.42dBi

10 FREQUENCY STABILITY MEASUREMENT

10.1 LIMIT

RSS-Gen			
Section	Test Item	Limit	Frequency Range (MHz)
RSS-Gen 6.11	Frequency Stability	Specified in the user's manual	2412-2462

10.2 TEST PROCEDURE AND SETTING


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Sweep Time	Auto

10.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2022/05/23	2023/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A	N/A
4	Temperature conditioning	Guan Jian.HTH1000	-20-130℃	GJ1000-10D001	N/A	N/A
5	DC Power Supply	G.KE	IPR-10010D	010931954	N/A	N/A

10.4 TEST SETUP

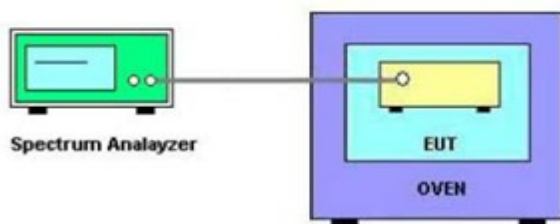

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

	Temperature vs. Frequency Stability	
Voltage	Temperature	Measurement Frequency (MHz)
5.0V	(°C)	2412
	-20	2412.0095
	25	2412.0087
	50	2412.0085
3.7V	25	2412.0080
Max. Deviation (MHz)		0.0095
Max. Deviation (ppm)		3.94

Note: 3.7V is the end point voltage, and products below 3.7V will cease working.

END OF TEST REPORT