



FCC PART 15.407

TEST REPORT

For

Skspruce Technologies Inc.

1732 North 1st St Suite 220, San Jose, CA

FCC ID: 2ACKD-WIA3200

Report Type: Original Report	Product Name: Indoor Access Point
Test Engineer: Fidel Zhou <i>Fidel Zhou</i>	
Report Number: RSC140417003	
Report Date: 2014-09-18	
Henry Ding <i>Henry Ding</i>	
Reviewed By: EMC Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Chengdu) 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com	

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(s)/GRANT(s).....	4
TEST METHODOLOGY	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT UNDER TEST (EUT) GENERAL DESCRIPTION	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP.....	8
SUMMARY OF TEST RESULTS.....	10
FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	15
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST EQUIPMENT LIST AND DETAILS	15
TEST PROCEDURE	16
TEST RESULTS SUMMARY	16
TEST DATA.....	16
FCC §15.209, §15.205 & §15.407(b) (1) (4) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS.....	19
APPLICABLE STANDARD	19
MEASUREMENT UNCERTAINTY	19
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS	21
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
TEST RESULTS SUMMARY	22
TEST DATA.....	22
FCC §15.407(b) (1) (2) (3) (4) – BAND EDGE.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS	29
TEST DATA.....	30

FCC §15.407(a) (1) (3) & (e) – 26dB & 6dB BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST EQUIPMENT LIST AND DETAILS	36
TEST PROCEDURE.....	37
TEST DATA.....	37
FCC §15.407(a) (1) (3)– CONDUCTED TRANSMITTER OUTPUT POWER.....	65
APPLICABLE STANDARD	65
TEST EQUIPMENT LIST AND DETAILS	65
TEST PROCEDURE.....	66
TEST DATA.....	66
FCC §15.407(a) (1) (3) (5) - POWER SPECTRAL DENSITY.....	84
APPLICABLE STANDARD	84
TEST PROCEDURE.....	84
TEST EQUIPMENT LIST AND DETAILS	85
TEST DATA.....	85

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Skyspruce Technologies Inc.*'s product, model number: *WIA3200 (FCC ID: 2ACKD-WIA3200)* or ("EUT") in this report is a *Indoor Access Point*, which was measured approximately: 19.6cm (W) x 16.6cm (D) x 3.4cm (H), rated input voltage: DC 48 V from adapter. The operating frequency is 5150~5250MHz, 5725~5850MHz.

Adapter:

Manufacturer: PoE Injector

Model: PSE801

Input: AC 100--240V 50/60Hz

Output: DC 48--56V

**All measurement and test data in this report were gathered from final production sample, serial number: 8112013110600150 (provided by the Applicant). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2014-04-11, and EUT complied with test requirement.*

Objective

This type approval report is prepared on behalf of *Skyspruce Technologies Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 submissions with FCC ID: 2ACKD-WIA3200.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Chengdu).

Test Facility

The test site used by BACL to collect test data is located in the 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on July 31, 2009. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The operating frequency range is 5150~5250 MHz and 5725~5850 MHz, the frequencies are 5180 MHz, 5200 MHz, 5240 MHz, 5190 MHz, 5230 MHz for 5150~5250 MHz band. 5745 MHz, 5785 MHz, 5825 MHz, 5755 MHz, 5795 MHz for 5725~5850 MHz band, which was provided by the manufacturer.

EUT Exercise Software

The test was performed under “**art2_ver_2_28_6BIN, SecureCRT & Tftpd32.exe**” which was provided by the manufacturer.

Equipment under Test (EUT) General Description

Applicant	Description	Model Number	Serial Number
Skspruce Technologies Inc.	Indoor Access Point	WIA3200	8112013110600150

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
IBM	PC	8176	99Y7315
DELL	Monitor	SK-8815	9161649
IBM	Keyboard	KM-110X	XBK133000993
Logitech	Mouse	M-U0004	810-001808
TOSHIBA	Mobile Hard Disk	V6700-A500	1297FH0YSRE8
EPSON	Printer	B261A	GXSK285854

External I/O Cable


Cable Description	Length (m)	From	To
Shielded VGA cable	1.5	PC	Monitor
Unshielded LAN cable	1.0	PC	EUT
Shielded RS232 cable	2.5	PC	EUT
Shielded Mouse cable	1.5	PC	Mouse
Shielded Keyboard cable	1.5	PC	Keyboard
Shielded RS232 Cable	1.5	PC	Printer
Shielded USB Cable	0.5	PC	Mobile Hard Disk

Block Diagram of Test Setup

For AC Line Conducted Emissions:

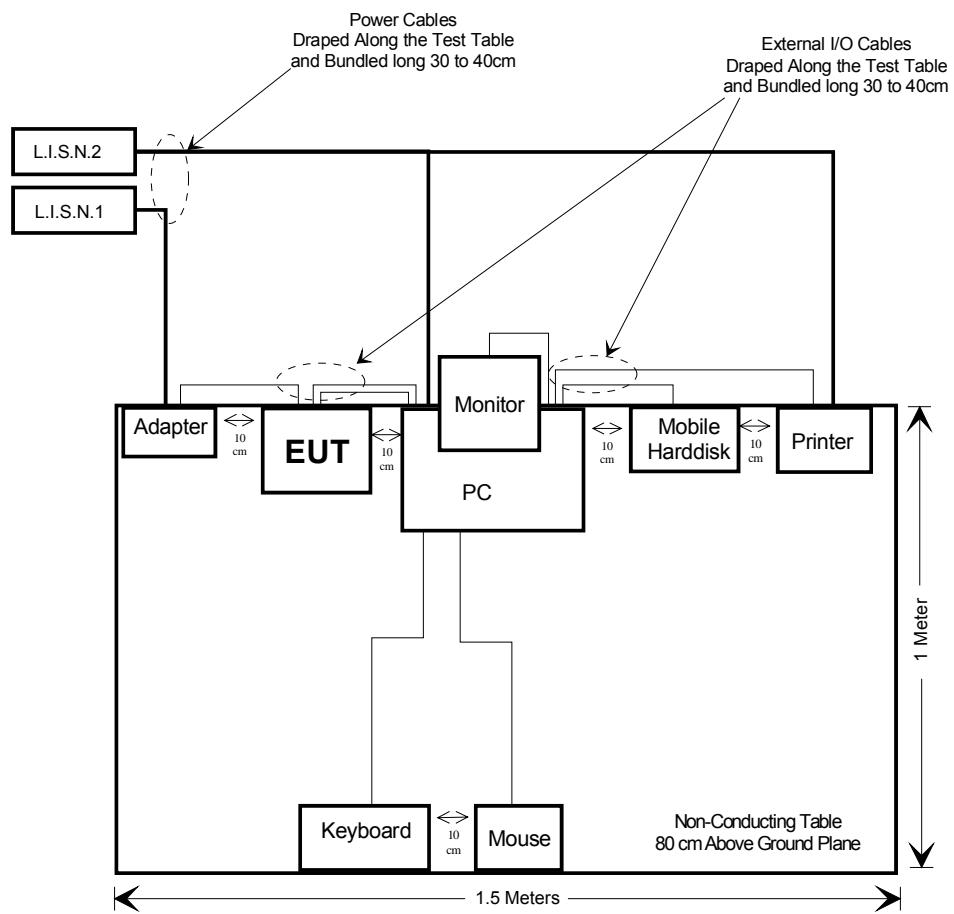

For Spurious Emissions:

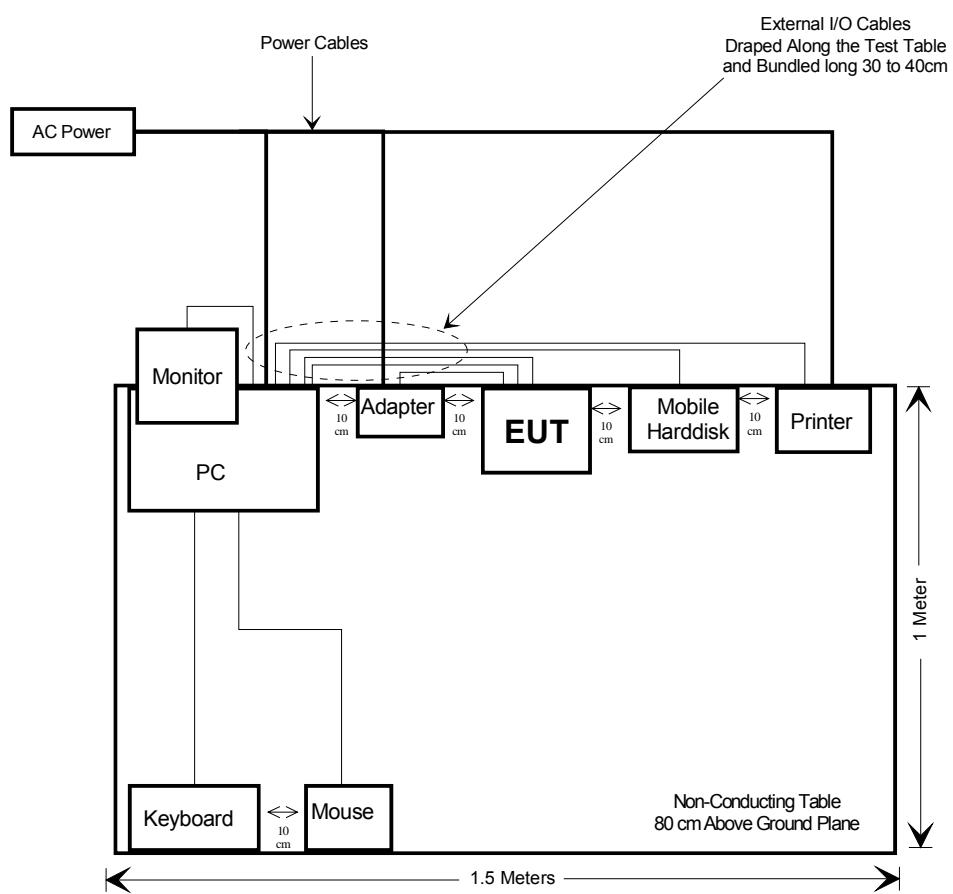

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1),(4),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(2), (3),(4)	Band Edge	Compliance
§15.407(a) (1),(3) & (e)	26dB & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3),(5)	Power Spectral Density	Compliance

FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

DTS Band:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412	3	2.00	20.44	110.66	20	0.044	1.0
802.11g	2412	3	2.00	20.19	104.47	20	0.041	1.0
802.11n HT20	2412	3	2.00	20.05	101.16	20	0.040	1.0
802.11n HT40	2437	3	2.00	19.99	99.77	20	0.040	1.0

UNII Band:

5150-5250 MHz

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11a	5240	3	2.00	20.82	120.78	20	0.048	1.0
802.11n HT20	5180	3	2.00	20.66	116.41	20	0.046	1.0
802.11n HT40	5190	3	2.00	20.20	104.71	20	0.042	1.0

5725-5850 MHz

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11a	5825	3	2.00	17.43	55.34	20	0.022	1.0
802.11n HT20	5745	3	2.00	20.33	107.89	20	0.043	1.0
802.11n HT40	5755	3	2.00	20.34	108.14	20	0.043	1.0

According to KDB 447498 D01 General RF exposure guidance v05r02, EUT has 5GHz and 2.4GHz transmitting simultaneously. So the sum of MPE ratio for four antennas is 0.092 which is less than 1.0, So the collocation exposure exclusion applies.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has four PCB antennas, which were attached to the EUT, and complied with 15.203, the maximum gain is 3.0 dBi in 2400-2483.5MHz, 5150-5250MHz and 5725-5850MHz band, please refer to the EUT internal photos.

Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp}_r of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp}_r of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_r)$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_r)$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Chengdu) is 3.17 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}_r

Measurement	U_{cisp}_r
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

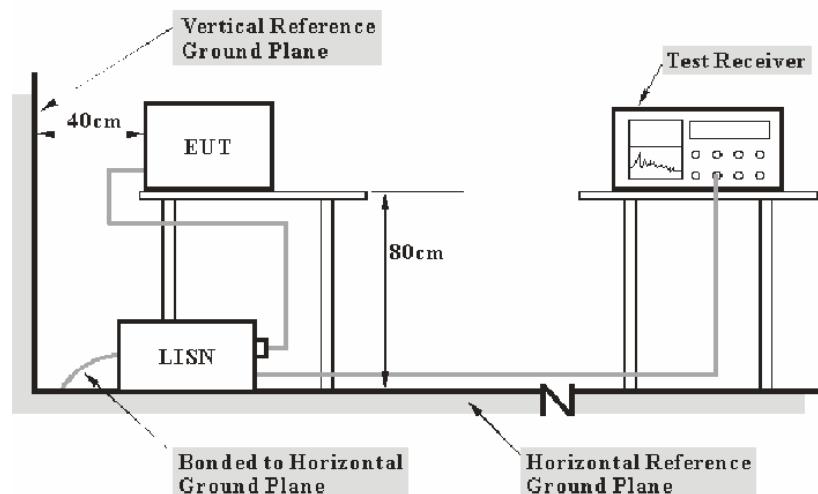

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

Bay Area Compliance Laboratories Corp. (Chengdu)

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

DC 48V was used by the EUT through AC adapter.

Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$
$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2013-08-22	2014-08-21
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.06	2013-07-31	2014-07-30
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.12	2014-02-08	2015-02-07

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

0.5 dB at 18.677000 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	31 °C
Relative Humidity:	46 %
ATM Pressure:	100.0 kPa

The testing was performed by Fidel Zhou on 2014-06-19.


Test Mode: Transmitting

AC 120V/60 Hz, Line

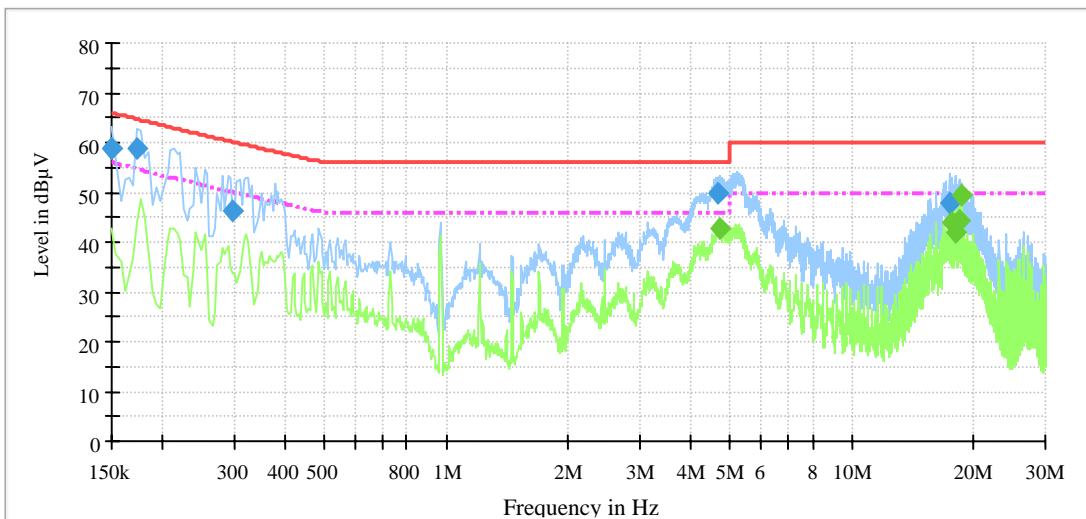

AC Line Conducted Emissions				Limit dB μ V	Margin dB
Frequency MHz	Corrected Amplitude (dB μ V)	Detector (QP/AV)	Phase (Line/Neutral)		
0.150000	58.7	QP	Line	66.0	7.3
0.150000	58.7	QP	Line	66.0	7.3
0.173000	59.0	QP	Line	64.7	5.7
0.297000	46.4	QP	Line	60.1	13.8
4.685000	49.6	QP	Line	56.0	6.4
17.465000	47.8	QP	Line	60.0	12.2
4.721000	42.7	AV	Line	46.0	3.3
17.709000	43.9	AV	Line	50.0	6.1
17.949000	42.1	AV	Line	50.0	7.9
18.057000	43.5	AV	Line	50.0	6.5
18.437000	44.3	AV	Line	50.0	5.7
18.677000	49.5	AV	Line	50.0	*0.5

AC 120V/60 Hz, Neutral

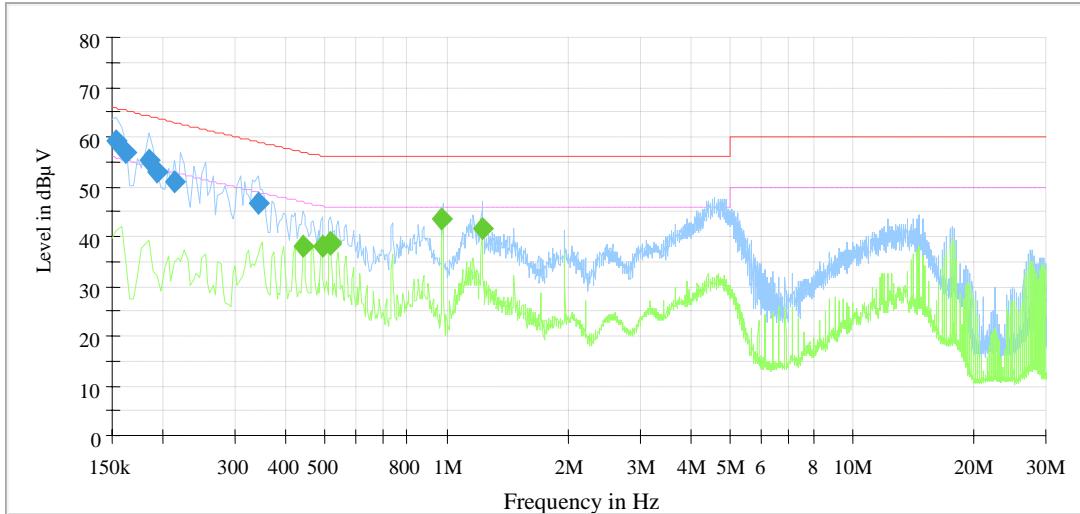

AC Line Conducted Emissions				Limit dB μ V	Margin dB
Frequency MHz	Corrected Amplitude (dB μ V)	Detector (QP/AV)	Phase (Line/Neutral)		
0.154000	59.3	QP	Neutral	65.8	6.4
0.162000	56.7	QP	Neutral	65.3	8.6
0.185000	55.3	QP	Neutral	64.1	8.8
0.193000	52.8	QP	Neutral	63.8	11.0
0.213000	50.8	QP	Neutral	62.9	12.1
0.345000	46.5	QP	Neutral	58.9	12.4
0.445000	38.2	AV	Neutral	46.9	8.7
0.493000	38.1	AV	Neutral	46.1	8.0
0.517000	38.9	AV	Neutral	46.0	7.1
0.517000	38.4	AV	Neutral	46.0	7.6
0.977000	43.6	AV	Neutral	46.0	*2.4
1.225000	41.7	AV	Neutral	46.0	4.3

*Within measurement uncertainty!

Note: EUT transmitting simultaneously with 2.4G and 5G radio frequency and supports intelligent radio frequency management functionalities.

FCC §15.209, §15.205 & §15.407(b) (1) (4) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to KDB 789033 D01 General UNII Test Procedures v01, emission shall be computed as:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2, \text{ for } d = 3 \text{ meters.}$$

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:

30M~200MHz: ± 4.7 dB ;

200M~1GHz: ± 6.0 dB ;

1G-6GHz: ± 5.13 dB;


6G~40GHz: ± 5.47 dB;

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

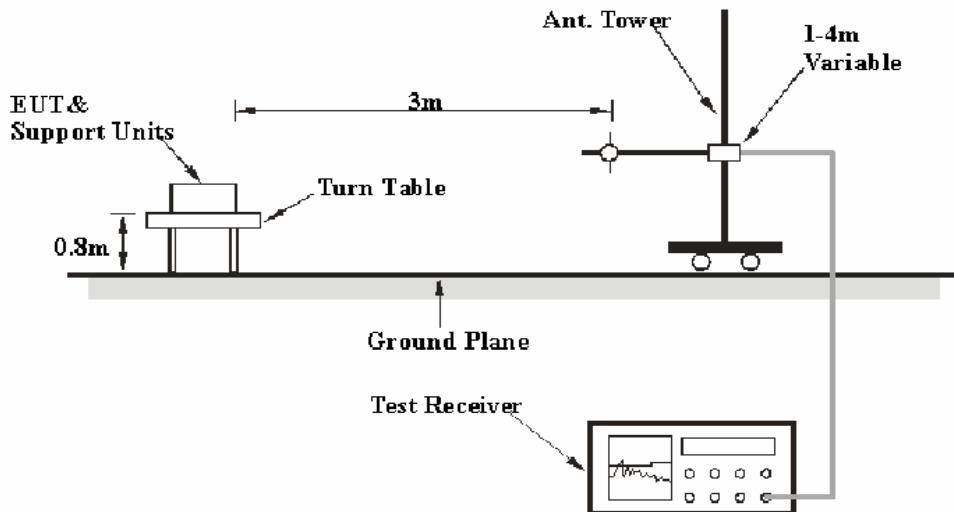

Above 1 GHz:

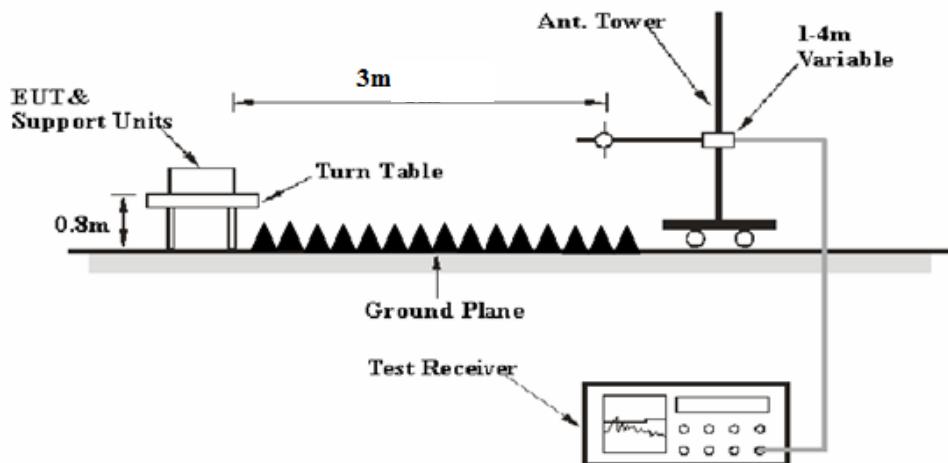

The radiated emission tests were performed in the 3 meters semi-anechoic chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

DC 48V used by the EUT through AC adapter.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1 GHz.

According to ANSI C63.4-2003, the above 1GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m.

Extrapolation result (dB μ V/m) = Corrected Amplitude (dB μ V/m) -6dB

Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2013-07-23	2014-07-22
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2013-08-22	2014-08-21
Sunol Sciences	Broadband Antenna	JB3	A101808	2014-04-10	2015-04-09
Rohde & Schwarz	Spectrum Analyzer	FSL18	100180	2014-06-23	2015-06-22
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2013-10-17	2014-10-16
Rohde&Schwarz	Spectrum Analyzer	FSP38	100478	2014-06-16	2015-06-15
EM TEST	Horn Antenna	3115	003-6076	2014-04-09	2015-04-08
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2015-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2014-06-16	2015-06-15
HP	Amplifier	8449B	3008A00277	2013-07-31	2014-07-30
EMCT	Semi-Anechoic Chamber	966	N/A	2013-03-13	2016-03-12

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Receiver Reading + Cable loss + Antenna Factor – Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit-Corrected Amplitude

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude-9.54

Margin = Limit- Extrapolation result

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

11.43 dB at 17355 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	27 °C & 23 °C
Relative Humidity:	58 % & 57 %
ATM Pressure:	100.1 kPa & 100.5 kPa

The testing was performed by Fidel Zhou on 2014-07-10 & 2014-07-11.

Test mode: transmitting

5150-5250 MHz

For 802.11a mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5180 MHz										
a) 10360	42.62	PK	V	37.40	6.70	26.20	60.52	50.98	68.20	17.22
a) 10360	28.34	AV	V	37.40	6.70	26.20	46.24	36.70	54.00	17.30
a) 15540	40.07	PK	V	39.40	6.95	26.10	60.32	50.78	68.20	17.42
a) 15540	26.53	AV	V	39.40	6.95	26.10	46.78	37.24	54.00	16.76
280	42.83	QP	V	13.37	0.26	26.20	30.26	/	46.00	15.74
5200 MHz										
a) 10400	40.54	PK	V	37.40	6.70	26.20	58.44	48.90	68.20	19.30
a) 10400	27.56	AV	V	37.40	6.70	26.20	45.46	35.92	54.00	18.08
a) 15600	39.46	PK	V	39.40	6.95	26.10	59.71	50.17	68.20	18.03
a) 15600	26.49	AV	V	39.40	6.95	26.10	46.74	37.20	54.00	16.80
280	42.13	QP	V	13.37	0.26	26.20	29.56	/	46.00	16.44
5240 MHz										
a) 10480	40.72	PK	V	37.40	6.70	26.20	58.62	49.08	68.20	19.12
a) 10480	28.27	AV	V	37.40	6.70	26.20	46.17	36.63	54.00	17.37
a) 15720	39.65	PK	V	39.40	6.95	26.10	59.90	50.36	68.20	17.84
a) 15720	25.91	AV	V	39.40	6.95	26.10	46.16	36.62	54.00	17.38
280	43.64	QP	V	13.37	0.26	26.20	31.07	/	46.00	14.93

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude - 9.54

Margin = Limit - Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required,
the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

For 802.11n HT20 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5180 MHz										
a) 10360	39.59	PK	V	37.40	6.70	26.20	57.49	47.95	68.20	20.25
a) 10360	27.47	AV	V	37.40	6.70	26.20	45.37	35.83	54.00	18.17
a) 15540	36.82	PK	V	39.40	6.95	26.10	57.07	47.53	68.20	20.67
a) 15540	25.53	AV	V	39.40	6.95	26.10	45.78	36.24	54.00	17.76
280	42.83	QP	V	13.37	0.26	26.20	30.26	/	46.00	15.74
5200 MHz										
a) 10400	40.12	PK	V	37.40	6.70	26.20	58.02	48.48	68.20	19.72
a) 10400	28.03	AV	V	37.40	6.70	26.20	45.93	36.39	54.00	17.61
a) 15600	37.26	PK	V	39.40	6.95	26.10	57.51	47.97	68.20	20.23
a) 15600	25.49	AV	V	39.40	6.95	26.10	45.74	36.20	54.00	17.80
280	41.95	QP	V	13.37	0.26	26.20	29.38	/	46.00	16.62
5240 MHz										
a) 10480	41.22	PK	V	37.40	6.70	26.20	59.12	49.58	68.20	18.62
a) 10480	29.14	AV	V	37.40	6.70	26.20	47.04	37.50	54.00	16.50
a) 15720	37.62	PK	V	39.40	6.95	26.10	57.87	48.33	68.20	19.87
a) 15720	24.85	AV	V	39.40	6.95	26.10	45.10	35.56	54.00	18.44
280	42.33	QP	V	13.37	0.26	26.20	29.76	/	46.00	16.24

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude-9.54

Margin = Limit- Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required, the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

Bay Area Compliance Laboratories Corp. (Chengdu)

For 802.11n HT40 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5190 MHz										
a) 10380	40.66	PK	V	37.40	6.70	26.20	58.56	49.02	68.20	19.18
a) 10380	28.38	AV	V	37.40	6.70	26.20	46.28	36.74	54.00	17.26
a) 15570	35.28	PK	V	39.40	6.95	26.10	55.53	45.99	68.20	22.21
a) 15570	25.64	AV	V	39.40	6.95	26.10	45.89	36.35	54.00	17.65
280	41.52	QP	V	13.37	0.26	26.20	28.95	/	46.00	17.05
5230 MHz										
a) 10460	40.34	PK	V	37.40	6.70	26.20	58.24	48.70	68.20	19.50
a) 10460	28.44	AV	V	37.40	6.70	26.20	46.34	36.80	54.00	17.20
a) 15690	36.54	PK	V	39.40	6.95	26.10	56.79	47.25	68.20	20.95
a) 15690	25.87	AV	V	39.40	6.95	26.10	46.12	36.58	54.00	17.42
280	42.25	QP	V	13.37	0.26	26.20	29.68	/	46.00	16.32

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude - 9.54

Margin = Limit - Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required,
the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

5725-5850 MHz

For 802.11a mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5745 MHz										
a) 11490	45.42	PK	V	38.00	6.34	23.80	65.96	56.42	68.20	11.78
a) 11490	28	AV	V	38.00	6.34	23.80	48.54	39.00	54.00	15.00
a) 17235	35.82	PK	V	43.00	6.45	22.40	62.87	53.33	68.20	14.87
a) 17235	19.96	AV	V	43.00	6.45	22.40	47.01	37.47	54.00	16.53
280	45.62	QP	V	13.37	0.26	26.20	33.05	/	46.00	12.95
5785 MHz										
a) 11570	45.26	PK	V	38.00	6.34	23.80	65.80	56.26	68.20	11.94
a) 11570	28.32	AV	V	38.00	6.34	23.80	48.86	39.32	54.00	14.68
a) 17355	36.56	PK	V	43.00	6.45	22.40	63.61	54.07	68.20	14.13
a) 17355	20.88	AV	V	43.00	6.45	22.40	47.93	38.39	54.00	15.61
280	46.12	QP	V	13.37	0.26	26.20	33.55	/	46.00	12.45
5825 MHz										
a) 11650	44.85	PK	V	38.00	6.34	23.80	65.39	55.85	68.20	12.35
a) 11650	27.95	AV	V	38.00	6.34	23.80	48.49	38.95	54.00	15.05
a) 17475	36.38	PK	V	43.00	6.45	22.40	63.43	53.89	68.20	14.31
a) 17475	20.09	AV	V	43.00	6.45	22.40	47.14	37.60	54.00	16.40
280	45.27	QP	V	13.37	0.26	26.20	32.70	/	46.00	13.30

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude-9.54

Margin = Limit- Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required, the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

Bay Area Compliance Laboratories Corp. (Chengdu)

For 802.11n HT20 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5745 MHz										
a) 11490	41.89	PK	V	38.00	6.34	23.80	62.43	52.89	68.20	15.31
a) 11490	27.63	AV	V	38.00	6.34	23.80	48.17	38.63	54.00	15.37
a) 17235	33.33	PK	V	43.00	6.45	22.40	60.38	50.84	68.20	17.36
a) 17235	19.62	AV	V	43.00	6.45	22.40	46.67	37.13	54.00	16.87
280	45.33	QP	V	13.37	0.26	26.20	32.76	/	46.00	13.24
5785 MHz										
a) 11570	40.78	PK	V	38.00	6.34	23.80	61.32	51.78	68.20	16.42
a) 11570	28.44	AV	V	38.00	6.34	23.80	48.98	39.44	54.00	14.56
a) 17355	39.26	PK	V	43.00	6.45	22.40	66.31	56.77	68.20	11.43
a) 17355	24.28	AV	V	43.00	6.45	22.40	51.33	41.79	54.00	12.21
280	46.62	QP	V	13.37	0.26	26.20	34.05	/	46.00	11.95
5825 MHz										
a) 11650	40.28	PK	V	38.00	6.34	23.80	60.82	51.28	68.20	16.92
a) 11650	26.56	AV	V	38.00	6.34	23.80	47.10	37.56	54.00	16.44
a) 17475	34.16	PK	V	43.00	6.45	22.40	61.21	51.67	68.20	16.53
a) 17475	19.52	AV	V	43.00	6.45	22.40	46.57	37.03	54.00	16.97
280	45.89	QP	V	13.37	0.26	26.20	33.32	/	46.00	12.68

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude - 9.54

Margin = Limit - Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required, the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

Bay Area Compliance Laboratories Corp. (Chengdu)

For 802.11n HT40 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
5755 MHz										
a) 11510	37.66	PK	V	38.00	6.34	23.80	58.20	48.66	68.20	19.54
a) 11510	25.48	AV	V	38.00	6.34	23.80	46.02	36.48	54.00	17.52
a) 17265	32.62	PK	V	43.00	6.45	22.40	59.67	50.13	68.20	18.07
a) 17265	19.46	AV	V	43.00	6.45	22.40	46.51	36.97	54.00	17.03
280	44.12	QP	V	13.37	0.26	26.20	31.55	/	46.00	14.45
5795 MHz										
a) 11590	38.45	PK	V	38.00	6.34	23.80	58.99	49.45	68.20	18.75
a) 11590	25.85	AV	V	38.00	6.34	23.80	46.39	36.85	54.00	17.15
a) 17385	33.64	PK	V	43.00	6.45	22.40	60.69	51.15	68.20	17.05
a) 17385	19.82	AV	V	43.00	6.45	22.40	46.87	37.33	54.00	16.67
280	44.83	QP	V	13.37	0.26	26.20	32.26	/	46.00	13.74

Note a):

The distance between EUT and receiving antenna is for 1 m.

Extrapolation result = Corrected Amplitude-9.54

Margin = Limit- Extrapolation result

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required,
the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m

FCC §15.407(b) (1) (2) (3) (4) – BAND EDGE

Applicable Standard

FCC §15.407 (b) (1), (2), (3), (4);

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Test Procedure

Radiated emission method, according to KDB 789033 D02 General UNII Test Procedures New Rules v01, clause II.G 3 d) (i), marker-delta method, as described in ANSI C63.10

Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2013-07-23	2014-07-22
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2013-08-22	2014-08-21
Sunol Sciences	Broadband Antenna	JB3	A101808	2014-04-10	2015-04-09
Rohde & Schwarz	Spectrum Analyzer	FSL18	100180	2014-06-23	2015-06-22
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2013-10-17	2014-10-16
EM TEST	Horn Antenna	3115	003-6076	2014-04-09	2015-04-08
WEINSCHEL ENGINEERING	Attenuator	1A 10dB	AB1165	2013-10-31	2014-10-30
Mini-circuits	Filter	VHF-3100+	31306	2014-07-15	2015-07-14
Mini-circuits	Filter	VHF-6010+	31336	2014-07-15	2015-07-14
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2013-11-18	2014-11-17
EMCT	Semi-Anechoic Chamber	966	N/A	2013-03-13	2016-03-12

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28 °C
Relative Humidity:	58 %
ATM Pressure:	100.8 kPa

The testing was performed by Fidel Zhou on 2014-07-15.

Test mode: transmitting

5150-5250 MHz:

For 802.11a mode

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
(MHz)	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
5180 MHz									
5180	65.83	PK	H	31.80	4.86	0.00	102.49	N/A	N/A
5180	60.34	AV	H	31.80	4.86	0.00	97.00	N/A	N/A
5180	68.59	PK	V	31.80	4.86	0.00	105.25	N/A	N/A
5180	63.67	AV	V	31.80	4.86	0.00	100.33	N/A	N/A
5149.95	48.46	PK	V	31.40	4.80	26.70	57.96	68.20	10.24
5149.95	32.64	AV	V	31.40	4.80	26.70	42.14	54.00	11.86
5350.05	39.01	PK	V	31.50	4.86	26.70	48.67	68.20	19.53
5350.05	28.08	AV	V	31.50	4.86	26.70	37.74	54.00	16.26
5200 MHz									
5200	65.63	PK	H	31.80	4.86	0.00	102.29	N/A	N/A
5200	60.24	AV	H	31.80	4.86	0.00	96.90	N/A	N/A
5200	68.24	PK	V	31.80	4.86	0.00	104.90	N/A	N/A
5200	63.33	AV	V	31.80	4.86	0.00	99.99	N/A	N/A
5149.95	39.26	PK	V	31.40	4.80	26.70	48.76	68.20	19.44
5149.95	28.01	AV	V	31.40	4.80	26.70	37.51	54.00	16.49
5350.05	38.62	PK	V	31.50	4.86	26.70	48.28	68.20	19.92
5350.05	27.97	AV	V	31.50	4.86	26.70	37.63	54.00	16.37
5240 MHz									
5240	65.95	PK	H	31.80	4.86	0.00	102.61	N/A	N/A
5240	60.91	AV	H	31.80	4.86	0.00	97.57	N/A	N/A
5240	68.38	PK	V	31.80	4.86	0.00	105.04	N/A	N/A
5240	63.24	AV	V	31.80	4.86	0.00	99.90	N/A	N/A
5149.95	40.95	PK	V	31.40	4.80	26.70	50.45	68.20	17.75
5149.95	29.39	AV	V	31.40	4.80	26.70	38.89	54.00	15.11
5350.05	49.69	PK	V	31.50	4.86	26.70	59.35	68.20	8.85
5350.05	34.37	AV	V	31.50	4.86	26.70	44.03	54.00	9.97

For 802.11n HT20 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
5180 MHz									
5180	62.24	PK	H	31.80	4.86	0.00	98.90	N/A	N/A
5180	59.89	AV	H	31.80	4.86	0.00	96.55	N/A	N/A
5180	67.35	PK	V	31.80	4.86	0.00	104.01	N/A	N/A
5180	64.32	AV	V	31.80	4.86	0.00	100.98	N/A	N/A
5149.95	48.05	PK	V	31.40	4.80	26.70	57.55	68.20	10.65
5149.95	35.07	AV	V	31.40	4.80	26.70	44.57	54.00	9.43
5350.05	37.89	PK	V	31.50	4.86	26.70	47.55	68.20	20.65
5350.05	27.67	AV	V	31.50	4.86	26.70	37.33	54.00	16.67
5200 MHz									
5200	62.96	PK	H	31.80	4.86	0.00	99.62	N/A	N/A
5200	58.69	AV	H	31.80	4.86	0.00	95.35	N/A	N/A
5200	66.64	PK	V	31.80	4.86	0.00	103.30	N/A	N/A
5200	63.82	AV	V	31.80	4.86	0.00	100.48	N/A	N/A
5149.95	38.47	PK	V	31.40	4.80	26.70	47.97	68.20	20.23
5149.95	28.26	AV	V	31.40	4.80	26.70	37.76	54.00	16.24
5350.05	37.47	PK	V	31.50	4.86	26.70	47.13	68.20	21.07
5350.05	27.24	AV	V	31.50	4.86	26.70	36.90	54.00	17.10
5240 MHz									
5240	65.95	PK	H	31.80	4.86	0.00	102.61	N/A	N/A
5240	60.91	AV	H	31.80	4.86	0.00	97.57	N/A	N/A
5240	68.38	PK	V	31.80	4.86	0.00	105.04	N/A	N/A
5240	63.24	AV	V	31.80	4.86	0.00	99.90	N/A	N/A
5149.95	38.27	PK	V	31.40	4.80	26.70	47.77	68.20	20.43
5149.95	26.62	AV	V	31.40	4.80	26.70	36.12	54.00	17.88
5350.05	45.69	PK	V	31.50	4.86	26.70	55.35	68.20	12.85
5350.05	29.89	AV	V	31.50	4.86	26.70	39.55	54.00	14.45

Bay Area Compliance Laboratories Corp. (Chengdu)

For 802.11n HT40 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
5190 MHz									
5190	61.62	PK	H	31.80	4.86	0.00	98.28	N/A	N/A
5190	57.21	AV	H	31.80	4.86	0.00	93.87	N/A	N/A
5190	64.09	PK	V	31.80	4.86	0.00	100.75	N/A	N/A
5190	59.52	AV	V	31.80	4.86	0.00	96.18	N/A	N/A
5149.95	46.96	PK	V	31.40	4.80	26.70	56.46	68.20	11.74
5149.95	30.24	AV	V	31.40	4.80	26.70	39.74	54.00	14.26
5350.05	39.59	PK	V	31.50	4.86	26.70	49.25	68.20	18.95
5350.05	28.06	AV	V	31.50	4.86	26.70	37.72	54.00	16.28
5230 MHz									
5230	60.83	PK	H	31.80	4.86	0.00	97.49	N/A	N/A
5230	56.74	AV	H	31.80	4.86	0.00	93.40	N/A	N/A
5230	63.69	PK	V	31.80	4.86	0.00	100.35	N/A	N/A
5230	58.63	AV	V	31.80	4.86	0.00	95.29	N/A	N/A
5149.95	40.26	PK	V	31.40	4.80	26.70	49.76	68.20	18.44
5149.95	27.91	AV	V	31.40	4.80	26.70	37.41	54.00	16.59
5350.05	45.74	PK	V	31.50	4.86	26.70	55.40	68.20	12.80
5350.05	30.96	AV	V	31.50	4.86	26.70	40.62	54.00	13.38

5725-5850 MHz:

For 802.11a mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
5745 MHz									
5745	73.43	PK	H	32.50	4.15	0.00	110.08	N/A	N/A
5745	65.67	AV	H	32.50	4.15	0.00	102.32	N/A	N/A
5745	75.5	PK	V	32.50	4.15	0.00	112.15	N/A	N/A
5745	67.38	AV	V	32.50	4.15	0.00	104.03	N/A	N/A
5724.85	44.04	PK	V	32.50	4.10	26.55	54.09	78.20	24.11
5724.85	31.92	AV	V	32.50	4.10	26.55	41.97	54.00	12.03
5850.15	40.58	PK	V	32.50	4.20	26.55	50.73	78.20	27.47
5850.15	28.12	AV	V	32.50	4.20	26.55	38.27	54.00	15.73
5785 MHz									
5785	73.26	PK	H	32.50	4.15	0.00	109.91	N/A	N/A
5785	66.59	AV	H	32.50	4.15	0.00	103.24	N/A	N/A
5785	74.16	PK	V	32.50	4.15	0.00	110.81	N/A	N/A
5785	67.42	AV	V	32.50	4.15	0.00	104.07	N/A	N/A
5724.95	40.21	PK	V	32.50	4.10	26.55	50.26	78.20	27.94
5724.95	30.14	AV	V	32.50	4.10	26.55	40.19	54.00	13.81
5850.1	40.28	PK	V	32.50	4.20	26.55	50.43	78.20	27.77
5850.1	30.44	AV	V	32.50	4.20	26.55	40.59	54.00	13.41
5825 MHz									
5825	74.11	PK	H	32.50	4.15	0.00	110.76	N/A	N/A
5825	67.27	AV	H	32.50	4.15	0.00	103.92	N/A	N/A
5825	73.62	PK	V	32.50	4.15	0.00	110.27	N/A	N/A
5825	68.28	AV	V	32.50	4.15	0.00	104.93	N/A	N/A
5724.95	40.27	PK	V	32.50	4.10	26.55	50.32	78.20	27.88
5724.95	29.04	AV	V	32.50	4.10	26.55	39.09	54.00	14.91
5850.25	45.52	PK	V	32.50	4.20	26.55	55.67	78.20	22.53
5850.25	33.08	AV	V	32.50	4.20	26.55	43.23	54.00	10.77

For 802.11n HT20 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
5745 MHz									
5745	70.02	PK	H	32.50	4.15	0.00	106.67	N/A	N/A
5745	62.32	AV	H	32.50	4.15	0.00	98.97	N/A	N/A
5745	68.74	PK	V	32.50	4.15	0.00	105.39	N/A	N/A
5745	60.73	AV	V	32.50	4.15	0.00	97.38	N/A	N/A
5723.85	43.36	PK	V	32.50	4.10	26.55	53.41	78.20	24.79
5723.85	31.31	AV	V	32.50	4.10	26.55	41.36	54.00	12.64
5850.15	41.78	PK	V	32.50	4.20	26.55	51.93	78.20	26.27
5850.15	30.89	AV	V	32.50	4.20	26.55	41.04	54.00	12.96
5785 MHz									
5785	71.29	PK	H	32.50	4.15	0.00	107.94	N/A	N/A
5785	62.39	AV	H	32.50	4.15	0.00	99.04	N/A	N/A
5785	69.26	PK	V	32.50	4.15	0.00	105.91	N/A	N/A
5785	60.58	AV	V	32.50	4.15	0.00	97.23	N/A	N/A
5722.75	40.52	PK	V	32.50	4.10	26.55	50.57	78.20	27.63
5722.75	30.13	AV	V	32.50	4.10	26.55	40.18	54.00	13.82
5851.35	41.59	PK	V	32.50	4.20	26.55	51.74	78.20	26.46
5851.35	31.44	AV	V	32.50	4.20	26.55	41.59	54.00	12.41
5825 MHz									
5825	71.86	PK	H	32.50	4.15	0.00	108.51	N/A	N/A
5825	61.26	AV	H	32.50	4.15	0.00	97.91	N/A	N/A
5825	69.37	PK	V	32.50	4.15	0.00	106.02	N/A	N/A
5825	60.99	AV	V	32.50	4.15	0.00	97.64	N/A	N/A
5724.85	41.22	PK	V	32.50	4.10	26.55	51.27	78.20	26.93
5724.85	30.24	AV	V	32.50	4.10	26.55	40.29	54.00	13.71
5850.25	43.32	PK	V	32.50	4.20	26.55	53.47	78.20	24.73
5850.25	30.69	AV	V	32.50	4.20	26.55	40.84	54.00	13.16

For 802.11n HT40 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
5755 MHz									
5755	69.88	PK	H	32.50	4.15	0.00	106.53	N/A	N/A
5755	62.45	AV	H	32.50	4.15	0.00	99.10	N/A	N/A
5755	66.28	PK	V	32.50	4.15	0.00	102.93	N/A	N/A
5755	60.19	AV	V	32.50	4.15	0.00	96.84	N/A	N/A
5724.9	43.72	PK	V	32.50	4.10	26.55	53.77	78.20	24.43
5724.9	31.26	AV	V	32.50	4.10	26.55	41.31	54.00	12.69
5850.75	40.04	PK	V	32.50	4.20	26.55	50.19	78.20	28.01
5850.75	30.07	AV	V	32.50	4.20	26.55	40.22	54.00	13.78
5795 MHz									
5795	70.24	PK	H	32.50	4.15	0.00	106.89	N/A	N/A
5795	64.59	AV	H	32.50	4.15	0.00	101.24	N/A	N/A
5795	67.85	PK	V	32.50	4.15	0.00	104.50	N/A	N/A
5795	61.91	AV	V	32.50	4.15	0.00	98.56	N/A	N/A
5724.8	40.86	PK	V	32.50	4.10	26.55	50.91	78.20	27.29
5724.8	30.62	AV	V	32.50	4.10	26.55	40.67	54.00	13.33
5850.55	43.28	PK	V	32.50	4.20	26.55	53.43	78.20	24.77
5850.55	31.29	AV	V	32.50	4.20	26.55	41.44	54.00	12.56

Note:

Corrected Amplitude = Receiver Reading + Cable loss + Antenna Factor – Amplifier Gain
Margin = Limit-Corrected Amplitude

Note: According to KDB 789033 D02 General UNII Test Procedures New Rules v01 required,
the limits is -27dBm(EIRP) = 68.2 dB μ V/m @ 3m
the limits is -17dBm(EIRP) = 78.2 dB μ V/m @ 3m

FCC §15.407(a) (1) (3) & (e) – 26dB & 6dB BANDWIDTH

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2013-10-17	2014-10-16

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3.
 - (a) Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the view button to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
 - (b) Set RBW = 100 kHz and the video bandwidth (VBW) $\geq 3 \times$ RBW. Use a peak detector. Do not use the Max Hold function and auto couple. Rather, use the trace to stabilize the emission. Measure the maximum width of emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.
4. Repeat above procedures until all frequencies measured were complete.

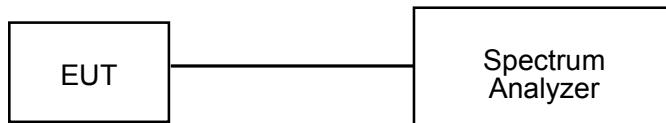

Test Data

Environmental Conditions

Temperature:	28°C, 29 °C & 26 °C
Relative Humidity:	53%, 51% & 58 %
ATM Pressure:	100.6 kPa ,100.9 kPa & 100.9 kPa

The testing was performed by Fidel Zhou on 2014-07-11, 2014-07-14& 2014-07-15.

Temperature:	29 °C
Relative Humidity:	55 %
ATM Pressure:	100.5 kPa

The testing was performed by Fidel Zhou on 2014-07-21.

Test Result:

Pass.
Please refer to the following tables and plots.

Test mode: Transmitting

5150-5250 MHz:


Mode	Frequency (MHz)	26dB Bandwidth (MHz)		OBW (MHz)		Limit (kHz)
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	
802.11a	5180	24.04	24.04	17.15	17.15	>500
	5200	24.04	24.04	17.15	17.07	>500
	5240	24.04	24.04	17.07	17.07	>500
802.11n HT20	5180	24.76	24.24	18.19	18.03	>500
	5200	24.72	24.24	18.19	18.03	>500
	5240	24.72	24.24	18.11	18.11	>500
802.11n HT40	5190	47.01	47.01	37.03	36.91	>500
	5230	47.05	47.01	37.03	37.03	>500

5725-5850 MHz:


Mode	Frequency (MHz)	6dB Bandwidth (MHz)		OBW (MHz)		Limit (kHz)
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	
802.11a	5745	16.67	16.67	17.79	17.87	>500
	5785	16.67	16.67	17.63	17.95	>500
	5825	16.67	16.67	17.63	17.79	>500
802.11n HT20	5745	18.03	17.87	18.83	18.83	>500
	5785	17.87	17.87	18.67	18.75	>500
	5825	17.87	17.87	18.59	18.83	>500
802.11n HT40	5755	36.79	36.79	37.03	36.91	>500
	5795	36.79	36.79	36.91	36.91	>500

5150-5250 MHz:


802.11a mode, Antenna 0: 26 dB + OBW Bandwidth-5180 MHz

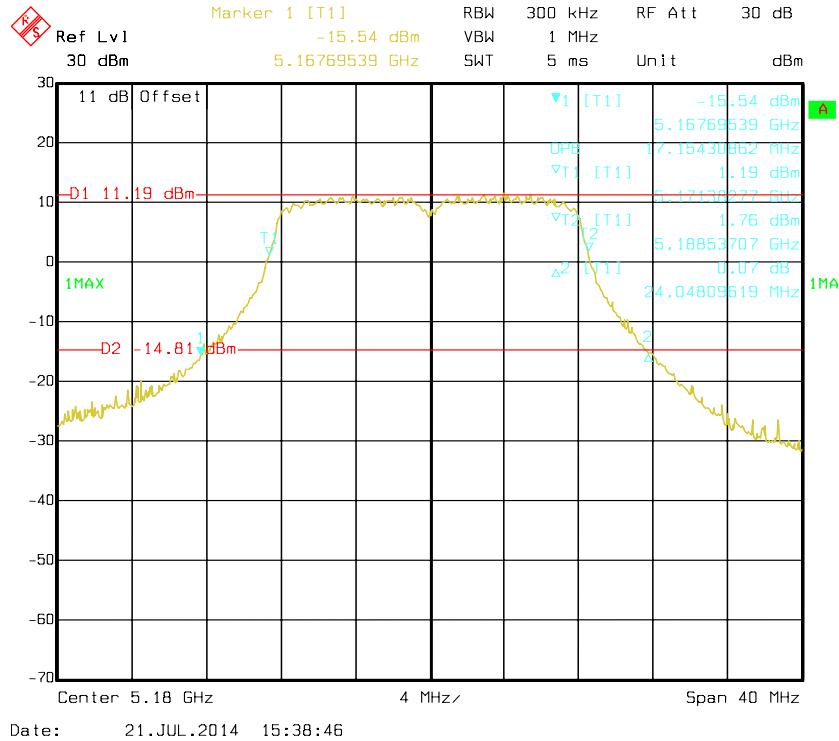


802.11a mode, Antenna 0: 26 dB + OBW Bandwidth-5200 MHz

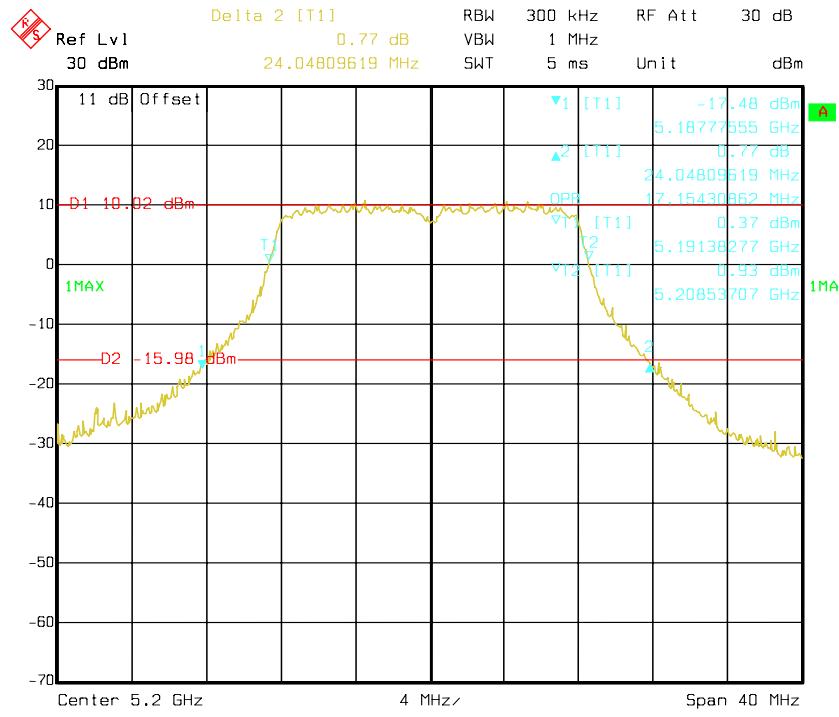


802.11a mode, Antenna 0: 26 dB + OBW Bandwidth-5240 MHz

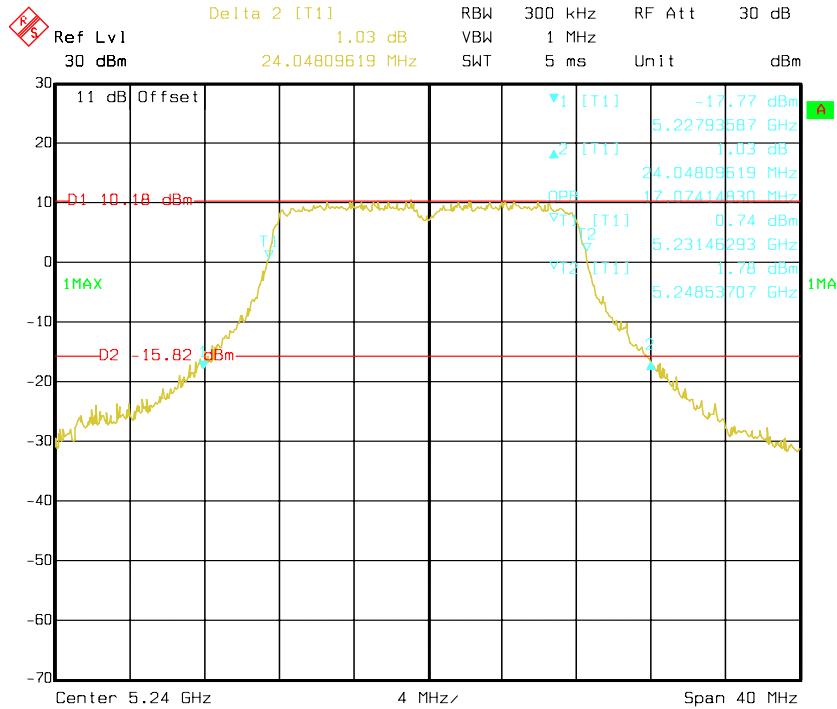

802.11n HT20 mode, Antenna 0: 26 dB + OBW Bandwidth-5180 MHz

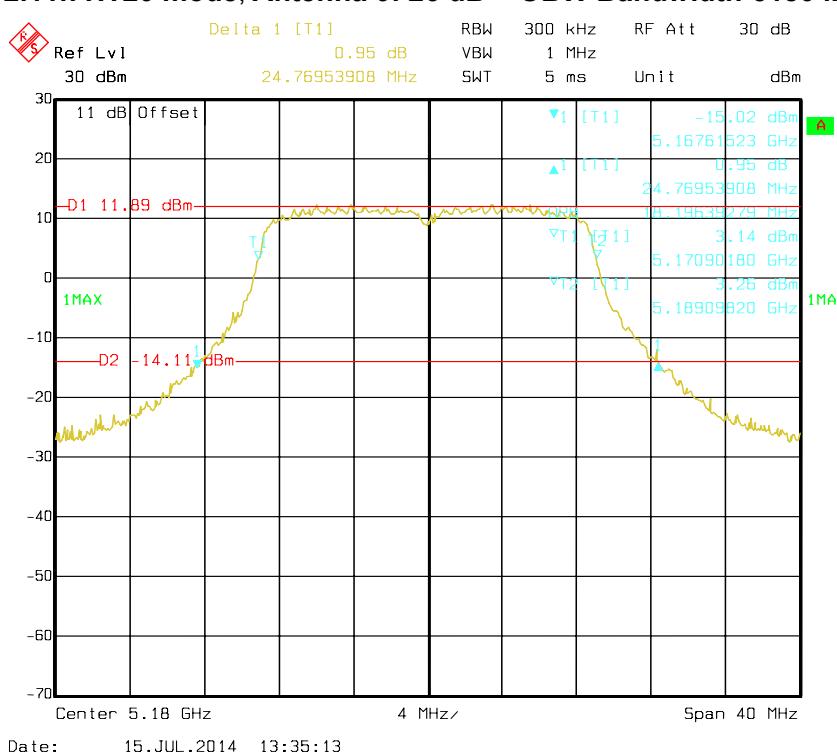


802.11n HT20 mode, Antenna 0: 26 dB + OBW Bandwidth-5200 MHz

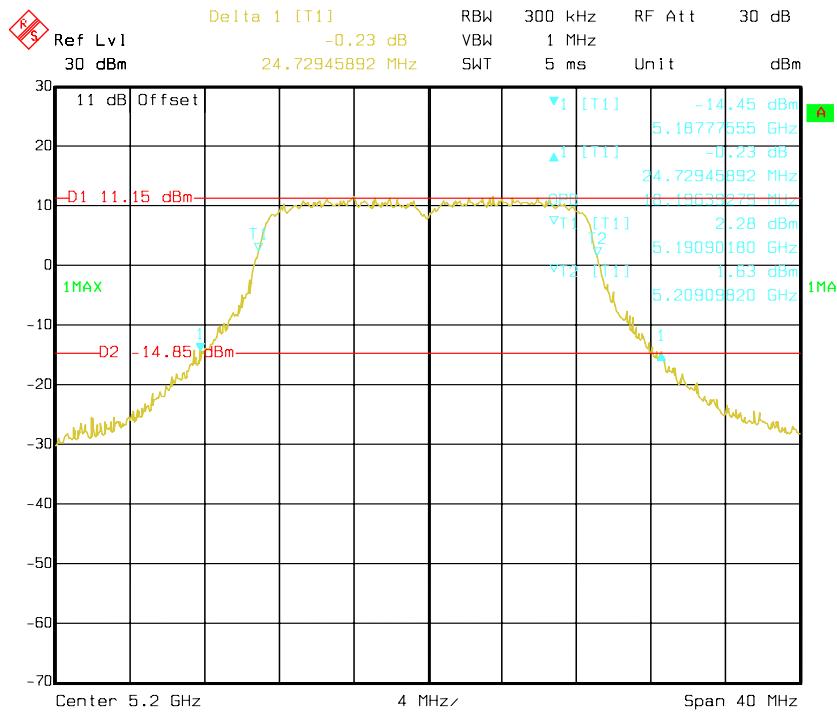


Date: 15.JUL.2014 13:37:53

802.11n HT20 mode, Antenna 0: 26 dB + OBW Bandwidth-5240 MHz

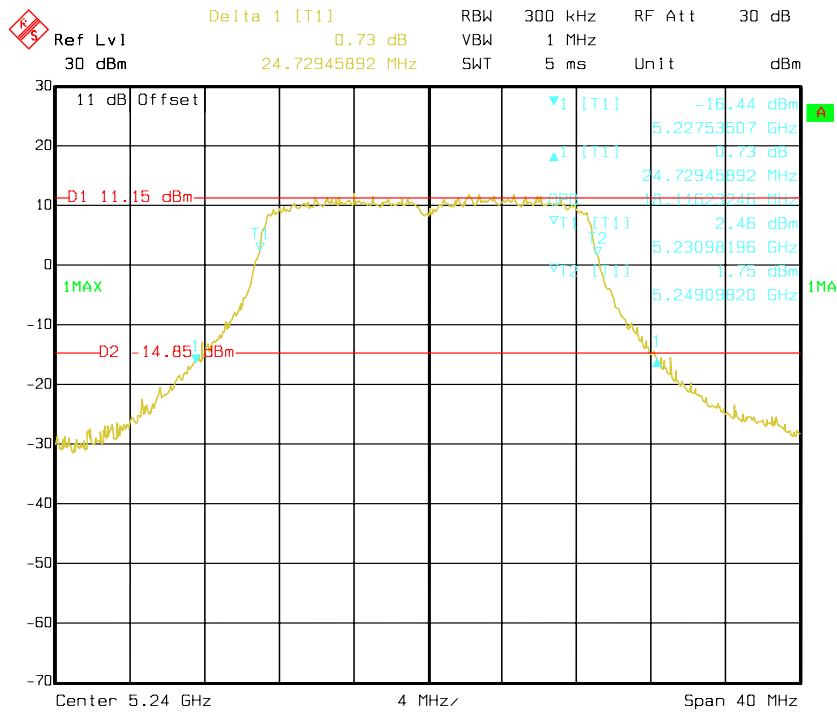


Date: 15.JUL.2014 13:40:38


802.11n HT40 mode, Antenna 0: 26 dB Bandwidth-5190 MHz

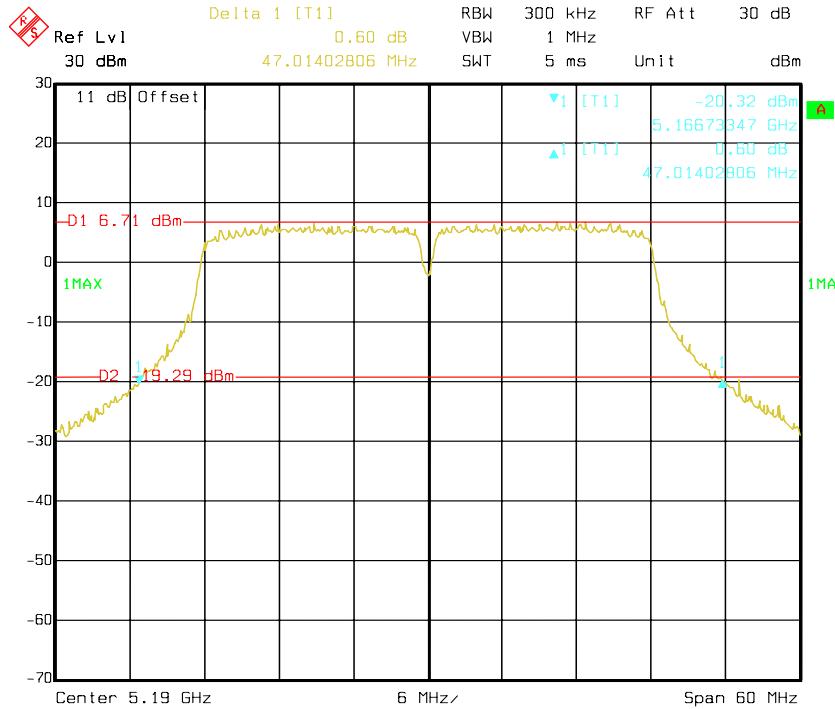

802.11n HT40 mode, Antenna 0: OBW Bandwidth-5190 MHz

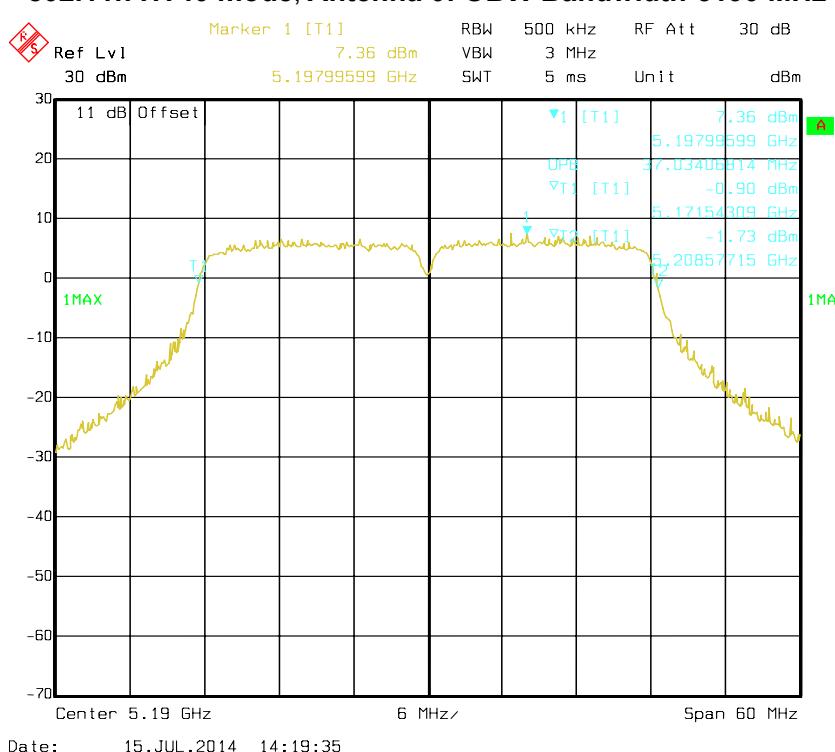


802.11n HT40 mode, Antenna 0: 26 dB Bandwidth-5230 MHz

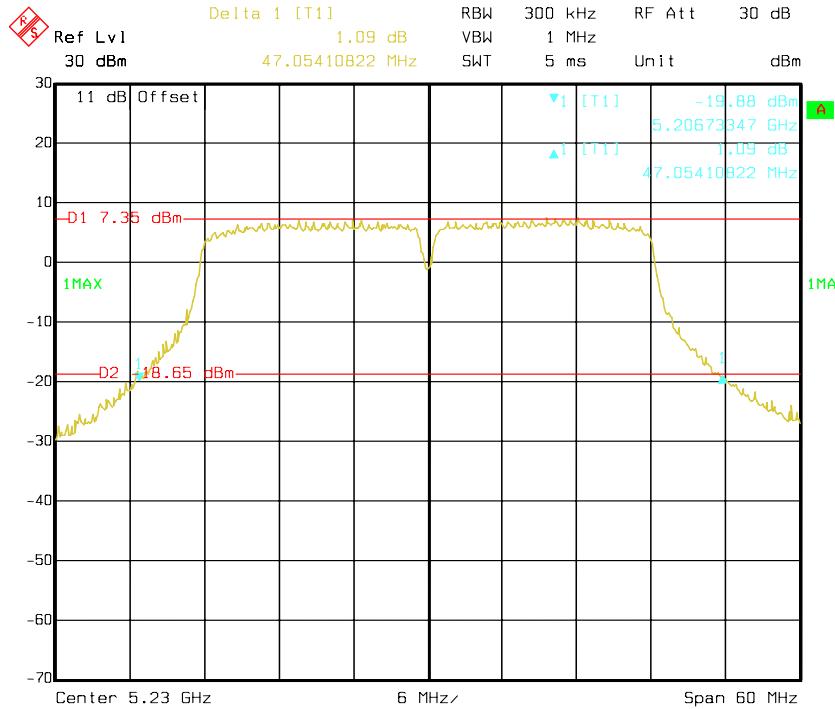


Date: 15.JUL.2014 14:01:33

802.11n HT40 mode, Antenna 0: OBW Bandwidth-5230 MHz

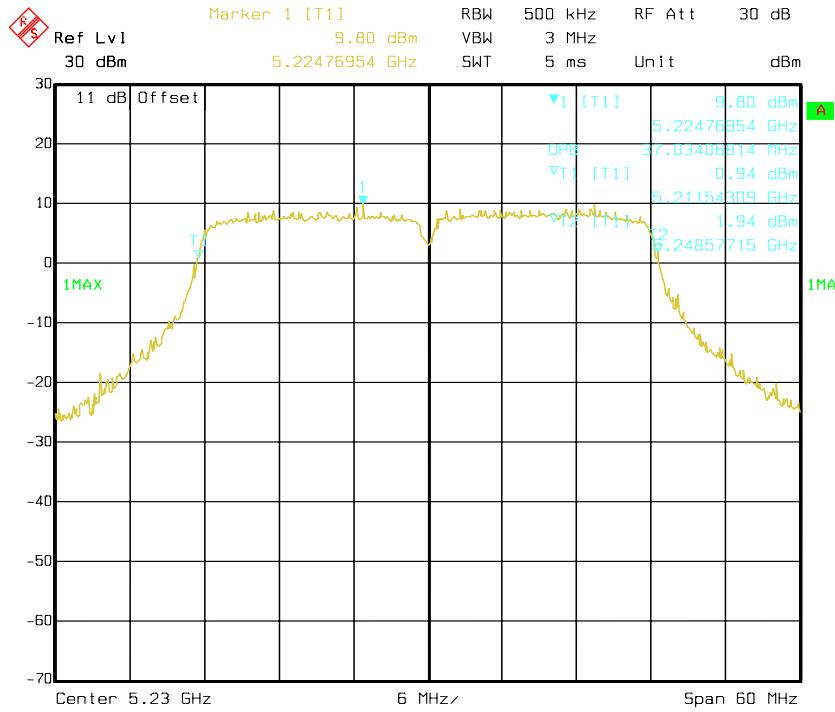


Date: 15.JUL.2014 14:03:59

802.11a mode, Antenna 1: 26 dB + OBW Bandwidth-5180 MHz

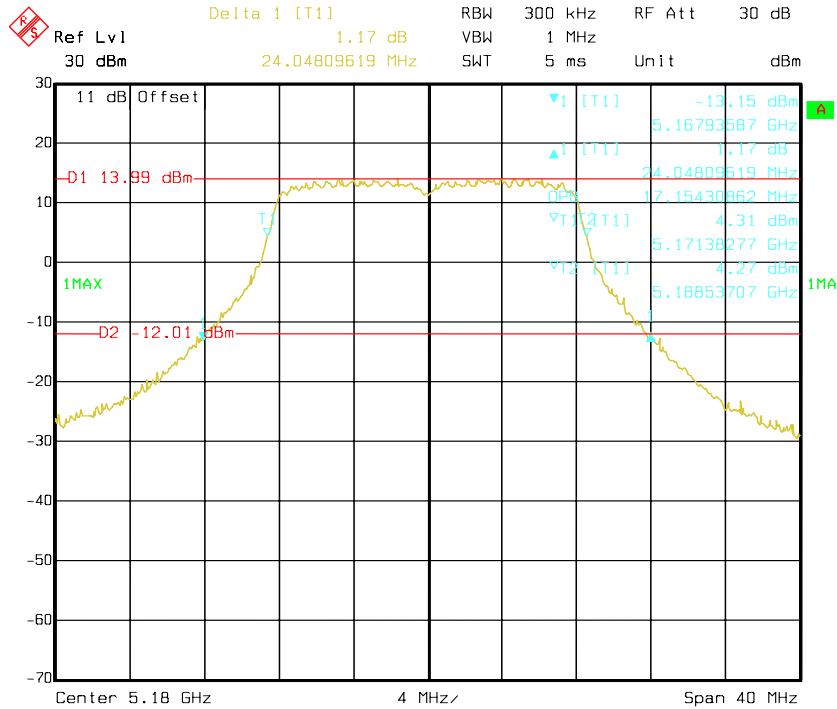


Date: 15.JUL.2014 10:13:24

802.11a mode, Antenna 1: 26 dB + OBW Bandwidth-5200 MHz

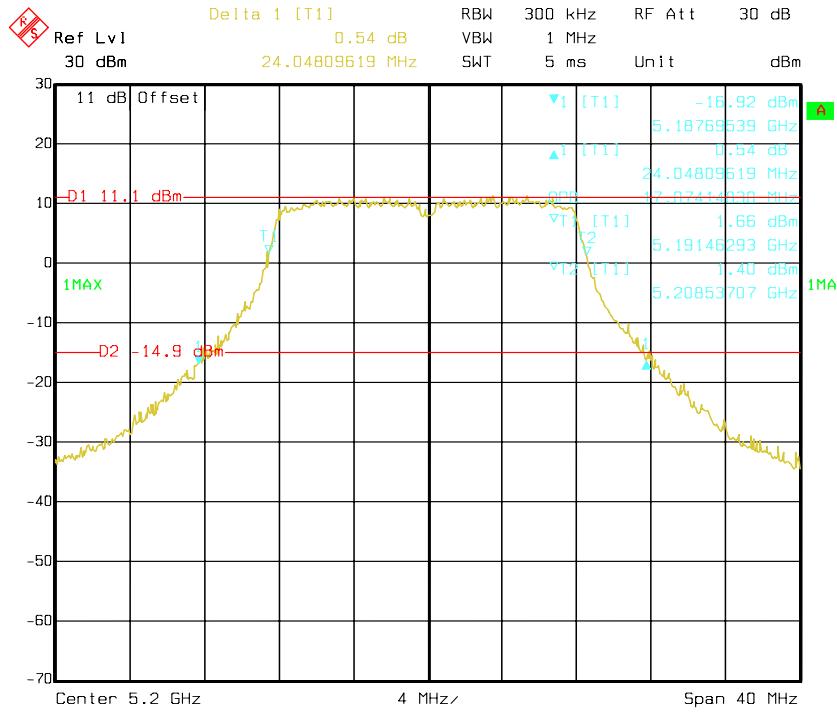


Date: 15.JUL.2014 10:16:33

802.11a mode, Antenna 1: 26 dB + OBW Bandwidth-5240 MHz

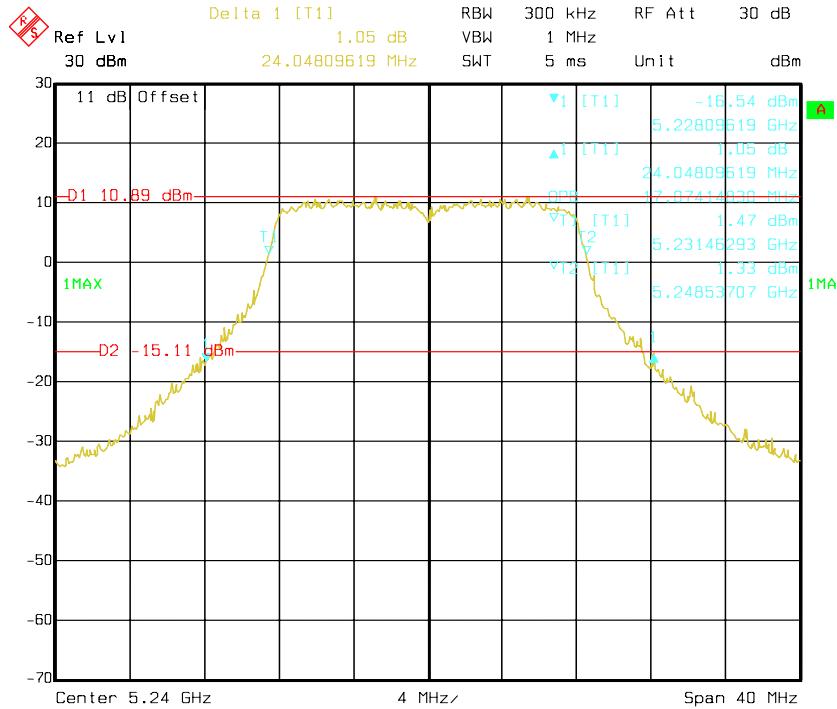


Date: 15.JUL.2014 10:19:54

802.11n HT20 mode, Antenna 1: 26 dB + OBW Bandwidth-5180 MHz

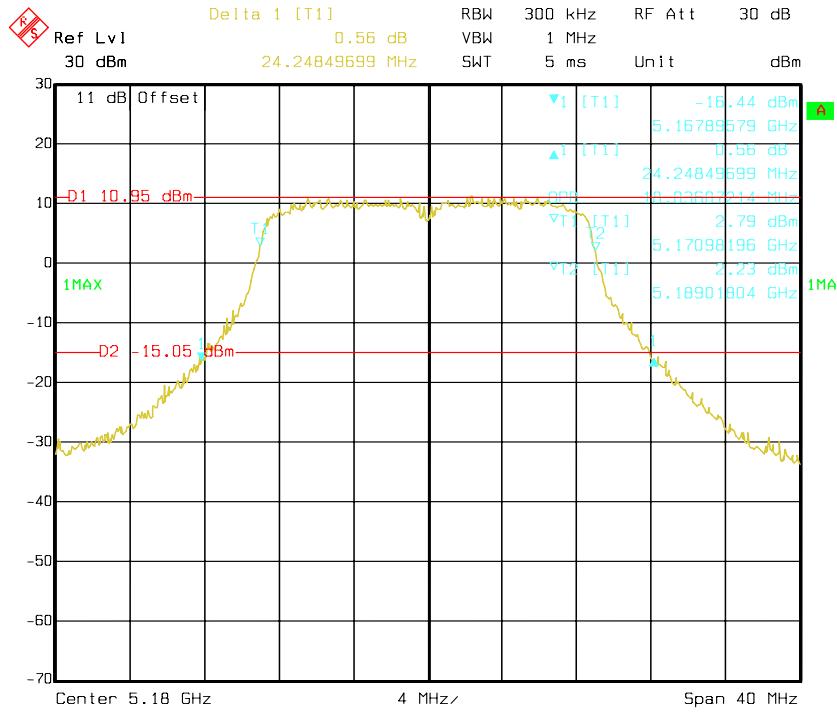


Date: 15.JUL.2014 10:45:21

802.11n HT20 mode, Antenna 1: 26 dB + OBW Bandwidth-5200 MHz

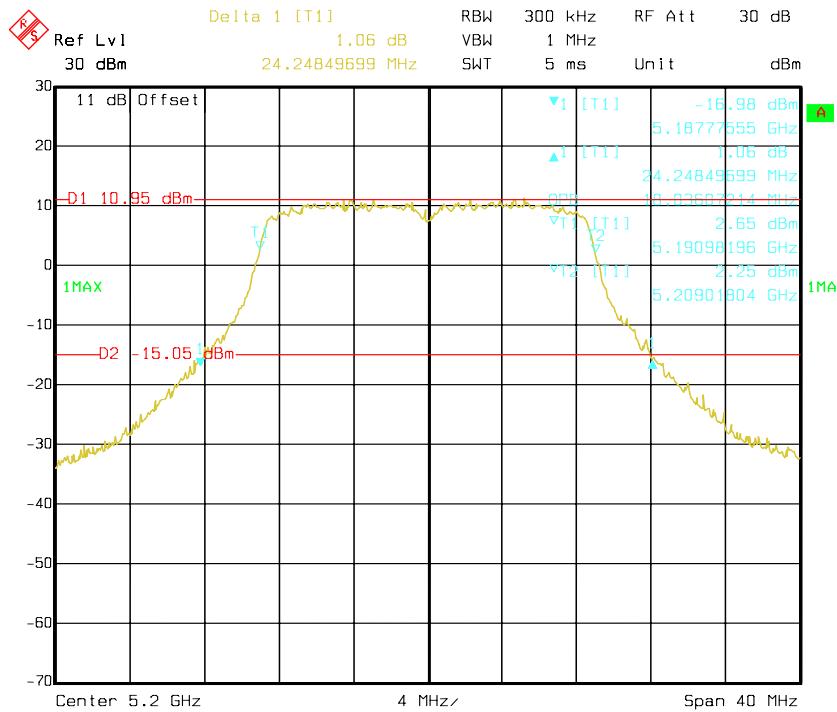


Date: 15.JUL.2014 10:44:07

802.11n HT20 mode, Antenna 1: 26 dB + OBW Bandwidth-5240 MHz

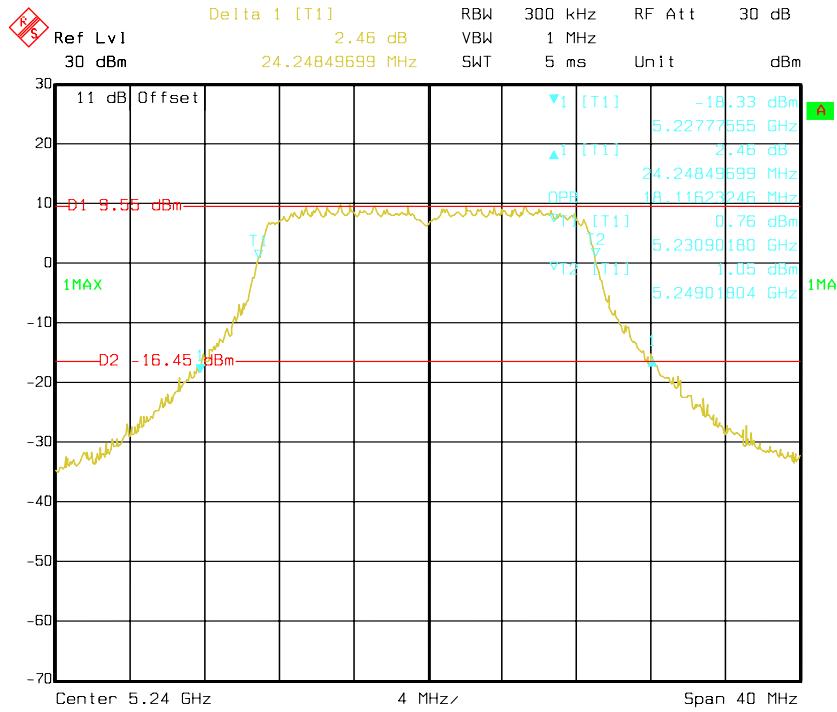


Date: 15.JUL.2014 10:48:26

802.11n HT40 mode, Antenna 1: 26 dB Bandwidth-5190 MHz

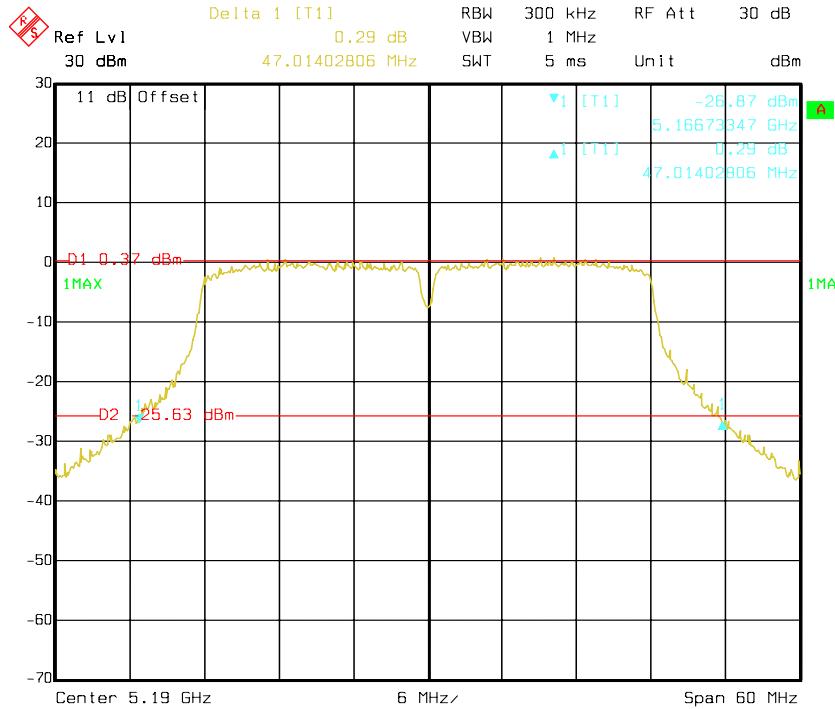


Date: 15.JUL.2014 14:36:06

802.11n HT40 mode, Antenna 1: OBW Bandwidth-5190 MHz

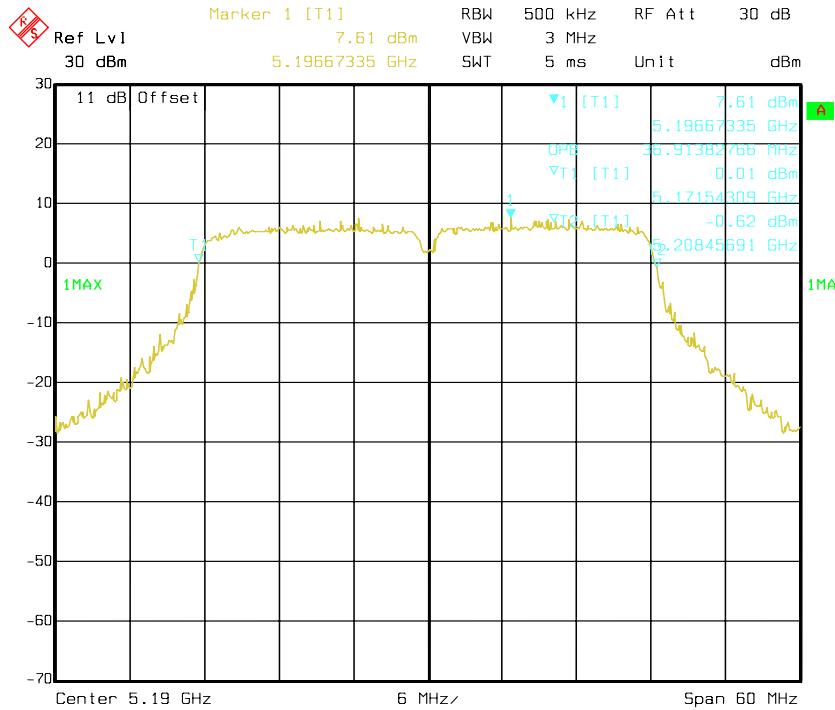


Date: 15.JUL.2014 14:40:54

802.11n HT40 mode, Antenna 1: 26 dB Bandwidth-5230 MHz

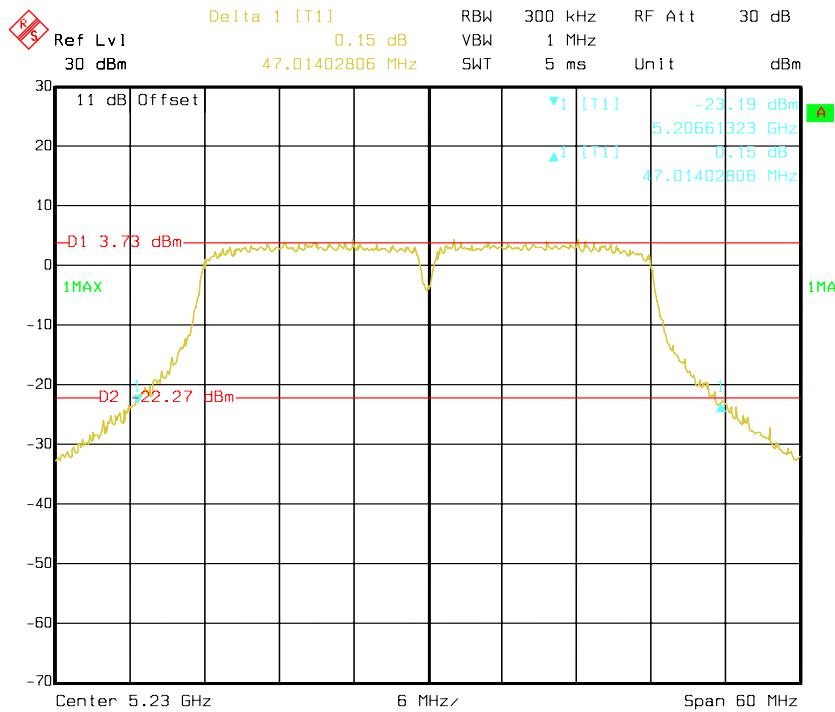

Date: 15.JUL.2014 14:42:41


802.11n HT40 mode, Antenna 1: OBW Bandwidth-5230 MHz

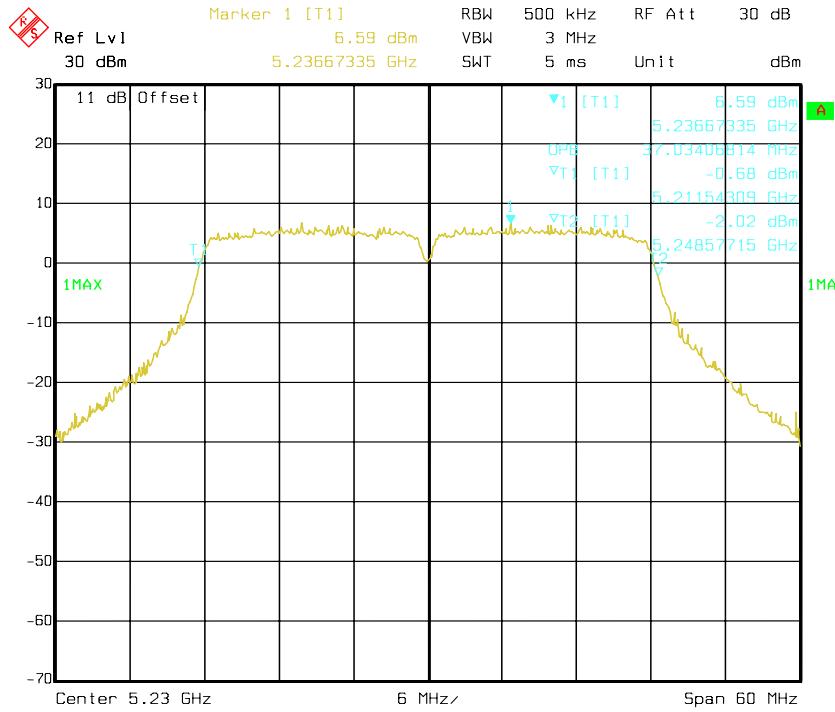


Date: 15.JUL.2014 14:44:14

5725-5850 MHz:


802.11a mode, Antenna 0: 6 dB Bandwidth-5745 MHz

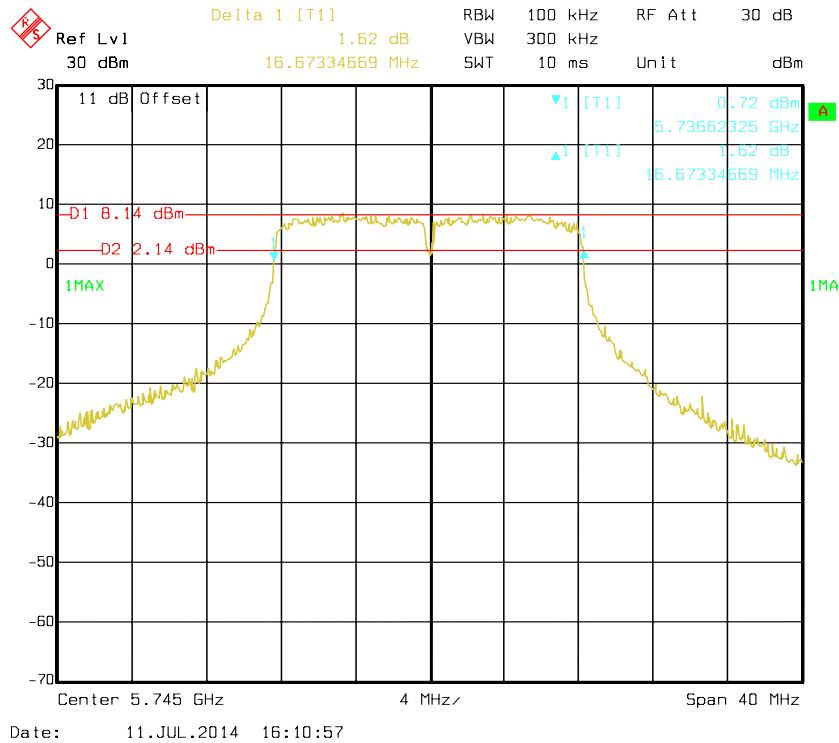

802.11a mode, Antenna 0: OBW Bandwidth-5745 MHz

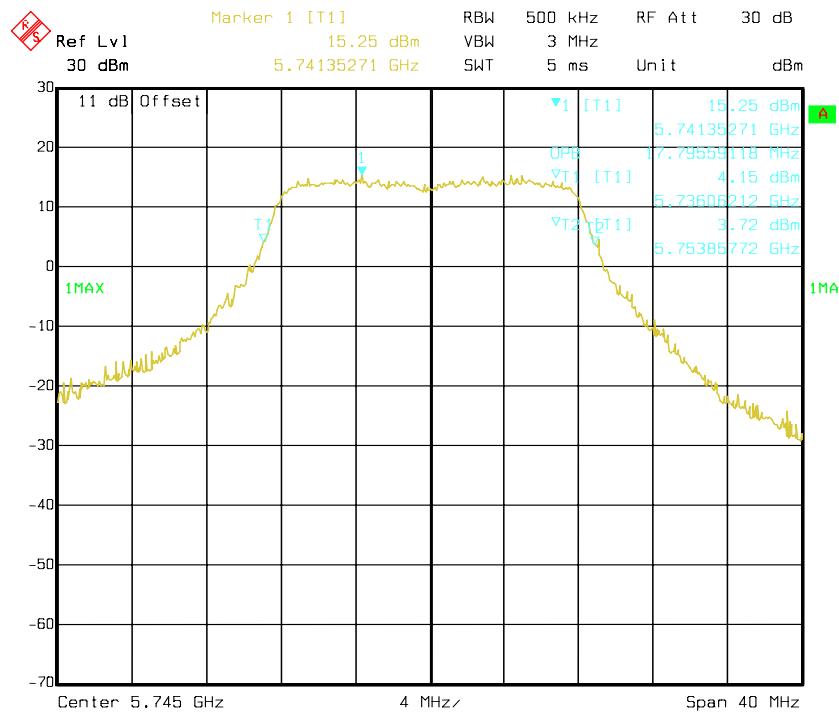


802.11a mode, Antenna 0: 6 dB Bandwidth-5785 MHz

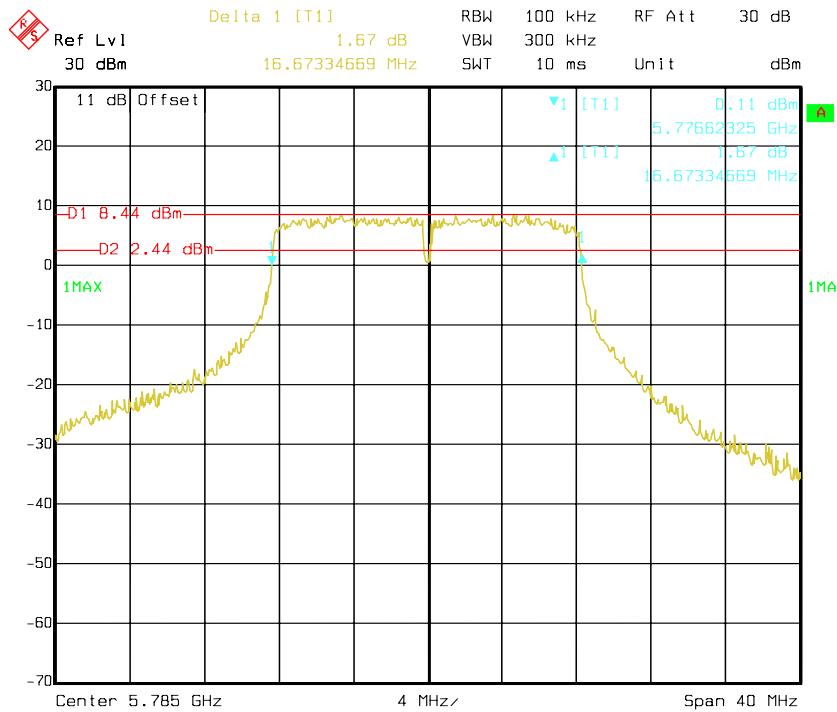


Date: 11.JUL.2014 16:13:08

802.11a mode, Antenna 0: OBW Bandwidth-5785 MHz

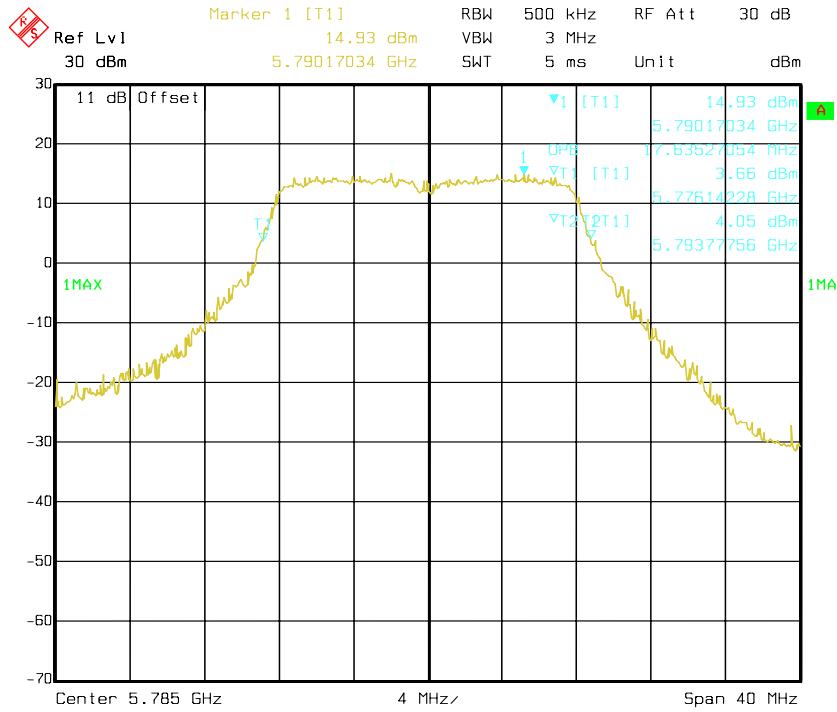


Date: 14.JUL.2014 14:20:20

802.11a mode, Antenna 0: 6 dB Bandwidth-5825 MHz

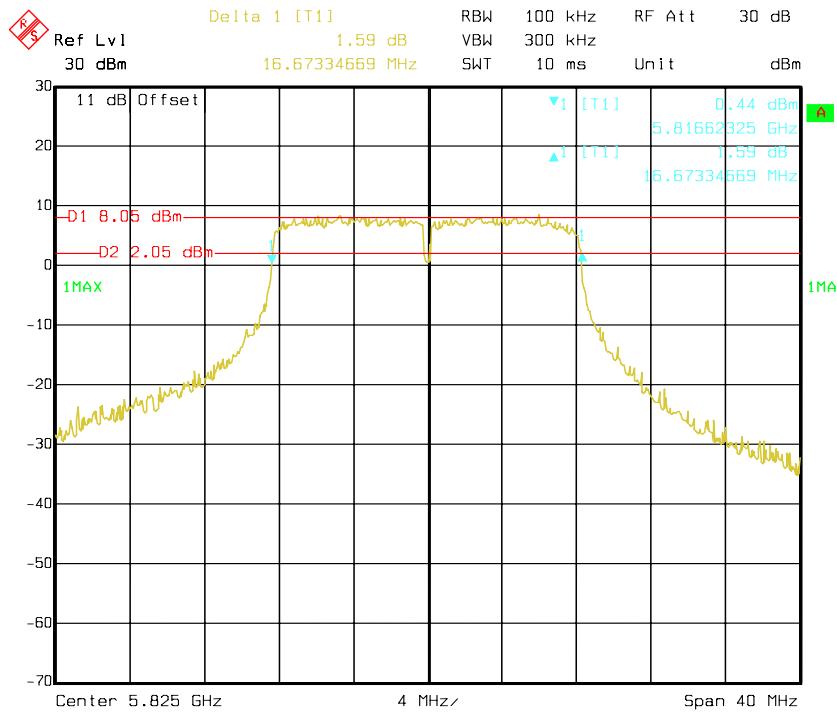


Date: 11.JUL.2014 16:14:11

802.11a mode, Antenna 0: OBW Bandwidth-5825 MHz

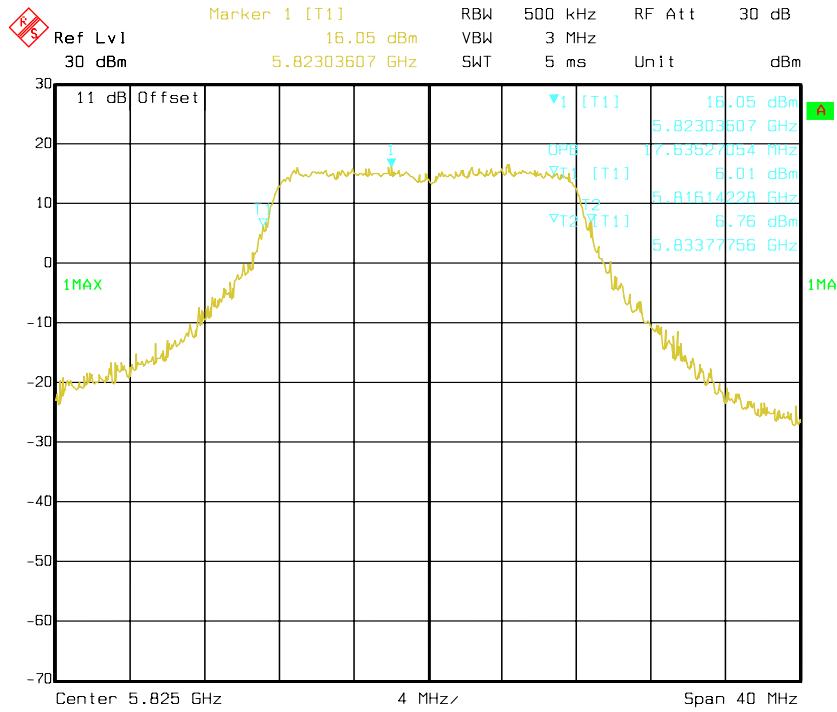


Date: 14.JUL.2014 14:20:50

802.11n HT20 mode, Antenna 0: 6 dB Bandwidth-5745 MHz

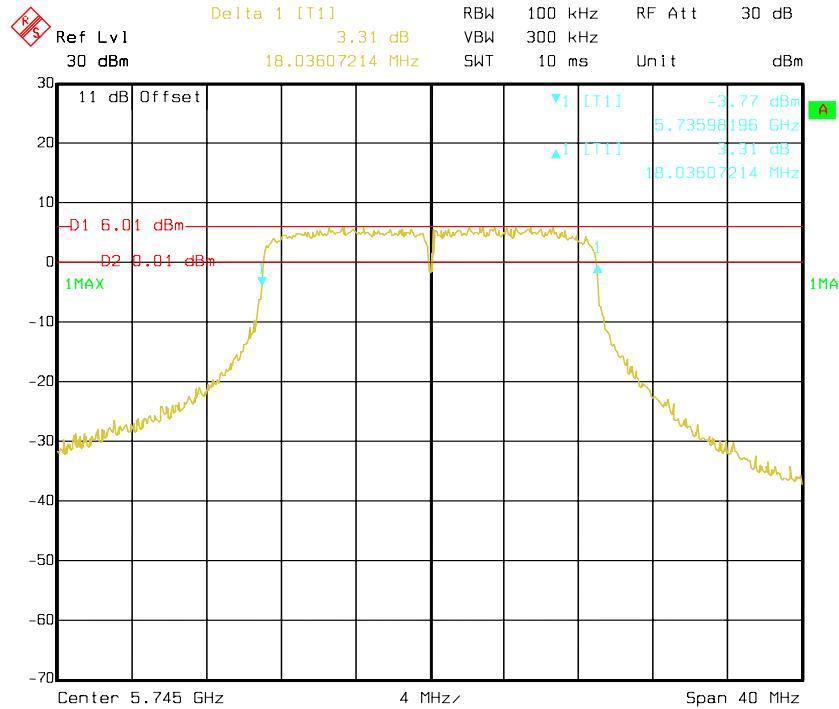


Date: 14.JUL.2014 13:42:25

802.11n HT20 mode, Antenna 0: OBW Bandwidth-5745 MHz

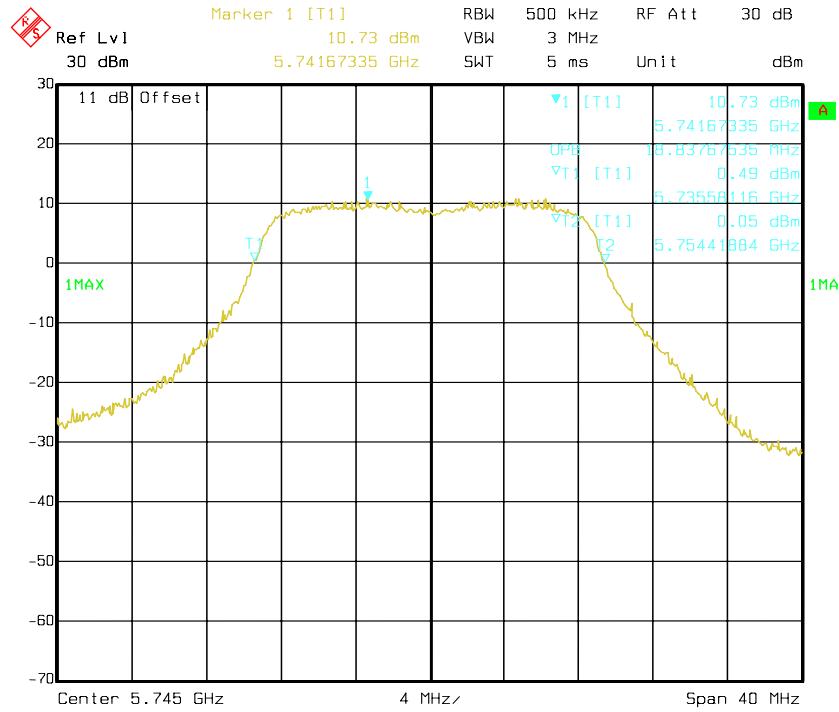


Date: 14.JUL.2014 14:15:57

802.11n HT20 mode, Antenna 0: 6 dB Bandwidth-5785 MHz

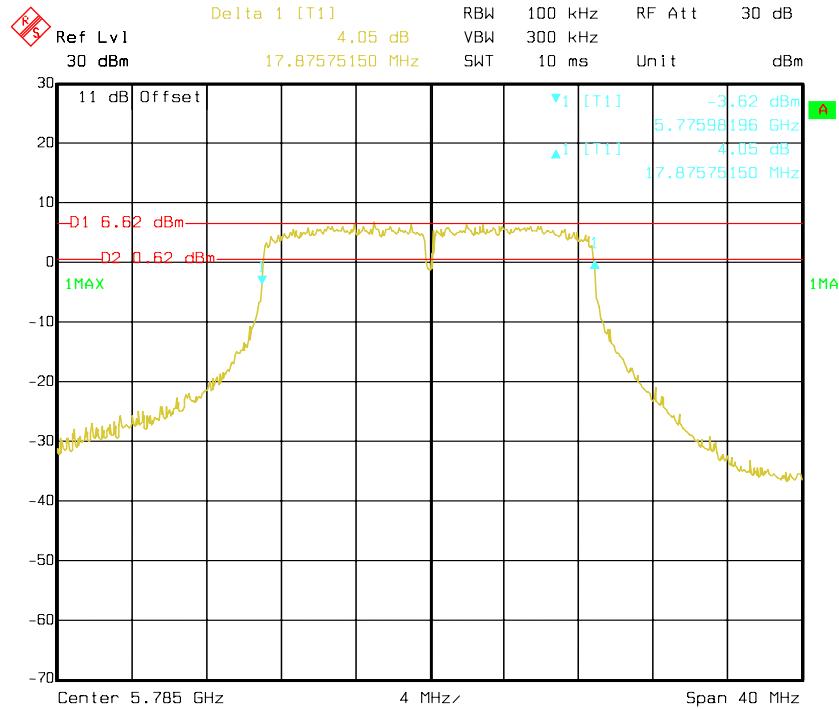


Date: 14.JUL.2014 13:43:40

802.11n HT20 mode, Antenna 0: OBW Bandwidth-5785 MHz

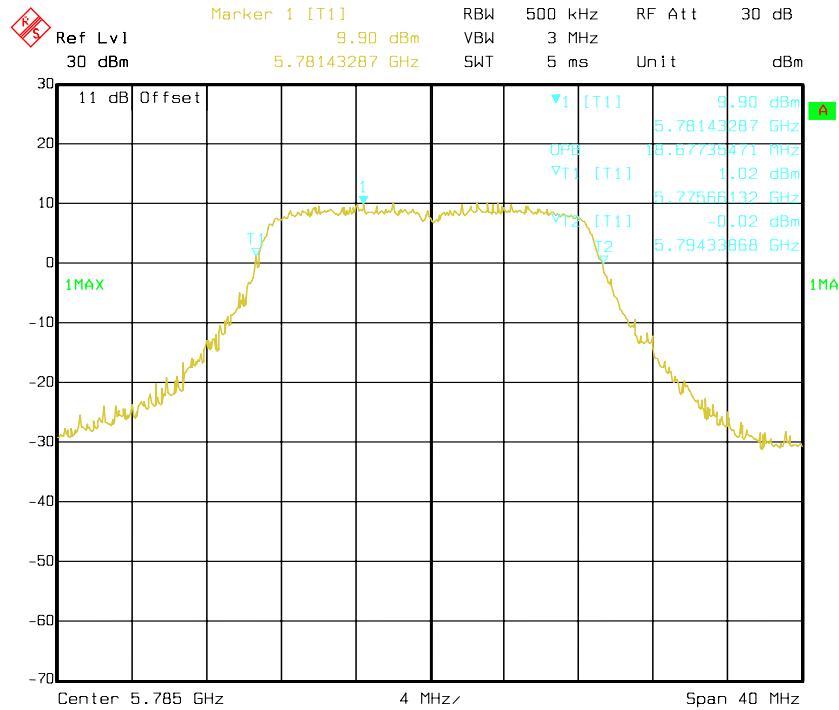


Date: 14.JUL.2014 14:16:56

802.11n HT20 mode, Antenna 0: 6 dB Bandwidth-5825 MHz

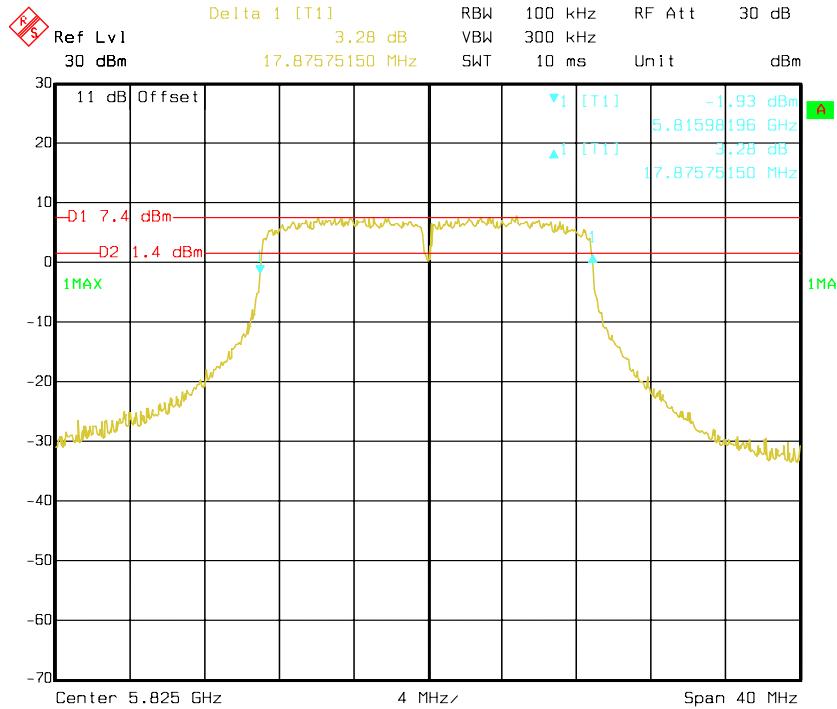


Date: 14.JUL.2014 13:45:39

802.11n HT20 mode, Antenna 0: OBW Bandwidth-5825 MHz

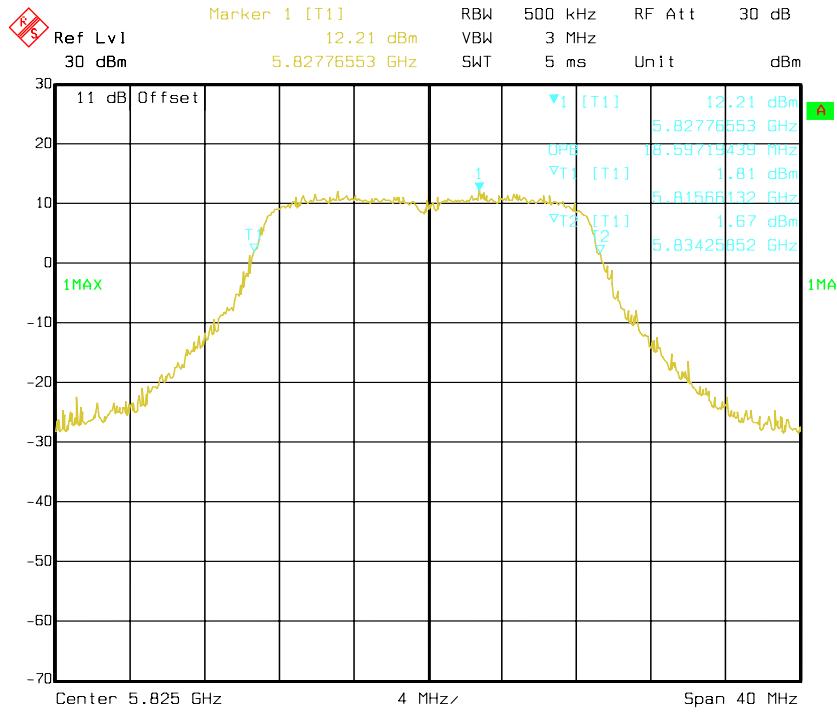


Date: 14.JUL.2014 14:17:45

802.11n HT40 mode, Antenna 0: 6 dB Bandwidth-5755 MHz

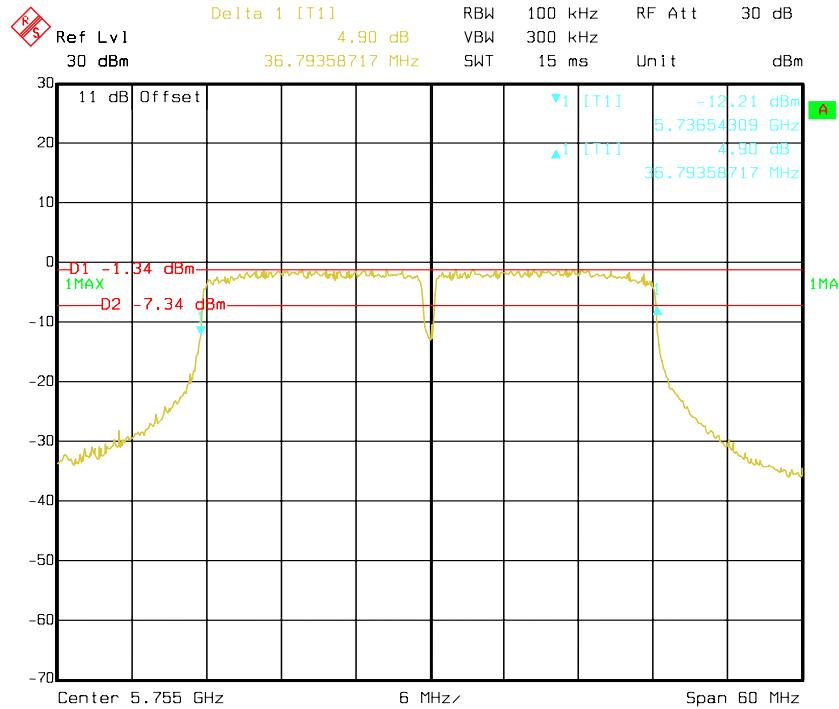


Date: 14.JUL.2014 14:23:41

802.11n HT40 mode, Antenna 0: OBW Bandwidth-5755 MHz

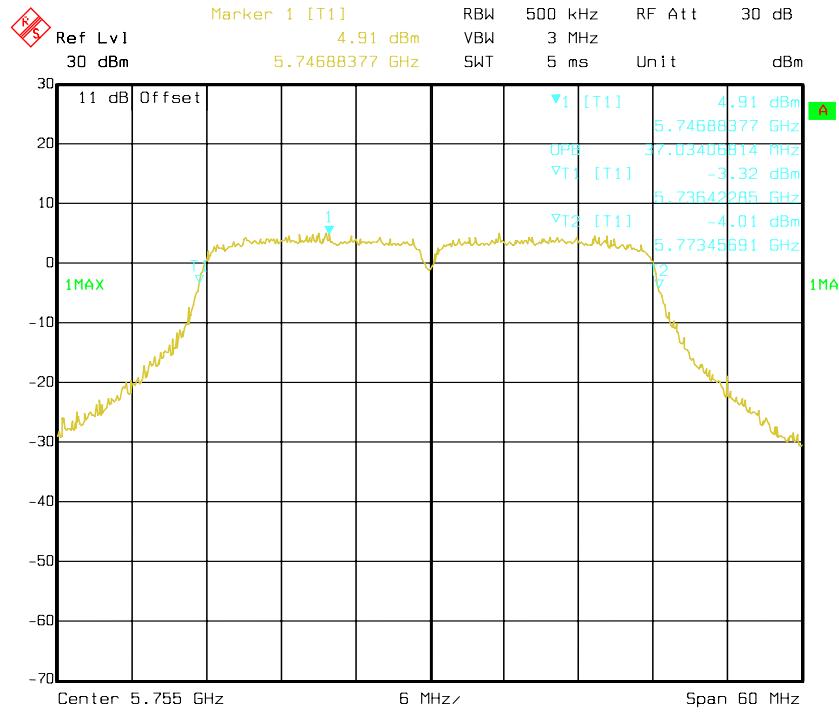


Date: 21.JUL.2014 15:56:20


802.11n HT40 mode, Antenna 0: 6 dB Bandwidth-5795 MHz

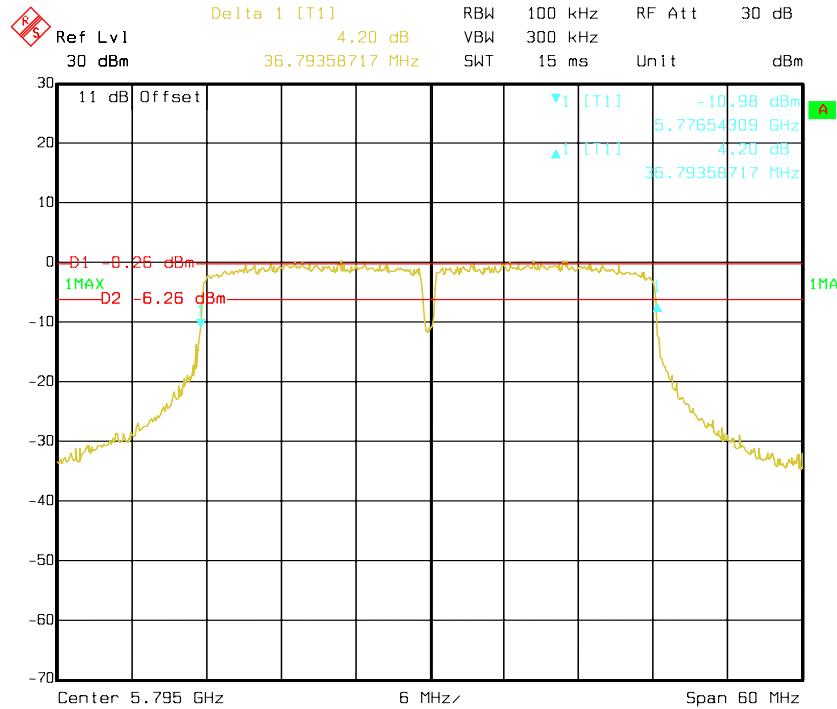

802.11n HT40 mode, Antenna 0: OBW Bandwidth-5795 MHz

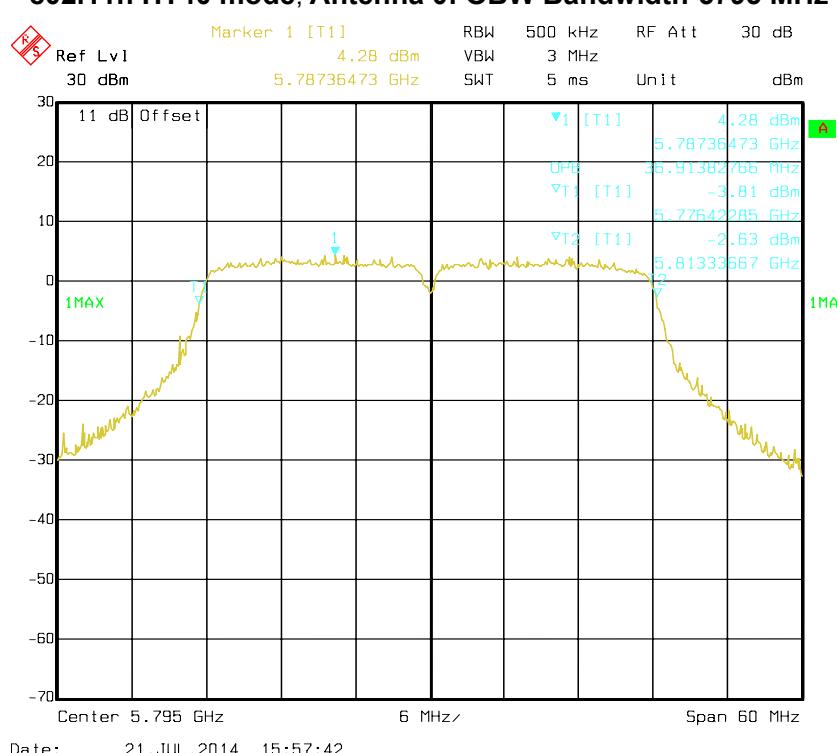


802.11a mode, Antenna 1: 6 dB Bandwidth-5745 MHz

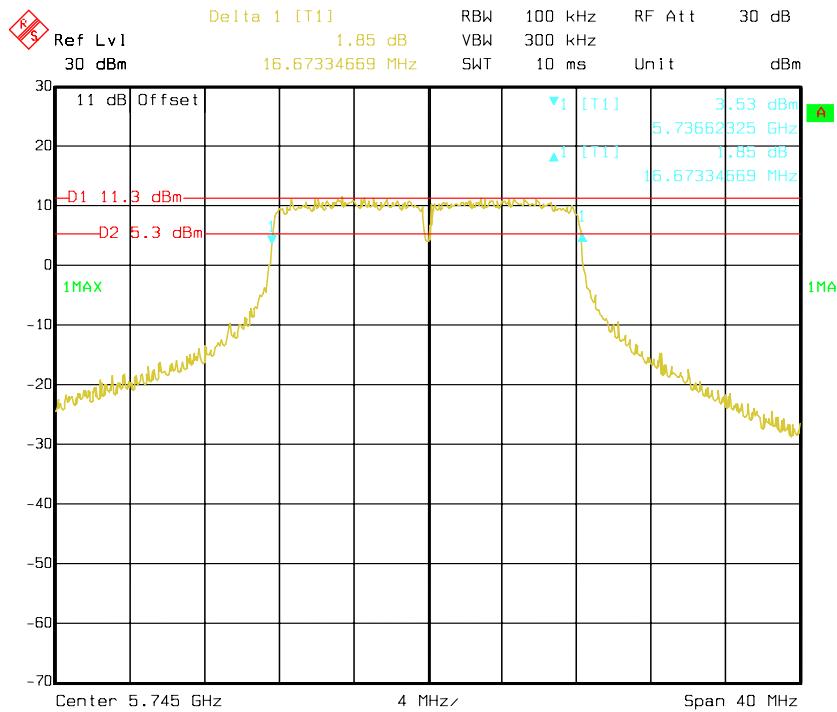


Date: 14.JUL.2014 15:02:50

802.11a mode, Antenna 1: OBW Bandwidth-5745 MHz

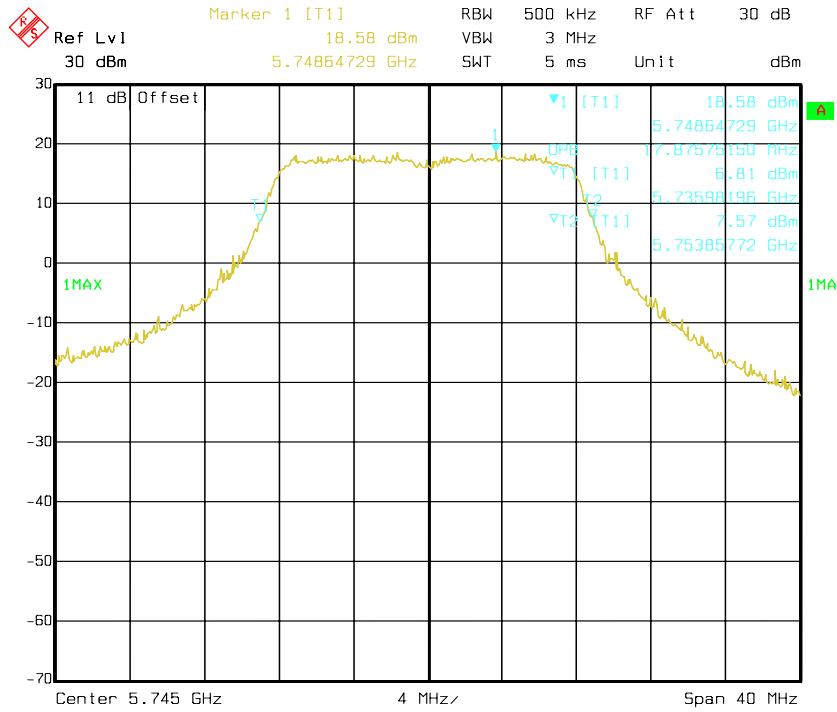


Date: 14.JUL.2014 15:13:56


802.11a mode, Antenna 1: 6 dB Bandwidth-5785 MHz

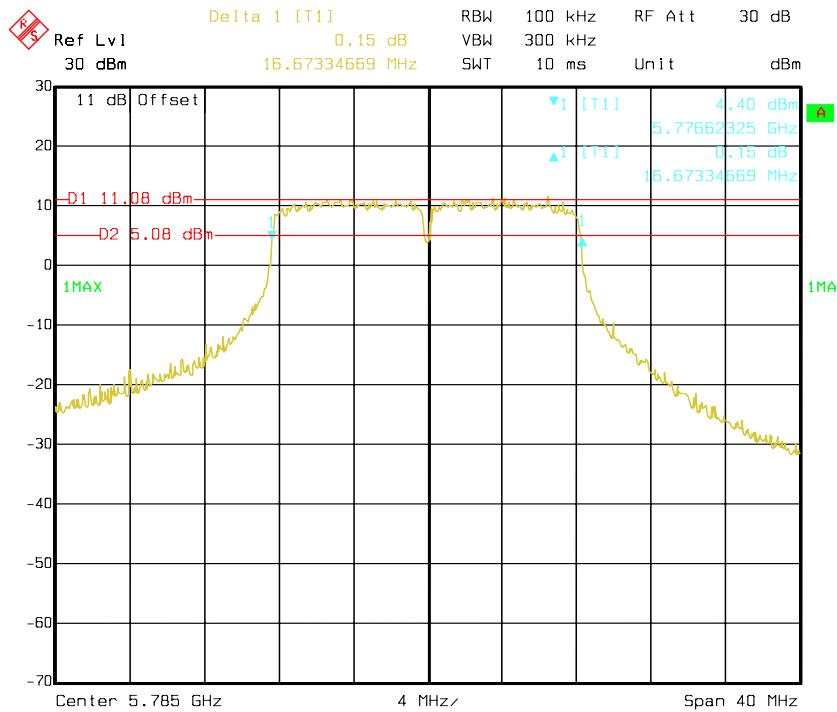


802.11a mode, Antenna 1: OBW Bandwidth-5785 MHz

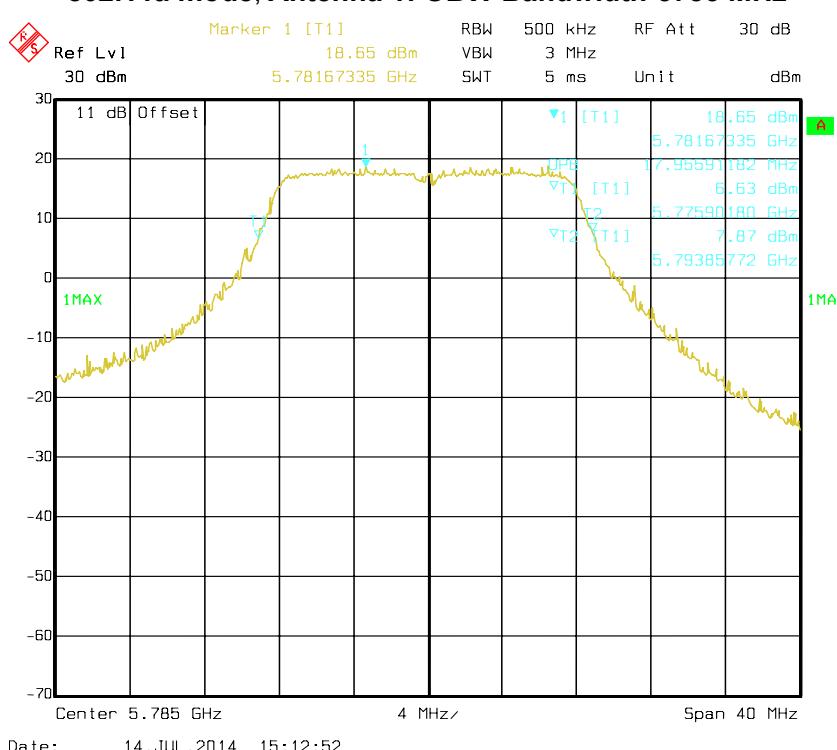


802.11a mode, Antenna 1: 6 dB Bandwidth-5825 MHz

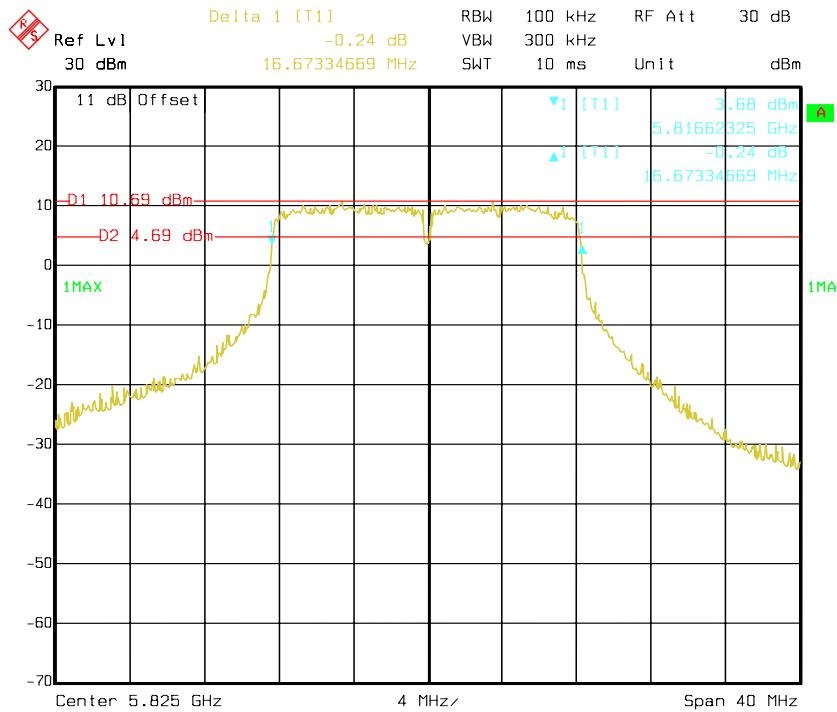

802.11a mode, Antenna 1: OBW Bandwidth-5825 MHz

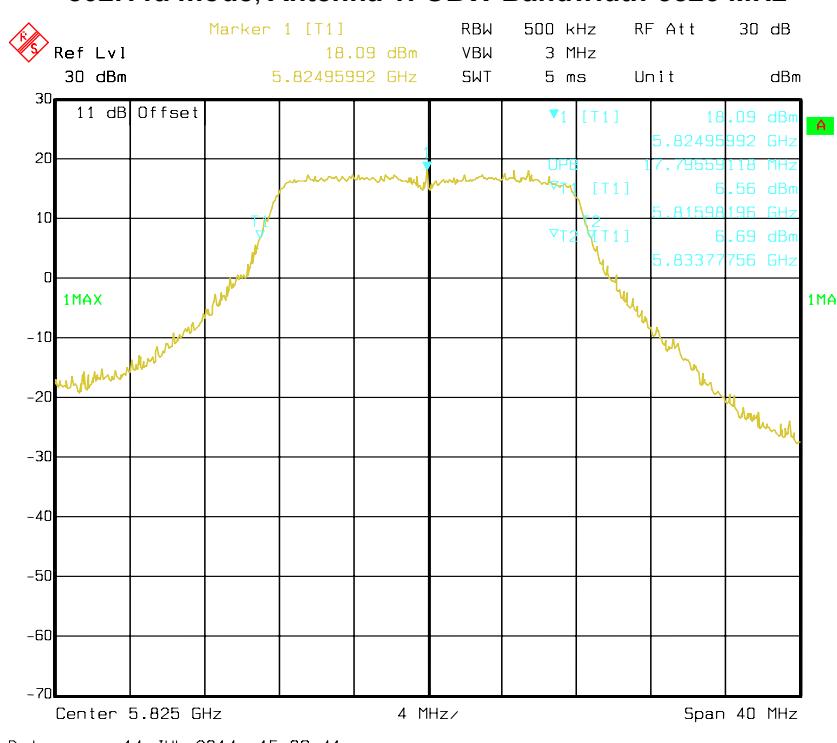


802.11n HT20 mode, Antenna 1: 6 dB Bandwidth-5745 MHz

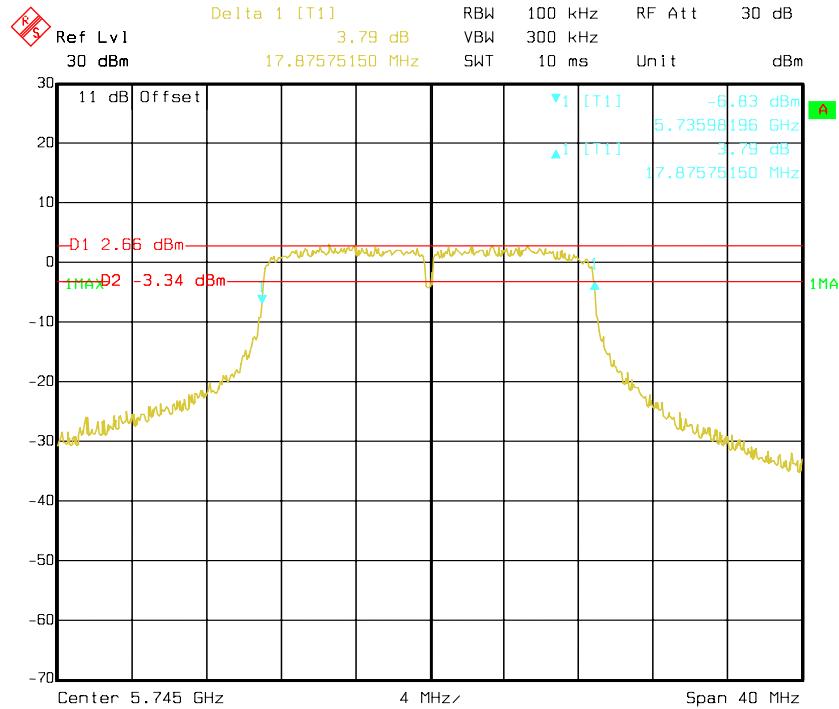


Date: 14.JUL.2014 16:35:24

802.11n HT20 mode, Antenna 1: OBW Bandwidth-5745 MHz

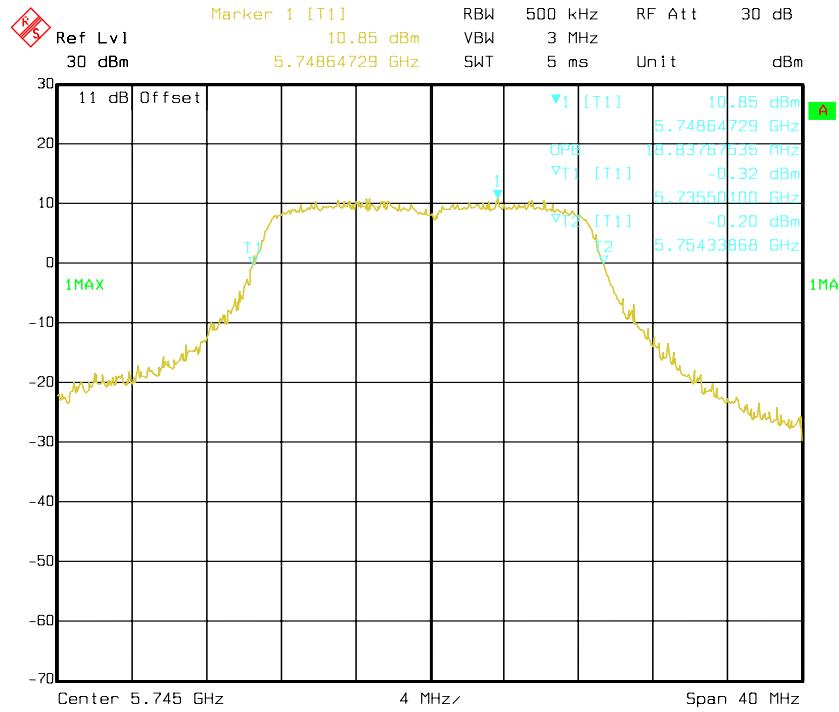


Date: 14.JUL.2014 17:37:57


802.11n HT20 mode, Antenna 1: 6 dB Bandwidth-5785 MHz

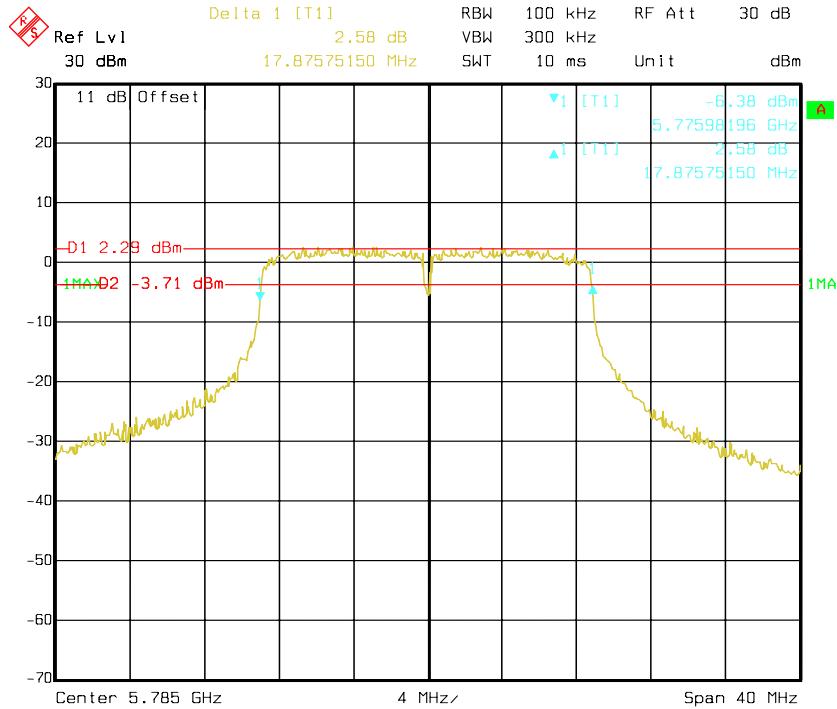

802.11n HT20 mode, Antenna 1: OBW Bandwidth-5785 MHz

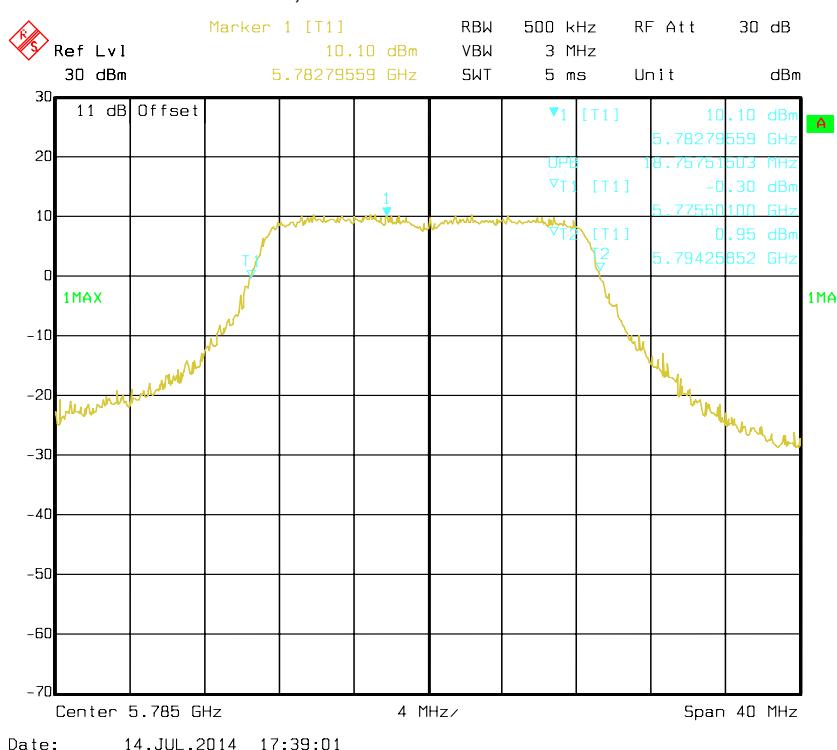


802.11n HT20 mode, Antenna 1: 6 dB Bandwidth-5825 MHz

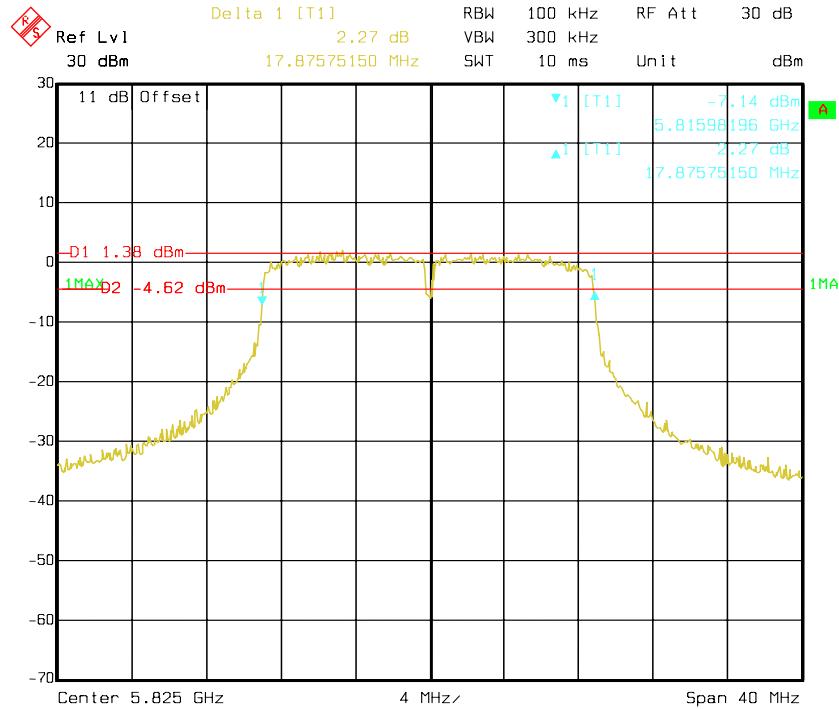


Date: 14.JUL.2014 16:38:05

802.11n HT20 mode, Antenna 1: OBW Bandwidth-5825 MHz

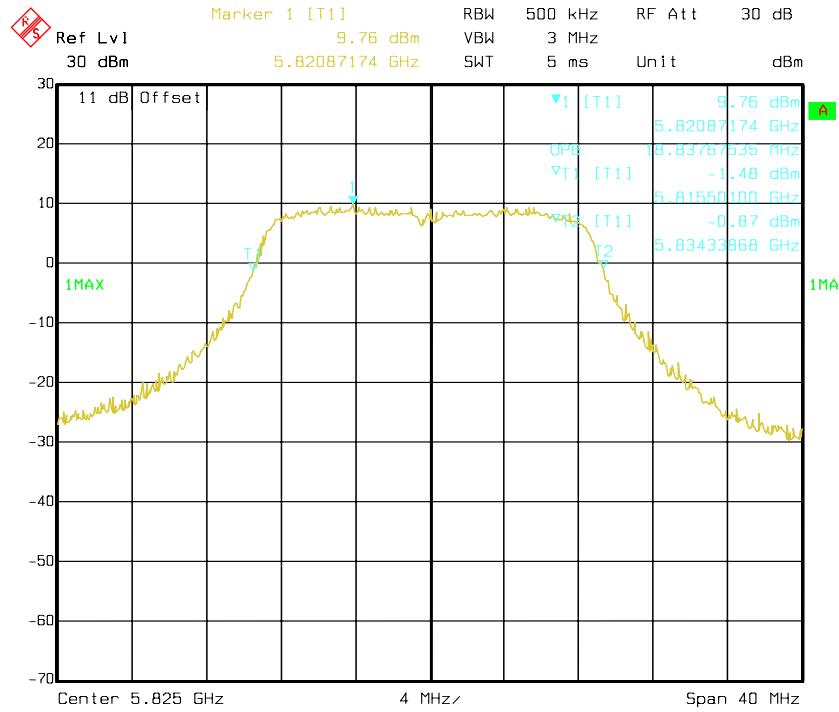


Date: 14.JUL.2014 17:40:03

802.11n HT40 mode, Antenna 1: 6 dB Bandwidth-5755 MHz

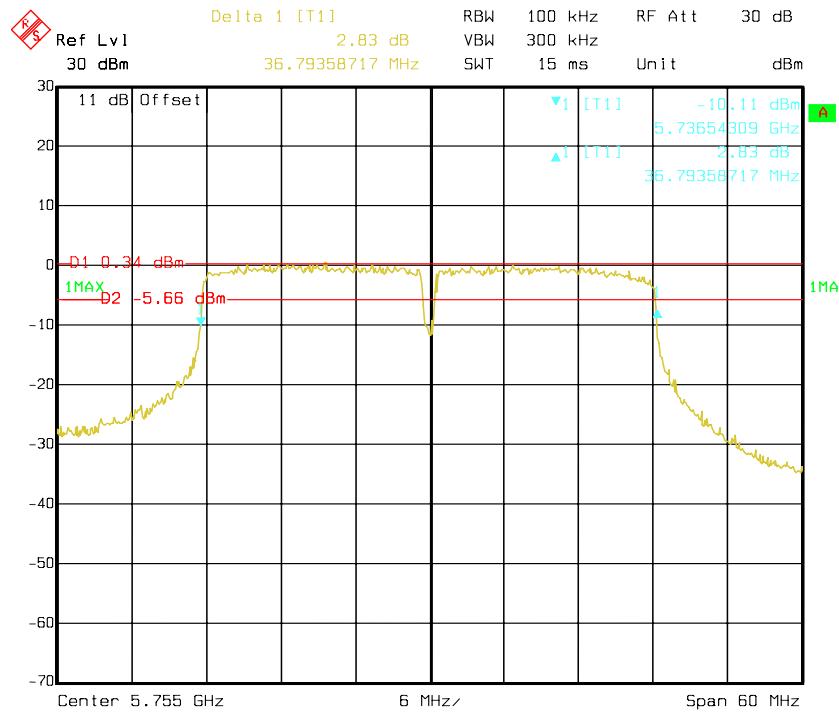


Date: 14.JUL.2014 16:55:39

802.11n HT40 mode, Antenna 1: OBW Bandwidth-5755 MHz

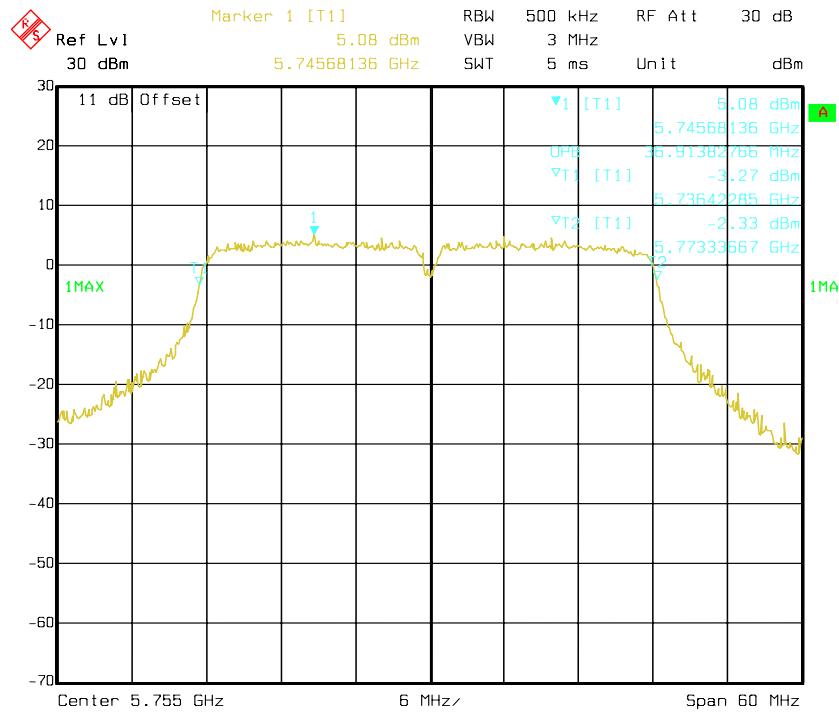


Date: 21.JUL.2014 15:58:44

802.11n HT40 mode, Antenna 1: 6 dB Bandwidth-5795 MHz

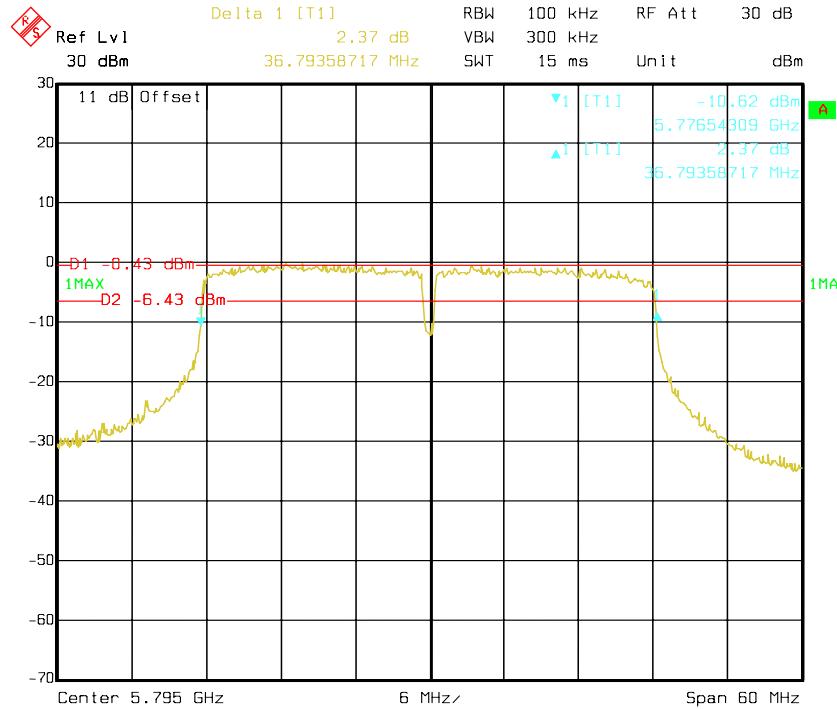

Date: 14.JUL.2014 17:00:11

802.11n HT40 mode, Antenna 1: OBW Bandwidth-5795 MHz

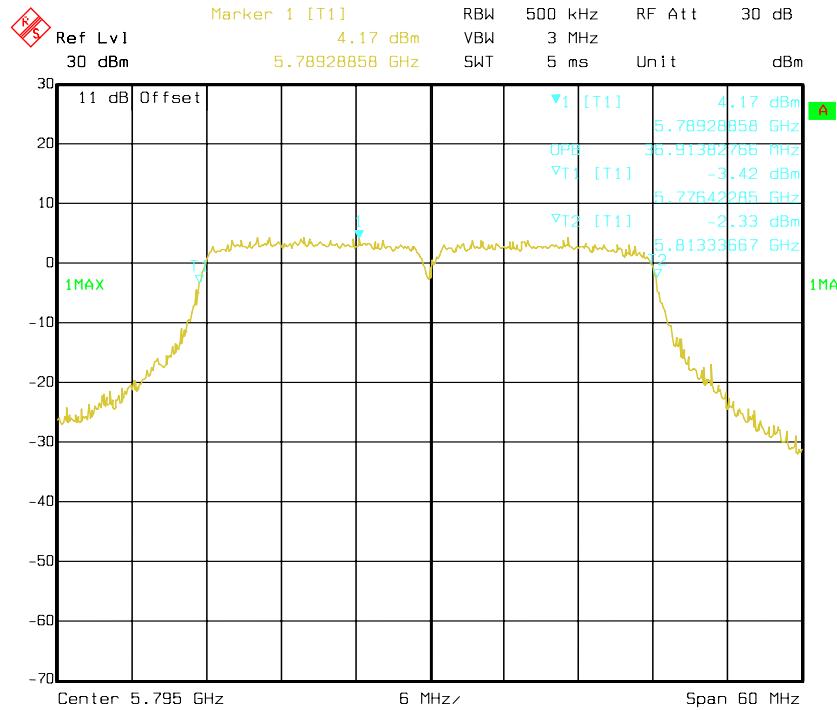

Date: 21.JUL.2014 15:59:47

FCC §15.407(a) (1) (3)- CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2013-10-17	2014-10-16

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low Loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set span to encompass the entire emission bandwidth (EBW) of the signal. Set RBW = 1 MHz. Set VBW \geq 3 MHz. Use sample detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run". Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	29°C & 26°C
Relative Humidity:	51 % & 50 %
ATM Pressure:	100.9 kPa & 100.9 kPa

The testing was performed by Fidel Zhou on 2014-07-14 & 2014-07-15.

Temperature:	28 °C & 24 °C
Relative Humidity:	56 % & 60 %
ATM Pressure:	100.7 kPa & 101.6 kPa

The testing was performed by Fidel Zhou on 2014-07-22 & 2014-09-18.

Test Mode: Transmitting

5150-5250 MHz:

mode	Frequency (MHz)	Output Power (dBm)			Limit (dBm)
		Antenna 0	Antenna 1	Antenna 0 + Antenna 1	
802.11a	5180	20.66	20.71	/	30
	5200	20.10	19.99	/	30
	5240	20.82	19.53	/	30
802.11n HT20	5180	17.01	18.21	20.66	30
	5200	17.01	18.06	20.58	30
	5240	16.29	17.62	20.02	30
802.11n HT40	5190	16.81	17.54	20.20	30
	5230	17.39	16.46	19.96	30


5725-5850 MHz:

mode	Frequency (MHz)	Output Power (dBm)			Limit (dBm)
		Antenna 0	Antenna 1	Antenna 0 + Antenna 1	
802.11a	5745	16.62	17.22	/	30
	5785	16.75	17.33	/	30
	5825	17.43	17.35	/	30
802.11n HT20	5745	17.29	17.35	20.33	30
	5785	16.96	17.06	20.02	30
	5825	18.01	16.00	20.13	30
802.11n HT40	5755	17.31	17.35	20.34	30
	5795	17.74	16.79	20.30	30

Note: Duty cycle is more than 98%.


5150-5250 MHz:

802.11a, Antenna 0: RF Output Power-5180 MHz

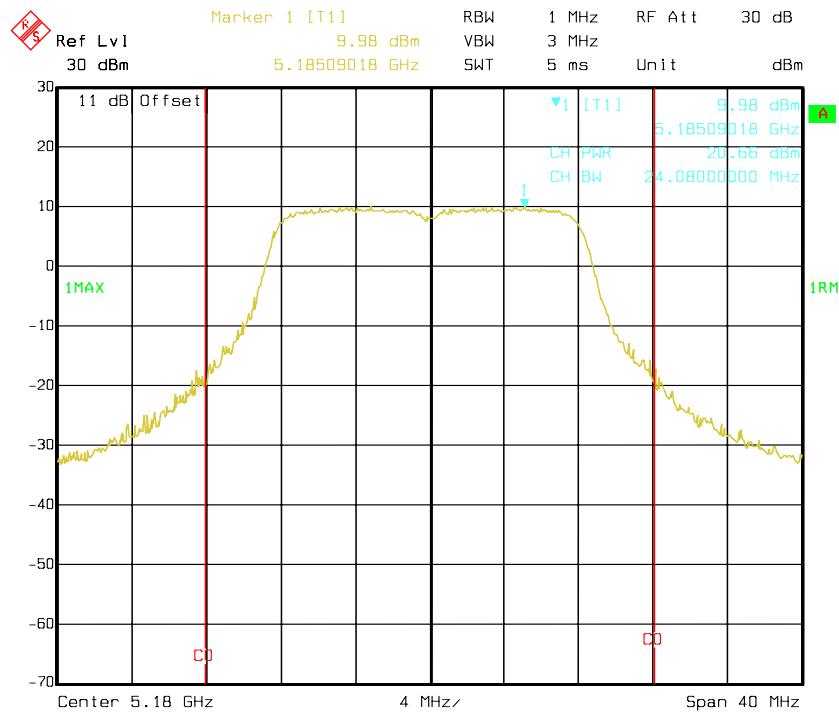


Date: 15.JUL.2014 11:35:38

802.11a, Antenna 0: RF Output Power-5200 MHz

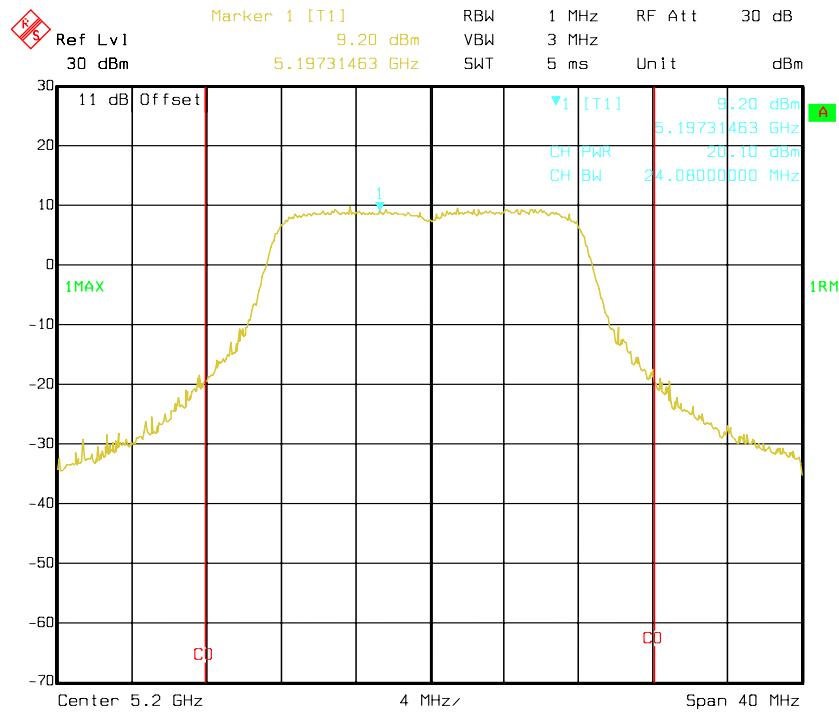


Date: 15.JUL.2014 11:35:12


802.11a, Antenna 0: RF Output Power-5240 MHz

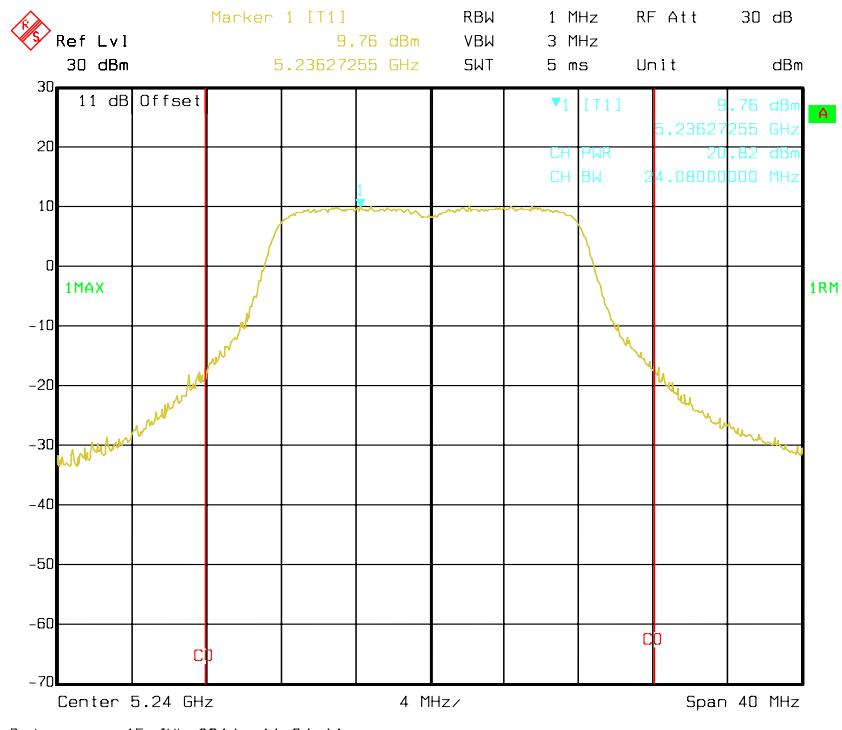


802.11n HT20 mode, Antenna 0: RF Output Power-5180 MHz

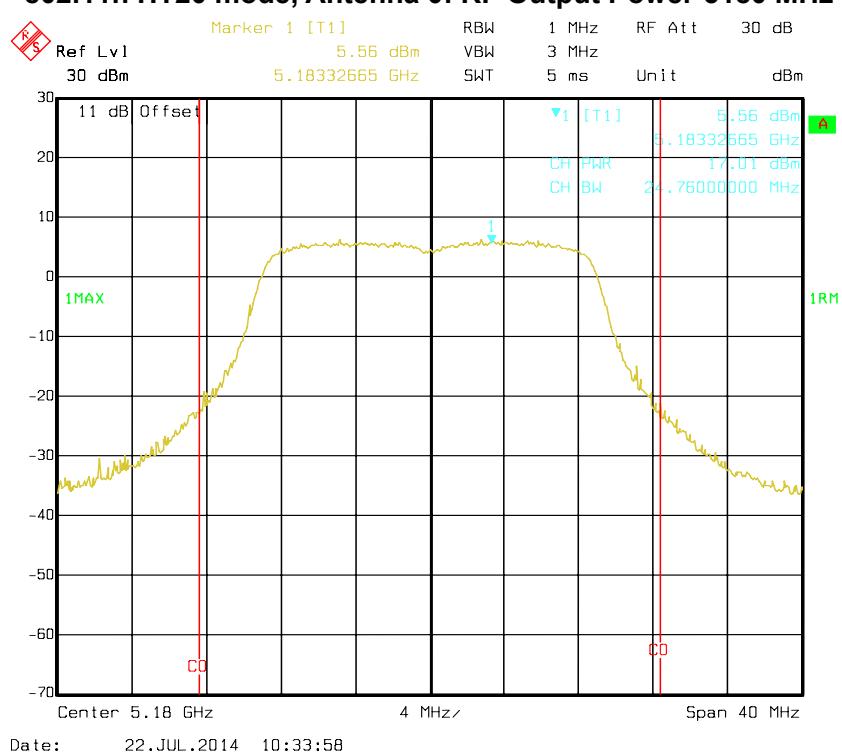


802.11n HT20 mode, Antenna 0: RF Output Power-5200 MHz

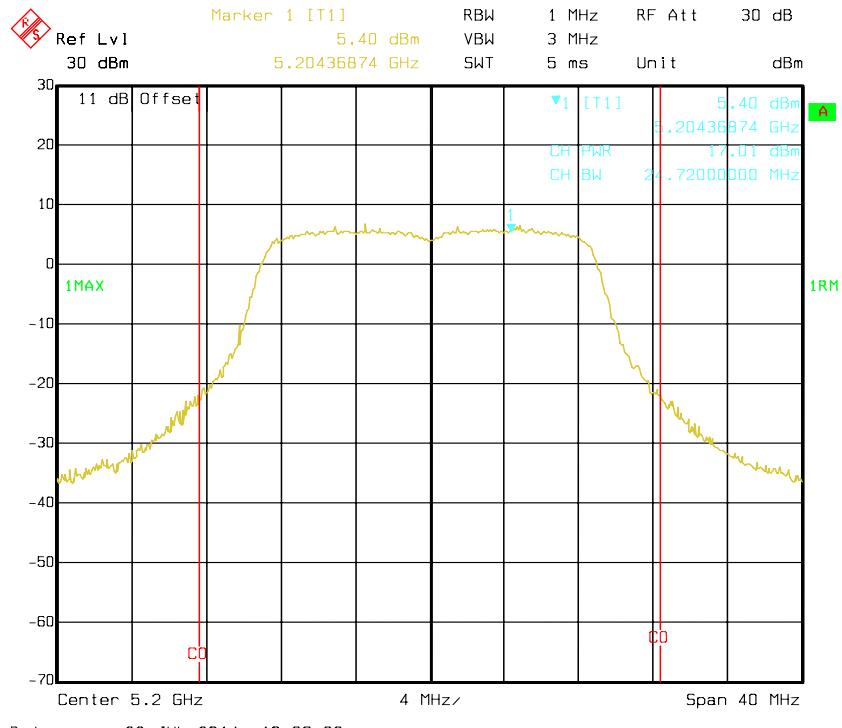


802.11n HT20 mode, Antenna 0: RF Output Power-5240 MHz

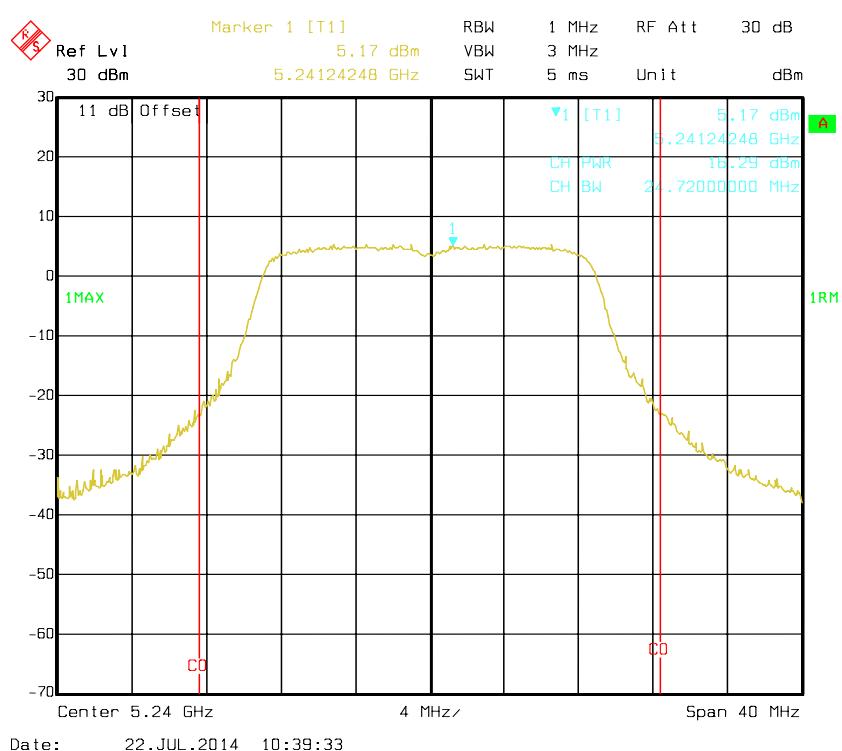


802.11n HT40 mode, Antenna 0: RF Output Power-5190 MHz

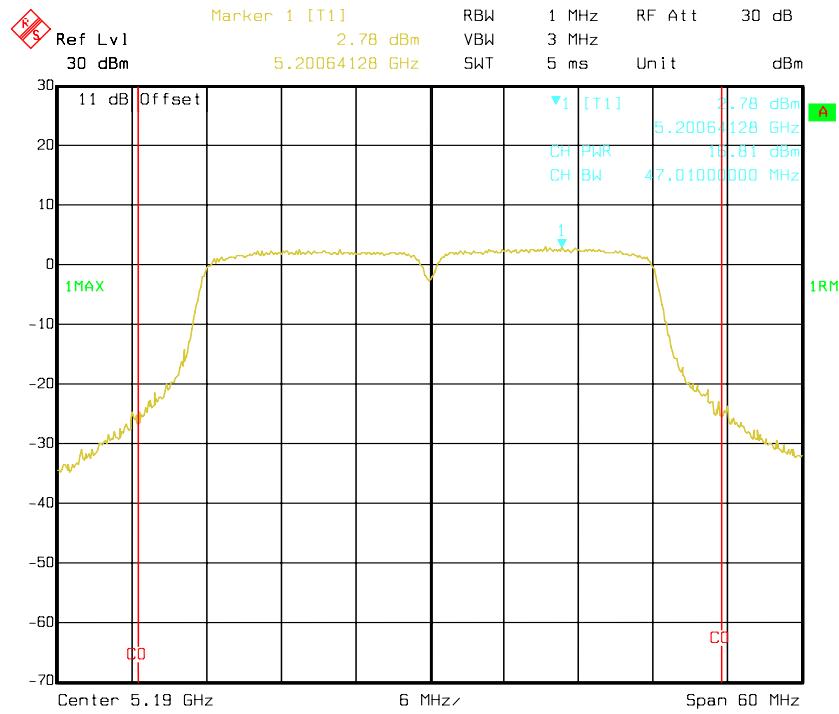


802.11n HT40 mode, Antenna 0: RF Output Power-5230 MHz

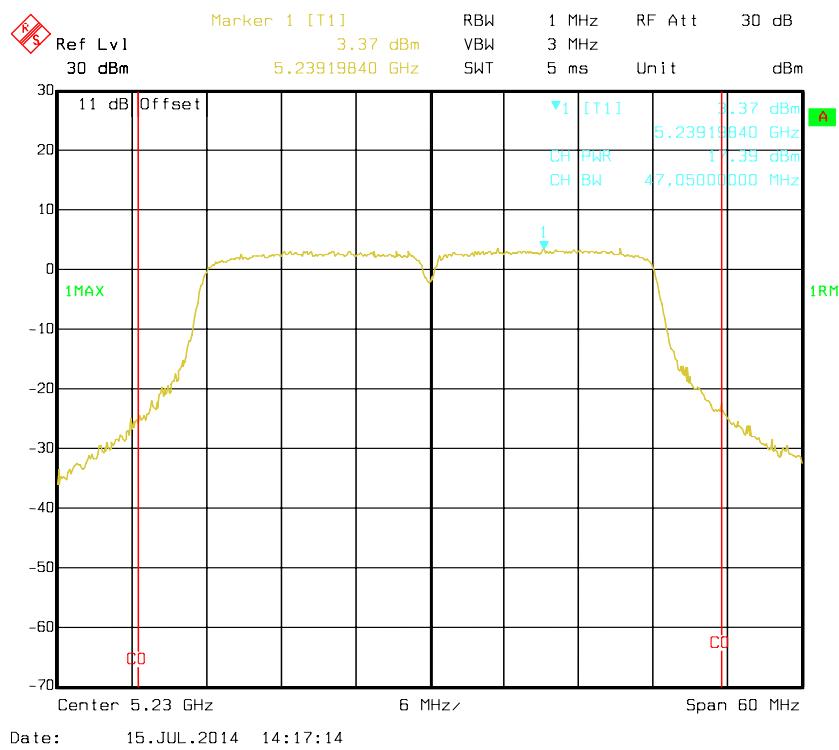


802.11a, Antenna 1: RF Output Power-5180 MHz

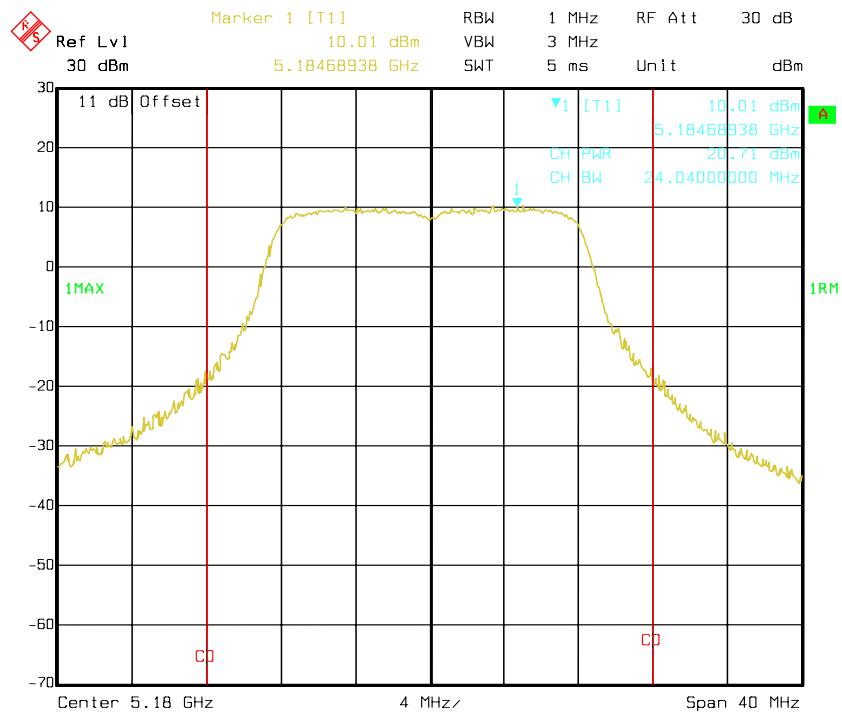


802.11a, Antenna 1: RF Output Power-5200 MHz

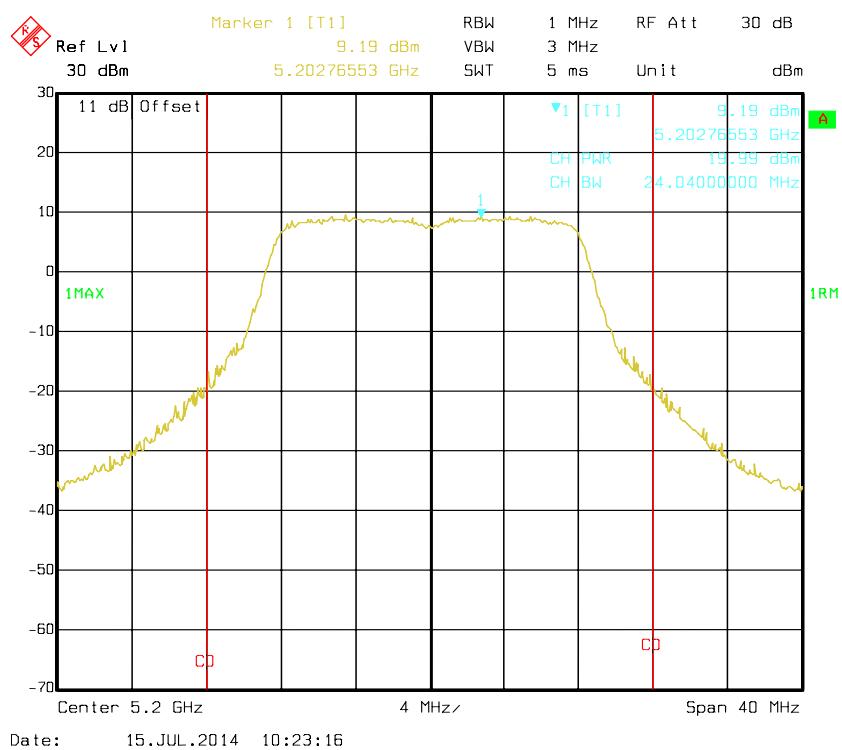


802.11a, Antenna 1: RF Output Power-5240 MHz

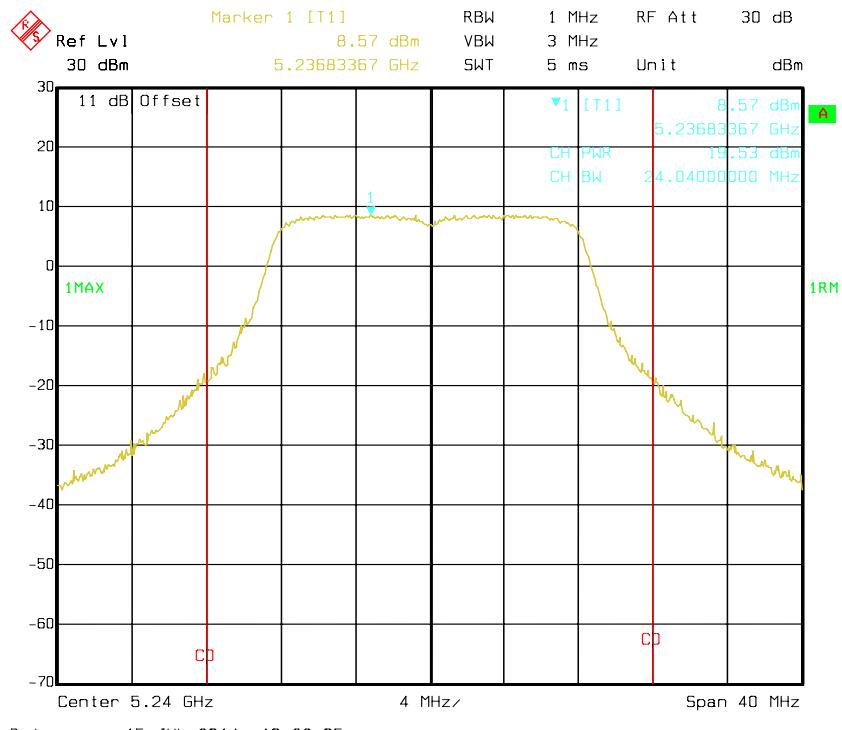


802.11n HT20 mode, Antenna 1: RF Output Power-5180 MHz

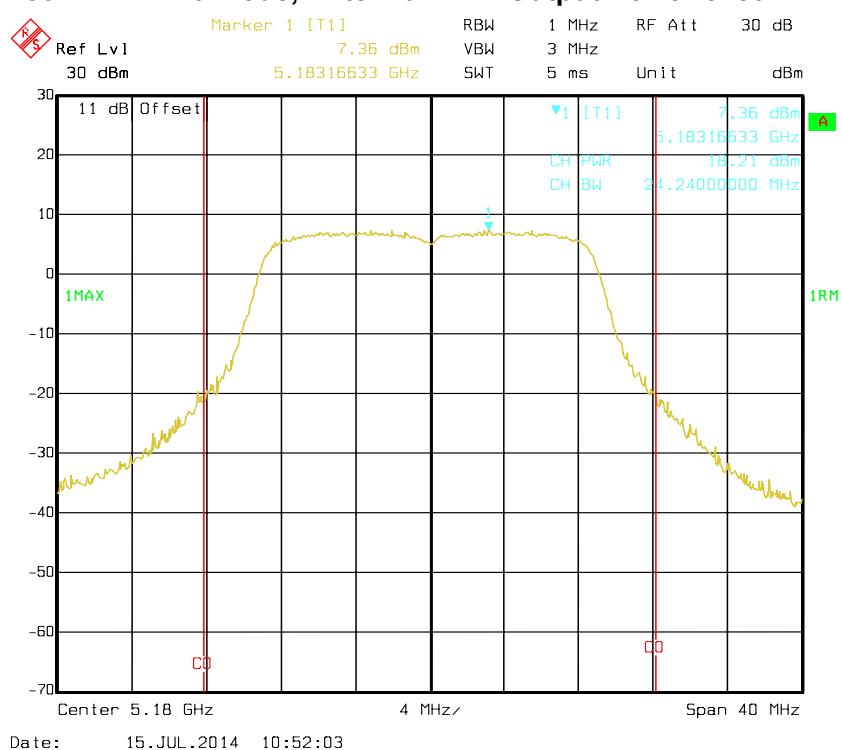


802.11n HT20 mode, Antenna 1: RF Output Power-5200 MHz

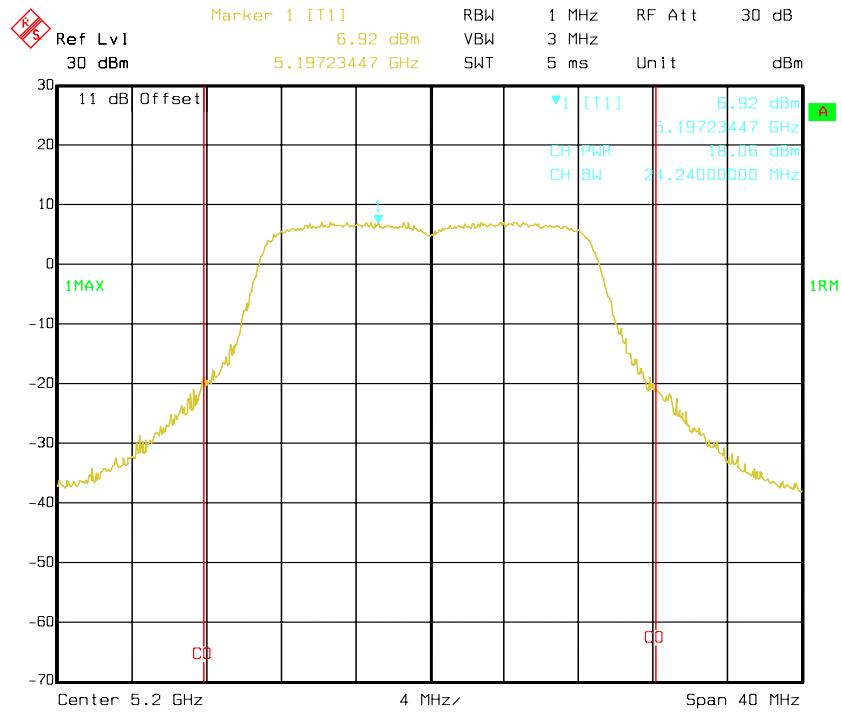


802.11n HT20 mode, Antenna 1: RF Output Power-5240 MHz

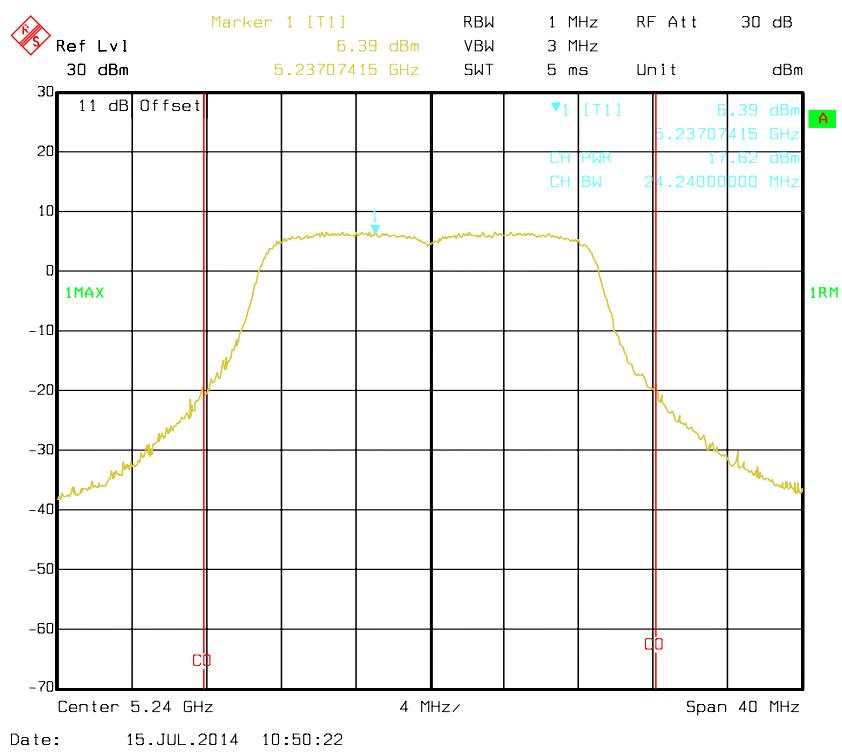

802.11n HT40 mode, Antenna 1: RF Output Power-5190 MHz

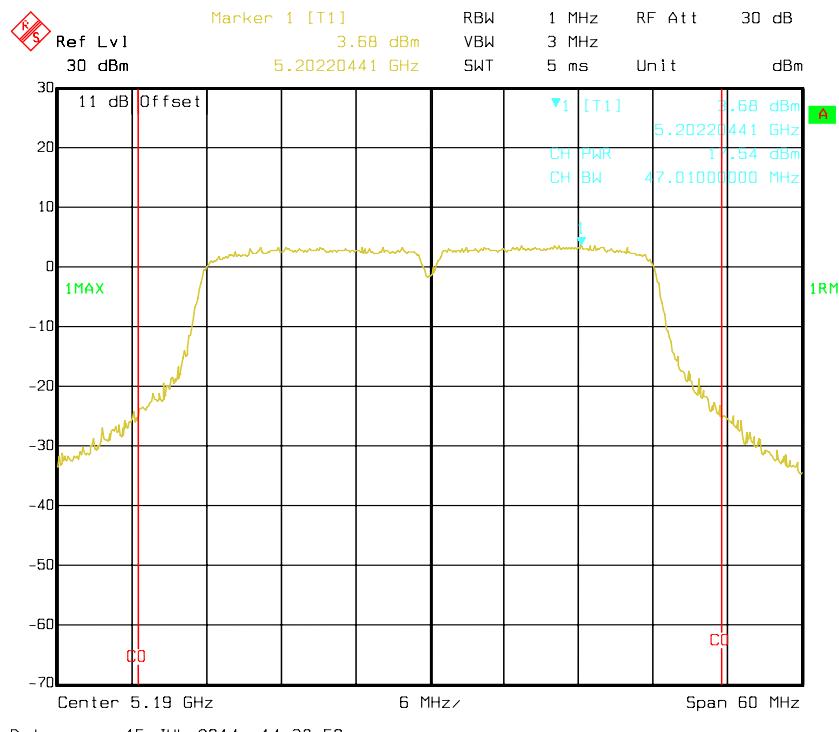


802.11n HT40 mode, Antenna 1: RF Output Power-5230 MHz

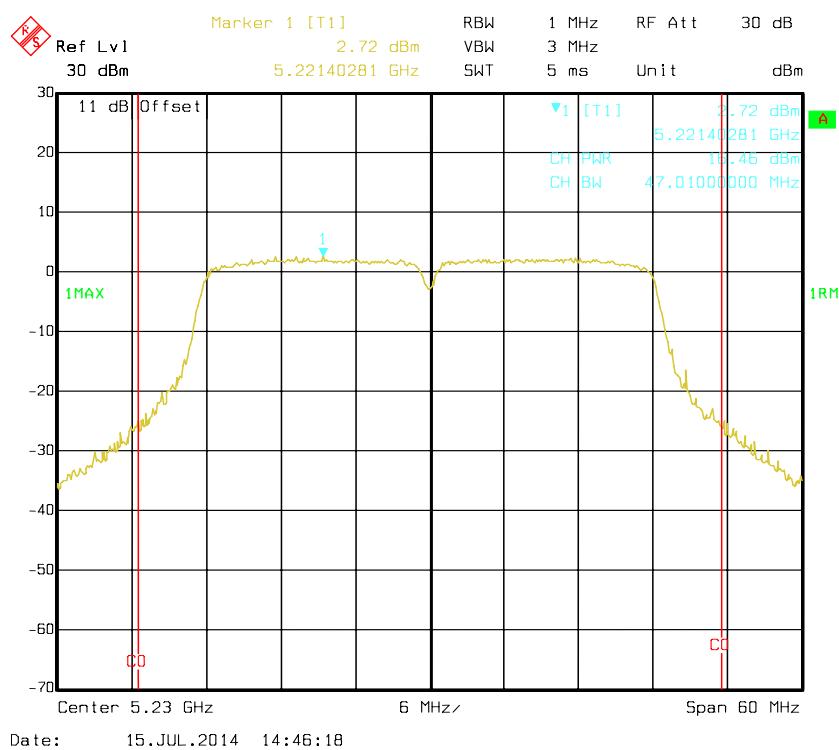


5725-5850 MHz:


802.11a, Antenna 0: RF Output Power-5745 MHz

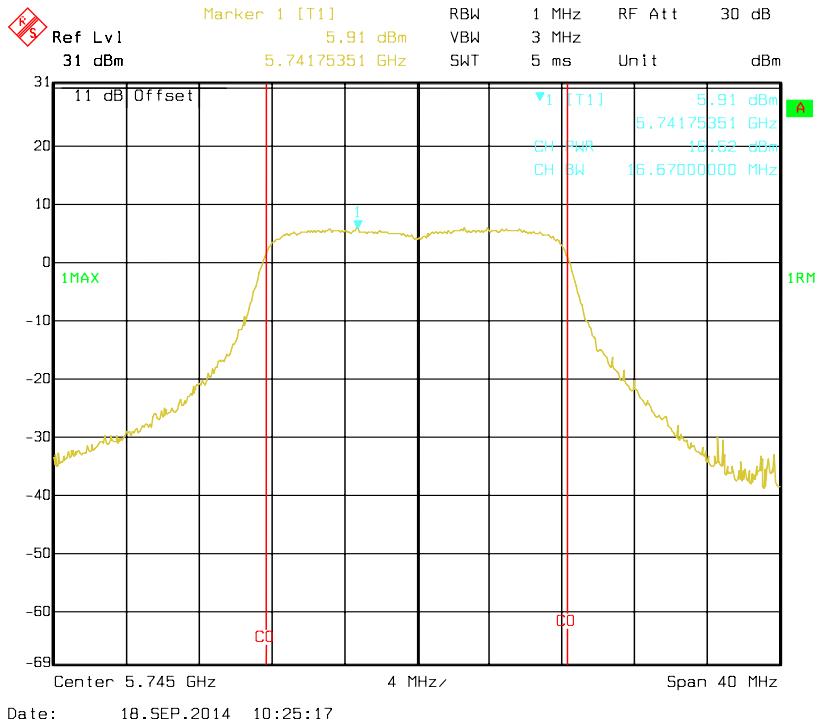


802.11a, Antenna 0: RF Output Power-5785 MHz

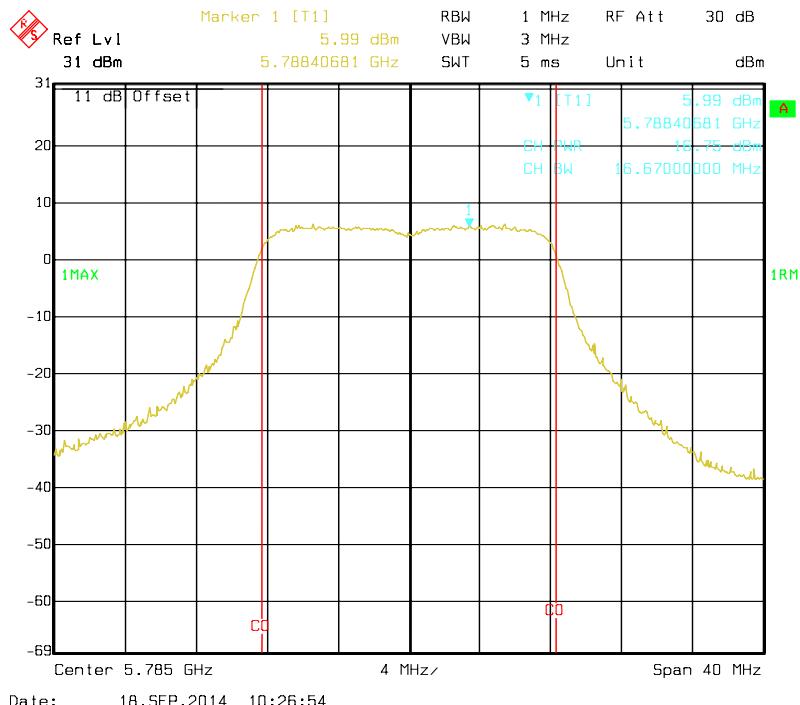


802.11a, Antenna 0: RF Output Power-5825 MHz

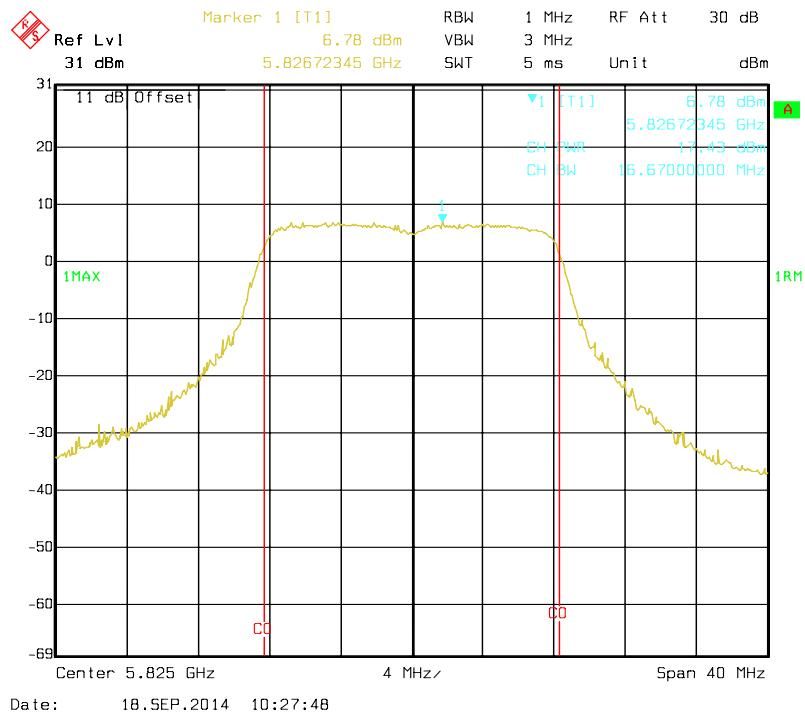


802.11n HT20 mode, Antenna 0: RF Output Power-5745 MHz

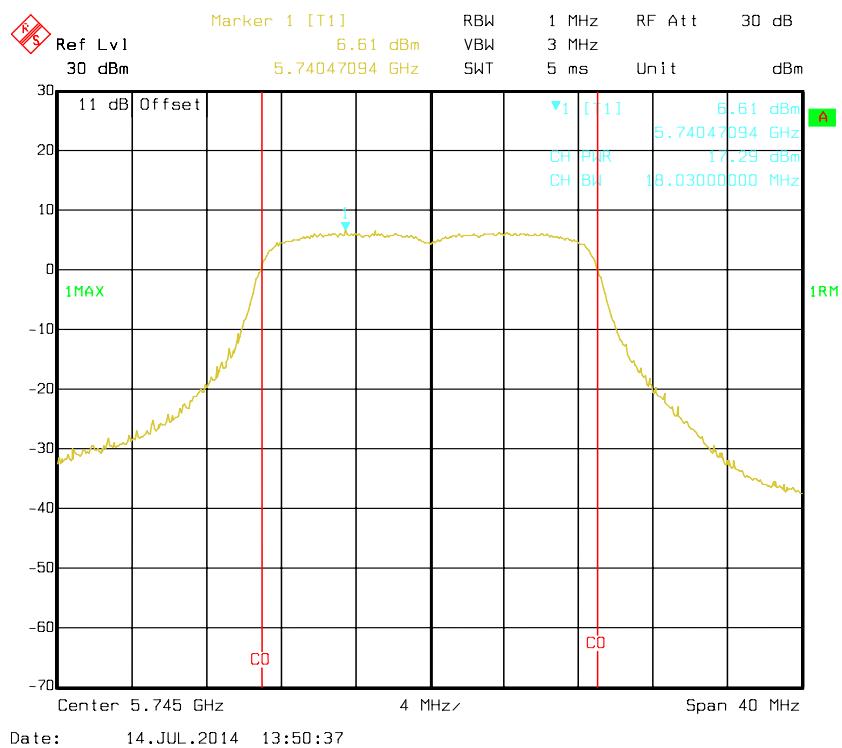


802.11n HT20 mode, Antenna 0: RF Output Power-5785 MHz

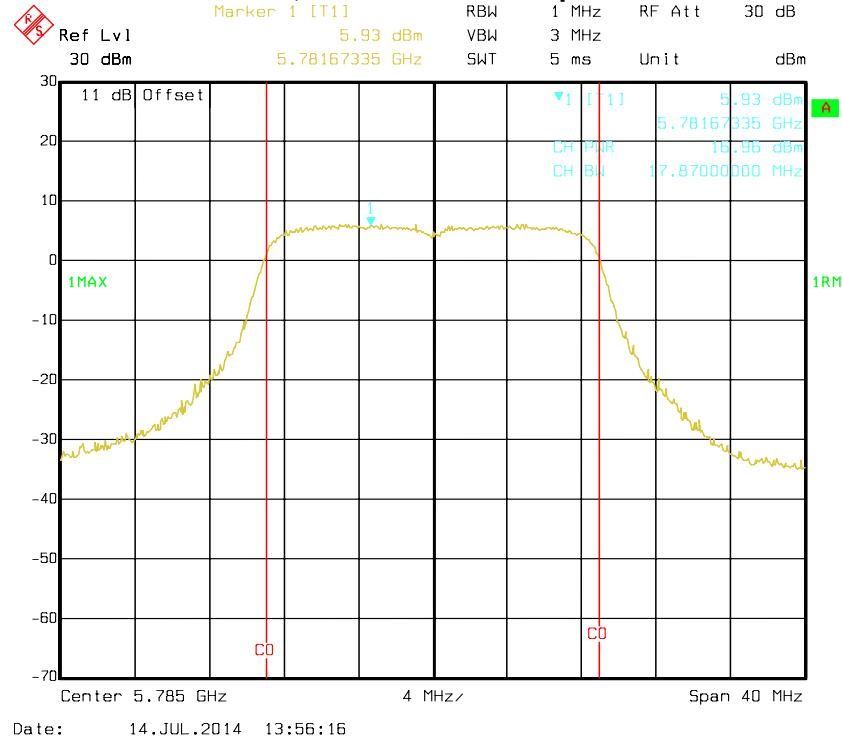

802.11n HT20 mode, Antenna 0: RF Output Power-5825 MHz

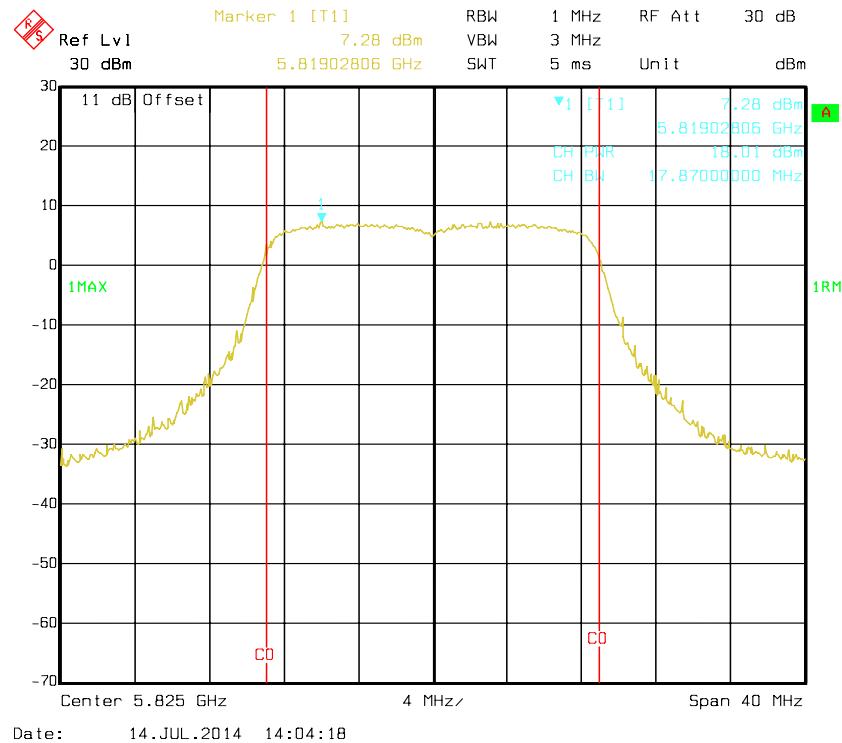


802.11n HT40 mode, Antenna 0: RF Output Power-5755 MHz

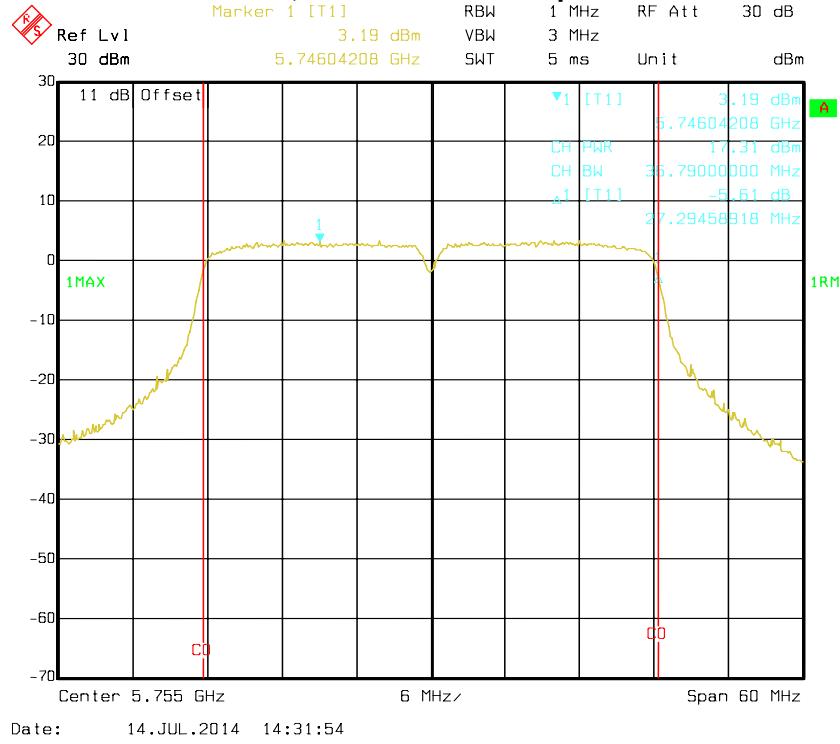


Date: 14.JUL.2014 14:31:54

802.11n HT40 mode, Antenna 0: RF Output Power-5795 MHz

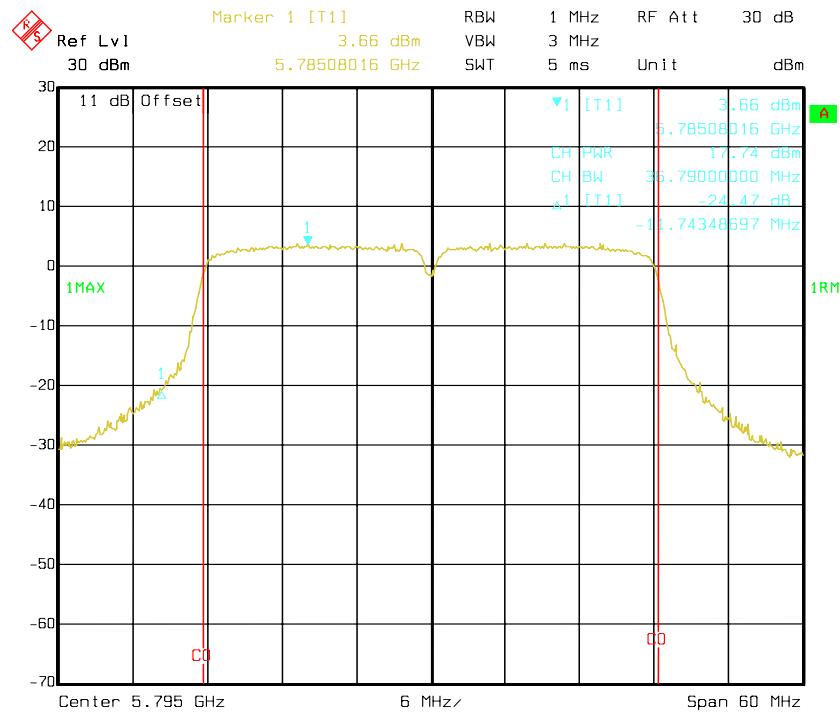


Date: 14.JUL.2014 14:35:10


802.11a, Antenna 1: RF Output Power-5745 MHz

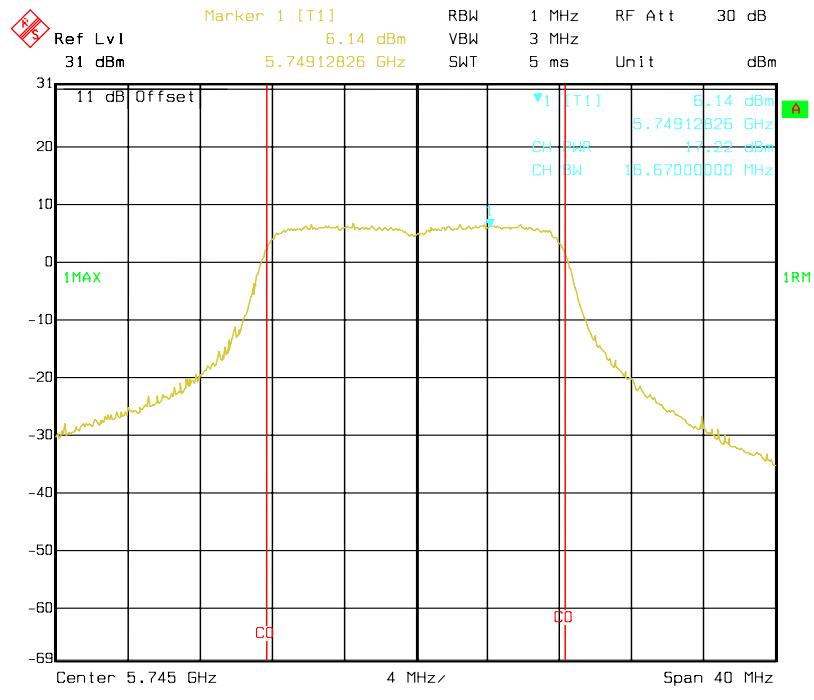


802.11a, Antenna 1: RF Output Power-5785 MHz

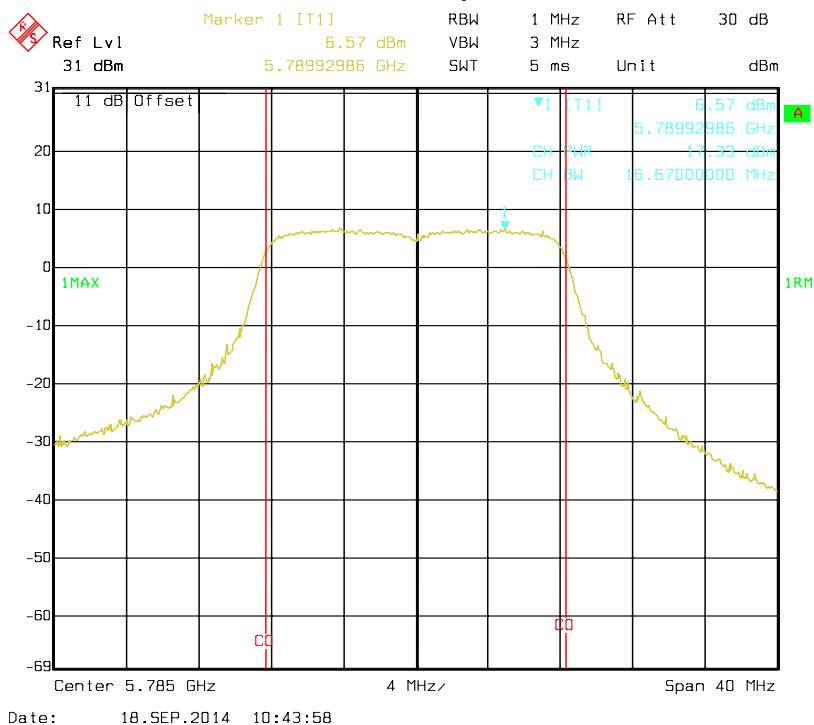


802.11a, Antenna 1: RF Output Power-5825 MHz

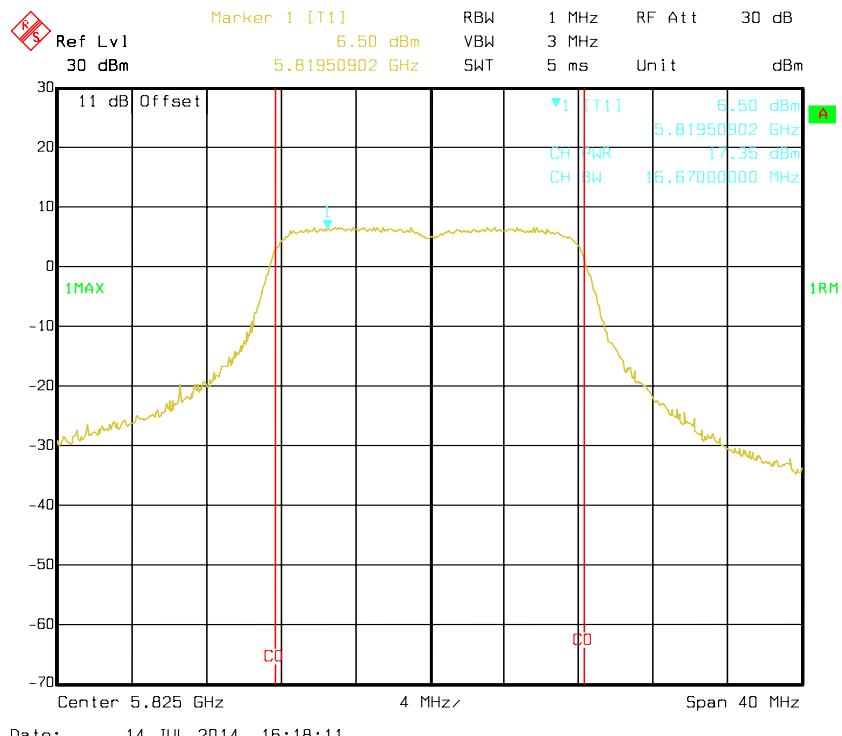


802.11n HT20 mode, Antenna 1: RF Output Power-5745 MHz

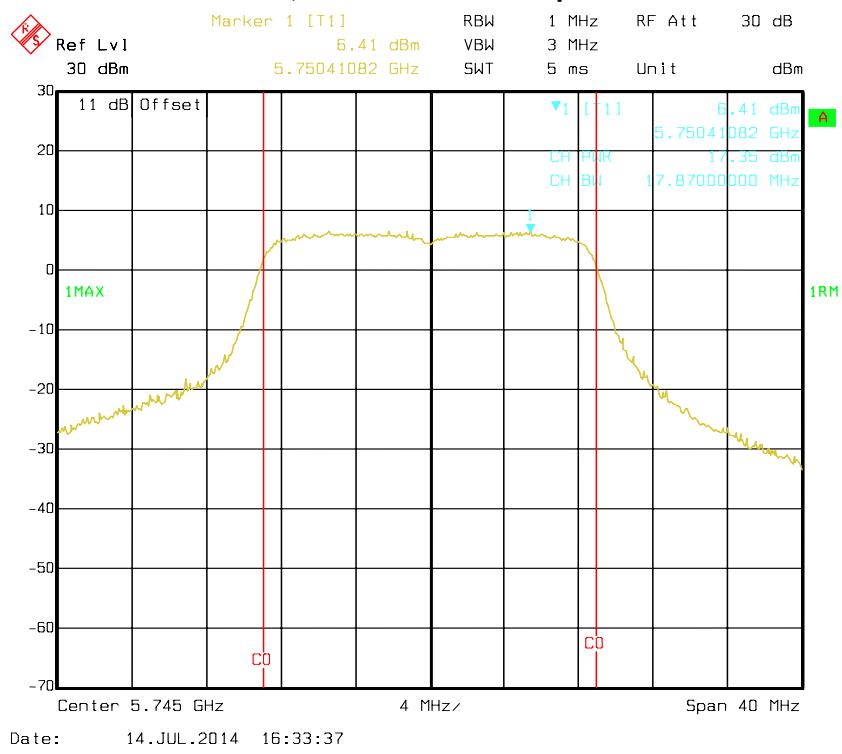


802.11n HT20 mode, Antenna 1: RF Output Power-5785 MHz

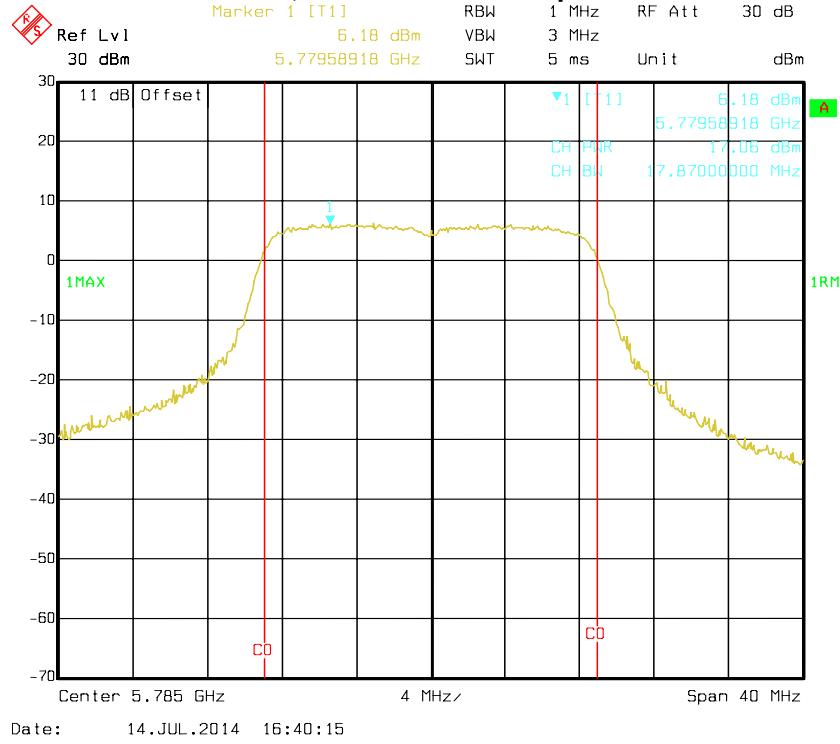

802.11n HT20 mode, Antenna 1: RF Output Power-5825 MHz

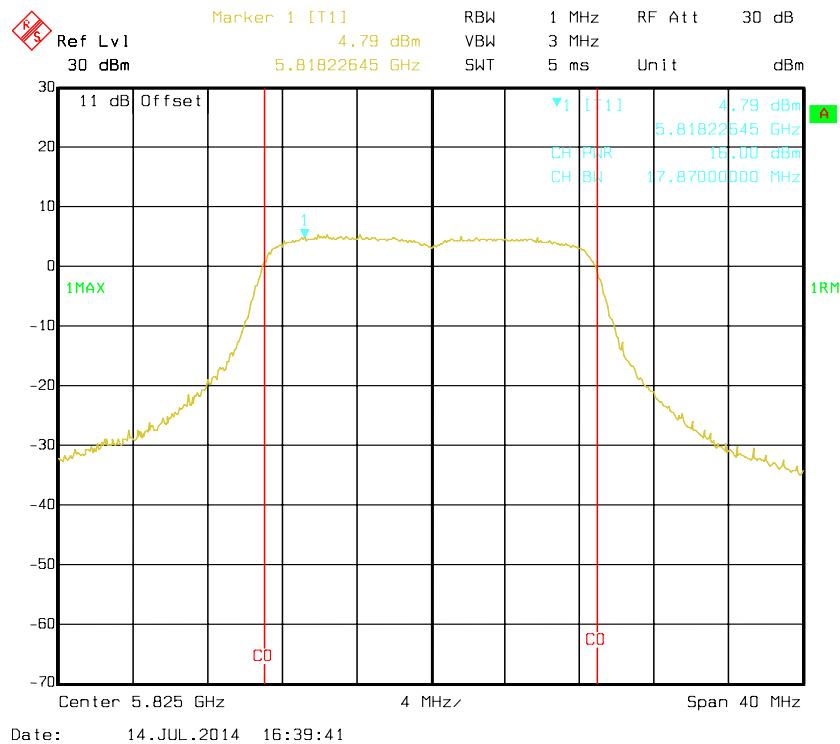


802.11n HT40 mode, Antenna 1: RF Output Power-5755 MHz

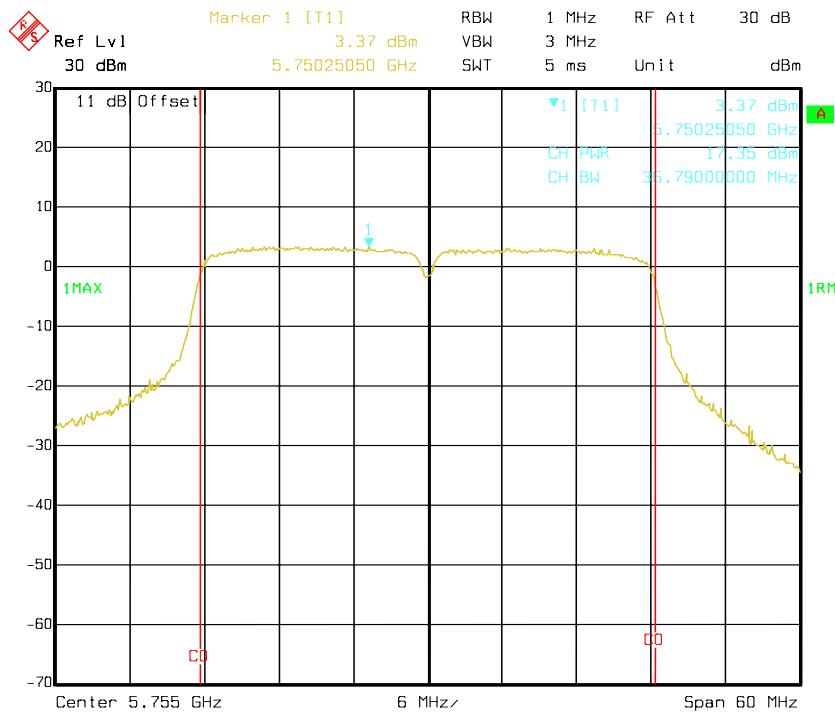

Date: 14.JUL.2014 16:57:07

802.11n HT40 mode, Antenna 1: RF Output Power-5795 MHz

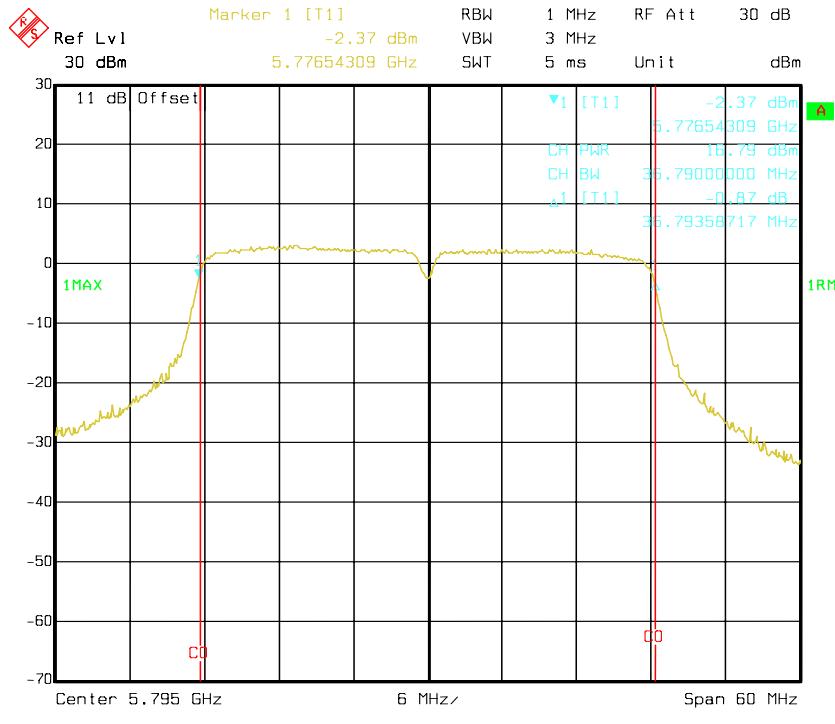

Date: 14.JUL.2014 17:01:25

FCC §15.407(a) (1) (3) (5) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low Loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2013-10-17	2014-10-16

* **Statement of Traceability:** BACL (Chengdu) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C, 28 °C & 24 °C
Relative Humidity:	58 %, 58 % & 60 %
ATM Pressure:	100.9 kPa, 100.8 kPa & 101.6 kPa

The testing was performed by Fidel Zhou on 2014-07-14, 2014-07-15 & 2014-09-18.

Test Mode: Transmitting

Test Result: Pass

5150-5250 MHz:

Mode	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0 + Antenna 1		
802.11a	5180	10.40	9.93	/	17	Pass
	5200	9.56	9.18	/	17	Pass
	5240	10.18	8.90	/	17	Pass
802.11n HT20	5180	7.01	7.33	10.18	17	Pass
	5200	6.65	7.10	9.89	17	Pass
	5240	6.51	6.87	9.70	17	Pass
802.11n HT40	5190	1.41	3.33	5.49	17	Pass
	5230	2.61	2.40	5.52	17	Pass


5725-5850 MHz:

Mode	Frequency (MHz)	Power Spectral Density (dBm/500KHz)			Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0 + Antenna 1		
802.11a	5745	3.52	6.61	/	30	Pass
	5785	4.38	6.17	/	30	Pass
	5825	4.85	4.89	/	30	Pass
802.11n HT20	5745	4.33	4.81	7.59	30	Pass
	5785	4.44	4.31	7.39	30	Pass
	5825	5.36	3.82	7.67	30	Pass
802.11n HT40	5755	1.54	1.09	4.33	30	Pass
	5795	1.57	1.65	4.62	30	Pass

Note: Duty cycle is more than 98%.


5150-5250 MHz:

802.11a mode, Antenna 0: Power Spectral Density-5180 MHz

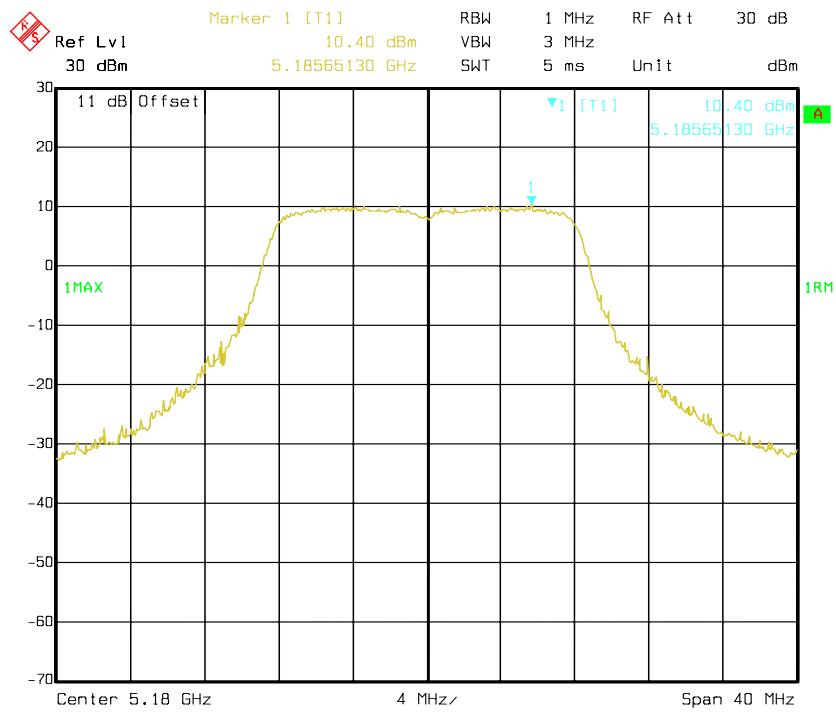


Date: 15.JUL.2014 11:36:00

802.11a mode, Antenna 0: Power Spectral Density-5200 MHz

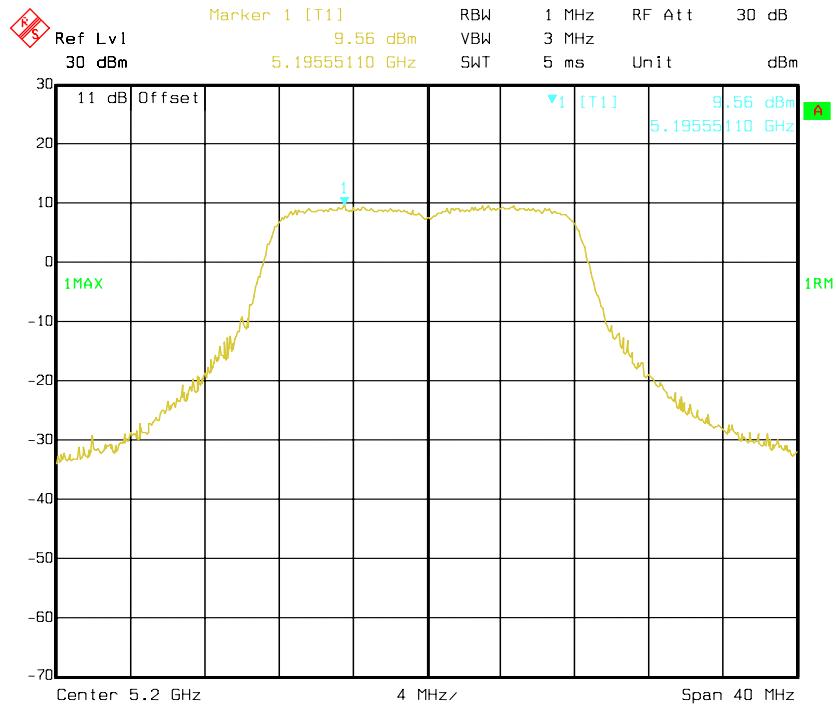


Date: 15.JUL.2014 11:36:23


802.11a mode, Antenna 0: Power Spectral Density-5240 MHz

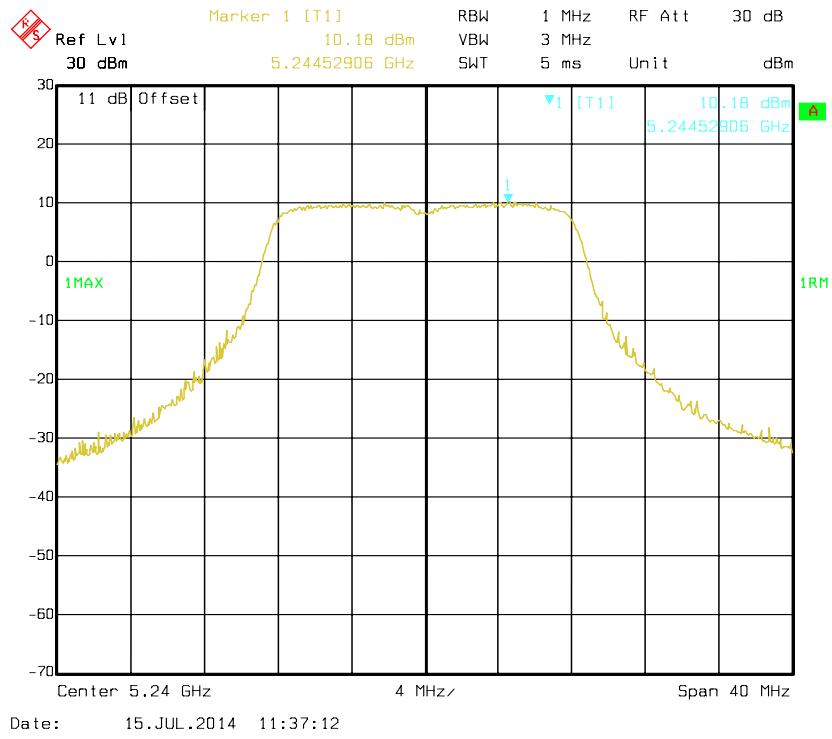


802.11n HT20 mode, Antenna 0: Power Spectral Density-5180 MHz

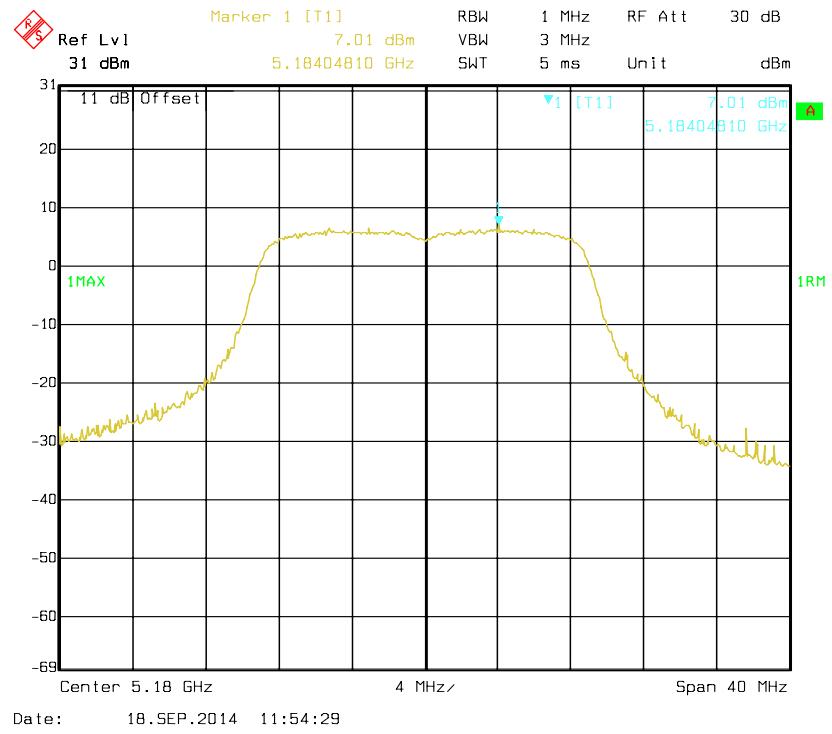


802.11n HT20 mode, Antenna 0: Power Spectral Density-5200 MHz

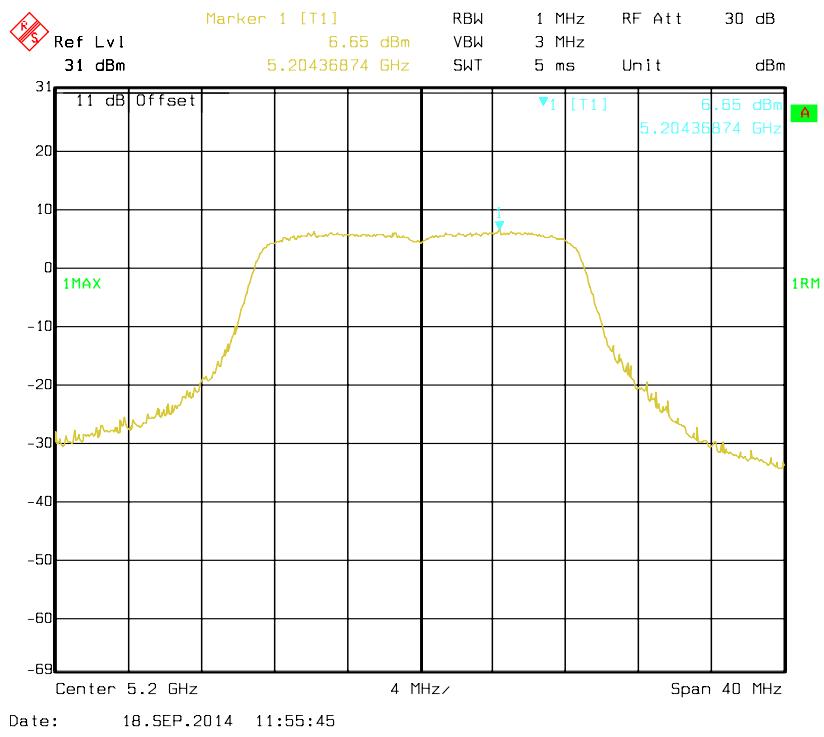


802.11n HT20 mode, Antenna 0: Power Spectral Density-5240 MHz

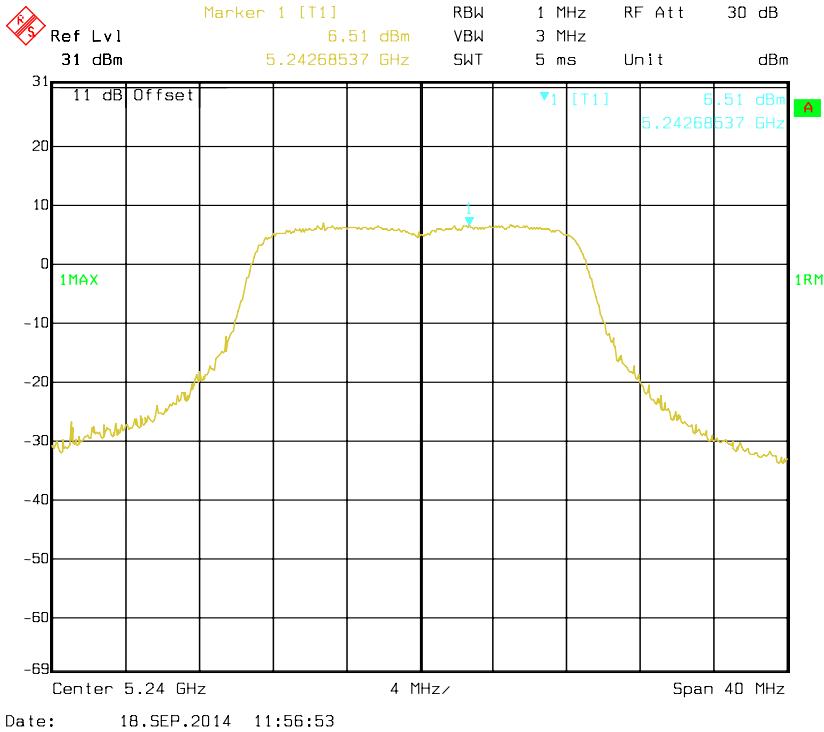


802.11n HT40 mode, Antenna 0: Power Spectral Density-5190 MHz

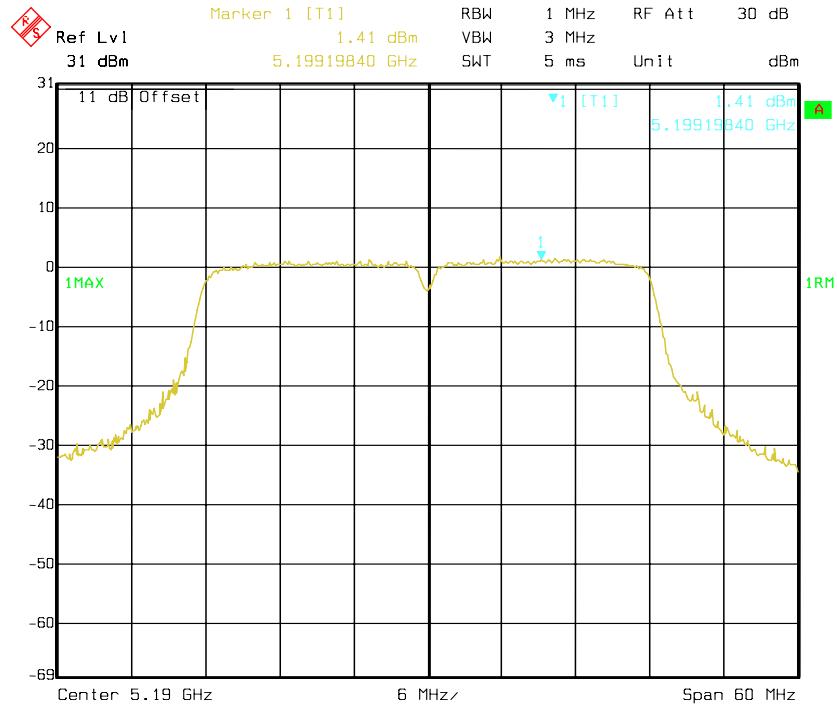


802.11n HT40 mode, Antenna 0: Power Spectral Density-5230 MHz

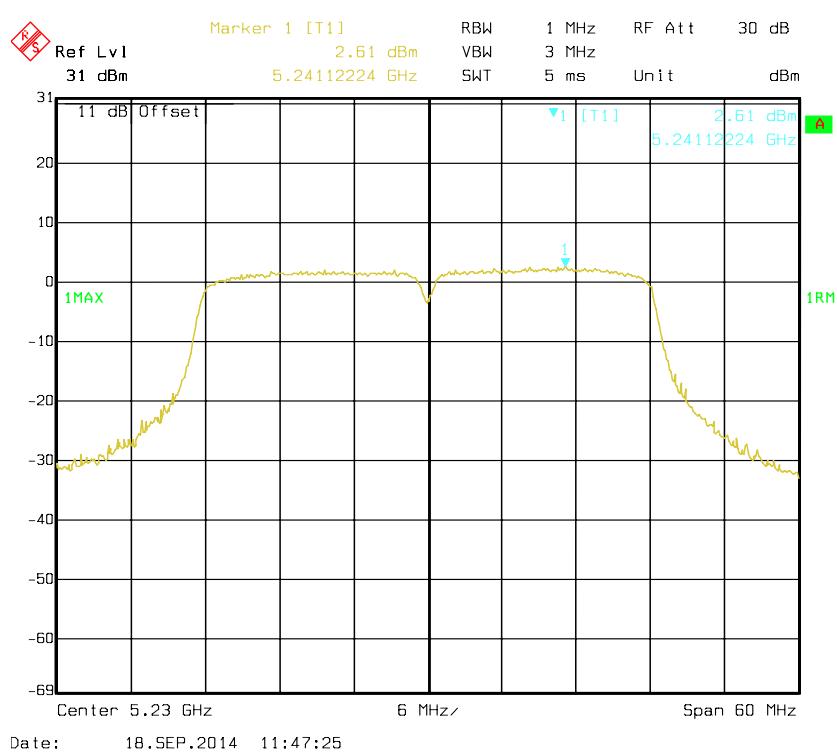


802.11a mode, Antenna 1: Power Spectral Density-5180 MHz

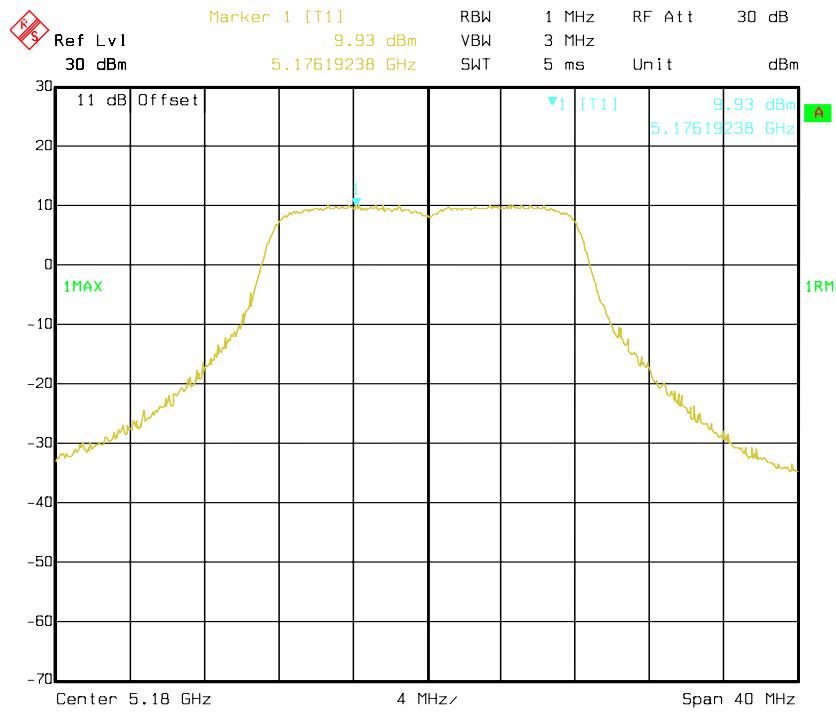


802.11a mode, Antenna 1: Power Spectral Density-5200 MHz

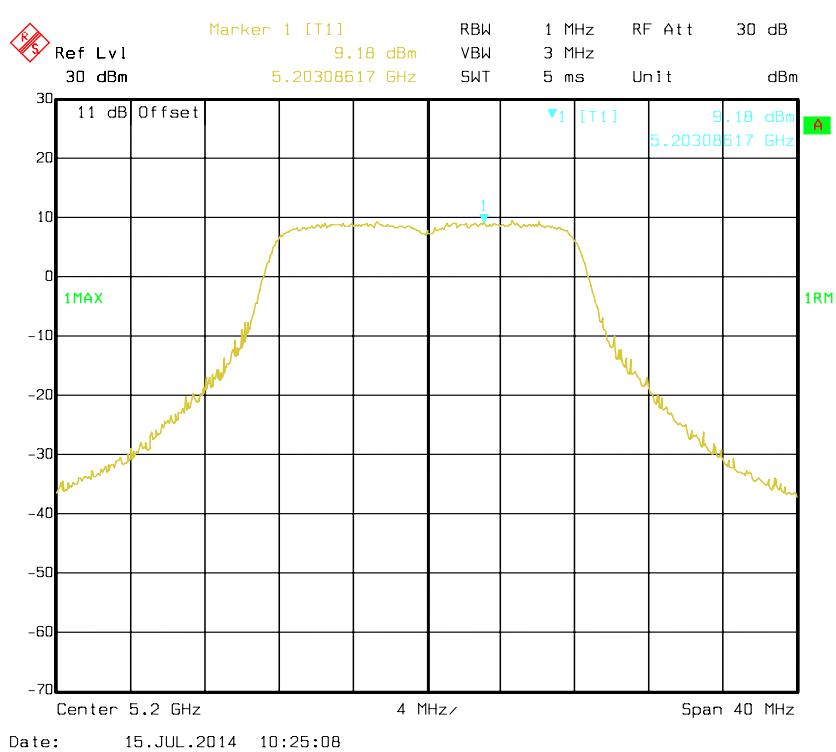


802.11a mode, Antenna 1: Power Spectral Density-5240 MHz

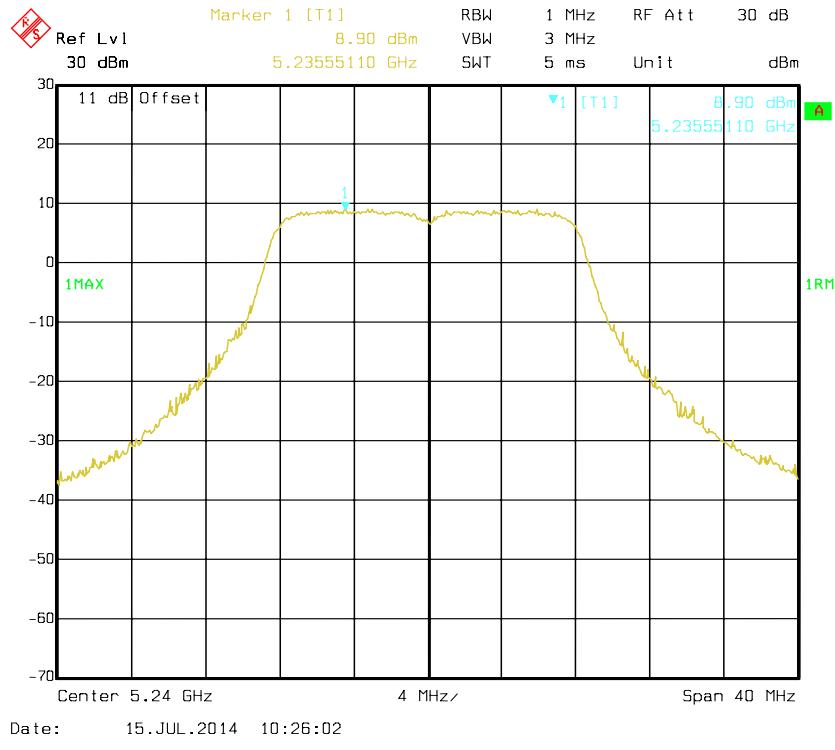


802.11n HT20 mode, Antenna 1: Power Spectral Density-5180 MHz

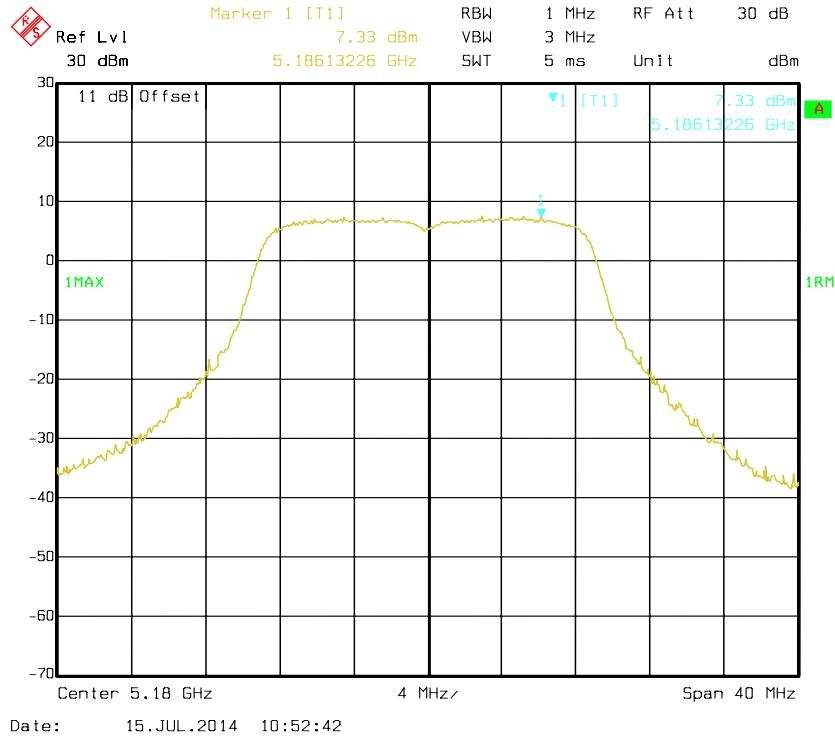


802.11n HT20 mode, Antenna 1: Power Spectral Density-5200 MHz

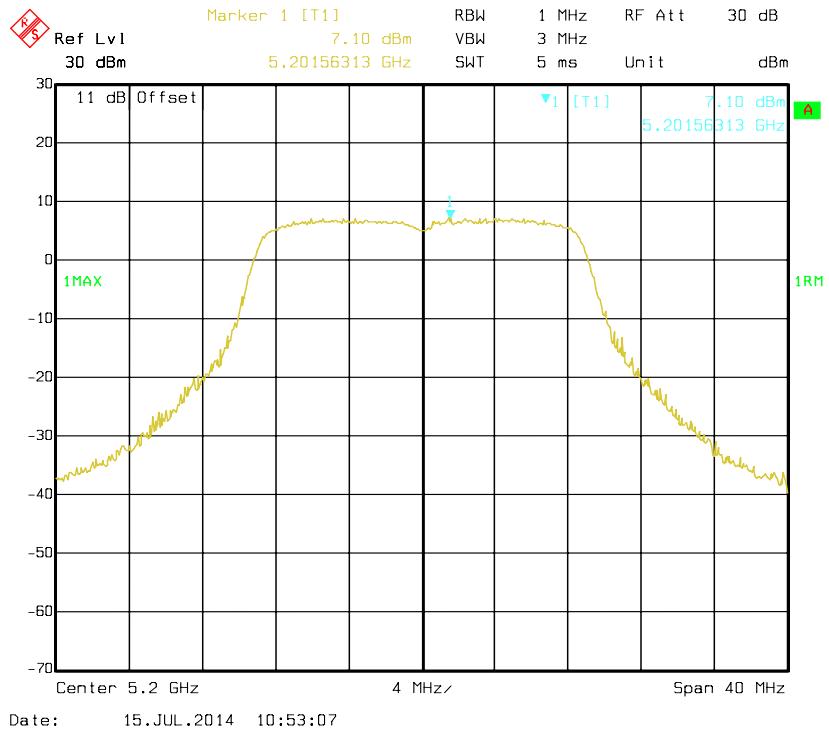


802.11n HT20 mode, Antenna 1: Power Spectral Density-5240 MHz

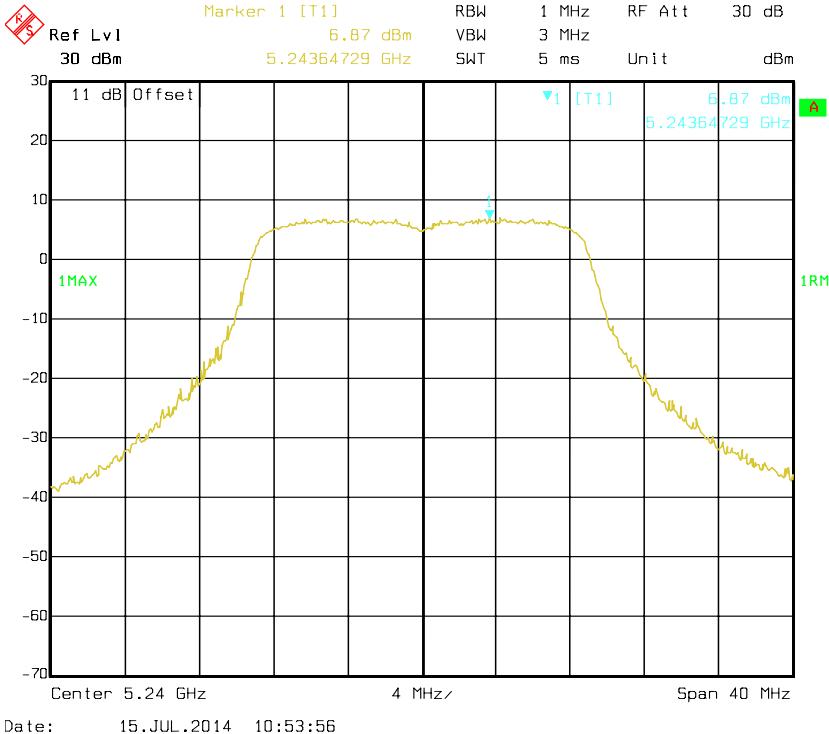

802.11n HT40 mode, Antenna 1: Power Spectral Density-5190 MHz

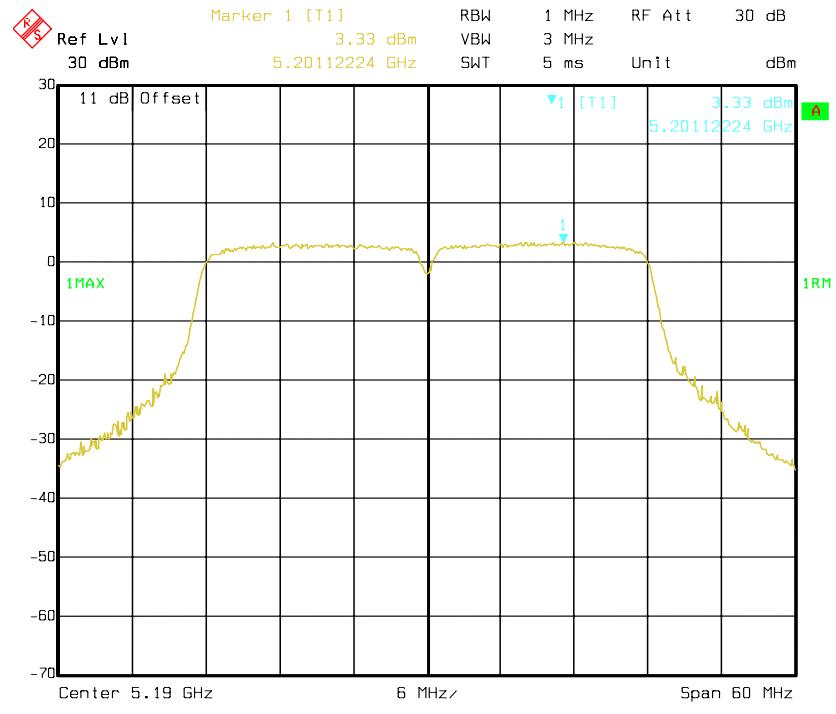


802.11n HT40 mode, Antenna 1: Power Spectral Density-5230 MHz

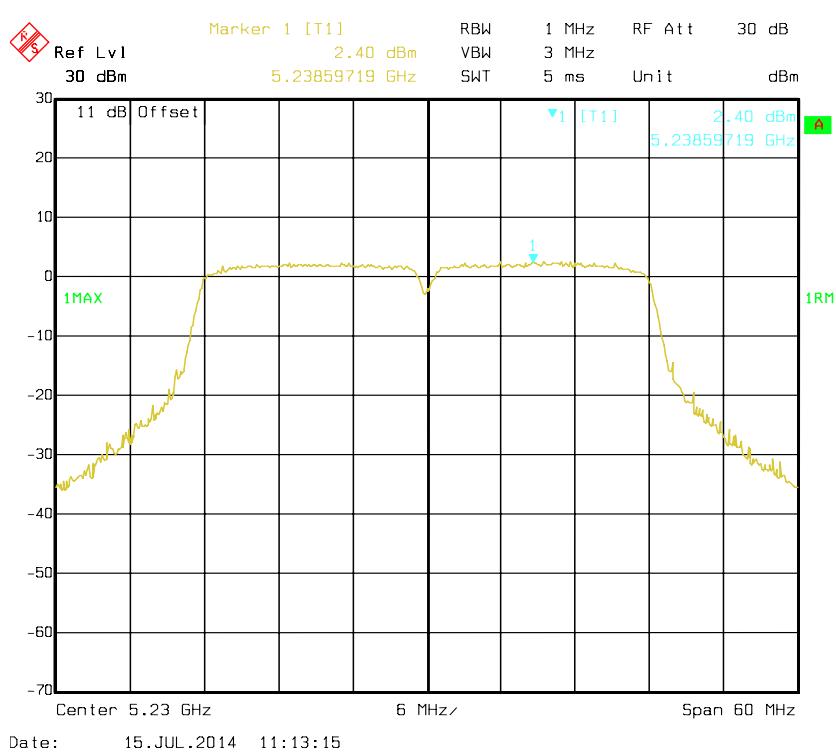


5725-5850 MHz:


802.11a mode, Antenna 0: Power Spectral Density-5745 MHz

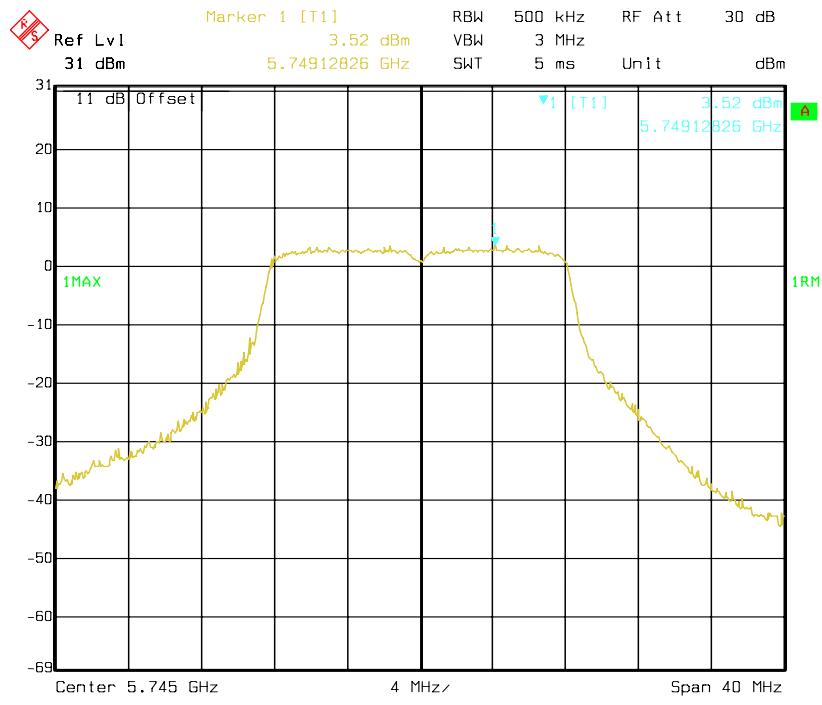


802.11a mode, Antenna 0: Power Spectral Density-5785 MHz

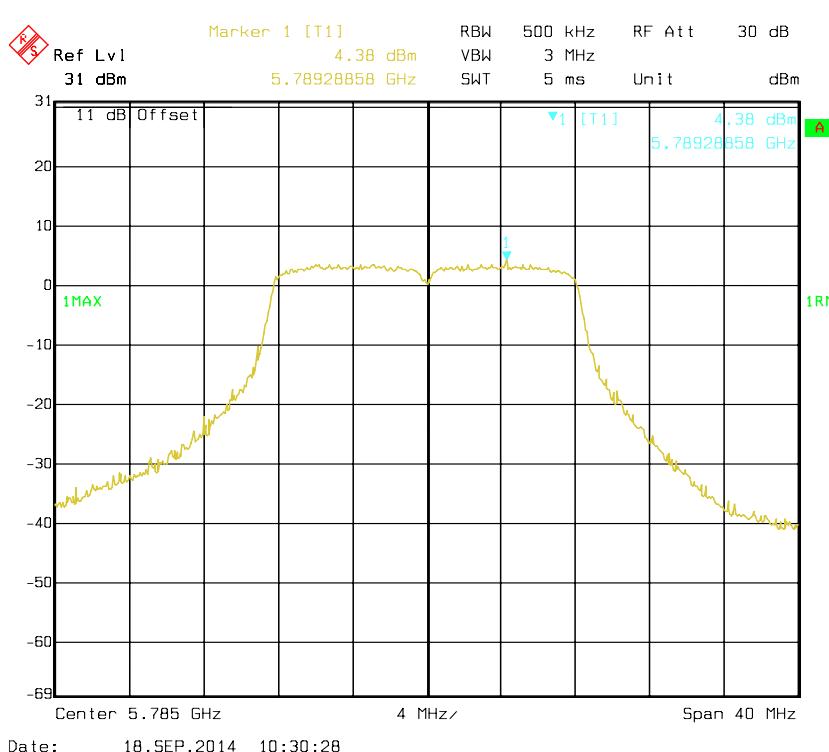


802.11a mode, Antenna 0: Power Spectral Density-5825 MHz

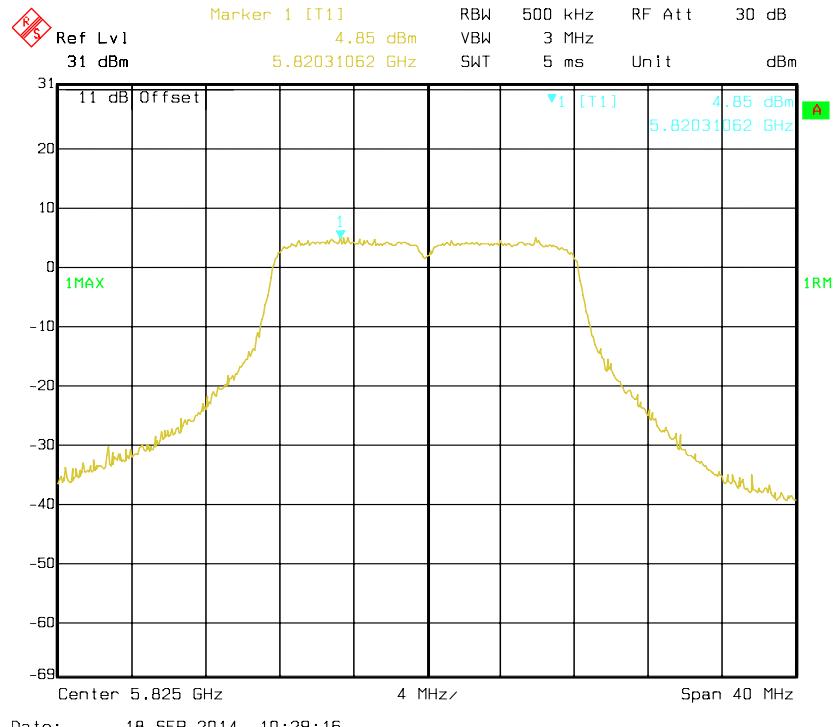


802.11n HT20 mode, Antenna 0: Power Spectral Density-5745 MHz

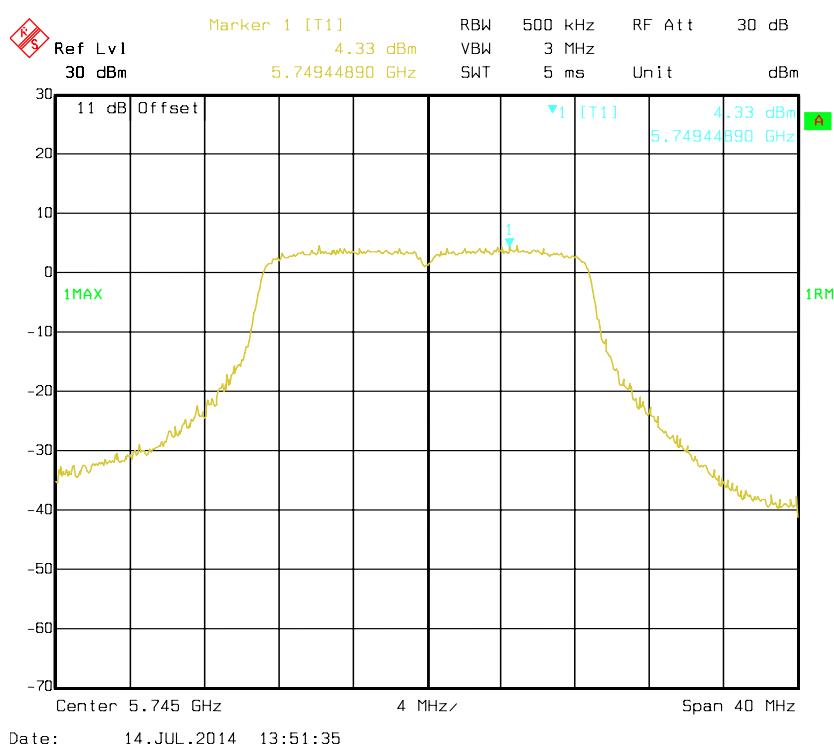


802.11n HT20 mode, Antenna 0: Power Spectral Density-5785 MHz

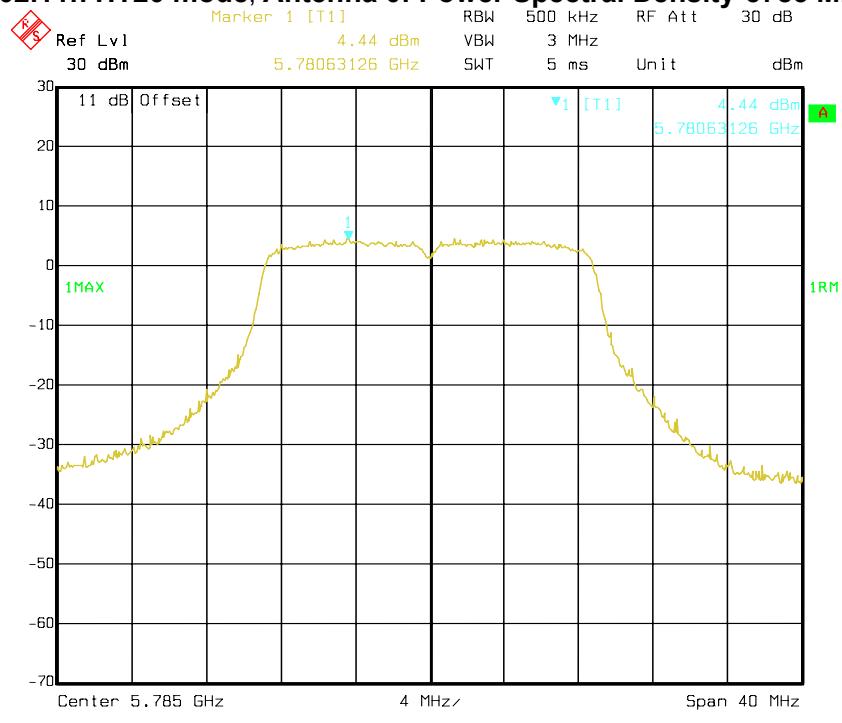


802.11n HT20 mode, Antenna 0: Power Spectral Density-5825 MHz

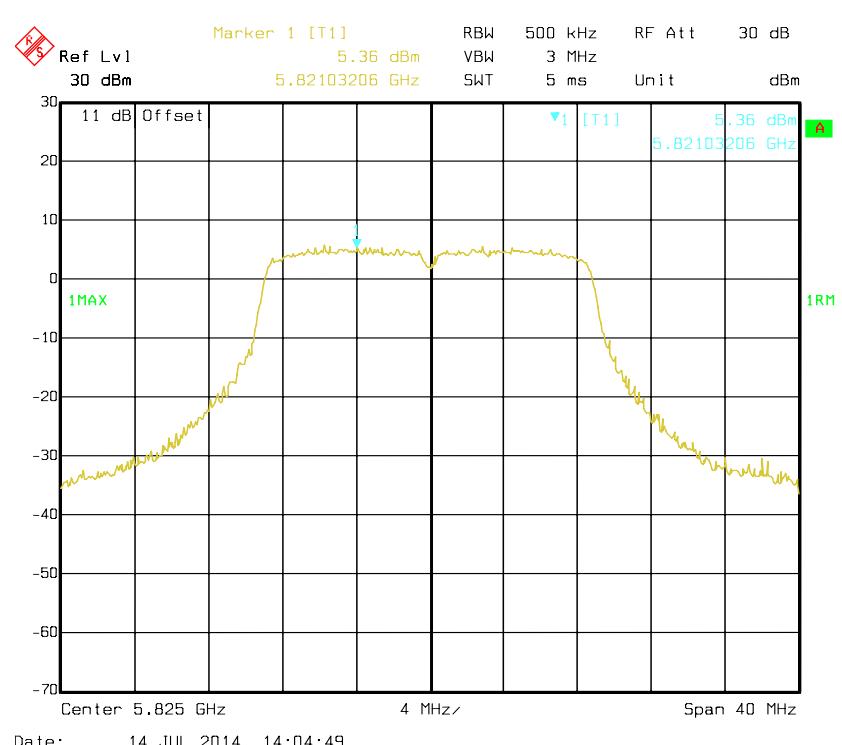


802.11n HT40 mode, Antenna 0: Power Spectral Density-5755 MHz

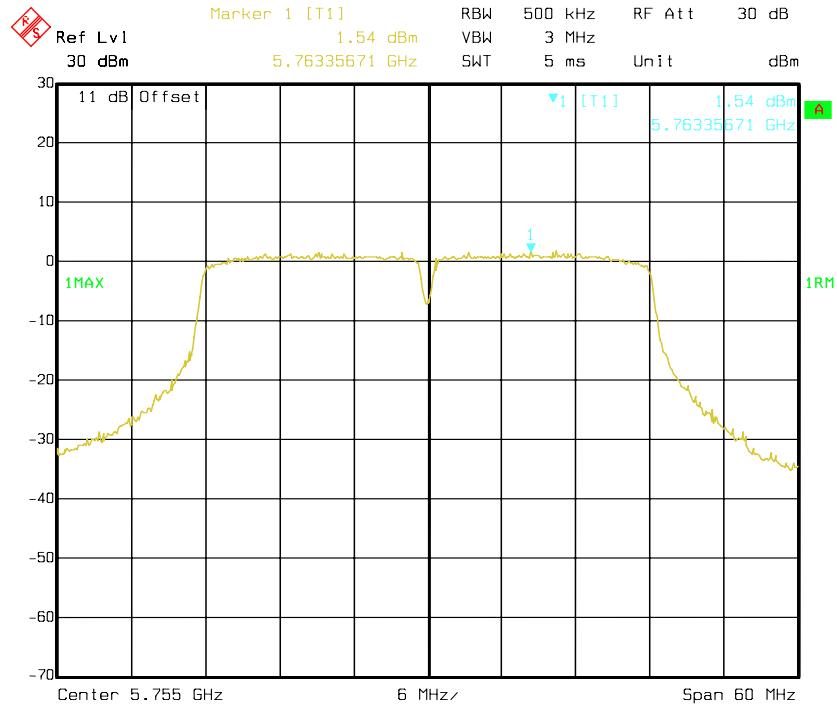


802.11n HT40 mode, Antenna 0: Power Spectral Density-5795 MHz

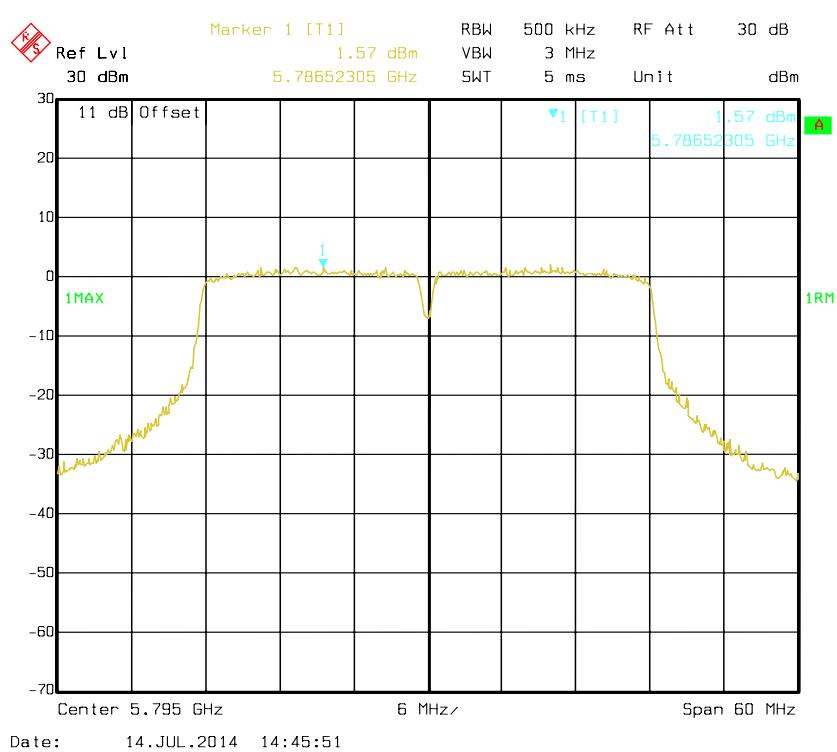


802.11a mode, Antenna 1: Power Spectral Density-5745 MHz

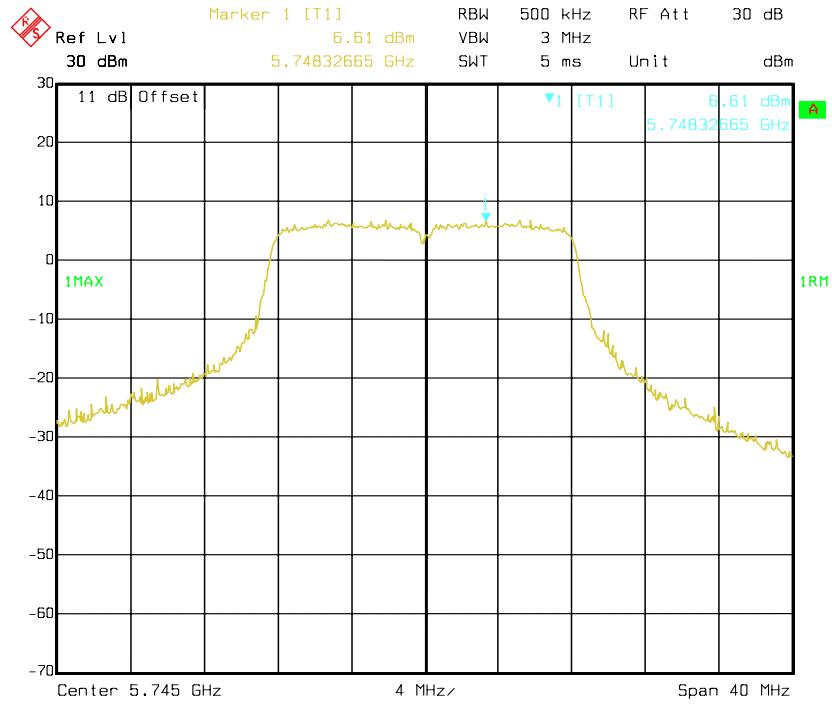


802.11a mode, Antenna 1: Power Spectral Density-5785 MHz

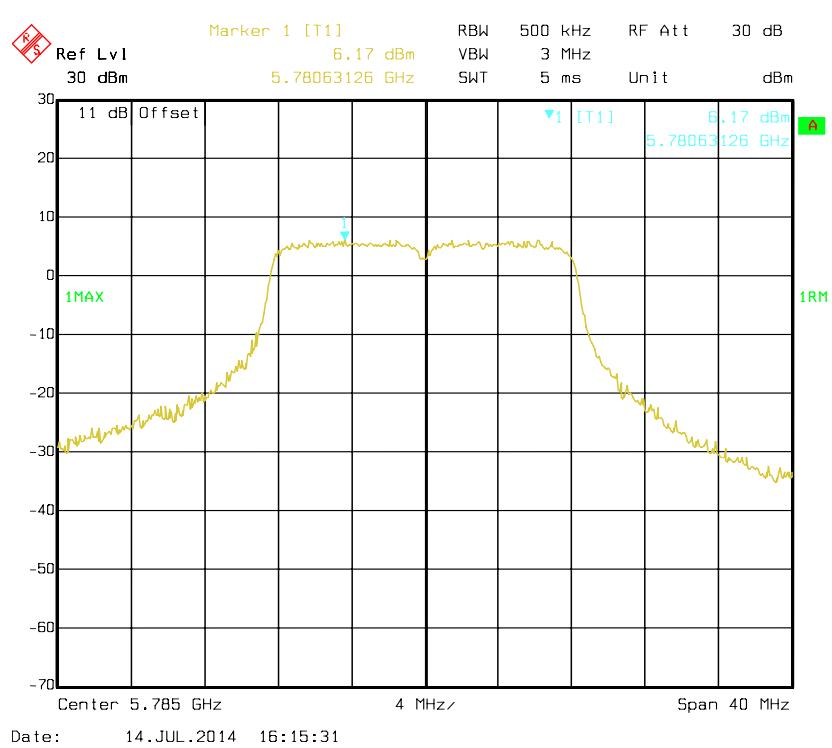


802.11a mode, Antenna 1: Power Spectral Density-5825 MHz

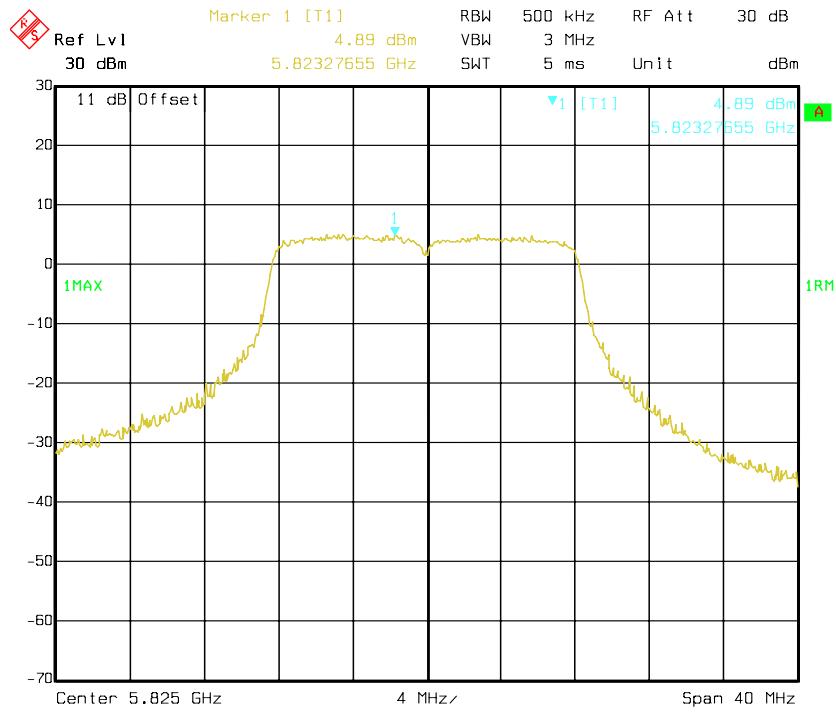


802.11n HT20 mode, Antenna 1: Power Spectral Density-5745 MHz

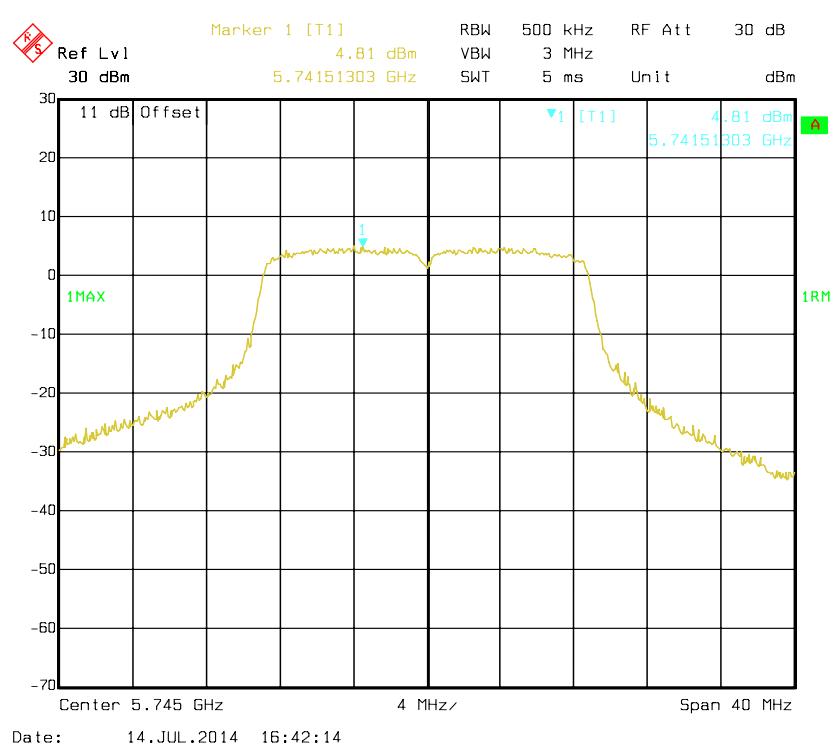


802.11n HT20 mode, Antenna 1: Power Spectral Density-5785 MHz

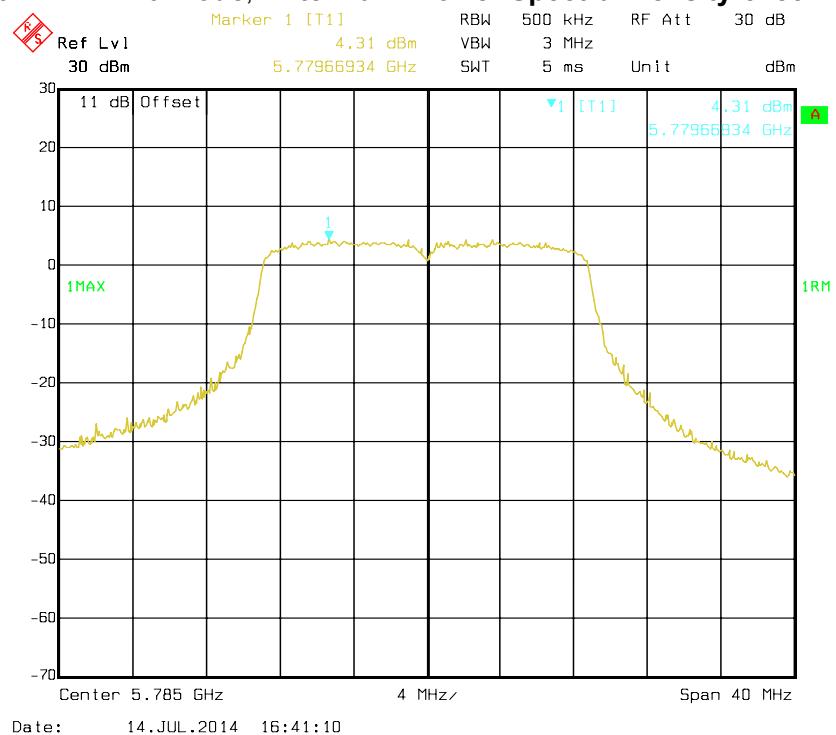


802.11n HT20 mode, Antenna 1: Power Spectral Density-5825 MHz

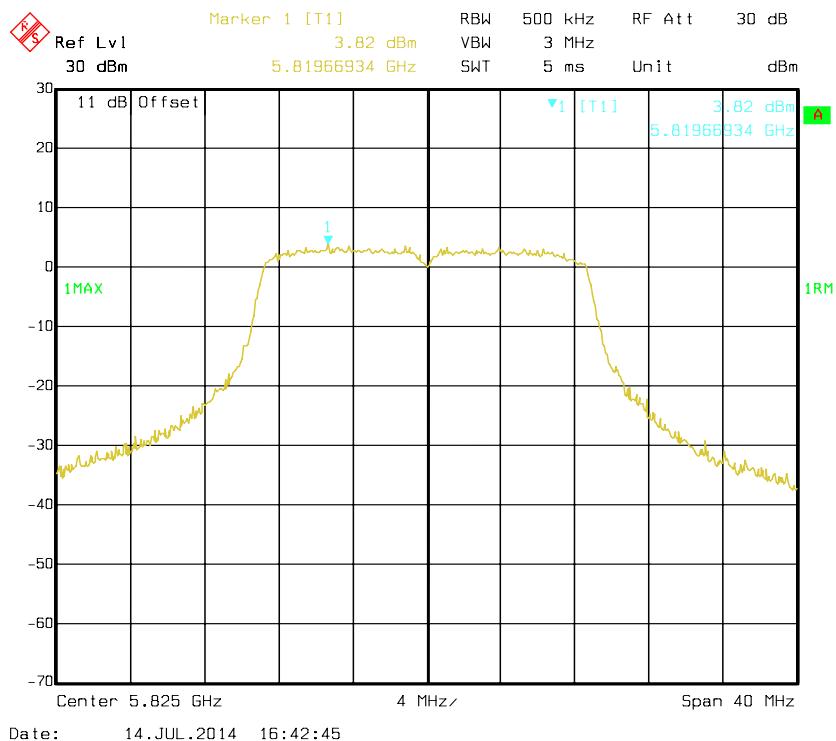

802.11n HT40 mode, Antenna 1: Power Spectral Density-5755 MHz

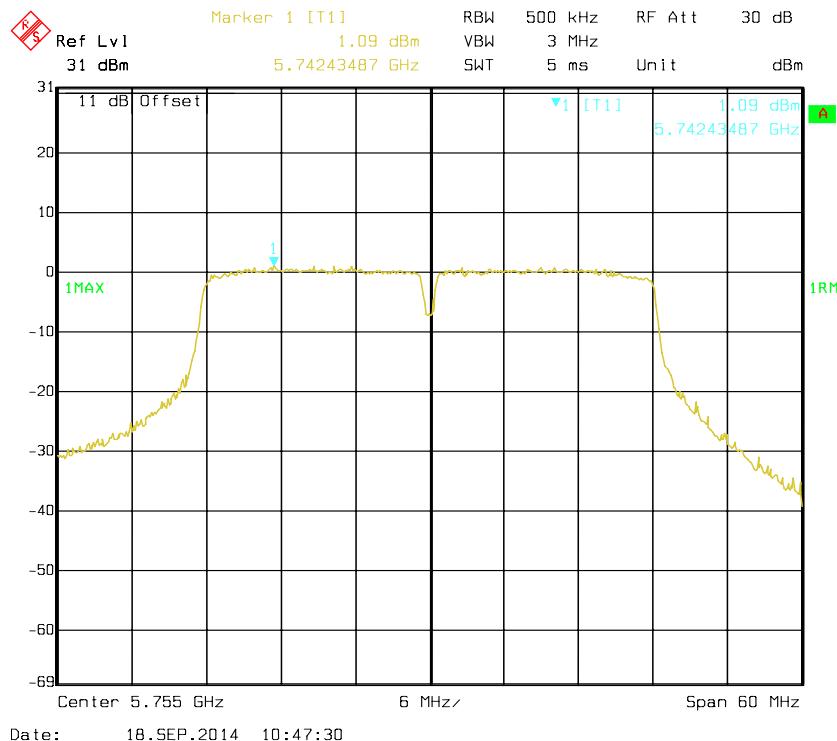

802.11n HT40 mode, Antenna 1: Power Spectral Density-5795 MHz

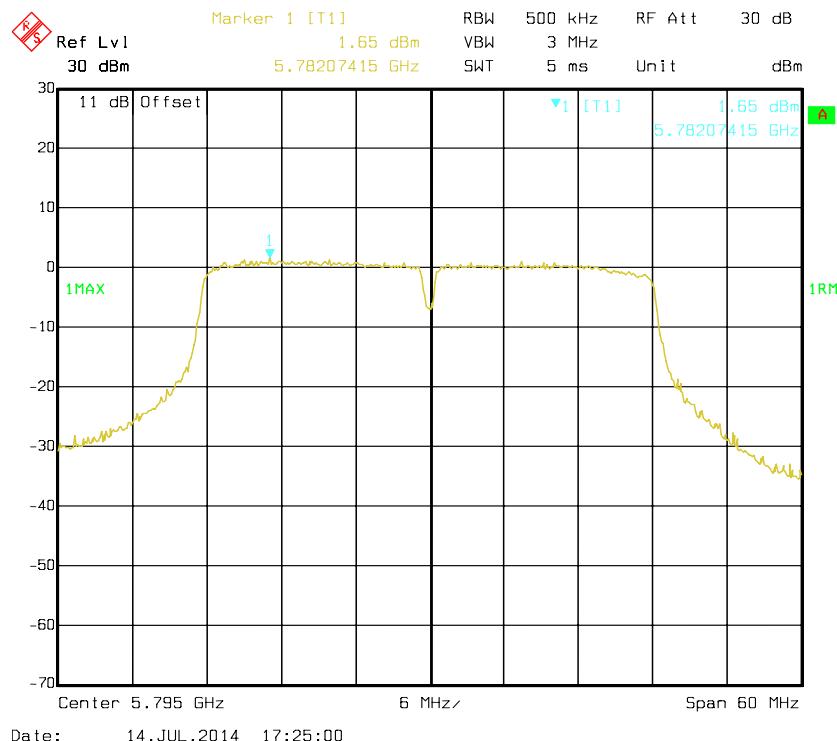

***** END OF REPORT *****