

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	MICRO HD+ UW CAMERA					
Marketing Name:	Micro HD+					
Brand Name:	SeaLife					
Model No.:	SL501; HDV-9A; micro HD+					
Model Difference:	Different name for market segmentation					
FCC ID:	2ACKFSL501					
Report No.:	E2/2014/60026					
Issue Date:	Jul. 18, 2014					
FCC Rule Part:	§15.247, Cat: DTS					
Prepared for:	Pioneer Research 97 Foster Road, Suite 5, Moorestown NJ 08057, USA					
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333					
TAF Tating Laboratory	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

0513

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

be noted in the revision section of the document.



FCC ID: 2ACKFSL501

Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 2 of 85

VERIFICATION OF COMPLIANCE

Applicant:	Pioneer Research
1 ppiculit.	97 Foster Road, Suite 5, Moorestown NJ 08057, USA
Product Name:	MICRO HD+ UW CAMERA
Marketing Name:	Micro HD+
Brand Name:	SeaLife
Model No.:	SL501; HDV-9A; micro HD+
Model Difference:	Different name for market segmentation
File Number:	E2/2014/60026
FCC ID:	2ACKFSL501
Date of test:	May 29, 2014 ~ Jul. 16, 2014
Date of EUT Received:	May 29, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date	Jul. 18, 2014
Prepared By:	Jazz Huang / Sr. Engineer Judy Hin	Date	Jul. 18, 2014
Approved By:	Judy Hsu / Clerk Tim Ch ang	Date	Jul. 18, 2014

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Version

Version No.	Date	Description
00	Jul. 18, 2014	Initial creation of document



FCC ID: 2ACKFSL501

Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 4 of 85

Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product description	6
	1.2	Related Submittal(s) / Grant (s)	8
	1.3	Test Methodology	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYS	FEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Configuration of Tested System	10
3	SUM	IMARY OF TEST RESULTS	11
4	DES	CRIPTION OF TEST MODES	12
5	MEA	ASUREMENT UNCERTAINTY	13
6	CON	DUCTED EMISSION TEST	
	6.1	Standard Applicable:	14
	6.2	Measurement Equipment Used:	14
	6.3	EUT Setup:	15
	6.4	Test SET-UP (Block Diagram of Configuration)	15
	6.5	Measurement Procedure:	15
	6.6	Measurement Result:	15
7	PEA	K OUTPUT POWER MEASUREMENT	18
	7.1	Standard Applicable:	18
	7.2	Measurement Equipment Used:	19
	7.3	Test Set-up:	20
	7.4	Measurement Procedure:	21
	7.5	Measurement Result:	24
8	6dB	BANDWIDTH	26
	8.1	Standard Applicable:	26
	8.2	Measurement Equipment Used:	26
	8.3	Test Set-up:	27
	8.4	Measurement Procedure:	27
	8.5	Measurement Result:	28



FCC ID: 2ACKFSL501

9	BAN	D EDGES MEASUREMENT	34
	9.1	Standard Applicable:	
	9.2	Measurement Equipment Used:	
	9.3	Test SET-UP:	
	9.4	Measurement Procedure:	
	9.5	Field Strength Calculation:	
	9.6	Measurement Result:	
10	SPUE	RIOUS EMISSION TEST	
	10.1	Standard Applicable	
	10.2	Measurement Equipment Used:	
	10.3	Test SET-UP:	
	10.4	Measurement Procedure:	49
	10.5	Field Strength Calculation	
	10.6	Measurement Result:	
11	PEAI	K POWER SPECTRAL DENSITY	78
	11.1	Standard Applicable:	
	11.2	Measurement Equipment Used:	
	11.3	Test Set-up:	
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	
	11.5	Measurement Result:	79
12	ANT	ENNA REQUIREMENT	
	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	



GENERAL INFORMATION 1

1.1 **Product description**

General:

Product Name:	MICRO HD+ UW CAMERA					
Marketing Name:	Micro HD+					
Brand Name:	SeaLife					
Model No.:	SL501; HDV-9	9A; micro HD+				
Model difference:	Different name	e for market segmentation				
Hardware Version:	N/A					
Software Version:	N/A					
Data Cable:	Model No.: N	/A, Supplier: N/A				
	3.6Vdc Recha	rgeable Li-ion Battery or 5Vdc from AC/DC Adapter				
Power Supply:	Battery:	Model: 060-NCA10-34500, Supplier: Panasonic				
	Adapter:	Model No.: PA-2, Supplier: SALiX				

WLAN 2.4GHz:

Wi-Fi	Wi-Fi Frequency Ch Range Ch		Rated Power (Peak)	Modulation Technology		
11b/g	2412-2462	11 b: 16.08dBm g: 21.53dBm		DSSS OFDM		
11n (2.4GHz)	HT20 2412-2462	11	n: 20.84dBm	OFDM		
Antenna	Designation:	Multilayer Chip Antenna, Peak Gain: 2.82dBi.				
Modulati	on type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM				
Transition	n Rate:	0	5.5/11 Mbps; 12/18/24/36/48/54 Mbps Hz: 6.5 – 65Mbps			

This report applies for WLAN, and complies with FCC rule part 15C.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



IEEE 802.11n Spec:

MCS Index					NG	NCBPS		NDBPS		Datarate(Mbps)			
	Nss	Modulation	R	NBPSC	NC	BPS	ND	BPS	800	nsGI	400nsGI		
- 1000 - 1000					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15	
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30	
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45	
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60	
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90	
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120	
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135	
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150	

Symbol	Explanation				
NSS	Number of spatial streams				
R	Code rate				
NBPSC	Number of coded bite per single carrier				
NCBPS	Number of coded bite per symbol				
NDBPS	Number of data bite per symbol				
GI	Guard interval				

802.11n HT20 MCS8 -15

MCG	Modulation		N _{BPSCS} (i _{SS})			N _{CBPS}	N _{DBPS}	Data rate (Mb/s)	
MCS Index		R		N _{SD}	N _{SP}			800 ns GI	400 ns GI (see NOTE)
8	BPSK	1/2	1	52	4	104	52	13.0	14.4
9	QPSK	1/2	2	52	4	208	104	26.0	28.9
10	QPSK	3/4	2	52	4	208	156	39.0	43.3
11	16-QAM	1/2	4	52	4	416	208	52.0	57.8
12	16-QAM	3/4	4	52	4	416	312	78.0	86.7
13	64-QAM	2/3	6	52	4	624	416	104.0	115.6
14	64-QAM	3/4	6	52	4	624	468	117.0	130.0
15	64-QAM	5/6	6	52	4	624	520	130.0	144.4
NOTE-T	he 400 ns GI rate	values	are rounded to 1	decima	l place.				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



1.2 **Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: 2ACKFSL501 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B under the DoC procedure.

Test Methodology 1.3

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Jun. 2014 KDB558074 D01 V03r02 for compliance to FCC 47CFR 15.247 requirements.

1.4 **Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009. FCC Registration Number: 628985. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, Canada Registration Number: 4620A-5.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. FCC Registration Number: 455997. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, IC Registration Number: 4620A-6.

1.5 **Special Accessories**

There are no special accessories used while test was conducted.

Equipment Modifications 1.6

There was no modification incorporated into the EUT.

Offies Sofiel was stated in Fourier and in a condition of the form of the fo tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.4 **Configuration of Tested System**

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Fig. 2-2 AC Power Line Conducted Emission



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Notebook	Lenovo	L430	R9-YYG88	N/A	N/A
2.	DC Power Supply	Agilent	E3634A	MY53150030	N/A	N/A
3.	WLAN Test Software	Tera Term Pro	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SUMMARY OF TEST RESULTS 3

FCC	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant



4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n_20MHz mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

The worst case is determined by the output power that generates the highest emission. As examined in the section of output power measurement, the section 7.5, the lowest data rate at b/g/n resulted the highest level of fundamental emission, and therefore, the lowest data rate is chosen as the worst-case to conduct the remaining of other mandatory test cases.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was tested as resulted in pre-scanned measurement with respect to 2.4GHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/- 2.586 dB		
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)		
6dB Bandwidth	+/- 123.36 Hz		
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB		
Peak Power Density	+/- 1.55 dB		
Temperature	+/- 0.8 °C		
Humidity	+/- 4.7 %		
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%		

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty (Polarization : Horizontal)	30MHz - 167MHz: +/- 4.22dB		
	167MHz -500MHz: +/- 3.44dB		
	0.5GHz-1GHz: +/- 3.39dB		
	1GHz - 18GHz: +/- 4.08dB		
	18GHz - 40GHz: +/- 4.08dB		

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cleart's environment of the provention of the provention of the company's findings at the time of the intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)				
riequency range	dD	u v)			
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			
Note					

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI 3	101311	2013/06/20	2014/06/19			
Coaxial Cables	N/A	N30N30-1042-150c m	N/A	2014/02/07	2015/02/06			
LISN	Schwarzbeck	NSLK 8127	8127-648	2013/06/10	2014/06/09			
LISN	Rolf-Heine	NNB-2/16Z	99012	2014/03/26	2015/03/25			
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.			

Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST CALI							
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI 3	101311	2014/06/20	2015/06/19		
LISN	Schwarzbeck	NSLK 8127	8127-648	2014/06/10	2015/06/09		

Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的長。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

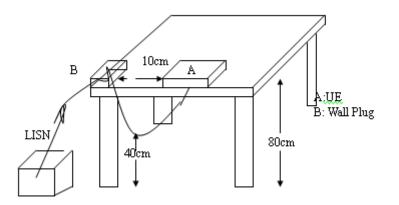

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode:	Operation Mode			Test Date:	Jul. 14, 2014
Femperature:	26	Humidity:	60 %	Test By:	Jazz
Probe:	L1/N				
D dBuV					
1 2 A A A A A A A A A A A A A A A A A A				ISPR22 Class B Con	
	I I I I I I I I I I I I I I I I I I I				

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1		0.1740	47.75	0.09	47.84	64.77	-16.93	peak	
2		0.2100	45.41	0.08	45.49	63.21	-17.72	peak	
3		0.2468	42.00	0.10	42.10	61.86	-19.76	peak	
4		2.8940	38.51	0.59	39.10	56.00	-16.90	peak	
- 5		4.5420	39.39	0.62	40.01	56.00	-15.99	peak	
6	*	12.1580	49.44	0.64	50.08	60.00	-9.92	peak	
7		12.1580	31.30	0.64	31.94	50.00	-18.06	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



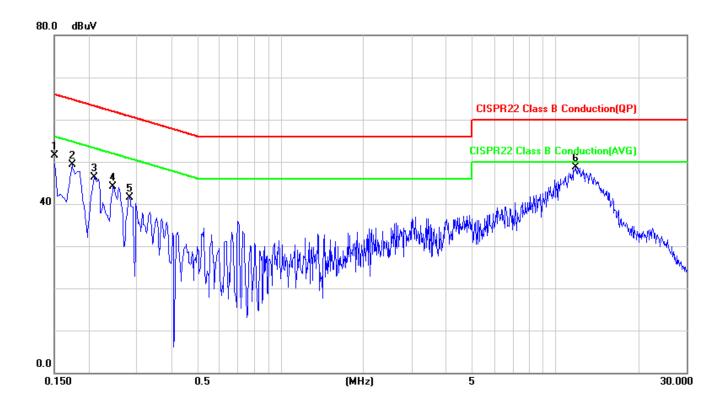

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1		0.1500	51.44	0.09	51.53	66.00	-14.47	peak	
2		0.1740	49.12	0.09	49.21	64.77	-15.56	peak	
3		0.2100	46.25	0.09	46.34	63.21	-16.87	peak	
4		0.2460	44.08	0.11	44.19	61.89	-17.70	peak	
5		0.2820	41.33	0.13	41.46	60.76	-19.30	peak	
6	*	11.8940	47.95	0.66	48.61	60.00	-11.39	peak	
7		11.8940	32.60	0.66	33.26	50.00	-16.74	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 18 of 85

7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Measurement Equipment Used: 7.2

SGS Conducted Room									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration	Calibration				
				Date	Due				
Spectrum Analyzer	Agilent	N9010A	MY53400256	2013/10/26	2014/10/25				
Power Meter	Anritsu	ML2496A	1326001	2013/06/20	2014/06/19				
Power Sensor	Anritsu	MA2411B	1315048	2013/06/20	2014/06/19				
Power Sensor	Anritsu	MA2411B	1315049	2013/06/20	2014/06/19				
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	2	2014/01/06	2015/01/05				
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	3	2014/01/06	2015/01/05				
Coaxial Cable 80cm	WOKEN	00100A1F1A185C	1	2014/01/06	2015/01/05				
DC Block	Mini-Circuits	BLK-18-S+	4	2014/01/06	2015/01/05				
DC Block	PASTERNACK	PE8210	5	2014/01/06	2015/01/05				
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-019	2014/01/06	2015/01/05				
Splitter	Splitter WOKEN		DOM35LW1A2	2014/01/06	2015/01/05				
Attenuator	Mini-Circuits	BW-S10W2+	6	2014/01/06	2015/01/05				
Attenuator	WOKEN	218FS-10	7	2014/01/06	2015/01/05				
Temperature Chamber	TERCHY	MHK-120LK	1020582	2013/06/18	2014/06/17				
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15				
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/24	2015/04/23				
DC Power Supply	Agilent	E3640A	MY53140006	2014/05/31	2015/05/30				
DC Power Supply	Agilent	E3640A	MY53130054	2014/05/21	2015/05/20				

SGS Conducted Emission Test Site No.A								
Name of Fasimerat	Manufacturer	Model		Calibration		Calibration		
Name of Equipment			Serial Number	Date	Due			
Power Meter	Anritsu	ML2496A	1326001	2014/06/20	2015/06/19			
Power Sensor	Anritsu	MA2411B	1315048	2014/06/20	2015/06/19			
Power Sensor	Anritsu	MA2411B	1315049	2014/06/20	2015/06/19			
Temperature Chamber	TERCHY	MHK-120LK	1020582	2014/06/18	2015/06/17			

Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.3 **Test Set-up:**

Spectrum:

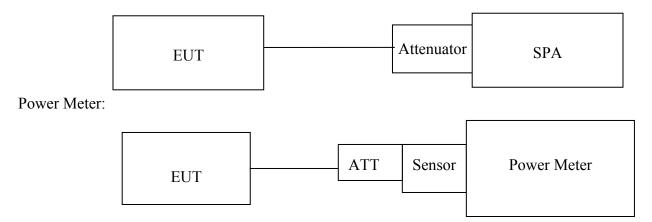

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

3. Record the max. Reading as observed from Spectrum or Power Meter.

4. Repeat above procedures until all frequency of interest measured was complete.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Test Procedure:

Set span = 0, RBW = 8MHz, VBW = 8MHz, Detector = Peak Duty Cycle:

	Duty Cycle	Duty Factor (dBm)
802.11b	0.994	0.056
802.11g	0.986	0.125
802.11n_20 (2.4G)	0.983	0.148

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Duty Factor:


802.11 b

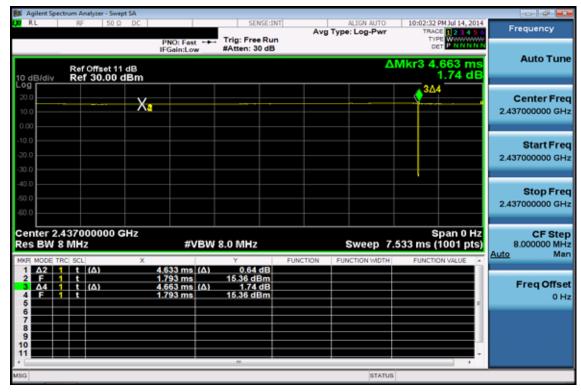

802.11 g

📕 Agilent Spectrum Analyzer - Swept SA					
100 RL RF 50Ω DC		SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr		Frequency
	PNO: Fast	Trig: Free Run #Atten: 30 dB		DET PNNNNN	
Ref Offset 11 dB 10 dB/div Ref 30.00 dBm				ΔMkr3 2.094 ms -0.98 dB	Auto Tune
Log 200 10.0 Augebran melay hydr. Xagon orlewydd	tyalla.10,ah-lucanaalu	مراديموالياوورو والمحموط والمحار	n Marthul Satellan ann an Màr	, ~3∆4 y=dtr./3,-sodiy ====================================	Center Freq 2.437000000 GHz
-10.0					Start Freq 2.437000000 GHz
-40.0 -50.0 -60.0					Stop Freq 2.437000000 GHz
Center 2.437000000 GHz Res BW 8 MHz	#VBW 8	3.0 MHz	Sweep	Span 0 Hz 3.000 ms (1001 pts)	CF Step 8.000000 MHz Auto Man
MKR MODE TRC SCL X 1 Δ2 1 t (Δ) 2 F 1 t 3 Δ4 1 t (Δ) 4 F 1 t (Δ) 6	2.064 ms (Δ) 540.0 μs 2.094 ms (Δ) 540.0 μs	Y FU -1.03 dB 16.33 dBm -0.98 dB 16.33 dBm	INCTION FUNCTION WIDT	H FUNCTION VALUE	Freq Offset 0 Hz
7 8 9 10 11		11			
MSG			STAT	us	







802.11 n_20 MHz

📕 Agilent Spectrum Analyzer - Swept SA			
(M) RL RF 50 Ω DC	PNO: Fast +++ Trig: Free Run	Avg Type: Log-Pwr TR/	2 PM Jul 14, 2014 Frequency VPC
Ref Offset 11 dB 10 dB/div Ref 30.00 dBm	IFGain:Low #Atten: 30 dB	ΔMkr3 1	DET PINNINN
200 10.0 0.00	ประการแล้งไปประสารการได้มีประการสำนักประการ	เขะสู่ในระเLetagางูของเหม่า รุณุณ์เชื่องกุลวงสอง	Center Freq 2.437000000 GHz
-10.0			Start Freq 2.437000000 GHz
-40.0 -50.0 -60.0			Stop Freq 2.437000000 GHz
Center 2.437000000 GHz Res BW 8 MHz	#VBW 8.0 MHz	Sweep 3.000 ms	Auto Man
MKR MODE TRC SCL X	1.920 ms (Δ) -0.40 dB	FUNCTION FUNCTION WIDTH FUNCT	TION VALUE
2 F 1 t 3 Δ4 1 t (Δ) 4 F 1 t	306.0 μs 16.33 dBm 1.953 ms (Δ) -0.82 dB 306.0 μs 16.33 dBm		Freq Offset 0 Hz
6 7 8 9 10 11			
MSG		STATUS	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



7.5 **Measurement Result:**

802.11b

			Peak Power Output (dBm)								
СП	Frequency		Data	Degratized Limit							
СН	(MHz)	1	2	2 5.5 11		Required Limit					
1	2412	15.94	15.85	15.79	15.78	1 Watt = 30 dBm					
6	2437	16.08	15.96	15.89	15.71	1 Watt = 30 dBm					
11	2462	15.99	15.78	15.68	15.52	1 Watt = 30 dBm					

			Average Power Output (dBm)								
СП	Frequency	Degreeined Lineit									
СН	(MHz)	1	2	5.5	11	Required Limit					
1	2412	13.25	13.23	13.21	13.19	1 Watt = 30 dBm					
6	2437	13.29	13.26	13.25	13.22	1 Watt = 30 dBm					
11	2462	13.10	13.06	13.02	12.99	1 Watt = 30 dBm					

802.11g

			Peak Power Output(dBm)								
СН	Frequency			Dequined Limit							
Сп	(MHz)	6	9	12	18	24	36	48	54	Required Limit	
1	2412	21.29	21.13	20.99	20.83	20.68	20.53	20.39	20.34	1 Watt = 30 dBm	
6	2437	21.53	21.38	21.22	21.08	20.97	20.85	20.70	20.65	1 Watt = 30 dBm	
11	2462	21.36	21.22	21.10	20.95	20.79	20.66	20.54	20.50	1 Watt = 30 dBm	

			Average Power Output(dBm)								
СН	Frequency		_	Deguined Limit							
Сп	(MHz)	6	9	12	18	24	36	48	54	Required Limit	
1	2412	12.24	11.99	11.75	11.49	11.26	11.02	10.76	10.42	1 Watt = 30 dBm	
6	2437	12.41	12.16	11.95	11.68	11.43	11.18	10.91	10.68	1 Watt = 30 dBm	
11	2462	12.16	11.93	11.66	11.39	11.13	10.88	10.59	10.46	1 Watt = 30 dBm	



802.11n 20M

			Peak Power Output(dBm)								
	CII Frequency Data Rate								Required		
CH (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit		
1	2412	20.75	20.29	19.84	19.42	18.95	18.49	18.01	17.35	1 Watt = 30 dBm	
6	2437	20.84	20.42	19.97	19.55	19.09	18.66	18.23	17.60	1 Watt = 30 dBm	
11	2462	20.77	20.35	19.86	19.35	18.88	18.36	17.84	17.51	1 Watt = 30 dBm	

			Average Power Output(dBm)								
СН	CII Frequency Data Rate								Required		
Сп	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit	
1	2412	12.11	11.51	10.87	10.25	9.63	9.00	8.37	7.37	1 Watt = 30 dBm	
6	2437	12.13	11.55	10.94	10.37	9.79	9.21	8.61	7.65	1 Watt = 30 dBm	
11	2462	11.92	11.37	10.73	10.07	9.42	8.78	8.12	7.50	1 Watt = 30 dBm	

* Note: The duty cycle factor is compensated back to obtain the maximum value of the measurement in average.

* Note: Offset 11dB for 2.4G 802.11b/g/n_20

6dB BANDWIDTH 8

8.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

8.2 **Measurement Equipment Used:**

		SGS Conducted	Room		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY53400256	2013/10/26	2014/10/25
Power Meter	Anritsu	ML2496A	1326001	2013/06/20	2014/06/19
Power Sensor	Anritsu	MA2411B	1315048	2013/06/20	2014/06/19
Power Sensor	Anritsu	MA2411B	1315049	2013/06/20	2014/06/19
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	2	2014/01/06	2015/01/05
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	3	2014/01/06	2015/01/05
Coaxial Cable 80cm	WOKEN	00100A1F1A185C	1	2014/01/06	2015/01/05
DC Block	Mini-Circuits	BLK-18-S+	4	2014/01/06	2015/01/05
DC Block	PASTERNACK	PE8210	5	2014/01/06	2015/01/05
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-019	2014/01/06	2015/01/05
Splitter	WOKEN	NA	DOM35LW1A2	2014/01/06	2015/01/05
Attenuator	Mini-Circuits	BW-S10W2+	6	2014/01/06	2015/01/05
Attenuator	WOKEN	218FS-10	7	2014/01/06	2015/01/05
Temperature Chamber	TERCHY	MHK-120LK	1020582	2013/06/18	2014/06/17
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/24	2015/04/23
DC Power Supply	Agilent	E3640A	MY53140006	2014/05/31	2015/05/30
DC Power Supply	Agilent	E3640A	MY53130054	2014/05/21	2015/05/20


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



	SGS Conducted Emission Test Site No.A										
Nome of Equipment	Manufacturan	Model	Serial Number	Calibration	Calibration						
Name of Equipment	ne of Equipment Manufacturer Mode		Serial Nulliber	Date	Due						
Power Meter	Anritsu	ML2496A	1326001	2014/06/20	2015/06/19						
Power Sensor	Anritsu	MA2411B	1315048	2014/06/20	2015/06/19						
Power Sensor	Anritsu	MA2411B	1315049	2014/06/20	2015/06/19						
Temperature Chamber	TERCHY	MHK-120LK	1020582	2014/06/18	2015/06/17						

Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.

8.3 **Test Set-up:**



8.4 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Expression and Conditions of Expression and Conditions of the Interview Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and the limit at the Company's findematic the terms of the interview of the terms of terms of the terms of the terms of the terms of terms of the terms of terms of the terms of terms jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.5 **Measurement Result:**

802.11b

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2412	10110	> 500	PASS
2437	10120	> 500	PASS
2462	10110	> 500	PASS

802.11g

Frequency	Bandwidth	Limit	Result	
(MHz)	(kHz)	(kHz)		
2412	16310	> 500	PASS	
2437	16330	> 500	PASS	
2462	16320	> 500	PASS	

802.11n_20M

Frequency	Bandwidth	Limit	Result	
(MHz)	(kHz)	(kHz)		
2412	16840	> 500	PASS	
2437	16850	> 500	PASS	
2462	16850	> 500	PASS	

* Note: Offset 11dB for 2.4G 802.11b/g/n_20, and the diamond reveals X decibel level *Refer to next page for plots


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defined mergins and the proposed of the formation contaited the fulle at tervent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11b 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

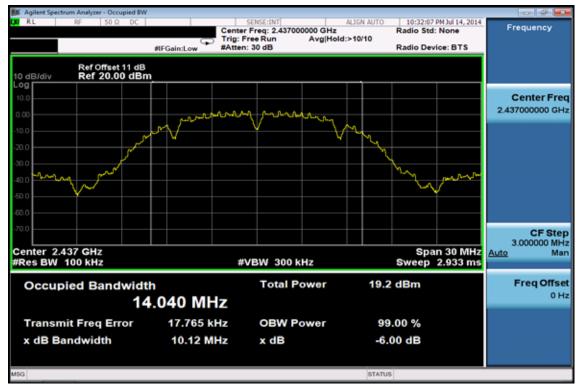


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

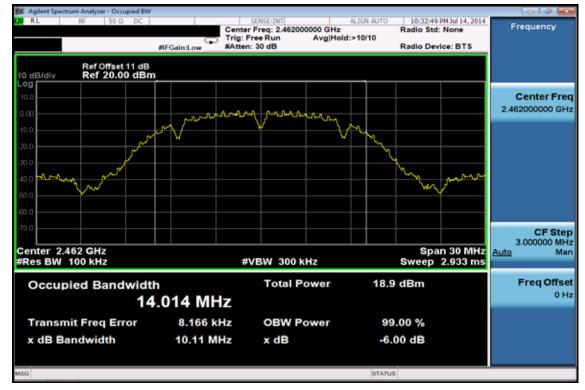

802.11g 6dB Band Width Test Data CH-Low

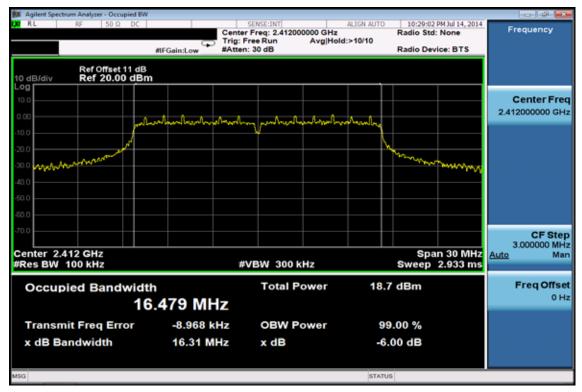


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



6dB Band Width Test Data CH-Mid

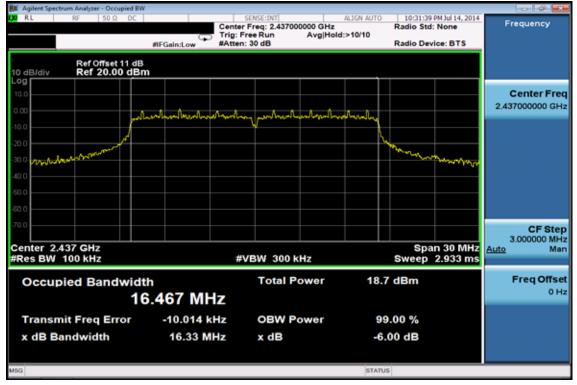

6dB Band Width Test Data CH-High

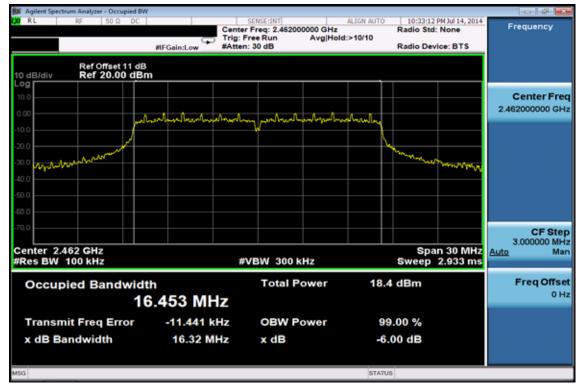


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11n 20M 6dB Band Width Test Data CH-Low

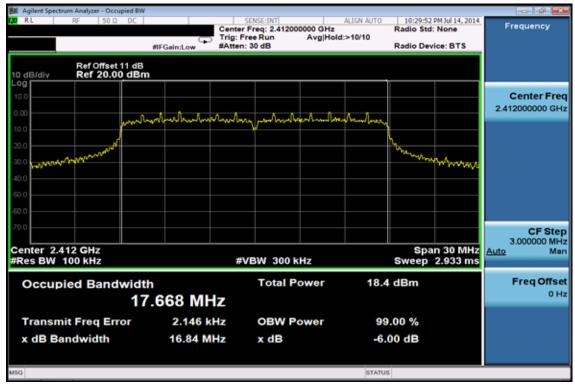

6dB Band Width Test Data CH-Mid

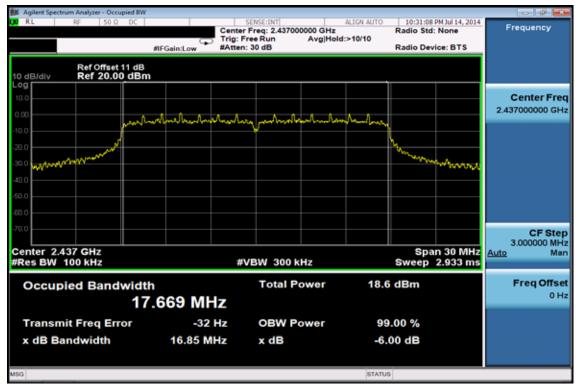


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

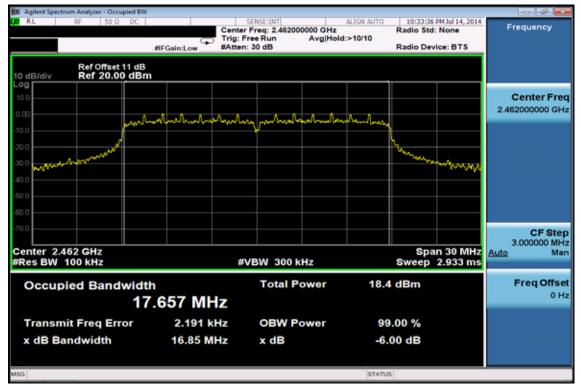

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



9 **BAND EDGES MEASUREMENT**

Standard Applicable: 9.1

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 **Measurement Equipment Used:**

9.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

Radiated emission: 9.2.2

SGS SAC Chamber No.C					
Name of Equipment	Manufacturer	Model	Serial Num- ber	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESU 40	100363	2014/04/12	2015/04/11
Loop Antenna	ETS-Lindgren	6502	00143303	2014/01/16	2015/01/15
Broadband Antenna	TESEQ	CBL 6112D	35240	2014/01/17	2015/01/16
Horn Antenna	ETS-Lindgren	3117	00143272	2014/01/27	2015/01/26
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170-184	2014/01/23	2015/01/22
Horn Antenna	ETS-Lindgren	3160-09	00117911	2014/01/22	2015/01/21
Horn Antenna	ETS-Lindgren	3160-10	00117783	2014/01/22	2015/01/21
Pre Amplifier	R&S	SCU-18	10204	2014/03/26	2015/03/25
Pre Amplifier	R&S	SCU-26	100780	2014/03/26	2015/03/25
Pre Amplifier	R&S	SCU-40	100356	2014/03/26	2015/03/25
Pre Amplifier	EMC Instruments	EMC330	980096	2014/03/26	2015/03/25
Pre Amplifier	EMC Instruments	EMC184045	980135	2014/01/24	2015/01/23
Coaxial Cable	Huber+Suhner	RG 214/U	W21.03	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	RG 214/U	W22.03	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17413/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17404/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17394/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17386/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17388/4	2014/03/26	2015/03/25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



FCC ID: 2ACKFSL501

			i	1	
Attenuator	WOKEN	218FS-10	HY-151	2014/01/06	2015/01/05
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/23	2015/04/22
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.
Site NSA	SGS	966 Chamber C	SAC-C	2014/03/05	2015/03/04
Site VSWR	SGS	966 Chamber C	SAC-C	2014/04/10	2015/04/09
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




9.3 **Test SET-UP:**

9.3.1 **Conducted Emission at antenna port:**




9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

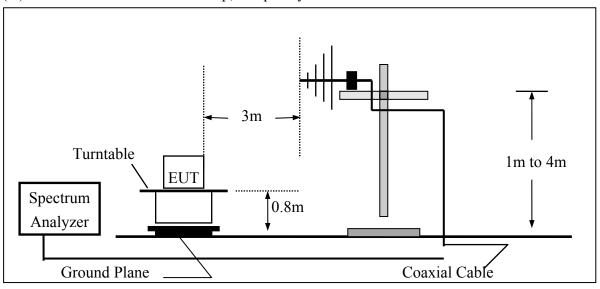

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

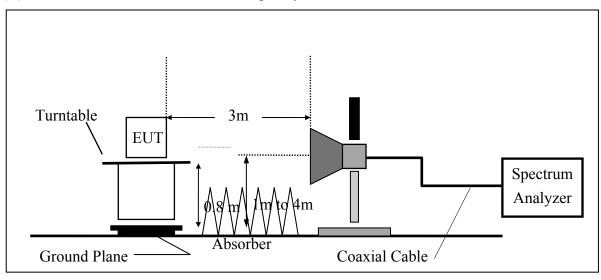

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074 D01

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Field Strength Calculation: 9.5

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Measurement Result: 9.6

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



802.11b - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 40 of 85

Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands): 802.11 b mode

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	45.35	3.14	48.49	74.00	-25.51
2390.00	Е	Average	33.07	3.14	36.21	54.00	-17.79

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	43.51	3.14	46.65	74.00	-27.35
2390.00	Е	Average	32.33	3.14	35.47	54.00	-18.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are required in a result of the form in this result of the form of the form in the result of the form in the result of the form of the form in the result of the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 41 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	44.38	3.35	47.74	74.00	-26.26
2483.50	Е	Average	33.36	3.35	36.71	54.00	-17.29

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg C/51RH
Operation Mode	:Band Edge HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	43.25	3.35	46.60	74.00	-27.40
2483.50	E	Average	32.68	3.35	36.03	54.00	-17.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of Solution Solution (Solution Solution) (Solution Solution) (Fine Solution) tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



802.11g - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 43 of 85

Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands): 802.11 g mode

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	64.35	3.14	67.48	74.00	-6.52
2390.00	Е	Average	45.08	3.14	48.22	54.00	-5.78

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	60.80	3.14	63.94	74.00	-10.06
2390.00	Е	Average	42.45	3.14	45.59	54.00	-8.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are required in a result of the form in this result of the form of the form in the result of the form in the result of the form of the form in the result of the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 44 of 85

Operation Band :802	02.11 g Test	Date	:2014-07-14
Fundamental Frequency :24	62 MHz Tem	p./Humi.	:30deg_C/51RH
Operation Mode :Ba	and Edge HIGH Engi	ineer	:Vito
EUT Pol. :H	Plane Mea	surement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	58.61	3.35	61.97	74.00	-12.03
2483.50	Е	Average	40.34	3.35	43.69	54.00	-10.31

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg C/51RH
Operation Mode	:Band Edge HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	52.38	3.35	55.73	74.00	-18.27
2483.50	E	Average	36.48	3.35	39.83	54.00	-14.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of Solution Solution (Solution Solution) (Solution Solution) (Fine Solution) tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



802.11n_20M- Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 46 of 85

Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands): 802.11 n 20M mode

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	67.29	3.14	70.43	74.00	-3.57
2390.00	Е	Average	48.33	3.14	51.47	54.00	-2.53

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	62.82	3.14	65.96	74.00	-8.04
2390.00	Е	Average	43.17	3.14	46.31	54.00	-7.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are required in a result of the form in this result of the form of the form in the result of the form in the result of the form of the form in the result of the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 47 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:Band Edge HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	59.85	3.35	63.20	74.00	-10.80
2483.50	Е	Average	41.60	3.35	44.95	54.00	-9.05

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg C/51RH
Operation Mode	:Band Edge HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	57.47	3.35	60.82	74.00	-13.18
2483.50	Е	Average	41.09	3.35	44.44	54.00	-9.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of Solution Solution (Solution Solution) (Solution Solution) (Fine Solution) tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10 SPURIOUS EMISSION TEST 10.1 Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

10.2 Measurement Equipment Used:

10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

10.3 Test SET-UP:

10.3.1 Conducted Emission at antenna port:

Refer to section 7.3 for details.

10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10.4 Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

Conducted Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- 4. Via Software, combine 5 spans of frequency range into one plot
- 5. Repeat above procedures until all default test channel measured were complete.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

10.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz - 3GHz

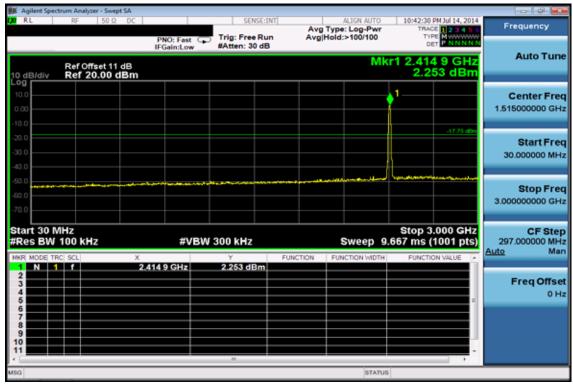

Ch Low 3GHz - 26.5GHz

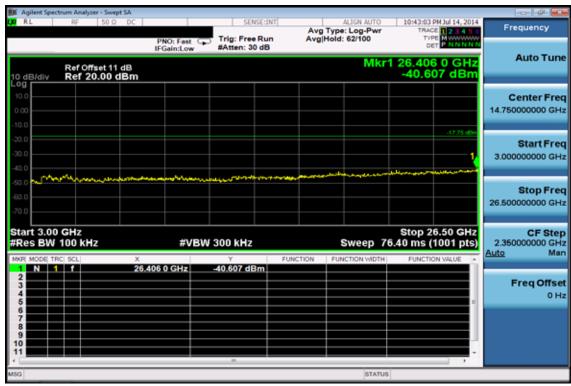


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch Mid 30MHz - 3GHz

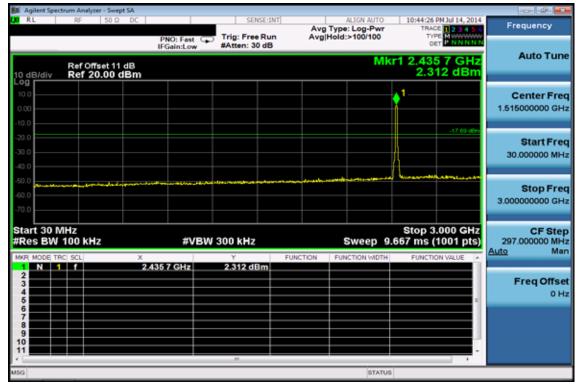


Ch Mid 3GHz - 26.5GHz

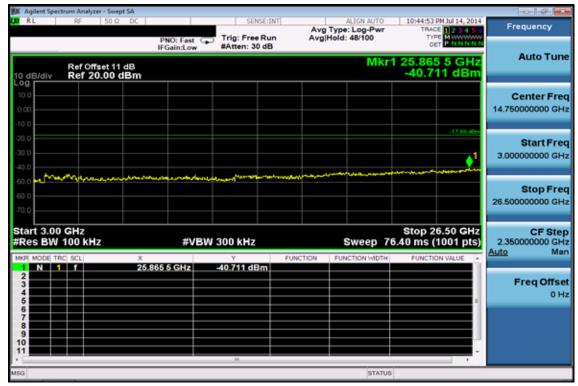


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

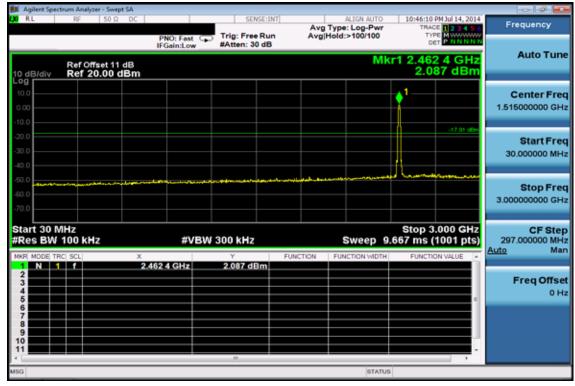


Ch High 3GHz - 26.5GHz

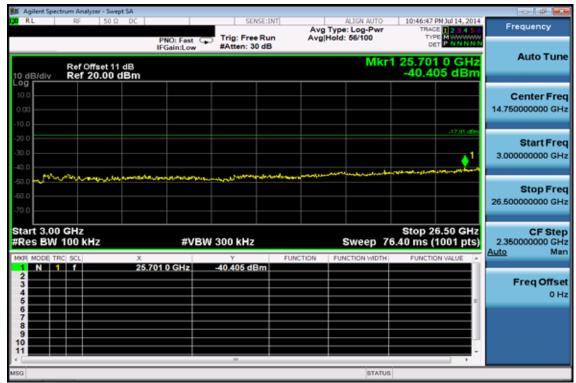


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz - 3GHz

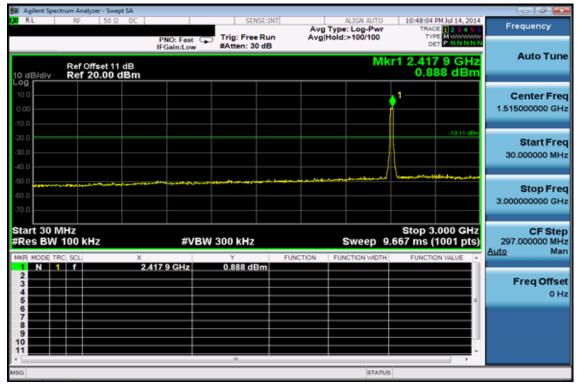

Ch Low 3GHz - 26.5GHz

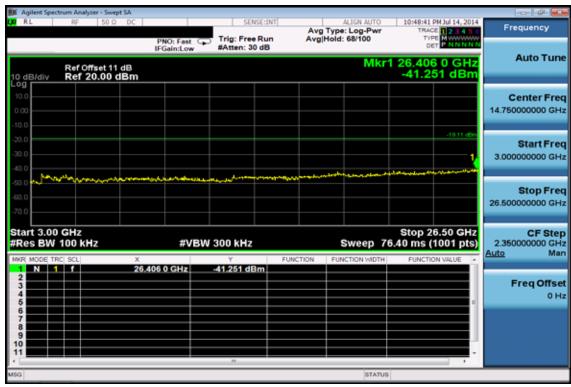


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch Mid 30MHz - 3GHz

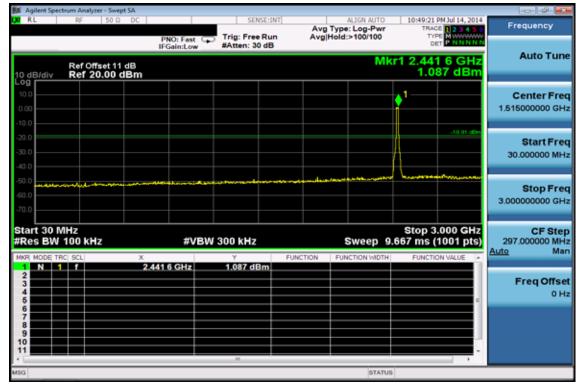


Ch Mid 3GHz - 26.5GHz

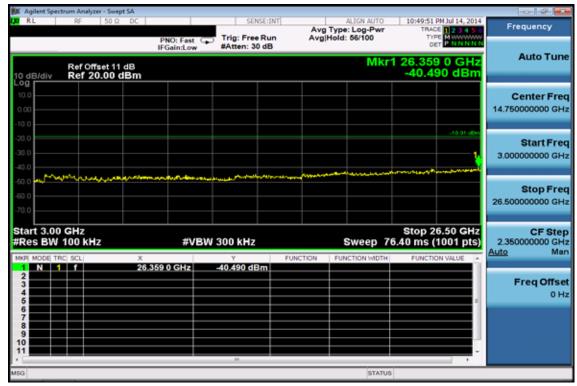


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

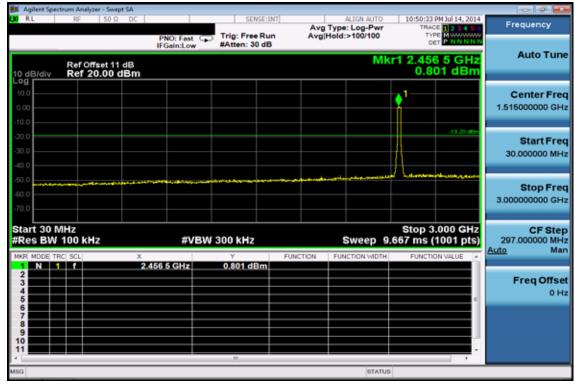

Ch High 3GHz - 26.5GHz

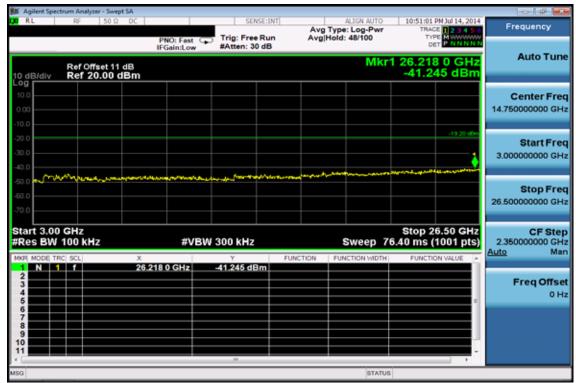


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Conducted Spurious Emission Measurement Result (802.11n_20M) Ch Low 30MHz - 3GHz

M Agilent Spec														
L <mark>XO</mark> RL	RF	50 Q	DC			SEX	ISE:INT	Avg		LIGN AUTO		2 PM Jul 14, 2		Frequency
				PNO: Fast IFGain:Lov	P	Trig: Free #Atten: 3				>100/100	1	OFT PINN		
_				IFGain:Lov	¥	written. o	000			MIL	-1 2 4	06 0 GF		Auto Tune
10 dB/div		ffset 11 d 20.00 dl								IVIE	0.	758 dB	m	
10.0											1			Center Freq
0.00											· ·			1.515000000 GHz
-10.0														
-20.0					-							-19.24 6	-	Start Freq
-30.0									_		l[30.000000 MHz
-40.0									_		1			
-50.0	and the second	distance of the local distance of the	مردرين		-					لسبيدسخمير	hand the second second	******		Oton From
-60.0									_					Stop Freq 3.000000000 GHz
-70.0									_					5.0000000000
Start 30 M	/Hz										Stop	3.000 GI	17	CF Step
#Res BW		Iz		#V	BW	300 kHz			5	Sweep 9	.667 ms	(1001 pt	S)	297.000000 MHz
MKR MODE TH			х			Y		UNCTION	FUN	CTION WIDTH	FUNC	TION VALUE	^	<u>Auto</u> Man
1 N 1	1		2.4	06 0 GHz		0.758 di	3m		-					
3									-					Freq Offset 0 Hz
5														0 Hz
6 7														
8														
10									-					
												,		
MSG										STATUS	1			


Ch Low 3GHz - 26.5GHz

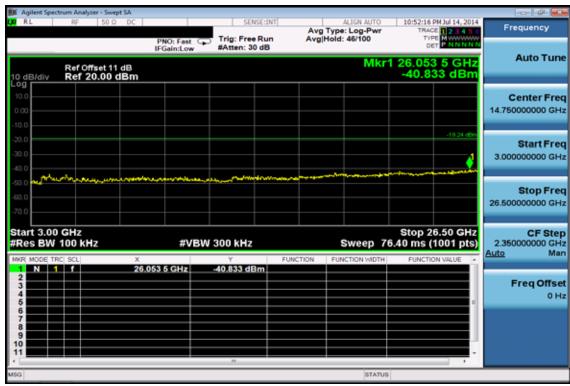


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz - 3GHz

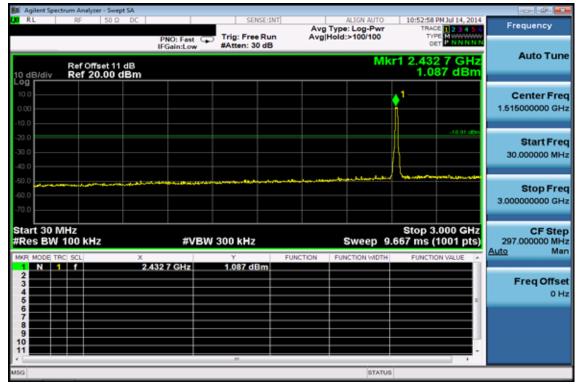


Ch Mid 3GHz - 26.5GHz

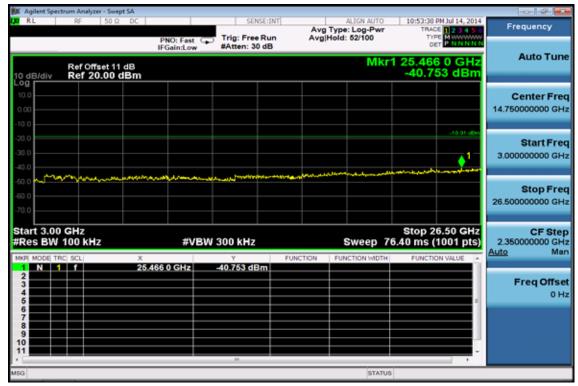


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

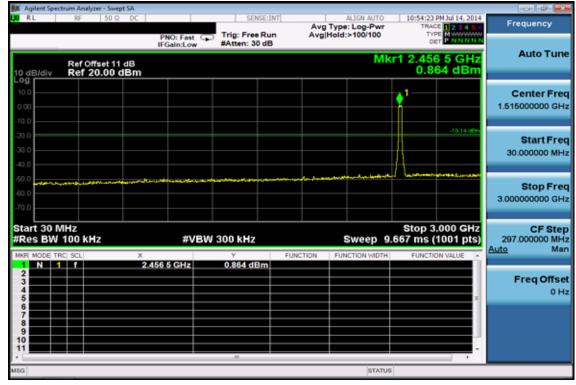

Ch High 3GHz - 26.5GHz

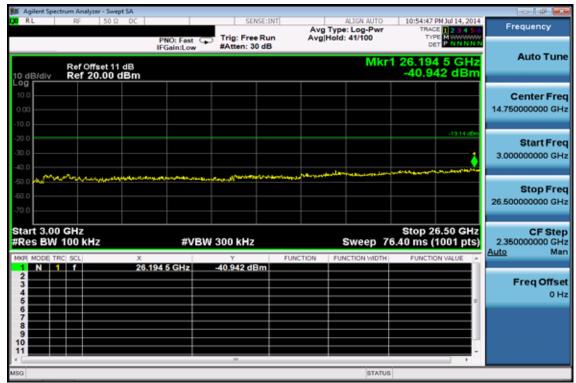

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (802.11b)

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV∕m	dBµV∕m	dB
66.86	S	Peak	59.21	-29.05	30.16	40.00	-9.84
189.08	S	Peak	60.67	-24.24	36.44	43.50	-7.06
297.72	S	Peak	57.72	-19.14	38.58	46.00	-7.42
568.35	S	Peak	56.55	-12.47	44.08	46.00	-1.92
622.67	S	Peak	53.79	-12.24	41.55	46.00	-4.45
676.99	S	Peak	53.70	-11.42	42.28	46.00	-3.72
4824.00	Н	Peak	42.48	0.38	42.86	74.00	-31.14
4824.00	Н	Average	31.59	0.38	31.97	54.00	-22.03
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 61 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
33.88	S	Peak	32.55	-17.83	14.72	40.00	-25.28
202.66	S	Peak	58.98	-23.76	35.22	43.50	-8.28
297.72	S	Peak	59.61	-19.14	40.47	46.00	-5.53
405.39	S	Peak	54.02	-15.46	38.55	46.00	-7.45
676.99	S	Peak	54.01	-11.42	42.59	46.00	-3.41
704.15	S	Peak	52.52	-11.33	41.19	46.00	-4.81
4824.00	Н	Peak	42.76	0.38	43.14	74.00	-30.86
4824.00	Н	Average	30.89	0.38	31.27	54.00	-22.73
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 62 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
68.80	S	Peak	58.20	-28.72	29.48	40.00	-10.52
189.08	S	Peak	60.23	-24.24	35.99	43.50	-7.51
297.72	S	Peak	57.69	-19.14	38.55	46.00	-7.45
568.35	S	Peak	51.96	-12.47	39.50	46.00	-6.50
704.15	S	Peak	49.97	-11.33	38.64	46.00	-7.36
811.82	S	Peak	49.40	-9.69	39.70	46.00	-6.30
4874.00	Н	Peak	42.33	0.41	42.73	74.00	-31.27
4874.00	Н	Average	31.87	0.41	32.27	54.00	-21.73
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 63 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	30.61	-17.34	13.27	40.00	-26.73
195.87	S	Peak	53.48	-23.83	29.65	43.50	-13.85
284.14	S	Peak	60.46	-19.54	40.93	46.00	-5.07
439.34	S	Peak	55.20	-15.36	39.85	46.00	-6.15
676.99	S	Peak	52.68	-11.42	41.26	46.00	-4.74
704.15	S	Peak	51.18	-11.33	39.85	46.00	-6.15
4874.00	Н	Peak	41.64	0.41	42.05	74.00	-31.95
4874.00	Н	Average	30.55	0.41	30.96	54.00	-23.04
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 64 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	59.07	-29.05	30.02	40.00	-9.98
189.08	S	Peak	60.37	-24.24	36.13	43.50	-7.37
297.72	S	Peak	57.75	-19.14	38.61	46.00	-7.40
568.35	S	Peak	51.83	-12.47	39.37	46.00	-6.63
731.31	S	Peak	48.93	-10.88	38.05	46.00	-7.95
811.82	S	Peak	49.70	-9.69	40.00	46.00	-6.00
4924.00	Н	Peak	41.81	0.50	42.31	74.00	-31.69
4924.00	Н	Average	31.63	0.50	32.12	54.00	-21.88
7386.00	Н	Peak	-	-	-	-	-
9848.00	Н	Peak	-	-	-	-	-
12310.00	Н	Peak	-	-	-	-	-
14772.00	Н	Peak	-	-	-	-	-
17234.00	Н	Peak	-	-	-	-	-
19696.00	Н	Peak	-	-	-	-	-
22158.00	Н	Peak	-	-	-	-	-
24620.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 65 of 85

Operation Band	:802.11 b	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	31.13	-17.34	13.79	40.00	-26.21
202.66	S	Peak	59.72	-23.76	35.97	43.50	-7.53
277.35	S	Peak	59.78	-19.61	40.17	46.00	-5.83
439.34	S	Peak	55.58	-15.36	40.22	46.00	-5.78
676.99	S	Peak	53.47	-11.42	42.04	46.00	-3.96
704.15	S	Peak	52.42	-11.33	41.09	46.00	-4.91
4924.00	Н	Peak	41.95	0.50	42.45	74.00	-31.55
4924.00	Н	Average	30.54	0.50	31.03	54.00	-22.97
7386.00	Н	Peak	-	-	-	-	-
9848.00	Н	Peak	-	-	-	-	-
12310.00	Н	Peak	-	-	-	-	-
14772.00	Н	Peak	-	-	-	-	-
17234.00	Н	Peak	-	-	-	-	-
19696.00	Н	Peak	-	-	-	-	-
22158.00	Н	Peak	-	-	-	-	-
24620.00	Н	Peak	-	-	-	-	-



Radiated Spurious Emission Measurement Result (802.11g)

Operation Band	:802.11 g
Fundamental Frequency	:2412 MHz
Operation Mode	:TX LOW
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol. :2014-07-14 :30deg_C/51RH :Vito :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	57.13	-28.85	28.29	40.00	-11.71
189.08	S	Peak	61.02	-24.24	36.78	43.50	-6.72
297.72	S	Peak	56.82	-19.14	37.68	46.00	-8.32
568.35	S	Peak	53.63	-12.47	41.16	46.00	-4.84
622.67	S	Peak	52.16	-12.24	39.92	46.00	-6.08
811.82	S	Peak	46.57	-9.69	36.88	46.00	-9.12
4824.00	Н	Peak	42.57	0.38	42.95	74.00	-31.05
4824.00	Н	Average	30.37	0.38	30.75	54.00	-23.25
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 67 of 85

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	30.71	-17.34	13.37	40.00	-26.63
202.66	S	Peak	58.61	-23.76	34.86	43.50	-8.64
297.72	S	Peak	59.47	-19.14	40.32	46.00	-5.68
439.34	S	Peak	56.00	-15.36	40.64	46.00	-5.36
676.99	S	Peak	52.78	-11.42	41.35	46.00	-4.65
704.15	S	Peak	52.35	-11.33	41.02	46.00	-4.98
4824.00	Н	Peak	41.77	0.38	42.15	74.00	-31.85
4824.00	Н	Average	30.25	0.38	30.63	54.00	-23.37
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 68 of 85

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	57.63	-28.85	28.78	40.00	-11.22
189.08	S	Peak	57.26	-24.24	33.02	43.50	-10.48
568.35	S	Peak	55.64	-12.47	43.18	46.00	-2.82
622.67	S	Peak	54.82	-12.24	42.58	46.00	-3.42
676.99	S	Peak	54.63	-11.42	43.20	46.00	-2.80
811.82	S	Peak	47.22	-9.69	37.53	46.00	-8.47
4874.00	Н	Peak	42.23	0.41	42.64	74.00	-31.36
4874.00	Н	Average	30.34	0.41	30.75	54.00	-23.25
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 69 of 85

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	32.79	-17.34	15.45	40.00	-24.55
223.03	S	Peak	59.57	-23.79	35.78	46.00	-10.22
277.35	S	Peak	60.10	-19.61	40.49	46.00	-5.51
297.72	S	Peak	59.49	-19.14	40.35	46.00	-5.65
439.34	S	Peak	54.68	-15.36	39.32	46.00	-6.68
676.99	S	Peak	53.29	-11.42	41.87	46.00	-4.13
4874.00	Н	Peak	42.40	0.41	42.80	74.00	-31.20
4874.00	Н	Average	29.99	0.41	30.40	54.00	-23.60
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 70 of 85

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
S	Peak	57.41	-29.05	28.36	40.00	-11.64
S	Peak	57.14	-24.24	32.90	43.50	-10.60
S	Peak	54.47	-21.14	33.32	46.00	-12.68
S	Peak	54.90	-12.47	42.43	46.00	-3.57
S	Peak	53.35	-12.24	41.11	46.00	-4.89
S	Peak	55.36	-11.42	43.94	46.00	-2.06
Н	Peak	42.52	0.50	43.02	74.00	-30.98
Н	Average	30.31	0.50	30.81	54.00	-23.19
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
	F/H/E/S S S S S S S H H H H H H H H H H H H H	Mode F/H/E/S Mode F/H/E/S PK/QP/AV S Peak H Peak <t< td=""><td>Mode Reading Level F/H/E/S PK/QP/AV dBµV S Peak 57.41 S Peak 57.14 S Peak 54.47 S Peak 54.90 S Peak 53.35 S Peak 55.36 H Peak 42.52 H Peak - H Peak - <tr tbody=""></tr></td><td>Mode Reading Level F/H/E/S PK/QP/AV dBµV dB S Peak 57.41 -29.05 S Peak 57.14 -24.24 S Peak 54.47 -21.14 S Peak 54.47 -21.14 S Peak 54.90 -12.47 S Peak 53.35 -12.24 S Peak 53.35 -12.24 S Peak 53.35 -12.47 S Peak 53.35 -12.24 H Peak 53.35 -12.24 H Peak 53.35 -14.2 H Peak 53.35 -12.24 S Peak 53.35 -12.47 H Peak - - H Peak - - H Peak - - H Peak - - H Peak -</td><td>Mode Reading Level FS F/H/E/S PK/QP/AV dBµV dB dBµV/m S Peak 57.41 -29.05 28.36 S Peak 57.14 -24.24 32.90 S Peak 54.47 -21.14 33.32 S Peak 54.47 -21.14 33.32 S Peak 54.90 -12.47 42.43 S Peak 55.36 -11.42 43.94 H Peak 42.52 0.50 43.02 H Peak - - - H Peak - -</td><td>Mode Reading Level FS @3m F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m S Peak 57.41 -29.05 28.36 40.00 S Peak 57.41 -24.24 32.90 43.50 S Peak 57.14 -24.24 32.90 43.50 S Peak 54.47 -21.14 33.32 46.00 S Peak 54.90 -12.47 42.43 46.00 S Peak 53.35 -12.24 41.11 46.00 S Peak 55.36 -11.42 43.94 46.00 H Peak 42.52 0.50 43.02 74.00 H Peak - - - - H Peak - - - - H Peak - - - - H Peak - - - -</td></t<>	Mode Reading Level F/H/E/S PK/QP/AV dBµV S Peak 57.41 S Peak 57.14 S Peak 54.47 S Peak 54.90 S Peak 53.35 S Peak 55.36 H Peak 42.52 H Peak - H Peak - <tr tbody=""></tr>	Mode Reading Level F/H/E/S PK/QP/AV dBµV dB S Peak 57.41 -29.05 S Peak 57.14 -24.24 S Peak 54.47 -21.14 S Peak 54.47 -21.14 S Peak 54.90 -12.47 S Peak 53.35 -12.24 S Peak 53.35 -12.24 S Peak 53.35 -12.47 S Peak 53.35 -12.24 H Peak 53.35 -12.24 H Peak 53.35 -14.2 H Peak 53.35 -12.24 S Peak 53.35 -12.47 H Peak - - H Peak - - H Peak - - H Peak - - H Peak -	Mode Reading Level FS F/H/E/S PK/QP/AV dBµV dB dBµV/m S Peak 57.41 -29.05 28.36 S Peak 57.14 -24.24 32.90 S Peak 54.47 -21.14 33.32 S Peak 54.47 -21.14 33.32 S Peak 54.90 -12.47 42.43 S Peak 55.36 -11.42 43.94 H Peak 42.52 0.50 43.02 H Peak - - - H Peak - -	Mode Reading Level FS @3m F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m S Peak 57.41 -29.05 28.36 40.00 S Peak 57.41 -24.24 32.90 43.50 S Peak 57.14 -24.24 32.90 43.50 S Peak 54.47 -21.14 33.32 46.00 S Peak 54.90 -12.47 42.43 46.00 S Peak 53.35 -12.24 41.11 46.00 S Peak 55.36 -11.42 43.94 46.00 H Peak 42.52 0.50 43.02 74.00 H Peak - - - - H Peak - - - - H Peak - - - - H Peak - - - -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 71 of 85

Operation Band	:802.11 g	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
S	Peak	31.78	-17.83	13.95	40.00	-26.05
S	Peak	57.37	-23.76	33.61	43.50	-9.89
S	Peak	60.29	-19.61	40.68	46.00	-5.32
S	Peak	55.03	-15.36	39.67	46.00	-6.33
S	Peak	52.63	-11.42	41.20	46.00	-4.80
S	Peak	52.27	-11.33	40.94	46.00	-5.06
Н	Peak	41.15	0.50	41.65	74.00	-32.35
Н	Average	30.02	0.50	30.52	54.00	-23.48
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
Н	Peak	-	-	-	-	-
	F/H/E/S S S S S S S H H H H H H H H H H H H H	Mode F/H/E/S Mode F/H/E/S PK/QP/AV S Peak H Peak <t< td=""><td>Mode Reading Level F/H/E/S PK/QP/AV dBµV S Peak 31.78 S Peak 57.37 S Peak 60.29 S Peak 55.03 S Peak 52.63 S Peak 52.27 H Peak 41.15 H Peak 30.02 H Peak - H</td><td>Mode Reading Level F/H/E/S PK/QP/AV dBµV dB S Peak 31.78 -17.83 S Peak 57.37 -23.76 S Peak 60.29 -19.61 S Peak 55.03 -15.36 S Peak 52.63 -11.42 S Peak 52.27 -11.33 H Peak 41.15 0.50 H Peak - - H</td><td>Mode Reading Level FS F/H/E/S PK/QP/AV dBµV dB dBµV/m S Peak 31.78 -17.83 13.95 S Peak 57.37 -23.76 33.61 S Peak 60.29 -19.61 40.68 S Peak 55.03 -15.36 39.67 S Peak 52.63 -11.42 41.20 S Peak 52.27 -11.33 40.94 H Peak 41.15 0.50 41.65 H Peak 52.27 -11.33 40.94 H Peak 41.15 0.50 41.65 H Peak - - - H Peak -<</td><td>Mode Reading Level FS @3m F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m S Peak 31.78 -17.83 13.95 40.00 S Peak 57.37 -23.76 33.61 43.50 S Peak 60.29 -19.61 40.68 46.00 S Peak 55.03 -15.36 39.67 46.00 S Peak 52.63 -11.42 41.20 46.00 S Peak 52.27 -11.33 40.94 46.00 G Peak 52.27 -11.33 40.94 46.00 H Peak 51.03 0.50 31.65 74.00 H Peak 41.15 0.50 30.52 54.00 H Peak - - - - H Peak - - - - H Peak - - - -</td></t<>	Mode Reading Level F/H/E/S PK/QP/AV dBµV S Peak 31.78 S Peak 57.37 S Peak 60.29 S Peak 55.03 S Peak 52.63 S Peak 52.27 H Peak 41.15 H Peak 30.02 H Peak - H	Mode Reading Level F/H/E/S PK/QP/AV dBµV dB S Peak 31.78 -17.83 S Peak 57.37 -23.76 S Peak 60.29 -19.61 S Peak 55.03 -15.36 S Peak 52.63 -11.42 S Peak 52.27 -11.33 H Peak 41.15 0.50 H Peak - - H	Mode Reading Level FS F/H/E/S PK/QP/AV dBµV dB dBµV/m S Peak 31.78 -17.83 13.95 S Peak 57.37 -23.76 33.61 S Peak 60.29 -19.61 40.68 S Peak 55.03 -15.36 39.67 S Peak 52.63 -11.42 41.20 S Peak 52.27 -11.33 40.94 H Peak 41.15 0.50 41.65 H Peak 52.27 -11.33 40.94 H Peak 41.15 0.50 41.65 H Peak - - - H Peak -<	Mode Reading Level FS @3m F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m S Peak 31.78 -17.83 13.95 40.00 S Peak 57.37 -23.76 33.61 43.50 S Peak 60.29 -19.61 40.68 46.00 S Peak 55.03 -15.36 39.67 46.00 S Peak 52.63 -11.42 41.20 46.00 S Peak 52.27 -11.33 40.94 46.00 G Peak 52.27 -11.33 40.94 46.00 H Peak 51.03 0.50 31.65 74.00 H Peak 41.15 0.50 30.52 54.00 H Peak - - - - H Peak - - - - H Peak - - - -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Spurious Emission Measurement Result (802.11n_20M)

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

		5011001.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	57.65	-28.85	28.80	40.00	-11.20
189.08	S	Peak	60.05	-24.24	35.81	43.50	-7.69
297.72	S	Peak	57.71	-19.14	38.57	46.00	-7.43
568.35	S	Peak	53.01	-12.47	40.55	46.00	-5.45
622.67	S	Peak	50.58	-12.24	38.34	46.00	-7.66
811.82	S	Peak	47.77	-9.69	38.07	46.00	-7.93
4824.00	Н	Peak	42.34	0.38	42.72	74.00	-31.28
4824.00	Н	Average	30.39	0.38	30.77	54.00	-23.23
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 73 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2412 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
33.88	S	Peak	31.38	-17.83	13.55	40.00	-26.45
202.66	S	Peak	59.16	-23.76	35.40	43.50	-8.10
297.72	S	Peak	59.34	-19.14	40.20	46.00	-5.80
439.34	S	Peak	55.38	-15.36	40.02	46.00	-5.98
676.99	S	Peak	53.56	-11.42	42.14	46.00	-3.86
704.15	S	Peak	51.24	-11.33	39.91	46.00	-6.09
4824.00	Н	Peak	41.52	0.38	41.90	74.00	-32.10
4824.00	Н	Average	30.23	0.38	30.61	54.00	-23.39
7236.00	Н	Peak	-	-	-	-	-
9648.00	Н	Peak	-	-	-	-	-
12060.00	Н	Peak	-	-	-	-	-
14472.00	Н	Peak	-	-	-	-	-
16884.00	Н	Peak	-	-	-	-	-
19296.00	Н	Peak	-	-	-	-	-
21708.00	Н	Peak	-	-	-	-	-
24120.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 74 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	57.76	-29.05	28.71	40.00	-11.29
189.08	S	Peak	59.65	-24.24	35.41	43.50	-8.09
297.72	S	Peak	57.44	-19.14	38.30	46.00	-7.70
352.04	S	Peak	52.05	-17.31	34.74	46.00	-11.26
568.35	S	Peak	53.68	-12.47	41.22	46.00	-4.78
811.82	S	Peak	47.78	-9.69	38.09	46.00	-7.91
4874.00	Н	Peak	42.00	0.41	42.41	74.00	-31.59
4874.00	Н	Average	29.92	0.41	30.33	54.00	-23.67
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 75 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Erec	Noto	Detector	Spaatmum	Factor	A atual	T imit	Morain
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	31.61	-17.34	14.27	40.00	-25.73
202.66	S	Peak	59.84	-23.76	36.08	43.50	-7.42
284.14	S	Peak	59.80	-19.54	40.26	46.00	-5.74
439.34	S	Peak	55.63	-15.36	40.27	46.00	-5.73
676.99	S	Peak	53.52	-11.42	42.10	46.00	-3.90
704.15	S	Peak	51.76	-11.33	40.42	46.00	-5.58
4874.00	Н	Peak	41.62	0.41	42.03	74.00	-31.97
4874.00	Н	Average	29.93	0.41	30.34	54.00	-23.66
7311.00	Н	Peak	-	-	-	-	-
9748.00	Н	Peak	-	-	-	-	-
12185.00	Н	Peak	-	-	-	-	-
14622.00	Н	Peak	-	-	-	-	-
17059.00	Н	Peak	-	-	-	-	-
19496.00	Н	Peak	-	-	-	-	-
21933.00	Н	Peak	-	-	-	-	-
24370.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 76 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	58.08	-29.05	29.03	40.00	-10.97
189.08	S	Peak	59.81	-24.24	35.57	43.50	-7.93
297.72	S	Peak	56.15	-19.14	37.01	46.00	-8.99
568.35	S	Peak	45.27	-12.47	32.81	46.00	-13.19
704.15	S	Peak	47.36	-11.33	36.02	46.00	-9.98
757.50	S	Peak	46.44	-10.37	36.08	46.00	-9.92
4924.00	Н	Peak	42.94	0.50	43.44	74.00	-30.56
4924.00	Н	Average	29.91	0.50	30.41	54.00	-23.59
7386.00	Н	Peak	-	-	-	-	-
9848.00	Н	Peak	-	-	-	-	-
12310.00	Н	Peak	-	-	-	-	-
14772.00	Н	Peak	-	-	-	-	-
17234.00	Н	Peak	-	-	-	-	-
19696.00	Н	Peak	-	-	-	-	-
22158.00	Н	Peak	-	-	-	-	-
24620.00	Н	Peak	-	-	-	-	-



Report No.: E2/2014/60026 Issue Date: Jul. 18, 2014 Page: 77 of 85

Operation Band	:802.11 n20M	Test Date	:2014-07-14
Fundamental Frequency	:2462 MHz	Temp./Humi.	:30deg_C/51RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
33.88	S	Peak	32.68	-17.83	14.84	40.00	-25.16
202.66	S	Peak	59.44	-23.76	35.69	43.50	-7.81
297.72	S	Peak	59.54	-19.14	40.39	46.00	-5.61
439.34	S	Peak	54.92	-15.36	39.56	46.00	-6.44
676.99	S	Peak	52.97	-11.42	41.55	46.00	-4.45
704.15	S	Peak	52.24	-11.33	40.91	46.00	-5.09
4924.00	Н	Peak	42.67	0.50	43.16	74.00	-30.84
4924.00	Н	Average	29.89	0.50	30.38	54.00	-23.62
7386.00	Н	Peak	-	-	-	-	-
9848.00	Н	Peak	-	-	-	-	-
12310.00	Н	Peak	-	-	-	-	-
14772.00	Н	Peak	-	-	-	-	-
17234.00	Н	Peak	-	-	-	-	-
19696.00	Н	Peak	-	-	-	-	-
22158.00	Н	Peak	-	-	-	-	-
24620.00	Н	Peak	-	-	-	-	-

11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Measurement Equipment Used:

Refer to section 7.2 for details.

11.3 Test Set-up:

Refer to section 7.3 for details. (Spectrum Option)

11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW \geq 3 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.5 Measurement Result:

802.11b

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-12.26	8
2437	-12.19	8
2462	-12.40	8

802.11g

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-14.49	8
2437	-14.13	8
2462	-14.24	8

802.11n 20M

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-13.95	8
2437	-14.02	8
2462	-14.16	8

* Note: Offset 11dB for 2.4G 802.11b/g/n_20

*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised to the fullet extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11b **Power Spectral Density Test Plot (CH-Low)**



Power Spectral Density Test Plot (CH-Mid)






Power Spectral Density Test Plot (CH-High)




802.11g

Power Spectral Density Test Plot (CH-Low)

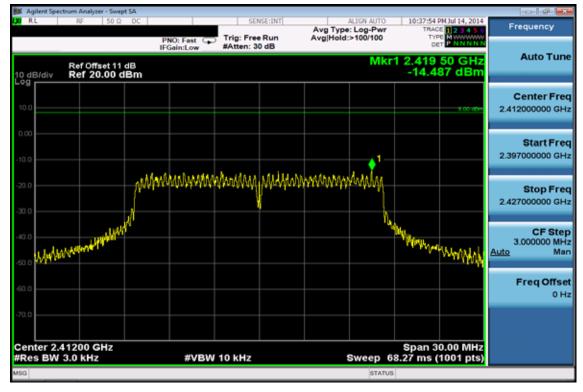




Power Spectral Density Test Plot (CH-Mid)

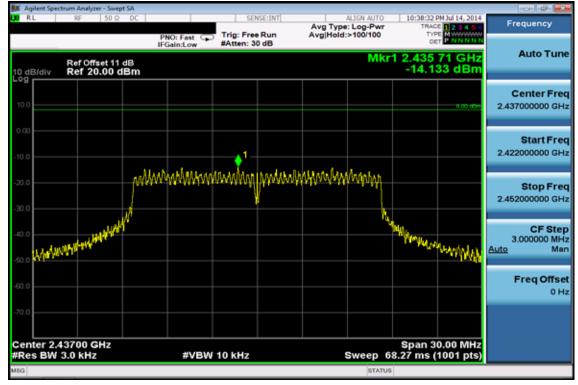

Power Spectral Density Test Plot (CH-High)

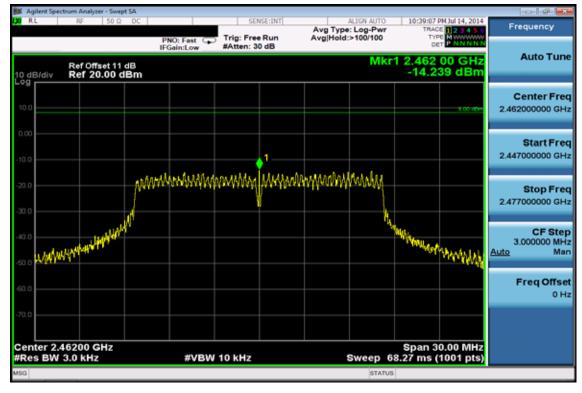


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11n 20M

Power Spectral Density Test Plot (CH-Low)

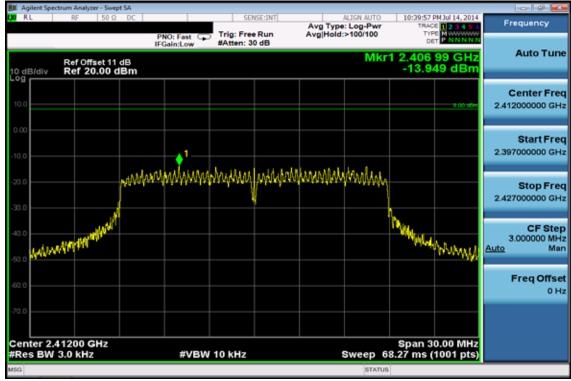


Power Spectral Density Test Plot (CH-Mid)

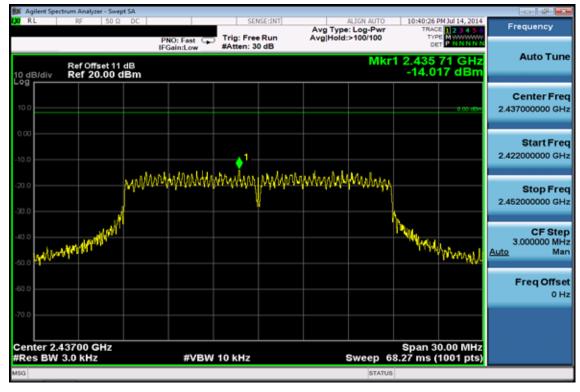



Power Spectral Density Test Plot (CH-High)

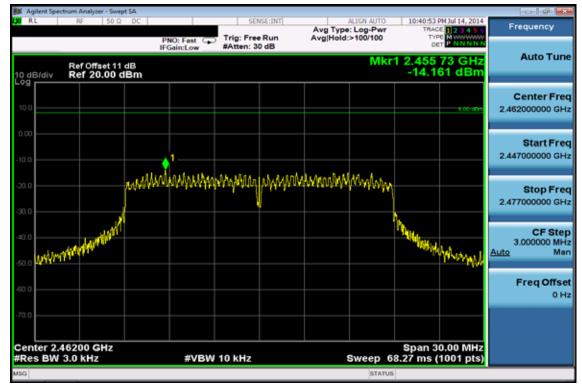

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

12.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2.82dBi. In addition, the antenna connector is RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

時非另有説明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90.tto a根告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號