

Test Report

Report No.: MTi221111011-05E4

Date of issue: 2023-06-01

Applicant: IC Nexus Co. LTD.

Product: SBC_NSD_EC

Model(s): EC3510HL, EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500

FCC ID: 2ACLCECNSDSBC350L60

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

| | | |
|---------------------|--|------------|
| 1 | General Description | 5 |
| 1.1 | Description of the EUT | 5 |
| 1.2 | Description of test modes | 6 |
| 1.3 | Environmental conditions for testing | 9 |
| 1.4 | Description of support units | 9 |
| 2 | Measurement uncertainty | 10 |
| 3 | Summary of Test Result | 11 |
| 4 | Test Laboratory | 12 |
| 5 | Equipment List | 13 |
| 6 | Test Result | 14 |
| 6.1 | Antenna requirement | 14 |
| 6.2 | AC power line conducted emissions | 15 |
| 6.3 | Radiated spurious emission | 20 |
| 6.4 | Emission bandwidth (26dB bandwidth) | 36 |
| 6.5 | Emission bandwidth (6dB bandwidth) | 37 |
| 6.6 | Duty Cycle | 38 |
| 6.7 | Maximum conducted output power | 39 |
| 6.8 | Power spectral density | 40 |
| 6.9 | Conducted spurious emissions | 41 |
| 6.10 | Conducted band edge | 42 |
| 6.11 | Frequency Stability | 43 |
| Appendix A1: | Emission bandwidth (26dB bandwidth) | 44 |
| 1.1 | Appendix A2: Occupied channel bandwidth | 51 |
| 1.1.1 | Test Result | 51 |
| 1.1.2 | Test Graphs | 52 |
| 1.2 | Appendix A3: Min emission bandwidth | 58 |
| 1.2.1 | Test Result B4 | 59 |
| Appendix B: | Duty Cycle | 63 |
| Appendix C: | Maximum conducted output power | 70 |
| Appendix D: | Maximum power spectral density | 77 |
| Appendix E: | Band edge measurements | 84 |
| Appendix F: | Conducted Spurious Emission | 88 |
| Appendix G: | Frequency Stability | 113 |
| | Photographs of the Test Setup | 114 |
| | Photographs of the EUT | 115 |

| Test Result Certification | |
|----------------------------------|--|
| Applicant: | IC Nexus Co. LTD. |
| Address: | 6F-1, No.3-2 Park Street, Nankang Software Park(NKSP), Taipei 115, Taiwan ROC |
| Manufacturer: | IC Nexus Co. LTD. |
| Address: | 6F-1, No.3-2 Park Street, Nankang Software Park(NKSP), Taipei 115, Taiwan ROC |
| Product description | |
| Product name: | SBC_NSD_EC |
| Trademark: | ICNexus |
| Model name: | EC3510HL |
| Serial Model: | EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500 |
| Standards: | FCC 47 CFR Part 15.407 |
| Test method: | ANSI C63.10-2013 KDB 789033 D02 v02r01 |
| Date of Test | |
| Date of test: | 2023-01-11 ~ 2023-06-13 |
| Test result: | Pass |

Test Engineer :

Letter Lan.

(Letter Lan)

Reviewed By :

Leon Chen

(Leon Chen)

Approved By :

Tom Xue

(Tom Xue)

1 General Description

1.1 Description of the EUT

| | |
|--------------------------|--|
| Product name: | SBC_NSD_EC |
| Model name: | EC3510HL |
| Series Model: | EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500 |
| Model difference: | All the models are the same circuit and module, except the model name . |
| Electrical rating: | Input: DC 12V/3.5A |
| Hardware version: | PCB0L600 |
| Software version: | Android/Debian/Ubuntu |
| Accessories: | Adapter: Model: DSA-42PFB-12 1 120350 Input: 100-240V~ 50/60Hz 1.2A Output: 12V-3.5A, 42W |
| Test sample(s) number: | MTi221111011-05S1001 |
| RF specification: | |
| Operation frequency: | U-NII-1: 5180 MHz to 5240 MHz U-NII-3: 5745 MHz to 5825 MHz |
| Modulation type: | OFDM with BPSK/QPSK/16QAM/64QAM |
| Date Rate: | 802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 |
| Antenna(s) information: | Antenna type: dipole antenna Antenna gain: 3 dBi |

1.2 Description of test modes

1.2.1 Operation channel list

| For U-NII-1 band: | | | | | |
|-------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 20 MHz bandwidth | | 40 MHz bandwidth | | 80 MHz bandwidth | |
| Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) |
| 36 | 5180 | 38 | 5190 | 42 | 5210 |
| 40 | 5200 | 46 | 5230 | -- | -- |
| 44 | 5220 | -- | -- | -- | -- |
| 48 | 5240 | -- | -- | -- | -- |

| For U-NII-3 band: | | | | | |
|-------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 20 MHz bandwidth | | 40 MHz bandwidth | | 80 MHz bandwidth | |
| Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) |
| 149 | 5745 | 151 | 5755 | 155 | 5775 |
| 153 | 5765 | 159 | 5795 | -- | -- |
| 157 | 5785 | -- | -- | -- | -- |
| 161 | 5805 | -- | -- | -- | -- |
| 165 | 5825 | -- | -- | -- | -- |

The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

| | |
|----------------|---------------------------|
| Test Software: | Ampak RFTTestTool,VER:7.3 |
|----------------|---------------------------|

| For U-NII-1 band: | | | |
|-------------------|---------------|------------|---------------|
| 802.11a | | 802.11n20 | |
| Channel | Power setting | Channel | Power setting |
| 36 | 65 | 36 | 65 |
| 40 | 63 | 40 | 65 |
| 48 | 63 | 48 | 65 |
| 802.11n40 | | 802.11ac20 | |
| Channel | Power setting | Channel | Power setting |
| 38 | \ | 36 | 65 |
| 46 | \ | 40 | 65 |
| -- | -- | 48 | 65 |

| For U-NII-3 band: | | | |
|-------------------|---------------|------------|---------------|
| 802.11a | | 802.11n20 | |
| Channel | Power setting | Channel | Power setting |
| 149 | 63 | 149 | 65 |
| 157 | 63 | 157 | 65 |
| 165 | 63 | 165 | 65 |
| 802.11n40 | | 802.11ac20 | |
| Channel | Power setting | Channel | Power setting |
| 151 | \ | 149 | 65 |
| 159 | \ | 157 | 65 |
| -- | -- | 165 | 65 |
| 802.11ac40 | | 802.11ac80 | |
| 151 | \ | 155 | \ |
| 159 | \ | -- | -- |
| -- | -- | -- | -- |

The test software:



1.3 Environmental conditions for testing

Environment of test site:

| | |
|--------------|-------------------|
| Temperature: | 15°C~35°C |
| Humidity: | 20 % RH ~ 75 % RH |

1.4 Description of support units

| Support equipment list | | | |
|------------------------|---------|------------|--------------|
| Description | Model | Serial No. | Manufacturer |
| phone | MATE 30 | / | HUAWEI |

| Support cable list | | | |
|--------------------|------------|------|----|
| Description | Length (m) | From | To |
| / | / | / | / |

2 Measurement uncertainty

| Parameter | Measurement uncertainty |
|---|-------------------------|
| AC power line conducted emission (9 kHz~30 MHz) | ±2.5 dB |
| Occupied Bandwidth | ±3 % |
| Conducted RF output power | ±0.16 dB |
| Conducted spurious emissions | ±0.21 dB |
| Radiated emission (9 kHz ~ 30 MHz) | ±4.0 dB |
| Radiated emission (30 MHz~1 GHz) | ±4.2 dB |
| Radiated emission (above 1 GHz) | ±4.3 dB |

Note: the measurement uncertainty is calculated and correspond to a factor $k = 2$ (which provide confidence levels of 95.45 %)

3 Summary of Test Result

| No. | FCC reference | Description of test | Result |
|-----|------------------|-----------------------------------|--------|
| 1 | §15.203 & 15.407 | Antenna requirement | Pass |
| 2 | § 15.207 | AC power line conducted emissions | Pass |
| 4 | §15.407(b) | Radiation Spurious Emissions | Pass |
| 5 | §15.407(a) | 26dB emission bandwidth | Pass |
| 6 | §15.407(e) | 6dB emission bandwidth | Pass |
| 7 | §15.407(a) | RF output power | Pass |
| 8 | §15.407(a) | Power spectral density | Pass |
| 9 | §15.407(b) | Conducted Spurious Emission | Pass |
| 10 | §15.407(b) | Conducted band edge | Pass |
| 11 | §15.407(g) | Frequency Stability | Pass |

4 Test Laboratory

| | |
|------------------------|--|
| Test laboratory: | Shenzhen Microtest Co., Ltd. |
| Test site location: | 101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Telephone: | (86-755)88850135 |
| Fax: | (86-755)88850136 |
| CNAS Registration No.: | CNAS L5868 |
| FCC Registration No.: | 448573 |

5 Equipment List

| No. | Equipment | Manufacturer | Model | Serial No. | Cal. date | Cal. Due |
|-----------|--------------------------|-----------------|-------------------------------|------------------|--------------------------|--------------------------|
| MTi-E002 | EMI Test Receiver | R&S | ESC13 | 101368 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E023 | Artificial power network | Schwarzbeck | NSLK8127 | NSLK8127 #841 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E025 | Artificial power network | Schwarzbeck | NSLK8127 | 8127183 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E043 | EMI test receiver | R&S | ESC17 | 101166 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E046 | Active Loop Antenna | Schwarzbeck | FMZB 1519 B | 00044 | 2021/05/30 2023/04/26 | 2023/05/29 2024/04/25 |
| MTi-E044 | Broadband antenna | Schwarzbeck | VULB9163 | 9163-1338 | 2021/05/30 | 2023/05/29 |
| MTi-E045 | Horn antenna | Schwarzbeck | BBHA9120D | 9120D- 2278 | 2021/05/30 2023/04/26 | 2023/05/29 2024/04/25 |
| MTi-E047 | Pre-amplifier | Hewlett-Packard | 8447F | 3113A0618 4 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E048 | Pre-amplifier | Agilent | 8449B | 3008A0112 0 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E120 | Broadband antenna | Schwarzbeck | VULB9163 | 9163-1419 | 2021/05/30 2023/04/26 | 2023/05/29 2024/04/25 |
| MTi-E121 | Pre-amplifier | Hewlett-Packard | 8447D | 2944A093 65 | 2022/04/15 2023/04/26 | 2023/04/14 2024/04/25 |
| MTi-E123 | Pre-amplifier | Agilent | 8449B | 3008A047 23 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E135 | Horn antenna | Schwarzbeck | BBHA 9170 | 00987 | 2021/05/30 2023/04/26 | 2023/05/29 2024/04/25 |
| MTi-E136 | Pre-amplifier | Space-Dtronics | EWLAN1840 G-G45 | 210405001 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E062 | PXA Signal Analyzer | Agilent | N9030A | MY5135029 6 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E067 | RF Control Unit | Tonscend | JS0806-1 | 19D80601 52 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E068 | RF Control Unit | Tonscend | JS0806-2 | 19D80601 53 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E069 | Band Reject Filter Group | Tonscend | JS0806-F | 19D80601 60 | 2022/05/05 2023/04/26 | 2023/05/04 2024/04/25 |
| MTi-E010S | EMI Measurement Software | Farad | EZ-EMC Ver. EMEC- 3A1 | / | / | / |
| MTi-E014S | RF Test System | Tonscend | TS@JS1120 V2.6.88.033 0 | / | / | / |

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


| Frequency (MHz) | Detector type / Bandwidth | Limit-Quasi-peak dB μ V | Limit-Average dB μ V |
|-----------------|---------------------------|-----------------------------|--------------------------|
| 0.15 -0.5 | Average / 9 kHz | 66 to 56 | 56 to 46 |
| 0.5 -5 | | 56 | 46 |
| 5 -30 | | 60 | 50 |

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

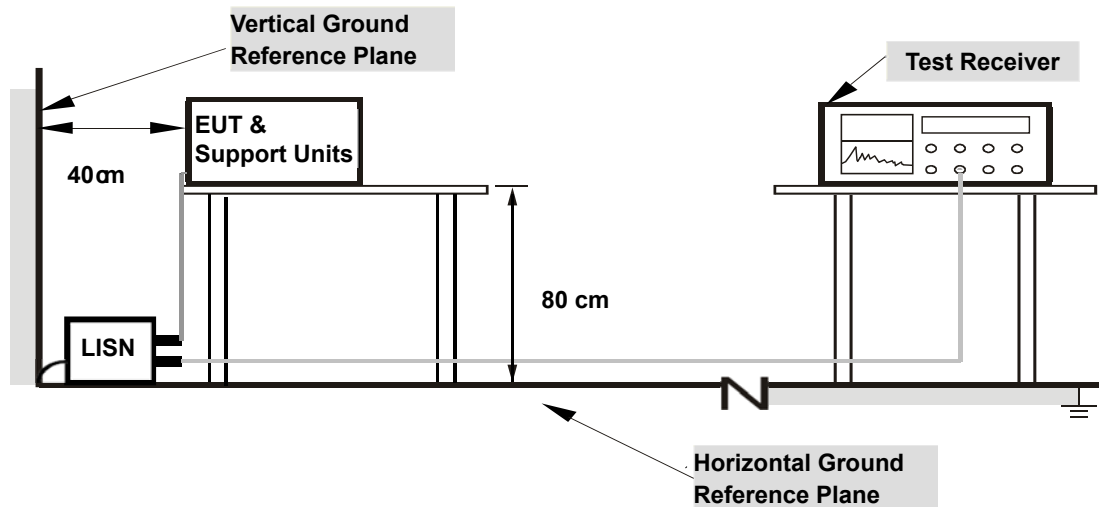

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)


Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

| | | | |
|---------------|---------------------------------------|------------|--------------|
| Test mode: | Charging+TX | Phase: | L |
| Power supply: | Power by AC/DC adapter (AC 120V/60Hz) | Test site: | CE chamber 1 |

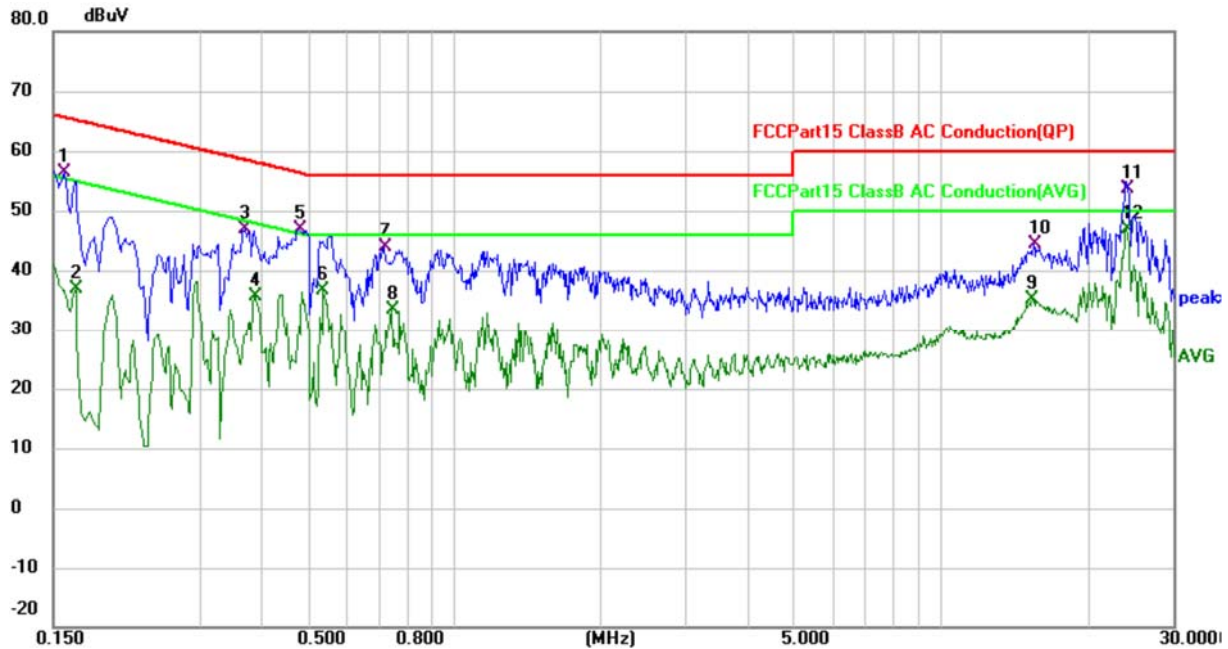


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | | 0.1580 | 46.01 | 10.28 | 56.29 | 65.57 | -9.28 | QP |
| 2 | | 0.1660 | 26.57 | 10.28 | 36.85 | 55.16 | -18.31 | AVG |
| 3 | | 0.3700 | 35.74 | 11.03 | 46.77 | 58.50 | -11.73 | QP |
| 4 | | 0.3899 | 24.63 | 11.08 | 35.71 | 48.07 | -12.36 | AVG |
| 5 | | 0.4780 | 35.55 | 11.28 | 46.83 | 56.37 | -9.54 | QP |
| 6 | | 0.5380 | 25.22 | 11.41 | 36.63 | 46.00 | -9.37 | AVG |
| 7 | | 0.7180 | 32.13 | 11.81 | 43.94 | 56.00 | -12.06 | QP |
| 8 | | 0.7460 | 21.40 | 11.87 | 33.27 | 46.00 | -12.73 | AVG |
| 9 | | 15.4500 | 24.56 | 10.52 | 35.08 | 50.00 | -14.92 | AVG |
| 10 | | 15.5140 | 33.80 | 10.52 | 44.32 | 60.00 | -15.68 | QP |
| 11 | | 24.0860 | 42.89 | 10.75 | 53.64 | 60.00 | -6.36 | QP |
| 12 | * | 24.0860 | 36.10 | 10.75 | 46.85 | 50.00 | -3.15 | AVG |

| | | | |
|---------------|---------------------------------------|------------|--------------|
| Test mode: | Charging+TX | Phase: | N |
| Power supply: | Power by AC/DC adapter (AC 120V/60Hz) | Test site: | CE chamber 1 |

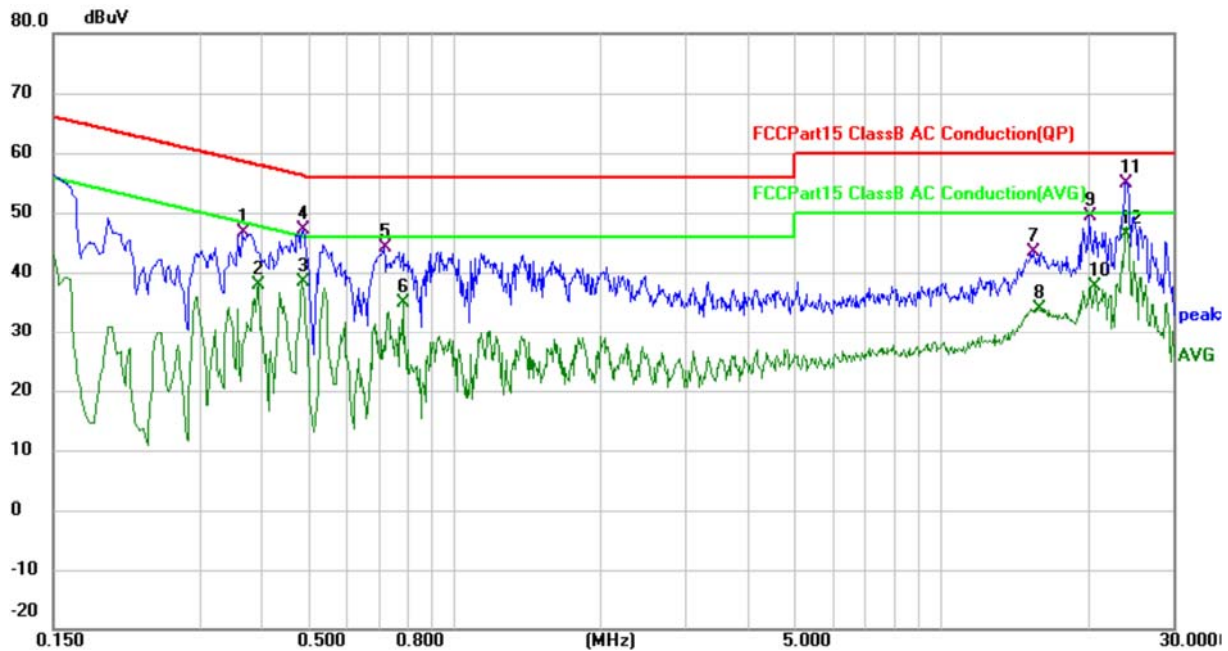


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | | 0.3660 | 35.66 | 10.98 | 46.64 | 58.59 | -11.95 | QP |
| 2 | | 0.3940 | 26.95 | 11.02 | 37.97 | 47.98 | -10.01 | AVG |
| 3 | | 0.4860 | 27.17 | 11.29 | 38.46 | 46.24 | -7.78 | AVG |
| 4 | | 0.4900 | 35.82 | 11.29 | 47.11 | 56.17 | -9.06 | QP |
| 5 | | 0.7180 | 32.36 | 11.83 | 44.19 | 56.00 | -11.81 | QP |
| 6 | | 0.7860 | 22.94 | 11.95 | 34.89 | 46.00 | -11.11 | AVG |
| 7 | | 15.5500 | 32.96 | 10.51 | 43.47 | 60.00 | -16.53 | QP |
| 8 | | 15.8740 | 23.43 | 10.52 | 33.95 | 50.00 | -16.05 | AVG |
| 9 | | 20.2380 | 38.61 | 10.69 | 49.30 | 60.00 | -10.70 | QP |
| 10 | | 20.7939 | 26.99 | 10.71 | 37.70 | 50.00 | -12.30 | AVG |
| 11 | | 24.1299 | 44.12 | 10.77 | 54.89 | 60.00 | -5.11 | QP |
| 12 | * | 24.1299 | 35.50 | 10.77 | 46.27 | 50.00 | -3.73 | AVG |

| | | | |
|---------------|---------------------------------------|------------|--------------|
| Test mode: | Charging+TX | Phase: | L |
| Power supply: | Power by AC/DC adapter (AC 240V/60Hz) | Test site: | CE chamber 1 |

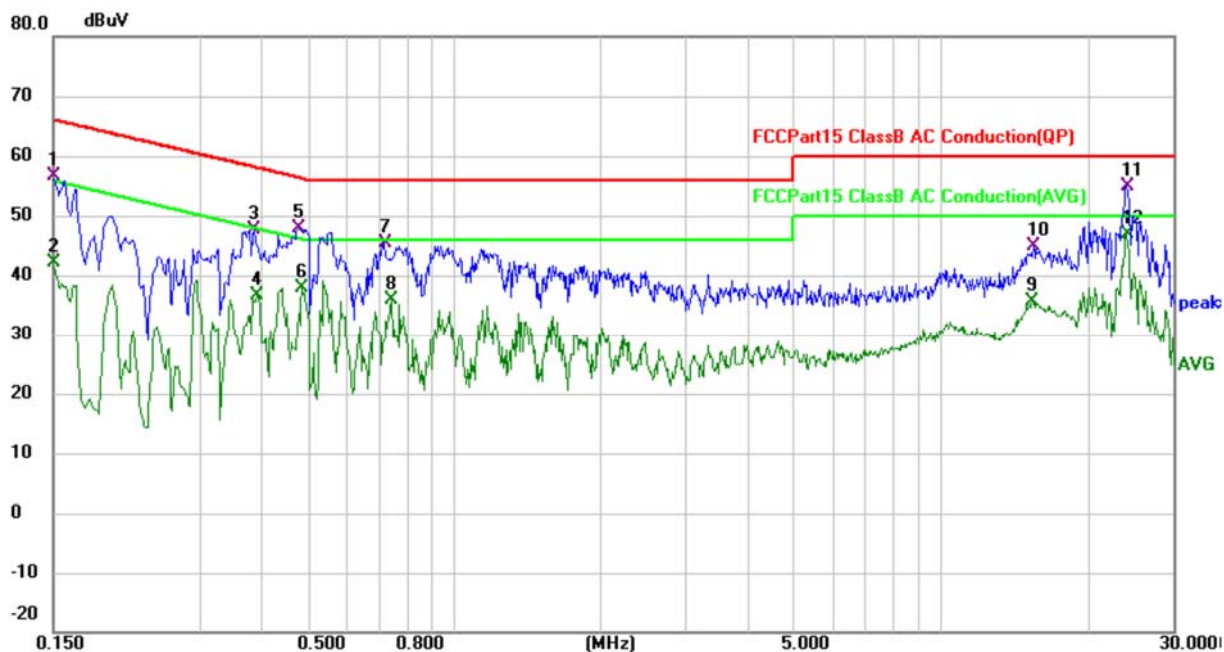

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | | 0.1500 | 46.45 | 10.28 | 56.73 | 66.00 | -9.27 | QP |
| 2 | | 0.1500 | 31.91 | 10.28 | 42.19 | 56.00 | -13.81 | AVG |
| 3 | | 0.3860 | 36.43 | 11.08 | 47.51 | 58.15 | -10.64 | QP |
| 4 | | 0.3933 | 25.64 | 11.08 | 36.72 | 47.99 | -11.27 | AVG |
| 5 | | 0.4778 | 36.55 | 11.28 | 47.83 | 56.38 | -8.55 | QP |
| 6 | | 0.4858 | 26.69 | 11.30 | 37.99 | 46.24 | -8.25 | AVG |
| 7 | | 0.7178 | 33.63 | 11.81 | 45.44 | 56.00 | -10.56 | QP |
| 8 | | 0.7459 | 23.90 | 11.87 | 35.77 | 46.00 | -10.23 | AVG |
| 9 | | 15.4500 | 25.06 | 10.52 | 35.58 | 50.00 | -14.42 | AVG |
| 10 | | 15.5137 | 34.30 | 10.52 | 44.82 | 60.00 | -15.18 | QP |
| 11 | | 24.0858 | 44.20 | 10.75 | 54.95 | 60.00 | -5.05 | QP |
| 12 | * | 24.0858 | 36.18 | 10.75 | 46.93 | 50.00 | -3.07 | AVG |

| | | | |
|---------------|---------------------------------------|------------|--------------|
| Test mode: | Charging+TX | Phase: | N |
| Power supply: | Power by AC/DC adapter (AC 240V/60Hz) | Test site: | CE chamber 1 |

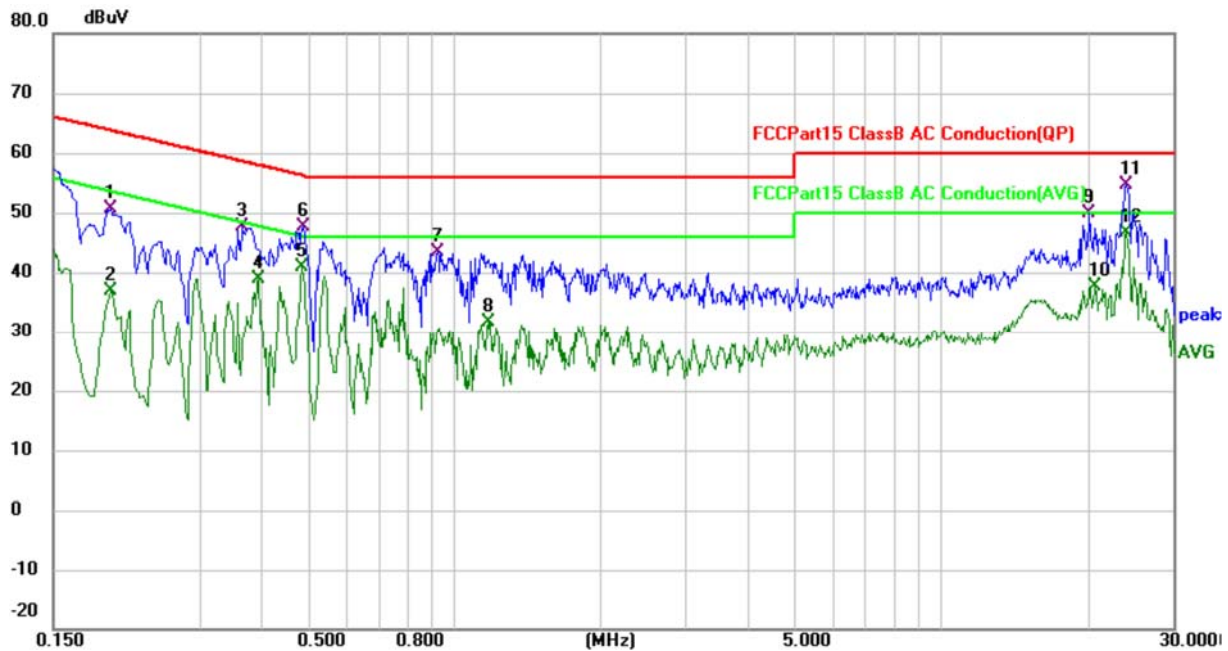

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | | 0.1965 | 40.03 | 10.61 | 50.64 | 63.76 | -13.12 | QP |
| 2 | | 0.1965 | 26.17 | 10.61 | 36.78 | 53.76 | -16.98 | AVG |
| 3 | | 0.3659 | 36.66 | 10.98 | 47.64 | 58.59 | -10.95 | QP |
| 4 | | 0.3940 | 27.95 | 11.02 | 38.97 | 47.98 | -9.01 | AVG |
| 5 | | 0.4858 | 29.67 | 11.29 | 40.96 | 46.24 | -5.28 | AVG |
| 6 | | 0.4900 | 36.32 | 11.29 | 47.61 | 56.17 | -8.56 | QP |
| 7 | | 0.9260 | 31.25 | 12.20 | 43.45 | 56.00 | -12.55 | QP |
| 8 | | 1.1737 | 19.04 | 12.69 | 31.73 | 46.00 | -14.27 | AVG |
| 9 | | 20.2377 | 39.11 | 10.69 | 49.80 | 60.00 | -10.20 | QP |
| 10 | | 20.7939 | 26.99 | 10.71 | 37.70 | 50.00 | -12.30 | AVG |
| 11 | | 24.1299 | 43.78 | 10.77 | 54.55 | 60.00 | -5.45 | QP |
| 12 | * | 24.1299 | 35.84 | 10.77 | 46.61 | 50.00 | -3.39 | AVG |

6.3 Radiated spurious emission

6.3.1 Limits

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:
 All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

§ 15.209 Radiated emission limits at restricted bands:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


| Lowest frequency generated in the device | Upper frequency range of measurement |
|--|---|
| 9 kHz to below 10 GHz | 10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower |
| At or above 10 GHz to below 30 GHz | 5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower |
| At or above 30 GHz | 5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified |

Frequency range of measurements for unlicensed wireless device with digital device


| Highest frequency generated or used in the device or on which the device operates or tunes | Upper frequency range of measurement |
|--|---|
| Below 1.705 MHz | 30 MHz |
| 1.705 MHz to 108 MHz | 1000 MHz |
| 108 MHz to 500 MHz | 2000 MHz |
| 500 MHz to 1000 MHz | 5000 MHz |
| Above 1000 MHz | 5th harmonic of the highest frequency or 40 GHz, whichever is lower |

6.3.2 Test setup


Below 30MHz:

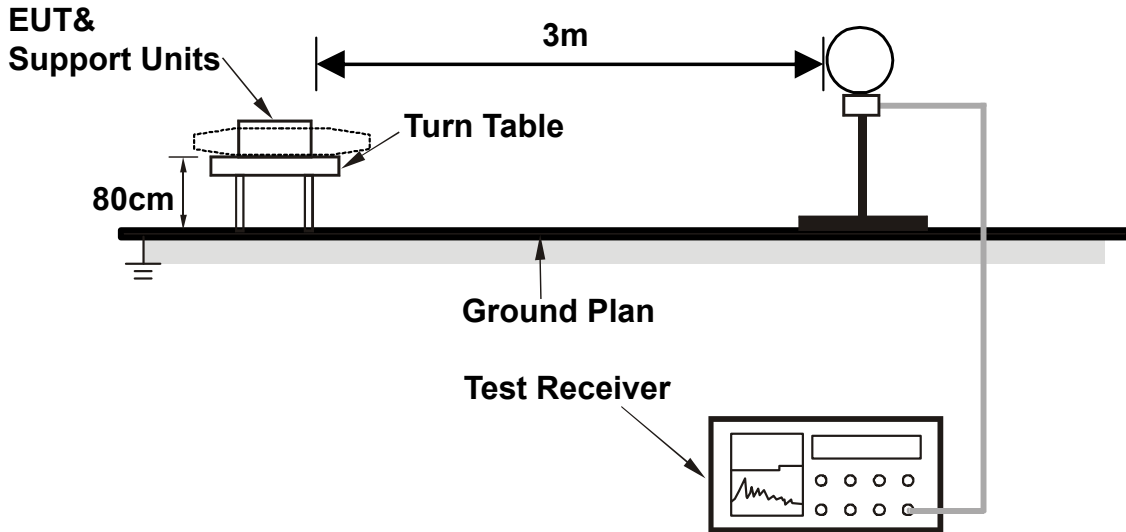

30MHz~1GHz:

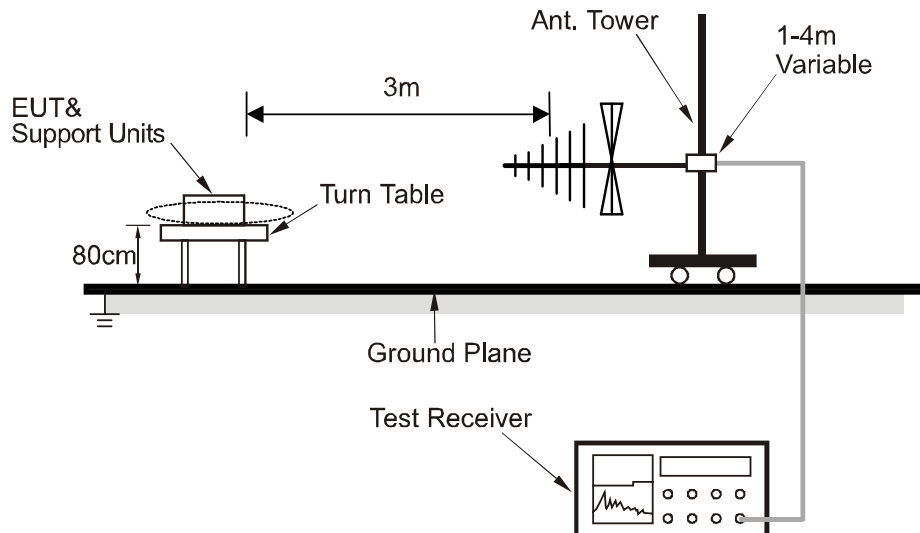

Above 1GHz:

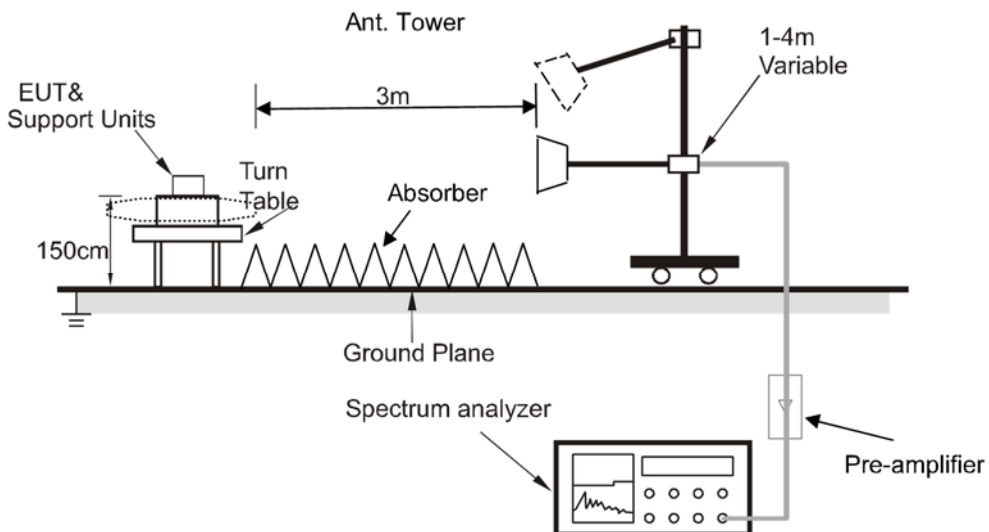

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Sections 6.3, 6.4, 6.5 and 6.6; KDB 789033 D02 v02r01 Sections G3, G4, G5, and G6.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

| Frequency | Test receiver / Spectrum analyzer setting |
|------------------|--|
| 9 kHz ~ 150 kHz | Quasi Peak / RBW: 200 Hz |
| 150 kHz ~ 30 MHz | Quasi Peak / RBW: 9 kHz |
| 30 MHz ~ 1 GHz | Quasi Peak / RBW: 120 kHz |
| Above 1 GHz | Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector |

6.3.4 Test results

Notes:

All emissions that are in the restricted bands specified in §15.205 are subject to the limit of §15.209.

All spurious emissions that are outside of the restricted bands are subject to a peak emission limit of § 15.407(b). And for above 1000 MHz, the field strength shall be computed as follows:

$E [dB\mu V/m] = EIRP [dBm] + 95.2$, for test distance = 3 m

All channels, modes and modulations/data rates were investigated among all U-NII bands. Only the worst-case results shown in the report.

For blew 30MHz tests, there were no emissions found within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Radiated emissions between 30MHz – 1GHz


| | | | |
|---------------|----------------------|---------------|--------------|
| Test mode: | TX – 802.11a 5240MHz | Polarization: | Horizontal |
| Power supply: | DC 12V | Test site: | RE chamber 2 |

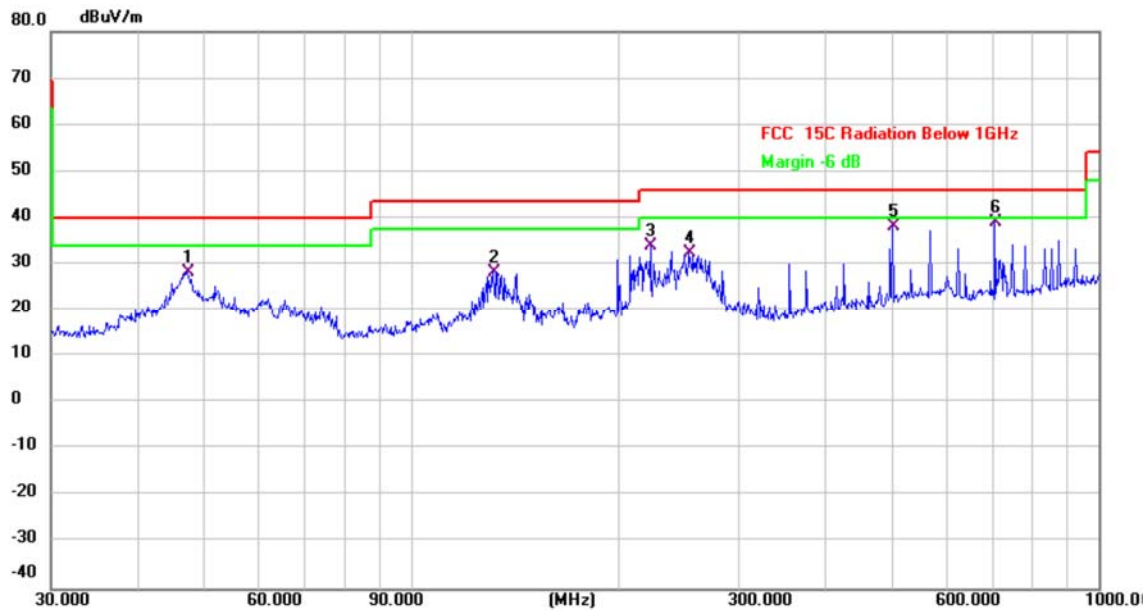

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 47.3255 | 37.53 | -9.30 | 28.23 | 40.00 | -11.77 | QP |
| 2 | | 131.7577 | 41.23 | -12.83 | 28.40 | 43.50 | -15.10 | QP |
| 3 | | 222.9502 | 43.15 | -9.24 | 33.91 | 46.00 | -12.09 | QP |
| 4 | | 253.8367 | 40.51 | -8.07 | 32.44 | 46.00 | -13.56 | QP |
| 5 | | 501.1790 | 43.10 | -4.84 | 38.26 | 46.00 | -7.74 | QP |
| 6 | * | 706.6999 | 41.70 | -2.76 | 38.94 | 46.00 | -7.06 | QP |

Radiated emissions between 30MHz – 1GHz


| | | | |
|---------------|----------------------|---------------|--------------|
| Test mode: | TX – 802.11a 5240MHz | Polarization: | Vertical |
| Power supply: | DC 12V | Test site: | RE chamber 2 |

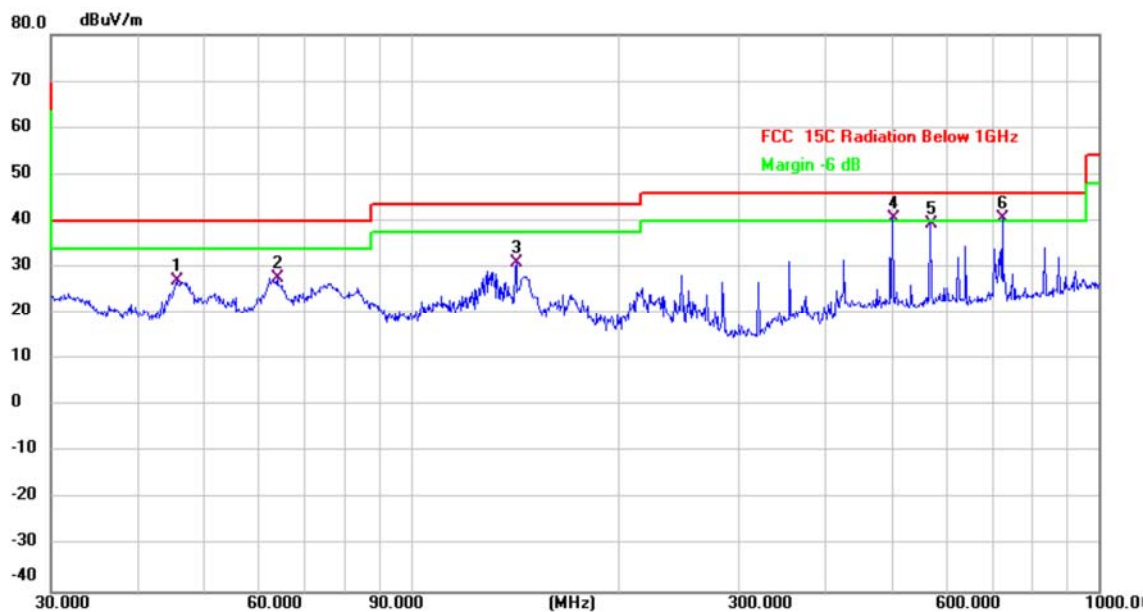

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 45.6948 | 36.14 | -9.21 | 26.93 | 40.00 | -13.07 | QP |
| 2 | | 63.9828 | 38.89 | -11.38 | 27.51 | 40.00 | -12.49 | QP |
| 3 | | 142.3243 | 43.67 | -12.79 | 30.88 | 43.50 | -12.62 | QP |
| 4 | * | 501.1790 | 45.52 | -4.84 | 40.68 | 46.00 | -5.32 | QP |
| 5 | | 568.6127 | 42.62 | -3.30 | 39.32 | 46.00 | -6.68 | QP |
| 6 | ! | 724.2611 | 43.14 | -2.57 | 40.57 | 46.00 | -5.43 | QP |

Radiated emissions between 30MHz – 1GHz


| | | | |
|---------------|----------------------|---------------|--------------|
| Test mode: | TX – 802.11a 5825MHz | Polarization: | Horizontal |
| Power supply: | DC 12V | Test site: | RE chamber 2 |

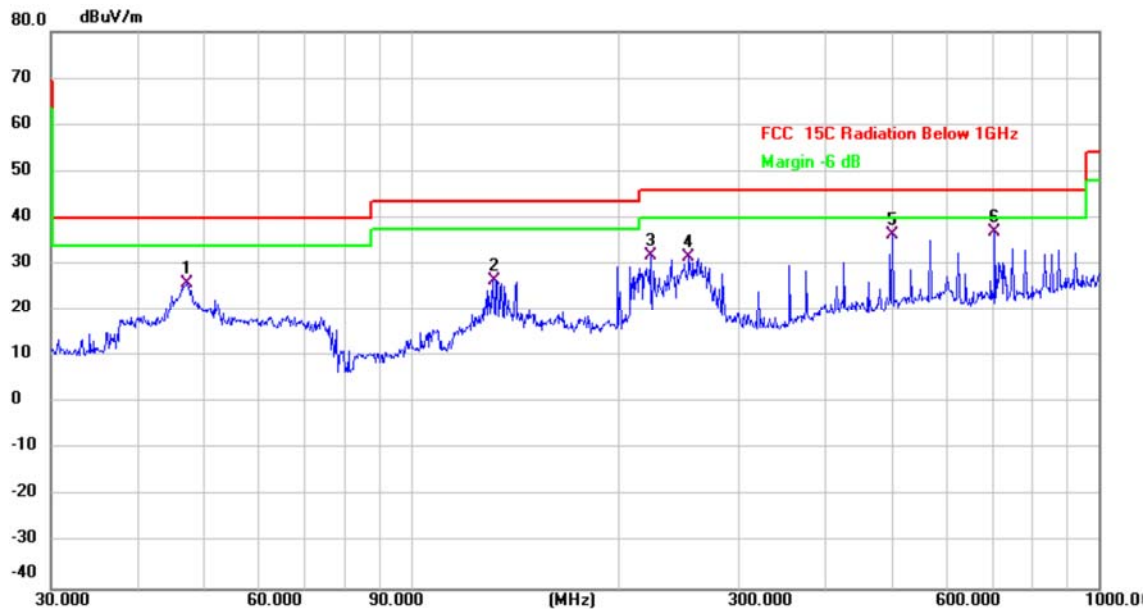

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 47.3253 | 35.03 | -9.30 | 25.73 | 40.00 | -14.27 | QP |
| 2 | | 131.7575 | 39.23 | -12.83 | 26.40 | 43.50 | -17.10 | QP |
| 3 | | 222.9500 | 41.15 | -9.24 | 31.91 | 46.00 | -14.09 | QP |
| 4 | | 253.8366 | 39.51 | -8.07 | 31.44 | 46.00 | -14.56 | QP |
| 5 | | 501.1788 | 41.10 | -4.84 | 36.26 | 46.00 | -9.74 | QP |
| 6 | * | 706.6997 | 39.70 | -2.76 | 36.94 | 46.00 | -9.06 | QP |

Radiated emissions between 30MHz – 1GHz

| | | | |
|---------------|----------------------|---------------|--------------|
| Test mode: | TX – 802.11a 5825MHz | Polarization: | Vertical |
| Power supply: | DC 12V | Test site: | RE chamber 2 |

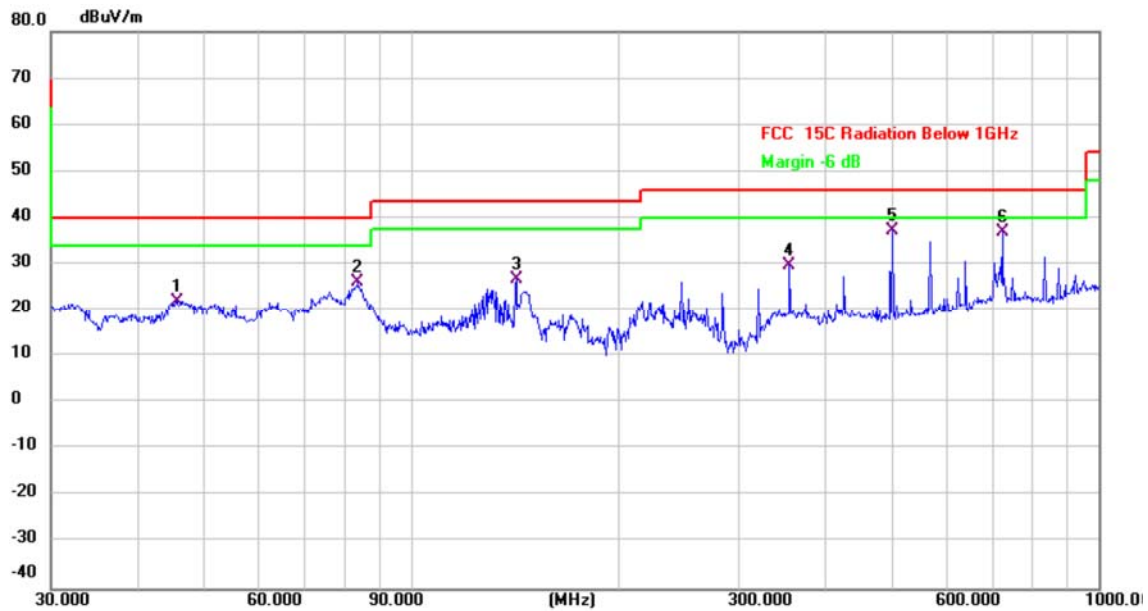

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 45.6946 | 31.14 | -9.21 | 21.93 | 40.00 | -18.07 | QP |
| 2 | | 83.8155 | 37.40 | -11.36 | 26.04 | 40.00 | -13.96 | QP |
| 3 | | 142.3242 | 39.67 | -12.79 | 26.88 | 43.50 | -16.62 | QP |
| 4 | | 355.4272 | 36.94 | -7.06 | 29.88 | 46.00 | -16.12 | QP |
| 5 | * | 501.1788 | 42.02 | -4.84 | 37.18 | 46.00 | -8.82 | QP |
| 6 | | 724.2607 | 39.64 | -2.57 | 37.07 | 46.00 | -8.93 | QP |

1GHz-40GHz:

For U-NII-1

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|-----------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11a - 5180 MHz TX mode | | | | | | | |
| 10360.00 | 42.42 | 6.93 | 49.35 | 74.00 | -24.65 | Peak | V |
| 10360.00 | 32.15 | 6.93 | 39.08 | 54.00 | -14.92 | AVG | V |
| 15540.00 | 45.22 | 13.65 | 58.87 | 74.00 | -15.13 | Peak | V |
| 15540.00 | 34.90 | 13.65 | 48.55 | 54.00 | -5.45 | AVG | V |
| 10360.00 | 43.22 | 6.93 | 50.15 | 74.00 | -23.85 | Peak | H |
| 10360.00 | 33.15 | 6.93 | 40.08 | 54.00 | -13.92 | AVG | H |
| 15540.00 | 45.38 | 13.65 | 59.03 | 74.00 | -14.97 | Peak | H |
| 15540.00 | 35.33 | 13.65 | 48.98 | 54.00 | -5.02 | AVG | H |
| 802.11a - 5200 MHz TX mode | | | | | | | |
| 10440.00 | 42.40 | 6.98 | 49.38 | 74.00 | -24.62 | Peak | V |
| 10440.00 | 32.03 | 6.98 | 39.01 | 54.00 | -14.99 | AVG | V |
| 15660.00 | 45.79 | 13.69 | 59.48 | 74.00 | -14.52 | Peak | V |
| 15660.00 | 35.33 | 13.69 | 49.02 | 54.00 | -4.98 | AVG | V |
| 10440.00 | 42.38 | 6.98 | 49.36 | 74.00 | -24.64 | Peak | H |
| 10440.00 | 32.03 | 6.98 | 39.01 | 54.00 | -14.99 | AVG | H |
| 15660.00 | 45.33 | 13.69 | 59.02 | 74.00 | -14.98 | Peak | H |
| 15660.00 | 35.19 | 13.69 | 48.88 | 54.00 | -5.12 | AVG | H |
| 802.11a - 5240 MHz TX mode | | | | | | | |
| 10480.00 | 42.97 | 7.00 | 49.97 | 74.00 | -24.03 | Peak | V |
| 10480.00 | 31.53 | 7.00 | 38.53 | 54.00 | -15.47 | AVG | V |
| 15720.00 | 46.18 | 13.63 | 59.81 | 74.00 | -14.19 | Peak | V |
| 15720.00 | 35.92 | 13.63 | 49.55 | 54.00 | -4.45 | AVG | V |
| 10480.00 | 41.73 | 7.00 | 48.73 | 74.00 | -25.27 | Peak | H |
| 10480.00 | 31.63 | 7.00 | 38.63 | 54.00 | -15.37 | AVG | H |
| 15720.00 | 44.88 | 13.63 | 58.51 | 74.00 | -15.49 | Peak | H |
| 15720.00 | 34.33 | 13.63 | 47.96 | 54.00 | -6.04 | AVG | H |

For U-NII-3

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|-----------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11a - 5745 MHz TX mode | | | | | | | |
| 11490.00 | 43.24 | 9.24 | 52.48 | 74.00 | -21.52 | Peak | V |
| 11490.00 | 32.84 | 9.24 | 42.08 | 54.00 | -11.92 | AVG | V |
| 17235.00 | 45.15 | 13.34 | 58.49 | 74.00 | -15.51 | Peak | V |
| 17235.00 | 34.99 | 13.34 | 48.33 | 54.00 | -5.67 | AVG | V |
| 11490.00 | 42.92 | 9.24 | 52.16 | 74.00 | -21.84 | Peak | H |
| 11490.00 | 32.81 | 9.24 | 42.05 | 54.00 | -11.95 | AVG | H |
| 17235.00 | 44.54 | 13.34 | 57.88 | 74.00 | -16.12 | Peak | H |
| 17235.00 | 33.78 | 13.34 | 47.12 | 54.00 | -6.88 | AVG | H |
| 802.11a - 5785 MHz TX mode | | | | | | | |
| 11568.00 | 42.58 | 9.43 | 52.01 | 74.00 | -21.99 | Peak | V |
| 11568.00 | 32.13 | 9.43 | 41.56 | 54.00 | -12.44 | AVG | V |
| 17355.00 | 44.28 | 13.44 | 57.72 | 74.00 | -16.28 | Peak | V |
| 17355.00 | 33.92 | 13.44 | 47.36 | 54.00 | -6.64 | AVG | V |
| 11568.00 | 42.61 | 9.43 | 52.04 | 74.00 | -21.96 | Peak | H |
| 11568.00 | 32.57 | 9.43 | 42.00 | 54.00 | -12.00 | AVG | H |
| 17355.00 | 44.20 | 13.44 | 57.64 | 74.00 | -16.36 | Peak | H |
| 17355.00 | 34.09 | 13.44 | 47.53 | 54.00 | -6.47 | AVG | H |
| 802.11a - 5825 MHz TX mode | | | | | | | |
| 11650.00 | 42.75 | 9.51 | 52.26 | 74.00 | -21.74 | Peak | V |
| 11650.00 | 32.65 | 9.51 | 42.16 | 54.00 | -11.84 | AVG | V |
| 17475.00 | 43.73 | 13.76 | 57.49 | 74.00 | -16.51 | Peak | V |
| 17475.00 | 33.33 | 13.76 | 47.09 | 54.00 | -6.91 | AVG | V |
| 11650.00 | 42.94 | 9.51 | 52.45 | 74.00 | -21.55 | Peak | H |
| 11650.00 | 32.61 | 9.51 | 42.12 | 54.00 | -11.88 | AVG | H |
| 17475.00 | 43.36 | 13.76 | 57.12 | 74.00 | -16.88 | Peak | H |
| 17475.00 | 33.32 | 13.76 | 47.08 | 54.00 | -6.92 | AVG | H |

Radiated emissions at band edge – U-NII-1 band

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|----------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11a – CH36 (5180 MHz) | | | | | | | |
| 4500.000 | 45.13 | -0.91 | 44.22 | 74.00 | -29.78 | Peak | V |
| 4500.000 | 36.39 | -0.91 | 35.48 | 54.00 | -18.52 | AVG | V |
| 5150.000 | 62.65 | 1.92 | 64.57 | 74.00 | -9.43 | Peak | V |
| 5150.000 | 48.94 | 1.92 | 50.86 | 54.00 | -3.14 | AVG | V |
| 4500.000 | 45.20 | -0.91 | 44.29 | 74.00 | -29.71 | Peak | H |
| 4500.000 | 36.29 | -0.91 | 35.38 | 54.00 | -18.62 | AVG | H |
| 5150.000 | 62.25 | 1.92 | 64.17 | 74.00 | -9.83 | Peak | H |
| 5150.000 | 49.65 | 1.92 | 51.57 | 54.00 | -2.43 | AVG | H |
| 802.11a – CH48 (5240 MHz) | | | | | | | |
| 5350.000 | 48.49 | 2.03 | 50.52 | 74.00 | -23.48 | Peak | V |
| 5350.000 | 37.56 | 2.03 | 39.59 | 54.00 | -14.41 | AVG | V |
| 5460.000 | 46.60 | 2.14 | 48.74 | 74.00 | -25.26 | Peak | V |
| 5460.000 | 37.88 | 2.14 | 40.02 | 54.00 | -13.98 | AVG | V |
| 5350.000 | 47.42 | 2.03 | 49.45 | 74.00 | -24.55 | Peak | H |
| 5350.000 | 37.10 | 2.03 | 39.13 | 54.00 | -14.87 | AVG | H |
| 5460.000 | 48.14 | 2.14 | 50.28 | 74.00 | -23.72 | Peak | H |
| 5460.000 | 37.31 | 2.14 | 39.45 | 54.00 | -14.55 | AVG | H |

Radiated emissions at band edge – U-NII-1 band

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|------------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11n20 – CH36 (5180 MHz) | | | | | | | |
| 4500.000 | 45.78 | -0.91 | 44.87 | 74.00 | -29.13 | Peak | V |
| 4500.000 | 36.63 | -0.91 | 35.72 | 54.00 | -18.28 | AVG | V |
| 5150.000 | 64.29 | 1.92 | 66.21 | 74.00 | -7.79 | Peak | V |
| 5150.000 | 49.32 | 1.92 | 51.24 | 54.00 | -2.76 | AVG | V |
| 4500.000 | 45.78 | -0.91 | 44.87 | 74.00 | -29.13 | Peak | H |
| 4500.000 | 36.63 | -0.91 | 35.72 | 54.00 | -18.28 | AVG | H |
| 5150.000 | 64.29 | 1.92 | 66.21 | 74.00 | -7.79 | Peak | H |
| 5150.000 | 49.32 | 1.92 | 51.24 | 54.00 | -2.76 | AVG | H |
| 802.11n20 – CH48 (5240 MHz) | | | | | | | |
| 5350.000 | 47.35 | 2.03 | 49.38 | 74.00 | -24.62 | Peak | V |
| 5350.000 | 37.72 | 2.03 | 39.75 | 54.00 | -14.25 | AVG | V |
| 5460.000 | 46.53 | 2.14 | 48.67 | 74.00 | -25.33 | Peak | V |
| 5460.000 | 37.73 | 2.14 | 39.87 | 54.00 | -14.13 | AVG | V |
| 5350.000 | 47.06 | 2.03 | 49.09 | 74.00 | -24.91 | Peak | H |
| 5350.000 | 37.09 | 2.03 | 39.12 | 54.00 | -14.88 | AVG | H |
| 5460.000 | 46.40 | 2.14 | 48.54 | 74.00 | -25.46 | Peak | H |
| 5460.000 | 37.59 | 2.14 | 39.73 | 54.00 | -14.27 | AVG | H |

Radiated emissions at band edge – U-NII-1 band

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|-------------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11ac20 – CH36 (5180 MHz) | | | | | | | |
| 4500.000 | 45.61 | -0.91 | 44.70 | 74.00 | -29.30 | Peak | V |
| 4500.000 | 36.38 | -0.91 | 35.47 | 54.00 | -18.53 | AVG | V |
| 5150.000 | 63.82 | 1.92 | 65.74 | 74.00 | -8.26 | Peak | V |
| 5150.000 | 48.81 | 1.92 | 50.73 | 54.00 | -3.27 | AVG | V |
| 4500.000 | 45.61 | -0.91 | 44.70 | 74.00 | -29.30 | Peak | H |
| 4500.000 | 36.38 | -0.91 | 35.47 | 54.00 | -18.53 | AVG | H |
| 5150.000 | 63.82 | 1.92 | 65.74 | 74.00 | -8.26 | Peak | H |
| 5150.000 | 48.81 | 1.92 | 50.73 | 54.00 | -3.27 | AVG | H |
| 802.11ac20 – CH48 (5240 MHz) | | | | | | | |
| 5350.000 | 47.36 | 2.03 | 49.39 | 74.00 | -24.61 | Peak | V |
| 5350.000 | 38.18 | 2.03 | 40.21 | 54.00 | -13.79 | AVG | V |
| 5460.000 | 47.84 | 2.14 | 49.98 | 74.00 | -24.02 | Peak | V |
| 5460.000 | 37.51 | 2.14 | 39.65 | 54.00 | -14.35 | AVG | V |
| 5350.000 | 47.22 | 2.03 | 49.25 | 74.00 | -24.75 | Peak | H |
| 5350.000 | 37.29 | 2.03 | 39.32 | 54.00 | -14.68 | AVG | H |
| 5460.000 | 48.02 | 2.14 | 50.16 | 74.00 | -23.84 | Peak | H |
| 5460.000 | 37.44 | 2.14 | 39.58 | 54.00 | -14.42 | AVG | H |

Radiated emissions at band edge – U-NII-3 band

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|-----------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11a – CH149 (5745 MHz) | | | | | | | |
| 5650.000 | 48.50 | 1.86 | 50.36 | 68.20 | -17.84 | Peak | V |
| 5700.000 | 58.67 | 1.71 | 60.38 | 105.2 | -44.82 | Peak | V |
| 5720.000 | 66.85 | 1.69 | 68.54 | 110.8 | -42.26 | Peak | V |
| 5725.000 | 72.66 | 1.67 | 74.33 | 122.2 | -47.87 | Peak | V |
| 5650.000 | 46.52 | 1.86 | 48.38 | 68.20 | -19.82 | Peak | H |
| 5700.000 | 53.74 | 1.71 | 55.45 | 105.2 | -49.75 | Peak | H |
| 5720.000 | 65.25 | 1.69 | 66.94 | 110.8 | -43.86 | Peak | H |
| 5725.000 | 70.00 | 1.67 | 71.67 | 122.2 | -50.53 | Peak | H |
| 802.11a – CH165 (5825 MHz) | | | | | | | |
| 5850.000 | 64.87 | 1.54 | 66.41 | 122.2 | -55.79 | Peak | V |
| 5855.000 | 62.02 | 1.55 | 63.57 | 110.8 | -47.23 | Peak | V |
| 5875.000 | 51.45 | 1.53 | 52.98 | 105.2 | -52.22 | Peak | V |
| 5925.000 | 46.98 | 1.44 | 48.42 | 68.20 | -19.78 | Peak | V |
| 5850.000 | 63.54 | 1.54 | 65.08 | 122.2 | -57.12 | Peak | H |
| 5855.000 | 61.15 | 1.55 | 62.70 | 110.8 | -48.10 | Peak | H |
| 5875.000 | 51.57 | 1.53 | 53.10 | 105.2 | -52.10 | Peak | H |
| 5925.000 | 48.44 | 1.44 | 49.88 | 68.20 | -18.32 | Peak | H |

Radiated emissions at band edge – U-NII-3 band

| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|--------------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11n20 – CH149 (5745 MHz) | | | | | | | |
| 5650.000 | 47.08 | 1.86 | 48.94 | 68.20 | -19.26 | Peak | V |
| 5700.000 | 57.92 | 1.71 | 59.63 | 105.2 | -45.57 | Peak | V |
| 5720.000 | 64.76 | 1.69 | 66.45 | 110.8 | -44.35 | Peak | V |
| 5725.000 | 73.90 | 1.67 | 75.57 | 122.2 | -46.63 | Peak | V |
| 5650.000 | 46.88 | 1.86 | 48.74 | 68.20 | -19.46 | Peak | H |
| 5700.000 | 55.81 | 1.71 | 57.52 | 105.2 | -47.68 | Peak | H |
| 5720.000 | 68.04 | 1.69 | 69.73 | 110.8 | -41.07 | Peak | H |
| 5725.000 | 70.37 | 1.67 | 72.04 | 122.2 | -50.16 | Peak | H |
| 802.11 n20 – CH165 (5825 MHz) | | | | | | | |
| 5850.000 | 63.79 | 1.54 | 65.33 | 122.2 | -56.87 | Peak | V |
| 5855.000 | 58.48 | 1.55 | 60.03 | 110.8 | -50.77 | Peak | V |
| 5875.000 | 50.44 | 1.53 | 51.97 | 105.2 | -53.23 | Peak | V |
| 5925.000 | 47.85 | 1.44 | 49.29 | 68.20 | -18.91 | Peak | V |
| 5850.000 | 59.22 | 1.54 | 60.76 | 122.2 | -61.44 | Peak | H |
| 5855.000 | 56.12 | 1.55 | 57.67 | 110.8 | -53.13 | Peak | H |
| 5875.000 | 49.61 | 1.53 | 51.14 | 105.2 | -54.06 | Peak | H |
| 5925.000 | 46.67 | 1.44 | 48.11 | 68.20 | -20.09 | Peak | H |

Radiated emissions at band edge – U-NII-3 band


| Frequency | Reading Level | Correct Factor | Measurement | Limits | Over | Detector | Polarization |
|--------------------------------------|---------------|----------------|----------------|----------------|--------|----------|--------------|
| (MHz) | (dB μ V) | (dB/m) | (dB μ V/m) | (dB μ V/m) | (dB) | Peak/AVG | H/V |
| 802.11ac20 – CH149 (5745 MHz) | | | | | | | |
| 5650.000 | 46.67 | 1.86 | 48.53 | 68.20 | -19.67 | Peak | V |
| 5700.000 | 57.71 | 1.71 | 59.42 | 105.2 | -45.78 | Peak | V |
| 5720.000 | 66.45 | 1.69 | 68.14 | 110.8 | -42.66 | Peak | V |
| 5725.000 | 73.11 | 1.67 | 74.78 | 122.2 | -47.42 | Peak | V |
| 5650.000 | 46.27 | 1.86 | 48.13 | 68.20 | -20.07 | Peak | H |
| 5700.000 | 54.44 | 1.71 | 56.15 | 105.2 | -49.05 | Peak | H |
| 5720.000 | 65.97 | 1.69 | 67.66 | 110.8 | -43.14 | Peak | H |
| 5725.000 | 73.28 | 1.67 | 74.95 | 122.2 | -47.25 | Peak | H |
| 802.11ac20 – CH165 (5825 MHz) | | | | | | | |
| 5850.000 | 65.29 | 1.54 | 66.83 | 122.2 | -55.37 | Peak | V |
| 5855.000 | 61.12 | 1.55 | 62.67 | 110.8 | -48.13 | Peak | V |
| 5875.000 | 50.24 | 1.53 | 51.77 | 105.2 | -53.43 | Peak | V |
| 5925.000 | 46.96 | 1.44 | 48.40 | 68.20 | -19.80 | Peak | V |
| 5850.000 | 61.83 | 1.54 | 63.37 | 122.2 | -58.83 | Peak | H |
| 5855.000 | 57.58 | 1.55 | 59.13 | 110.8 | -51.67 | Peak | H |
| 5875.000 | 51.91 | 1.53 | 53.44 | 105.2 | -51.76 | Peak | H |
| 5925.000 | 48.66 | 1.44 | 50.10 | 68.20 | -18.10 | Peak | H |

6.4 Emission bandwidth (26dB bandwidth)

6.4.1 Limits

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

6.4.2 Test setup



6.4.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.1.

6.4.4 Test results


Note: See the appendix A1

6.5 Emission bandwidth (6dB bandwidth)

6.5.1 Limits

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

6.5.2 Test setup



6.5.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.2.

6.5.4 Test results


Note: See the appendix A2

6.6 Duty Cycle

6.6.1 Limits

None, for reporting purposes only.

6.6.2 Test setup



6.6.3 Test procedure

Test method: ANSI C63.10 section 12.2.

6.6.4 Test Results

Note: see the appendix B

6.7 Maximum conducted output power

6.7.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.7.2 Test setup



6.7.3 Test procedure

Test method: 789033 D02 v02r01 Section E.3.a (Method PM)

6.7.4 Test results

Note: See the appendix C

6.8 Power spectral density

6.8.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.8.2 Test setup



6.8.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section F.

6.8.4 Test results

Note: See the appendix D

6.9 Conducted spurious emissions

6.9.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.9.2 Test setup



6.9.3 Test procedure

Spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

The antenna gain and cable loss is compensated in the test plot.

The worst margin is greater than the antenna gain plus line loss.

6.9.4 Test results

Note: See the appendix E

6.10 Conducted band edge

6.10.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.10.2 Test setup



6.10.3 Test procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

The antenna gain and cable loss is compensated in the test plot.

6.10.4 Test results

Note: See the appendix F

6.11 Frequency Stability

6.11.1 Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.11.2 Test Procedures

Test method: ANSI C63.10-2013 Clause 6.8.

6.11.3 Test results

Note: See the appendix G

Appendix A1: Emission bandwidth (26dB bandwidth)

Test Result

| Test Mode | Antenna | Frequency [MHz] | 26db EBW [MHz] |
|------------|---------|-----------------|----------------|
| 11A | Ant1 | 5180 | 21.400 |
| | | 5200 | 21.400 |
| | | 5240 | 21.240 |
| | | 5745 | 21.400 |
| | | 5785 | 25.160 |
| | | 5825 | 22.400 |
| 11N20SISO | Ant1 | 5180 | 21.720 |
| | | 5200 | 22.200 |
| | | 5240 | 22.360 |
| | | 5745 | 26.680 |
| | | 5785 | 25.120 |
| | | 5825 | 24.080 |
| 11AC20SISO | Ant1 | 5180 | 22.560 |
| | | 5200 | 21.800 |
| | | 5240 | 21.280 |
| | | 5745 | 26.320 |
| | | 5785 | 24.280 |
| | | 5825 | 24.800 |

Test Graphs

11A Ant1 5180



11A Ant1 5200



11A Ant1 5240



11A_Ant1_5745



11A_Ant1_5785



11A_Ant1_5825





11N20SISO_Ant1_5745




11N20SISO_Ant1_5785



11N20SISO_Ant1_5825



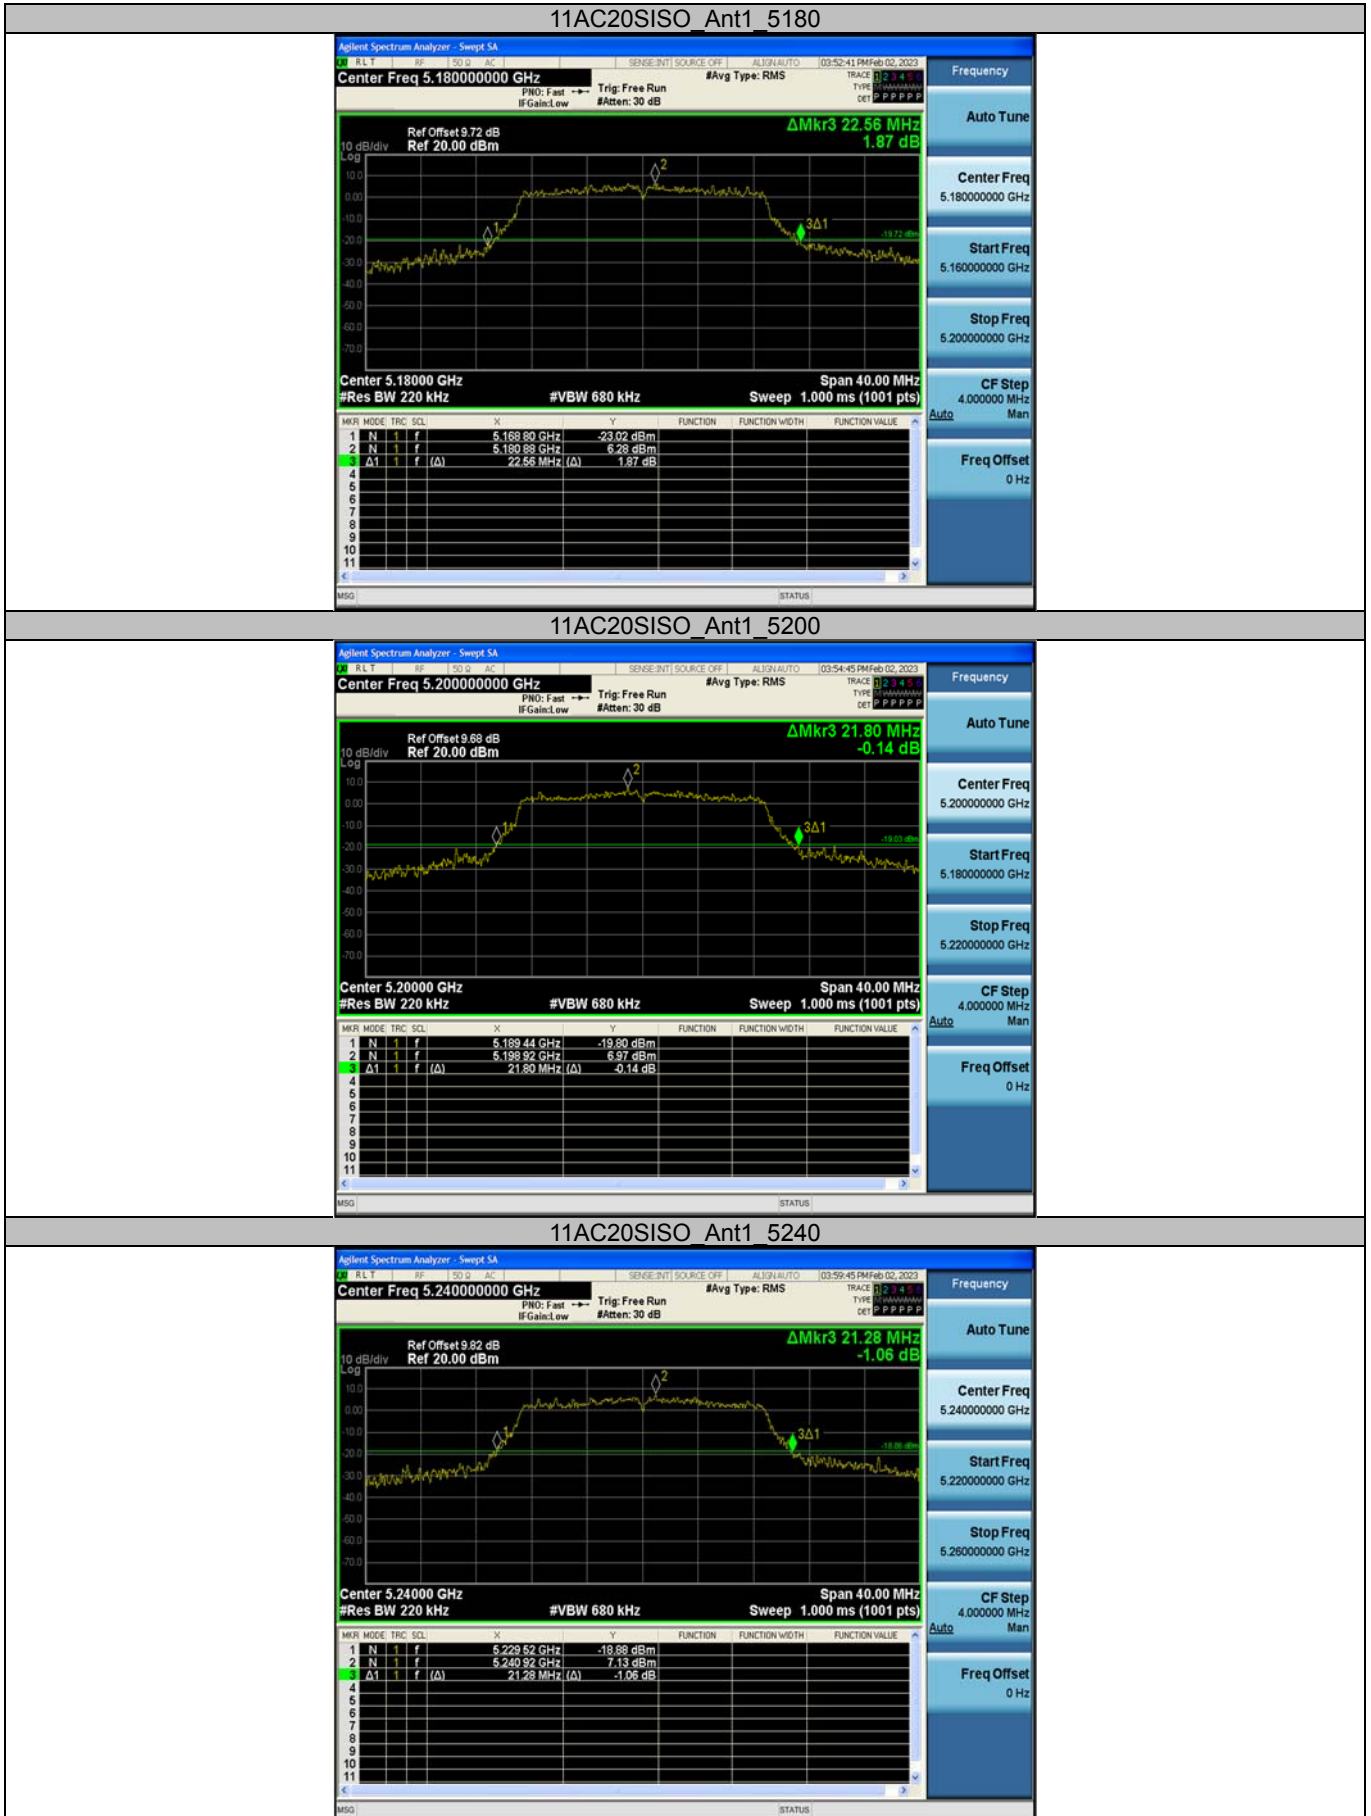




1.1 Appendix A2: Occupied channel bandwidth

1.1.1 Test Result

| TestMode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|---------|----------------|-----------|-----------|-----------|------------|---------|
| 11A | Ant1 | 5180 | 17.390 | 5171.3343 | 5188.7463 | --- | --- |
| | | 5200 | 17.475 | 5191.2363 | 5208.7113 | --- | --- |
| | | 5240 | 17.527 | 5231.2341 | 5248.7611 | --- | --- |
| | | 5745 | 17.624 | 5736.1034 | 5753.7274 | --- | --- |
| | | 5785 | 17.840 | 5775.9586 | 5793.7986 | --- | --- |
| | | 5825 | 17.654 | 5816.0481 | 5833.7021 | --- | --- |
| 11N20SISO | Ant1 | 5180 | 18.495 | 5170.7779 | 5189.2729 | --- | --- |
| | | 5200 | 18.438 | 5190.8392 | 5209.2772 | --- | --- |
| | | 5240 | 18.518 | 5230.8156 | 5249.3336 | --- | --- |
| | | 5745 | 18.708 | 5735.6846 | 5754.3926 | --- | --- |
| | | 5785 | 18.648 | 5775.6559 | 5794.3039 | --- | --- |
| | | 5825 | 18.485 | 5815.7201 | 5834.2051 | --- | --- |
| 11AC20SISO | Ant1 | 5180 | 18.546 | 5170.7700 | 5189.3160 | --- | --- |
| | | 5200 | 18.450 | 5190.8252 | 5209.2752 | --- | --- |
| | | 5240 | 18.505 | 5230.8090 | 5249.3140 | --- | --- |
| | | 5745 | 18.761 | 5735.6446 | 5754.4056 | --- | --- |
| | | 5785 | 18.676 | 5775.6077 | 5794.2837 | --- | --- |
| | | 5825 | 18.629 | 5815.6443 | 5834.2733 | --- | --- |

1.1.2 Test Graphs

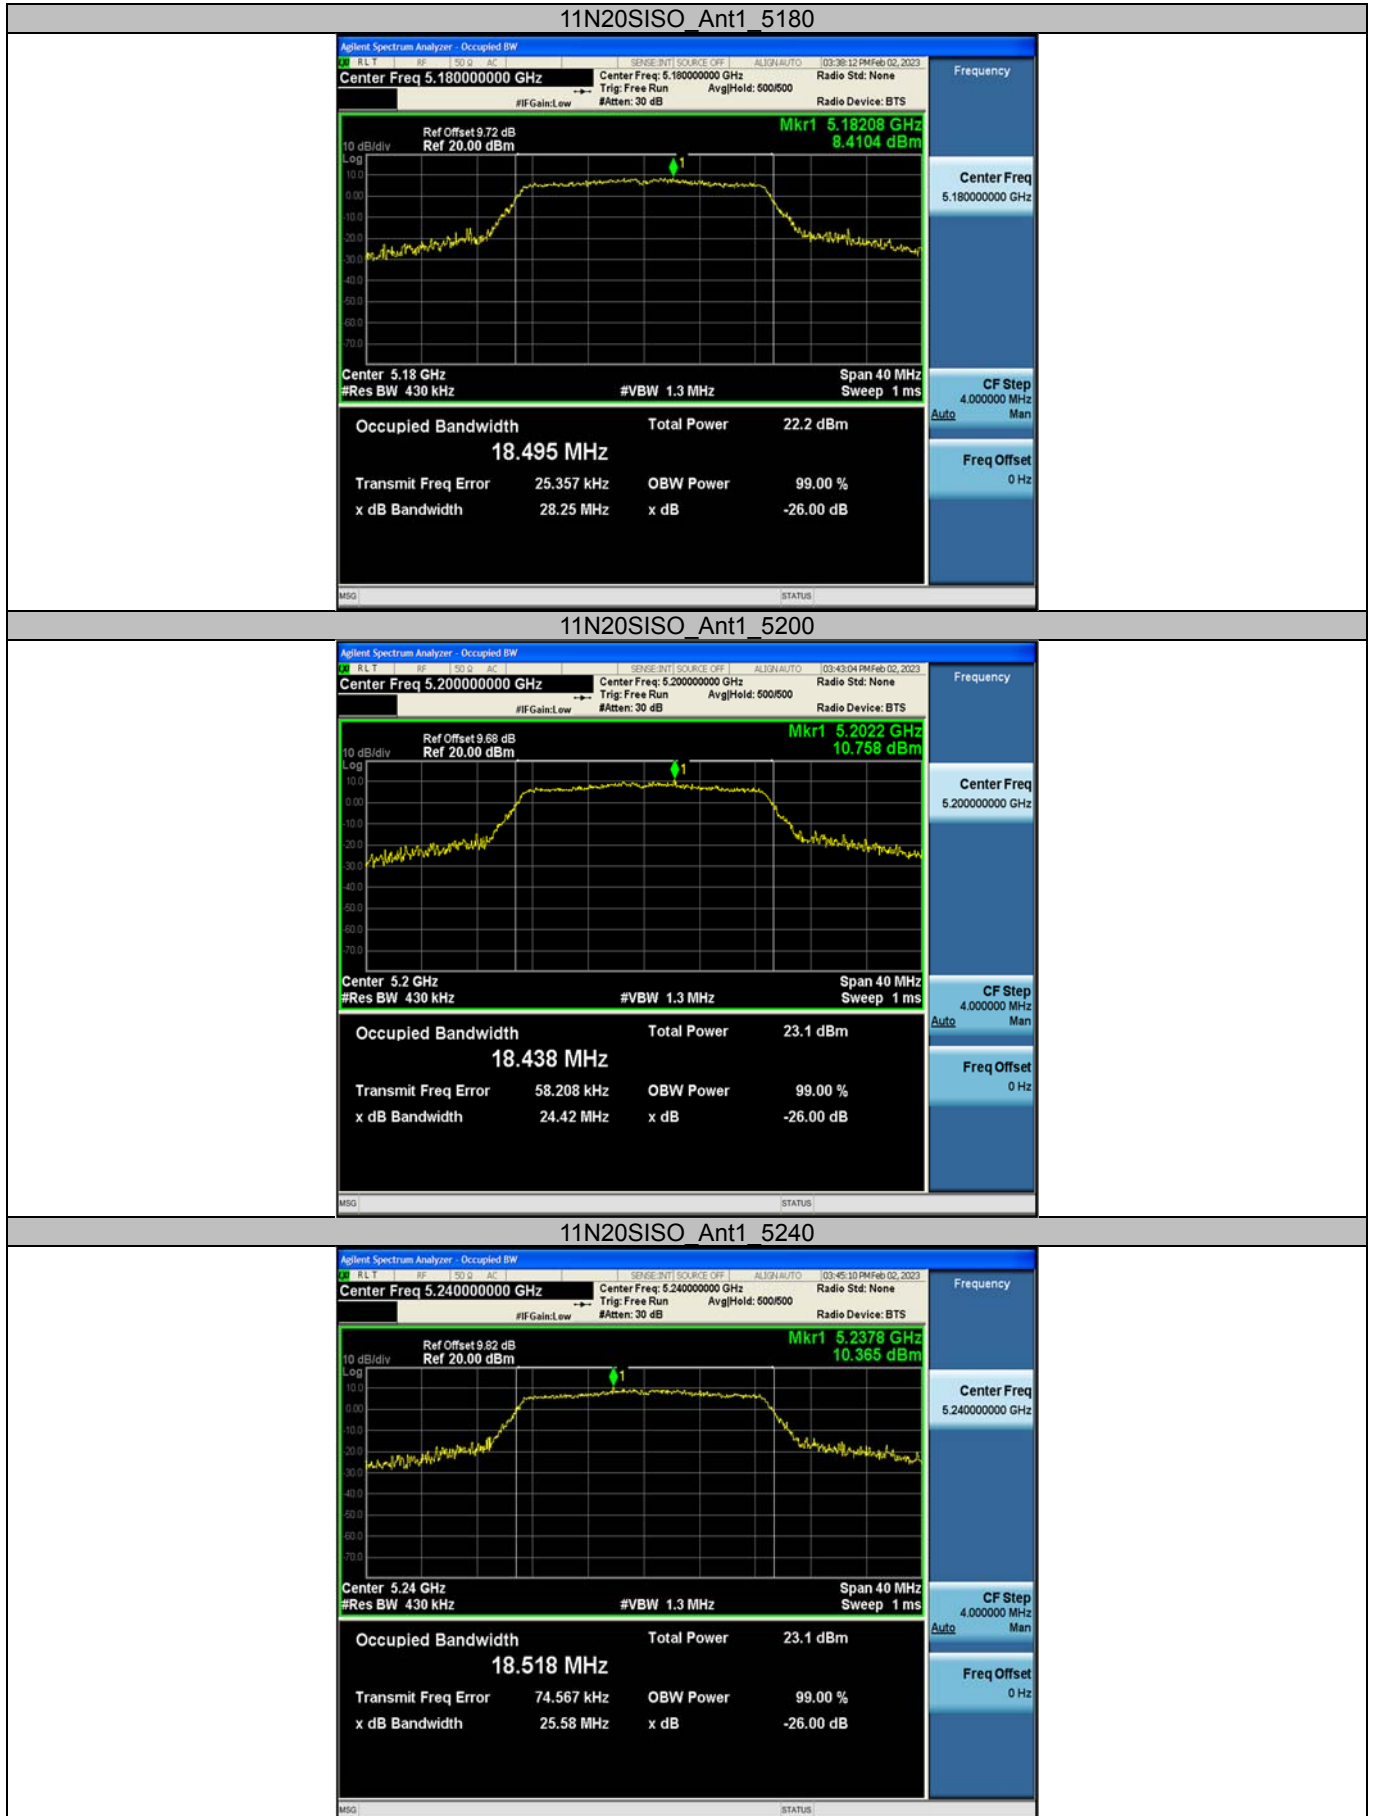

11N20SISO_Ant1_5745



11N20SISO_Ant1_5785



11N20SISO_Ant1_5825







1.2 Appendix A3: Min emission bandwidth

Test Result

| Test Mode | Antenna | Frequency [MHz] | 6db EBW [MHz] |
|-----------|---------|-----------------|---------------|
| 11A | Ant1 | 5745 | 16.32 |
| | | 5785 | 15.92 |
| | | 5825 | 16.28 |
| 11N20 | | 5745 | 16.92 |
| | | 5785 | 17.16 |
| | | 5825 | 16.92 |
| 11AC20 | | 5745 | 17.28 |
| | | 5785 | 17.08 |
| | | 5825 | 16.24 |

1.2.1 Test Result B4

Test Graphs



11A_Ant1_5825



11N20SISO_Ant1_5745



11N20SISO_Ant1_5785

