






UNIPOWER
MODEL NO: X75-12-A-QHHL-S-578
PART NO: 100-501A-0000
REVISION: 98
SERIAL NO: A024713
INPUT: 100-240VAC @ 5.0-3.5A MAX
CE

50
RoHS

OBAL
1232

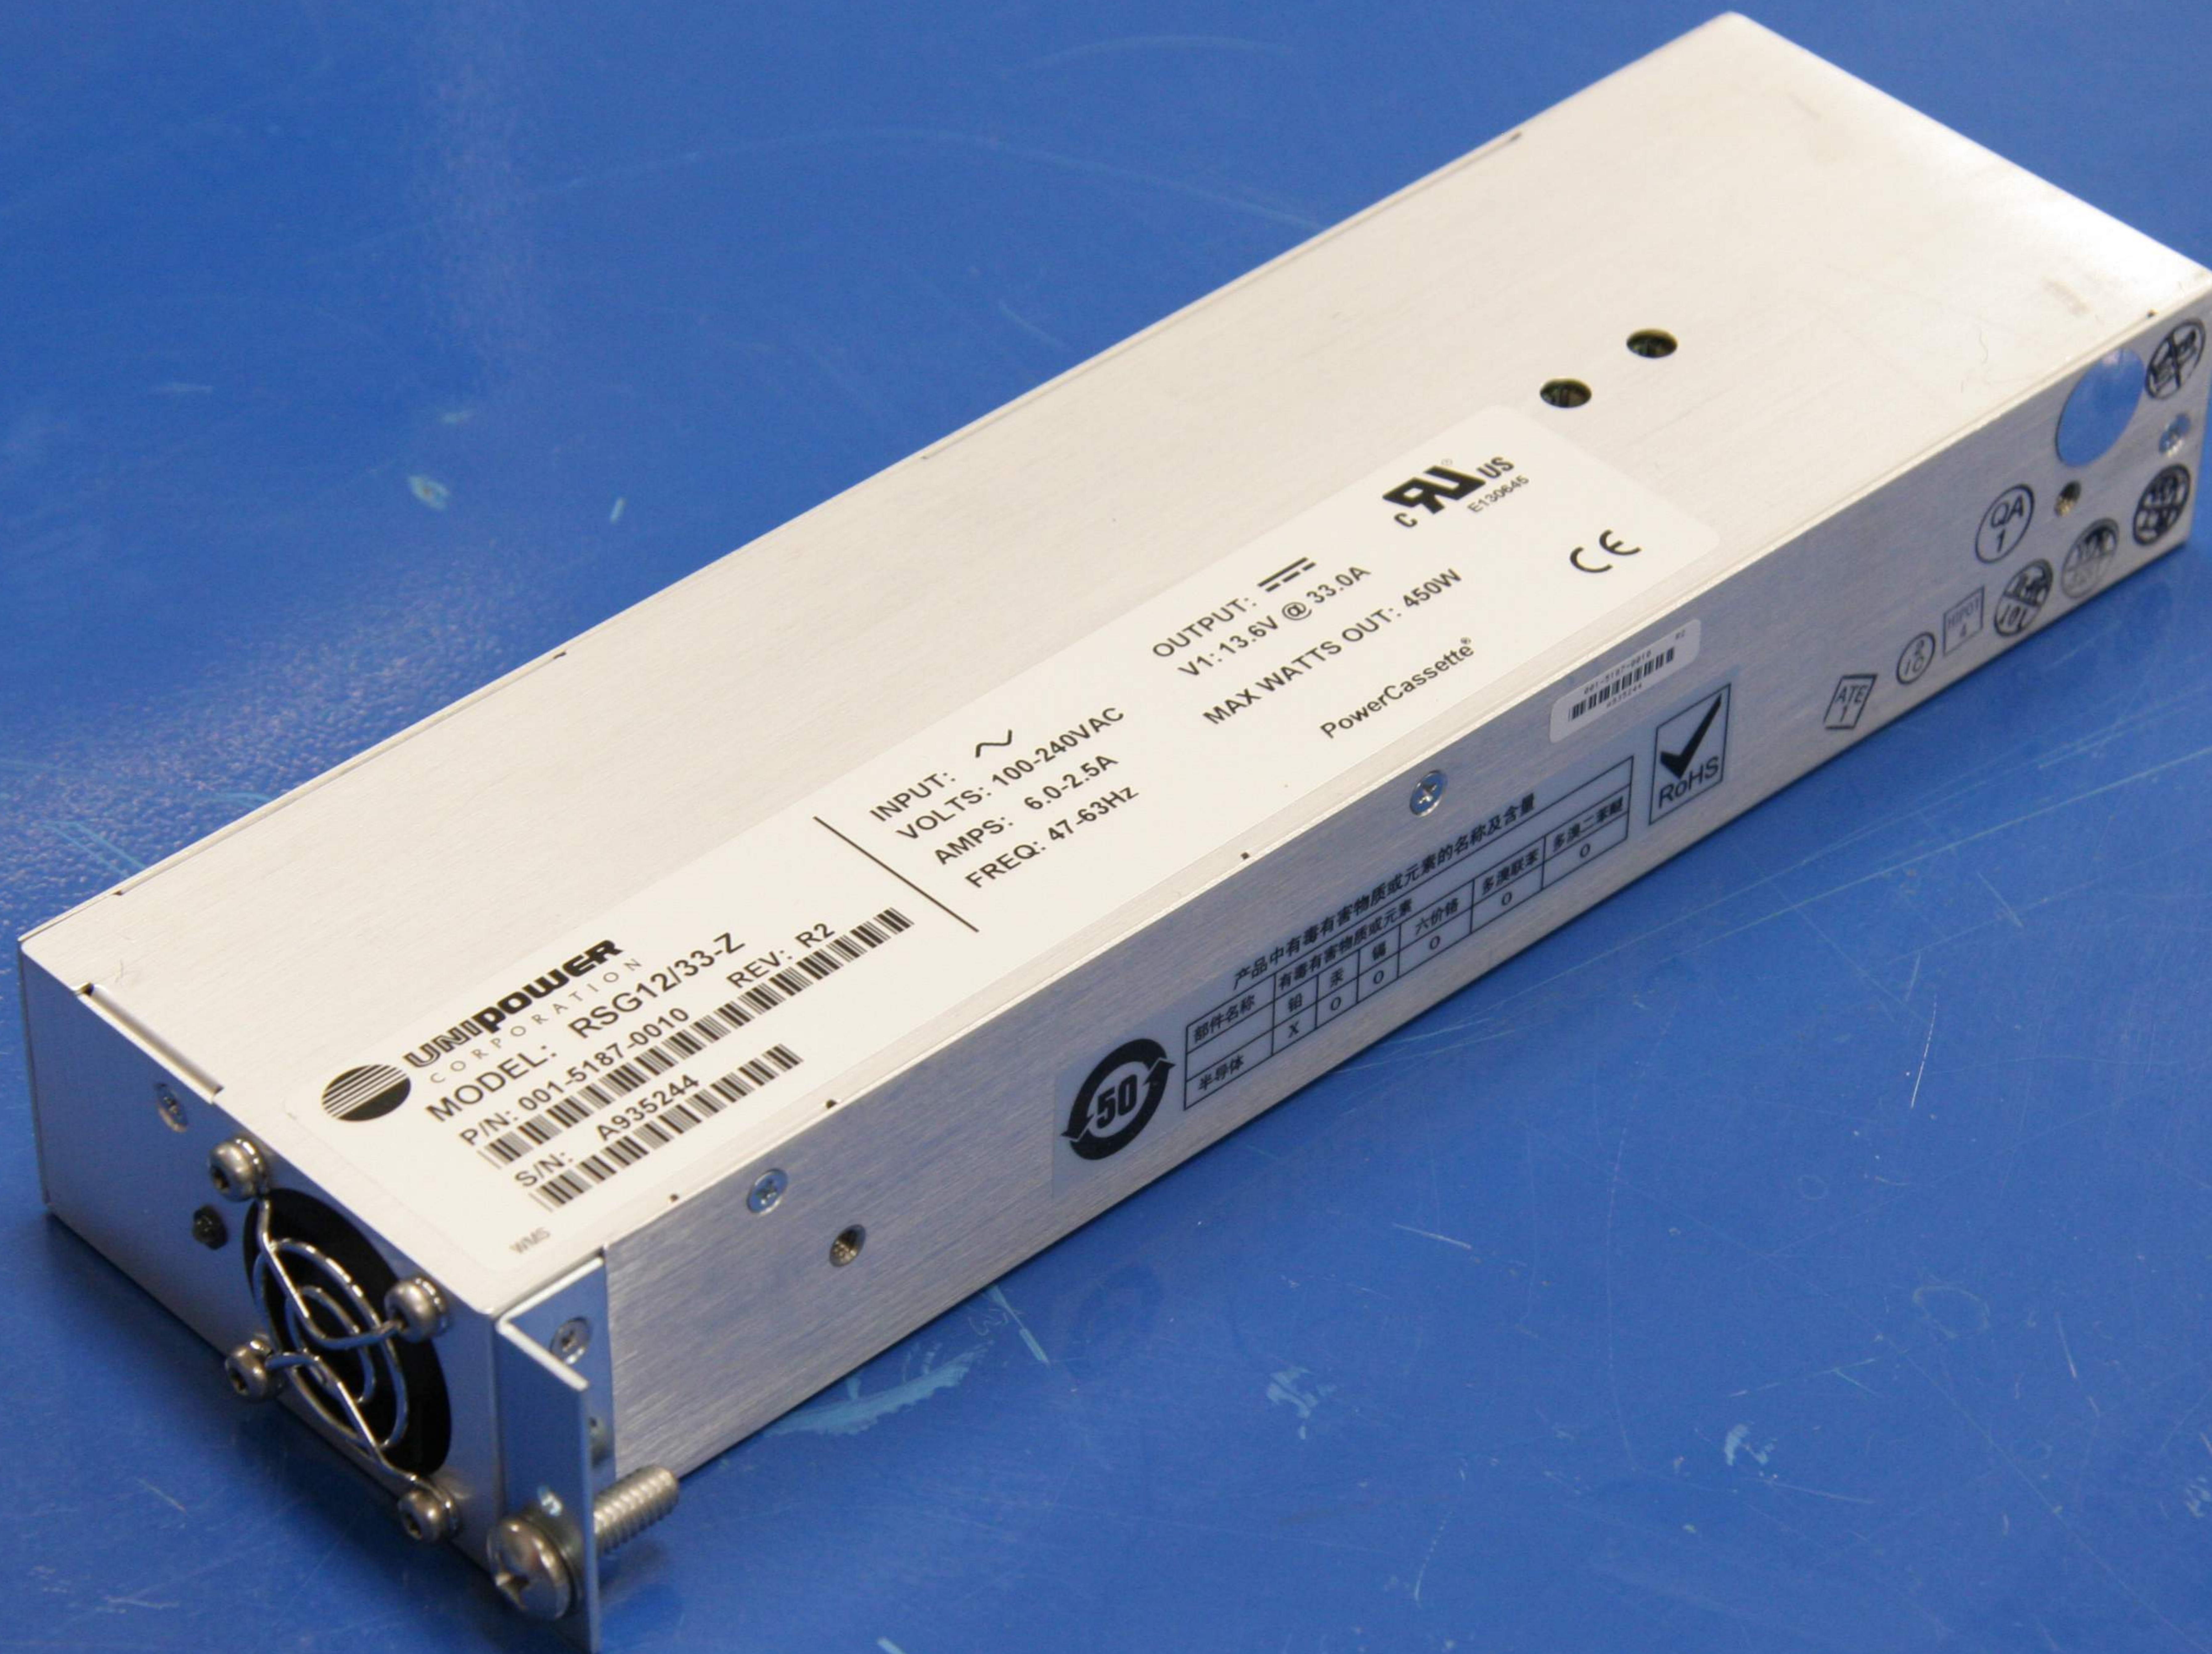

UNIPower
CORPORATION
MODEL: RSG12/33-Z
P/N: 001-5187-0010 REV: R2
S/N: A935244

INPUT: ~
VOLTS: 100-240VAC
AMPS: 6.0-2.5A
FREQ: 47-63Hz

OUTPUT: 
V1: 13.6V @ 33.0A
MAX WATTS OUT: 450W
PowerCassette®


UL US
E150845
CE



产品中有毒有害物质或元素的名称及含量

部件名称	有毒有害物质或元素	六价铬	多溴联苯	多溴二苯醚
半导体	X	0	0	0



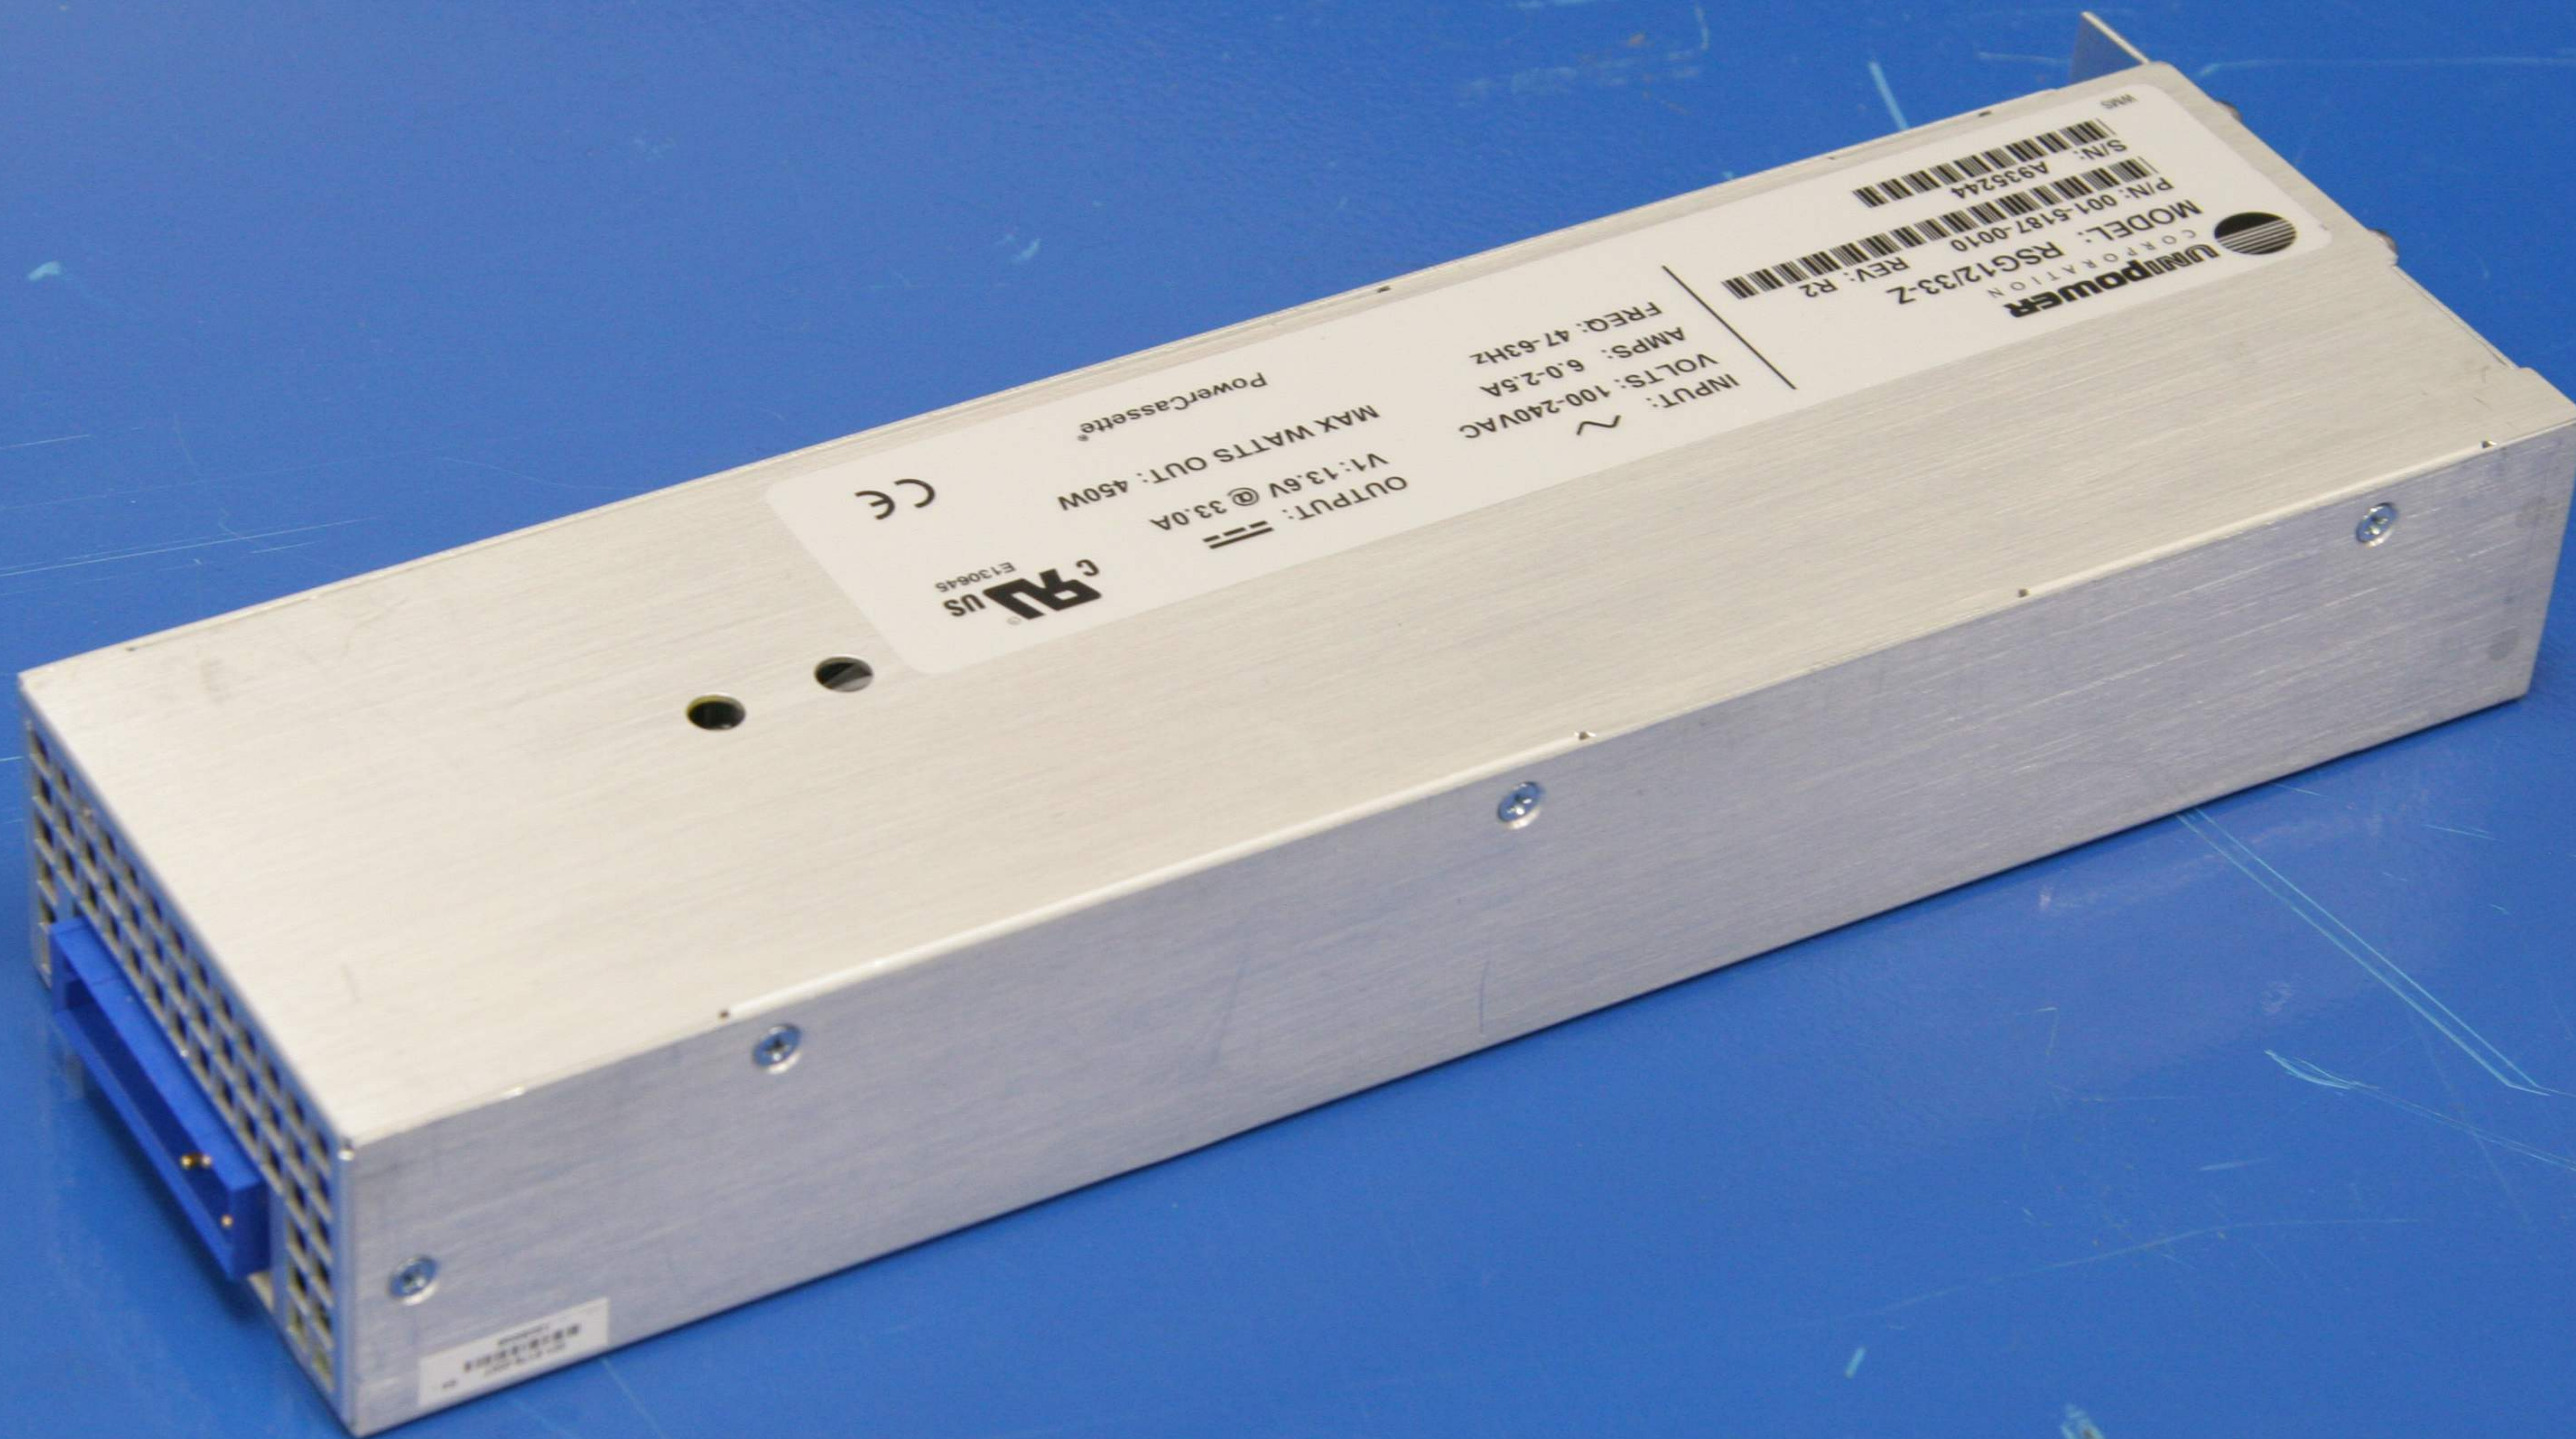

CE

CU US
ET130645

PowerCassette®
MAX WATTS OUT: 450W
OUTPUT: 13.6V @ 33.0A
V1: 13.6V

INPUT: 100-240VAC
VOLTS: 100-240VAC
AMPS: 6.0-2.5A
FREQ: 47-63Hz

MODEL: RSG12/33-Z
REV: R2
P/N: 001-5187-0010
S/N: A935244



SPD



L1

L2

N

PE

MAIN AC

TRMS

BMS

AC
SERVICE



L1

L2


CB1


CB2

CB3

120 VAC
AC SERVICE




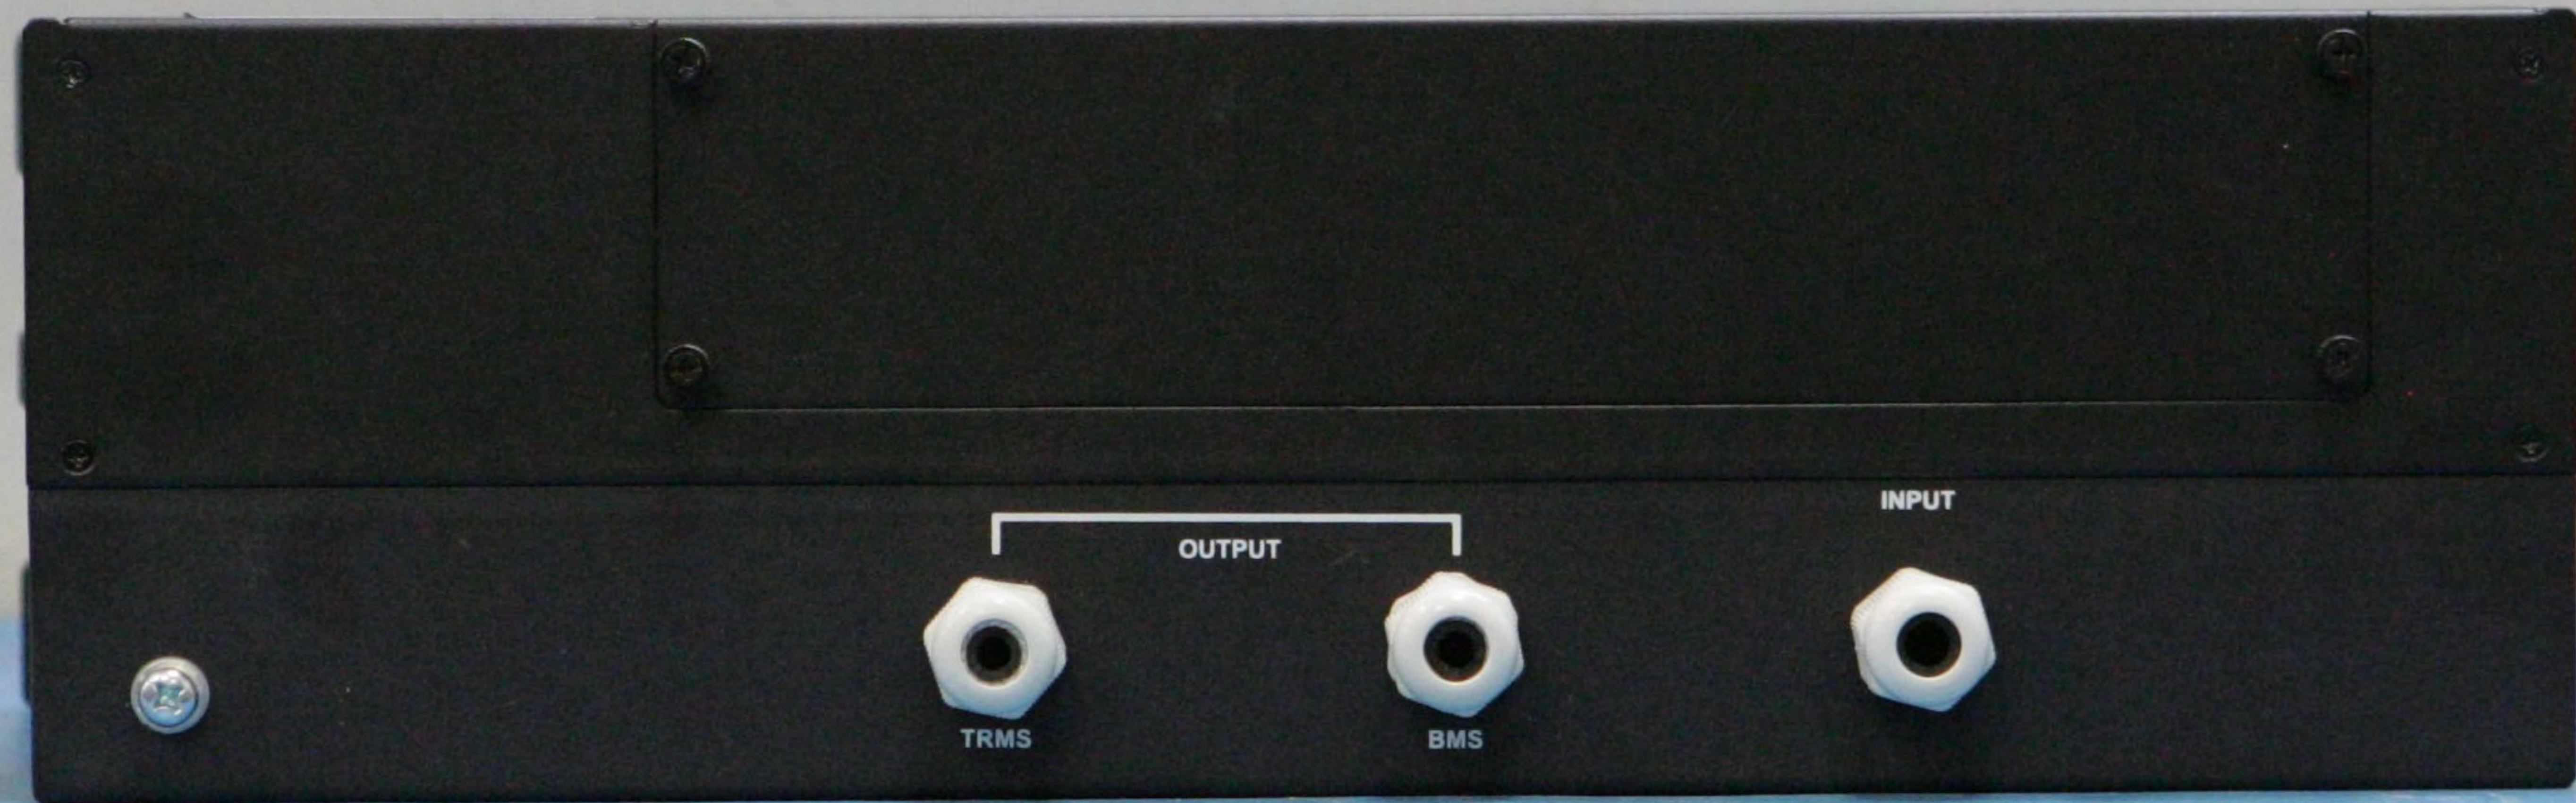

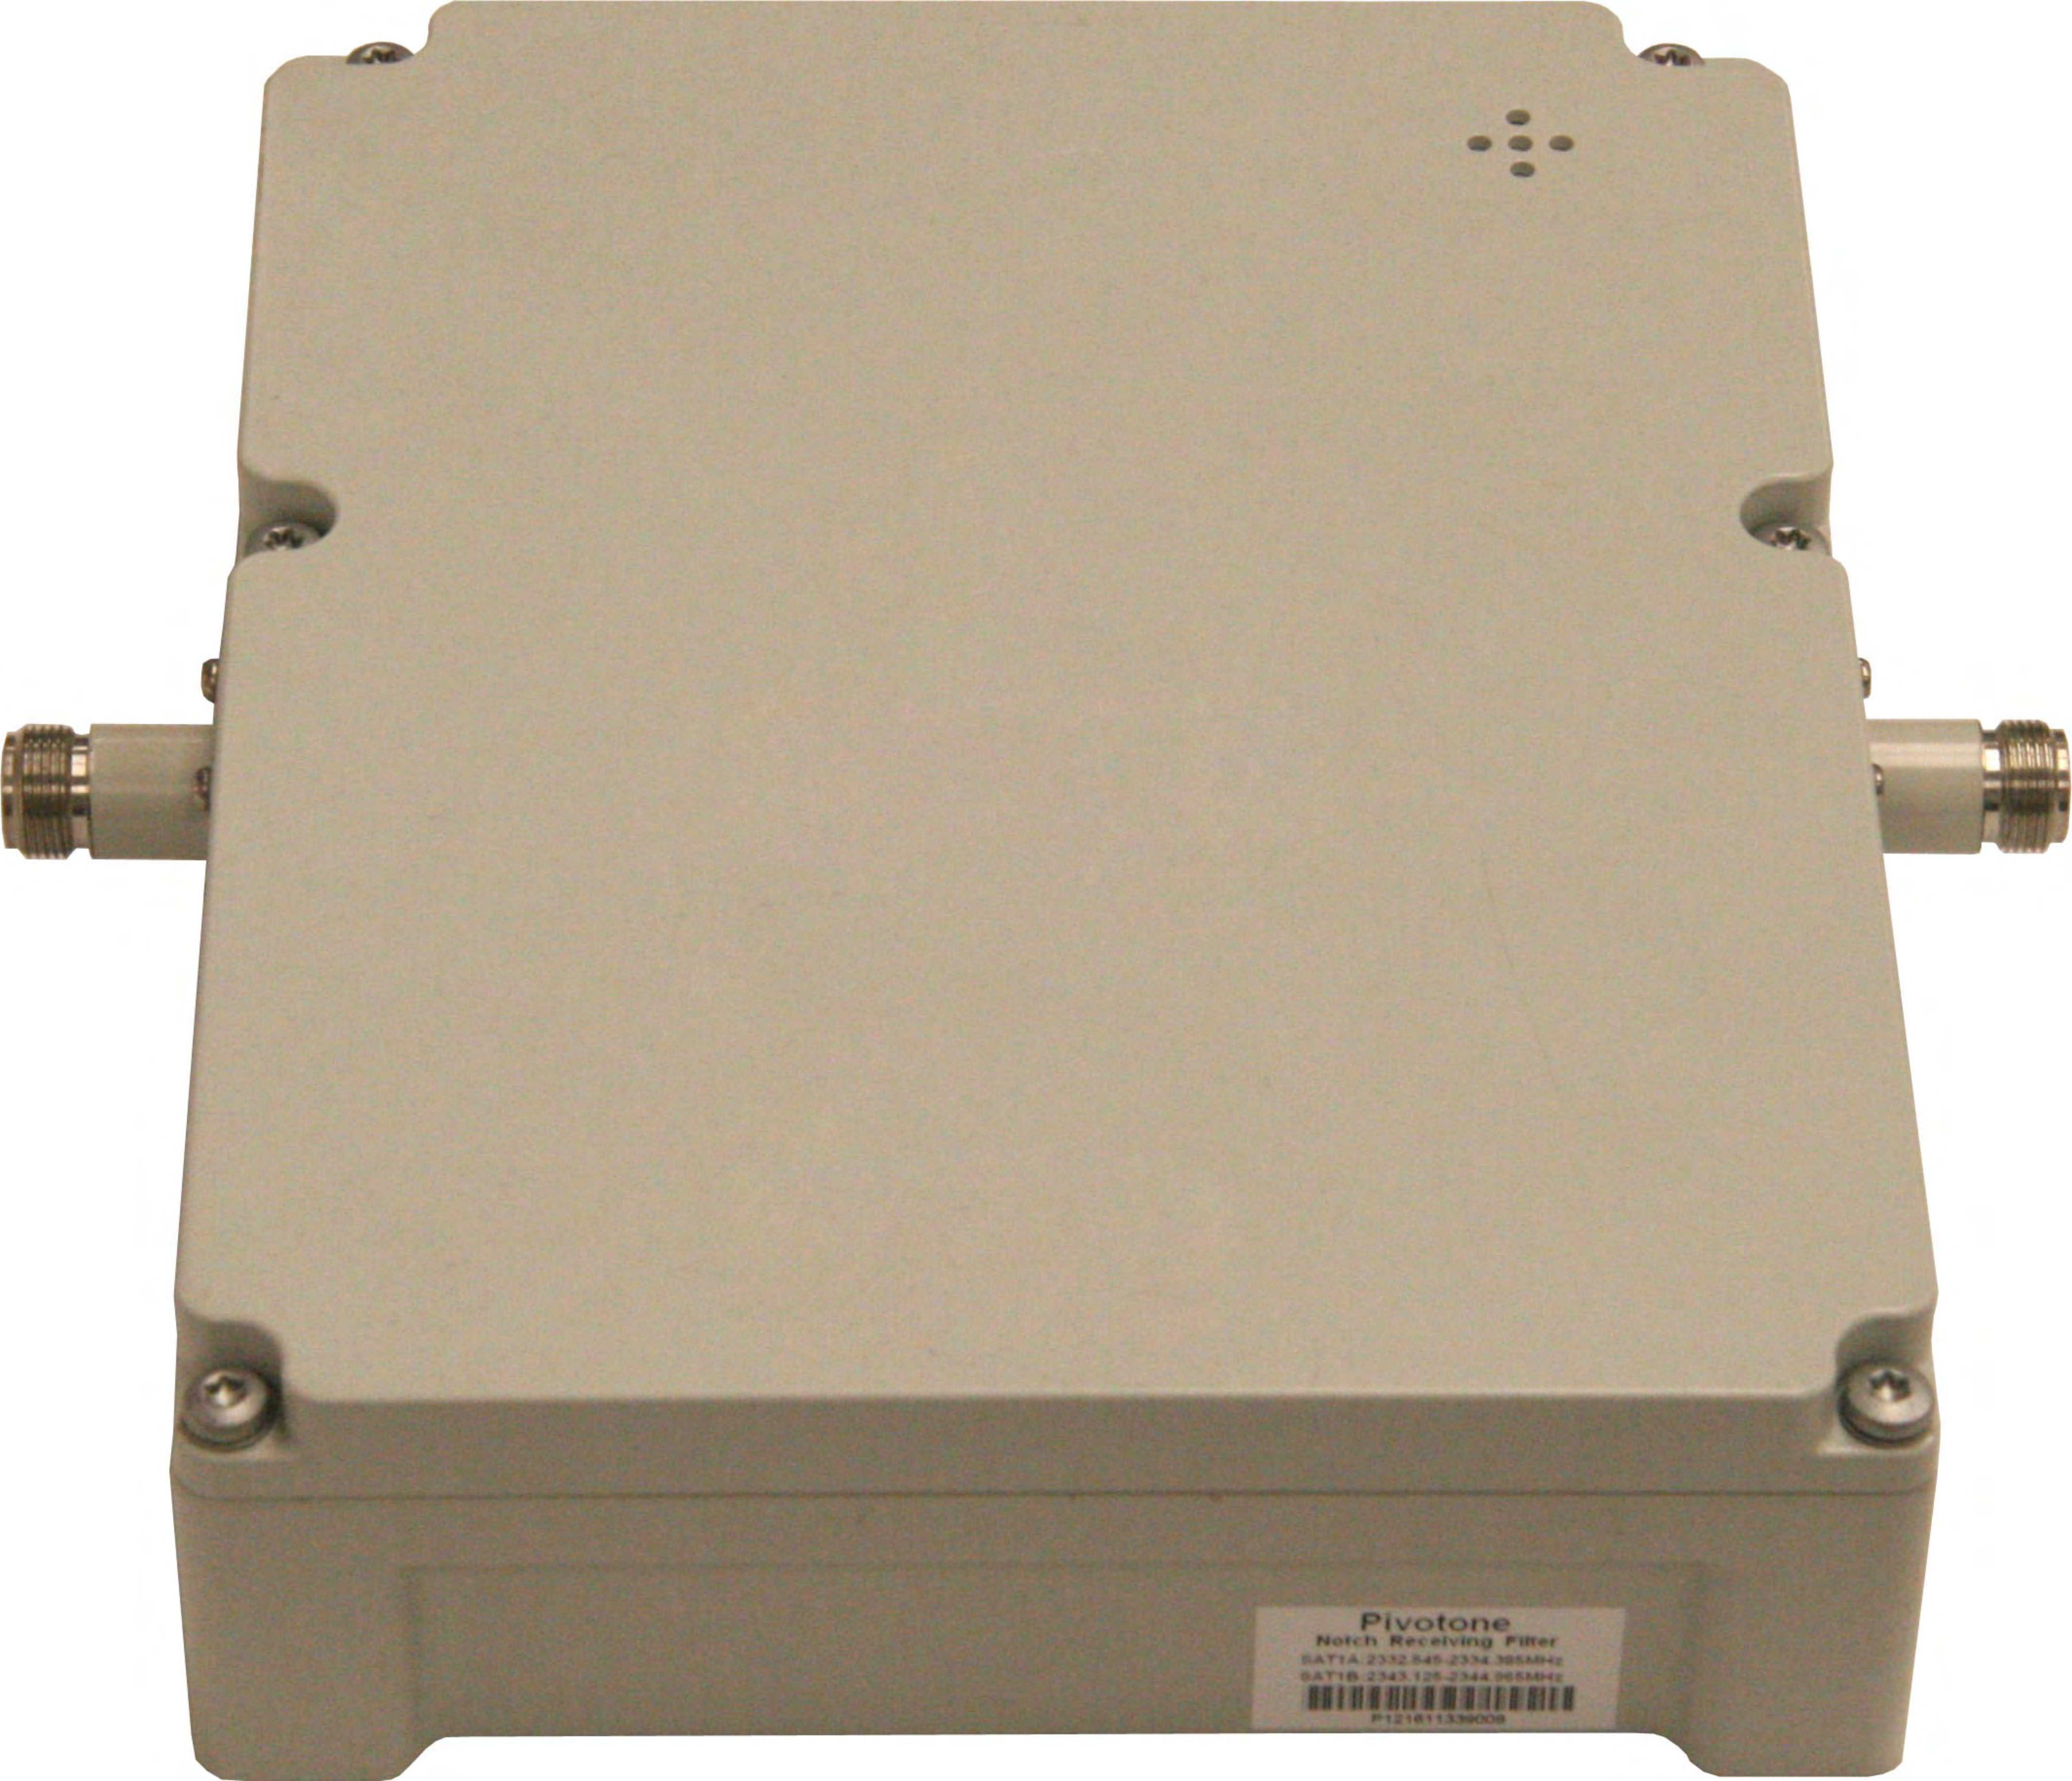

Pivotone
Notch Receiving Filter
SAT1A 2332.545-2334.385MHz
SAT1B 2343.125-2344.965MHz
P121611336008

● POWER
● BCST OK
● ERROR

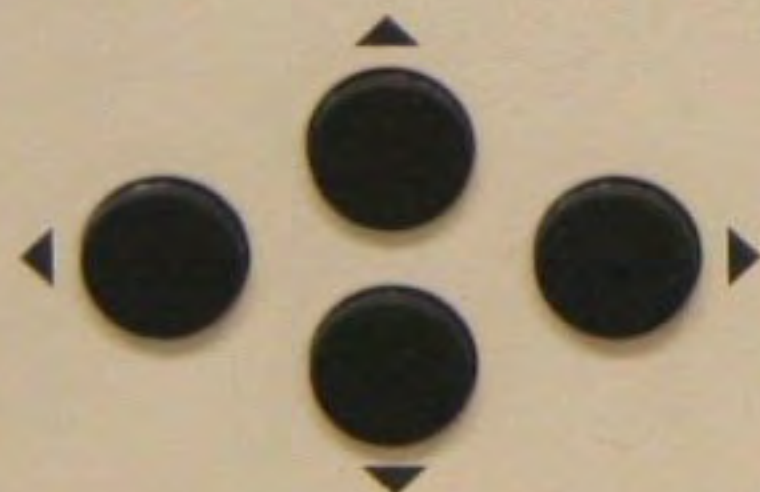

ESC
ENTER




PROPERTY OF
SIRIUS XM SATELLITE RADIO INC.

300015239

HIGH BAND EXCITER 1.1
RDEC

RJ06 (LAN)



RJ07 (USB)




Innovationszentrum
Telekommunikations-
technik GmbH

Am Weichselgarten 5
91058 Erlangen
GERMANY

MODEL	SERIAL NO.	
CDSP-R	 236510-02-02-03-0033	
VOLTAGE RANGE	CURRENT MAX AMPS	FSN
10-15VDC	12A	 IZTAOLBBIE1F03033

MADE IN GERMANY

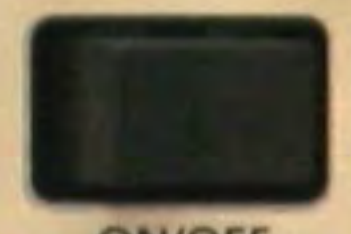

RJ02(WAN)

RJ03(LAN1)

RJ04(LAN2)

CP01 (ALARMS)

CJ07 (COUPLER)

DJ07(DC OUT)

ON/OFF

DT05(DC TEST)

DJ02
(RF IN)

DT02
(RF IN SAMPLE)

DT04
(LO SAMPLE)

DJ05
(ANC IN)

DT03
(RFOUT SAMPLE)

DJ03
(RFOUT)

CJ08 (DC POWER)

RJ01
(PSTN)

CP06 (RMS)

CJ09 (EXT)

CJ02 (TEMP SENSORS)


CJ03 (HPA/KPA1)

CJ04 (KPA2)

CP02 (OPA DC PS)

DJ06 (LNA PWR)

● POWER
● BCST OK
● ERROR

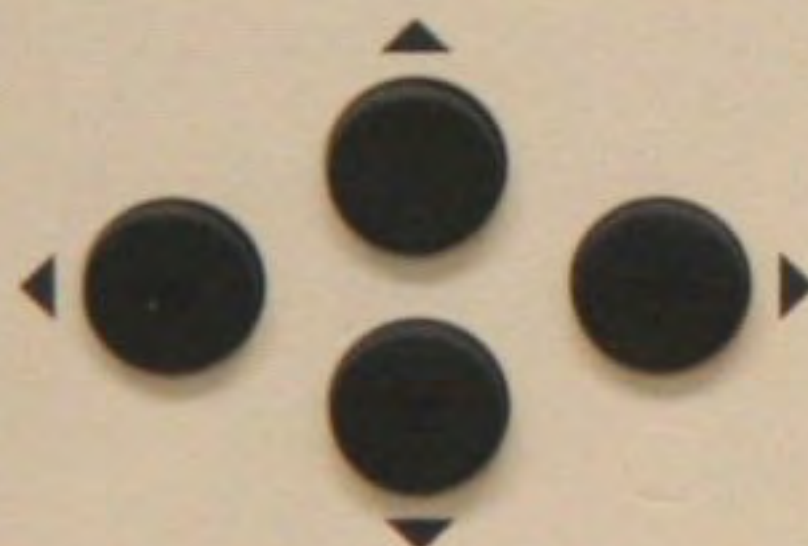


ESC



ENTER

SIRIUS
SATELLITE RADIO

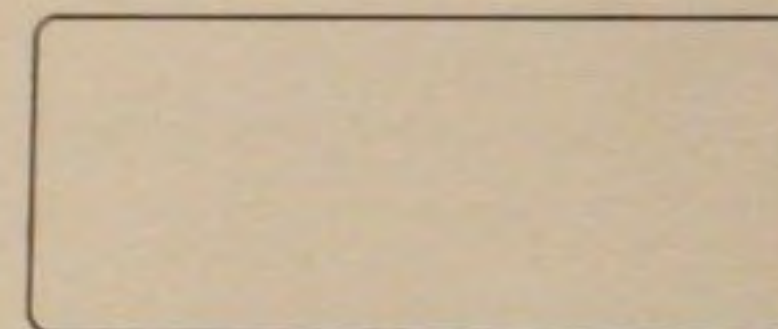

LOW BAND EXCITER 3

RJ05 (LAN)



RJ06 (USB)



Innovationszentrum
Telekommunikations-
technik GmbH

Am Weichselgarten 5
91058 Erlangen
GERMANY

MODEL	SERIAL NO.	
LBE	 236530-02-01-01-0015	
INPUT VOLTAGE	INPUT CURRENT	
10-15VDC	20A MAX	

MADE IN GERMANY

LBE



DJ04
RF HPA
FB IN

DJ08
PAR
FB IN

DJ09
OOB
FB IN

RFU

J1A DIV
RF2 UPC
OUT




J1B DIV
RF2 PA
IN



DT03
RF1 OUT
SAMPLE

DJ03
RF1 OUT



DJ01
VSAT IN



DT01
VSAT IN
SAMPLE



DJ02
GPS IN

DT05 DIV
RF2 OUT
SAMPLE



DJ05 DIV
RF2 OUT

RJ01
MODEM

RJ02
WAN

RJ03
LAN1

RJ04
LAN2

CP07 ALARMS

DT09
10MHZ
OUT

DT08
1PPS
OUT

DJ07 SW
DC OUT

ON/OFF

DT06 12VDC
TEST

DJ06 DC POWER IN

CJ02 OC1

CJ08 EXT

CJ06 TEMP SENSORS


CJ01 HPA M&C


CJ03 PA M&C


CP04 OPA-FAN-PS

CJ05 OC2



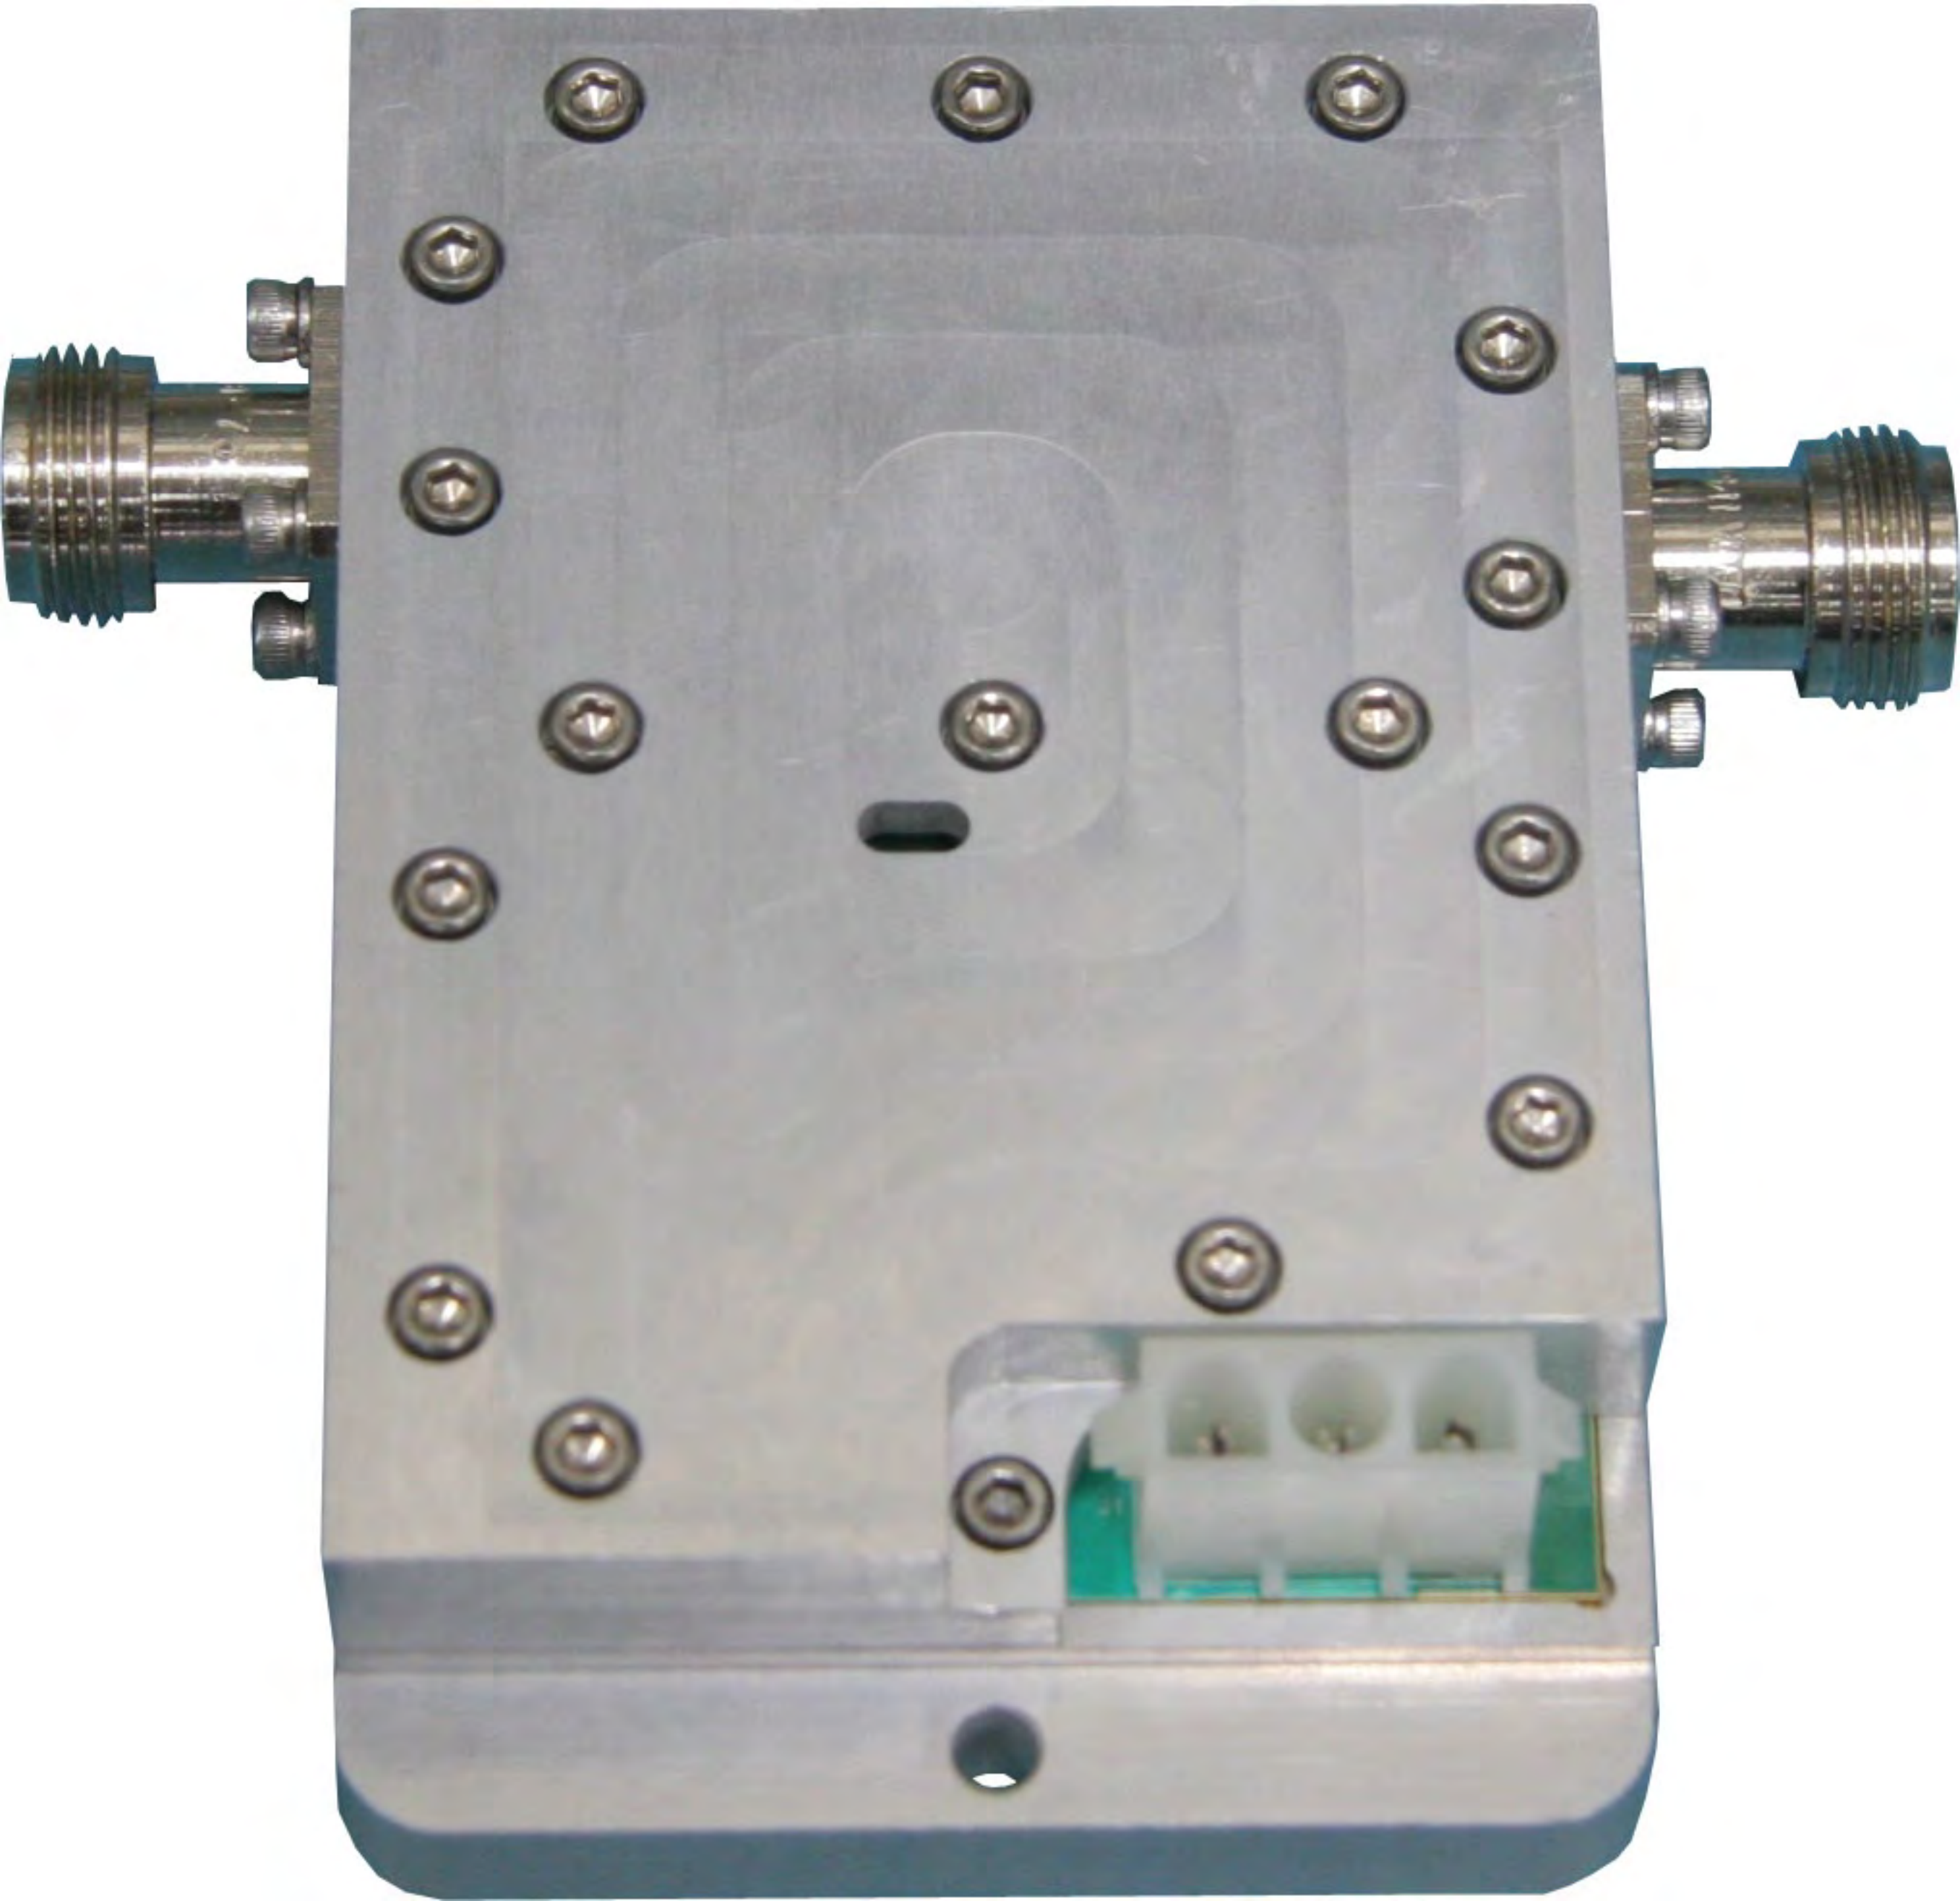

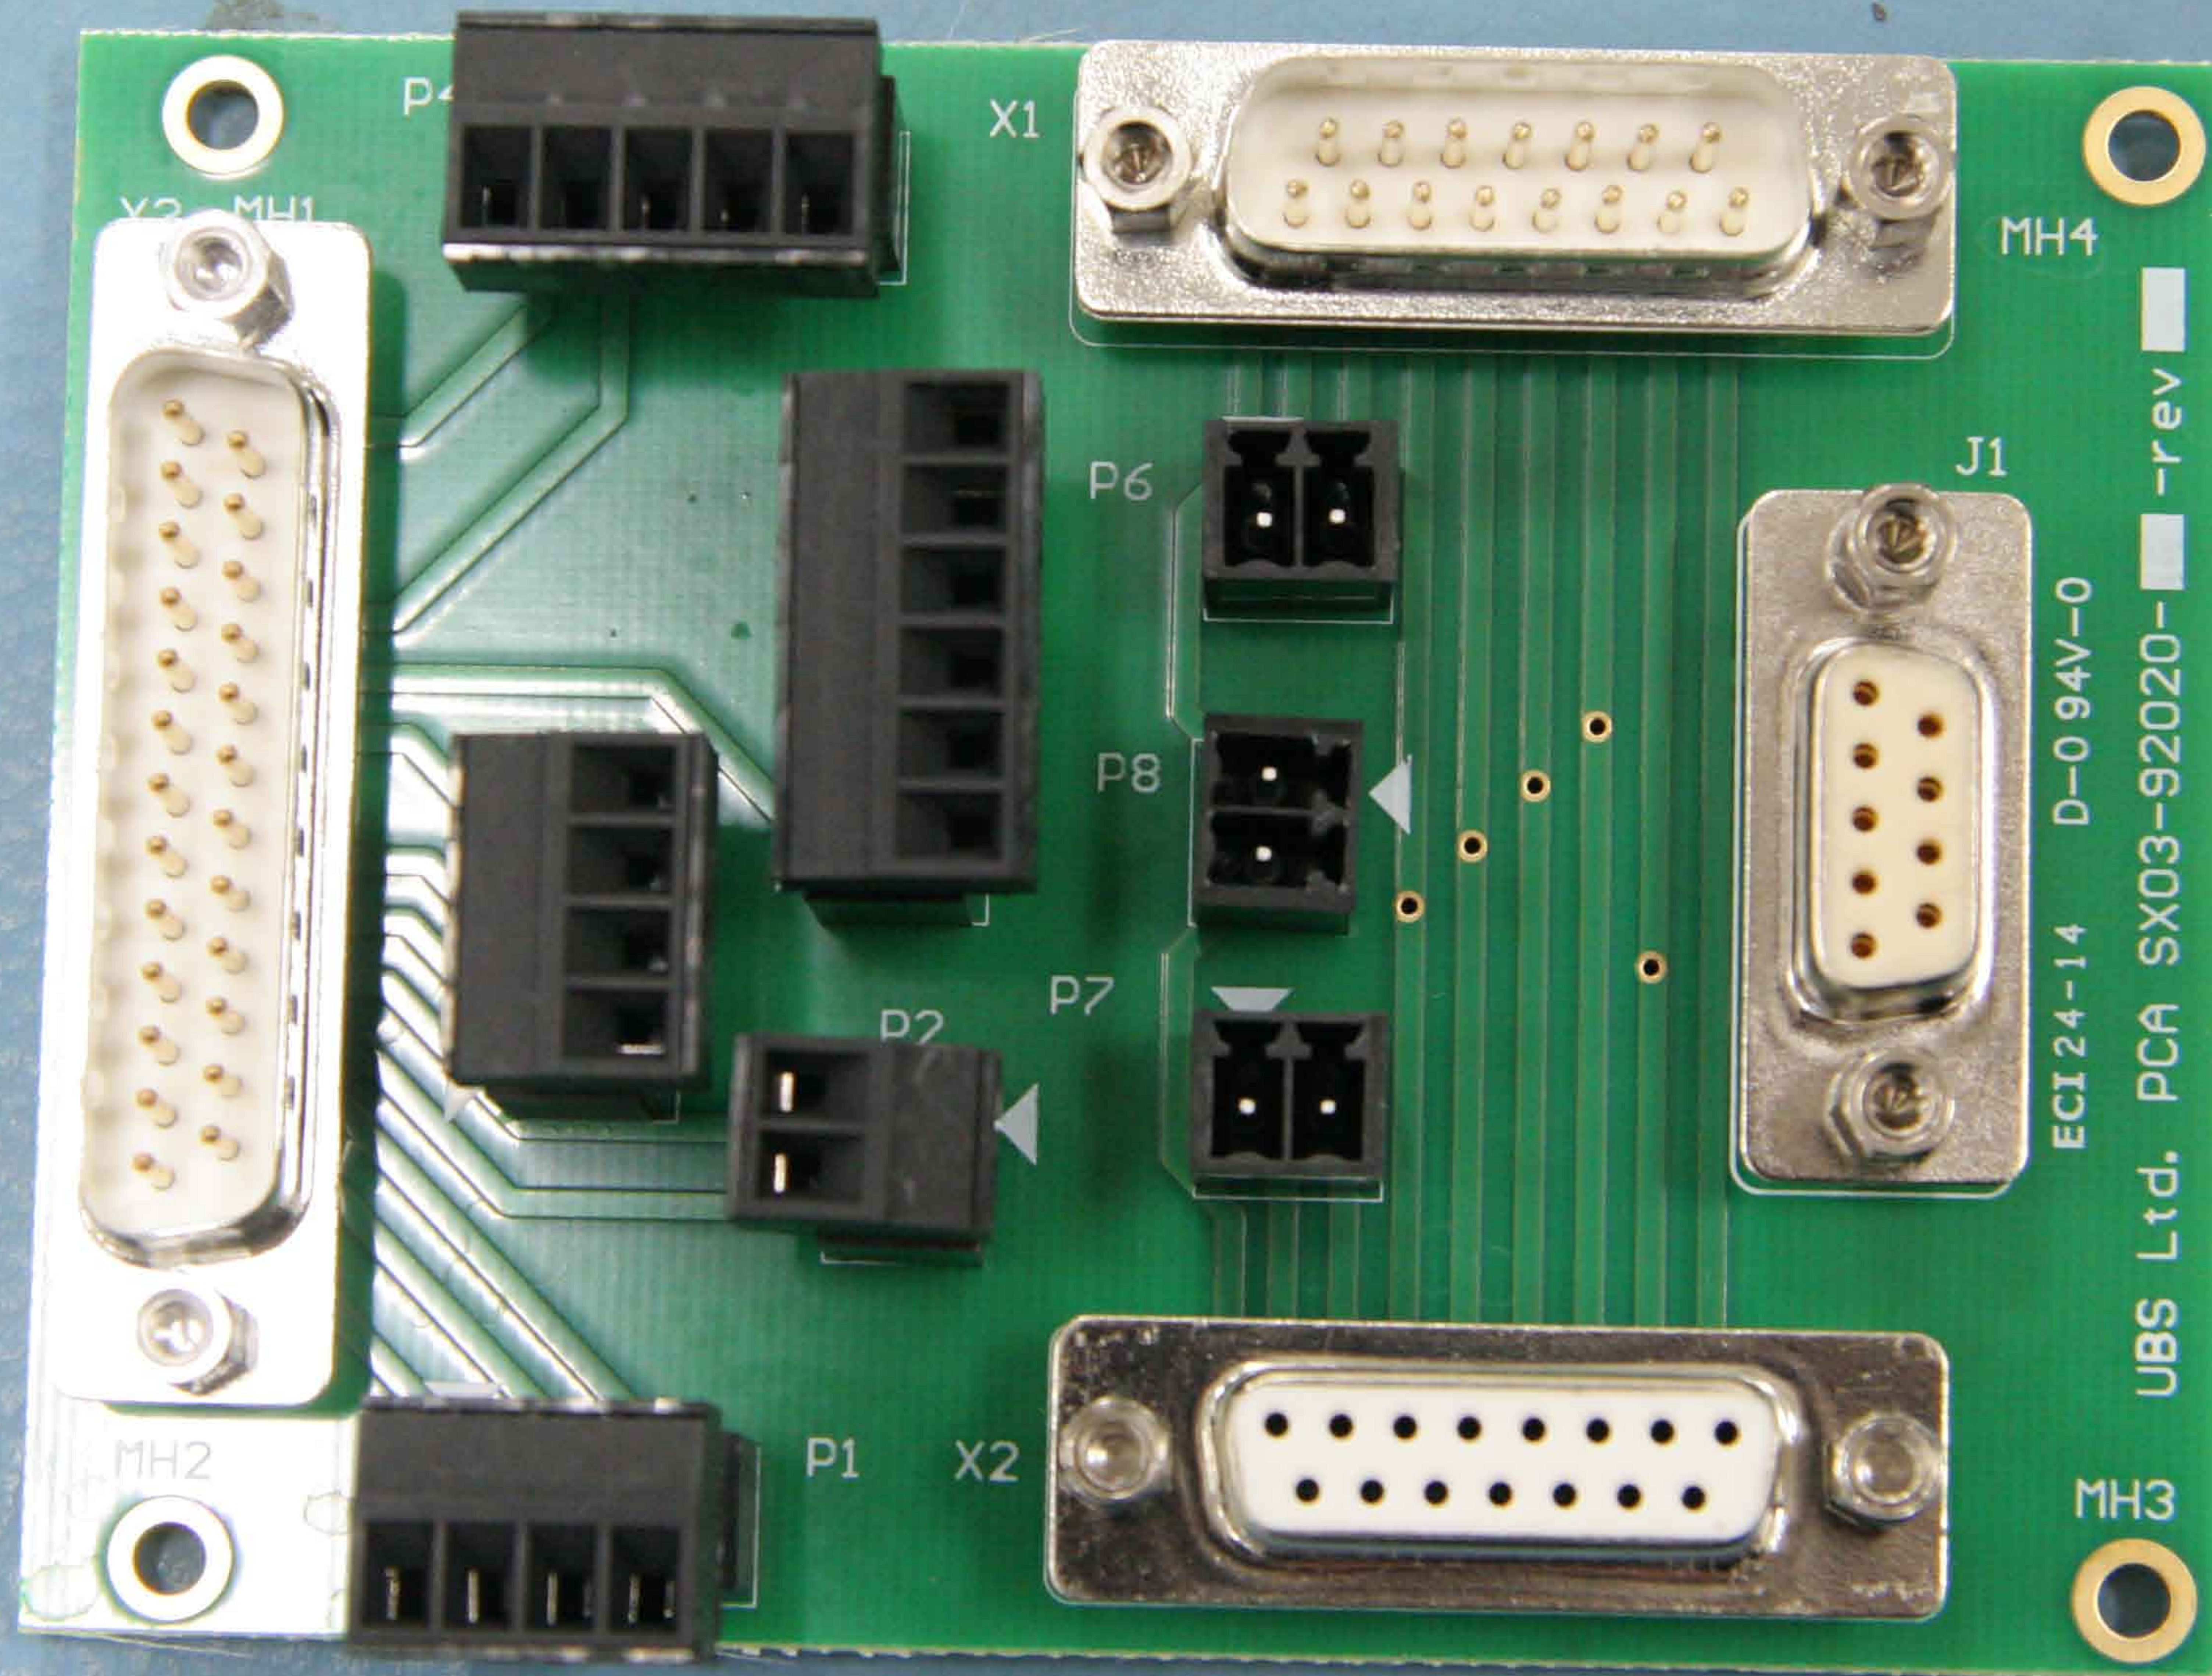

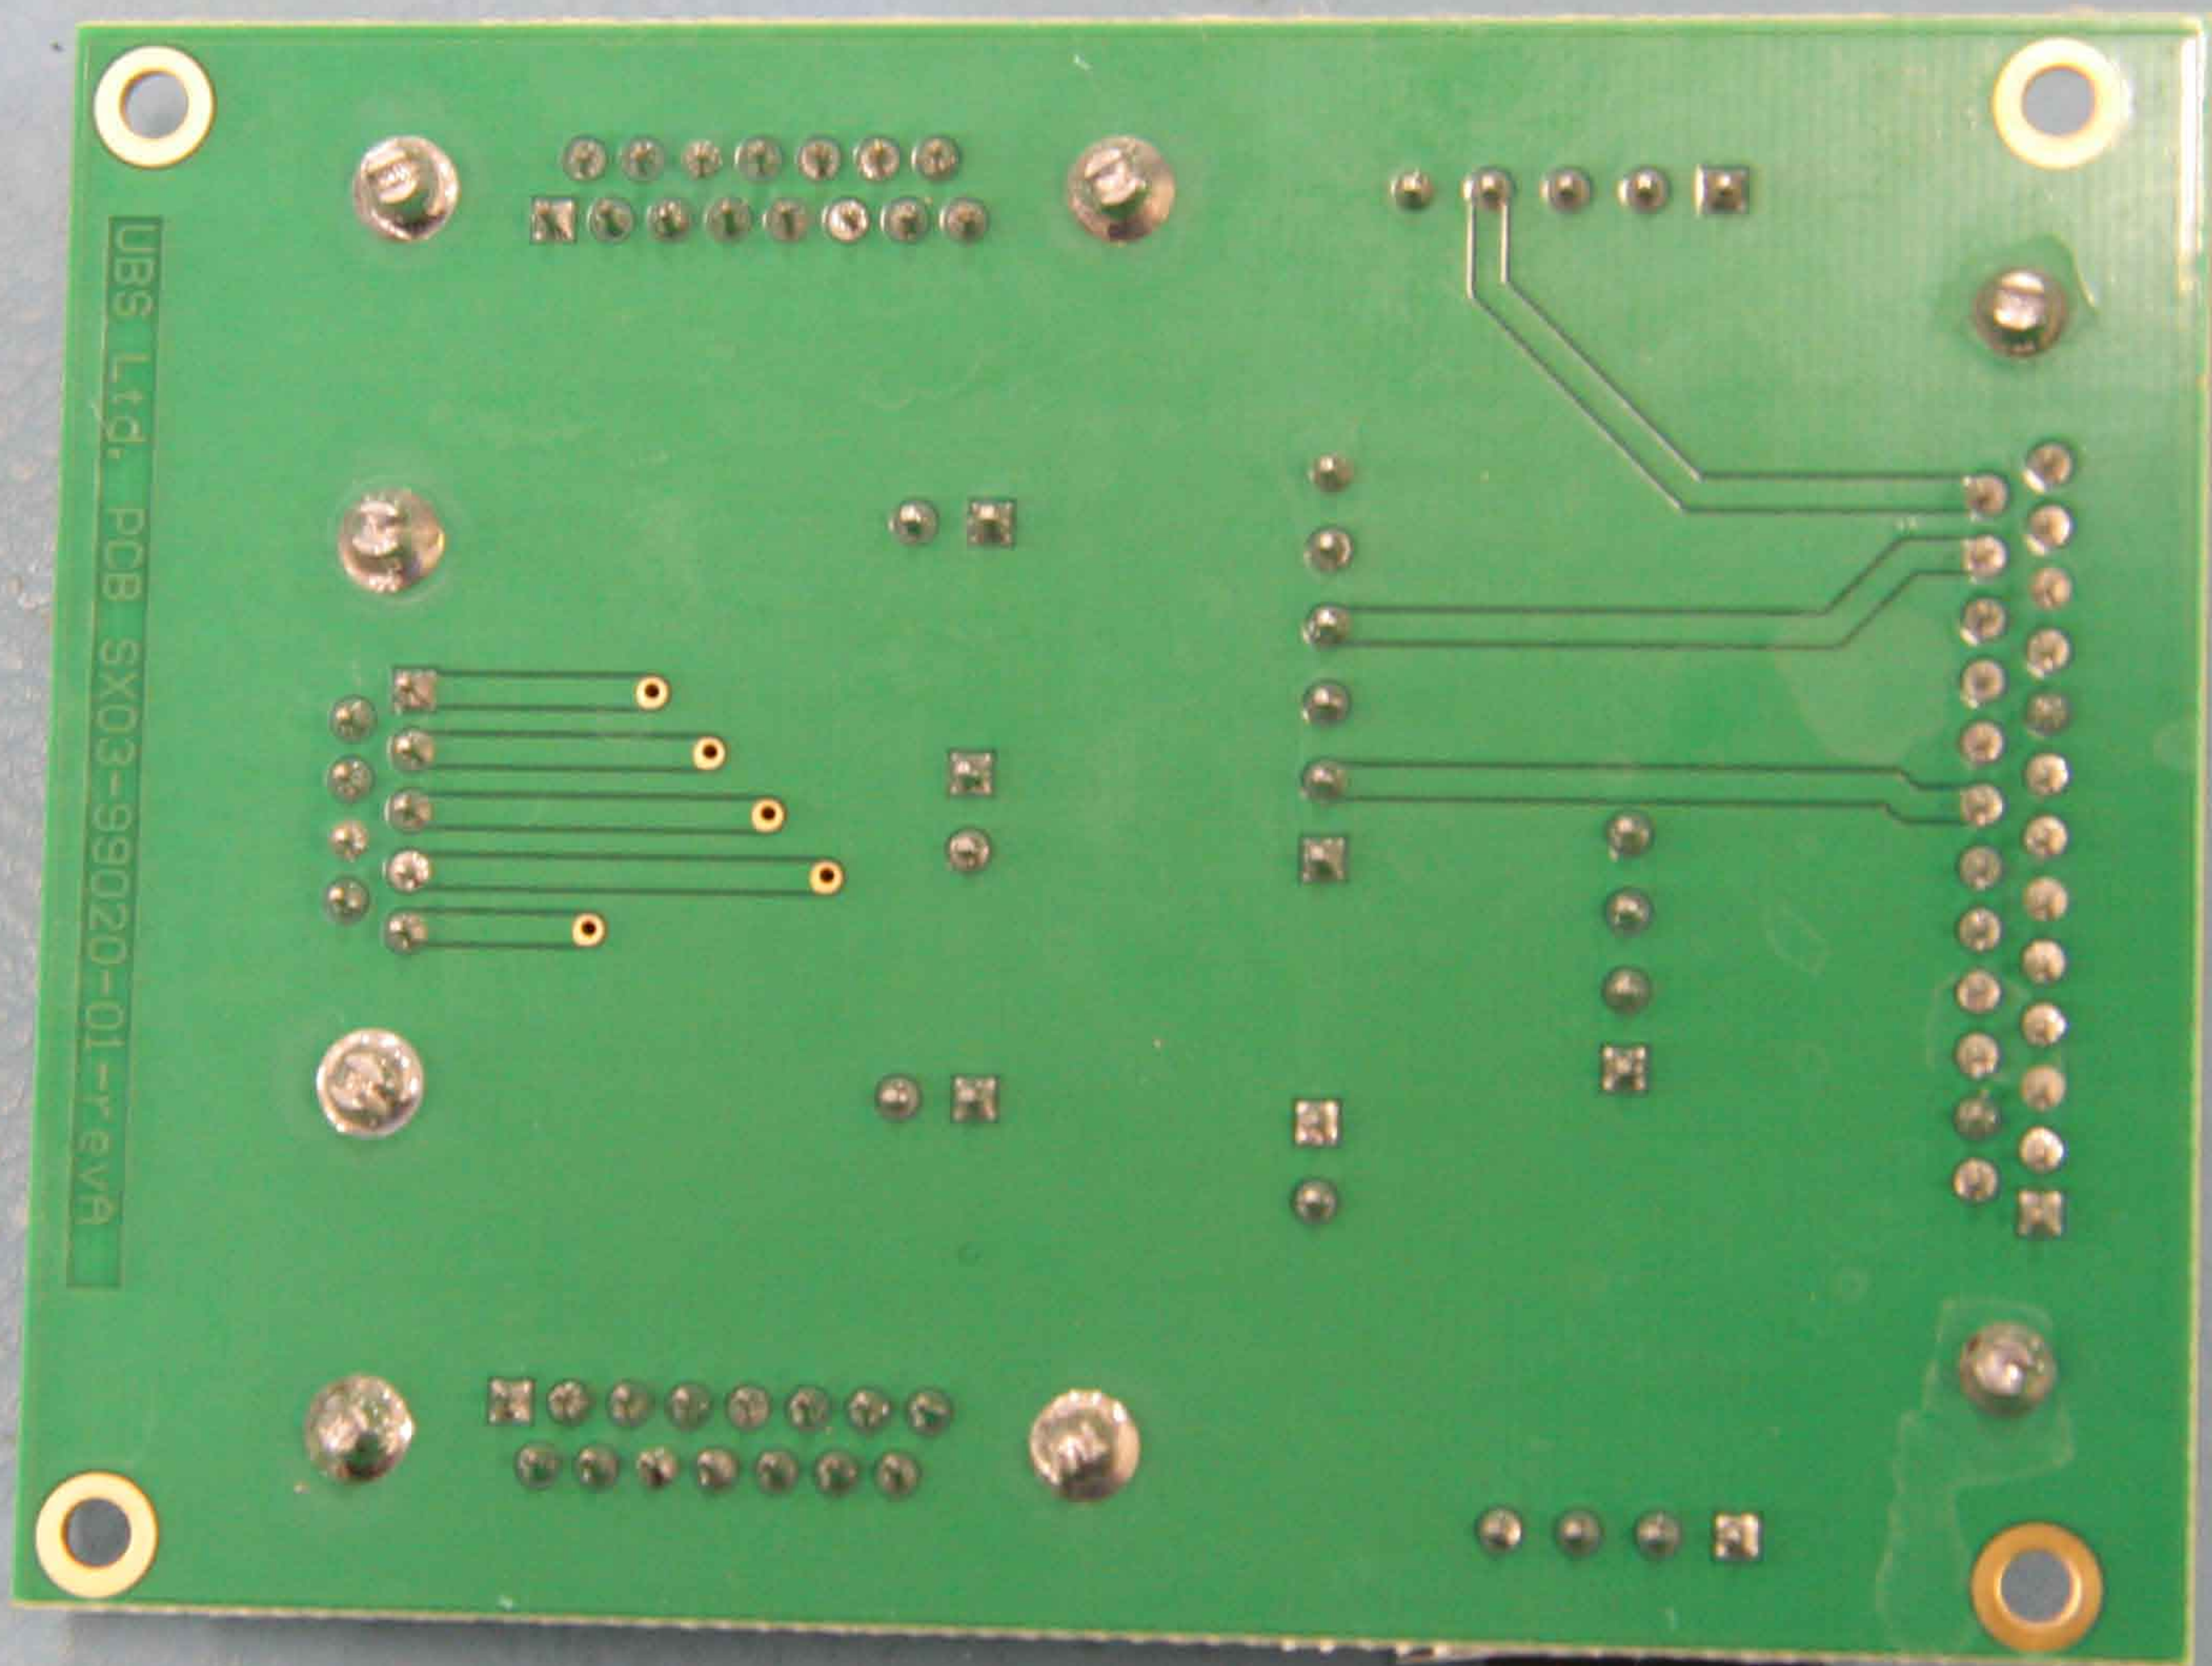

UBS Ltd. PCB SX03-99020-01-r evA

1ng



LISTED
6WA2

ISOLATED LOOP
CIRCUIT PROTECTOR

PolyPhaser

IX SERIES
IX-2T

Oct, 13

FOR INDOOR OR OUTDOOR USE

N1



SiriusXM
SATELLITE RADIO

TRMS 2.0

TERRESTRIAL REPEATER MONITORING SYSTEM 2.0

UNIQUE BROADBAND SYSTEMS, LTD.

ESC

ENTER

SN



HEADPHONE

POWER


HB STATUS

LB STATUS

HB (Y0A)

LB (Y0B)

MADE IN USA

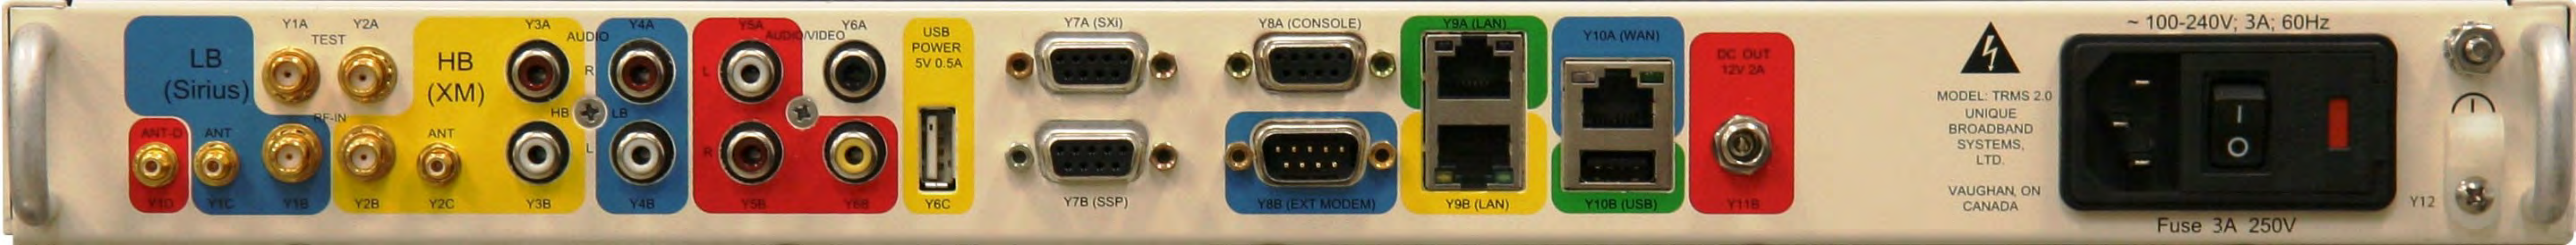

LB
(Sirius)

HB
(XM)

AUDIO

AUDIO/VIDEO

USB
POWER
5V 0.5A

Y7A (SXI)

Y8A (CONSOLE)

Y9A (LAN)

Y10A (WAN)

DC OUT
12V 2A

MODEL: TRMS 2.0
UNIQUE
BROADBAND
SYSTEMS,
LTD.
VAUGHAN, ON
CANADA

~ 100-240V; 3A; 60Hz

Fuse 3A 250V



genesis
PURELEAD

XE30
12V 28Ah
0765-6001
07 JUN 13



RU
MH12544



NONSPILLABLE
Sealed Lead Acid Battery

EnerSys

⚠ DANGER/POISON

DO NOT OPEN BATTERY VENTS WILL WHEN IN AIR EXPOSED SPACE AND WHEN CHARGING	DO NOT INSTALL, MAINTENANCE AND OPERATION INSTRUCTIONS FOR BATTERY PRECAUTIONS REPAIR SHOULD BE PERFORMED ONLY BY A QUALIFIED SERVICE TECHNICIAN
--	---

EnerSys Energy Products Inc.,
Warrensburg, MO 64093-9301

- INSTALLATION**
- Terminal hardware torque: 60 in lbs max (6.8 Nm max)
 - Allow minimum 0.15 inch (3.8mm) air space on each side of battery.
- CHARGING**
- Standby/Float 13.5 - 13.8V at 25°C
 - Cyclic 14.1 - 14.7V at 25°C

WARNING: Risk of fire, explosion or burns. Do not disassemble, heat above 80°C or incinerate.

WARNING: Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. WASH HANDS AFTER HANDLING.

www.enersys.com

Made in USA



0924013170206

XE-30
12V 28Ah
0765-0001
07 JUN 13

NONSPELLABLE
Sealed Lead Acid Battery



INSTALLATION
-Terminal hardware torque: 40 in lbs max (6.8 Nm max)
-Allow minimum 0.15 inch (3.8mm) air space on each side of battery.

CHARGING
Standby/float: 13.5 - 13.9V at 25°C
Cycle: 14.1 - 14.7V at 25°C
disassemble, heat above 80°C or incinerate.
do not

WARNING: Battery posts, terminals, and related accessories contain lead and lead compounds, other chemicals known to the State of California to cause cancer. WASH HANDS AFTER HANDLING.
Made in USA

www.energysys.com

EnergSys Energy Products Inc.
Warrensburg, MO 64093-9301