



FCC Test Report

Report No.: AGC01040220801FE10

FCC ID : 2ACN7HW401

PRODUCT DESIGNATION: Heart Rate Armband

BRAND NAME : N/A

HW401, HW401M, HW401F, HW401MF, HW401S,

MODEL NAME : HW401E, HW4, HW5, HW6, HW7, HW402, HW403,

HW404, HW405, HW406, HW407

APPLICANT: ShenZhen Fitcare Electronics Co., Ltd.

DATE OF ISSUE : Aug. 18, 2022

STANDARD(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 31

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 18, 2022	Valid	Initial Release




TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
2.8 DUTY CYCLE	8
3. TEST ENVIRONMENT	
3.1 ADDRESS OF THE TEST LABORATORY	
3.2 TEST FACILITY	
3.3 ENVIRONMENTAL CONDITIONS	10
3.4 MEASUREMENT UNCERTAINTY	10
3.5 LIST OF EQUIPMENTS USED	11
4.SYSTEM TEST CONFIGURATION	12
4.1 EUT CONFIGURATION	12
4.2 EUT EXERCISE	12
4.3 CONFIGURATION OF TESTED SYSTEM	12
4.4 EQUIPMENT USED IN TESTED SYSTEM	12
4.5 SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	14
6. 20 DB BANDWIDTH	15
6.1 MEASUREMENT PROCEDURE	15
6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	15
6.3 MEASUREMENT RESULTS	16
7. RADIATED EMISSION	17
7.1 LIMITS OF RADIATED EMISSION TEST	17
7.2 MEASUREMENT PROCEDURE	18
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
7.4 MEASUREMENT RESULT	21
8. AC LINE CONDUCTED EMISSION TEST	29
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	29
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	29



Page 4 of 31

ΔΡΙ	PENDIX B. PHOTOGRAPHS OF TEST FUT	31
AP	PENDIX A: PHOTOGRAPHS OF TEST SETUP	. 31
	8.5 MEASUREMENT RESULTS	. 30
	8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 30
	8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 30





1. GENERAL INFORMATION

	-
Applicant	ShenZhen Fitcare Electronics Co., Ltd.
Address 6th Floor(south), Building A, Dingxin Science Park, Honglang North 2nd Ro District, Bao'an, Shenzhen, China	
Manufacturer	ShenZhen Fitcare Electronics Co., Ltd.
Address	6th Floor(south), Building A, Dingxin Science Park, Honglang North 2nd Road, 67 District, Bao'an, Shenzhen, China
Factory	ShenZhen Fitcare Electronics Co., Ltd.
Address 6th Floor(south), Building A, Dingxin Science Park, Honglang North 2nd Roa District, Bao'an, Shenzhen, China	
Product Designation Heart Rate Armband	
Brand Name N/A	
Test Model	HW401
Series Model HW401M, HW401F, HW401MF, HW401S, HW401E, HW4, HW5, HW6, HW402, HW403, HW404, HW405, HW406, HW407	
Declaration Difference All the same except for the model name and appearance color	
Date of test Aug. 05, 2022 to Aug. 15, 2022	
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-JP-BLE/RF

Prepared By	Thea Huang	
	Thea Huang (Project Engineer)	Aug. 18, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 18, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 18, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 6 of 31

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V2.0
Software Version	V1.2
Equipment Specification	ANT+
Frequency Band	2400MHz-2483.5MHz
Operation Frequency	2457MHz
Modulation Type	GFSK
Number of channels	1 Channel
Field Strength of Fundamental	91.78dBuV/m(Average)@3m
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	01	2457MHz



Page 7 of 31

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ACN7HW401** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT


Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.






2.8 DUTY CYCLE

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW=8MHz, VBW=50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Frequency	Duty Cycle	
TX	2457MHz	95.94%	

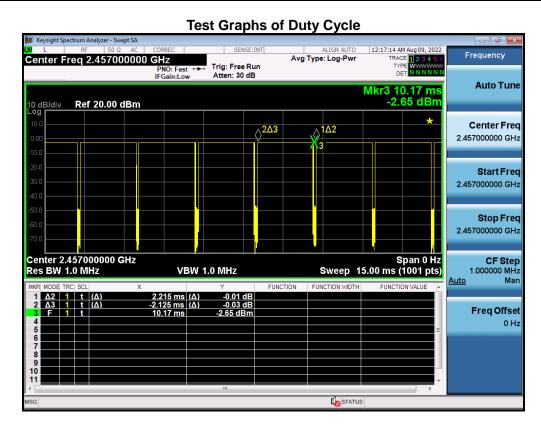



Page 9 of 31

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 31

3.3 ENVIRONMENTAL CONDITIONS

NORMAL CONDITIONS	EXTREME CONDITIONS	
15 - 35	-10 - 45	
20 % - 75 %	20 % - 75 %	
86 - 106	86 - 106	
	15 - 35 20 % - 75 % 86 - 106	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$	
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %	



Page 11 of 31

3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn Antenna	SCHWARZBECK	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-49 4	Jan. 08, 2021	Jan. 07, 2023
Test Software	FARA	EZ-EMC(Ver.RA-0 3A)	N/A	N/A	N/A



Page 12 of 31

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment	Model No.	Identifier	Note
1	Heart Rate Armband	HW401	2ACN7HW401	EUT



Page 13 of 31

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.249(a)	Field Strength of Fundamental	Pass
3	§15.209, §15.249	Radiated Emission& Band Edge	Pass
4	§15.215	20dB Bandwidth	Pass
9	§15.207	AC Power Line Conducted Emission	Not applicable

Note: 1.N/A means not applicable

2. The device under test is battery-powered and does not require evaluation of AC Power Line Conducted Emission.




Page 14 of 31

5. DESCRIPTION OF TEST MODES

Summary table of Test Cases						
Test Item	Data Rate / Modulation					
rest item	ANT+ / GFSK					
Radiated&Conducted Test Cases	Mode 1: ANT+ Tx_2457MHz					
AC Conducted Emission						

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 5. The maximum duty cycle of the product is greater than 98%







6. 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

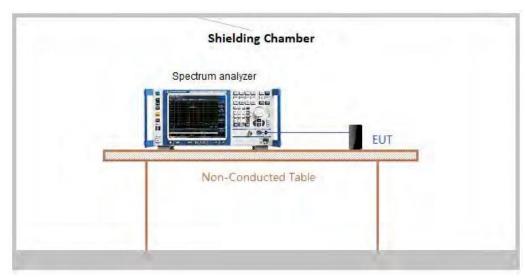





6.3 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode Test Channel 99% Occupied -20dB Limits (MHz) Bandwidth (MHz) Bandwidth (MHz) Pass or Fa							
GFSK 2457 0.932 1.020 N/A P							

Test Graphs of Occupied Bandwidth SENSE:INT ALIGN AUT
Center Freq: 2.457000000 GHz
Trig: Free Run Avg|Hold: 10/10
#Atten: 30 dB 11:28:51 PM Aug 08, 2022 Radio Std: None Center Freq 2.457000000 GHz Frequency #IFGain:Low Radio Device: BTS Ref 30.00 dBm Center Freq 2.457000000 GHz Center 2.457 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms CF Step 300.000 kHz #VBW 100 kHz <u>Auto</u> **Total Power** 4.68 dBm **Occupied Bandwidth** 931.71 kHz Freq Offset **Transmit Freq Error** -34.606 kHz **OBW Power** 99.00 % x dB Bandwidth 1.020 MHz x dB -20.00 dB STATUS



Page 17 of 31

7. RADIATED EMISSION

7.1 LIMITS OF RADIATED EMISSION TEST

15.249 Limit in the below table has to be followed:

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics	
	(millivolts/meter)	(microvolts/meter)	
900-928MHz	50	500	
2400-2483.5MHz	50	500	
5725-5875MHz	50	500	
24.0-24.25GHz	250	2500	

15.209 Limit in the below table has to be followed:

Frequency	Distance	Field	Field Strengths Limit		
(MHz)	Meters	μ V/m	dB(μV)/m		
0.009 ~ 0.490	300	2400/F(kHz)			
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/n	n (Peak) 54.0 dB(μV)/m		
		(Average)	(Average)		

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.



Page 18 of 31

7.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




Page 19 of 31

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Clark Glop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		


Receiver Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		






7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

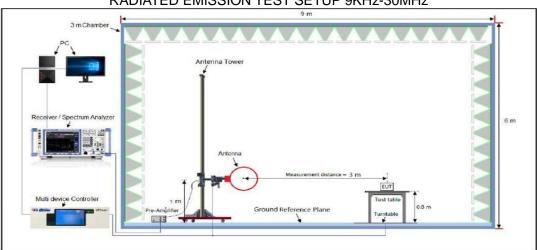

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

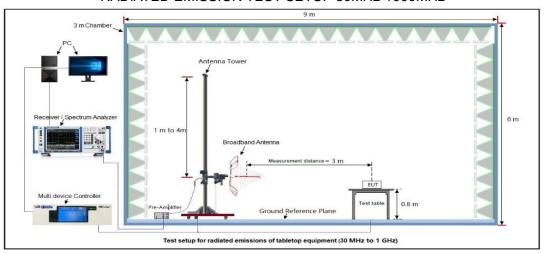

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

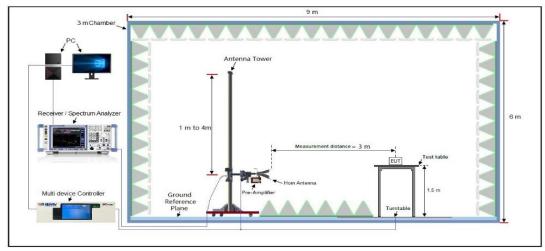



Page 21 of 31

7.4 MEASUREMENT RESULT

FIELD STRENGTH OF FUNDAMENTAL


EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
2457	43.10	49.05	92.33	114.00	-21.67	peak
2457	39.36	49.05	91.78	94.00	-2.22	AVG
Remark:						
Factor - Anton	na Factor + Cah	la Lace Dra-s	molifior			

<u> Factor = Antenna Factor + Cable Loss - Pre-amplifier.</u>

EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
2457	41.96	49.05	92.31	114.00	-21.69	peak	
2457	38.71	49.05	91.61	94.00	-2.39	AVG	
Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION FROM 30MHZ TO 1000MHZ

UT		H	Heart Rate Armband			Mode	l Nam	е	Н	IW40)1				
emperature	•	2	21°C		Relat	Relative Humidity		5	53%						
ressure		9	985hl	Pa				Test \	Voltage	е	N	lorm	al Vo	oltage	е
est Mode		N	Mode	1				Anter	nna		Н	lorizo	ontal	l	
72.0 dB	uV/m											15	nit:		
													argin:		-
														\Box	
															r
														Ш	H
					┵			_							Н
								┯						X	
32			_							4	- 5				M-M
										. X	Ä	ماعتينط	فيعصماله	Karas	w-3V
	1		2	2		المدن	Maria Statistica .	الاحداد	بالمداليدا بطومهم	hannik basen	-pringer	inghistorial in	have	Kara	***
بالمارية	andron Treat	متعارفهم والإساليد	March 1	E Market	And the	أوالم المعاملة المعام	Now Householder Ward works	hindran of which	and had the	hampan	الم الماساس	الماهينية المواد	h.h.m.d	Market	
s, mode,	andrew Production	-allegelogy, black	ar and	and who have	Ambrida.	أوالم المعاملة المعام	Now But block with	المتراه المتراه المتراط المترط المترط المترط المتراط المترط المتراط المتراط المتراط المترط المترط المترط المترط المترط	arran ladia	hamples of the second	, who we will be	Sayte and the	h have	hara -	
يديد المراد	andrew Production	-allegelyes/Jess	men of	Series Mary	Jane de la Caractería	لمتمسله مدارات	Now And the World Works	hayber ya ayadka	profession de la constitución de la	hample gran	- Partie A	Sayte amount of	k.ik.u.rda.ed	Market .	
ي ياد م	andrew the state	-allege _{de} jeben	and the second	See Andread Control of the Control o	vant-êtri	a construction production in the construction	Now But have the ways	na piranga nga nga nga nga nga nga nga nga nga	mark dalah	h.m.	-prince A	S _{ap} te general or	k.i.u.da.d	harin I	
	and and and a	-allege _{ate} is low	al and	Sandardo A	viend-ille	ph. www.pres	North Harden Stranger	hing displayed by the displayed by	profession de la constantina della constantina d	hamirana.	ممسب	e programativ	have	hara	
-8 30.000	1 1 1 1 1 1	50	60		-Vanderika 80	je v netvorit	(MHz)	handran Arthur Aller	300	400	500	600			00.000
-8 	40			70	80	ding	191	Meas	300	400	500	600	700		00.000
-8 30.000		50		70	80 Rea		(MHz)		300 Sure-		500		700		00.000
-8 30.000	40	50 Fi	60	70	80 Rea	ding	(MHz) Correct	Meas	300 sure-	400	500	600	700		
-8 30.000	40	50 Fi	req.	70	Rea Lev	ding	(MHz) Correct Factor	Meas	300 sure- ent	400 Limit	500	600 Ove	700 ! Г	Dete	
-8 30.000	40	50 F	60 req. 1Hz	70	Rea Lev	ding vel	(MHz) Correct Factor	Meas me dBu\	300 sure- ent //m	400 Limit	500	600 Ove	700	Dete	ector
-8 30.000 No.	40 Mk.	50 Fi	req. IHz 347	70	Rea Lev dB 5.	ding vel BuV	Correct Factor dB	Meas me dBu\	300 sure- ent //m 56	400 Limit dBuV/	500	600 Ove dB	700 PF	Dete pe	ector ak
-8 30.000 No.	Mk.	50 Fi M 40.1 66.2	req. 1Hz 347 2662	70	80 Rea Lev dB 5.	ding vel BuV .49	Correct Factor dB 17.07 18.87	Meas me dBu\ 22.5	300 sure- ent //m 56	400 Limit dBuV/ 40.00	500 m	600 Ove dB 17.4	700 14 23 80	Dete pe pe pe	ector ak ak
No.	Mk.	50 Find M 40.1 66.2 134.0	req. 1Hz 347 2662 8882	70	80 Rea Lev dB 5.	ding vel .8uV .49	(MHz) Correct Factor dB 17.07 18.87	Meas me dBu\ 22.5 24.7 25.2	300 Sure- ent //m 56 77 20	40.00 40.00 43.50	500	Ove dB 17.4 15.2	700 14 23 80 22	Dete pe pe pe	ak ak ak

RESULT: PASS





EUT	Heart Rate	Armband	Model Name		HW401	
		21°C		li4v,	53%	
Temperature			Relative Humid	aity		
Pressure	985hPa		Test Voltage		Normal V	oltage
Test Mode	Mode 1		Antenna		Vertical	
32		3	•	6×	Limit: Margin:	man land
Mark Mark	ngtha _n begin the distributed and the second surveyor	ATTACHER STATE OF THE STATE OF	and the second of the second o			
-8 30.000 40	50 60 70 80	(MHz)		00 500	0 600 700	1000.000
-8	50 60 70 80 Re		300 40 Measure-	00 500	0 600 700 Over	1000.000
-8 30.000 40	50 60 70 80 Re Freq. Lo	(MHz)	Measure- ment Li			1000.000 Detector
-8 30.000 40	50 60 70 80 Re Freq. Lo	eading Correct evel Factor	Measure- ment Li	mit uV/m	Over	
-8 30.000 40 No. Mk.	Freq. Lo	eading Correct evel Factor	Measure- ment Li dBuV/m dBi 23.32 40.	mit uV/m	Over	Detector
No. Mk.	Freq. Lo	eading Correct Factor dBuV dB	Measure- ment Li dBuV/m dB 23.32 40. 25.96 40.	mit uV/m .00	Over dB -16.68	Detector peak
No. Mk.	Freq. Lo	eading Correct Factor dBuV dB 0.15 13.17 9.87 16.09	Measure- ment Li dBuV/m dB 23.32 40. 25.96 40. 26.22 43.	mit uV/m .00 .00	Over dB -16.68 -14.04	Detector peak peak
No. Mk.	Treq. Long MHz do 30.1053 10000000000000000000000000000000000	eading Correct Factor dBuV dB 0.15 13.17 9.87 16.09 7.18 19.04	Measure-ment Li dBuV/m dB 23.32 40. 25.96 40. 26.22 43. 28.37 46.	mit uV/m .00 .00 .50	Over dB -16.68 -14.04 -17.28	Detector peak peak peak

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.



Page 24 of 31

RADIATED EMISSION ABOVE 1GHZ

EUT	Heart Rate Armband	Model Name	HW401		
Temperature	21°C	Relative Humidity	53%		
Pressure	985hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 1	Antenna	Horizontal		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4914.000	47.57	0.08	47.65	74	-26.35	peak		
4914.000	37.53	0.08	37.61	54	-16.39	AVG		
7371.000	43.16	2.21	45.37	74	-28.63	peak		
7371.000	34.72	2.21	36.93	54	-17.07	AVG		
Description of the second of t								
temark:		emark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4914.000	48.76	0.08	48.84	74	-25.16	peak	
4914.000	38.15	0.08	38.23	54	-15.77	AVG	
7371.000	45.24	2.21	47.45	74	-26.55	peak	
7371.000	34.92	2.21	37.13	54	-16.87	AVG	
Remark:	Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.				

RESULT: PASS

Note:


The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







TEST RESULT FOR BAND EDGE EMISSION AT RESTRICTED BANDS

EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

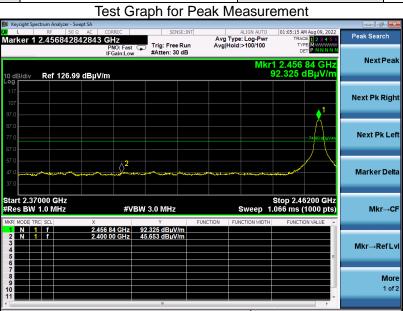

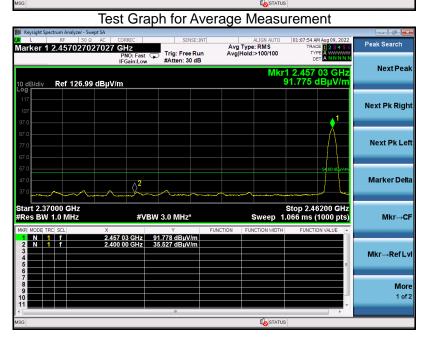



RESULT: PASS







EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical



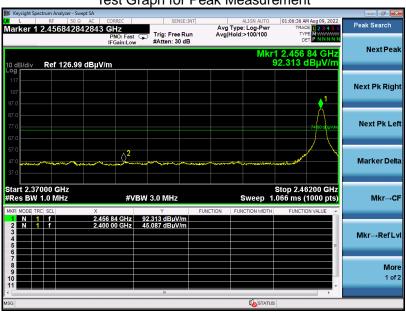


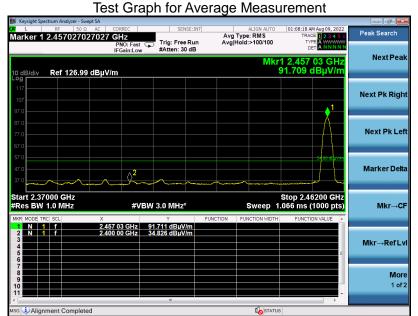







EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

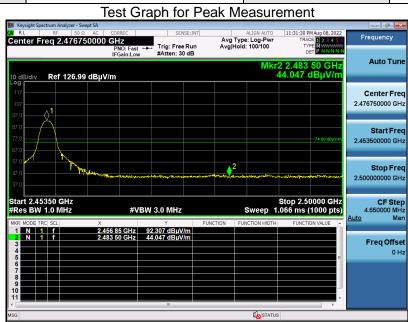


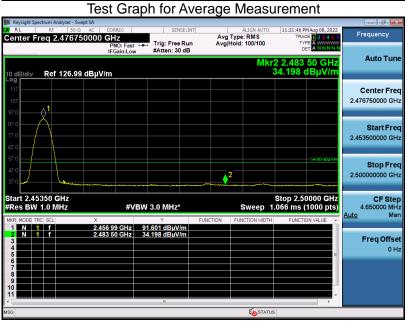






EUT	Heart Rate Armband	Model Name	HW401
Temperature	21°C	Relative Humidity	53%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

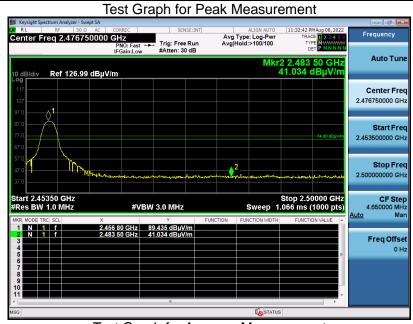

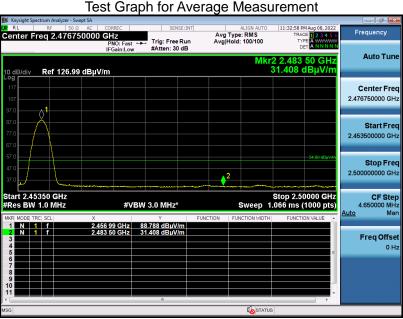

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the



Page 29 of 31

8. AC LINE CONDUCTED EMISSION TEST


8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

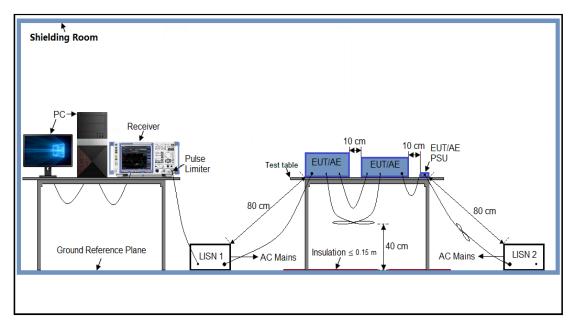



Page 30 of 31

8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

8.5 MEASUREMENT RESULTS

Note: 1.N/A means not applicable

2. The device under test is battery-powered and does not require evaluation of AC Power Line Conducted Emission.



Page 31 of 31

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01040220801AP02

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC01040220801AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.