



Report No.: 140609158GZU-001
Issued: 2014-7-16

TEST REPORT

Applicant Name & Address : NINGBO JINGHUI OPTO-ELECTRONIC CO.,LTD
NO.616 QINGQING ROAD,THE DISTRICT B,ZHENHAI ECONOMIC DEVELOPMENT ZONE,NINGBO CHINA

Sample Description
Product : key finder
FCC ID : 2ACNS-KF01-01
Model No. : KF01-01
Electrical Rating : DC 3V
Frequency : 315 MHz

Date Received : 25 June 2014
Date Test Conducted : 25 June 2014 – 15 July 2014
Test standards : 47 CFR PART 15 Subpart C: 2013 section 15.231

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

*****End of Page*****

Prepared and Checked By:

Approved By:

Sky Zhu
Sky Zhu
Engineer
Intertek Guangzhou

Helen Ma Signature
Helen Ma
Sr. Project Engineer
Intertek Guangzhou
16 July 2014 Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

| | |
|---|----|
| TEST REPORT | 1 |
| CONTENT | 2 |
| 1.0 Summary of Test..... | 3 |
| 2.0 General Description | 4 |
| 2.1 Product Description..... | 4 |
| 2.3 Test Methodology..... | 5 |
| 2.4 Test Facility..... | 5 |
| 3.0 System Test Configuration..... | 6 |
| 3.1 Justification | 6 |
| 3.2 EUT Exercising Software | 6 |
| 3.3 Special Accessories..... | 7 |
| 3.4 Measurement Uncertainty..... | 7 |
| 3.5 Equipment Modification..... | 7 |
| 3.6 Support Equipment List and Description..... | 7 |
| 4.0 Measurement Results | 8 |
| 4.1 Antenna Requirement: | 8 |
| 4.2 Radiated Emissions..... | 9 |
| 4.3 Occupied Bandwidth | 17 |
| 4.4 Dwell Time:..... | 19 |
| 4.5 Conducted Emission Test | 21 |
| 5.0 Test Equipment List..... | 22 |



Report No.: 140609158GZU-001
Issued: 2014-7-16

1.0 Summary of Test

| TEST | TEST REQUIREMENT | TEST METHOD | RESULT |
|---|----------------------------------|--|--------|
| Radiated Emission | FCC PART 15 section 15.231(b) | ANSI C 63.10: Clause 6.4, 6.5 and 6.6 | PASS |
| Occupied Bandwidth | FCC PART 15 section 15.231(c) | ANSI C 63.10: Clause 6.9 | PASS |
| Dwell Time | FCC PART 15 section 15.231(a) | FCC PART 15: Section 15.231(a) | PASS |
| Remark: N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report. | | | |
| | | | |



Report No.: 140609158GZU-001
Issued: 2014-7-16

2.0 General Description

2.1 Product Description

| | |
|---------------------|----------------------------------|
| Operating Frequency | 315 MHz |
| Type of Modulation: | ASK modulated by internal signal |
| Antenna Type | Integral |
| Antenna gain: | 0 dBi |
| Function: | Wireless key finder |
| Power Supply: | DC 3V |
| Power cord: | None |

2.3 Test Methodology

The radiated emission measurements were performed according to the procedures in ANSI C63.10:2009. Radiated emission measurement was performed in semi-anechoic chamber; all radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All of the tests are performed at:
Shenzhen EMTEK Co., Ltd.

Bldg 69, Majialong Industry Zone, Nanshan District, Shen Zhen, Guangdong, 518052 China

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 709623.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

| Frequency range in which device operates | Number of frequencies | Location in frequency range of operation |
|--|-----------------------|---|
| 1 MHz or less | 1 | Middle |
| 1 MHz to 10 MHz | 2 | 1 near top and 1 near bottom |
| More than 10 MHz | 3 | 1 near top, 1 near middle and 1 near bottom |

Frequency range of radiated emission measurements

| Lowest frequency generated in the device | Upper frequency range of measurement |
|--|---|
| 9 kHz to below 10 GHz | 10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower |
| At or above 10 GHz to below 30 GHz | 5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower |
| At or above 30 GHz | 5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified |

Remark: Test frequency is 315 MHz.

3.2 EUT Exercising Software

N/A

3.3 Special Accessories

No special accessories used.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by NINGBO JINGHUI OPTO-ELECTRONIC CO.,LTD Will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

This product was tested as an independent unit.

4.0 Measurement Results

4.1 Antenna Requirement:


Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 0 dBi.

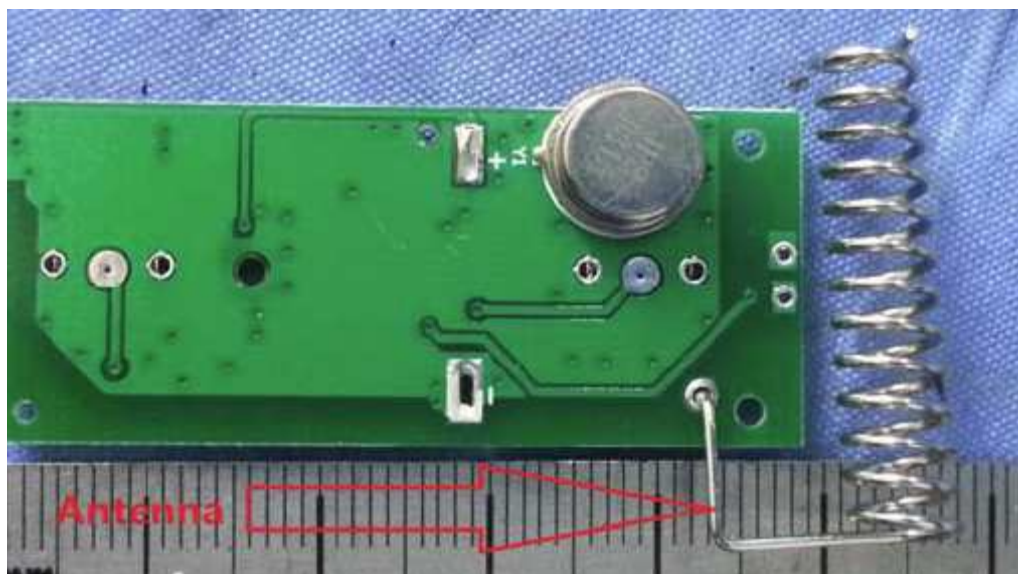

4.2 Radiated Emissions

| | |
|-----------------------|--|
| Test Requirement: | FCC Part 15 C section 15.231(b) |
| Test Method: | ANSI C63.10: Clause 6.4, 6.5 and 6.6 |
| Measurement Distance: | 3 m (Semi-Anechoic Chamber) |
| Test Status: | Test the transmitter in continuous transmitting mode. |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) |
| Limit: | The field strength of emissions from intentional radiators operated under this Section shall not exceed the following: |

| Fundamental Frequency MHz | Field Strength of Fundamental (dB μ V/m @ 3 m) | Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3 m) |
|------------------------------|---|--|
| 40.66 to 40.70 | 67.04 | 47.04 |
| 70 to 130 | 61.94 | 41.94 |
| 130 to 174 | 61.94 to 71.48** | 41.94 to 51.48** |
| 174 to 260 | 71.48 | 51.48 |
| 260 to 470 | 71.48 to 81.94** | 51.48 to 61.94** |
| Above 470 | 81.94 | 61.94 |

** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The fundamental frequency of the EUT is 315MHz

The limit for average field strength dBuV/m for the fundamental emission= 75.6 dB μ V/m


No fundamental is allowed in the restricted bands.

Spurious Emissions do not fall in the restricted bands must be less than 55.6 dBuV/m or limits shown in Section 15.209, whichever limit permits a higher field strength.


Spurious Emissions appear within the restricted bands shall not exceed the limits shown in Section 15.209.

Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

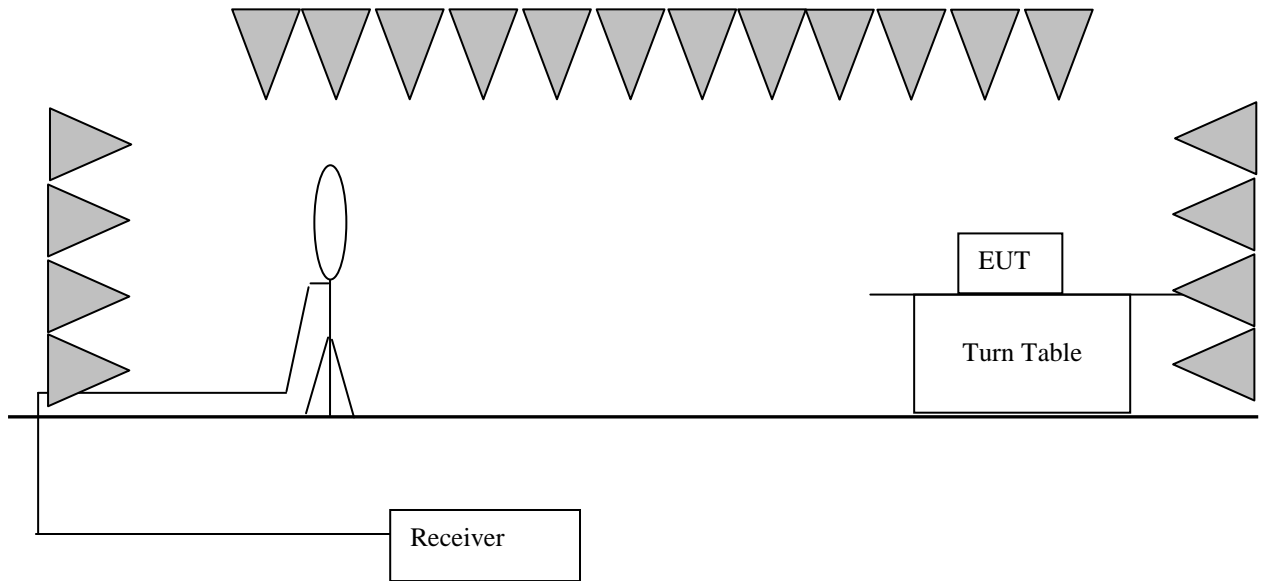

2) 30 MHz to 1 GHz emissions:

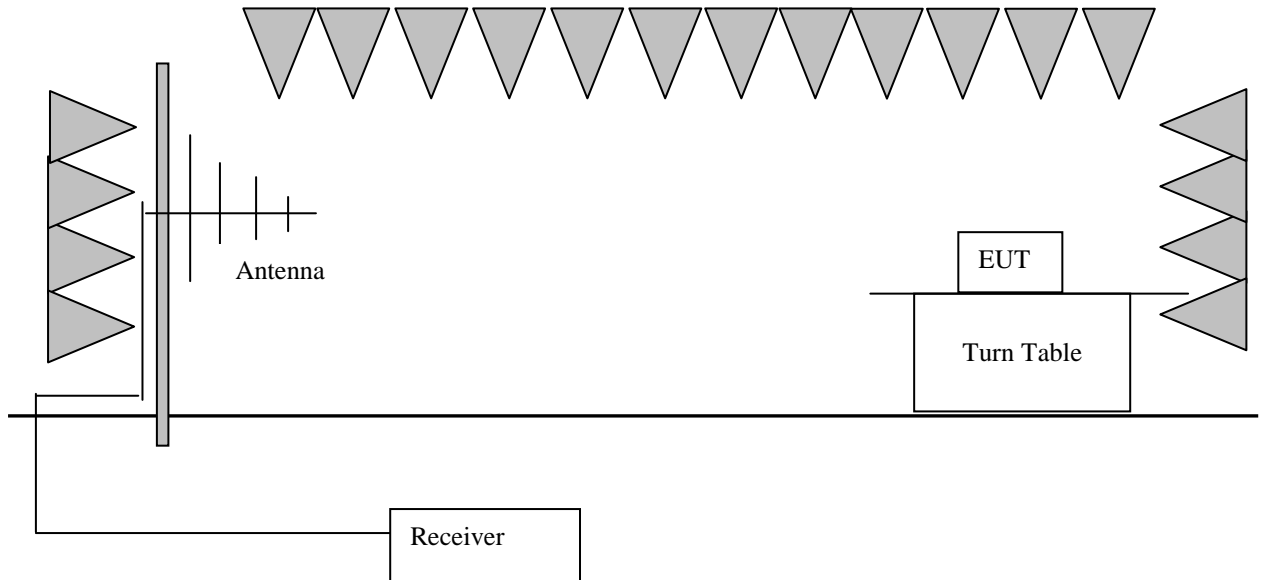

3) 1 GHz to 40 GHz emissions:

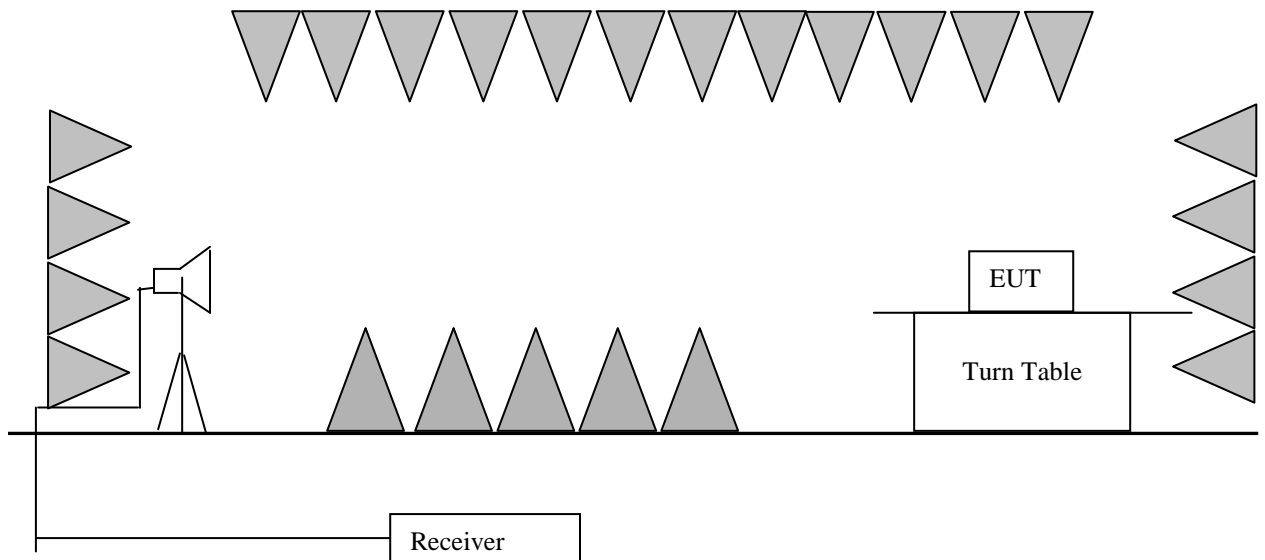

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 40 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Detector: For Peak:
RBW = 1 MHz for $f \geq 1$ GHz,
200 Hz for 9 kHz to 150 kHz
9 kHz for 150 kHz to 30 MHz
120 kHz for 30 MHz to 1GHz
VBW \geq RBW
Sweep = auto
Detector function = peak for $f \geq 1$ GHz, QP for $f < 1$ GHz
Trace = max hold
For AV value:
Average = Peak value + 20log (Duty cycle)

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

The duration of one cycle = 10.6ms



Effective period of the cycle = $(0.63 \times 4 + 0.14 \times 5)$ ms = 3.22 ms



DC = $3.22 / 10.6 = 0.3038$ or 30.38%

Therefore, the averaging factor is found by $20 \lg 0.3038 = -10.3$

Please refer to below plots for more details.

Below test result of key II was worse case

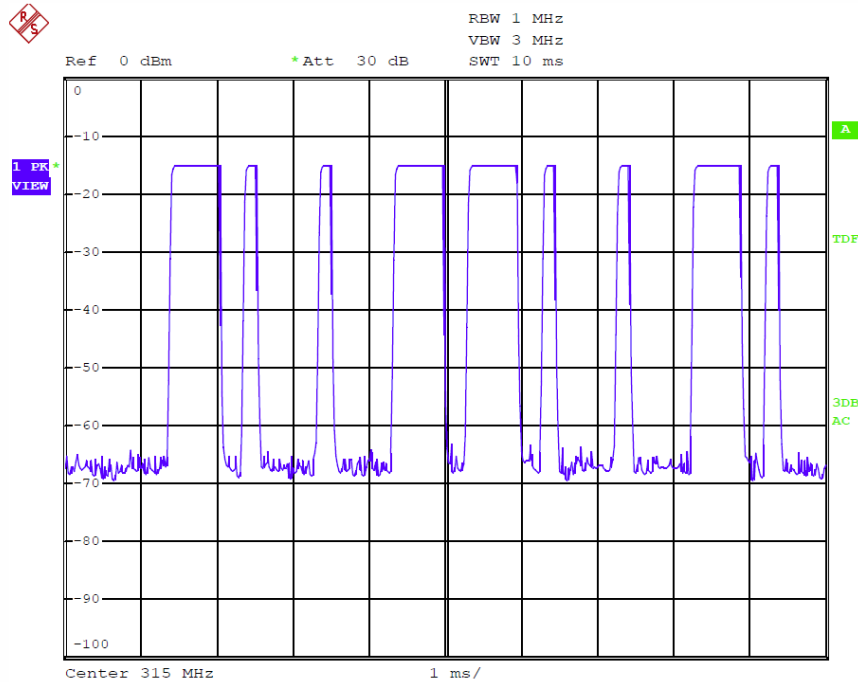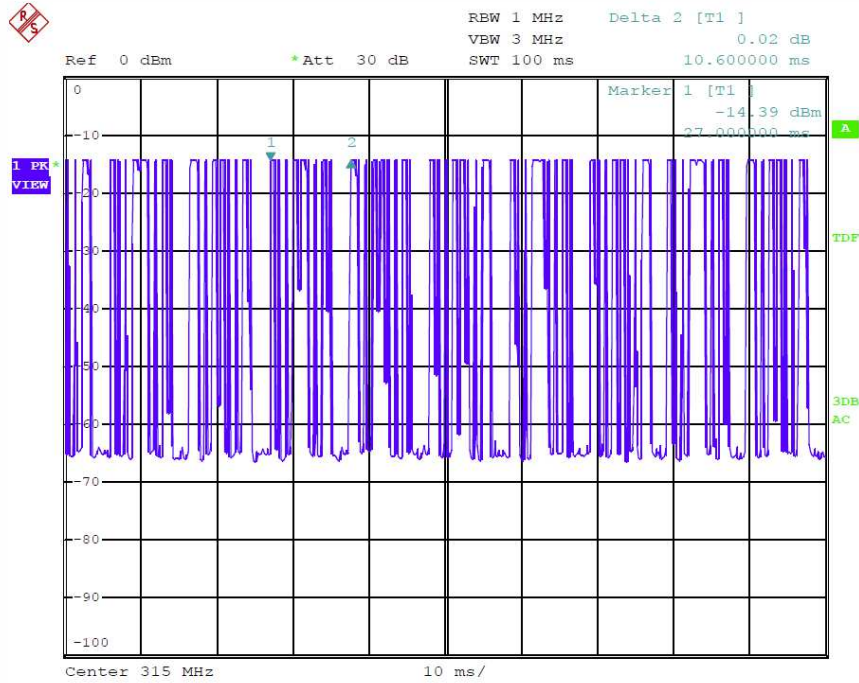

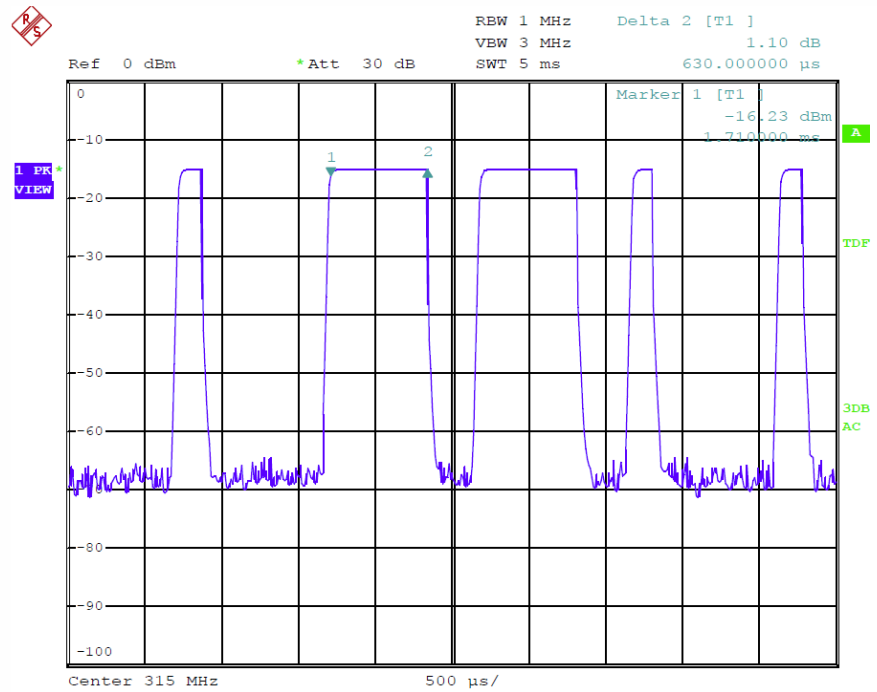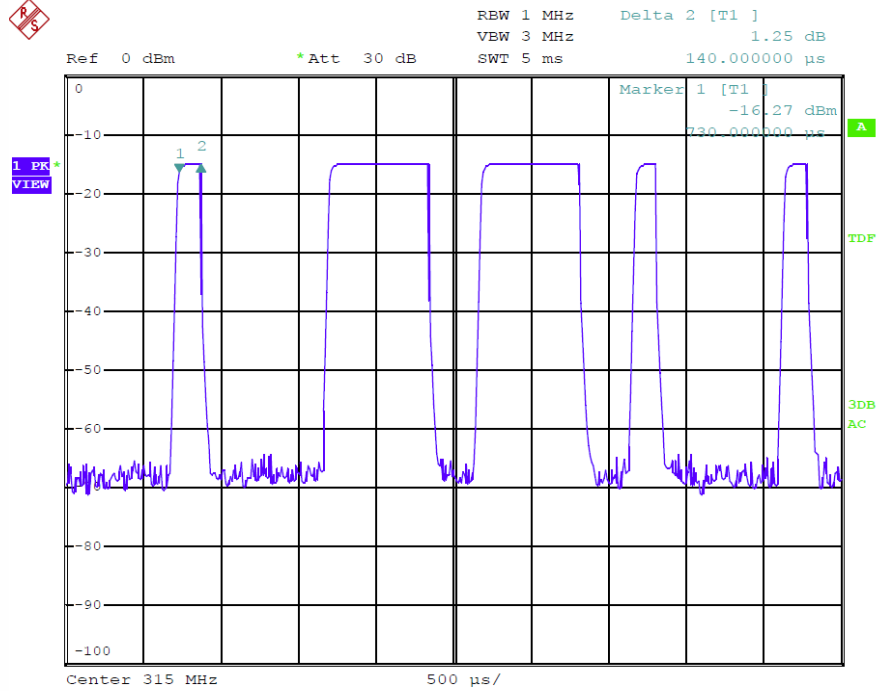

1) Fundamental emission:

Antenna polarization: Horizontal:

| Frequency (MHz) | Reading Level (dB μ V) | Correction Factor (dB) | Level (dB μ V/m) | Limit Line (dB μ V/m) | Margin (dB) | Remark |
|-----------------|----------------------------|------------------------|----------------------|---------------------------|-------------|---------|
| 315.12 | 59.22 | 14.32 | 73.54 | 95.6 | -22.1 | Peak |
| 315.12 | 73.54 | -10.3 | 63.24 | 75.6 | -12.4 | Average |

Antenna polarization: Vertical

| Frequency (MHz) | Reading Level (dB μ V) | Correction Factor (dB) | Level (dB μ V/m) | Limit Line (dB μ V/m) | Margin (dB) | Remark |
|-----------------|----------------------------|------------------------|----------------------|---------------------------|-------------|---------|
| 315.12 | 56.27 | 14.32 | 70.59 | 95.6 | -25.0 | Peak |
| 315.12 | 70.59 | -10.3 | 60.29 | 75.6 | -15.3 | Average |

X: rotate EUT by 90° clockwise.

Y: rotate EUT by 90° vertically.

Z: EUT as Radiated Emission test setup photograph.

2) other emissions:

The receiver was scanned from the lowest frequency generated within the EUT to 3.5 GHz. The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor.

The following test results were performed on the EUT.



Horizontal.

| Frequency (MHz) | Reading Level (dB μ V) | Correction Factor (dB) | Level (dB μ V/m) | Limit Line (dB μ V/m) | Margin (dB) | Remark |
|-----------------|----------------------------|------------------------|----------------------|---------------------------|-------------|---------|
| 630.24 | 26.38 | 22.58 | 48.96 | 75.6 | -26.6 | Peak |
| 630.24 | 48.96 | -10.30 | 38.66 | 55.6 | -16.9 | Average |
| 945.36 | 24.72 | 26.26 | 50.98 | 75.6 | -24.6 | Peak |
| 945.36 | 50.98 | -10.30 | 40.68 | 55.6 | -14.9 | Average |
| 1260.00 | 54.01 | -13.09 | 40.92 | 75.6 | -34.7 | Peak |
| 1260.00 | 40.92 | -10.30 | 30.62 | 55.6 | -25.0 | Average |
| 2207.50 | 60.09 | -8.82 | 51.27 | 74.0 | -22.7 | Peak |
| 2207.50 | 51.27 | -10.30 | 40.97 | 54.0 | -13.0 | Average |
| 2522.50 | 51.87 | -6.09 | 45.78 | 75.6 | -29.8 | Peak |
| 2522.50 | 45.78 | -10.30 | 35.48 | 55.6 | -20.1 | Average |
| 2837.50 | 63.09 | -4.52 | 58.57 | 74.0 | -15.4 | Peak |
| 2837.50 | 58.57 | -10.30 | 48.27 | 54.0 | -5.7 | Average |
| 3467.50 | 49.89 | -3.22 | 46.67 | 75.6 | -28.9 | Peak |
| 3467.50 | 46.67 | -10.3 | 36.37 | 55.6 | -19.2 | Average |

Vertical

| Frequency (MHz) | Reading Level (dB μ V) | Correction Factor (dB) | Level (dB μ V/m) | Limit Line (dB μ V/m) | Margin (dB) | Remark |
|-----------------|----------------------------|------------------------|----------------------|---------------------------|-------------|---------|
| 630.24 | 32.30 | 22.59 | 54.89 | 75.6 | -20.7 | Peak |
| 630.24 | 54.89 | -10.3 | 44.59 | 55.6 | -11.0 | Average |
| 945.36 | 21.47 | 26.25 | 47.72 | 75.6 | -27.9 | Peak |
| 945.36 | 47.72 | -10.3 | 37.42 | 55.6 | -18.2 | Average |
| 1260.00 | 59.74 | -13.09 | 46.65 | 75.6 | -29.0 | Peak |
| 1260.00 | 46.65 | -10.3 | 36.35 | 55.6 | -19.3 | Average |
| 2207.50 | 55.47 | -8.82 | 46.65 | 74.0 | -27.4 | Peak |
| 2207.50 | 46.65 | -10.3 | 36.35 | 54.0 | -17.7 | Average |
| 2522.50 | 53.90 | -6.09 | 47.81 | 75.6 | -27.8 | Peak |
| 2522.50 | 47.81 | -10.3 | 37.51 | 55.6 | -18.1 | Average |
| 2837.50 | 60.16 | -4.52 | 55.64 | 74.0 | -18.4 | Peak |
| 2837.50 | 55.64 | -10.3 | 45.34 | 54.0 | -8.7 | Average |
| 3152.50 | 53.55 | -3.55 | 50.00 | 75.6 | -25.6 | Peak |
| 3152.50 | 50.00 | -10.3 | 39.70 | 55.6 | -15.9 | Average |

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

4.3 Occupied Bandwidth


Test Requirement: FCC Part 15 C section 15.231 (c)
 Test Method: ANSI C63.10: Clause 6.9
 Test Status: Test in transmitting mode at lowest and highest channel.
 Requirements: 15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
 Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. Record the 20 dB bandwidth of the carrier.

Test result:

| Test Channel | bandwidth | Limit |
|--------------|-----------|-----------|
| 315.12 MHz | 484.0 kHz | 787.8 kHz |

Remark:
 The bandwidth limit is $315.12 \times 0.0025 = 787.8$ kHz.

Test plot:

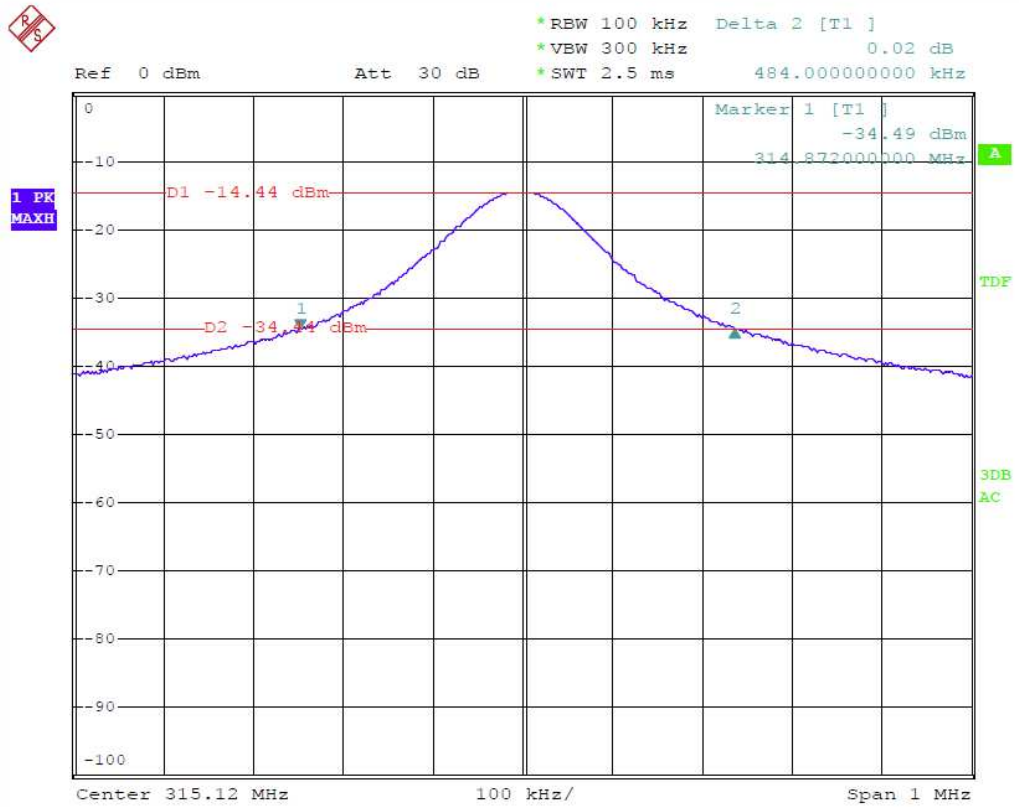

4.4 Dwell Time:

Test Requirement: FCC Part 15 C section 15.231(a)

Test Method: FCC Part 15 C section 15.231(a)

Test Status: Test in transmitting mode.

Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.

The EUT meets the requirements of this section.


2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

| Carrier Frequency | Shutdown Time | Limit |
|-------------------|---------------|-------|
| 315.12MHz | 4.96s | ≤5s |

Result polt as follows:

Channel:

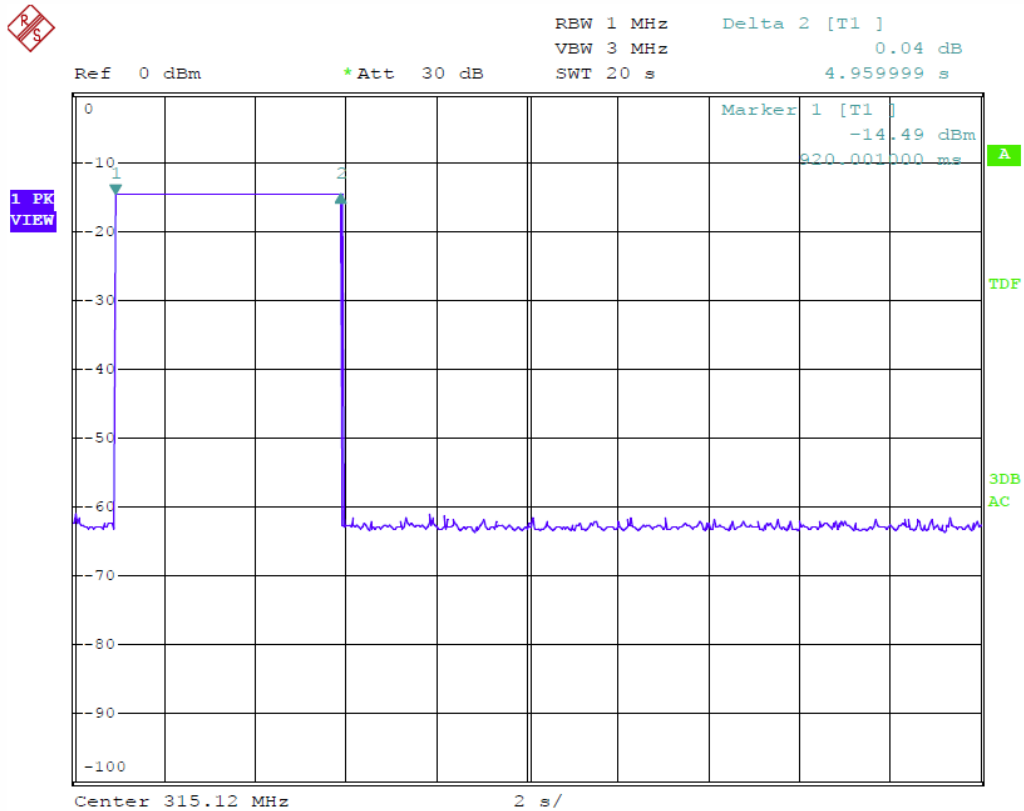

3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT does not have automatic transmission.

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.



Report No.: 140609158GZU-001
Issued: 2014-7-16

4.5 Conducted Emission Test

Result: Not Applicable

Remark: This EUT is power by battery.



Report No.: 140609158GZU-001
Issued: 2014-7-16

5.0 Test Equipment List

Radiated Emission Equipment List

| Equipment No. | Equipment | Model | Manufacturer |
|-----------------------|-----------------------------|----------------|-----------------|
| 101414 | EMI Test Receiver | ESCI | R&S |
| 22013 | Pre-Amplifier | PAP-0203 | CD |
| DS1311159163660 | Bilog Antenna(30M-3GHz) | VULP9163 | Schwarzbeck /DE |
| 531998 | RF CABLE 2M | 214/U 50 OHM | HUBER+SUHNER |
| C37001 | RF CABLE 0.5M | SS540 | HUBER+SUHNER |
| 10051588 | RF CABLE 6.5M | A05-01-01-6.5M | MIcable Inc |
| 414 | RF CABLE 1M | SAC-40G-1 | A.H |
| MY14871/4 | RF CABLE 1.5M | SUCOFLEX104 | HUBER+SUHNER |
| 3# | 3m Semi-anechoic Chamber | 966 | SAEMC |
| 1166.5950K03-101384Bw | EMI Test Receiver | ESCI3 | Rohde & Schwarz |
| 10051588 | RF CABLE 6.5M | A05-01-01-6.5M | MIcable Inc |
| MY14871/4 | RF CABLE 1.5M | SUCOFLEX104 | HUBER+SUHNER |
| 100319-21410500 | Cable | CBL3-NN-10.5m | H+B |
| 100319-21412500 | Cable | CBL3-NN-12.5m | H+B |
| DS1311159120E1178 | Horn Antenna(1G-18GHz) | BBHA9120D | Schwarzbeck /DE |
| J1011131010001 | Pre-Amplifie(1G-18GHz 48dB) | LNA1G18-48 | Lunar EM |
| #2 | 3m Semi-anechoic Chamber | 966 | SAEMC |