

# **FCC TEST REPORT**

## **FCC ID: 2ACO3-16619**

Product : Speaker, Cube, LED

Model Name : #16619

Brand : N/A

Report No. : PTCHX03161101701E-FC01

### **Prepared for**

Lucky Group(H.K.) Limited

Building B, Lucky Industrial Park, Hongjin Road, Hongmei Town, Dongguan, Guangdong, China

### **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community

Dongcheng District, Dongguan, Guangdong, China



**TEST RESULT CERTIFICATION**

Applicant's name : Lucky Group(H.K.) Limited  
Address : Building B, Lucky Industrial Park, Hongjin Road, Hongmei Town,Dongguan,Guangdong,China  
Manufacture's name : Lucky Group(H.K.) Limited  
Address : Building B, Lucky Industrial Park, Hongjin Road, Hongmei Town,Dongguan,Guangdong,China  
Product name : Speaker, Cube, LED  
Model name : #16619  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013, DA 00-705  
Test Date : Nov.17, 2016 ~ Nov.19, 2016  
Date of Issue : Nov.20, 2016  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Authorized Signatory

Chris Du

## Contents

	<b>Page</b>
<b>2 TEST SUMMARY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
<b>3.1 GENERAL DESCRIPTION OF E.U.T.....</b>	<b>6</b>
<b>3.2 CHANNEL LIST .....</b>	<b>7</b>
<b>3.3 TEST MODE .....</b>	<b>7</b>
<b>3.4 TEST SITE .....</b>	<b>8</b>
<b>4 EQUIPMENT DURING TEST .....</b>	<b>9</b>
<b>4.1 EQUIPMENTS LIST .....</b>	<b>9</b>
<b>4.2 DESCRIPTION OF SUPPORT UNITS.....</b>	<b>11</b>
<b>4.3 MEASUREMENT UNCERTAINTY.....</b>	<b>11</b>
<b>5 CONDUCTED EMISSION .....</b>	<b>12</b>
<b>5.1 E.U.T. OPERATION.....</b>	<b>12</b>
<b>5.2 EUT SETUP .....</b>	<b>12</b>
<b>5.3 MEASUREMENT DESCRIPTION.....</b>	<b>错误! 未定义书签。</b>
<b>5.4 CONDUCTED EMISSION TEST RESULT.....</b>	<b>错误! 未定义书签。</b>
<b>6 RADIATED SPURIOUS EMISSIONS .....</b>	<b>15</b>
<b>6.1 EUT OPERATION.....</b>	<b>15</b>
<b>6.2 TEST SETUP .....</b>	<b>16</b>
<b>6.3 SPECTRUM ANALYZER SETUP.....</b>	<b>17</b>
<b>6.4 TEST PROCEDURE.....</b>	<b>18</b>
<b>6.5 SUMMARY OF TEST RESULTS .....</b>	<b>19</b>
<b>7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>29</b>
<b>7.1 TEST PROCEDURE.....</b>	<b>29</b>
<b>7.2 TEST RESULT .....</b>	<b>30</b>
<b>8 20 DB BANDWIDTH MEASUREMENT.....</b>	<b>42</b>
<b>8.1 TEST PROCEDURE.....</b>	<b>42</b>
<b>8.2 TEST RESULT .....</b>	<b>42</b>



**9 MAXIMUM PEAK OUTPUT POWER..... 48**

**9.1 TEST PROCEDURE..... 48**

**9.2 TEST RESULT ..... 48**

**10 HOPPING CHANNEL SEPARATION..... 54**

**10.1 TEST PROCEDURE..... 54**

**10.2 TEST RESULT ..... 54**

**11 NUMBER OF HOPPING FREQUENCY ..... 60**

**11.1 TEST PROCEDURE..... 60**

**11.2 TEST RESULT ..... 60**

**12 DWELL TIME..... 62**

**12.1 TEST PROCEDURE..... 62**

**12.2 TEST RESULT ..... 62**

**13 ANTENNA REQUIREMENT..... 69**

**14 TEST SETUP ..... 70**



## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	N/A
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name : Speaker, Cube, LED

Model Name : #16619

Model Description : --

Bluetooth Version : V2.1+EDR

Operating frequency : 2402-2480MHz,79channels

Antenna installation: : PCB Printed Antenna

Antenna Gain: : 2.3dBi

The lowest oscillator: : 26MHz

Type of Modulation : GFSK, Pi/4DQPSK, 8DPSK

Power supply : DC 5V



### 3.2 Channel List

BT							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

### 3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.  
 During the test, the engineering test program was provide and enabled to make EUT transmit at Low channel/Middle channel/High channel.  
 During test use new and full voltage battery.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz
Hopping	2402-2480MHz		
Tests Carried Out Under FCC part 15.207			
Test Item	Test Mode		
Conduction Emission, 0.15MHz to 30MHz	BT Communication		



**PRECISE TESTING**

Report No.: PTCHX03161101701E-FC01

### **3.4 Test Site**

Dongguan Precise Testing Service Co., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan,

Guangdong, China, Dongguan, 523129

China

FCC Registration Number: 371540





## 4 Equipment During Test

### 4.1 Equipments List

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Agilent	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
4	Humidity Chamber	GF	GTH-225-40-1P	IAA061225	July 15, 2016	July 14, 2017	1 year
5	Temporary Antenna Connector	Murrata	MXHS83Q E3000	201938	July 15, 2016	July 14, 2017	1 year
6	USB RF power sensor	DARE	RPR3006W	15I00041SN 001	July 15, 2016	July 14, 2017	1 year
7	Attenuator	Huber&Suhner	6810.18.B	757941	July 15, 2016	July 14, 2017	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year



4	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	July 15, 2016	July 14, 2017	1 year
5	Horn Antenna	Schwarzbeck	BBHA 9170	9170-0741	July 15, 2016	July 14, 2017	1 year
6	Loop Antenna	SCHWARZBECK	FMZB1516	9130D-1243	July 15, 2016	July 14, 2017	1 year
7	3m Anechoic Chamber	CHENGYU	966	PTC-002	June 6, 2016	June 5, 2017	1 year
8	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2016	July 14, 2017	1 year
9	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2016	July 14, 2017	1 year
10	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year

Conducted Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year



### 4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.0m)	Cold come	JYD-20	C-2201

### 4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

## 5 Conducted Emission


Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
Test Method:	:	ANSI C63.10:2013
Test Result:	:	N/A
Frequency Range:	:	150kHz to 30MHz
Class/Severity:	:	Class B
Limit:	:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz
	:	56 dB $\mu$ V between 0.5MHz & 5MHz
	:	60 dB $\mu$ V between 5MHz & 30MHz
Detector:	:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 5.1 E.U.T. Operation

Operating Environment :

Temperature:	:	25.5 °C
Humidity:	:	51 % RH
Atmospheric Pressure:	:	101.2kPa
EUT Operation :	:	Refer to section 3.3

### 5.2 EUT Setup

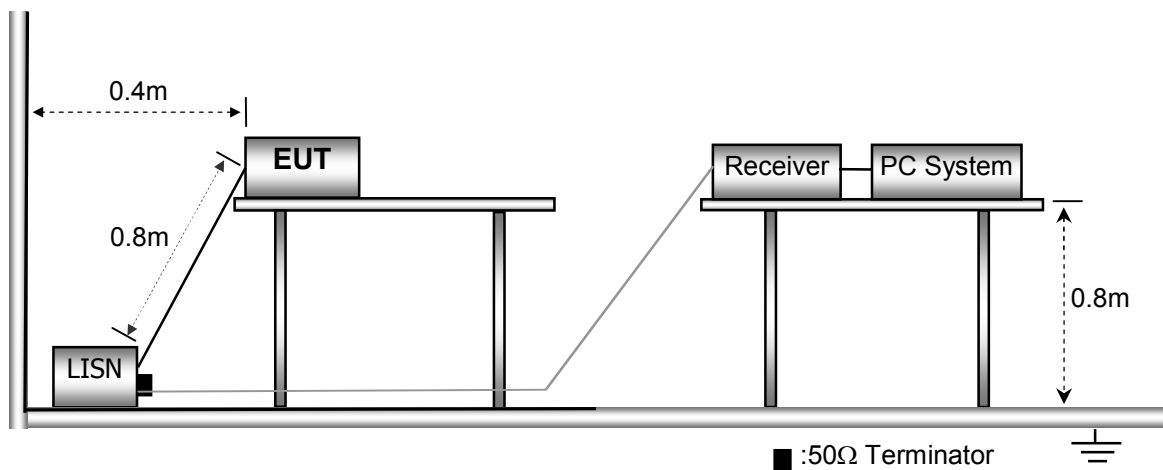



### 5.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Remark: emission level= AMN factor+ Cable Loss +Receiver reading

### 5.4 Conducted Emission Test Result

Only show worst data(GFSK/Low CH)


Live line:

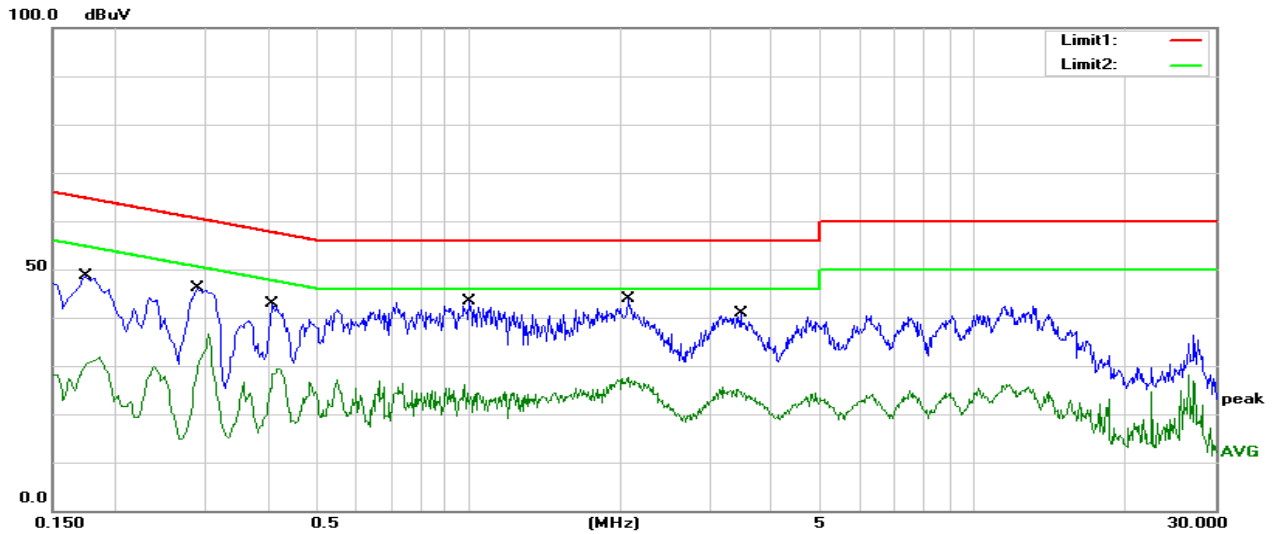

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1740	38.74	10.00	48.74	64.77	-16.03	QP
0.1740	21.86	10.00	31.86	54.77	-22.91	AVG
0.2900	36.30	9.91	46.21	60.52	-14.31	QP
0.2900	26.64	9.91	36.55	50.52	-13.97	AVG
0.4100	32.61	10.17	42.78	57.65	-14.87	QP
0.4100	19.22	10.17	29.39	47.65	-18.26	AVG
1.0020	33.50	9.90	43.40	56.00	-12.60	QP
1.0020	16.26	9.90	26.16	46.00	-19.84	AVG
2.0660	33.91	10.00	43.91	56.00	-12.09	QP
2.0660	17.63	10.00	27.63	46.00	-18.37	AVG
3.4580	30.80	10.17	40.97	56.00	-15.03	QP
3.4580	15.34	10.17	25.51	46.00	-20.49	AVG

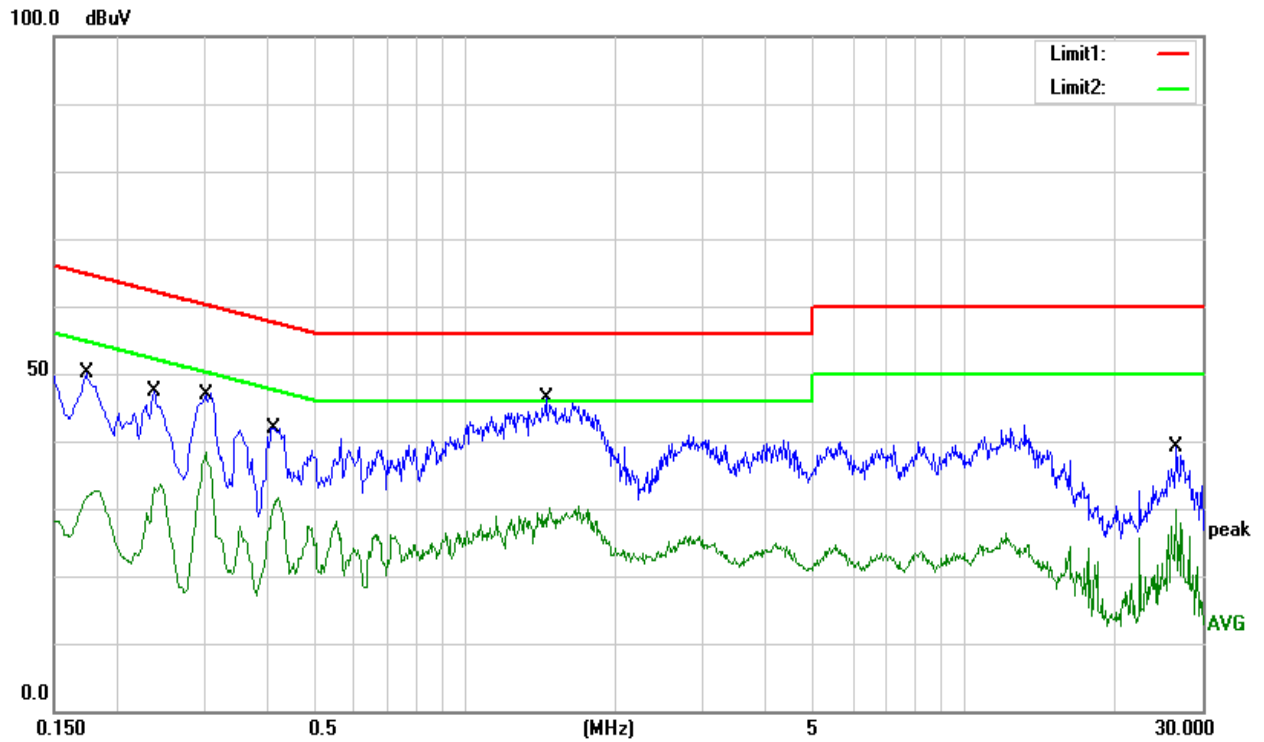

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1740	40.06	10.00	50.06	64.77	-14.71	QP
0.1740	22.74	10.00	32.74	54.77	-22.03	AVG
0.2380	37.53	9.96	47.49	62.17	-14.68	QP
0.2380	23.78	9.96	33.74	52.17	-18.43	AVG
0.3020	28.52	9.90	38.42	50.19	-11.77	AVG
0.3020	37.14	9.90	47.04	60.19	-13.15	QP
0.4140	31.99	9.99	41.98	57.57	-15.59	QP
0.4140	21.51	9.99	31.50	47.57	-16.07	AVG
1.4540	36.29	10.00	46.29	56.00	-9.71	QP
1.4540	20.39	10.00	30.39	46.00	-15.61	AVG
26.4860	19.21	10.72	29.93	50.00	-20.07	AVG
26.4860	28.51	10.72	39.23	60.00	-20.77	QP



### 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013,DA 00-705  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

#### 6.1 EUT Operation

Operating Environment :  
 Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30 MHz to 1 GHz.

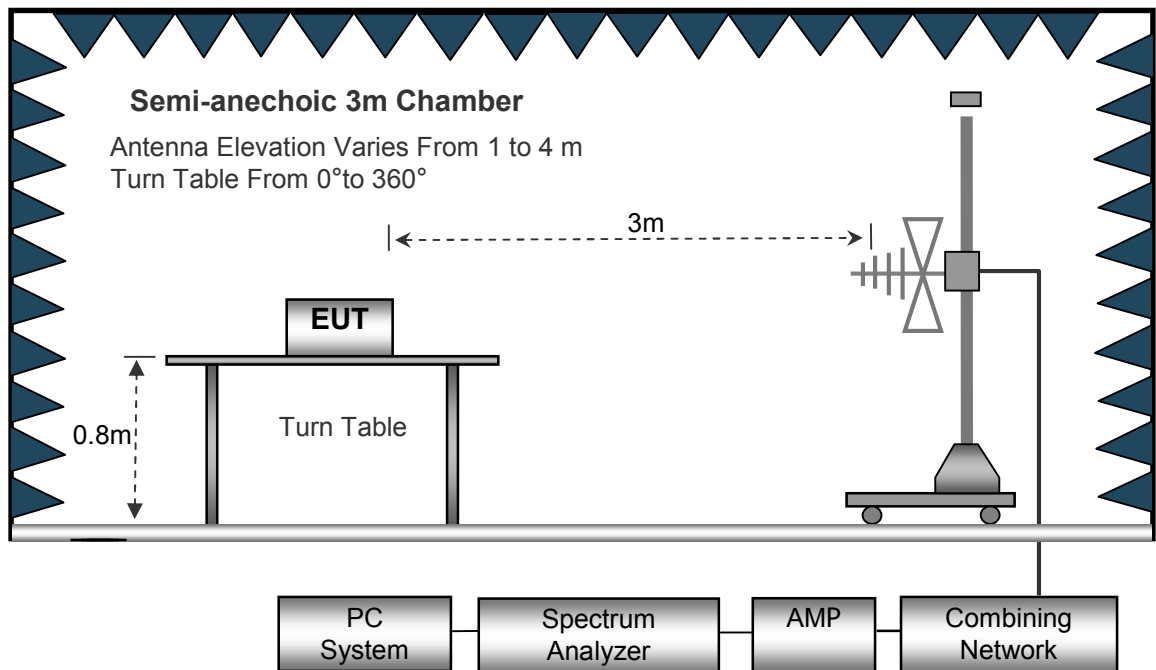





The test setup for emission measurement above 1 GHz.



### 6.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed ..... Auto
- IF Bandwidth ..... 10kHz
- Video Bandwidth ..... 10kHz
- Resolution Bandwidth ..... 10kHz

30MHz ~ 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth ..... 100kHz
- Video Bandwidth ..... 300kHz

Above 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth ..... 1MHz
- Video Bandwidth ..... 3MHz
- Detector ..... PK for AV value.
- Resolution Bandwidth ..... 1MHz
- Video Bandwidth ..... 10Hz



## 6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. In the frequency above 1GHz, Place the measurement antenna 3m away from the EUT for each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



### 6.5 Summary of Test Results

Only show worst data(GFSK/Low CH)


Emission level = Receiver reading + ANT factor + cable loss – Preamp factor

#### Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

#### Test Frequency: 30MHz ~ 1GHz

Antenna Polarization: Horizontal

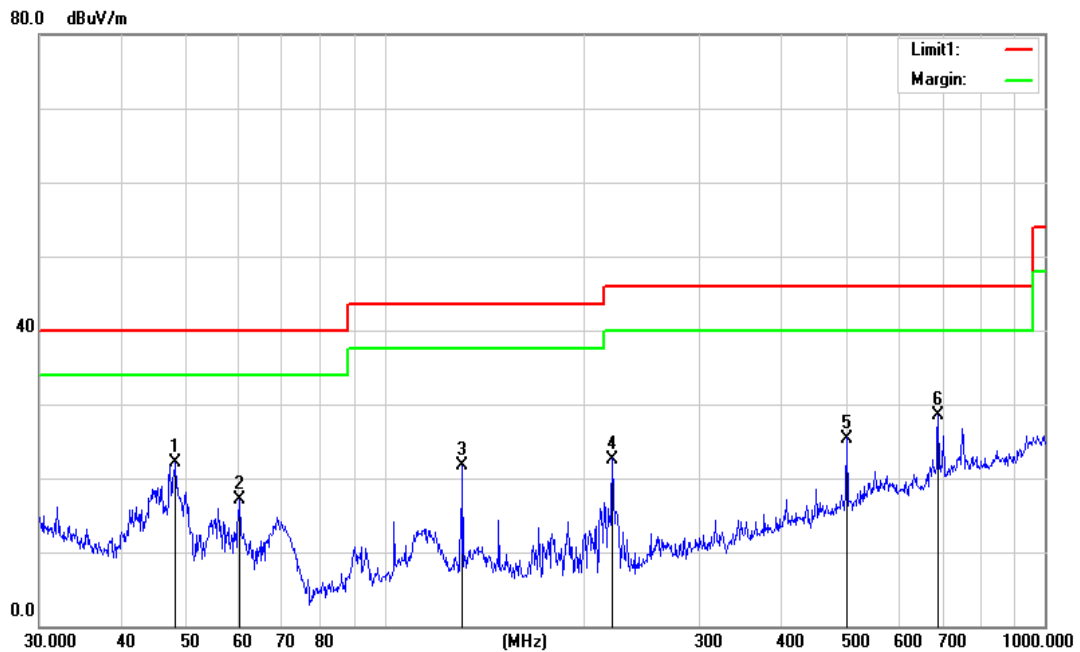


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	48.1626	22.05	-20.53	40.00	-17.95	QP	65.00	100	Horizontal	PASS
2	60.2801	17.09	-24.33	40.00	-22.91	QP	357.30	100	Horizontal	PASS
3	131.2965	21.76	-17.55	43.50	-21.74	QP	255.10	100	Horizontal	PASS
4	221.3921	22.60	-19.03	46.00	-23.40	QP	103.80	100	Horizontal	PASS
5	501.1790	25.40	-8.90	46.00	-20.60	QP	281.80	100	Horizontal	PASS
6	689.5644	28.43	-5.57	46.00	-17.57	QP	114.60	100	Horizontal	PASS

Antenna Polarization: Vertical

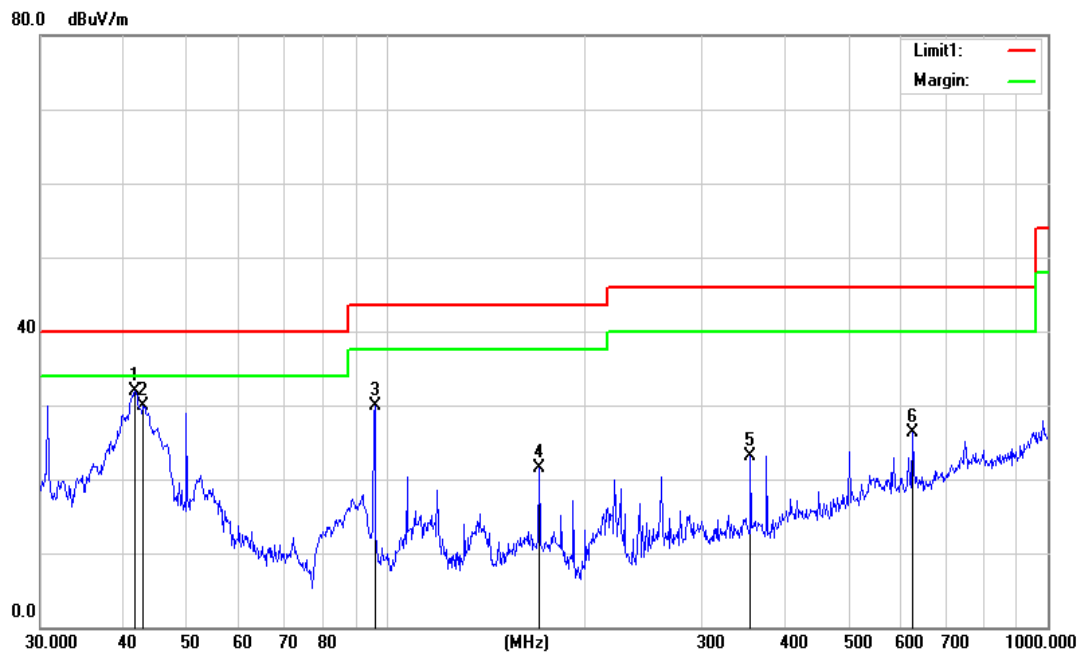

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	41.7130	31.91	-17.21	40.00	-8.09	QP	116.00	100	Vertical	PASS
2	42.8998	29.89	-17.83	40.00	-10.11	QP	38.80	100	Vertical	PASS
3	96.0986	29.83	-19.58	43.50	-13.67	QP	356.30	100	Vertical	PASS
4	170.1948	21.47	-19.33	43.50	-22.03	QP	359.40	100	Vertical	PASS
5	355.4273	23.07	-13.34	46.00	-22.93	QP	352.20	100	Vertical	PASS
6	625.0780	26.39	-6.43	46.00	-19.61	QP	46.20	100	Vertical	PASS



Test Frequency: 1GHz ~ 18GHz

### 8DPSK Low Channel

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
3265.26	50.08	44.70	6.70	28.20	-9.80	40.28	74.00	-33.72	PK	Vertical
3265.26	40.10	44.70	6.70	28.20	-9.80	30.3	54.00	-23.70	AV	Vertical
3265.23	50.12	44.70	6.70	28.20	-9.80	40.32	74.00	-33.68	PK	Horizontal
3265.23	40.09	44.70	6.70	28.20	-9.80	30.29	54.00	-23.71	AV	Horizontal
4803.93	60.37	44.20	9.04	31.60	-3.56	56.81	74.00	-17.19	PK	Vertical
4803.93	50.39	44.20	9.04	31.60	-3.56	46.83	54.00	-7.17	AV	Vertical
4804.91	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Horizontal
4804.91	50.40	44.20	9.04	31.60	-3.56	46.84	54.00	-7.16	AV	Horizontal
5360.20	47.31	44.20	9.86	32.00	-2.34	44.97	74.00	-29.03	PK	Vertical
5360.20	39.31	44.20	9.86	32.00	-2.34	36.97	54.00	-17.03	AV	Vertical
5360.20	47.33	44.20	9.86	32.00	-2.34	44.99	74.00	-29.01	PK	Horizontal
5360.20	39.29	44.20	9.86	32.00	-2.34	36.95	54.00	-17.05	AV	Horizontal
7206.29	52.80	43.50	11.40	35.50	3.40	56.2	74.00	-17.80	PK	Vertical
7206.29	44.73	43.50	11.40	35.50	3.40	48.13	54.00	-5.87	AV	Vertical
7206.33	52.77	43.50	11.40	35.50	3.40	56.17	74.00	-17.83	PK	Horizontal
7206.33	44.80	43.50	11.40	35.50	3.40	48.2	54.00	-5.80	AV	Horizontal
11036.36	42.07	43.60	14.30	39.50	10.20	52.27	74.00	-21.73	PK	Vertical
11036.36	32.03	43.60	14.30	39.50	10.20	42.23	54.00	-11.77	AV	Vertical
11036.59	42.04	43.60	14.30	39.50	10.20	52.24	74.00	-21.76	PK	Horizontal
11036.59	32.05	43.60	14.30	39.50	10.20	42.25	54.00	-11.75	AV	Horizontal
13299.74	41.86	42.60	15.90	38.90	12.20	54.06	74.00	-19.94	PK	Vertical



13299.7 4	31.85	42.60	15.90	38.90	12.20	44.05	54.00	-9.95	AV	Vertical
13299.8 8	41.88	42.60	15.90	38.90	12.20	54.08	74.00	-19.92	Pk	Horizontal
13299.8 8	30.84	42.60	15.90	38.90	12.20	43.04	54.00	-10.96	AV	Horizontal
16000.2 9	41.95	42.70	18.00	37.10	12.40	54.35	74.00	-19.65	PK	Vertical
16000.2 9	31.91	42.70	18.00	37.10	12.40	44.31	54.00	-9.69	AV	Vertical
16000.2 0	41.93	42.70	18.00	37.10	12.40	54.33	74.00	-19.67	PK	Horizontal
16000.2 0	31.17	42.70	18.00	37.10	12.40	43.57	54.00	-10.43	AV	Horizontal
17998.3 0	32.07	42.70	19.40	46.50	23.20	55.27	74.00	-18.73	PK	Vertical
17998.3 0	22.08	42.70	19.40	46.50	23.20	40.28	54.00	-8.72	AV	Vertical
17998.1 6	32.11	42.70	19.40	46.50	23.20	55.31	74.00	-18.69	PK	Horizontal
17998.1 6	22.07	42.70	19.40	46.50	23.20	40.32	54.00	-8.73	AV	Horizontal

### 8DPSK Mid Channel

Frequency (MHz)	Meter Reading (dBµV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBµV/m)	Margin (dB)	Detector Type	Comment
3265.16	50.06	44.70	6.70	28.20	-9.80	40.26	-33.74	PK	Vertical
3265.16	40.03	44.70	6.70	28.20	-9.80	30.23	-23.77	AV	Vertical
3265.17	50.04	44.70	6.70	28.20	-9.80	40.24	-33.76	PK	Horizontal
3265.17	40.03	44.70	6.70	28.20	-9.80	30.23	-23.77	AV	Horizontal
4882.85	60.34	44.20	9.04	31.60	-3.56	56.78	-17.22	PK	Vertical
4882.85	50.32	44.20	9.04	31.60	-3.56	46.76	-7.24	AV	Vertical
4882.80	60.32	44.20	9.04	31.60	-3.56	56.76	-17.24	PK	Horizontal
4882.80	50.28	44.20	9.04	31.60	-3.56	46.72	-7.28	AV	Horizontal



5360.10	47.23	44.20	9.86	32.00	-2.34	44.89	-29.11	PK	Vertical
5360.10	39.23	44.20	9.86	32.00	-2.34	36.89	-17.11	AV	Vertical
5360.02	47.26	44.20	9.86	32.00	-2.34	44.92	-29.08	PK	Horizontal
5360.02	39.22	44.20	9.86	32.00	-2.34	36.88	-17.12	AV	Horizontal
7320.20	52.69	43.50	11.40	35.50	3.40	56.09	-17.91	PK	Vertical
7320.20	44.64	43.50	11.40	35.50	3.40	48.04	-5.96	AV	Vertical
7320.58	52.76	43.50	11.40	35.50	3.40	56.16	-17.84	PK	Horizontal
7320.58	44.74	43.50	11.40	35.50	3.40	48.14	-5.86	AV	Horizontal
11036.30	42.01	43.60	14.30	39.50	10.20	52.21	-21.79	PK	Vertical
11036.30	31.96	43.60	14.30	39.50	10.20	42.16	-11.84	AV	Vertical
11036.47	41.91	43.60	14.30	39.50	10.20	52.11	-21.89	PK	Horizontal
11036.47	31.98	43.60	14.30	39.50	10.20	42.18	-11.82	AV	Horizontal
13299.83	41.75	42.60	15.90	38.90	12.20	53.95	-20.05	PK	Vertical
13299.83	31.81	42.60	15.90	38.90	12.20	44.01	-9.99	AV	Vertical
13299.75	41.82	42.60	15.90	38.90	12.20	54.02	-19.98	PK	Horizontal
13299.75	30.80	42.60	15.90	38.90	12.20	43.00	-11.00	AV	Horizontal
16000.14	41.91	42.70	18.00	37.10	12.40	54.31	-19.69	PK	Vertical
16000.14	31.79	42.70	18.00	37.10	12.40	44.19	-9.81	AV	Vertical
16000.09	41.85	42.70	18.00	37.10	12.40	54.25	-19.75	PK	Horizontal
16000.09	31.09	42.70	18.00	37.10	12.40	43.49	-10.51	AV	Horizontal
17998.29	31.96	42.70	19.40	46.50	23.20	55.16	-18.84	PK	Vertical
17998.29	22.02	42.70	19.40	46.50	23.20	45.22	-8.78	AV	Vertical
17998.17	32.04	42.70	19.40	46.50	23.20	55.24	-18.76	PK	Horizontal
17998.17	21.99	42.70	19.40	46.50	23.20	45.19	-8.81	AV	Horizontal

### 8DPSK High Channel

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
-----------	---------------	-----------	------	----------------	-----------------	----------------	--------	--------	----------	---------



(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2480 MHz)										
3265.16	50.00	44.70	6.70	28.20	-9.80	40.20	74.00	-33.80	PK	Vertical
3265.16	40.01	44.70	6.70	28.20	-9.80	30.21	54.00	-23.79	AV	Vertical
3265.16	50.05	44.70	6.70	28.20	-9.80	40.25	74.00	-33.75	PK	Horizontal
3265.16	40.04	44.70	6.70	28.20	-9.80	30.24	54.00	-23.76	AV	Horizontal
4960.84	60.32	44.20	9.04	31.60	-3.56	56.76	74.00	-17.24	PK	Vertical
4960.84	50.31	44.20	9.04	31.60	-3.56	46.75	54.00	-7.25	AV	Vertical
4960.83	60.32	44.20	9.04	31.60	-3.56	56.76	74.00	-17.24	PK	Horizontal
4960.83	50.34	44.20	9.04	31.60	-3.56	46.78	54.00	-7.22	AV	Horizontal
5360.14	47.24	44.20	9.86	32.00	-2.34	44.90	74.00	-29.10	PK	Vertical
5360.14	39.28	44.20	9.86	32.00	-2.34	36.94	54.00	-17.06	AV	Vertical
5360.14	47.24	44.20	9.86	32.00	-2.34	44.90	74.00	-29.10	PK	Horizontal
5360.14	39.24	44.20	9.86	32.00	-2.34	36.90	54.00	-17.10	AV	Horizontal
7440.16	52.71	43.50	11.40	35.50	3.40	56.11	74.00	-17.89	PK	Vertical
7440.16	44.70	43.50	11.40	35.50	3.40	48.10	54.00	-5.90	AV	Vertical
7440.23	52.75	43.50	11.40	35.50	3.40	56.15	74.00	-17.85	PK	Horizontal
7440.23	44.75	43.50	11.40	35.50	3.40	48.15	54.00	-5.85	AV	Horizontal
11036.26	42.01	43.60	14.30	39.50	10.20	52.21	74.00	-21.79	PK	Vertical
11036.26	31.98	43.60	14.30	39.50	10.20	42.18	54.00	-11.82	AV	Vertical
11036.30	41.94	43.60	14.30	39.50	10.20	52.14	74.00	-21.86	PK	Horizontal
11036.30	31.99	43.60	14.30	39.50	10.20	42.19	54.00	-11.81	AV	Horizontal
16000.14	41.85	42.70	18.00	37.10	12.40	54.25	74.00	-19.75	PK	Vertical
16000.14	31.80	42.70	18.00	37.10	12.40	44.20	54.00	-9.80	AV	Vertical
16000.15	41.87	42.70	18.00	37.10	12.40	54.27	74.00	-19.73	PK	Horizontal
16000.15	31.11	42.70	18.00	37.10	12.40	43.51	54.00	-10.49	AV	Horizontal
17998.29	32.00	42.70	19.40	46.50	23.20	55.20	74.00	-18.80	PK	Vertical
17998.29	22.03	42.70	19.40	46.50	23.20	45.23	54.00	-8.77	AV	Vertical





17998.17	32.04	42.70	19.40	46.50	23.20	55.24	74.00	-18.76	PK	Horizontal
17998.17	22.02	42.70	19.40	46.50	23.20	45.22	54.00	-8.78	AV	Horizontal

Note:

- 1) Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK, the worst case is 8DPSK Mode
- 2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

$$\text{Emission Level} = \text{Meter Reading} + \text{Factor}$$

Band edge

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
GFSK										
2400.00	69.16	43.80	4.91	25.90	-12.99	56.17	74	-17.83	PK	Vertical
2400.00	54.99	43.80	4.91	25.90	-12.99	42.00	54	-12.00	AV	Vertical
2400.00	70.21	43.80	4.91	25.90	-12.99	57.22	74	-16.78	PK	Horizontal
2400.00	54.07	43.80	4.91	25.90	-12.99	41.08	54	-12.92	AV	Horizontal
2483.50	70.97	43.80	5.12	25.90	-12.78	58.19	74	-15.81	PK	Vertical
2483.50	53.97	43.80	5.12	25.90	-12.78	41.19	54	-12.81	AV	Vertical
2483.50	71.08	43.80	5.12	25.90	-12.78	58.30	74	-15.70	PK	Horizontal
2483.50	54.00	43.80	5.12	25.90	-12.78	41.22	54	-12.78	AV	Horizontal
n/4-DQPSK										
2400.00	69.15	43.80	4.91	25.90	-12.99	56.16	74	-17.84	PK	Vertical
2400.00	54.98	43.80	4.91	25.90	-12.99	41.99	54	-12.01	AV	Vertical
2400.00	70.19	43.80	4.91	25.90	-12.99	57.20	74	-16.80	PK	Horizontal
2400.00	54.07	43.80	4.91	25.90	-12.99	41.08	54	-12.92	AV	Horizontal
2483.50	71.00	43.80	5.12	25.90	-12.78	58.22	74	-15.78	PK	Vertical
2483.50	53.95	43.80	5.12	25.90	-12.78	41.17	54	-12.83	AV	Vertical
2483.50	71.06	43.80	5.12	25.90	-12.78	58.28	74	-15.72	PK	Horizontal
2483.50	54.01	43.80	5.12	25.90	-12.78	41.23	54	-12.77	AV	Horizontal
8DPSK										
2400.00	69.18	43.80	4.91	25.90	-12.99	56.19	74	-17.81	PK	Vertical
2400.00	54.97	43.80	4.91	25.90	-12.99	41.98	54	-12.02	AV	Vertical
2400.00	70.19	43.80	4.91	25.90	-12.99	57.20	74	-16.80	PK	Horizontal
2400.00	54.08	43.80	4.91	25.90	-12.99	41.09	54	-12.91	AV	Horizontal
2483.50	71.00	43.80	5.12	25.90	-12.78	58.22	74	-15.78	PK	Vertical
2483.50	53.97	43.80	5.12	25.90	-12.78	41.19	54	-12.81	AV	Vertical



2483.50	71.07	43.80	5.12	25.90	-12.78	58.29	74	-15.71	PK	Horizontal
2483.50	53.98	43.80	5.12	25.90	-12.78	41.20	54	-12.80	AV	Horizontal
<p>Low measurement frequencies is range from 2310 to 2400 MHz,high measurement frequencies is range from 2483.5 to 2500 MHz.</p> <p>Only showthe worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.</p>										

Hopping Band edge

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK										
2400.00	69.16	43.80	4.91	25.90	-12.99	56.17	74	-17.83	PK	Vertical
2400.00	54.96	43.80	4.91	25.90	-12.99	41.97	54	-12.03	AV	Vertical
2400.00	70.18	43.80	4.91	25.90	-12.99	57.19	74	-16.81	PK	Horizontal
2400.00	54.08	43.80	4.91	25.90	-12.99	41.09	54	-12.91	AV	Horizontal
2483.50	71.00	43.80	5.12	25.90	-12.78	58.22	74	-15.78	PK	Vertical
2483.50	53.96	43.80	5.12	25.90	-12.78	41.18	54	-12.82	AV	Vertical
2483.50	71.07	43.80	5.12	25.90	-12.78	58.29	74	-15.71	PK	Horizontal
2483.50	53.98	43.80	5.12	25.90	-12.78	41.20	54	-12.80	AV	Horizontal
π/4-DQPSK										
2400.00	69.15	43.80	4.91	25.90	-12.99	56.16	74	-17.84	PK	Vertical
2400.00	54.99	43.80	4.91	25.90	-12.99	42.00	54	-12.00	AV	Vertical
2400.00	70.17	43.80	4.91	25.90	-12.99	57.18	74	-16.82	PK	Horizontal
2400.00	54.10	43.80	4.91	25.90	-12.99	41.11	54	-12.89	AV	Horizontal
2483.50	70.99	43.80	5.12	25.90	-12.78	58.21	74	-15.79	PK	Vertical
2483.50	53.95	43.80	5.12	25.90	-12.78	41.17	54	-12.83	AV	Vertical
2483.50	71.09	43.80	5.12	25.90	-12.78	58.31	74	-15.69	PK	Horizontal
2483.50	54.00	43.80	5.12	25.90	-12.78	41.22	54	-12.78	AV	Horizontal
8DPSK										
2400.00	69.17	43.80	4.91	25.90	-12.99	56.18	74	-17.82	PK	Vertical
2400.00	54.98	43.80	4.91	25.90	-12.99	41.99	54	-12.01	AV	Vertical



2400.00	70.17	43.80	4.91	25.90	-12.99	57.18	74	-16.82	PK	Horizontal
2400.00	54.10	43.80	4.91	25.90	-12.99	41.11	54	-12.89	AV	Horizontal
2483.50	71.00	43.80	5.12	25.90	-12.78	58.22	74	-15.78	PK	Vertical
2483.50	53.95	43.80	5.12	25.90	-12.78	41.17	54	-12.83	AV	Vertical
2483.50	71.08	43.80	5.12	25.90	-12.78	58.30	74	-15.70	PK	Horizontal
2483.50	54.00	43.80	5.12	25.90	-12.78	41.22	54	-12.78	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz,high measurement frequencies is range from 2483.5 to 2500 MHz.

Only showthe worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.

## 7 Conducted Spurious Emission

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013,DA 00-705
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Transmitting & Hopping
Remark	:	The worst case was recorded.

### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- 2.

Spectrum Parameter	Setting
Detector	Peak
Start Frequency	30 MHz
Stop Frequency	25GHz(10th carrier harmonic)
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge


Spectrum Parameter	Setting
Attenuation	Auto
Start/Stop Frequency	Lower Band Edge: 2310 – 2404 MHz Upper Band Edge: 2478 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold




### 7.2 Test Result

Test Mode :	GFSK(1Mbps)-00/39/78 CH
-------------	-------------------------


GFSK Low CH

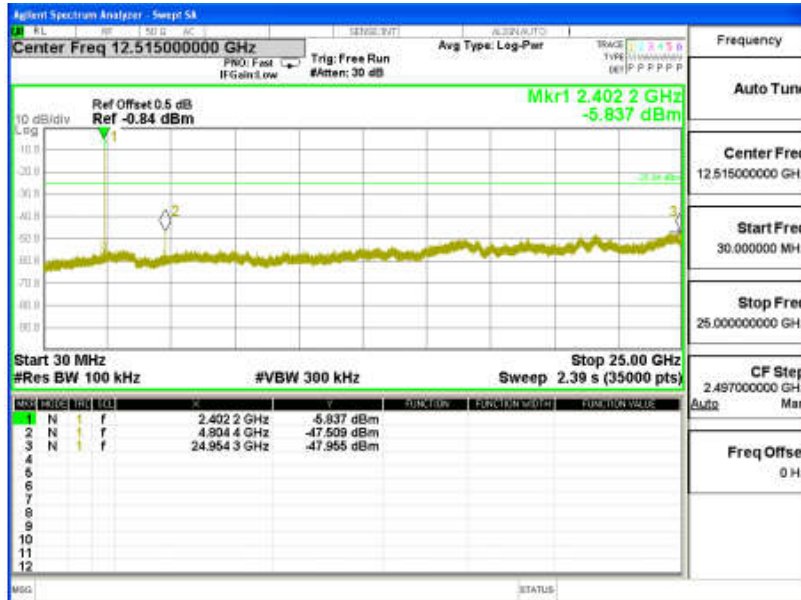

GFSK Middle CH

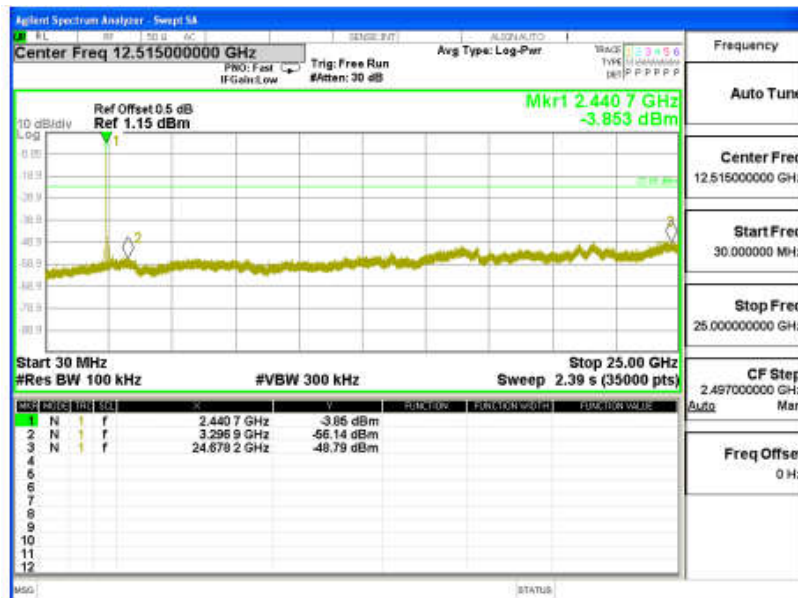

GFSK High CH

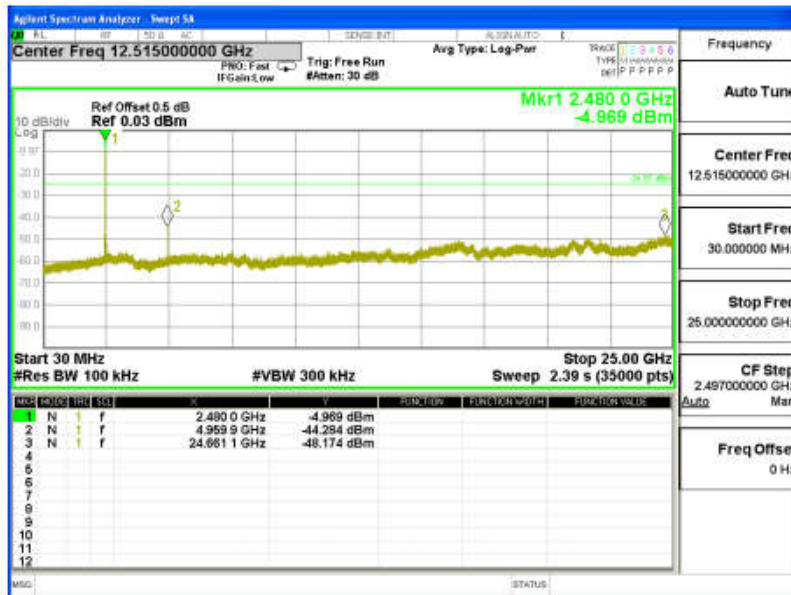


For Band edge

00 CH




78 CH

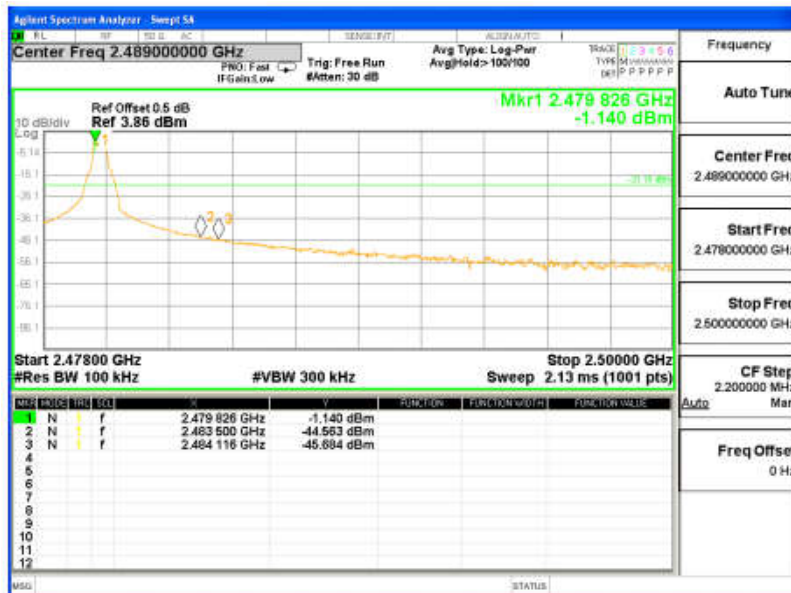




For Hopping Band edge

00 CH

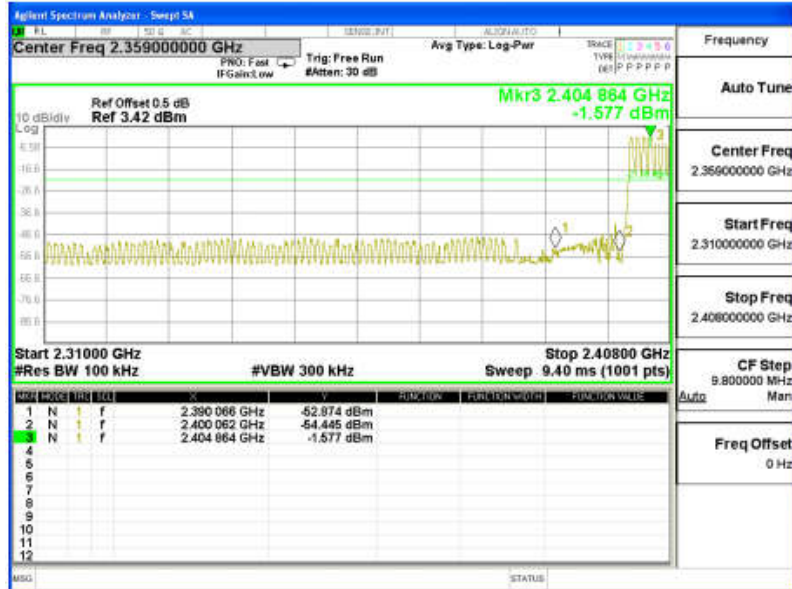

78 CH

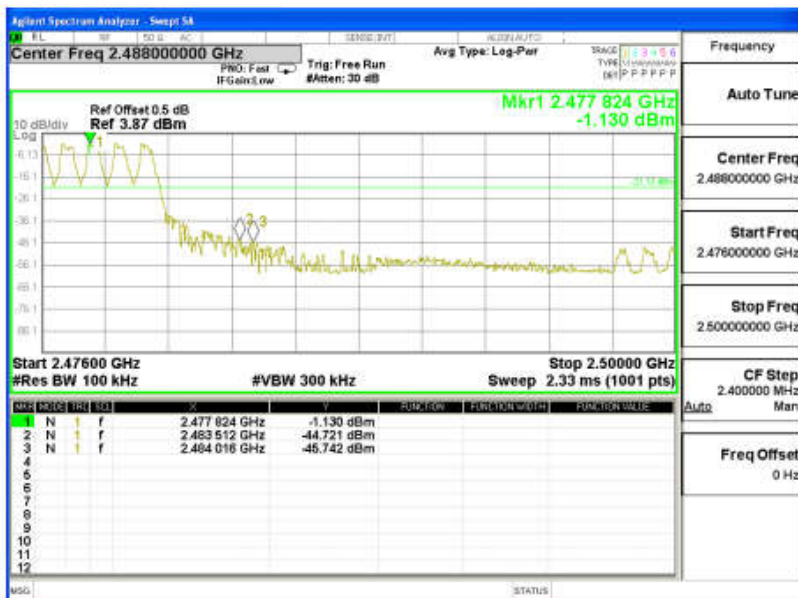




Test Mode :	$\pi/4$ -DQPSK(2Mbps) -00/39/78 CH
-------------	------------------------------------


00 CH



39 CH

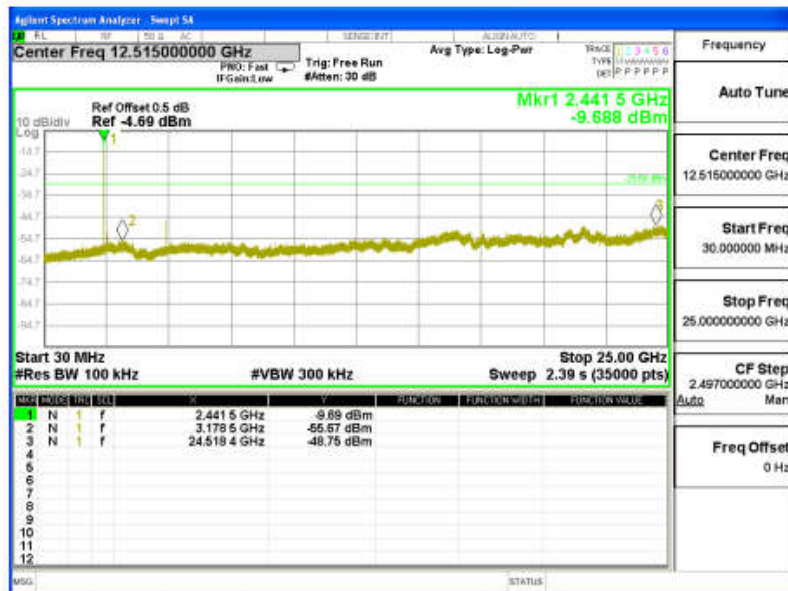

78 CH

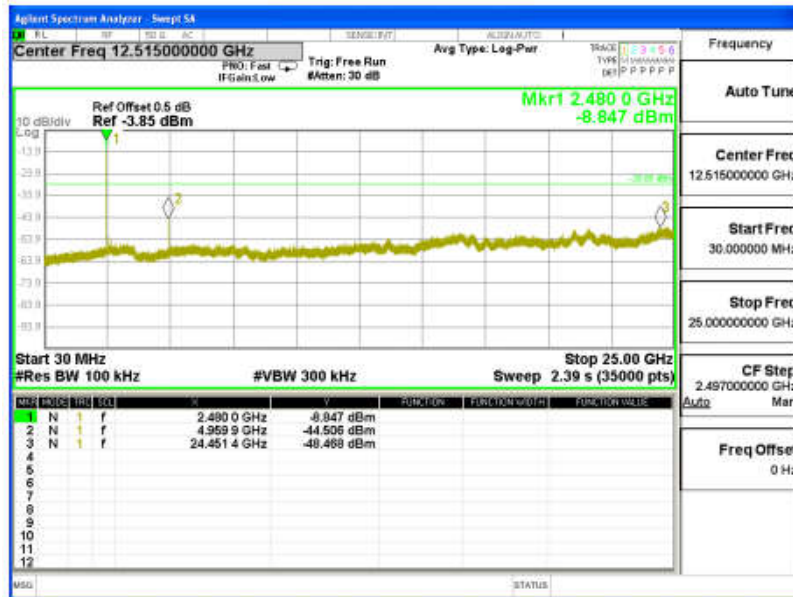


For Band edge

00 CH



78 CH

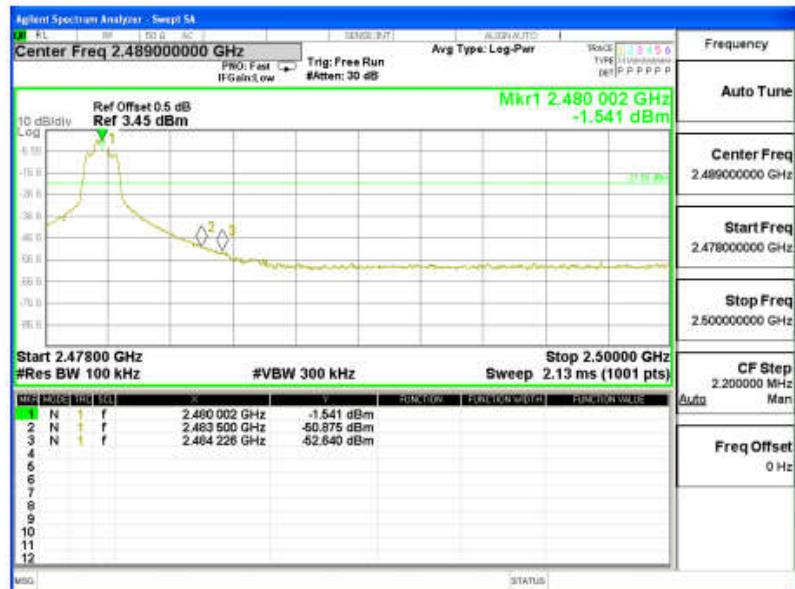



For Hopping Band edge

00 CH



78 CH






Test Mode :	8-DPSK(3Mbps)
-------------	---------------


00 CH



39 CH

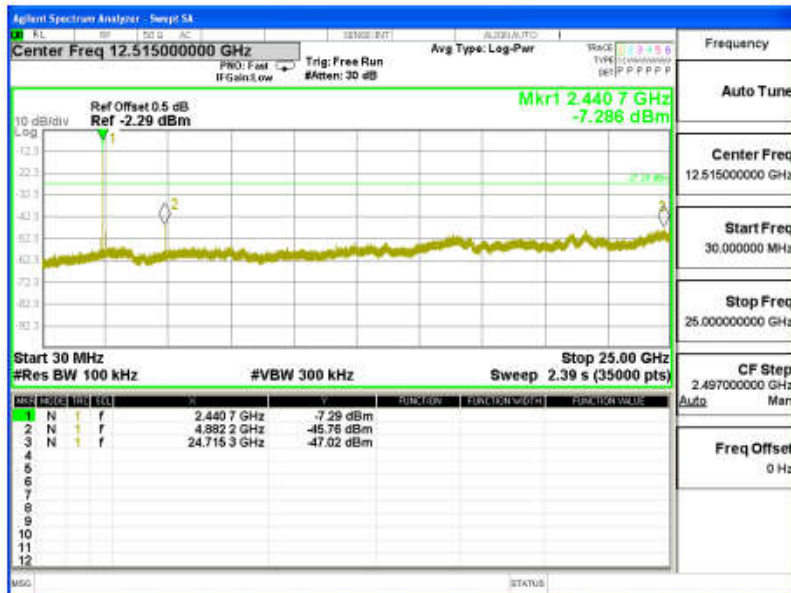

78 CH

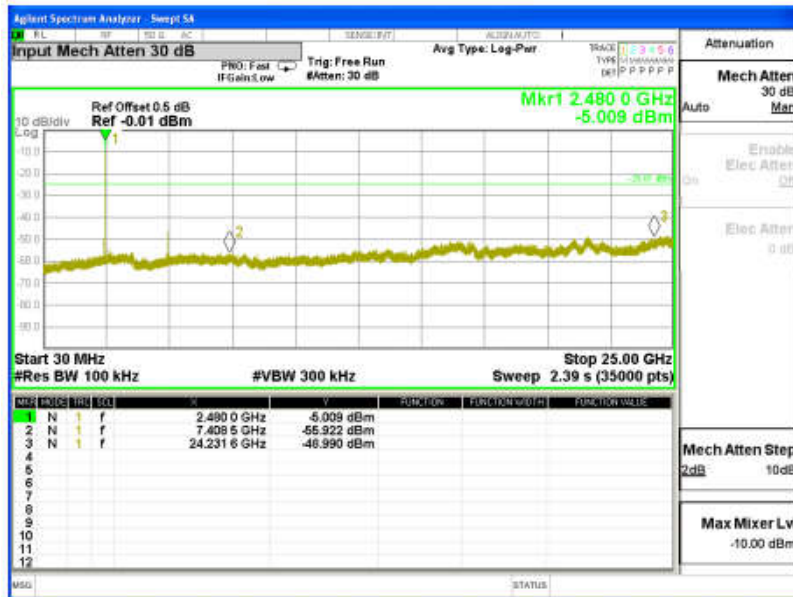


For Band edge

00 CH



78 CH

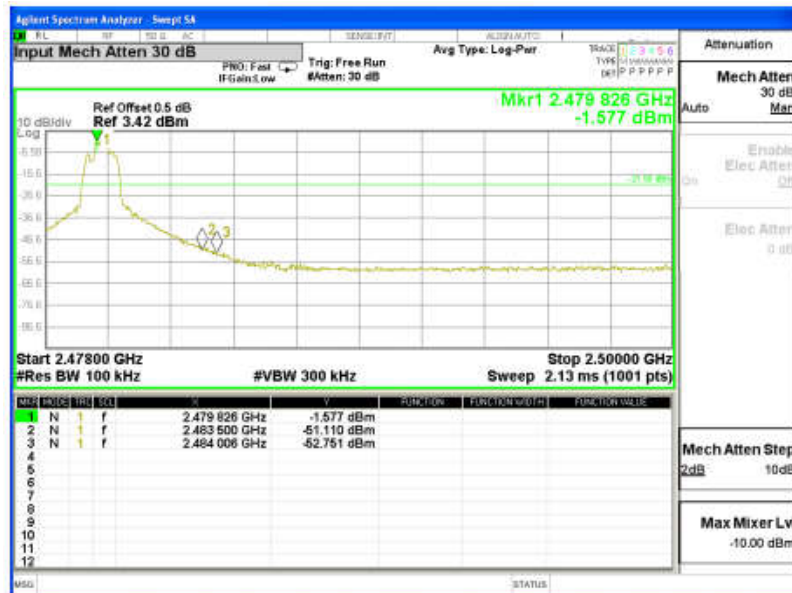



For Hopping Band edge

00 CH



78 CH





## 8 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247  
Test Method : ANSI C63.10:2013, DA 00-705  
Test Mode : Refer to section 3.3

### 8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 8.2 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.881
GFSK	Middle	0.890
GFSK	High	0.890
Pi/4 DQPSK	Low	1.286
Pi/4 DQPSK	Middle	1.286
Pi/4 DQPSK	High	1.287
8DPSK	Low	1.275
8DPSK	Middle	1.276
8DPSK	High	1.274

Note: peak detector is used


GFSK Low Channel

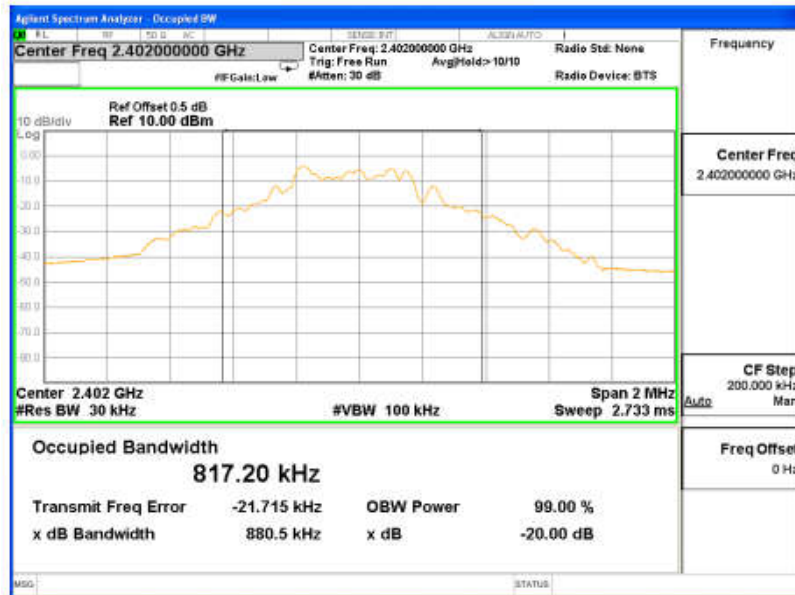


GFSK Middle Channel

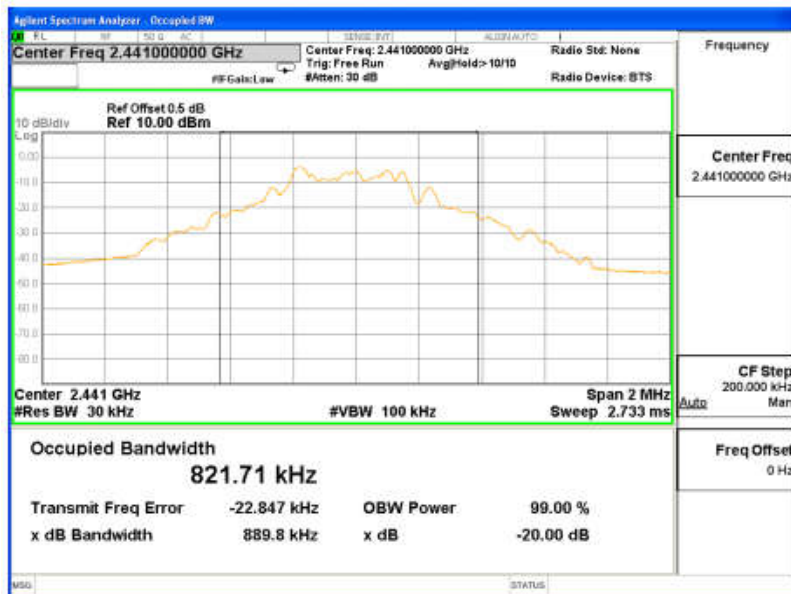


GFSK High Channel

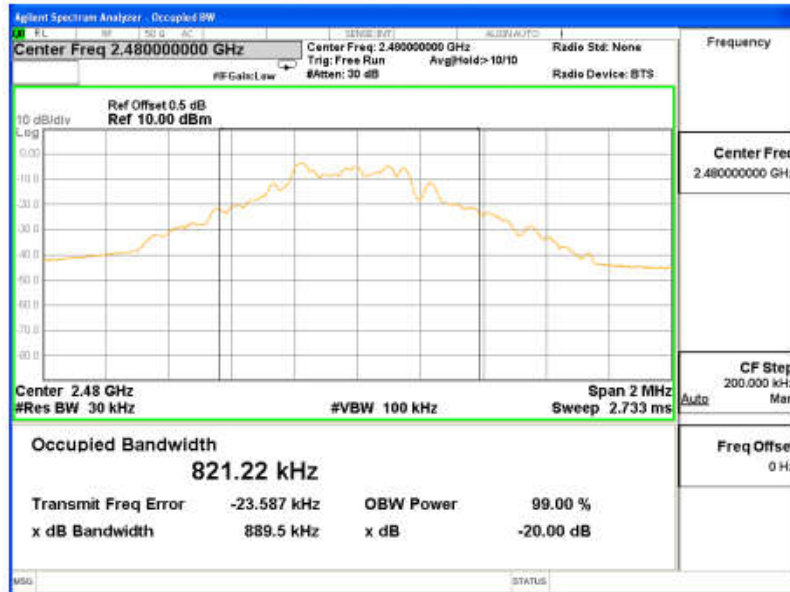


Pi/4DQPSK Low Channel

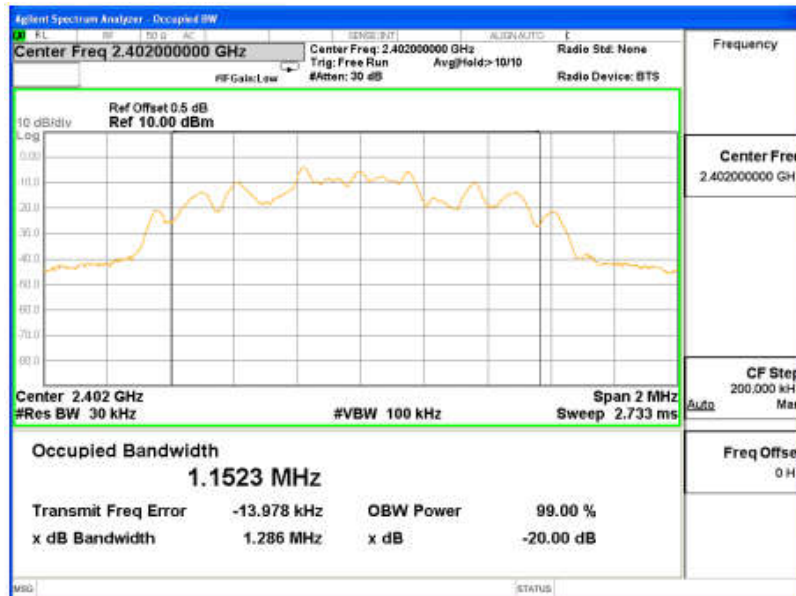


Pi/4DQPSK Middle Channel

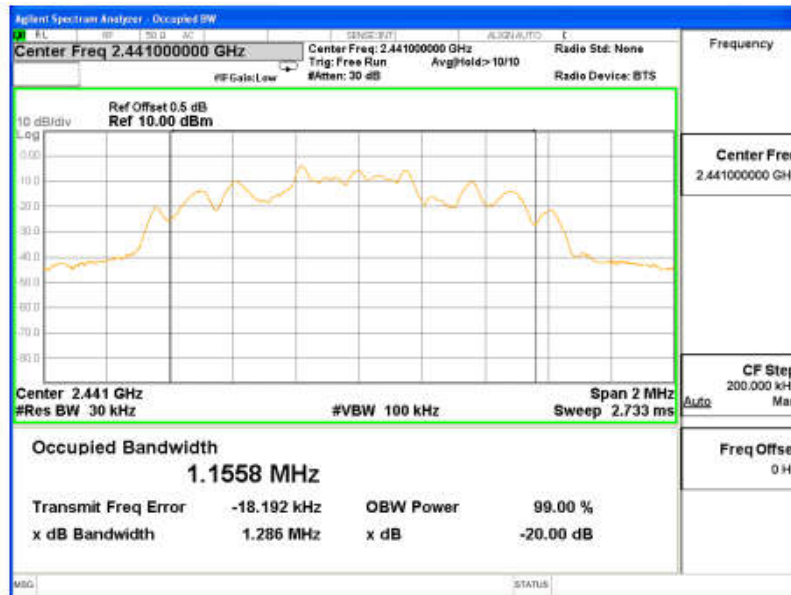


Pi/4DQPSK High Channel

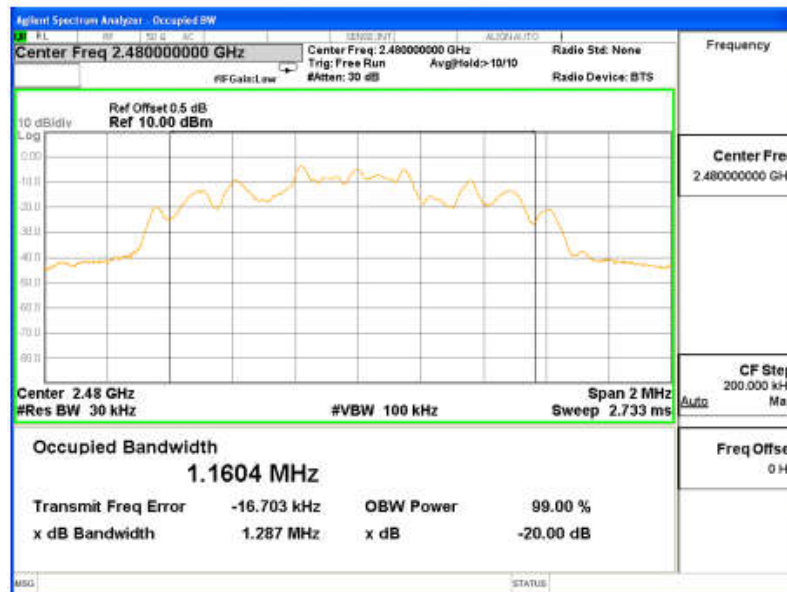


8DPSK Low Channel

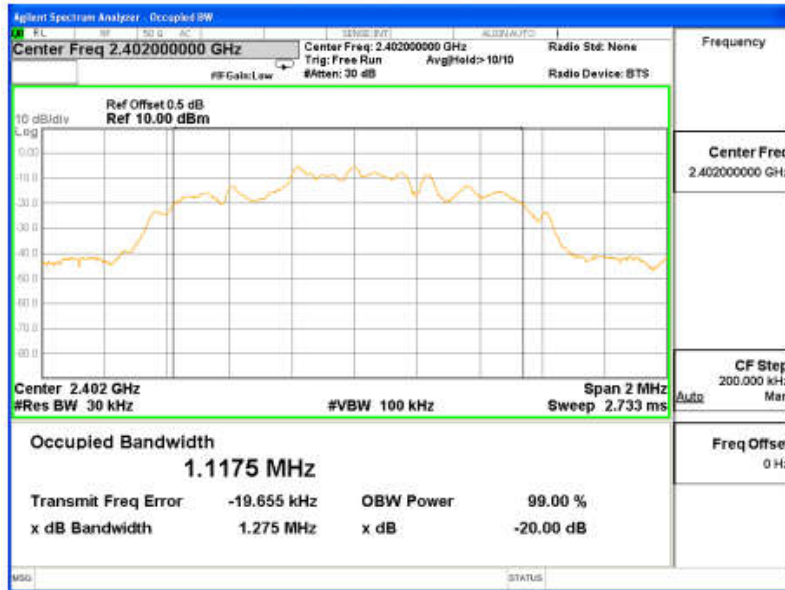

8DPSK Middle Channel

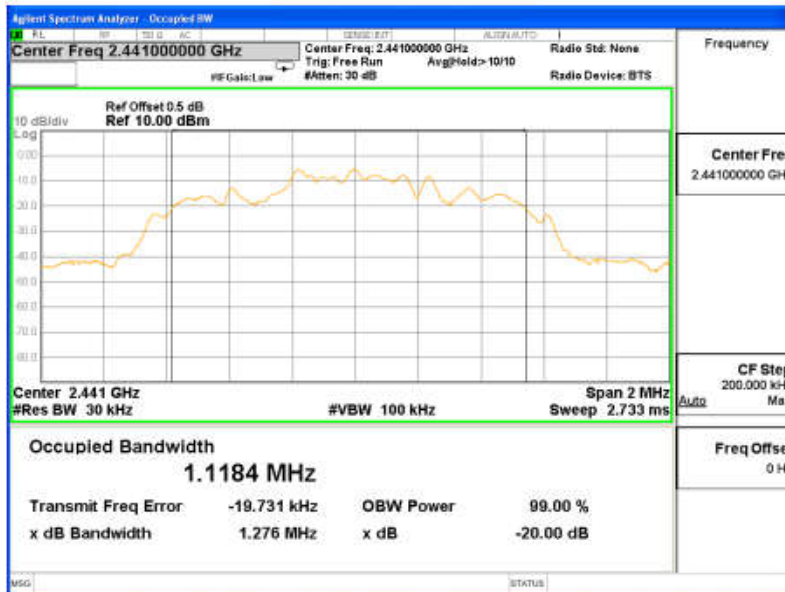

8DPSK High Channel

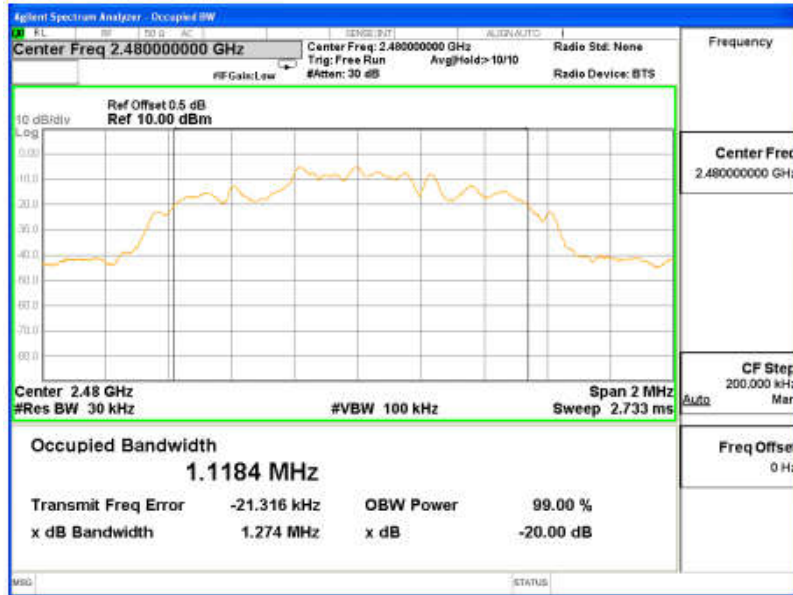



### 9 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, DA 00-705
- Test Limit : 1 W or 0.125W  
if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW(20.97dBm)
- Test Mode : Refer to section 3.3

#### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

#### 9.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	5.561	30
GFSK	Middle	8.007	30
GFSK	High	8.681	30
Pi/4 DQPSK	Low	3.250	20.97
Pi/4 DQPSK	Middle	6.022	20.97
Pi/4 DQPSK	High	6.836	20.97
8DPSK	Low	4.056	20.97
8DPSK	Middle	6.521	20.97
8DPSK	High	7.475	20.97




### GFSK Low Channel

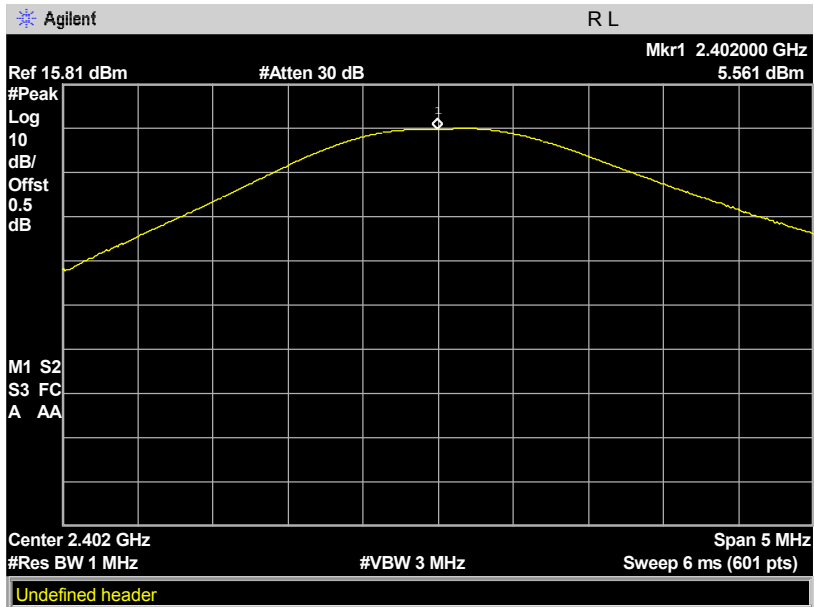


### GFSK Middle Channel

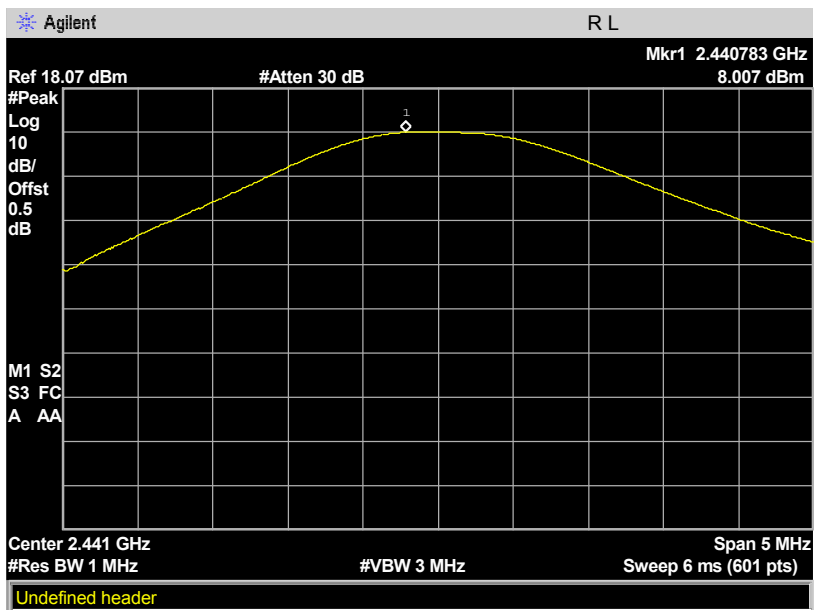


### GFSK High Channel

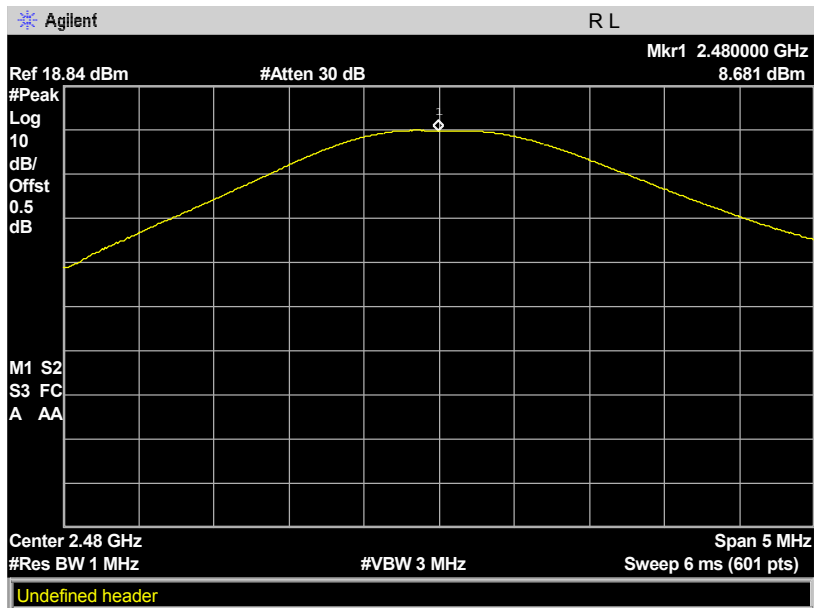


### Pi/4DQPSK Low Channel

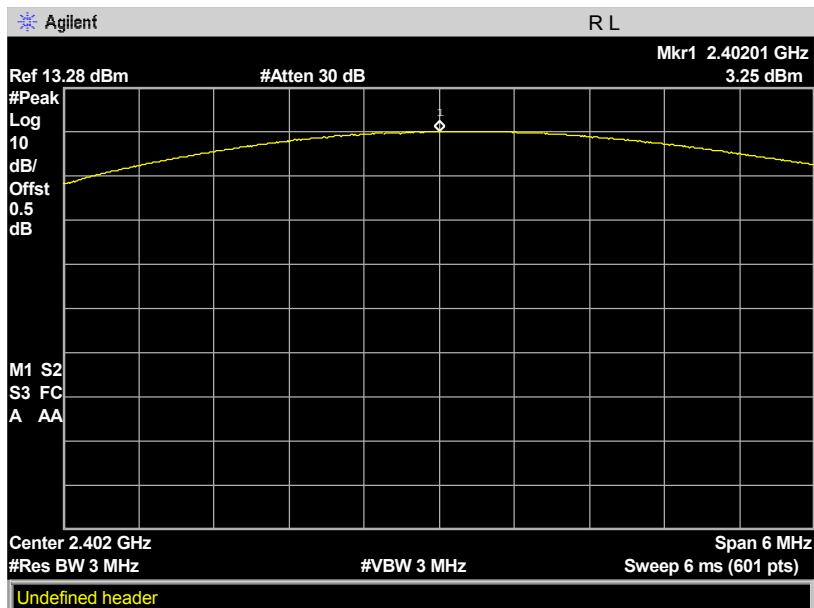


Pi/4DQPSK Middle Channel

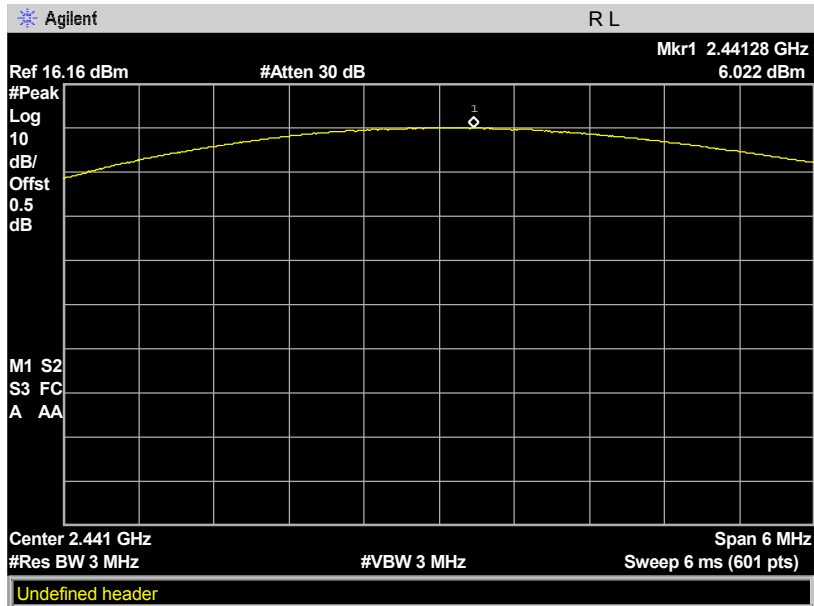


Pi/4DQPSK High Channel

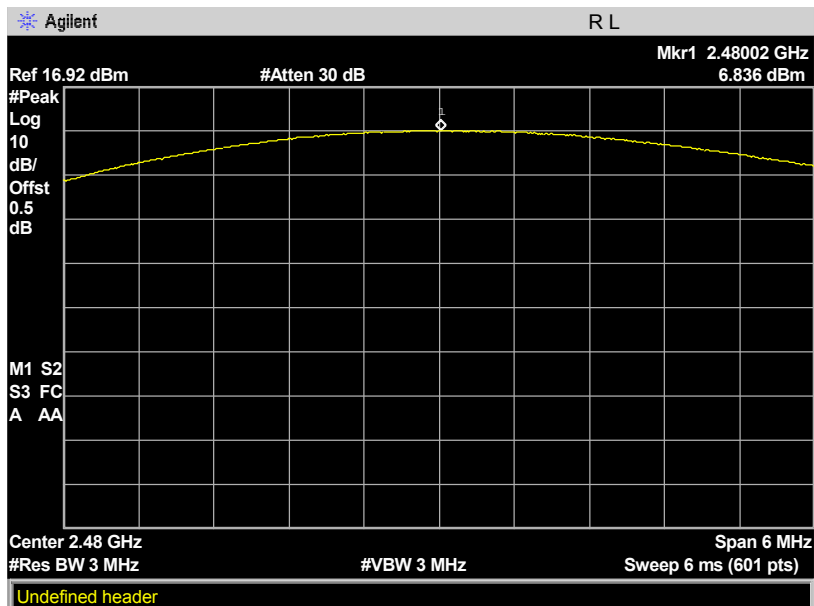


### 8DPSK Low Channel

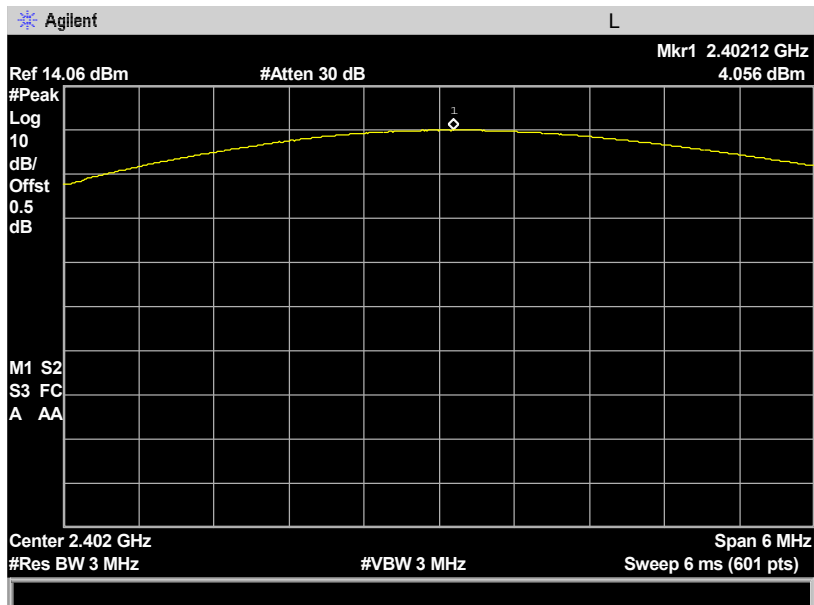

### 8DPSK Middle Channel

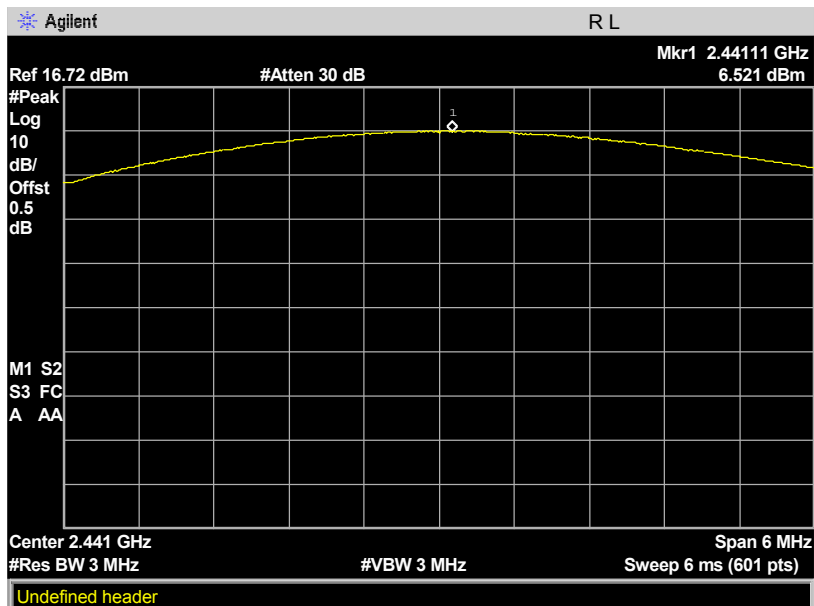

8DPSK High Channel

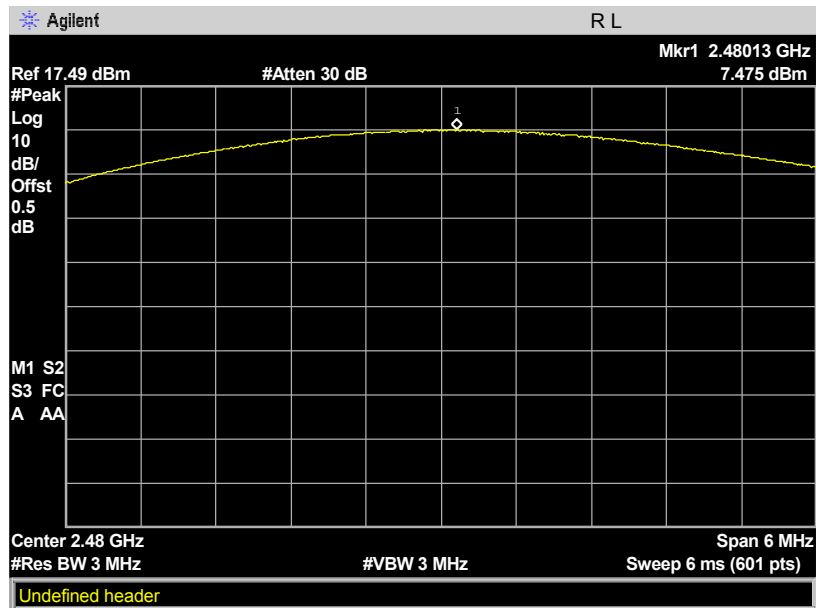



### 10 Hopping Channel Separation

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, DA 00-705
- Test Limit : Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
- Test Mode : Hopping

#### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 10.2 Test Result


Modulation	Test Channel	Separation (MHz)	Limit (MHz)	Result
GFSK	Low	1.000	0.858	PASS
GFSK	Middle	1.000	0.871	PASS
GFSK	High	1.000	0.847	PASS
Pi/4 DQPSK	Low	1.000	0.806	PASS
Pi/4 DQPSK	Middle	1.000	0.808	PASS
Pi/4 DQPSK	High	1.000	0.807	PASS
8DPSK	Low	1.000	0.806	PASS
8DPSK	Middle	1.000	0.808	PASS
8DPSK	High	1.000	0.806	PASS

For GFSK: Ch. Separation Limits: >20dB bandwidth


For π/4-DQPSK(2Mbps): Ch. Separation Limits: > two-thirds 20dB bandwidth

For 8-DPSK(3Mbps): Ch. Separation Limits: > two-thirds 20dB bandwidth


### GFSK Low Channel

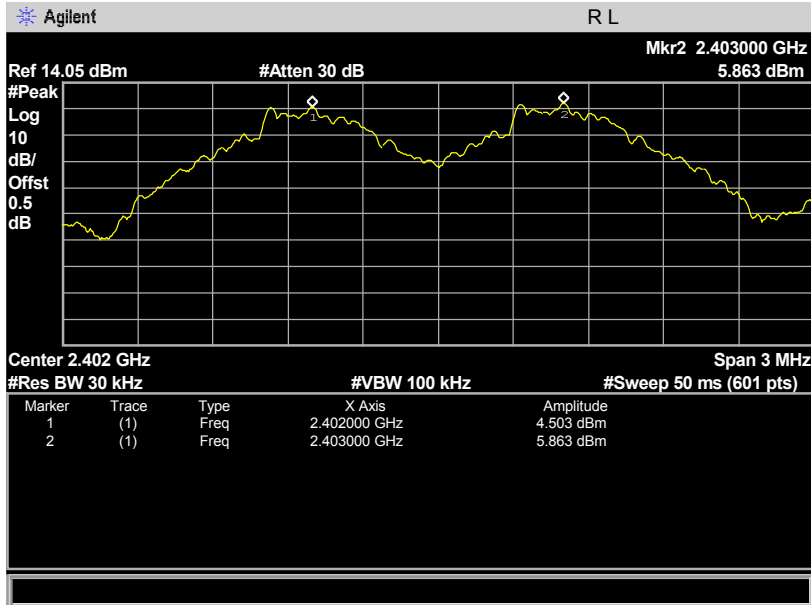


### GFSK Middle Channel

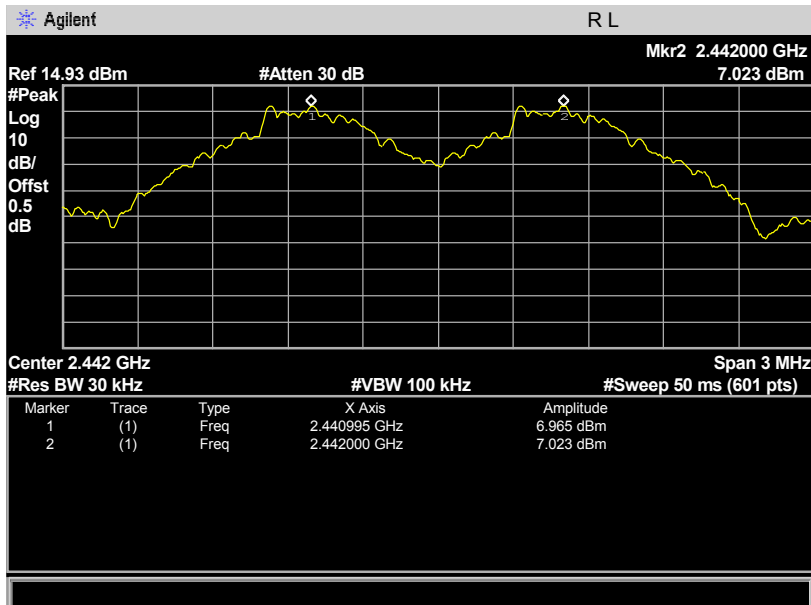

### GFSK High Channel

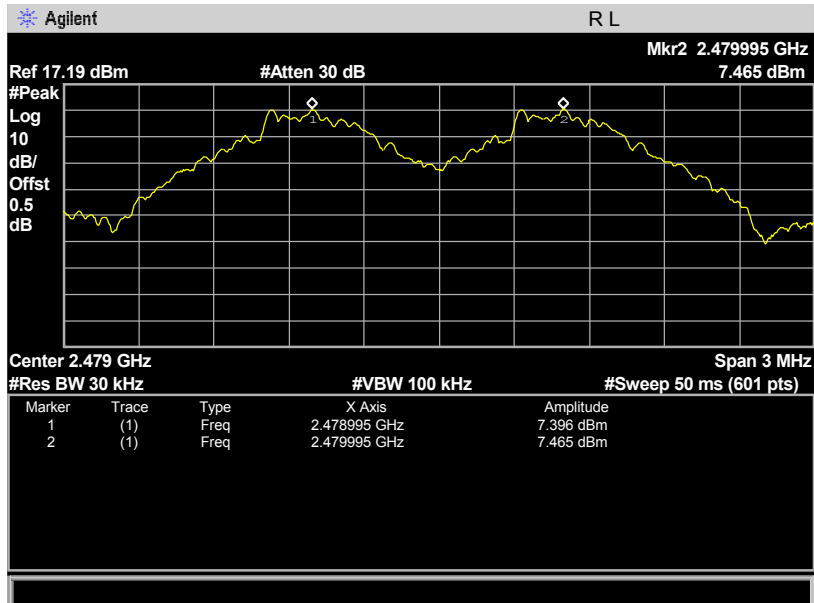


### Pi/4DQPSK Low Channel

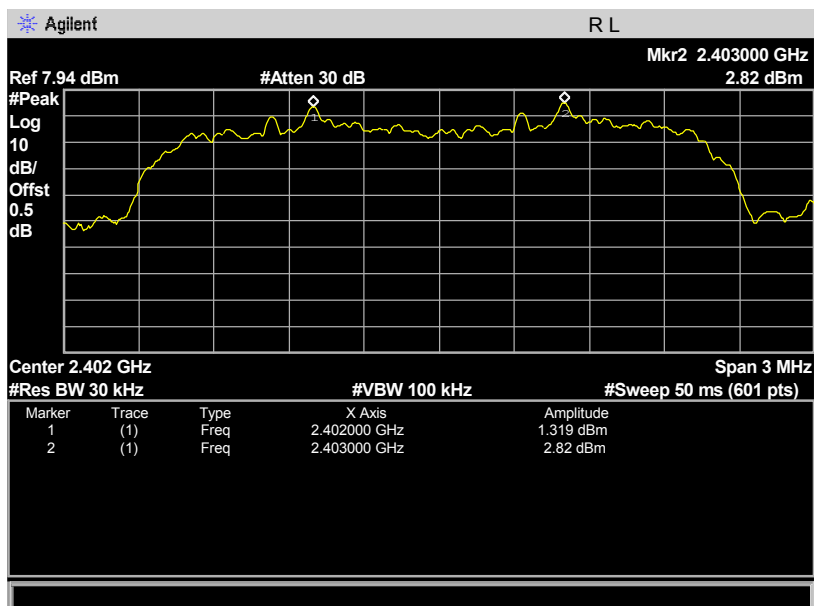





Pi/4DQPSK Middle Channel

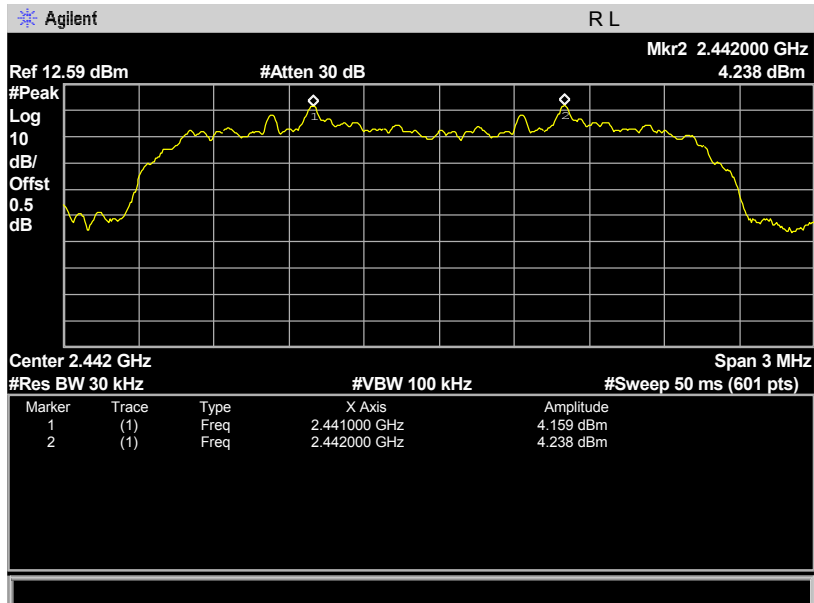


Pi/4DQPSK High Channel

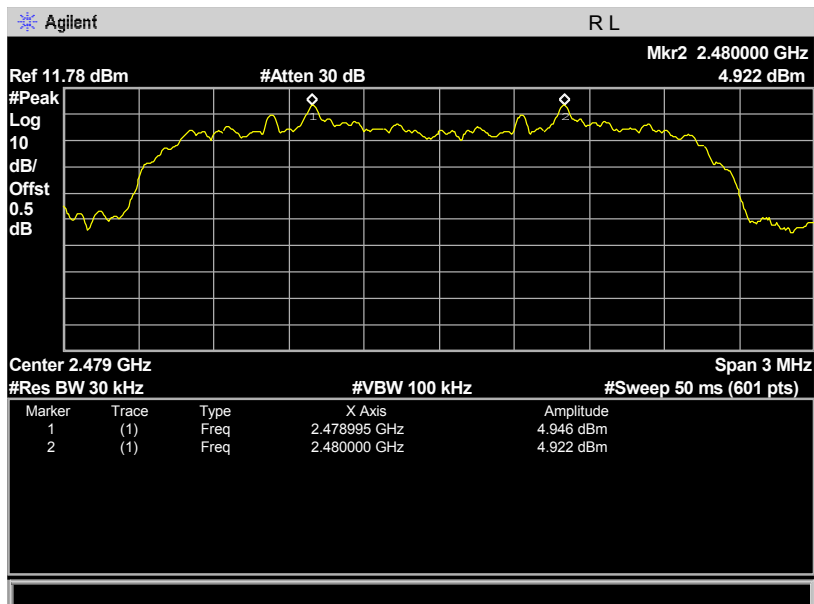


8DPSK Low Channel

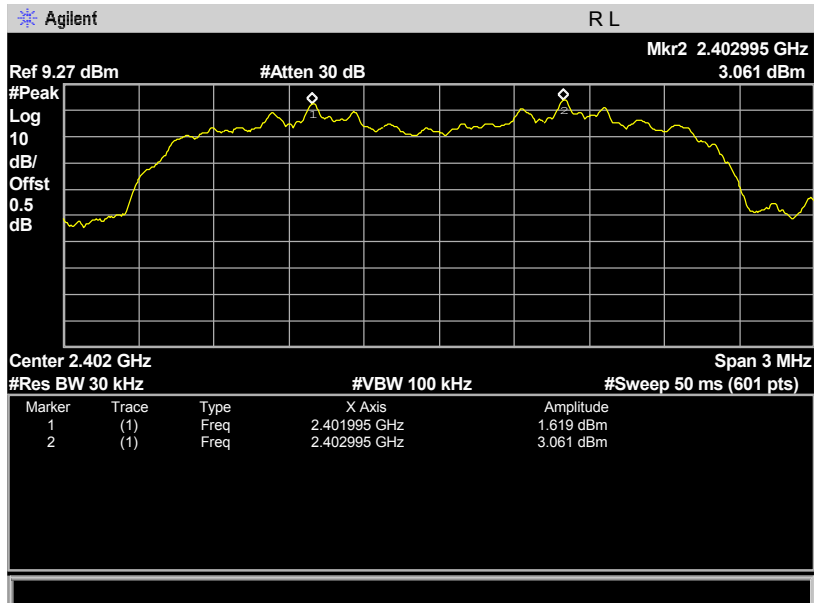

8DPSK Middle Channel

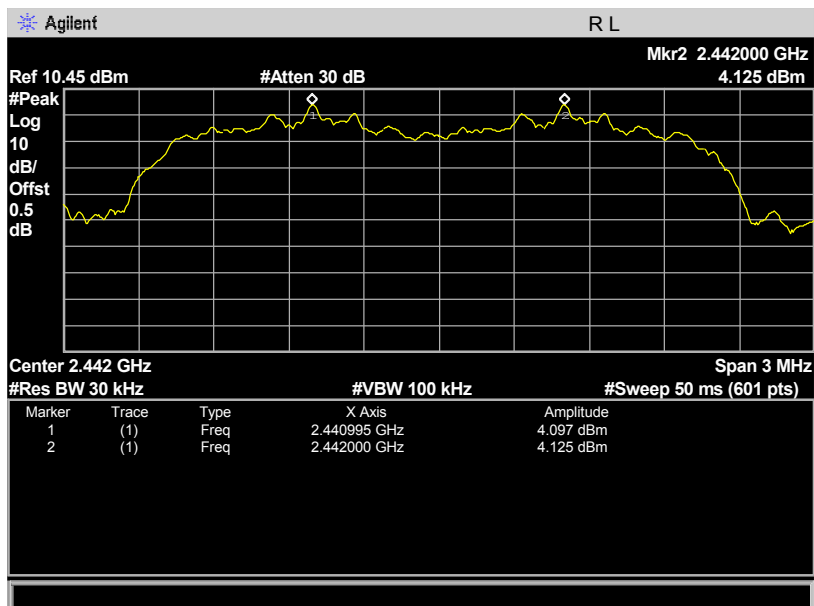

8DPSK High Channel

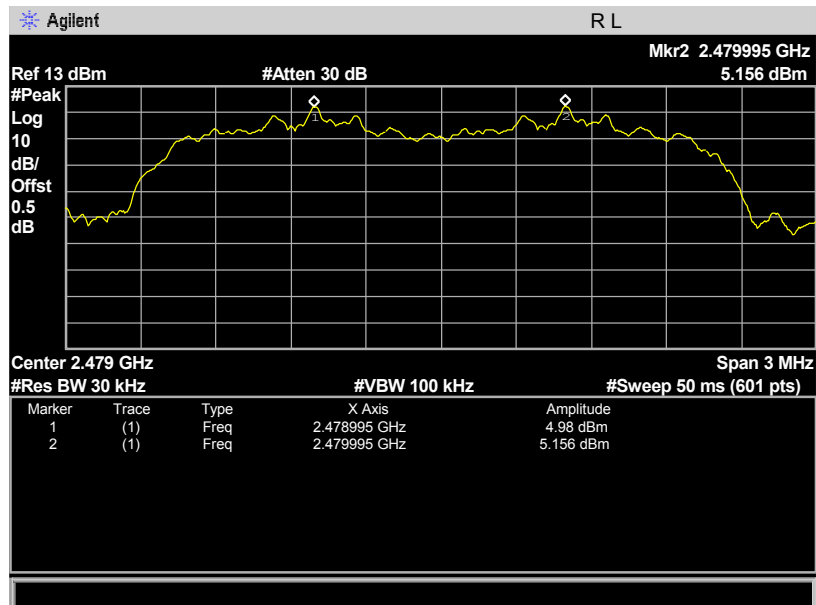



## 11 Number of Hopping Frequency


- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, DA 00-705
- Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
- Test Mode : Hopping(GFSK)

### 11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

### 11.2 Test Result

Channel Number	Limit
79	≥15

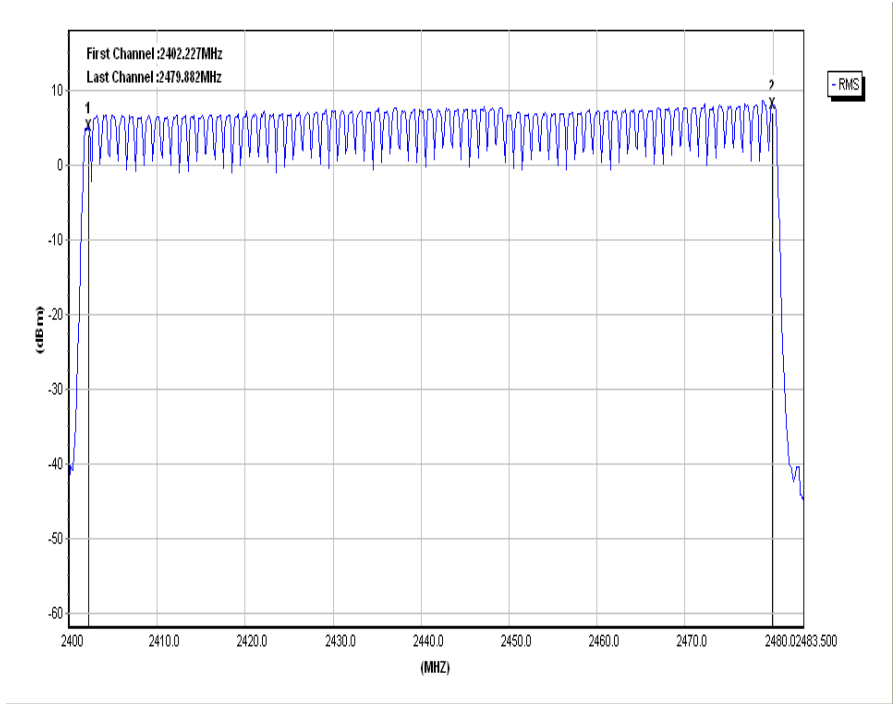

## 12 Dwell Time

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	: Hopping
Remark	: The worst case(8DPSK,3DH5) was recorded

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 12.2 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5/2DH5/3DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3/2DH3/3DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1/2DH1/3DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	




Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
DH1	2441 MHz	0.400	0.128	0.4
DH3	2441 MHz	1.660	0.266	0.4
DH5	2441 MHz	2.910	0.310	0.4


### CH39-DH1

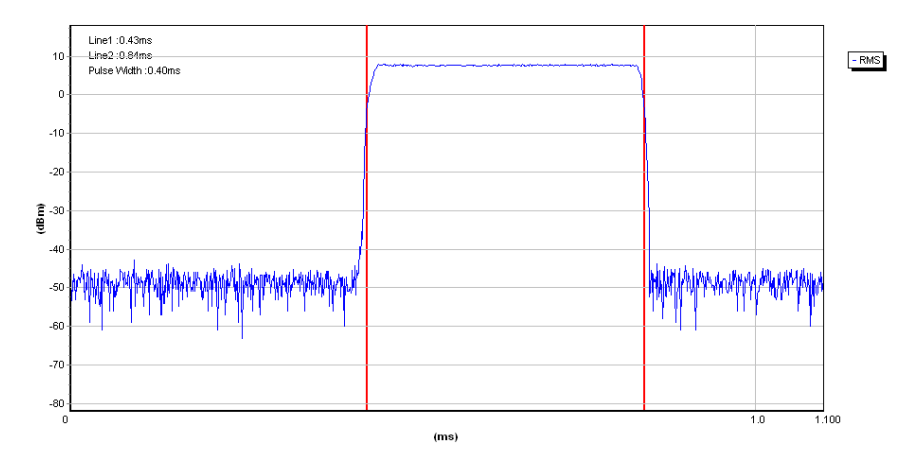

### CH39-DH3

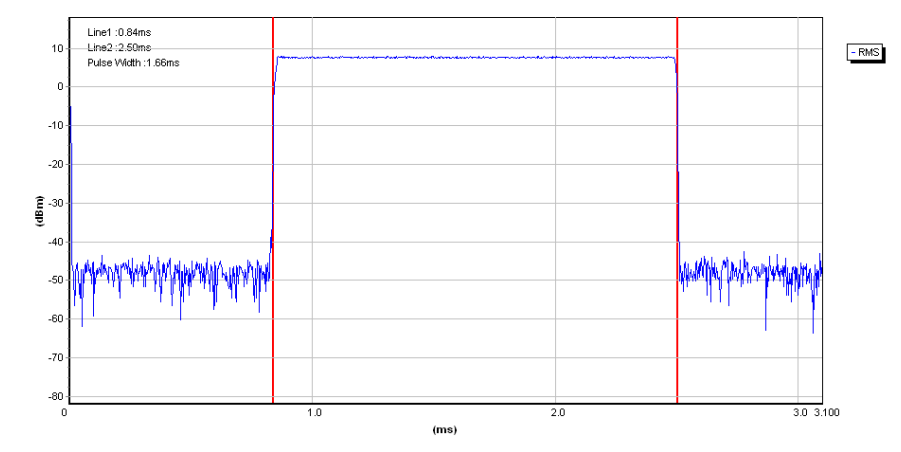

### CH39-DH5

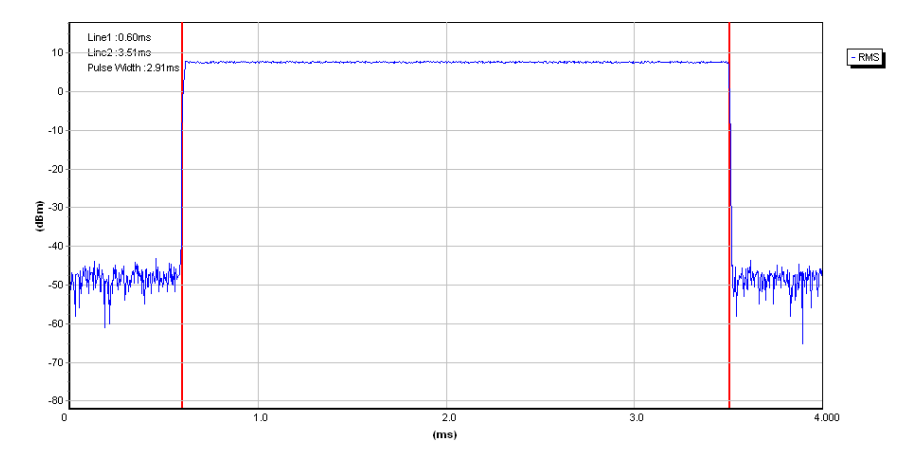







Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
2DH1	2441 MHz	0.420	0.134	0.4
2DH3	2441 MHz	1.640	0.262	0.4
2DH5	2441 MHz	2.920	0.311	0.4


### CH39-2DH1

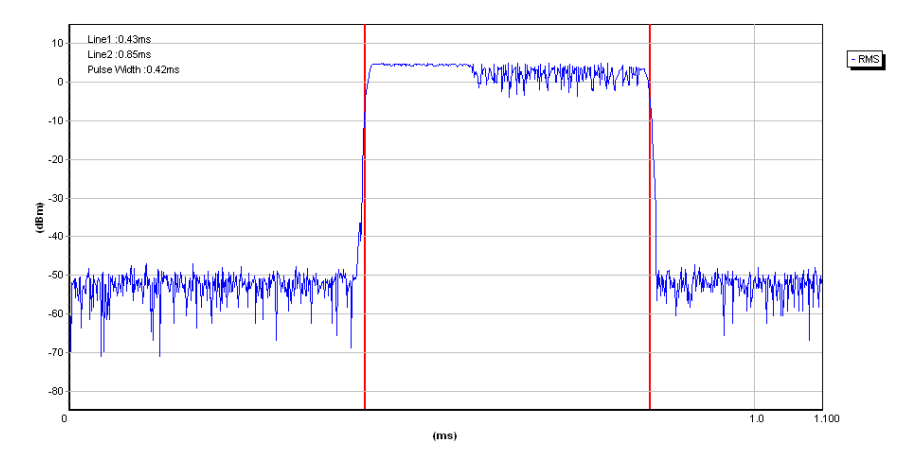

**CH39-2DH3**

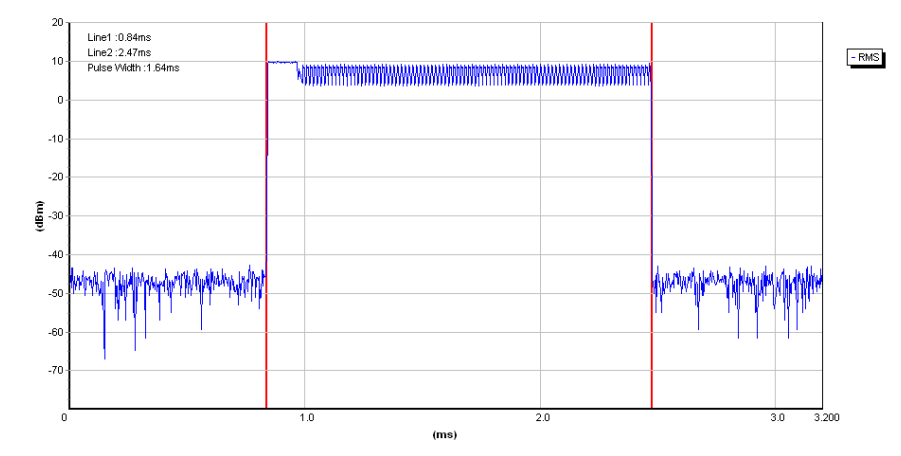


**CH39-2DH5**

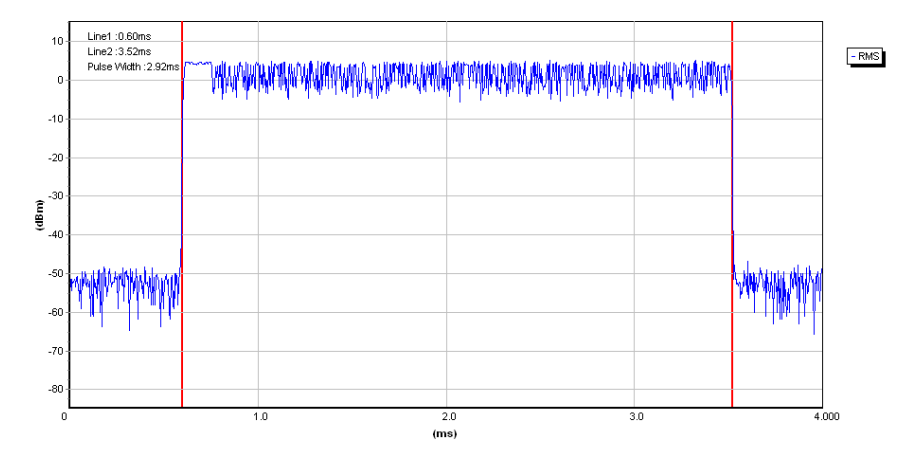




Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits(s)
3DH1	2441 MHz	0.420	0.134	0.4
3DH3	2441 MHz	1.640	0.262	0.4
3DH5	2441 MHz	2.920	0.311	0.4


### CH39-3DH1

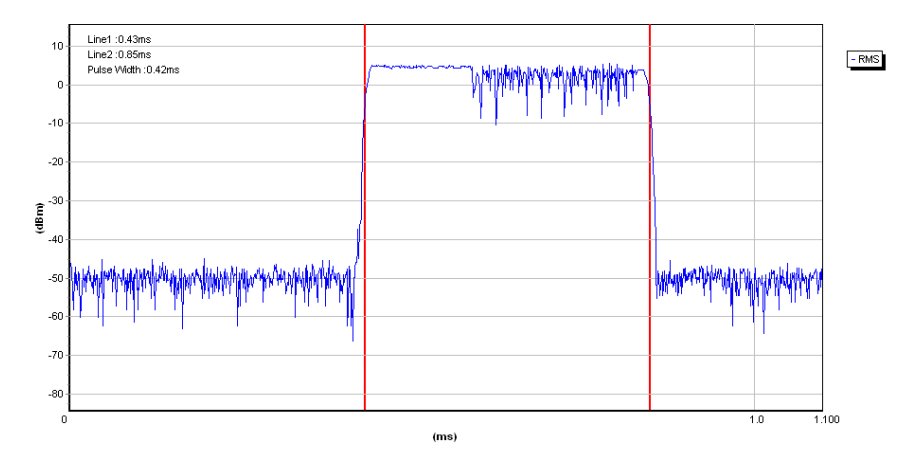

### CH39-3DH3

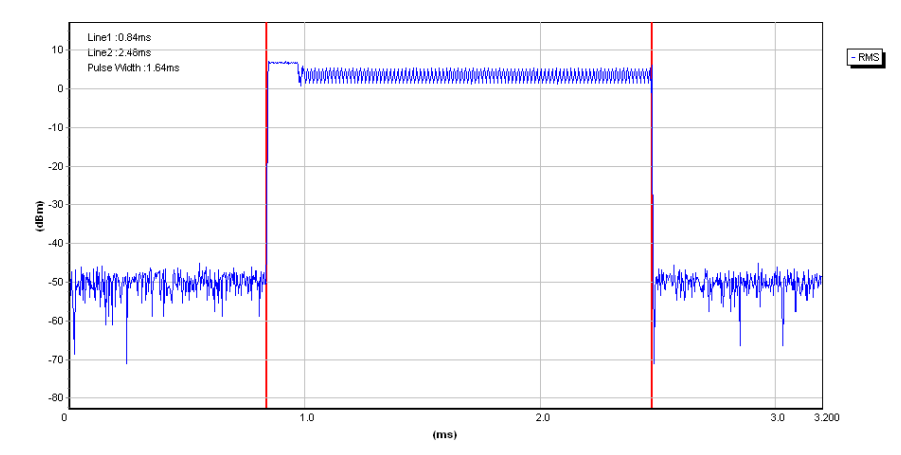

### CH39-3DH5

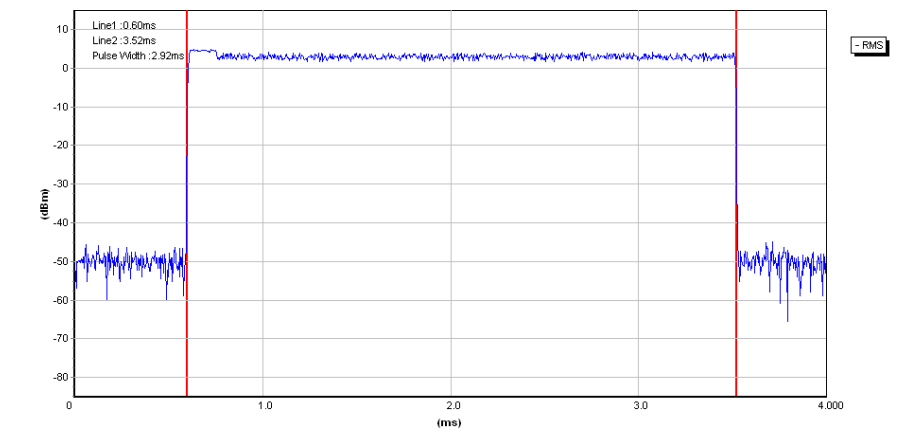



PRECISE TESTING


Report No.: PTCHX03161101701E-FC01

### **13 Antenna Requirement**


According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an PCB printed antenna, it meet the requirement of this section.

## 14 Test Setup

Spurious Emissions  
From 30MHz-1000MHz

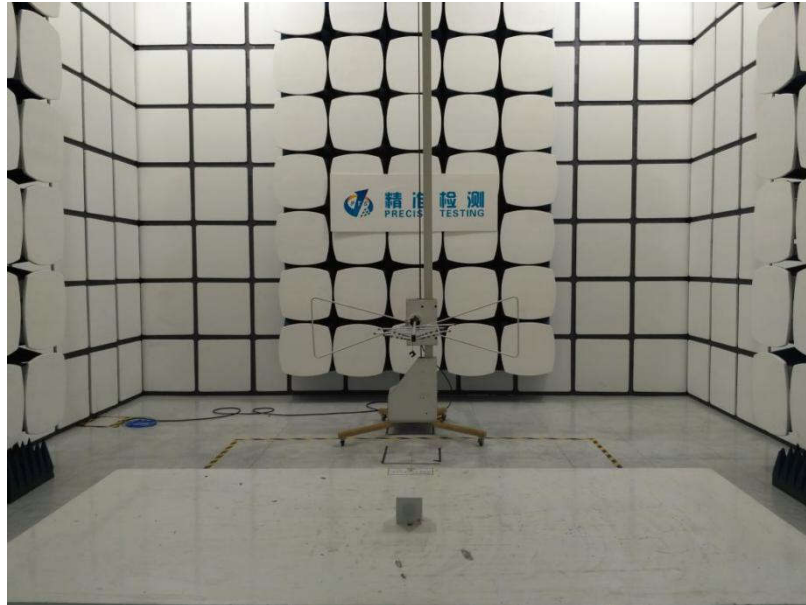

Above 1GHz

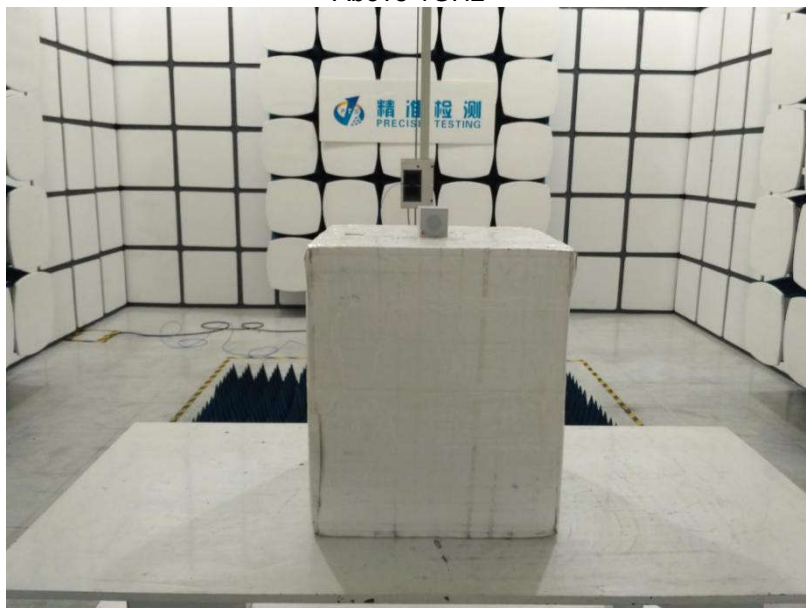

\*\*\*\*\*THE END REPORT\*\*\*\*\*