

# FCC RADIO TEST REPORT

## FCC ID: 2ACPR-GWTN141-2

**Product :** Notebook  
**Trade Mark :** Gateway  
**Model Name :** GWTN141-2BK  
**Family Model :** GWTN141-2BL, GWTN141-2PR,  
GWTN141-2GR, GWTN141-2, N14RP9  
**Report No. :** S20070803202004

### Prepared for

SHENZHEN BMORN TECHNOLOGY CO.,LTD.  
6/F,Hengfang Verteran Industrial Park, Xingye Road, Xixiang,  
Bao'an, Shenzhen, China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China  
Tel.: +86-755-6115 6588  
Fax.: +86-755-6115 6599  
Website:<http://www.ntek.org.cn>

### TEST RESULT CERTIFICATION

**Applicant's name** ..... : SHENZHEN BMORN TECHNOLOGY CO.,LTD.  
**Address** ..... : 6/F,Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, China  
**Manufacturer's Name** ..... : SHENZHEN BMORN TECHNOLOGY CO.,LTD.  
**Address** ..... : 6/F,Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, China

**Product description**

**Product name** ..... : Notebook  
**Model and/or type reference** : GWTN141-2BK  
**Family Model**..... : GWTN141-2BL,GWTN141-2PR,GWTN141-2GR, GWTN141-2,N14RP9

**Standards** ..... : FCC Part15.407

**Test procedure** ..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** .....  
**Date (s) of performance of tests** ..... 08 Jul. 2020 ~ 25 Jul, 2020  
**Date of Issue**..... 25 Jul, 2020  
**Test Result**..... **Pass**

Testing Engineer : Cheng Jiawen  
 (Cheng Jiawen)

Technical Manager : Jason chen  
 (Jason Chen)

Authorized Signatory : Sam . chen  
 (Sam Chen)

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 . GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
<b>3 . TEST REQUIREMENTS</b>	<b>15</b>
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	18
3.3 POWER SPECTRAL DENSITY TEST	30
3.4 26DB & 99% EMISSION BANDWIDTH	33
3.5 MINIMUM 6 DB BANDWIDTH	35
3.6 MAXIMUM CONDUCTED OUTPUT POWER	37
3.7 OUT OF BAND EMISSIONS	41
3.8 SPURIOUS RF CONDUCTED EMISSIONS	43
3.9 FREQUENCY STABILITY MEASUREMENT	44
<b>4. ANTENNA REQUIREMENT</b>	<b>51</b>
4.1 STANDARD REQUIREMENT	51
4.2 EUT ANTENNA	51
<b>5. TEST RESULTS</b>	<b>52</b>
<b>5.2G</b>	<b>52</b>
DUTY CYCLE	52
MAXIMUM CONDUCTED OUTPUT POWER	60
OCCUPIED CHANNEL BANDWIDTH	61
MAXIMUM POWER SPECTRAL DENSITY LEVEL	69
BAND EDGE	77
CONDUCTED RF SPURIOUS EMISSION	83
<b>5.8G</b>	<b>91</b>
DUTY CYCLE	91
MAXIMUM CONDUCTED OUTPUT POWER	99
-6DB BANDWIDTH	100
OCCUPIED CHANNEL BANDWIDTH	108

**Table of Contents**

	<b>Page</b>
<b>MAXIMUM POWER SPECTRAL DENSITY LEVEL</b>	<b>116</b>
<b>BAND EDGE</b>	<b>124</b>
<b>CONDUCTED RF SPURIOUS EMISSION</b>	<b>130</b>



**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

<b>FCC Part15 (15.407) , Subpart E</b>			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

**1.1 FACILITIES AND ACCREDITATIONS**

**FACILITIES**

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

**LABORATORY ACCREDITATIONS AND LISTINGS**

Site Description

- CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L5516.
- IC-Registration : The Certificate Registration Number is 9270A.  
CAB identifier:CN0074
- FCC- Accredited : Test Firm Registration Number: 463705.  
Designation Number: CN1184
- A2LA-Lab. : The Certificate Registration Number is 4298.01  
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
- Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.
- Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

**1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

**2. GENERAL INFORMATION**  
**2.1 GENERAL DESCRIPTION OF EUT**

Equipment	Notebook	
Trade Mark	Gateway	
Model Name	GWTN141-2BK	
Family Model	WTN141-2BL,GWTN141-2PR,GWTN141-2GR,GWTN141-2,N14RP9	
Model Difference	All models are the same circuit and RF module, except the model name.	
FCC ID	2ACPR-GWTN141-2	
Product Description	IEEE 802.11 WLAN Mode Supported <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> 802.11a/n/ac (20MHz channel bandwidth)</li> <li><input checked="" type="checkbox"/> 802.11n/ac (40MHz channel bandwidth)</li> <li><input checked="" type="checkbox"/> 802.11ac (80MHz channel bandwidth)</li> </ul>	
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20):MCS0-MCS8; 802.11ac(VHT40/VHT80):MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n(HT20) / ac(VHT20); 5190-5230MHz for 802.11n(HT40)/ac(VHT40); 5210MHz for 802.11ac(VHT80) <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20)/ ac(VHT20); 5755-5795 MHz for 802.11a/n(HT40)/ ac(VHT40); 5775MHz for 802.11ac(VHT80)
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	PIFA Antenna
	Antenna Gain	1dBi
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Ratings	DC 11.4V from Battery or DC 9V from Adapter.	
Adapter	Model: TYPE60-190-3150I Input: 100-240V~50/60Hz 1.3A Output: 19V---3150mA	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	EM_AP525_V1_0A	
SW Version	Windows 10	



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac( 20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band I (5190-5230MHz):

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11ac(80MHz) band I (5210MHz):

802.11ac(80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac( 20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band IV (5755-5795MHz):

802.11n/ac(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac(80MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-

**2.2 DESCRIPTION OF TEST MODES**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.




Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 /ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 /ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

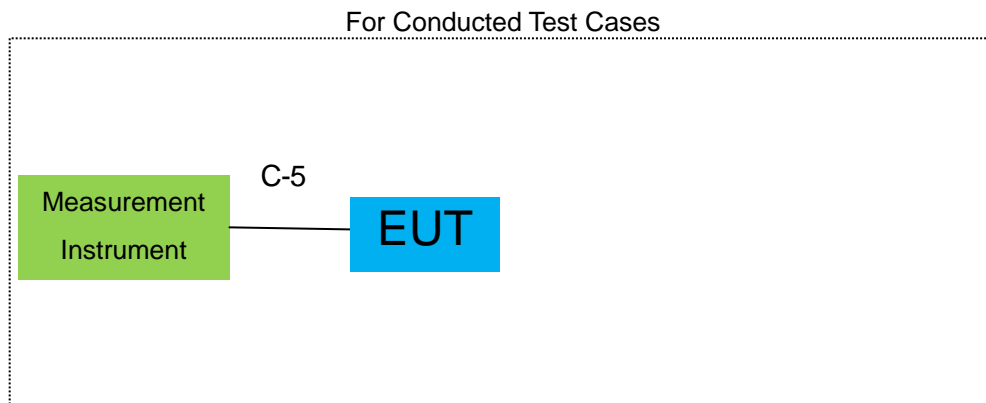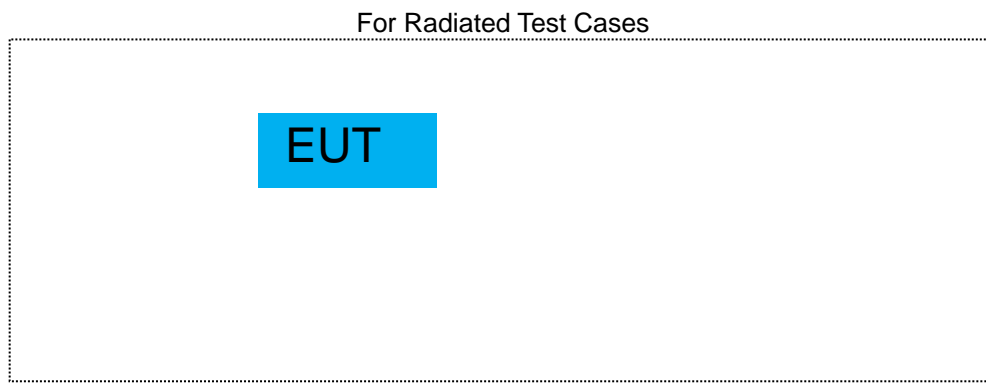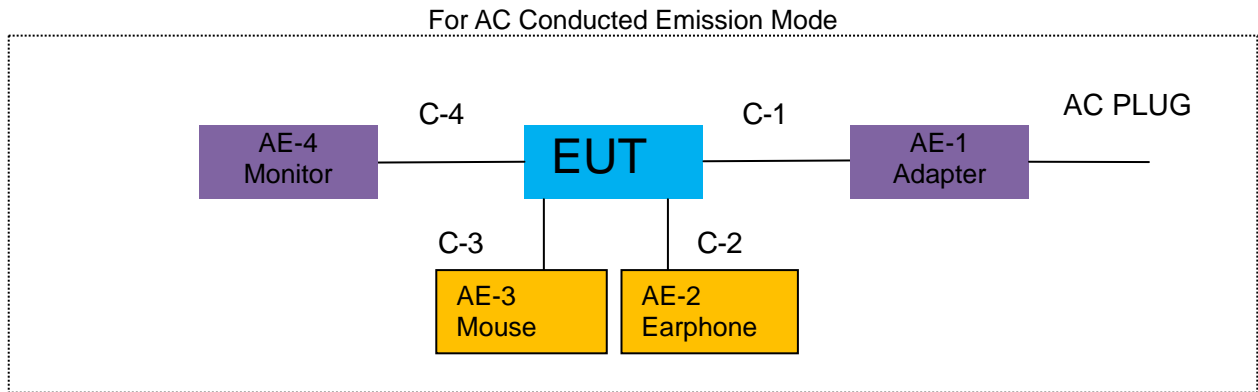

Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.  
 2.EUT built-in battery-powered, the battery is fully-charged.

**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	TYPE60-190-3150I	N/A	Peripherals
AE-2	Earphone	N/A	N/A	N/A	Peripherals
AE-3	Mouse	N/A	N/A	N/A	Peripherals
AE-4	Monitor	SHARP	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	2.0m
C-2	Earphone Cable	NO	NO	1.2m
C-3	Mouse cable	NO	NO	1.0m
C-4	HDMI Cable	NO	NO	1.2m
C-5	RF Cable	YES	NO	1.0m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2019.08.28	2020.08.27	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
8	Amplifier	EMC	EMC051835SE	980246	2019.08.06	2020.08.05	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.12.11	2020.12.10	1 year
10	Power Meter	DARE	RPR3006W	15100041SN084	2019.08.06	2020.08.05	1 year
	USB RF Power Sensor	DARE	RPR3006W	15100041SN084	2019.08.06	2020.08.05	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.6	2022.08.05	3 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2020.08.05	3 year
13	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2020.04.11	2021.04.10	3 year
15	Filter	TRILTHIC	2400MHz	29	2019.08.06	2020.08.05	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2020.04.15	2021.04.14	1 year
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.12.11	2020.12.10	1 year
19	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2021.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

### 3. TEST REQUIREMENTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

##### 3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

##### 3.1.3 TEST CONFIGURATION

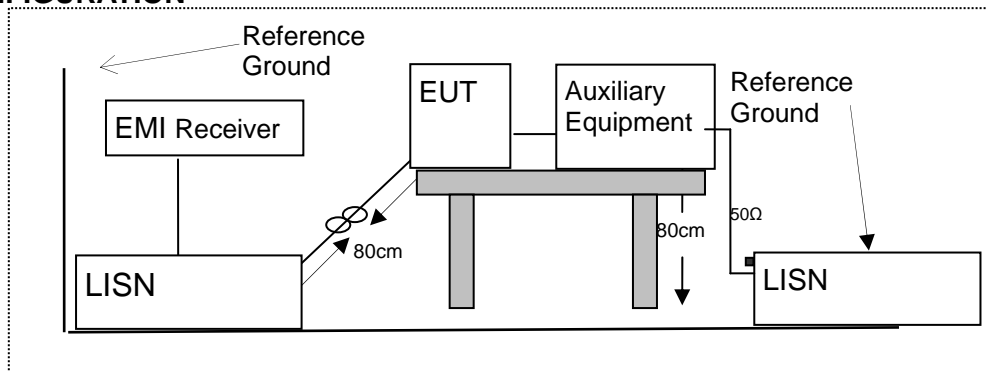

##### 3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Notebook	Model Name :	GWTN141-2BK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 19V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1900	50.38	9.55	59.93	64.03	-4.10	QP
0.1900	37.21	9.55	46.76	54.03	-7.27	AVG
0.2540	43.78	9.54	53.32	61.62	-8.30	QP
0.2540	30.61	9.54	40.15	51.62	-11.47	AVG
0.3140	39.24	9.54	48.78	59.86	-11.08	QP
0.3140	27.09	9.54	36.63	49.86	-13.23	AVG
0.6019	23.60	9.55	33.15	46.00	-12.85	AVG
4.8299	38.38	9.62	48.00	56.00	-8.00	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

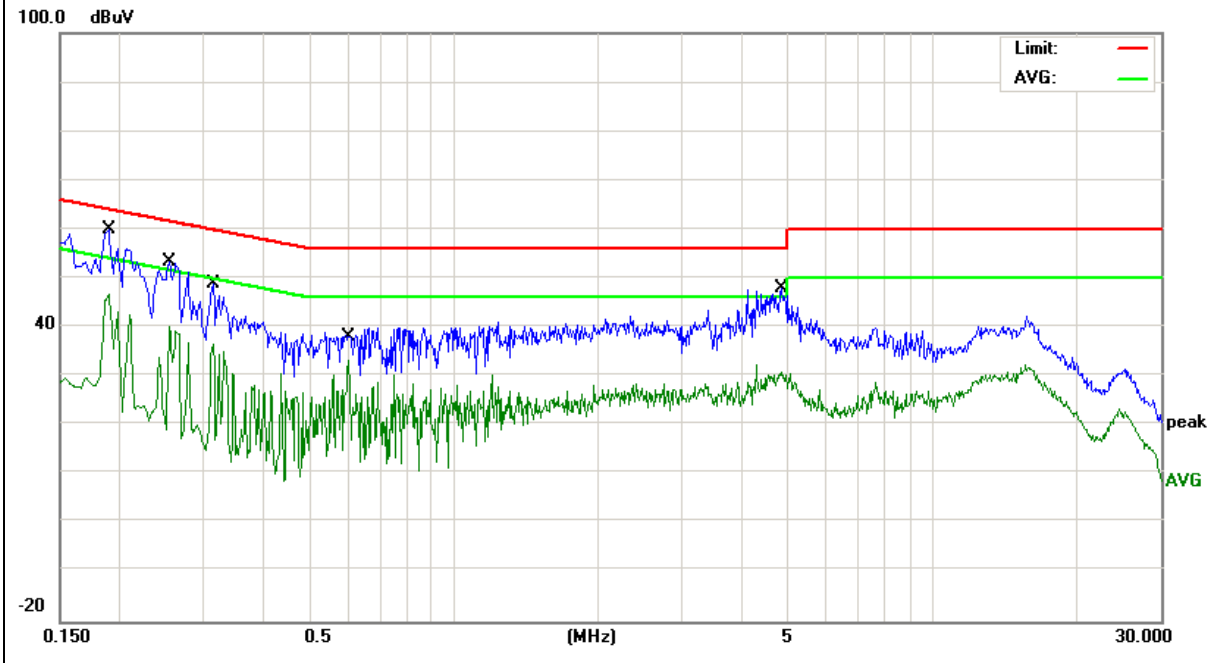




EUT :	Notebook	Model Name :	GWTN141-2BK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 19V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1859	50.24	9.54	59.78	64.21	-4.43	QP
0.1859	36.82	9.54	46.36	54.21	-7.85	AVG
0.2580	44.18	9.53	53.71	61.49	-7.78	QP
0.2700	31.88	9.53	41.41	51.12	-9.71	AVG
0.3099	39.52	9.53	49.05	59.97	-10.92	QP
0.4380	34.98	9.54	44.52	57.10	-12.58	QP
0.5978	25.52	9.54	35.06	46.00	-10.94	AVG
4.5297	24.58	9.61	34.19	46.00	-11.81	AVG
4.7938	39.58	9.61	49.19	56.00	-6.81	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

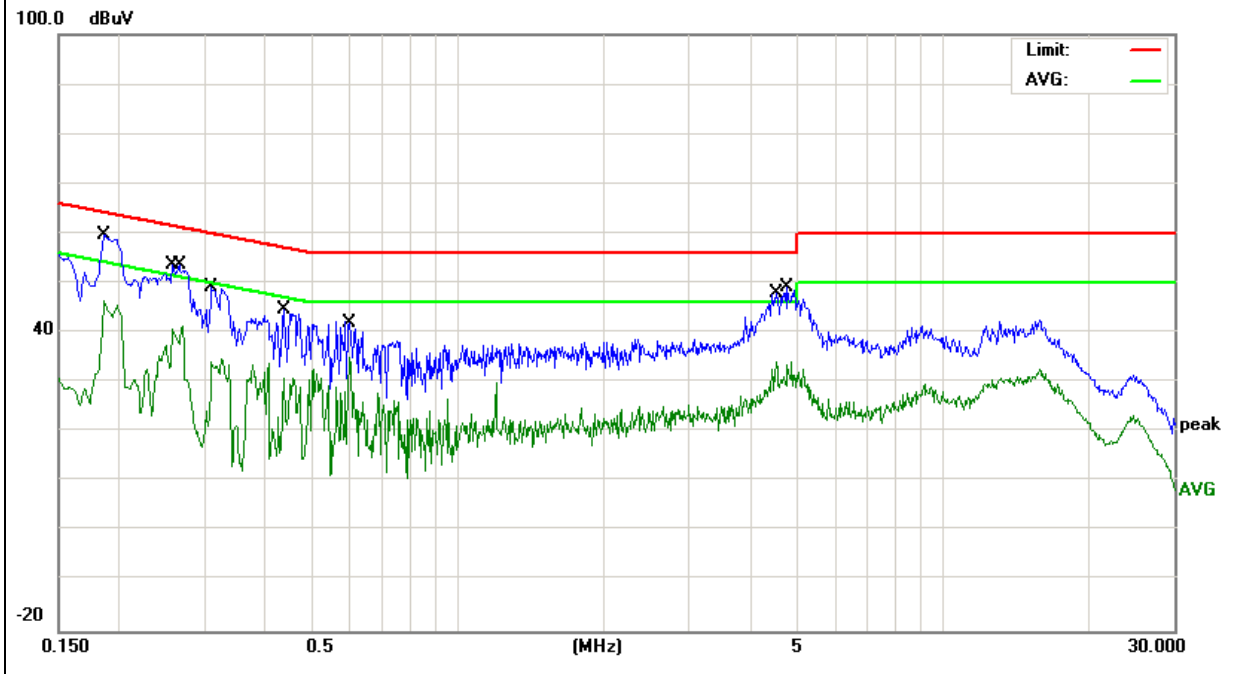

**3.2 RADIATED EMISSION MEASUREMENT**

**3.2.1 APPLICABLE STANDARD**

According to FCC Part 15.407(b) and 15.209

**3.2.2 CONFORMANCE LIMIT**

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark : 1. Emission level in dBuV/m=20 log (uV/m)  
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
 3. For Frequency 9kHz~30MHz:  
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.  
 For Frequency above 30MHz:  
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

**3.2.3 MEASURING INSTRUMENTS**


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

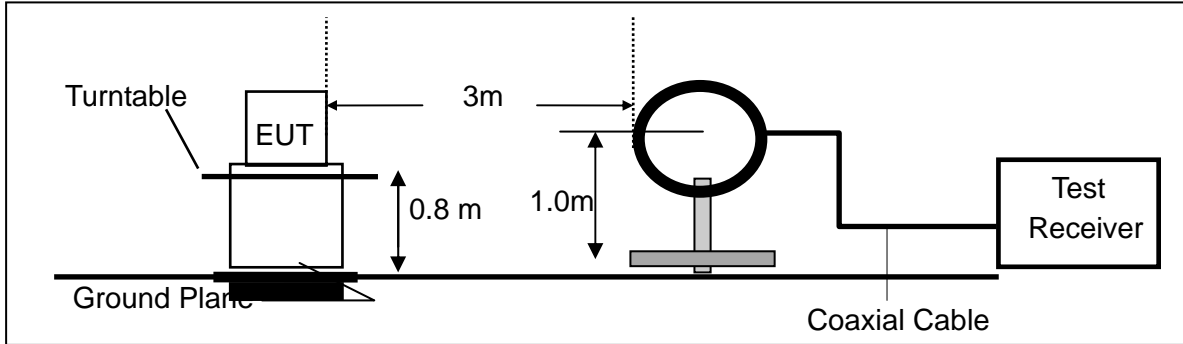

(b) For radiated emissions from 30MHz to 1000MHz

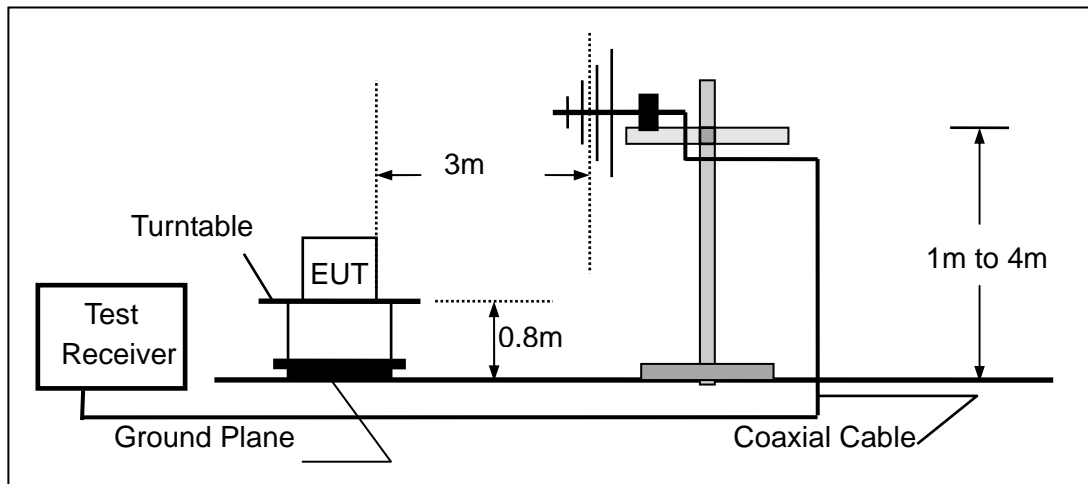

(c) For radiated emissions above 1000MHz

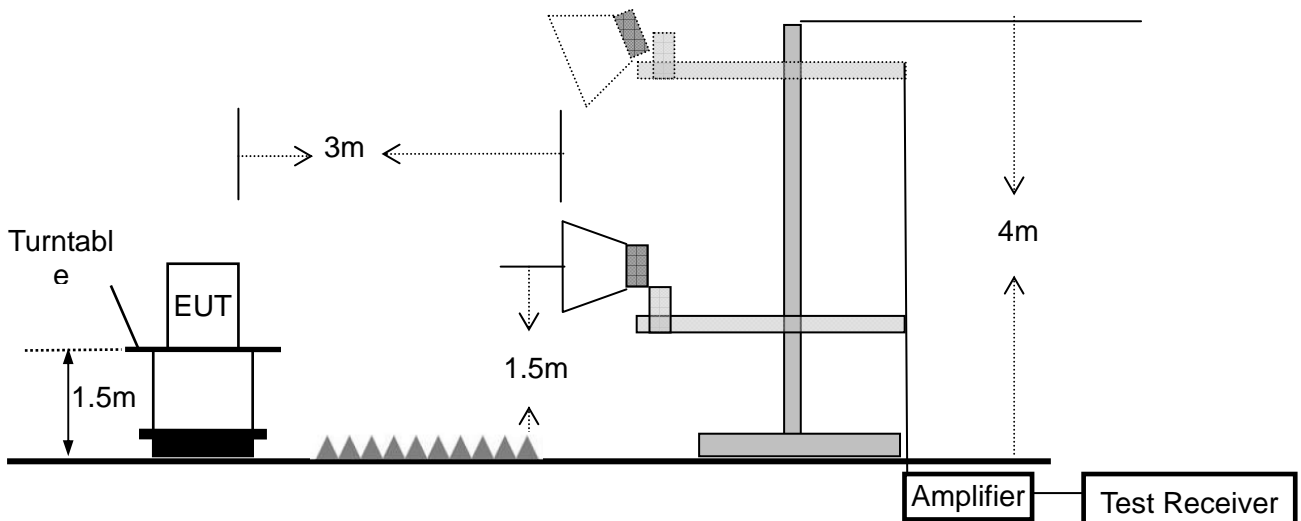

**3.2.5 TEST PROCEDURE**

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**3.2.6 TEST RESULTS (9KHz – 30 MHz)**

EUT:	Notebook	Model Name. :	GWTN141-2BK
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


**3.2.7 TEST RESULTS (30MHz – 1GHz)**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX- 802.11a (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	46.6664	19.52	10.73	30.25	40.00	-9.75	QP
V	117.3603	25.88	12.42	38.30	43.50	-5.20	QP
V	166.0680	23.02	10.65	33.67	43.50	-9.83	QP
V	399.0302	24.17	17.86	42.03	46.00	-3.97	QP
V	556.7744	17.20	22.44	39.64	46.00	-6.36	QP
V	842.1295	18.12	26.16	44.28	46.00	-1.72	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

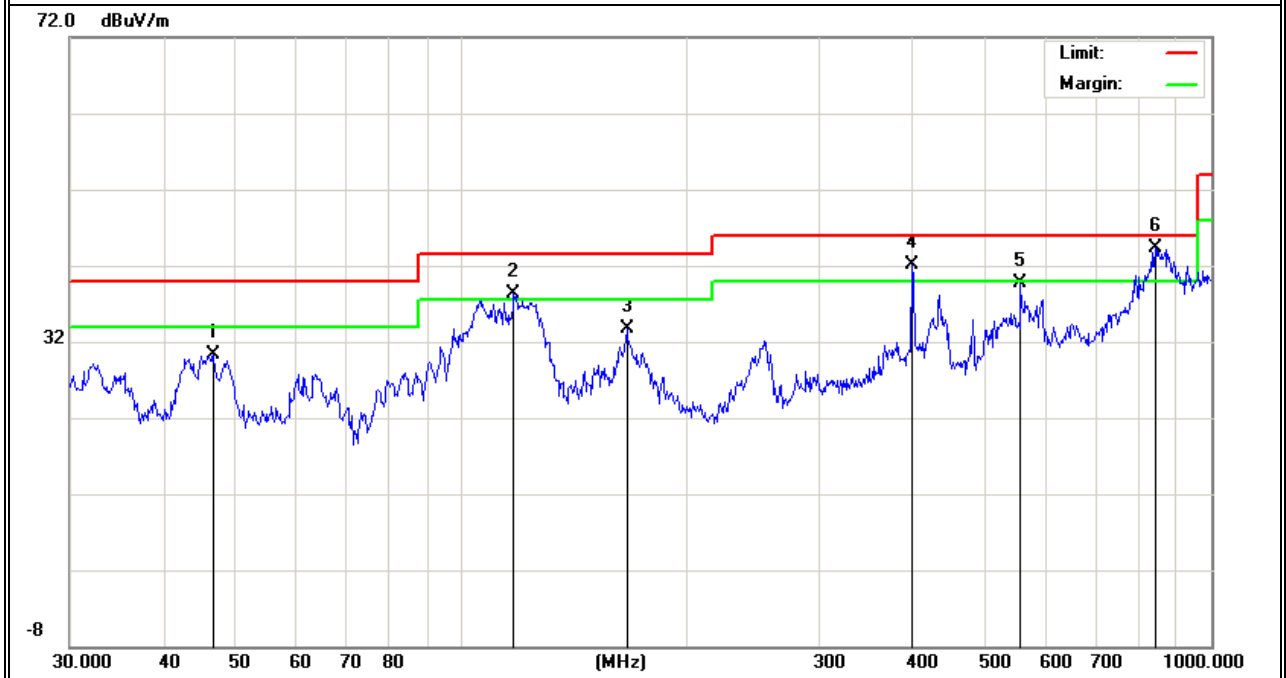

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	61.3463	24.78	5.92	30.70	40.00	61.3463	QP
H	118.6014	20.66	12.43	33.09	43.50	118.6014	QP
H	399.0302	23.33	17.86	41.19	46.00	399.0302	QP
H	432.5457	22.67	18.37	41.04	46.00	432.5457	QP
H	742.2587	16.88	25.06	41.94	46.00	742.2587	QP
H	890.7278	15.87	26.38	42.25	46.00	890.7278	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

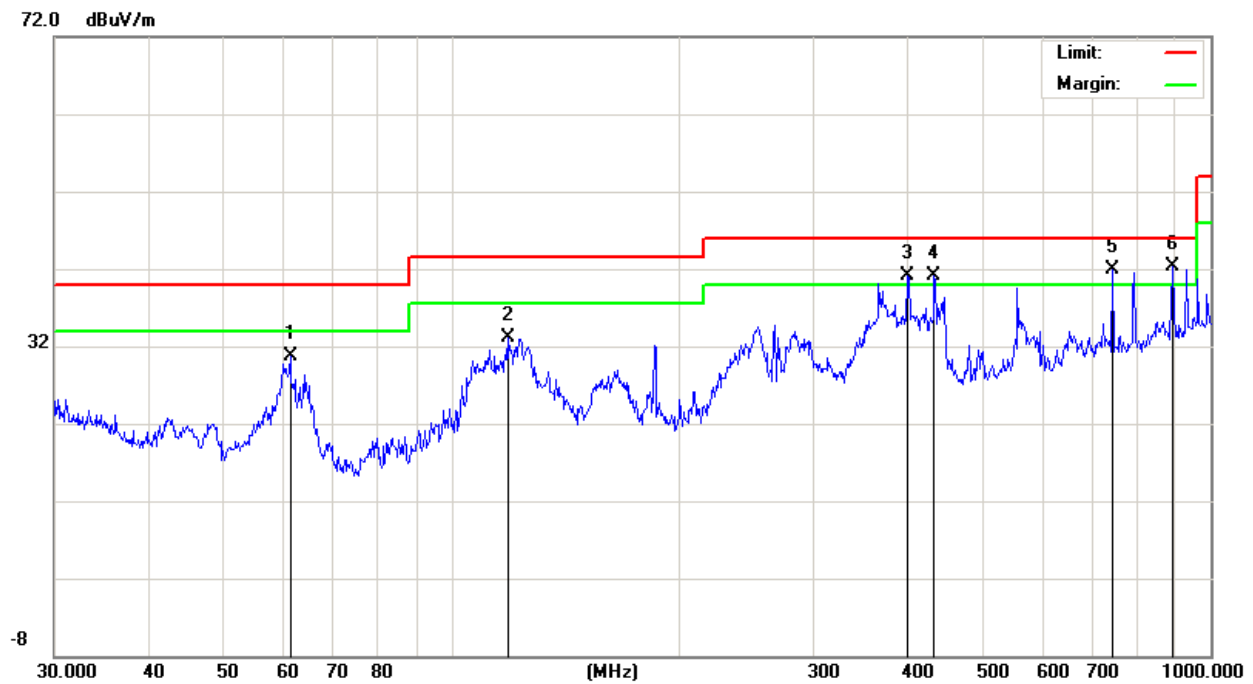

**3.2.8 TEST RESULTS (1GHz-18GHz)**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX(5.2G) - 802.11a_5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	56.47	5.94	35.40	44.00	53.81	68.2	-14.39	AV
Vertical	10360	55.97	8.46	39.75	44.50	59.68	68.2	-8.52	Pk
Vertical	15540	56.39	10.12	38.80	44.10	61.21	74	-12.79	Pk
Vertical	15540	40.89	10.12	38.80	42.70	47.11	54	-6.89	AV
Horizontal	2981	55.75	5.94	35.18	44.00	52.87	68.2	-15.33	AV
Horizontal	10360	58.92	8.46	38.71	44.50	61.59	68.2	-6.61	Pk
Horizontal	15540	59.38	10.12	38.38	44.10	63.78	74	-10.22	Pk
Horizontal	15540	42.19	10.12	38.38	44.10	46.59	54	-7.41	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3561	60.16	6.48	36.35	44.05	58.94	68.2	-9.26	AV
Vertical	10400	58.64	8.47	37.88	44.51	60.48	68.2	-7.72	Pk
Vertical	15600	60.51	10.12	38.80	44.10	65.33	74	-8.67	Pk
Vertical	15600	42.65	10.12	38.80	42.70	48.87	54	-5.13	AV
Horizontal	3363	59.51	6.48	36.37	44.05	58.31	68.2	-9.89	AV
Horizontal	10400	55.33	8.47	38.64	44.50	57.94	68.2	-10.26	Pk
Horizontal	15600	56.75	10.12	38.38	44.10	61.15	74	-12.85	Pk
Horizontal	15600	42.71	10.12	38.38	44.10	47.11	54	-6.89	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926	55.4	7.10	37.24	43.50	56.24	74	-17.76	Pk
Vertical	3926	43.7	7.10	37.24	43.50	44.54	54	-9.46	AV
Vertical	10480	56.66	8.46	37.68	44.50	58.30	68.2	-9.90	Pk
Vertical	15720	57.6	10.12	38.80	44.10	62.42	74	-11.58	Pk
Vertical	15720	42.25	10.12	38.80	42.70	48.47	54	-5.53	AV
Horizontal	3885	58.47	7.10	37.24	43.50	59.31	74	-14.69	Pk
Horizontal	3885	40.89	7.10	37.24	43.50	41.73	54	-12.27	AV
Horizontal	10480	59.75	8.46	38.57	44.50	62.28	68.2	-5.92	Pk
Horizontal	15720	57.44	10.12	38.38	44.10	61.84	74	-12.16	Pk
Horizontal	15720	44.58	10.12	38.38	44.10	48.98	54	-5.02	AV

Note:"802.11a (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX (5.8G) -- 802.11ac20_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806	59.68	5.94	35.40	44.00	57.02	74.00	-21.03	Pk
Vertical	2806	40.82	5.94	35.40	44.00	38.16	54.00	-13.48	AV
Vertical	11490	55.38	8.46	39.75	44.50	59.09	74.00	-10.15	Pk
Vertical	11490	41.71	8.46	39.75	44.50	45.42	54.00	-5.75	AV
Vertical	17235	57.21	10.12	38.80	44.10	62.03	68.20	-3.70	Pk
Horizontal	2911	58.78	5.94	35.18	44.00	55.90	68.20	-15.58	Pk
Horizontal	11490	60.89	8.46	38.71	44.50	63.56	74.00	-14.37	Pk
Horizontal	11490	44.59	8.46	38.71	44.50	47.26	54.00	-6.74	AV
Horizontal	17235	60.44	10.12	38.38	44.10	64.84	68.20	-3.36	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763	57.57	6.48	36.35	44.05	56.35	74.00	-17.65	Pk
Vertical	3763	44.53	6.48	36.35	44.05	43.31	54.00	-10.69	AV
Vertical	11570	55.93	8.47	37.88	44.51	57.77	74.00	-16.23	Pk
Vertical	11570	44.44	8.47	37.88	44.51	46.28	54.00	-7.72	AV
Vertical	17355	58.49	10.12	38.8	44.10	63.31	68.20	-4.89	Pk
Horizontal	3561	57.02	6.48	36.37	44.05	55.82	68.20	-12.38	Pk
Horizontal	11570	57.33	8.47	38.64	44.50	59.94	74.00	-14.06	Pk
Horizontal	11570	44.10	8.47	38.64	44.50	46.71	54.00	-7.29	AV
Horizontal	17355	55.32	10.12	38.38	44.10	59.72	74.00	-8.48	Pk
High Channel (5825 MHz)-Above 1G									
Vertical	3907	-57.57	7.10	37.24	43.50	-56.73	74.00	-15.59	Pk
Vertical	3907	-42.21	7.10	37.24	43.50	-41.37	54.00	-10.95	AV
Vertical	11650	55.11	8.46	37.68	44.50	56.75	74.00	-17.25	Pk
Vertical	11650	-44.60	8.46	37.68	44.50	-42.96	54.00	-7.76	AV
Vertical	17475	-57.38	10.12	38.8	44.10	-52.56	68.20	-6.00	Pk
Horizontal	3912	-58.95	7.10	37.24	43.50	-58.11	74.00	-14.21	Pk
Horizontal	3912	41.85	7.10	37.24	43.50	42.69	54.00	-11.31	AV
Horizontal	11650	60.23	8.46	38.57	44.50	62.76	74.00	-11.24	Pk
Horizontal	11650	43.26	8.46	38.57	44.50	45.79	54.00	-8.21	AV
Horizontal	17475	58.29	10.12	38.38	44.10	62.69	68.20	-5.51	Pk

Note:"802.11ac20 (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.2.9 TEST RESULTS (18GHz-40GHz)**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz, TX (5.8G)-802.11n20 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G  
Horizontal

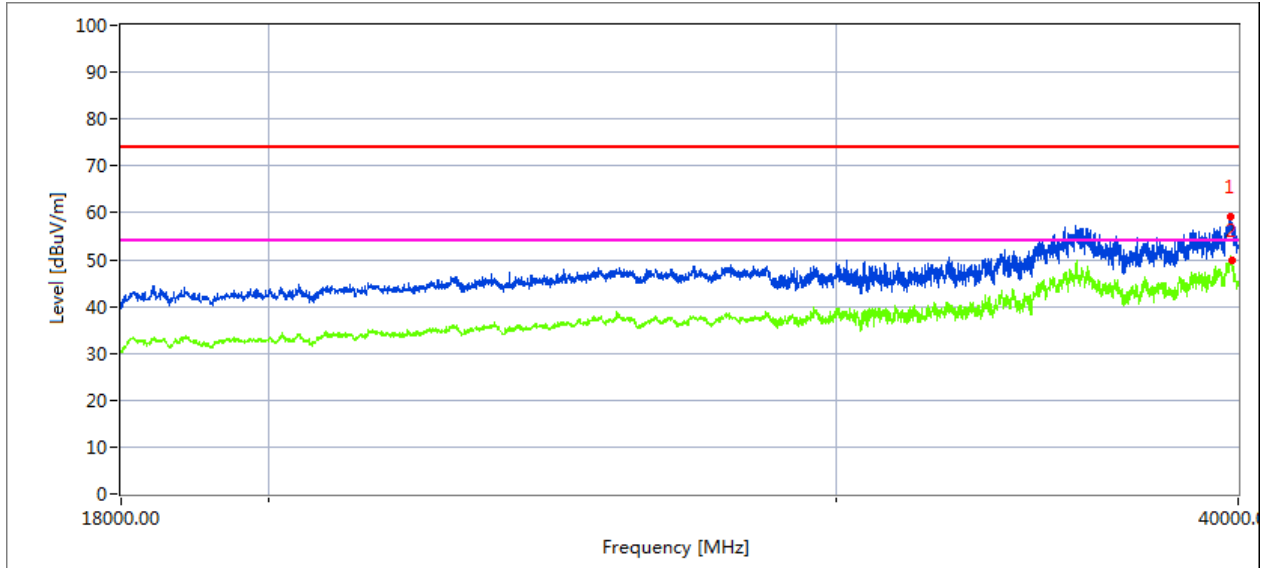

**Measurement Result:**

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39782.635	39.33	20.09	44.07	43.48	60.01	74.00	13.99	Peak
39835.956	29.53	20.09	44.04	43.48	50.18	54.00	3.82	AVG

Vertical

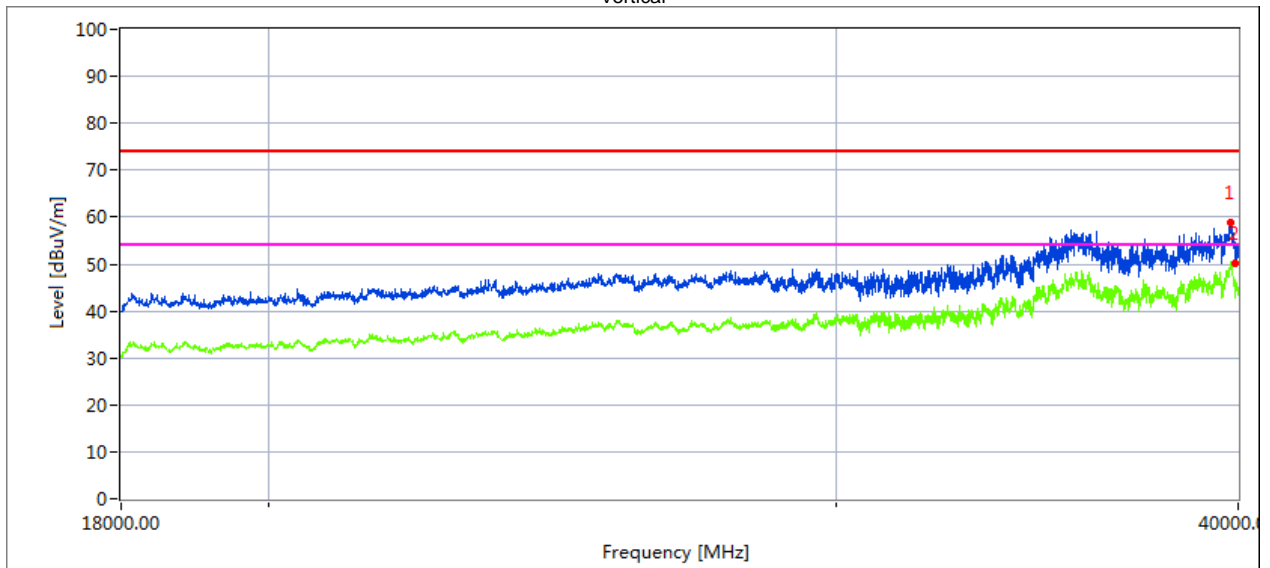


**Measurement Result:**

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39798.917	42.37	19.11	42.73	44.61	59.60	74.00	14.40	Peak
39926.394	32.19	19.11	42.73	44.61	49.42	54.00	4.58	AVG

High Channel (5240 MHz)-Above 1G


Horizontal

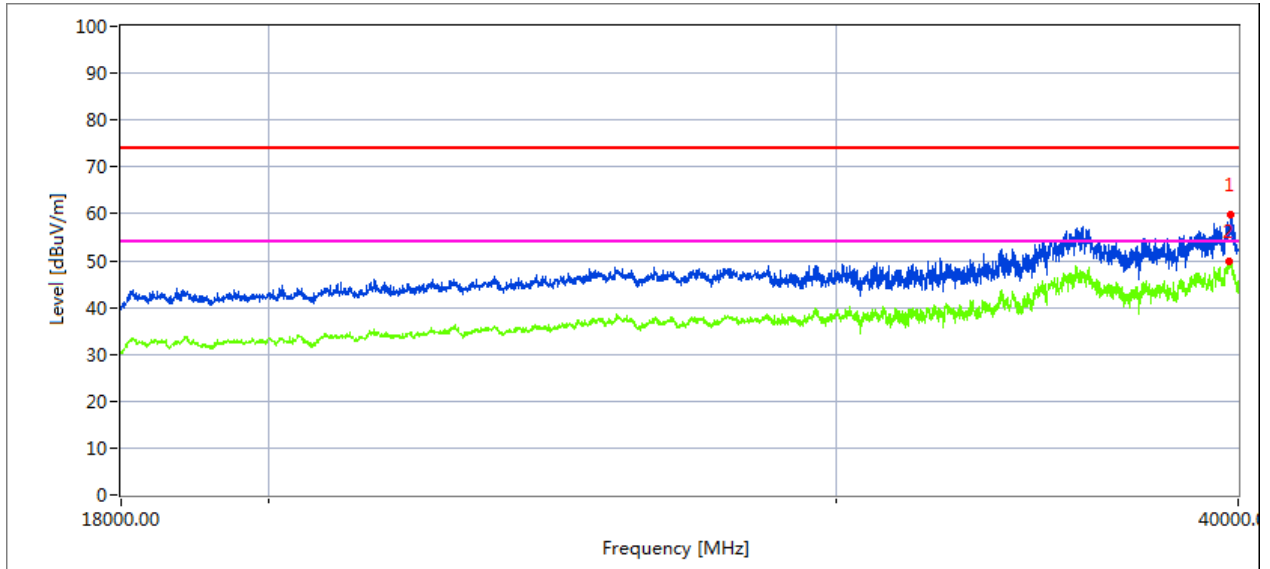

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39799.242	39.23	20.09	44.07	43.48	59.91	74.00	14.09	Peak
39727.051	29.29	20.09	44.04	43.48	49.94	54.00	4.06	AVG

Vertical

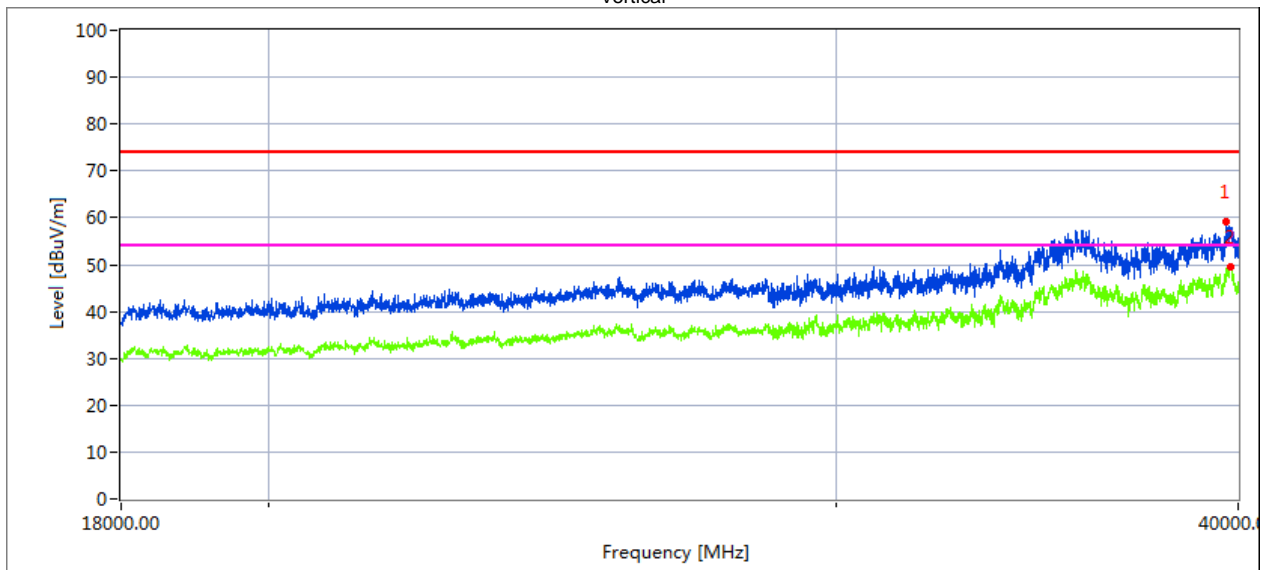


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39672.093	37.53	20.09	44.07	43.48	58.21	74.00	15.79	Peak
39778.268	28.08	20.09	44.04	43.48	48.73	54.00	5.27	AVG

Low Channel (5745 MHz)-Above 1G


Horizontal

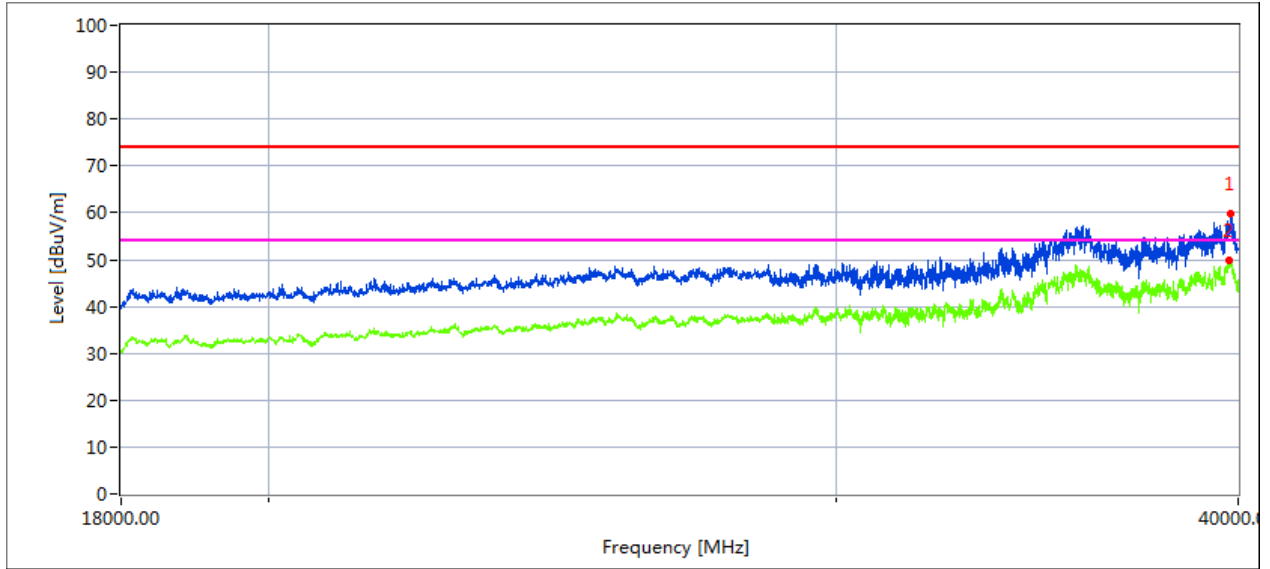

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39799.242	39.23	20.09	44.07	43.48	59.91	74.00	14.09	Peak
39727.051	29.29	20.09	44.04	43.48	49.94	54.00	4.06	AVG

Vertical

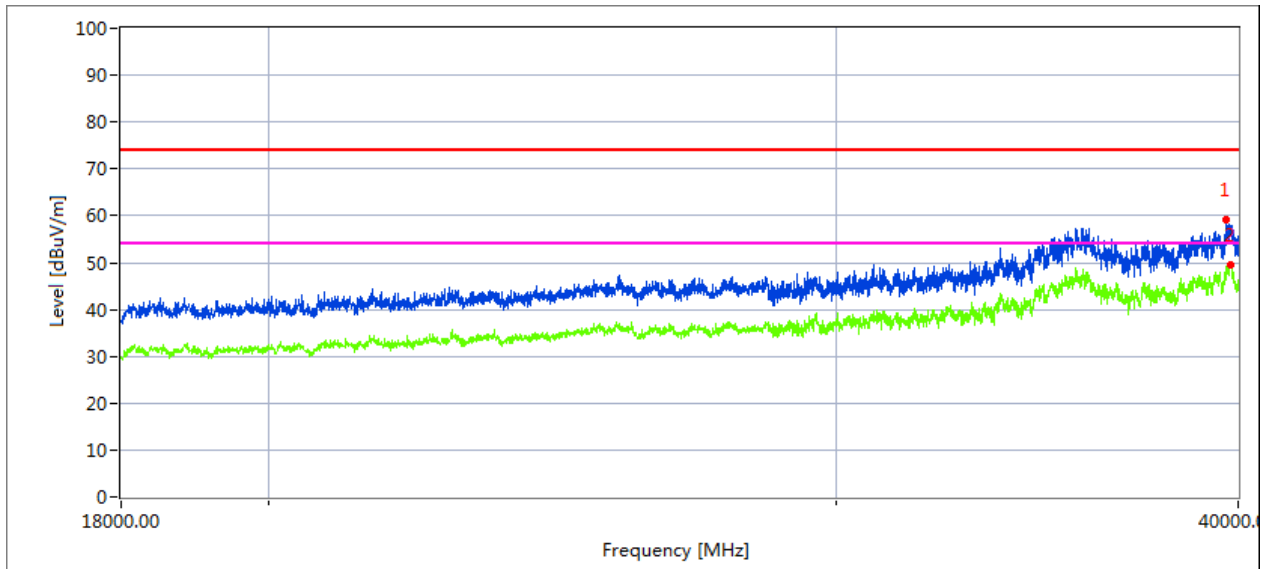


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39672.093	37.53	20.09	44.07	43.48	58.21	74.00	15.79	Peak
39778.268	28.08	20.09	44.04	43.48	48.73	54.00	5.27	AVG

High Channel (5825 MHz)-Above 1G


Horizontal

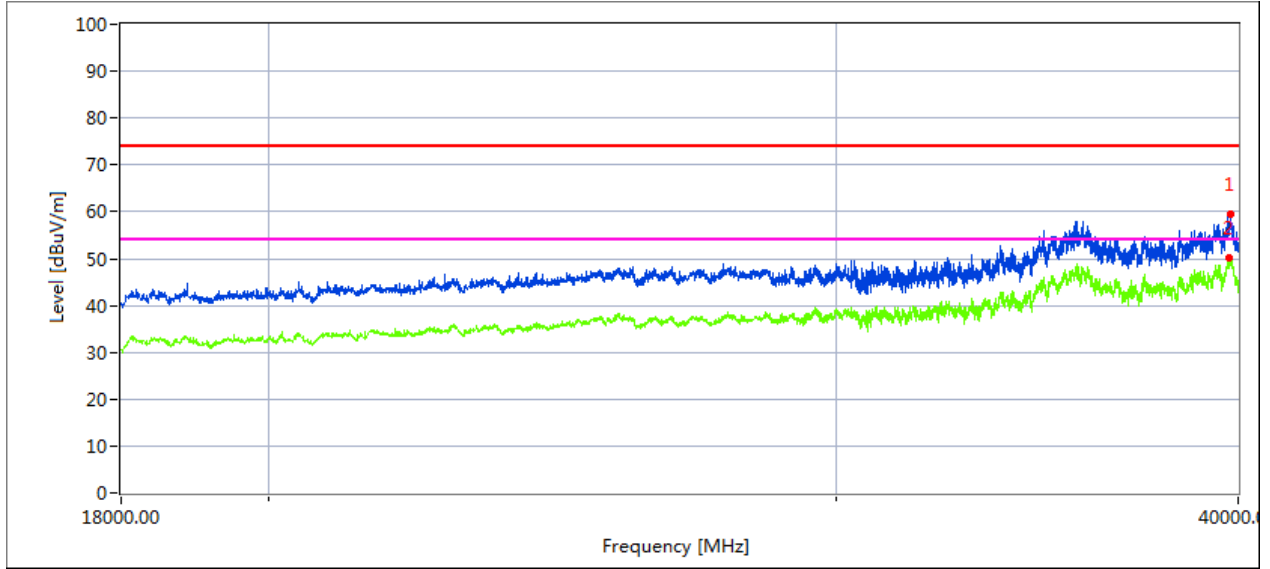

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39765.094	42.11	19.11	42.63	43.48	60.37	74.00	13.63	Peak
39743.270	30.58	19.12	42.63	43.48	48.85	54.00	5.15	AVG

Vertical

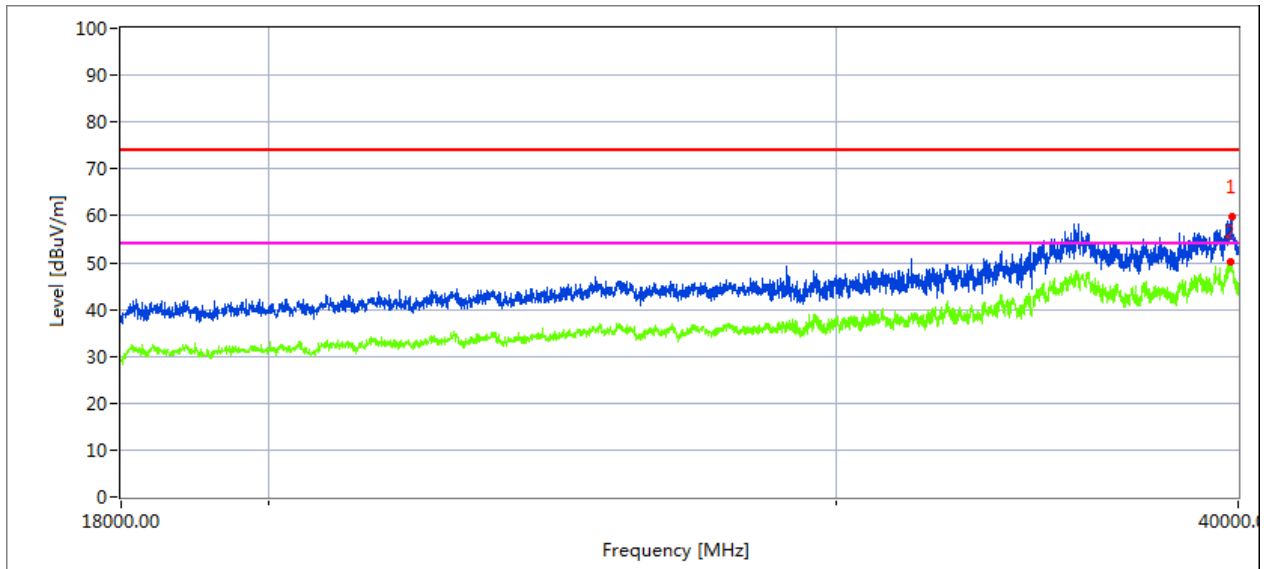

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39815.400	39.05	20.10	44.10	43.22	60.03	74.00	13.97	Peak
39773.022	28.99	20.10	44.10	43.22	49.97	54.00	4.03	AVG

### 3.3 POWER SPECTRAL DENSITY TEST

#### 3.3.1 Applied procedures / limit

##### According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**3.3.2 TEST PROCEDURE**

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

**3.3.3 DEVIATION FROM STANDARD**

No deviation.

**3.3.4 TEST SETUP**



**3.3.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.



**3.4 26DB & 99% EMISSION BANDWIDTH**

**3.4.1 Applied procedures / limit**


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

**3.4.2 TEST PROCEDURE**

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW ≥ 3 · RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

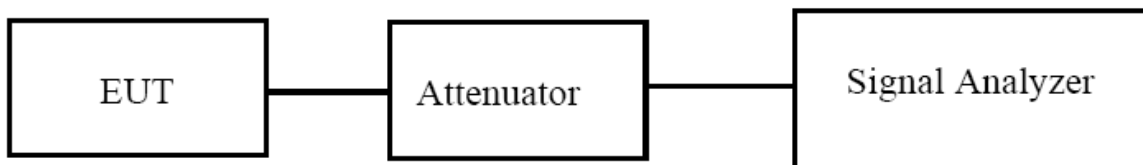

**3.4.3 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.4.4 TEST RESULTS**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC11.4V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

**3.5 MINIMUM 6 DB BANDWIDTH**

**3.5.1 Applied procedures / limit**

**According to FCC §15.407(e)**

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**3.5.2 TEST PROCEDURE**


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**3.5.3 DEVIATION FROM STANDARD**

No deviation.

**3.5.4 TEST SETUP**

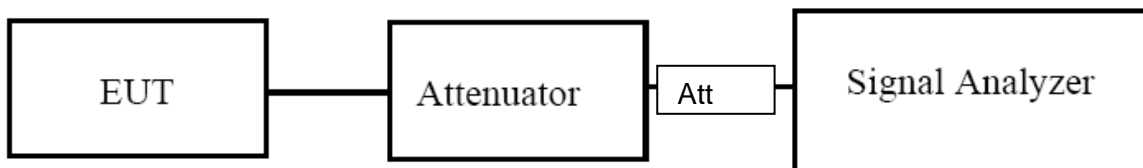

**3.5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.5.6 TEST RESULTS**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

**3.6 MAXIMUM CONDUCTED OUTPUT POWER**

**3.6.1 PPLIED PROCEDURES / LIMIT**

**According to FCC §15.407**

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

**3.6.2 TEST PROCEDURE**

· Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

**1. Device Configuration**

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)**

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq 98$  percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 3.6.3 DEVIATION FROM STANDARD

No deviation.

### 3.6.4 TEST SETUP

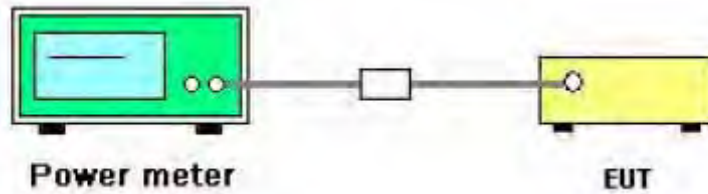

### 3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.6.6 TEST RESULTS**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.



**3.7 OUT OF BAND EMISSIONS**

**3.7.1 Applicable Standard**

**According to FCC §15.407(b)**

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


**3.7.2 Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**3.7.3 DEVIATION FROM STANDARD**

No deviation.

**3.7.4 TEST SETUP**

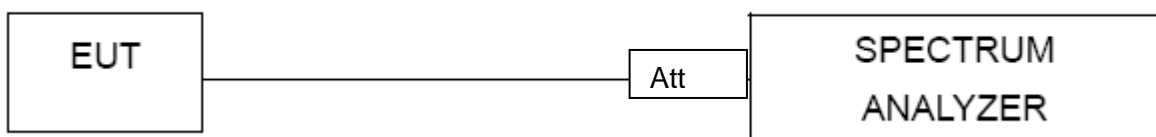

**3.7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.7.6 TEST RESULTS**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V

Test data reference attachment.

### 3.8 SPURIOUS RF CONDUCTED EMISSIONS

#### 3.8.1 Conformance Limit

According to FCC 15.407(b)(1) (2) (3)

#### 3.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 3.8.3 Test Setup

Please refer to Section 6.1 of this test report.

#### 3.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

#### 3.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

### 3.9 FREQUENCY STABILITY MEASUREMENT


#### 3.9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

#### 3.9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm .
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^{\circ}\text{C}$ ~ $70^{\circ}\text{C}$ .

#### 3.9.3 TEST SETUP LAYOUT

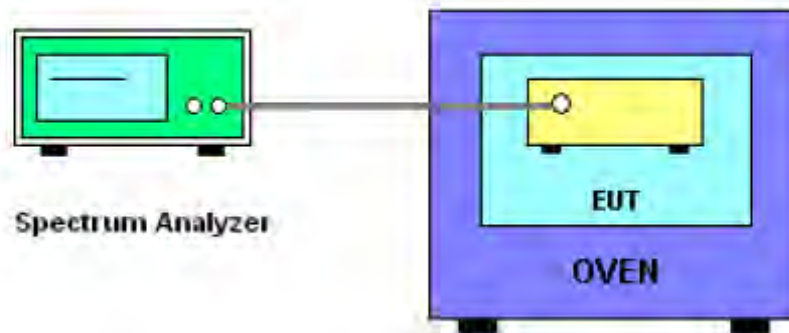

#### 3.9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.9.5 TEST RESULTS**

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

**Voltage vs. Frequency Stability**

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5180.0375	5180	0.0375	-7.2475
		V max (V)	12.54	5180.0738	5180	0.0738	-14.2525
		V min (V)	10.26	5180.0456	5180	0.0456	-8.7943
Limits				Within 5150-5250MHz			
Result				Complies			

**Temperature vs. Frequency Stability**

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	11.4	T (°C)	-20	5180.0318	5180	0.0318	-6.1344
		T (°C)	-10	5180.0018	5180	0.0018	-0.3392
		T (°C)	0	5180.0685	5180	0.0685	-13.2193
		T (°C)	10	5180.0386	5180	0.0386	-7.4453
		T (°C)	20	5180.0286	5180	0.0286	-5.5293
		T (°C)	30	5180.0604	5180	0.0604	-11.6634
		T (°C)	40	5180.0087	5180	0.0087	-1.6851
		T (°C)	50	5180.0648	5180	0.0648	-12.5084
		T (°C)	60	5180.0360	5180	0.0360	-6.9562
T (°C)	70	5180.0375	5180	0.0375	-7.2372		
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5200.0582	5200	0.0582	-11.1940
		V max (V)	12.54	5200.0656	5200	0.0656	-12.6112
		V min (V)	10.26	5200.0133	5200	0.0133	-2.5594
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	11.4	T (°C)	-20	5200.0074	5200	0.0074	-1.4254
		T (°C)	-10	5200.0143	5200	0.0143	-2.7476
		T (°C)	0	5200.0538	5200	0.0538	-10.3382
		T (°C)	10	5200.0148	5200	0.0148	-2.8422
		T (°C)	20	5200.0757	5200	0.0757	-14.5613
		T (°C)	30	5200.0183	5200	0.0183	-3.5266
		T (°C)	40	5200.0466	5200	0.0466	-8.9671
		T (°C)	50	5200.0325	5200	0.0325	-6.2490
		T (°C)	60	5200.0764	5200	0.0764	-14.6947
		T (°C)	70	5200.0504	5200	0.0504	-9.6844
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5240.0454	5240	0.0454	-8.6733
		V max (V)	12.54	5240.0679	5240	0.0679	-12.9563
		V min (V)	10.26	5240.0681	5240	0.0681	-12.9978
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	11.4	T (°C)	-20	5240.0761	5240	0.0761	-14.5217
		T (°C)	-10	5240.0722	5240	0.0722	-13.7747
		T (°C)	0	5240.0490	5240	0.0490	-9.3439
		T (°C)	10	5240.0073	5240	0.0073	-1.3977
		T (°C)	20	5240.0196	5240	0.0196	-3.7327
		T (°C)	30	5240.0117	5240	0.0117	-2.2313
		T (°C)	40	5240.0255	5240	0.0255	-4.8747
		T (°C)	50	5240.0541	5240	0.0541	-10.3194
		T (°C)	60	5240.0455	5240	0.0455	-8.6827
T (°C)	70	5240.0587	5240	0.0587	-11.2095		
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Notebook	Model Name. :	GWTN141-2BK
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5745.0631	5745	0.06314	-10.9908
		V max (V)	12.54	5745.0703	5745	0.07030	-12.2371
		V min (V)	10.26	5745.0650	5745	0.06498	-11.3112
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5745.0501	5745	0.05013	-8.7255
		T (°C)	-10	5745.0504	5745	0.05042	-8.7763
		T (°C)	0	5745.0023	5745	0.00231	-0.4013
		T (°C)	10	5745.0797	5745	0.07973	-13.8777
		T (°C)	20	5745.0774	5745	0.07739	-13.4700
		T (°C)	30	5745.0763	5745	0.07635	-13.2890
		T (°C)	40	5745.0530	5745	0.05296	-9.2189
		T (°C)	50	5745.0503	5745	0.05034	-8.7632
		T (°C)	60	5745.0441	5745	0.04407	-7.6709
		T (°C)	70	5745.0295	5745	0.02950	-5.1347
Limits				Within 5745-5850MHz			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5785.0036	5785	0.00363	-0.6280
		V max (V)	12.54	5785.0701	5785	0.07014	-12.1250
		V min (V)	10.26	5785.0292	5785	0.02918	-5.0439
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5785.0333	5785	0.03326	-5.7502
		T (°C)	-10	5785.0182	5785	0.01816	-3.1391
		T (°C)	0	5785.0398	5785	0.03976	-6.8733
		T (°C)	10	5785.0635	5785	0.06350	-10.9763
		T (°C)	20	5785.0416	5785	0.04164	-7.1977
		T (°C)	30	5785.0743	5785	0.07427	-12.8381
		T (°C)	40	5785.0423	5785	0.04226	-7.3053
		T (°C)	50	5785.0711	5785	0.07107	-12.2848
		T (°C)	60	5785.0622	5785	0.06225	-10.7604
		T (°C)	70	5785.0721	5785	0.07210	-12.4637
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	11.40	5825.0404	5825	0.04043	-6.9407
		V max (V)	12.54	5825.0614	5825	0.06142	-10.5438
		V min (V)	10.26	5825.0188	5825	0.01876	-3.2213
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5825.0339	5825	0.03395	-5.8280
		T (°C)	-10	5825.0138	5825	0.01385	-2.3770
		T (°C)	0	5825.0681	5825	0.06812	-11.6943
		T (°C)	10	5825.0657	5825	0.06570	-11.2797
		T (°C)	20	5825.0499	5825	0.04993	-8.5709
		T (°C)	30	5825.0499	5825	0.04991	-8.5684
		T (°C)	40	5825.0397	5825	0.03970	-6.8159
		T (°C)	50	5825.0669	5825	0.06691	-11.4872
		T (°C)	60	5825.0452	5825	0.04518	-7.7554
		T (°C)	70	5825.0218	5825	0.02183	-3.7485
Limits				Within 5745-5850MHz			
Result				Complies			

## 4. ANTENNA REQUIREMENT

### 4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 4.2 EUT ANTENNA

The EUT antenna is permanent attached FPCB antenna (antenna gain: 1dBi). It comply with the standard requirement.


5. TEST RESULTS

5.2G


DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	66.73	1.76
NVNT	a	5200	Ant1	66.83	1.75
NVNT	a	5240	Ant1	67.43	1.71
NVNT	ac20	5180	Ant1	65.43	1.84
NVNT	ac20	5200	Ant1	65.03	1.87
NVNT	ac20	5240	Ant1	65.63	1.83
NVNT	ac40	5190	Ant1	51.95	2.84
NVNT	ac40	5230	Ant1	52.35	2.81
NVNT	ac80	5210	Ant1	41.06	3.87
NVNT	n20	5180	Ant1	65.73	1.82
NVNT	n20	5200	Ant1	64.94	1.88
NVNT	n20	5240	Ant1	65.73	1.82
NVNT	n40	5190	Ant1	52.15	2.83
NVNT	n40	5230	Ant1	51.65	2.87


Duty Cycle NVNT a 5180MHz Ant1

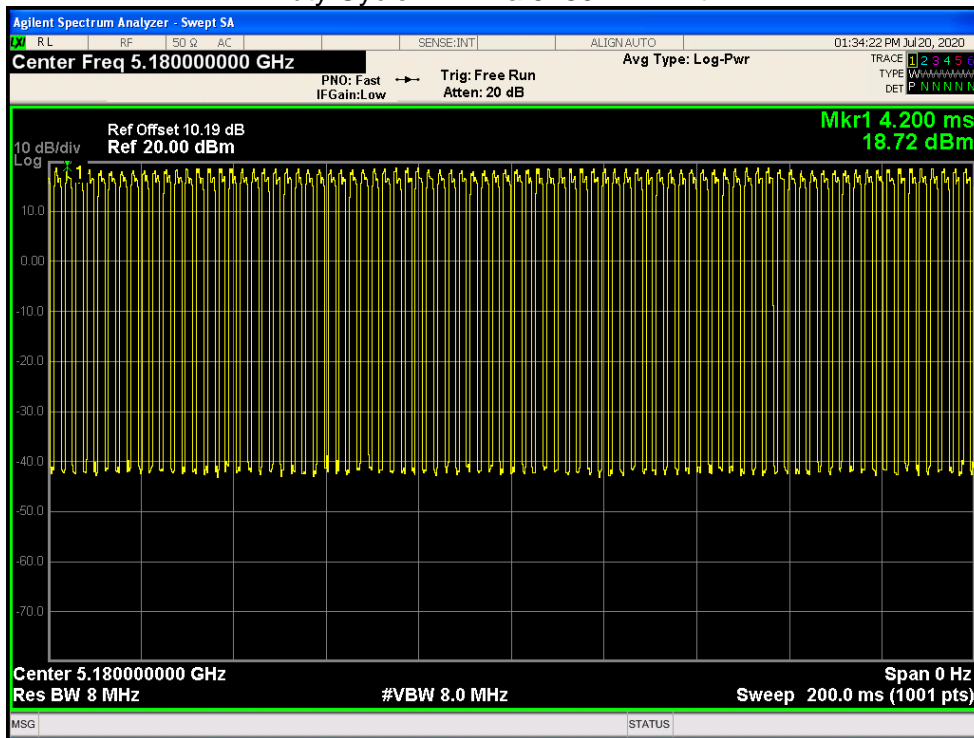


Duty Cycle NVNT a 5200MHz Ant1

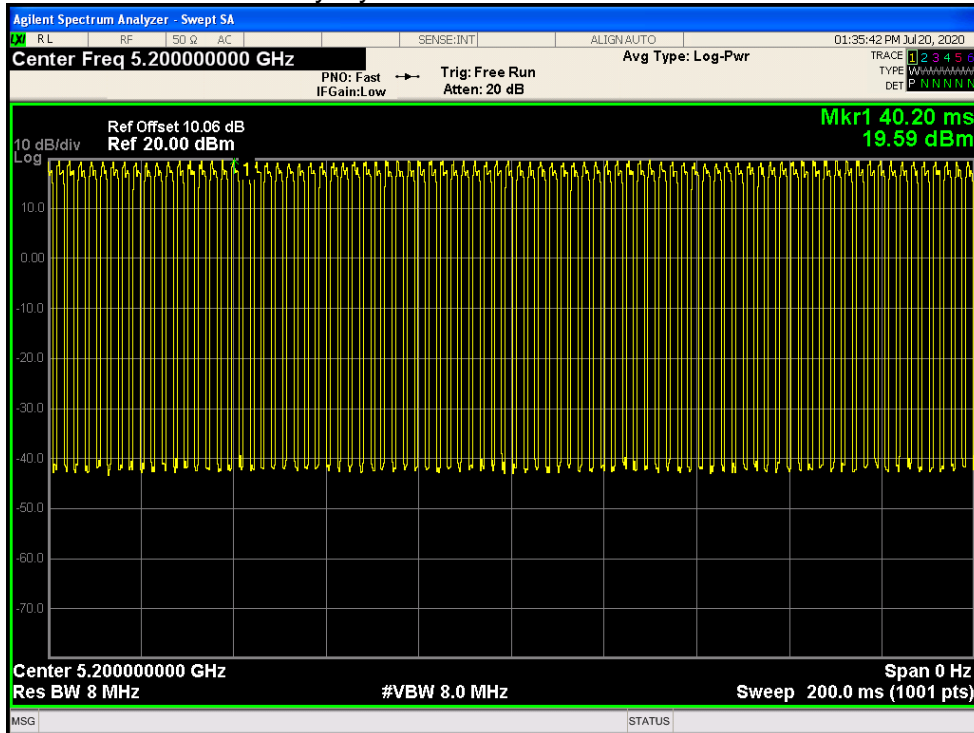


Duty Cycle NVNT a 5240MHz Ant1

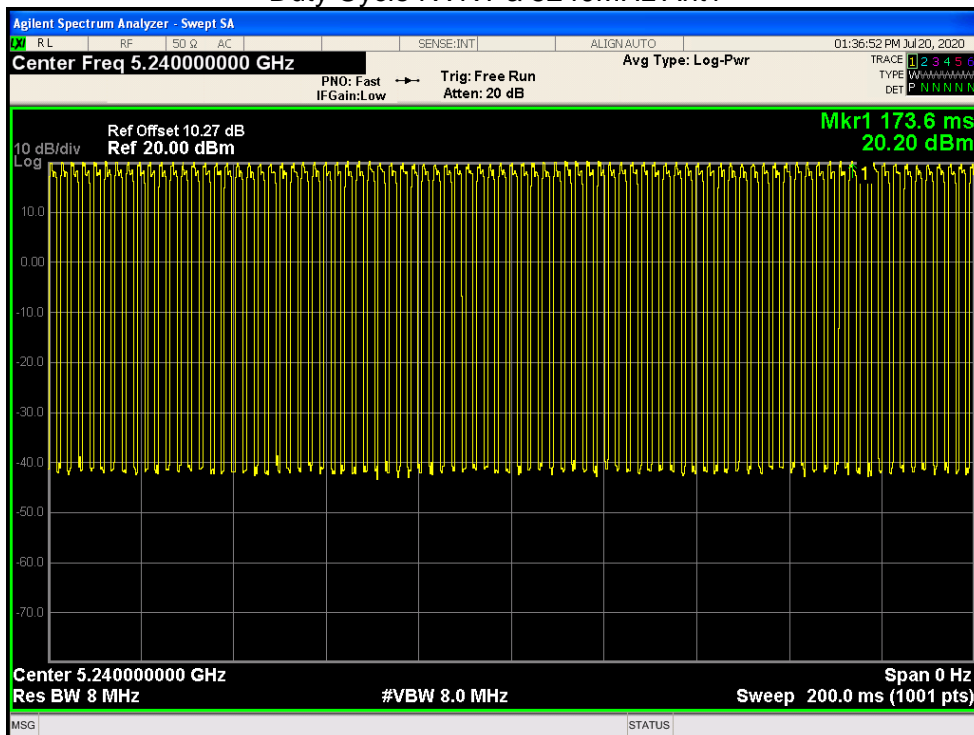


### Duty Cycle NVNT ac20 5180MHz Ant1

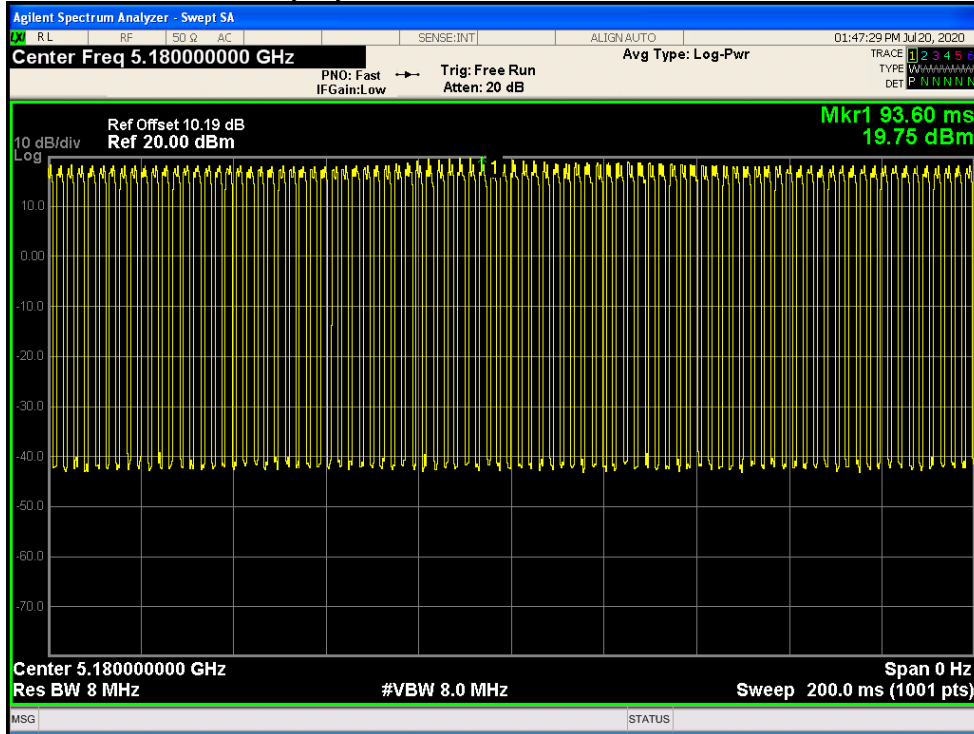


### Duty Cycle NVNT ac20 5200MHz Ant1

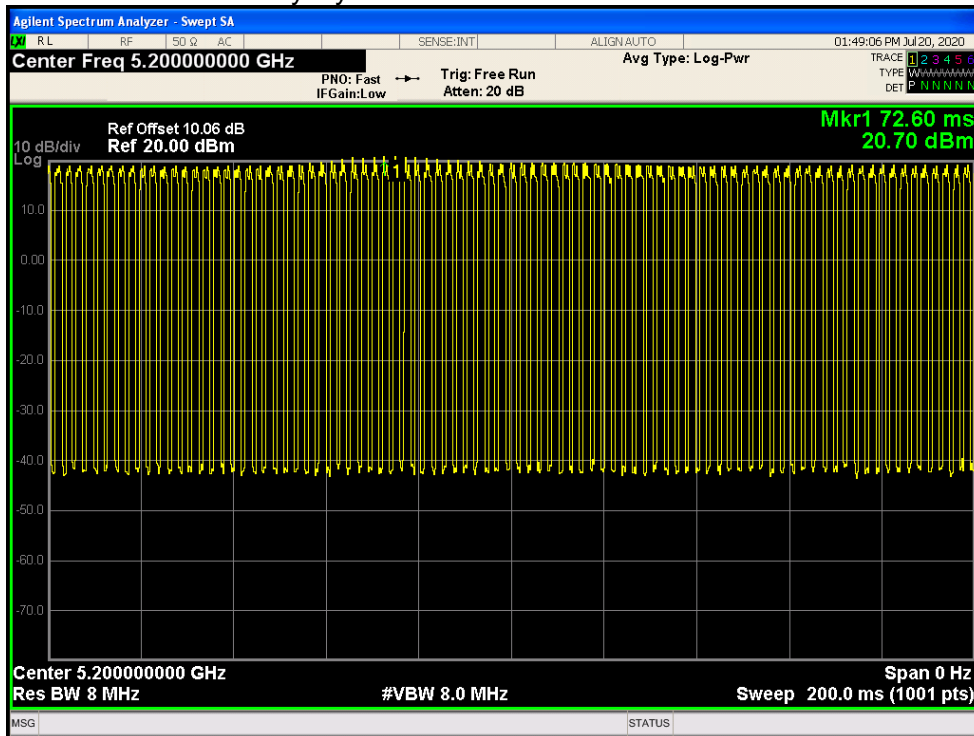


### Duty Cycle NVNT ac20 5240MHz Ant1

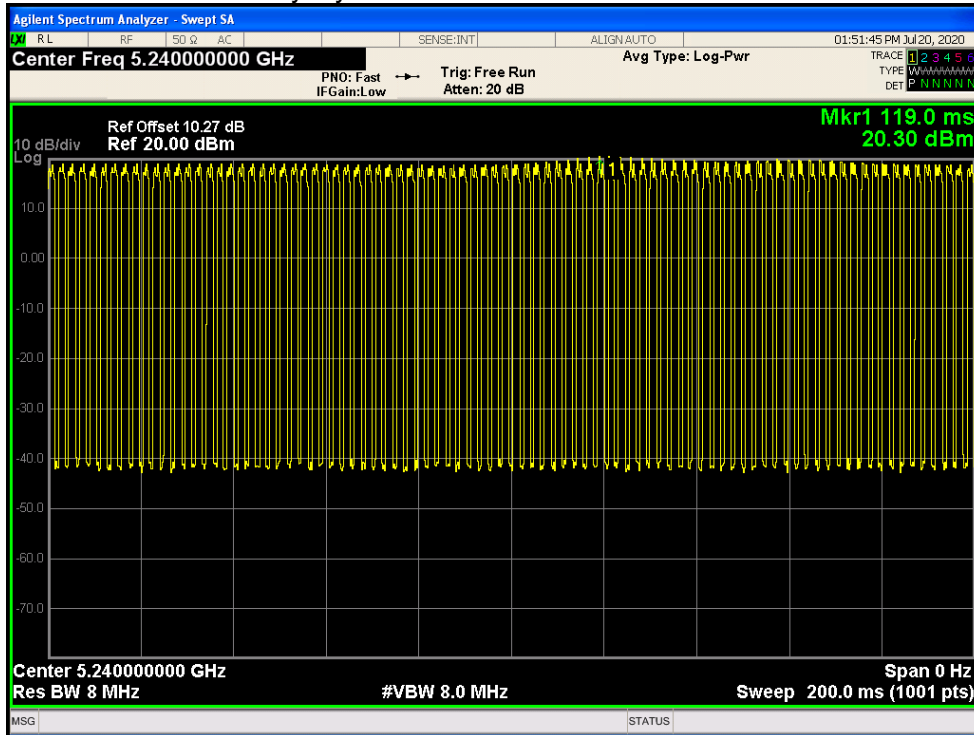


### Duty Cycle NVNT ac40 5190MHz Ant1

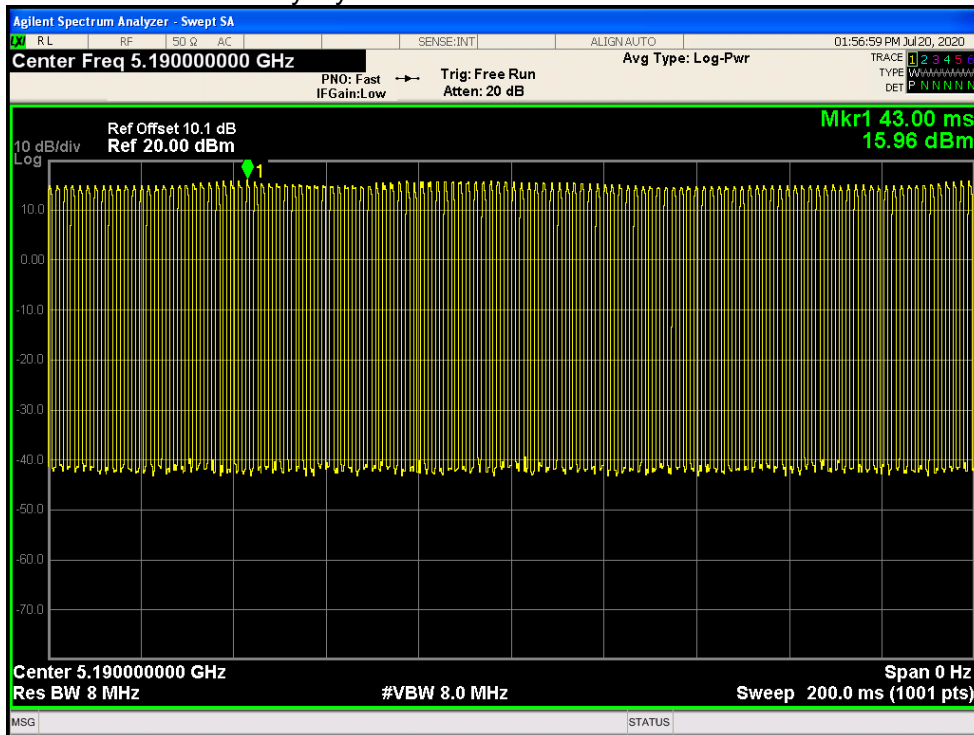

### Duty Cycle NVNT ac40 5230MHz Ant1

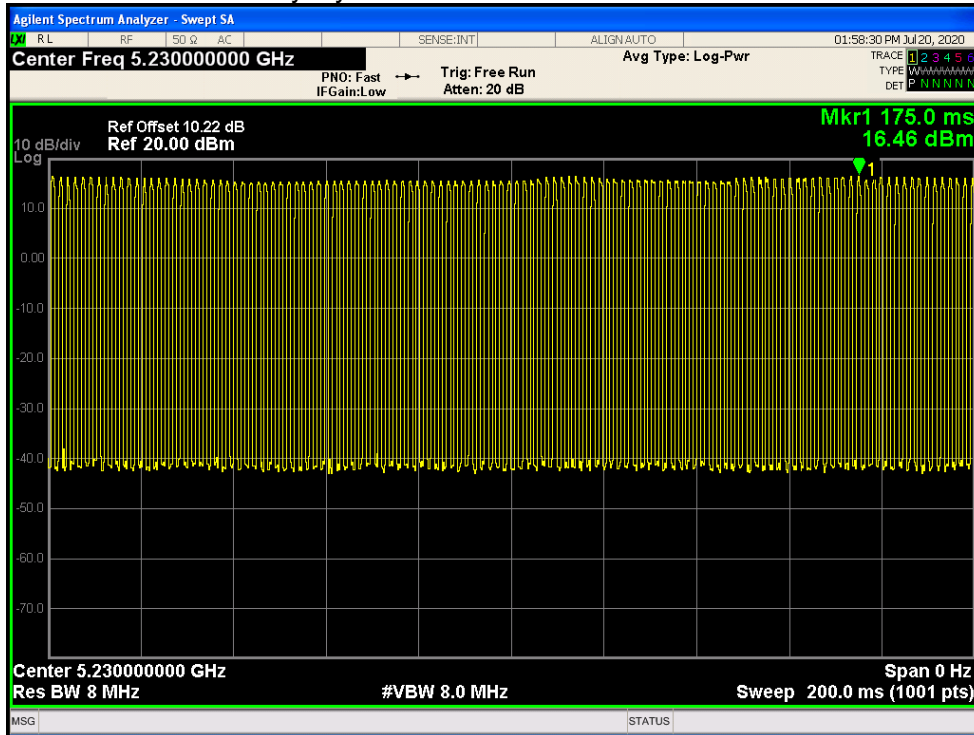


### Duty Cycle NVNT ac80 5210MHz Ant1

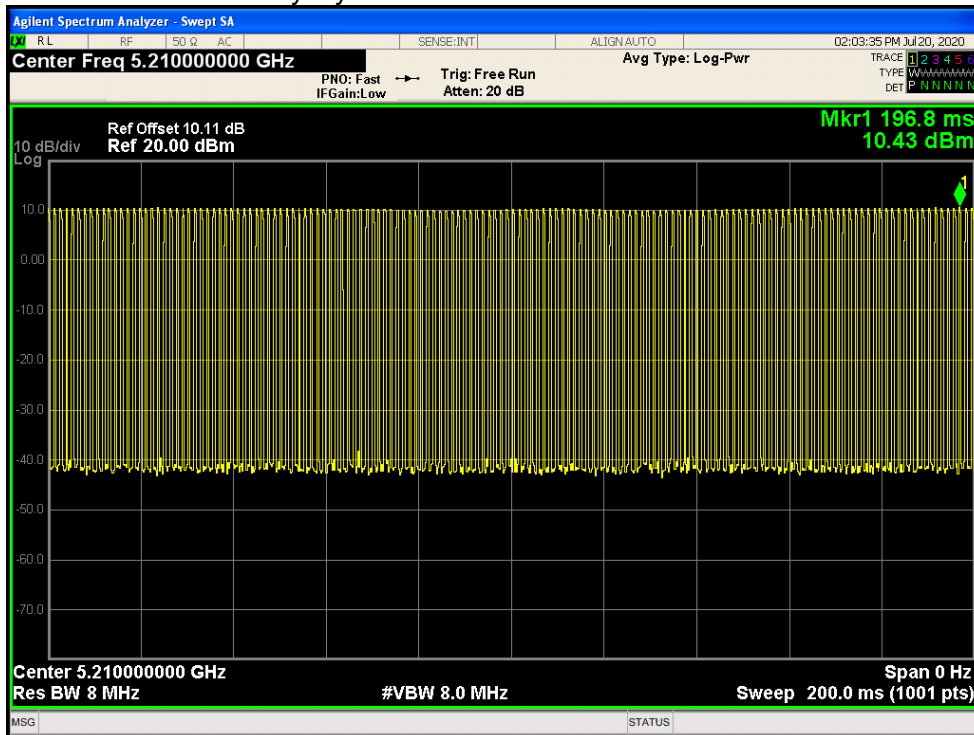





### Duty Cycle NVNT n20 5180MHz Ant1

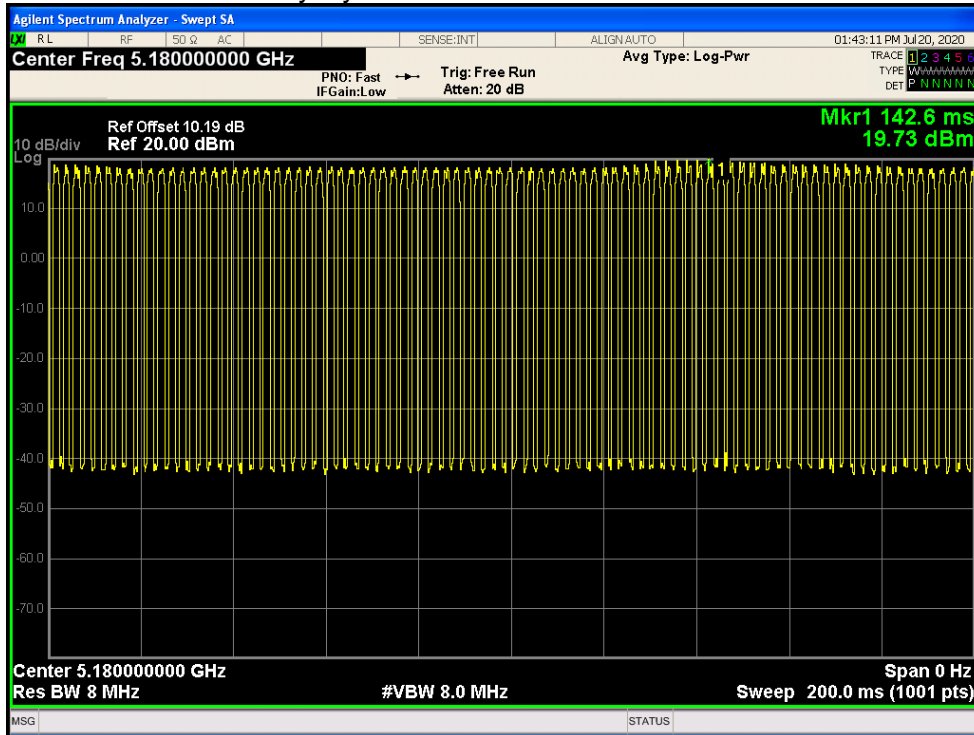


### Duty Cycle NVNT n20 5200MHz Ant1

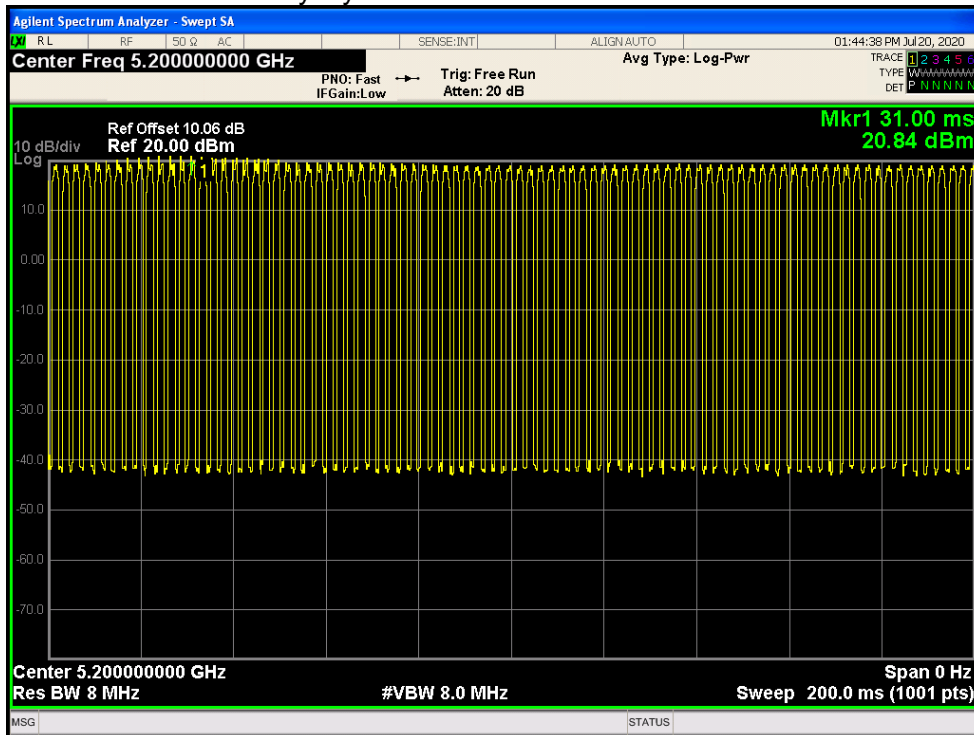


### Duty Cycle NVNT n20 5240MHz Ant1

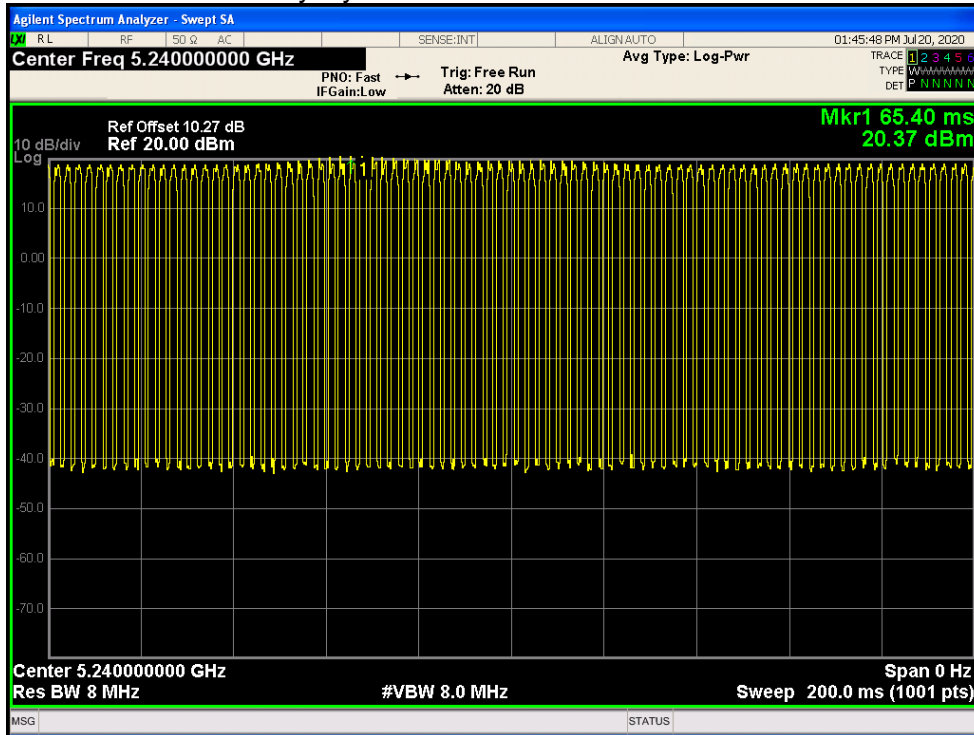

### Duty Cycle NVNT n40 5190MHz Ant1

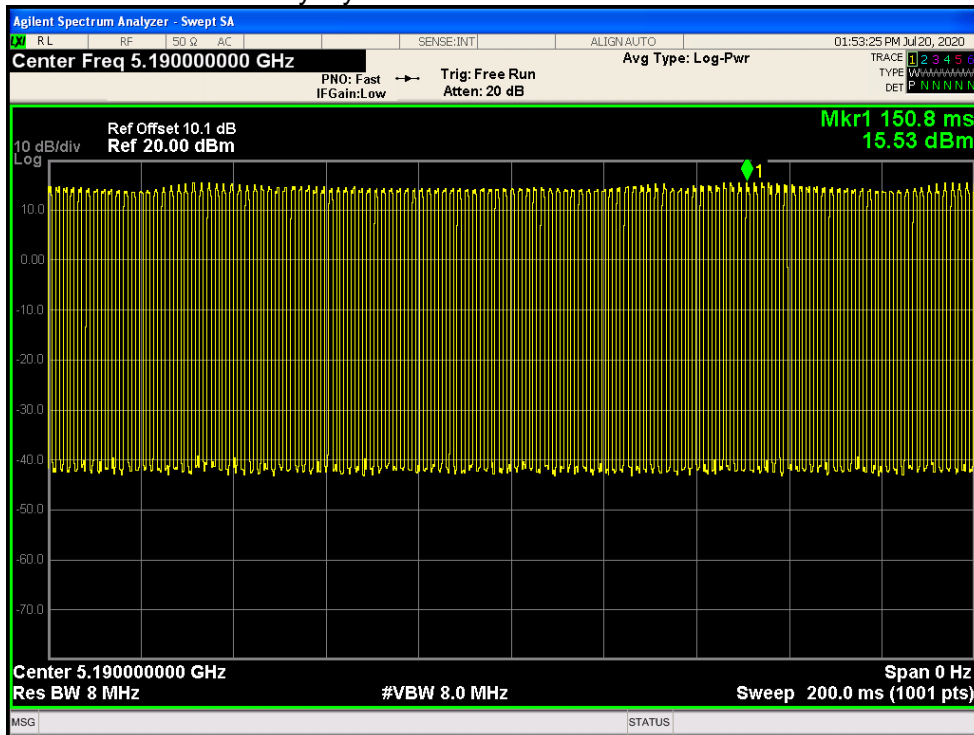

### Duty Cycle NVNT n40 5230MHz Ant1

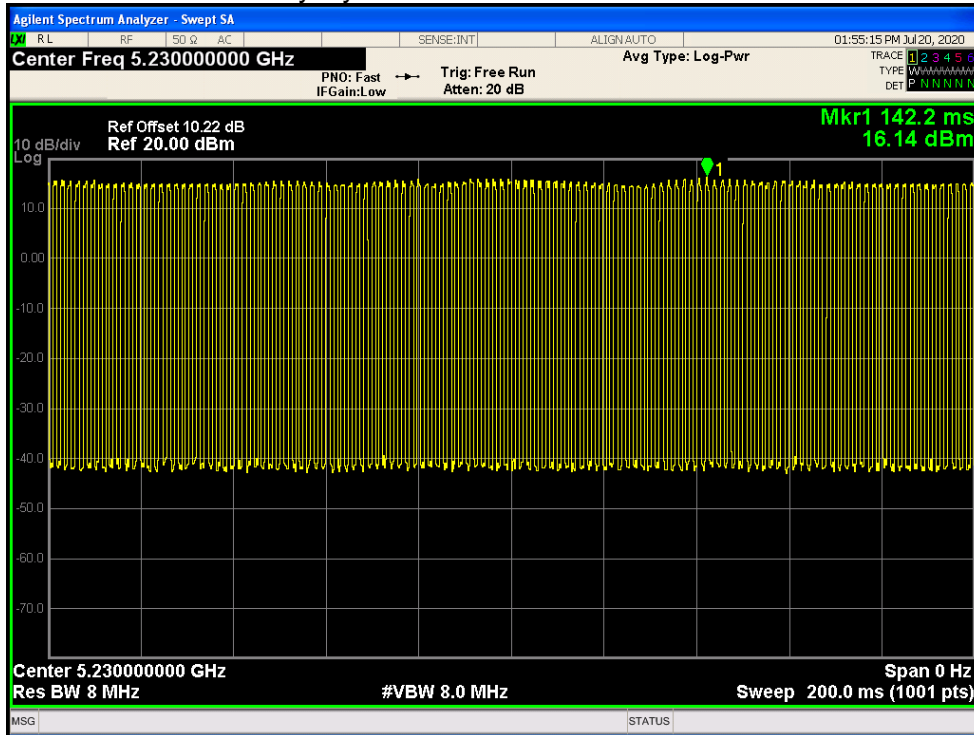


**MAXIMUM CONDUCTED OUTPUT POWER**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	7.41	1.76	9.17	24	Pass
NVNT	a	5200	Ant1	8.26	1.75	10.01	24	Pass
NVNT	a	5240	Ant1	9.2	1.71	10.91	24	Pass
NVNT	ac20	5180	Ant1	7.28	1.84	9.12	24	Pass
NVNT	ac20	5200	Ant1	8.13	1.87	10	24	Pass
NVNT	ac20	5240	Ant1	8.08	1.83	9.91	24	Pass
NVNT	ac40	5190	Ant1	8.15	2.84	10.99	24	Pass
NVNT	ac40	5230	Ant1	8.68	2.81	11.49	24	Pass
NVNT	ac80	5210	Ant1	7.73	3.87	11.6	24	Pass
NVNT	n20	5180	Ant1	7.29	1.82	9.11	24	Pass
NVNT	n20	5200	Ant1	8.1	1.88	9.98	24	Pass
NVNT	n20	5240	Ant1	8.09	1.82	9.91	24	Pass
NVNT	n40	5190	Ant1	8.16	2.83	10.99	24	Pass
NVNT	n40	5230	Ant1	8.73	2.87	11.6	24	Pass


**OCCUPIED CHANNEL BANDWIDTH**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	99% OBW (MHz)
NVNT	a	5180	Ant1	21.40	16.756
NVNT	a	5200	Ant1	20.89	16.7133
NVNT	a	5240	Ant1	21.18	16.734
NVNT	ac20	5180	Ant1	21.57	17.832
NVNT	ac20	5200	Ant1	21.49	17.844
NVNT	ac20	5240	Ant1	21.53	17.798
NVNT	ac40	5190	Ant1	42.53	36.351
NVNT	ac40	5230	Ant1	42.21	36.311
NVNT	ac80	5210	Ant1	82.11	75.734
NVNT	n20	5180	Ant1	21.85	17.855
NVNT	n20	5200	Ant1	21.51	17.817
NVNT	n20	5240	Ant1	21.60	17.746
NVNT	n40	5190	Ant1	42.78	36.359
NVNT	n40	5230	Ant1	42.54	36.368


OBW NVNT a 5180MHz Ant1

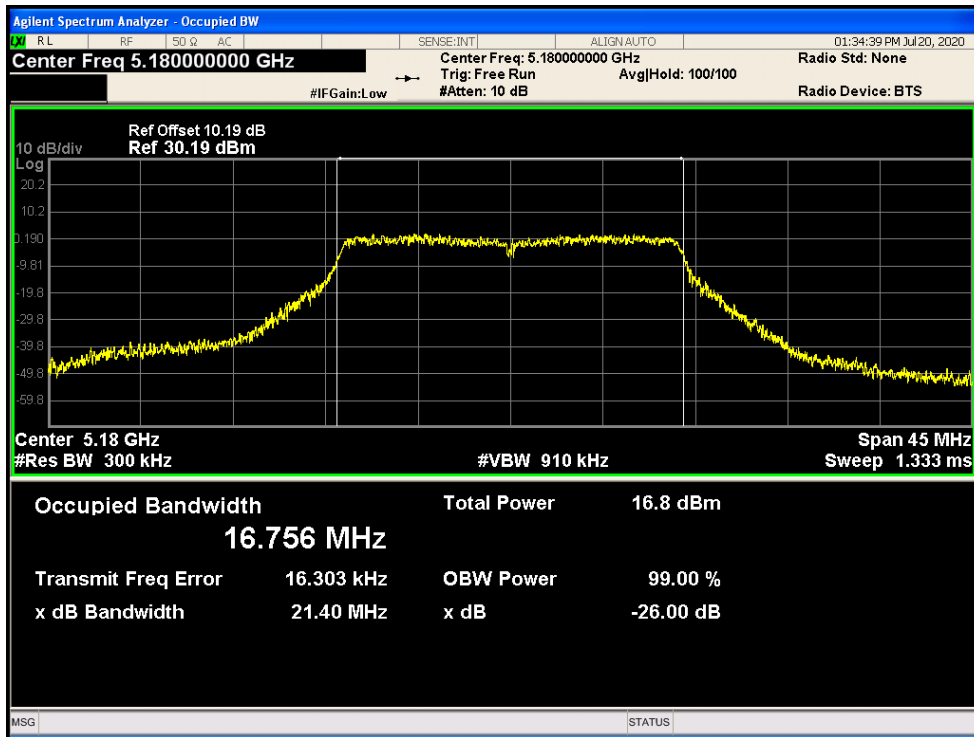


OBW NVNT a 5200MHz Ant1

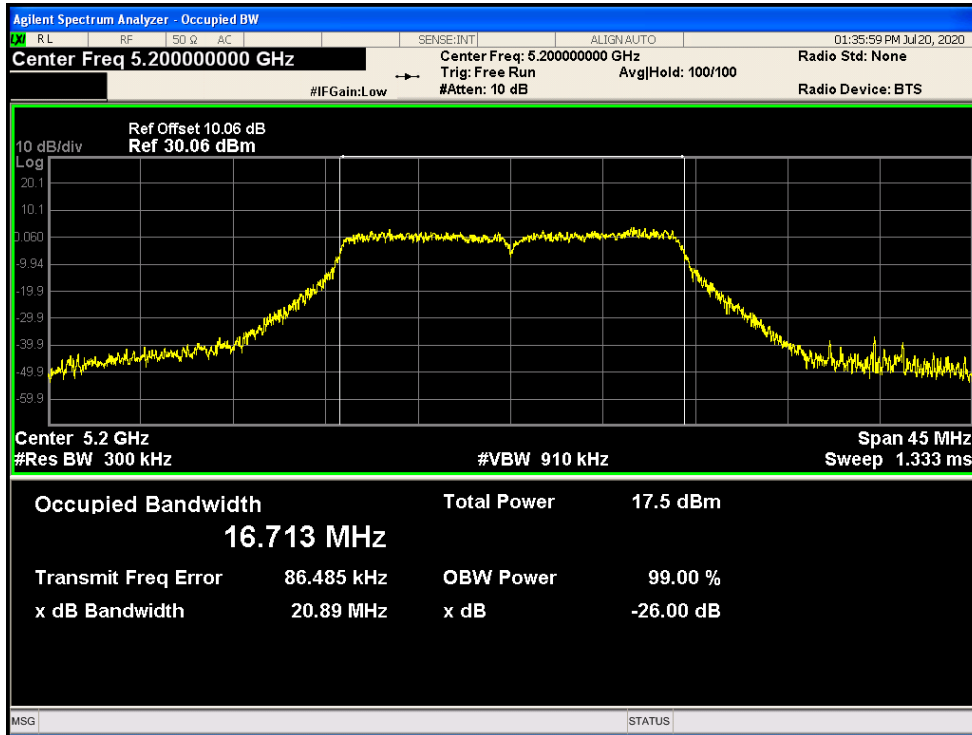


OBW NVNT a 5240MHz Ant1

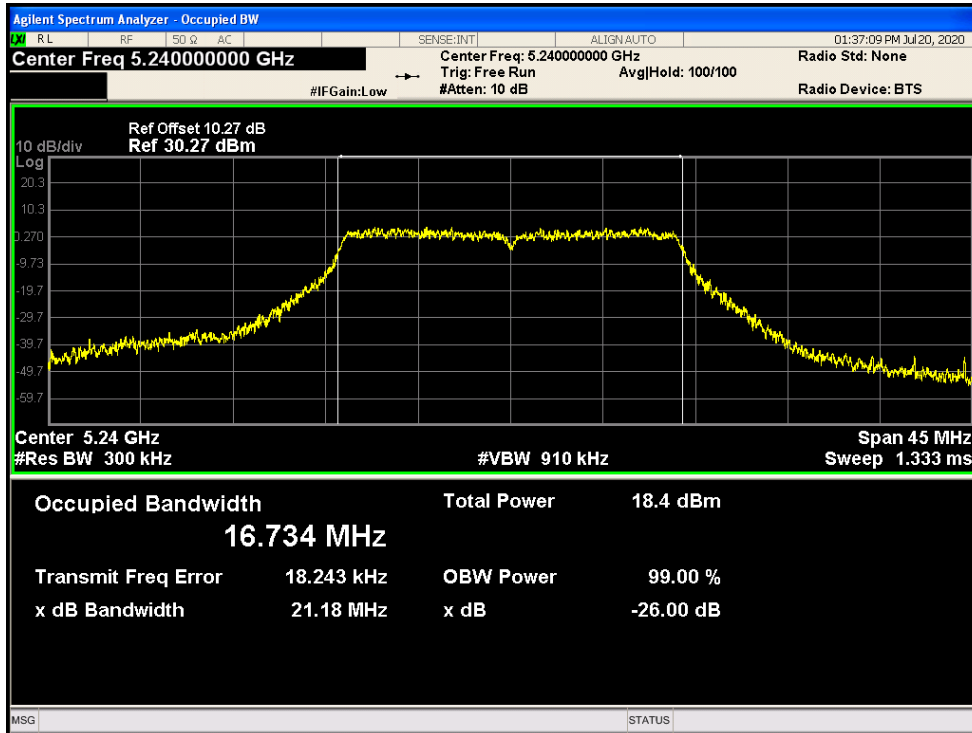


OBW NVNT ac20 5180MHz Ant1

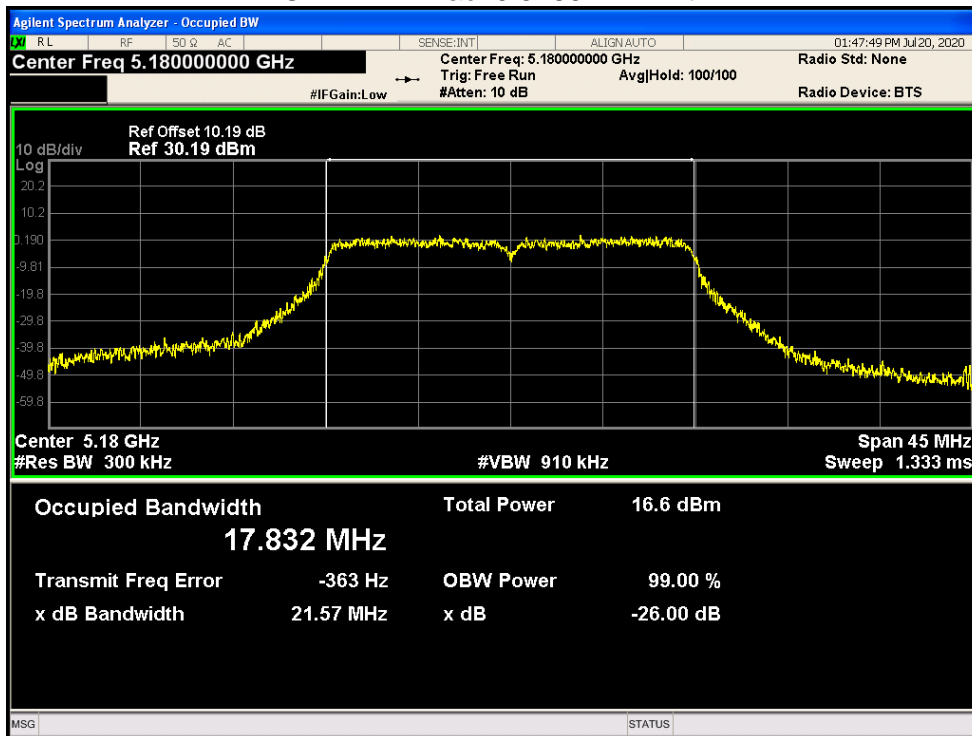


OBW NVNT ac20 5200MHz Ant1

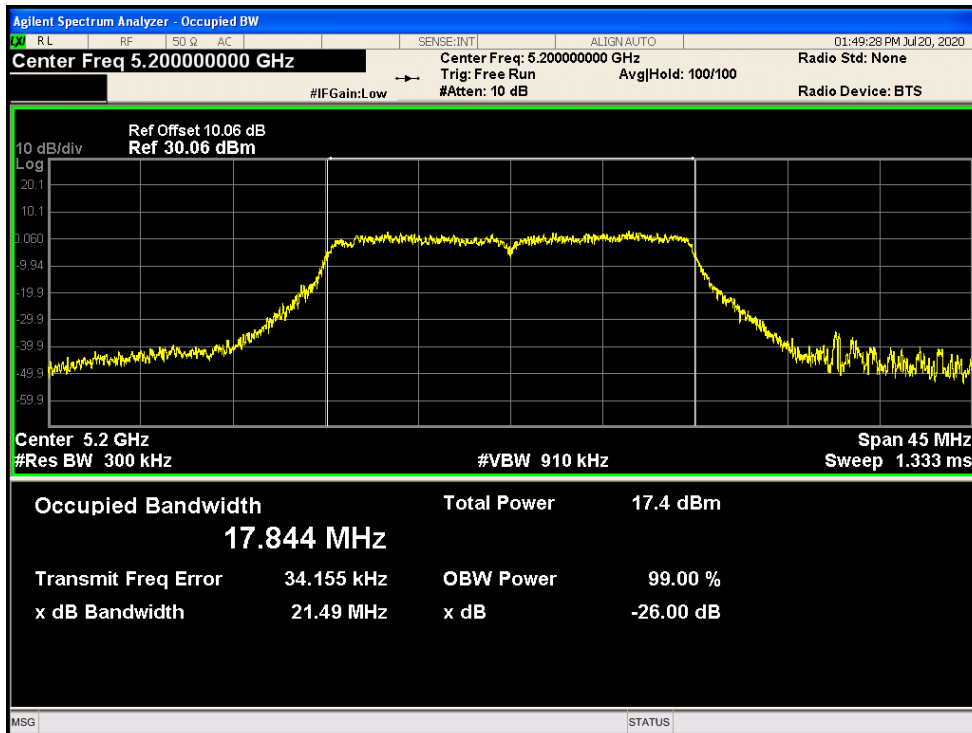

OBW NVNT ac20 5240MHz Ant1

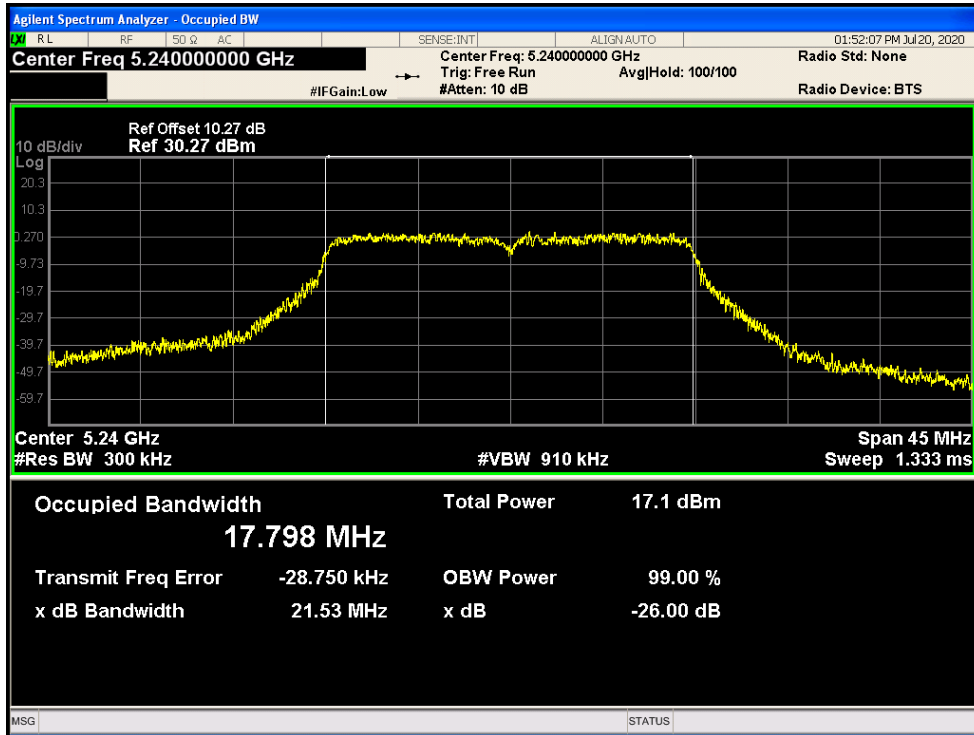


OBW NVNT ac40 5190MHz Ant1

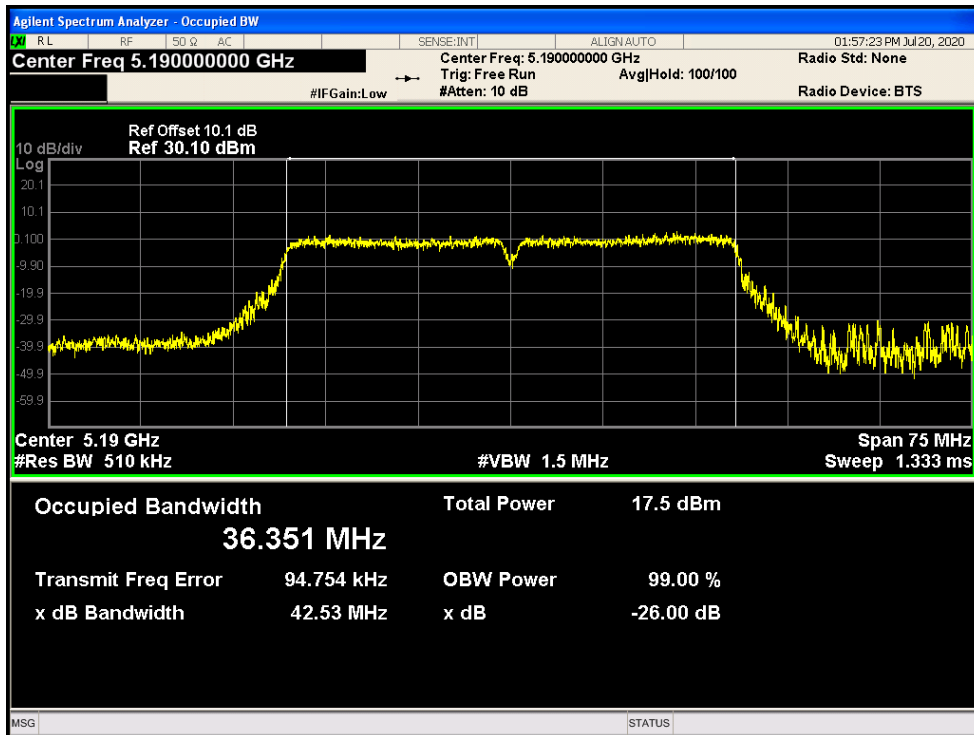





OBW NVNT ac40 5230MHz Ant1

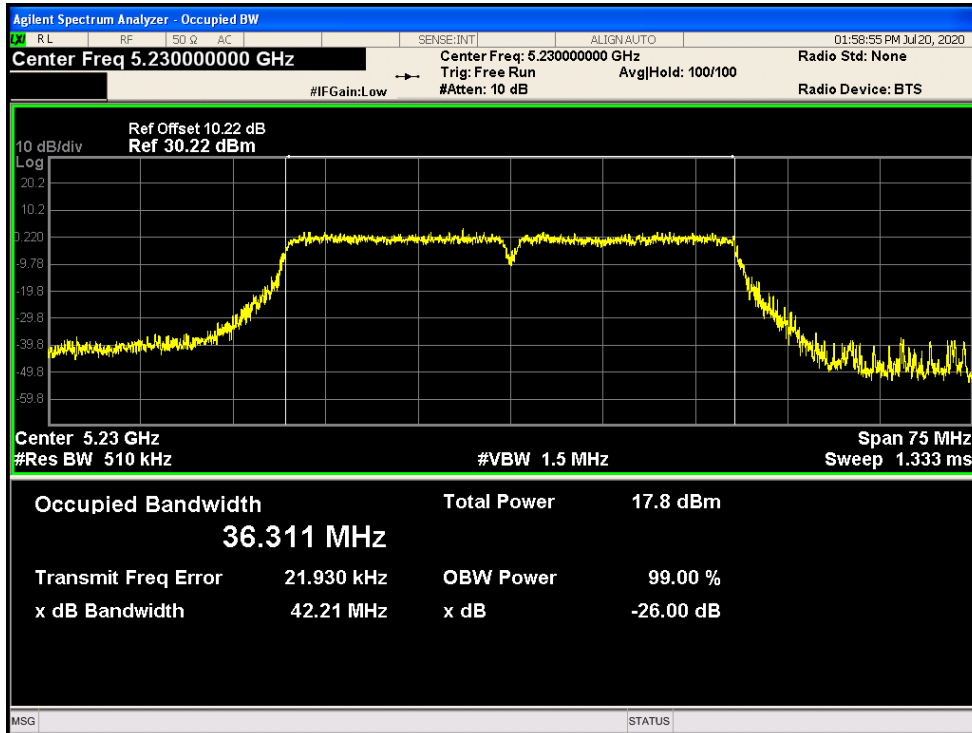


OBW NVNT ac80 5210MHz Ant1

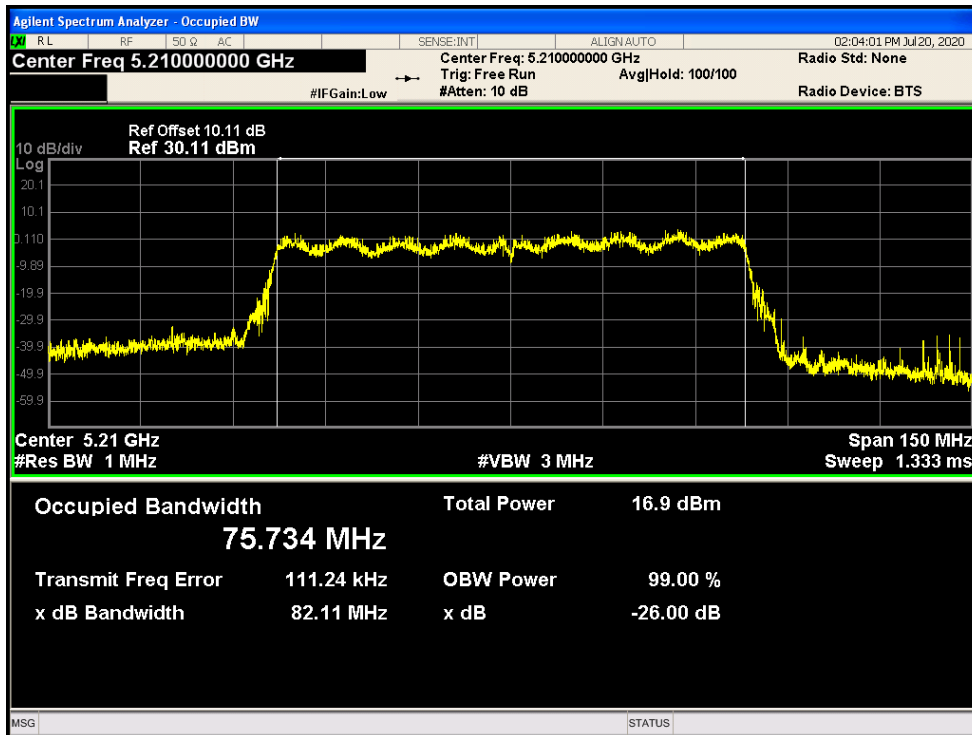


OBW NVNT n20 5180MHz Ant1

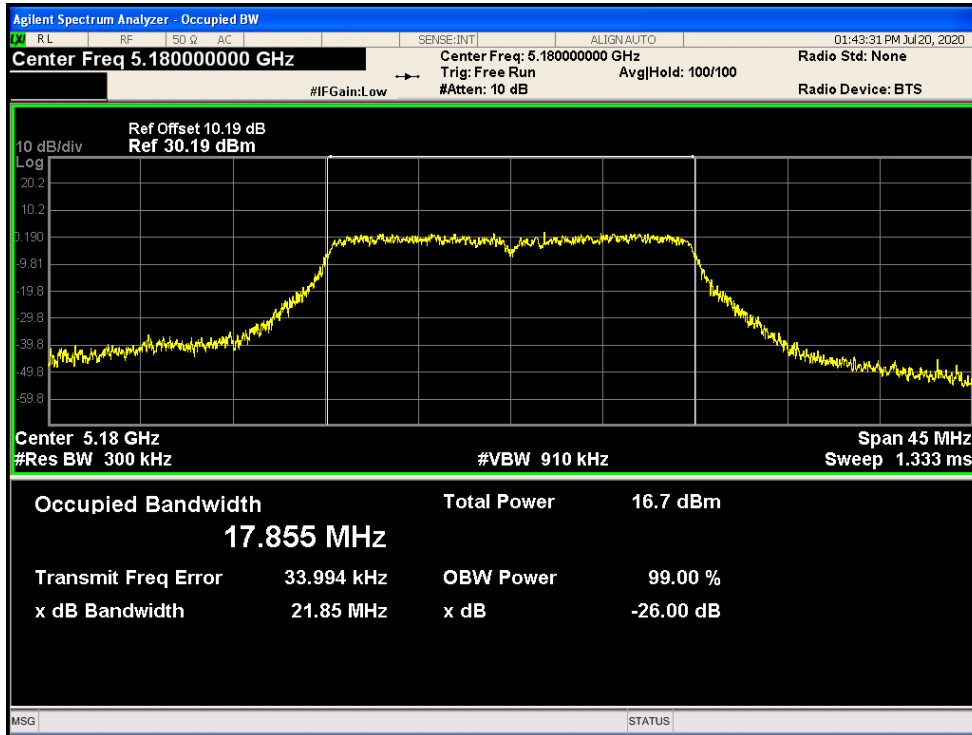


OBW NVNT n20 5200MHz Ant1

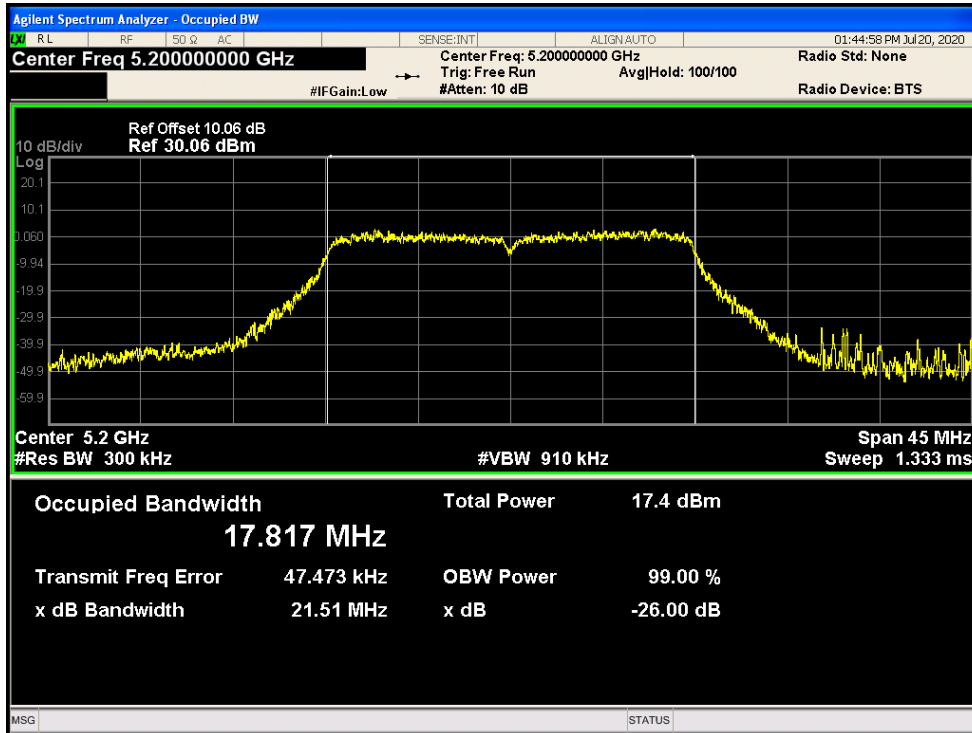


OBW NVNT n20 5240MHz Ant1

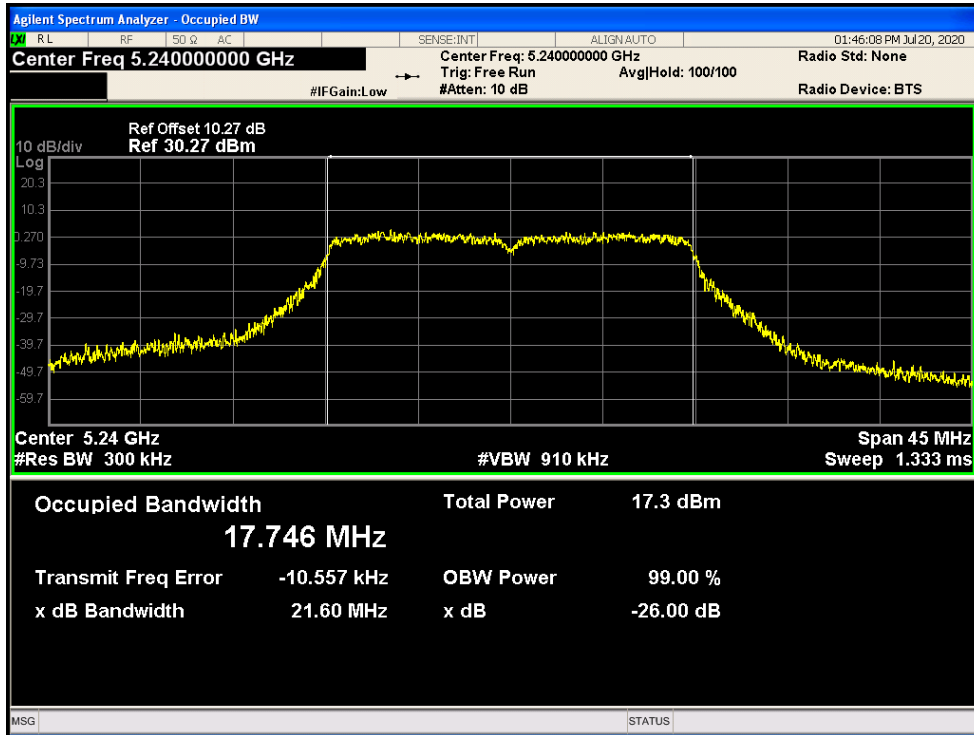

OBW NVNT n40 5190MHz Ant1

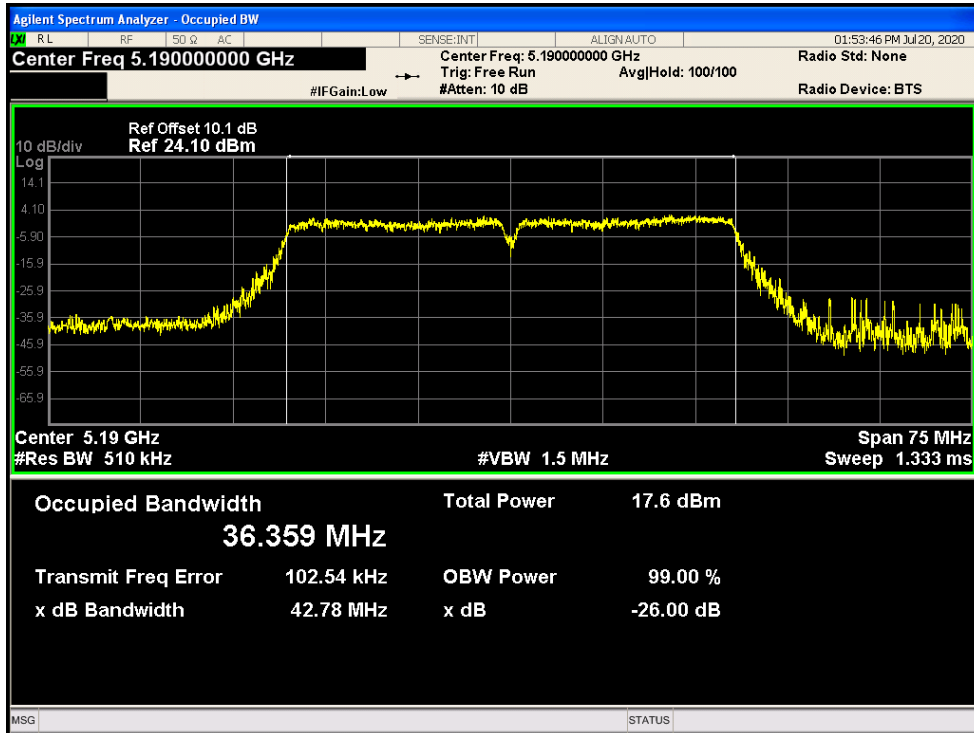


OBW NVNT n40 5230MHz Ant1

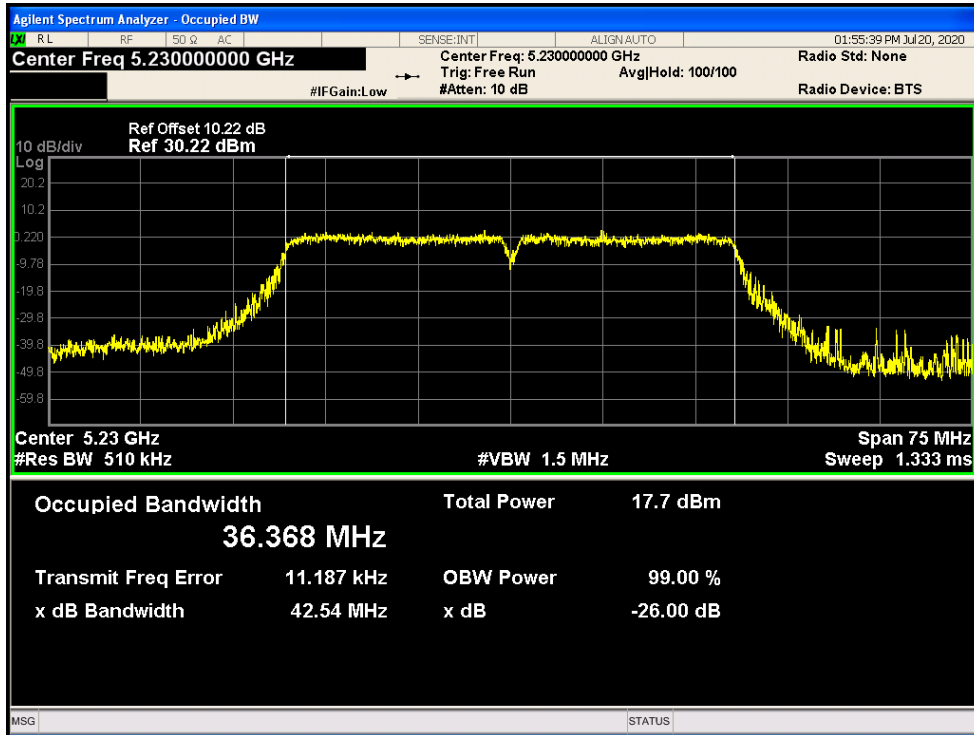


**MAXIMUM POWER SPECTRAL DENSITY LEVEL**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	8.51	11	Pass
NVNT	a	5200	Ant1	9.361	11	Pass
NVNT	a	5240	Ant1	10.194	11	Pass
NVNT	ac20	5180	Ant1	7.881	11	Pass
NVNT	ac20	5200	Ant1	8.904	11	Pass
NVNT	ac20	5240	Ant1	8.622	11	Pass
NVNT	ac40	5190	Ant1	6.772	11	Pass
NVNT	ac40	5230	Ant1	6.099	11	Pass
NVNT	ac80	5210	Ant1	3.717	11	Pass
NVNT	n20	5180	Ant1	7.759	11	Pass
NVNT	n20	5200	Ant1	9.309	11	Pass
NVNT	n20	5240	Ant1	8.857	11	Pass
NVNT	n40	5190	Ant1	6.312	11	Pass
NVNT	n40	5230	Ant1	6.374	11	Pass


PSD NVNT a 5180MHz Ant1

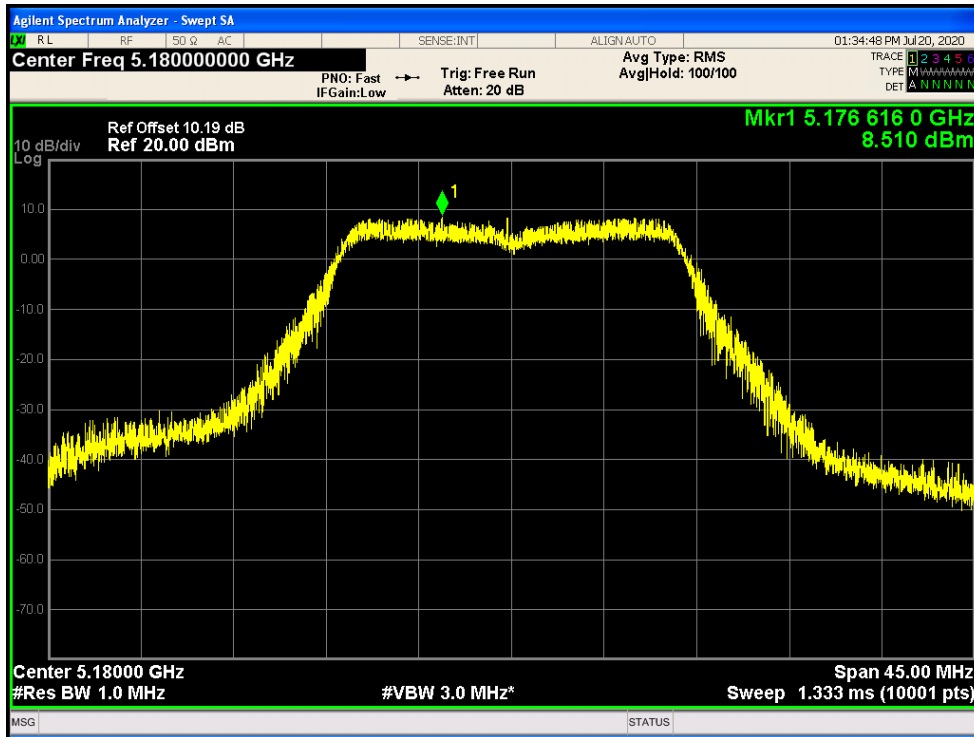


PSD NVNT a 5200MHz Ant1

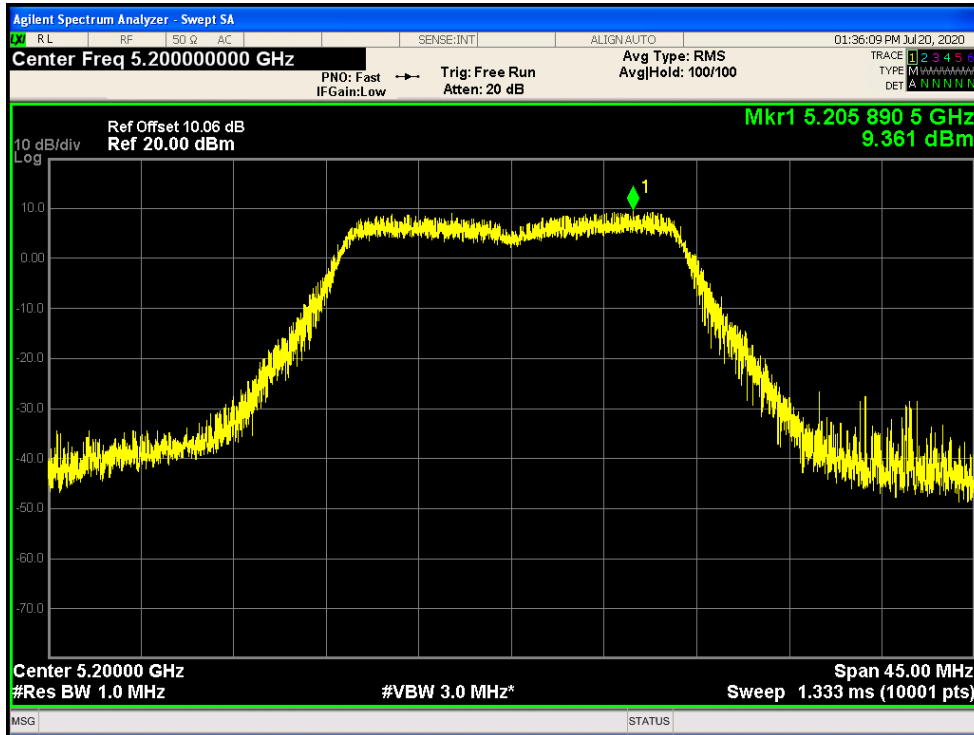


PSD NVNT a 5240MHz Ant1

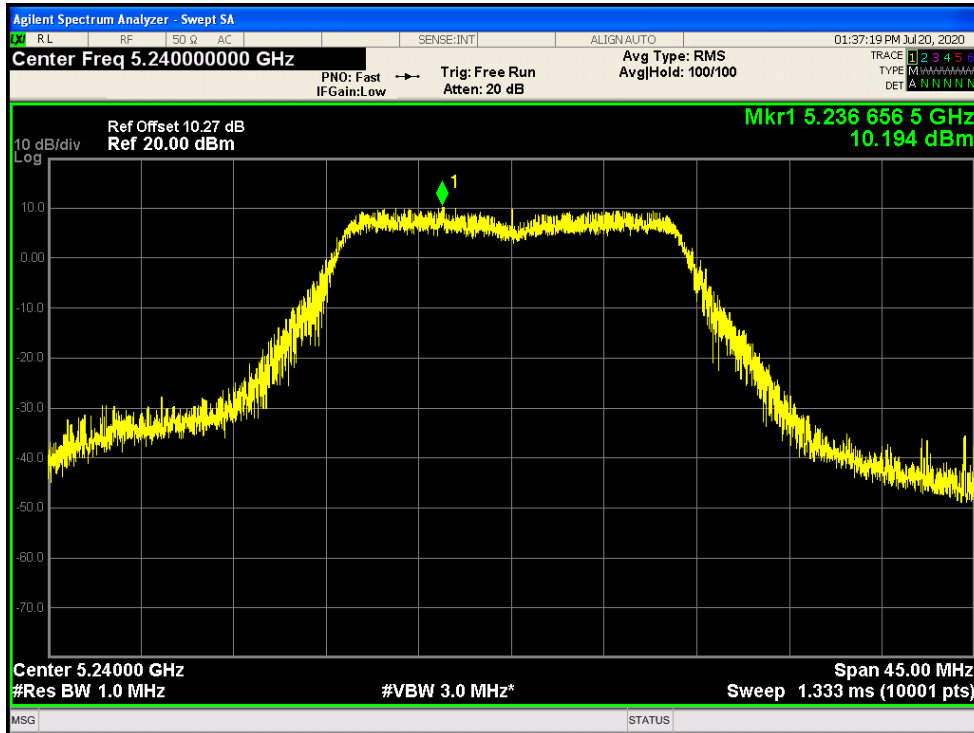


PSD NVNT ac20 5180MHz Ant1

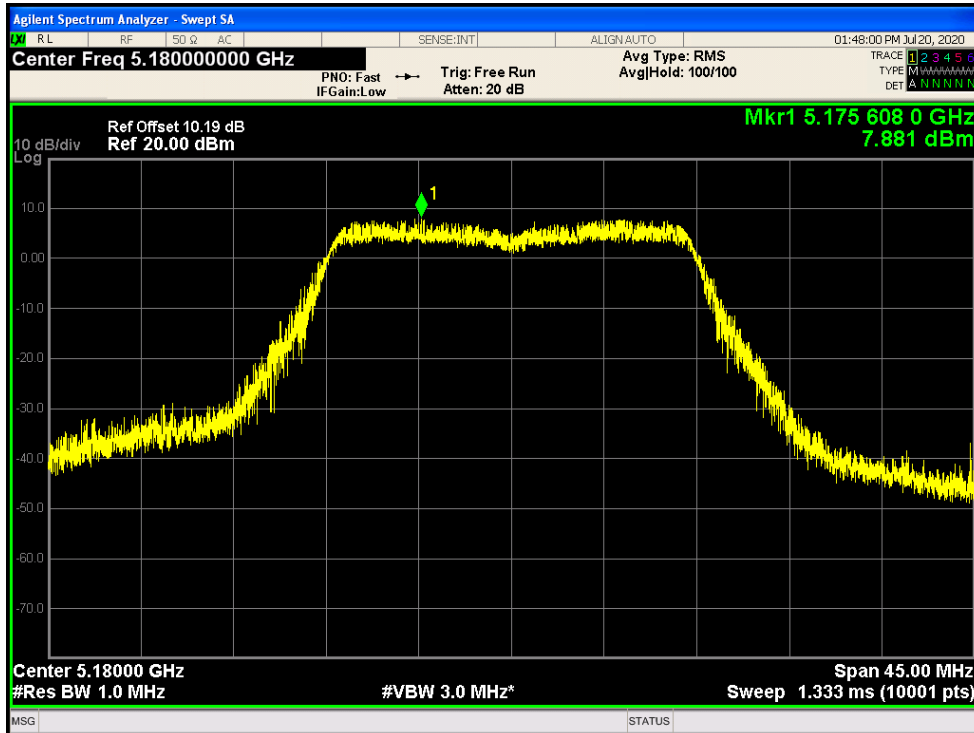


PSD NVNT ac20 5200MHz Ant1

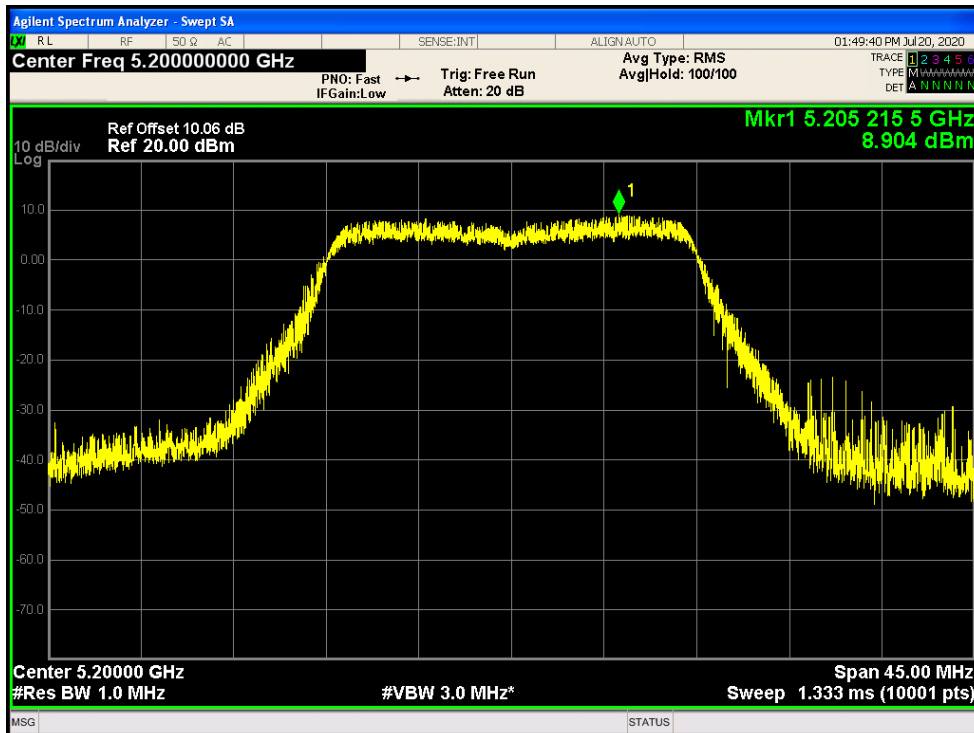

PSD NVNT ac20 5240MHz Ant1

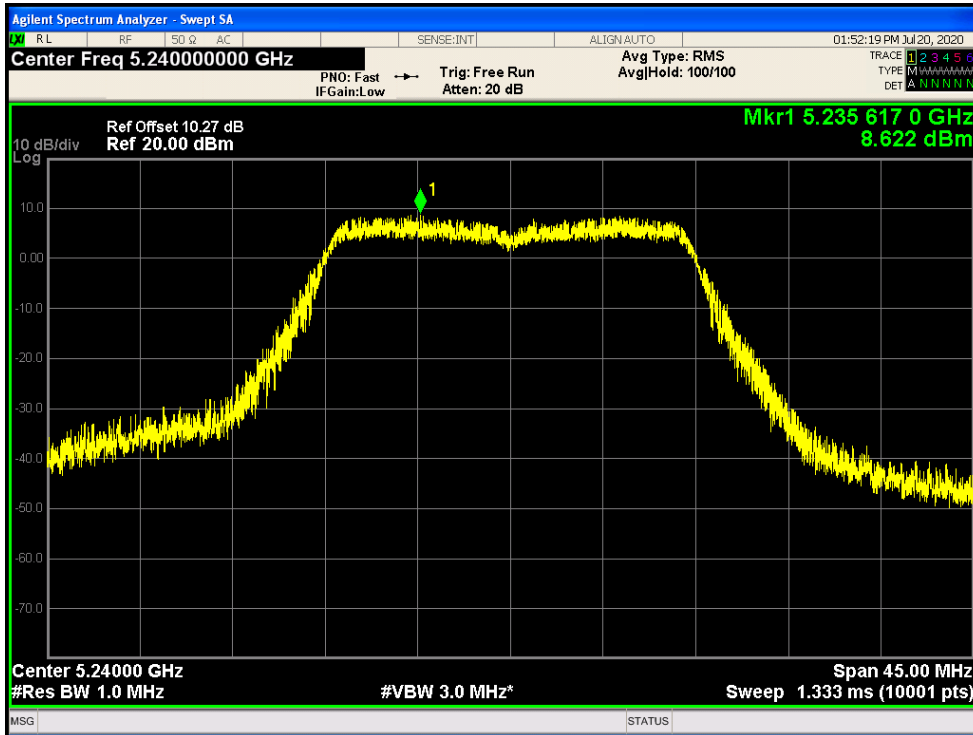


PSD NVNT ac40 5190MHz Ant1

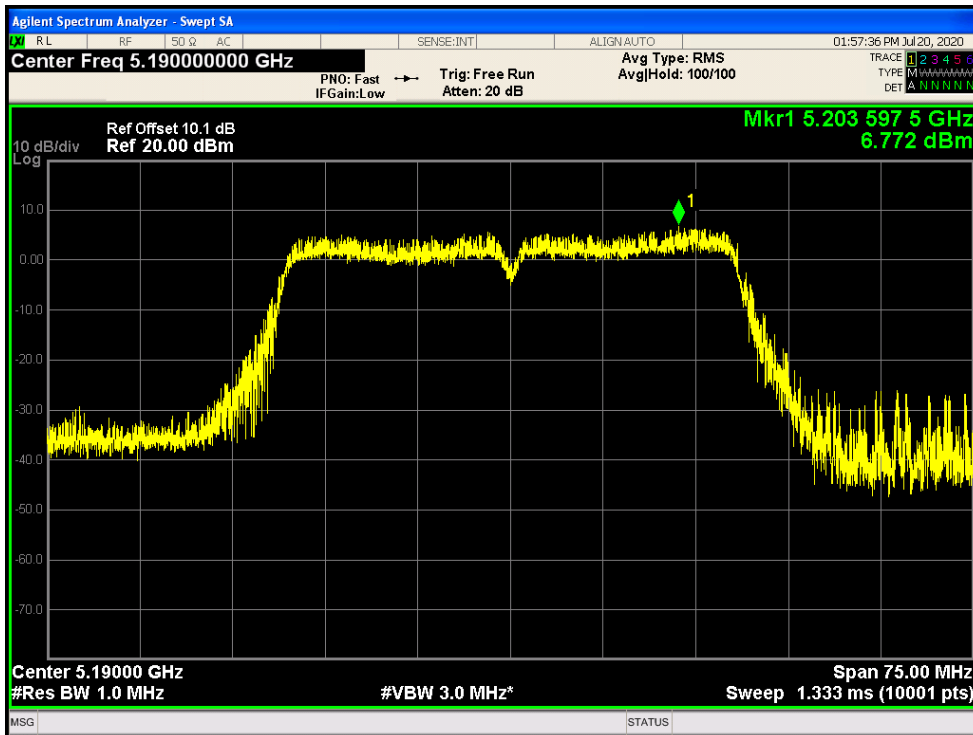





PSD NVNT ac40 5230MHz Ant1

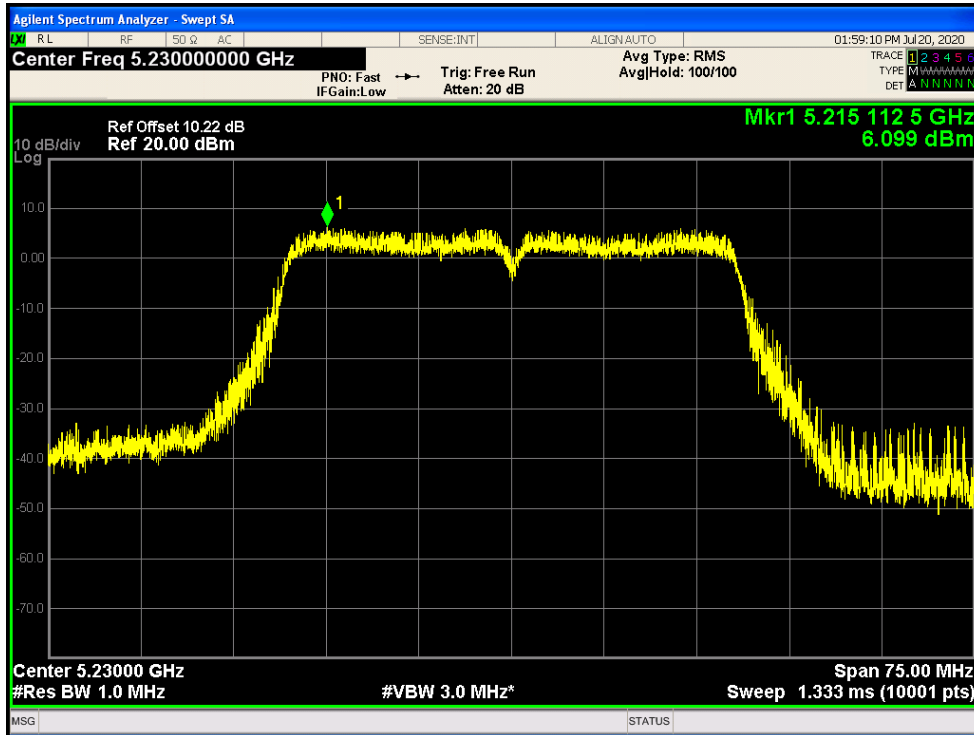


PSD NVNT ac80 5210MHz Ant1

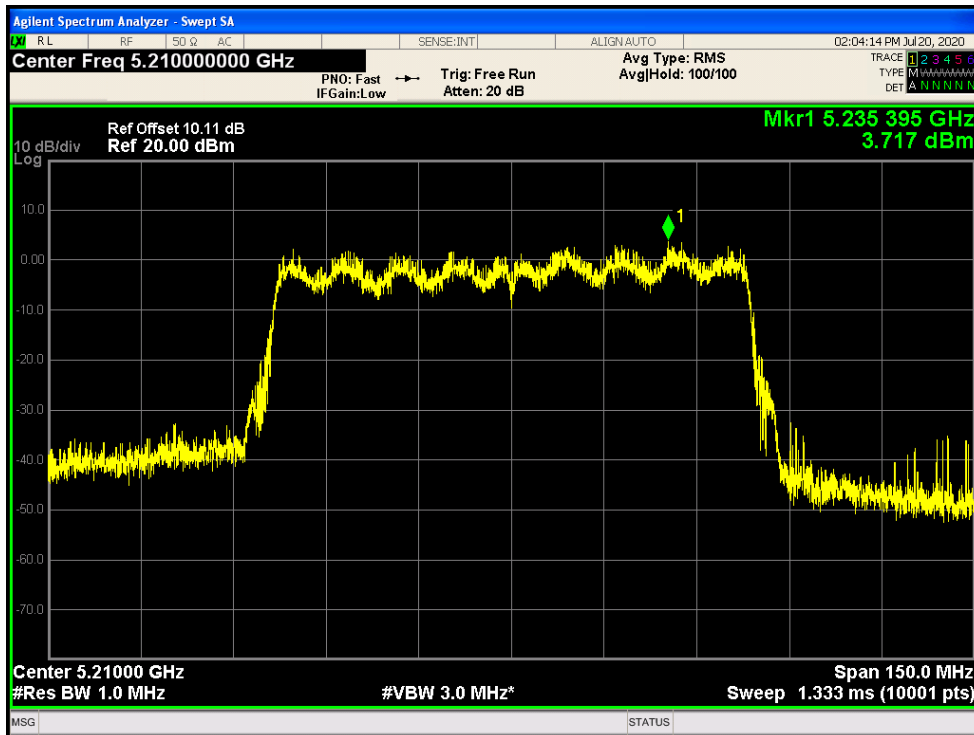


PSD NVNT n20 5180MHz Ant1

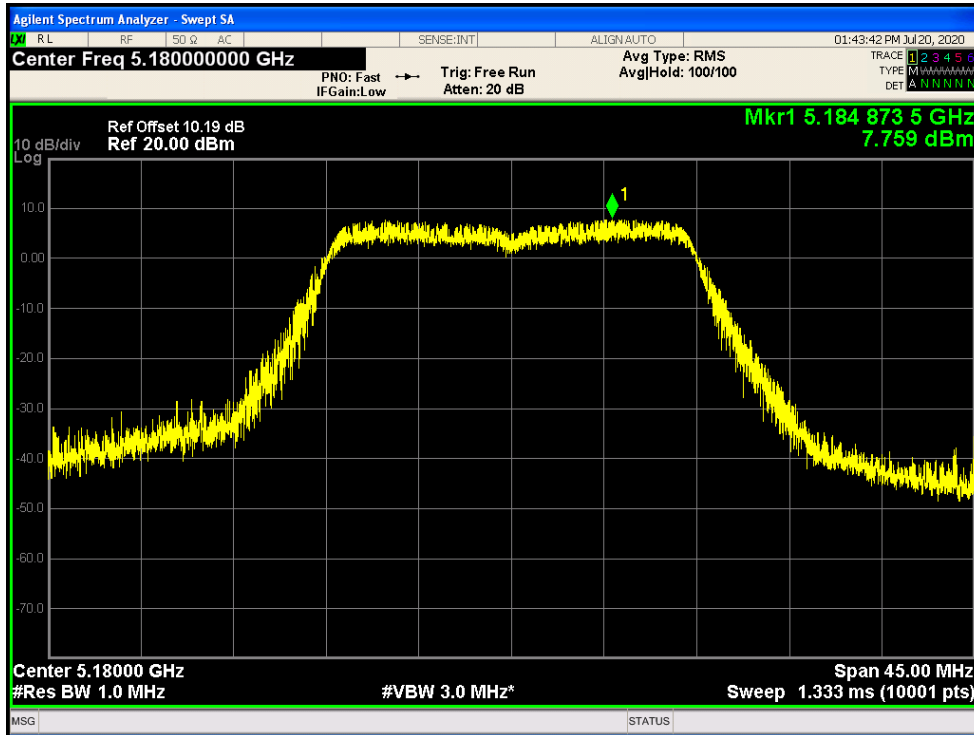


PSD NVNT n20 5200MHz Ant1

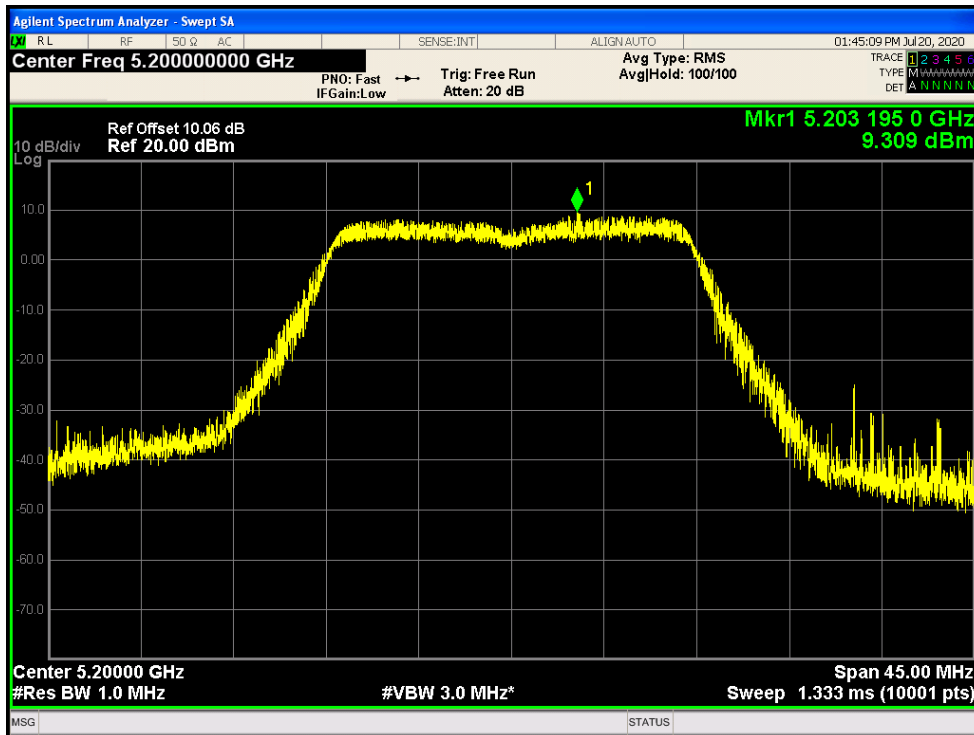


PSD NVNT n20 5240MHz Ant1

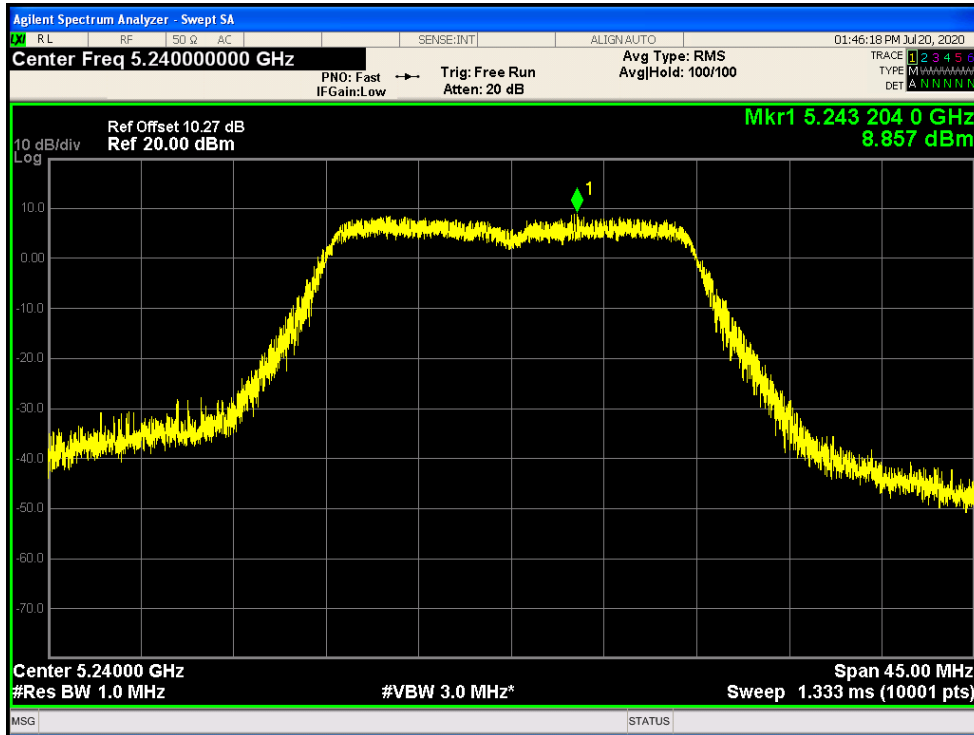

PSD NVNT n40 5190MHz Ant1

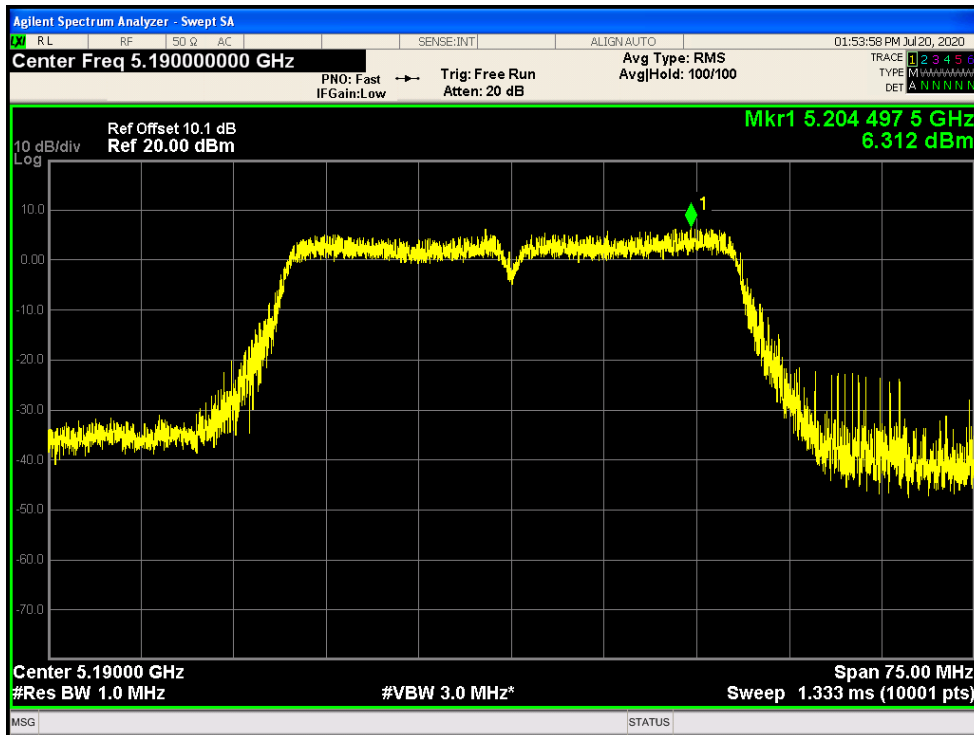


PSD NVNT n40 5230MHz Ant1

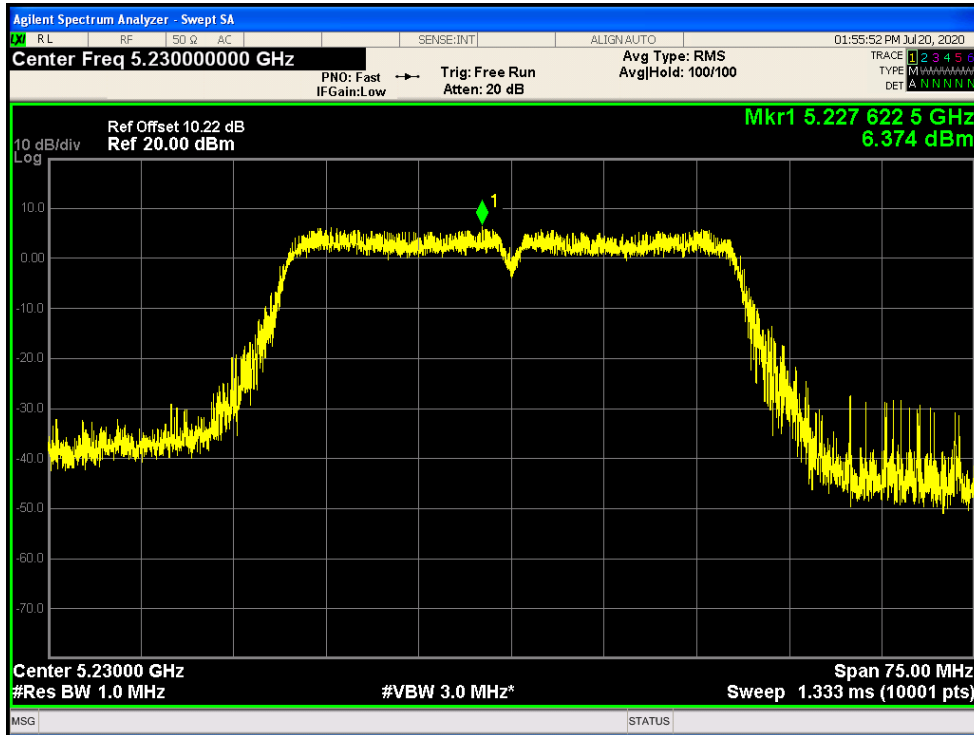


**BAND EDGE**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (EIRP dBc)	Limit (EIRP dBc)	Verdict
NVNT	a	5180	Ant1	-48.54	-27	Pass
NVNT	a	5240	Ant1	-47.35	-27	Pass
NVNT	ac20	5180	Ant1	-49.24	-27	Pass
NVNT	ac20	5240	Ant1	-48.56	-27	Pass
NVNT	ac40	5190	Ant1	-43.98	-27	Pass
NVNT	ac40	5230	Ant1	-48.47	-27	Pass
NVNT	ac80	5210	Ant1	-45.23	-27	Pass
NVNT	n20	5180	Ant1	-49.02	-27	Pass
NVNT	n20	5240	Ant1	-47.34	-27	Pass
NVNT	n40	5190	Ant1	-43.23	-27	Pass
NVNT	n40	5230	Ant1	-47.78	-27	Pass


Band Edge NVNT a 5180MHz Low Ant1

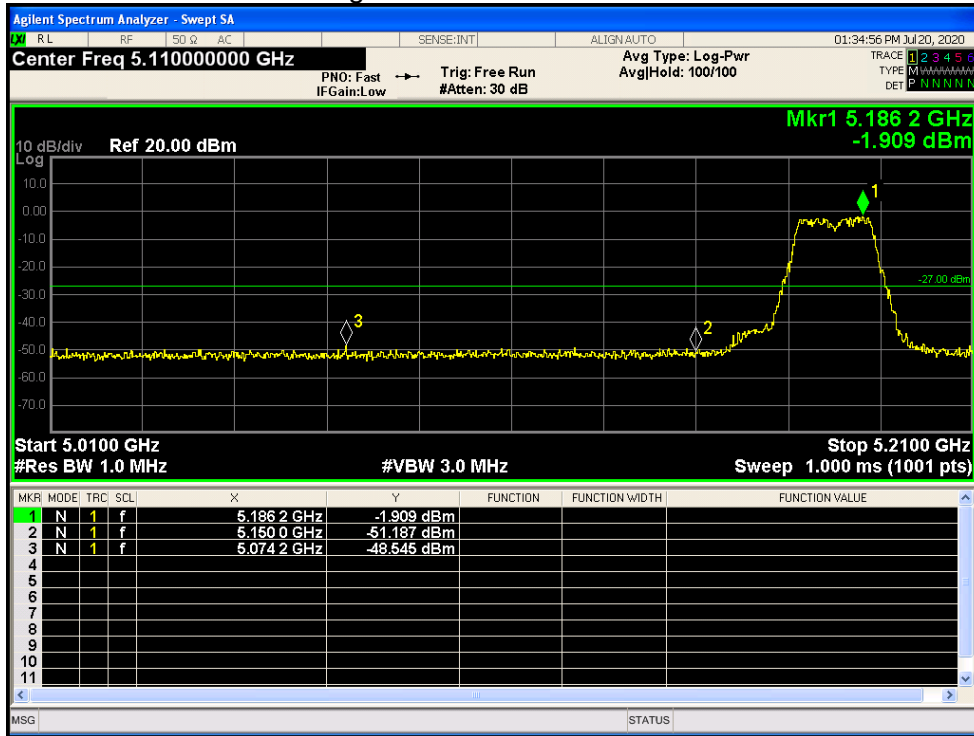


Band Edge NVNT a 5240MHz High Ant1

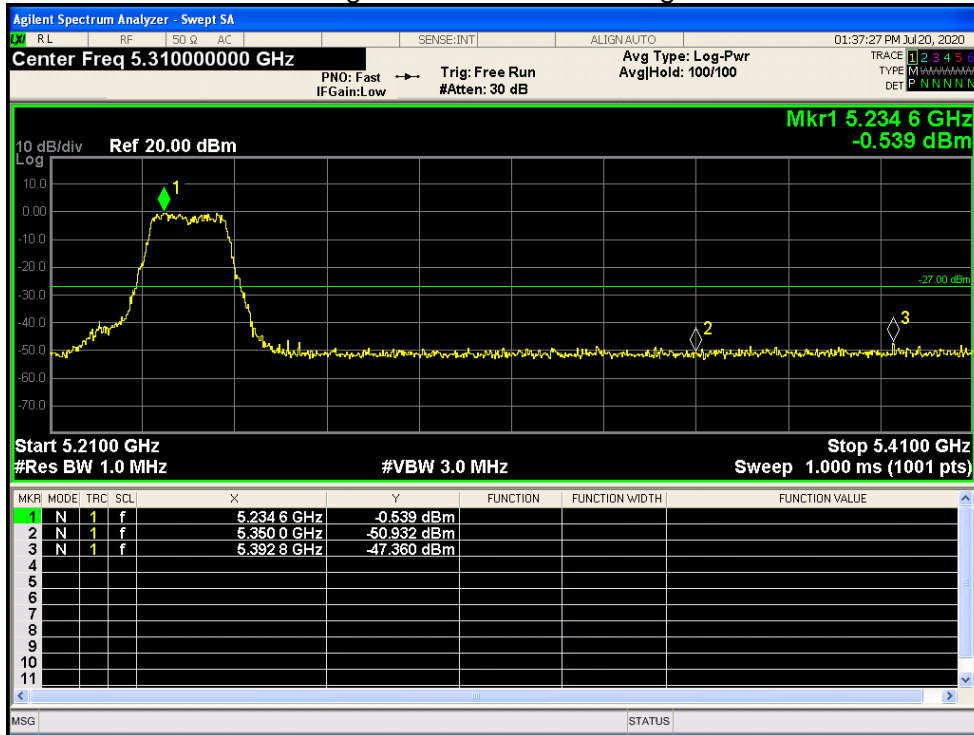


Band Edge NVNT ac20 5180MHz Low Ant1

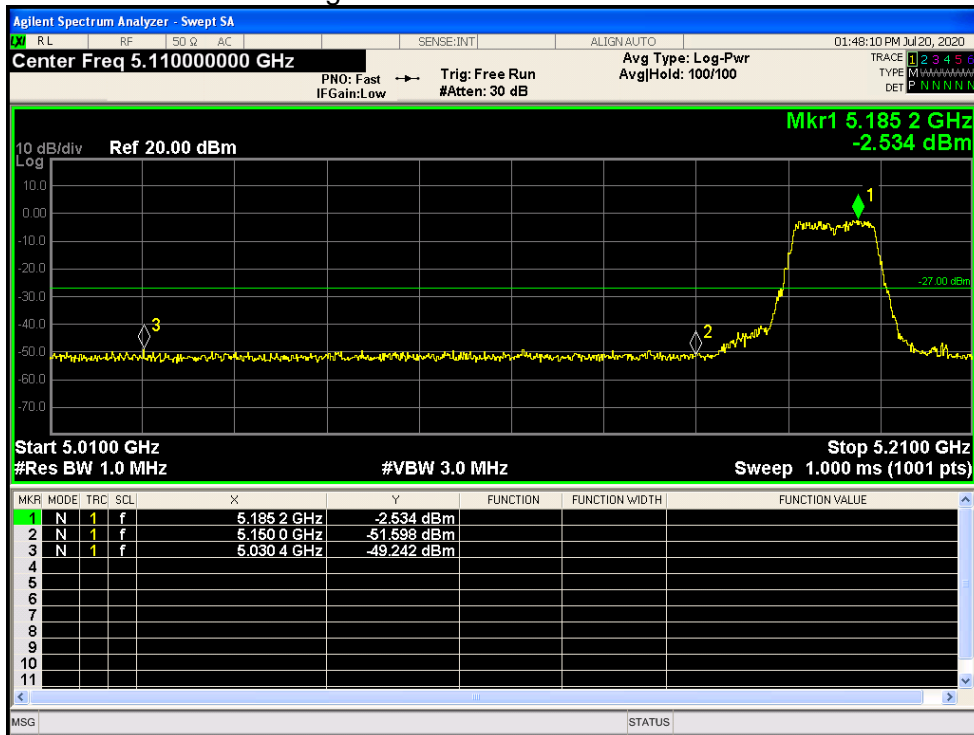


Band Edge NVNT ac20 5240MHz High Ant1

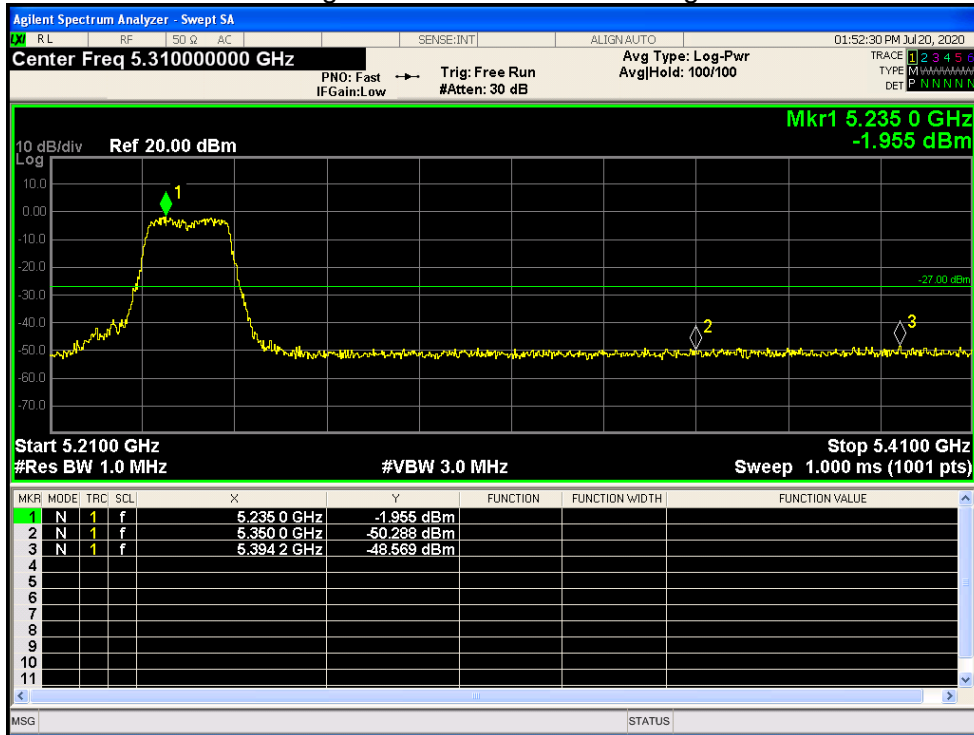


Band Edge NVNT ac40 5190MHz Low Ant1

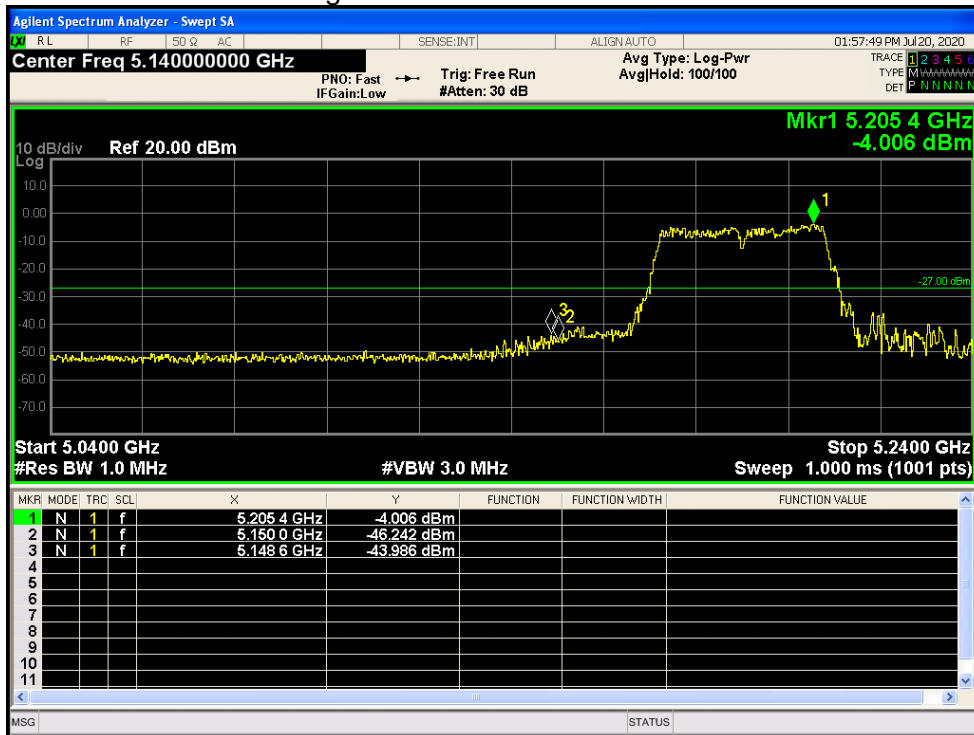

Band Edge NVNT ac40 5230MHz High Ant1

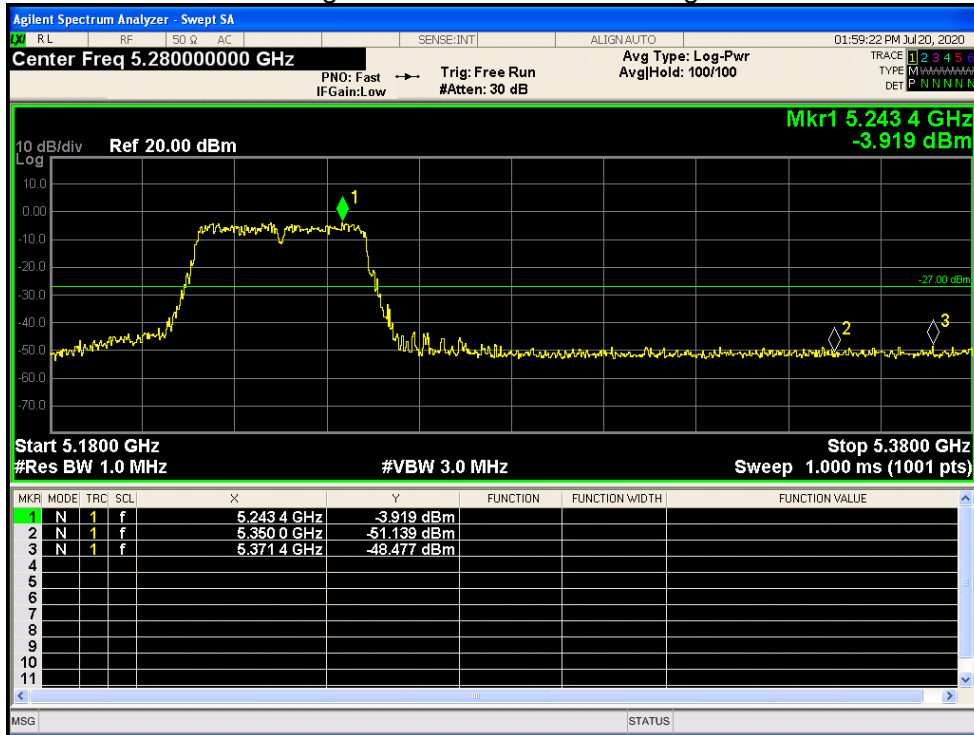


Band Edge NVNT ac80 5210MHz Low Ant1

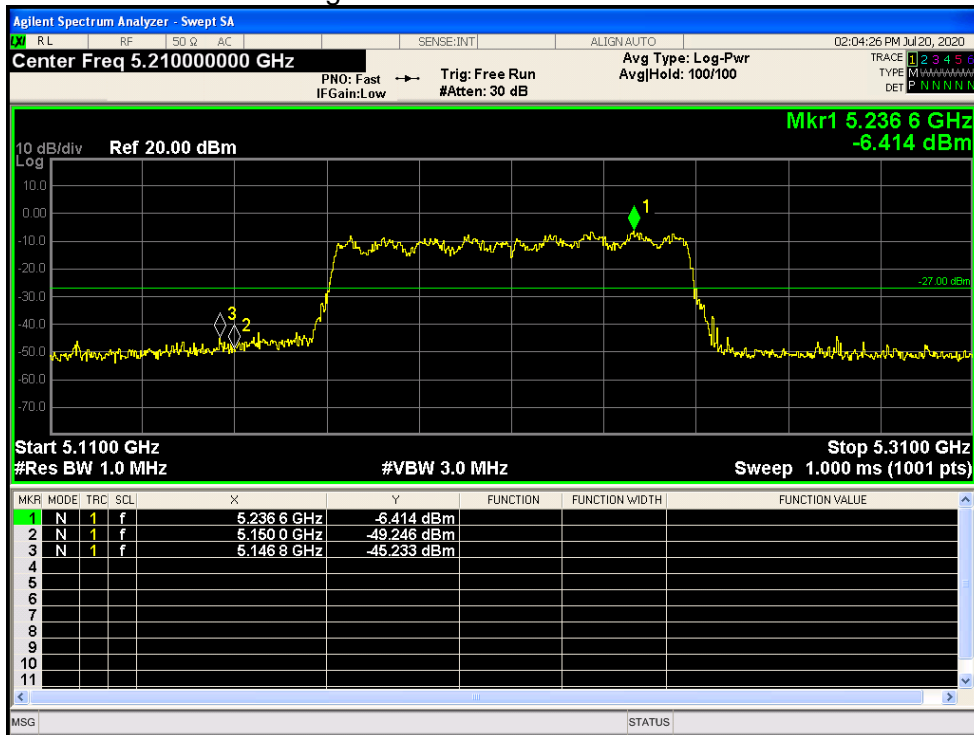





Band Edge NVNT n20 5180MHz Low Ant1

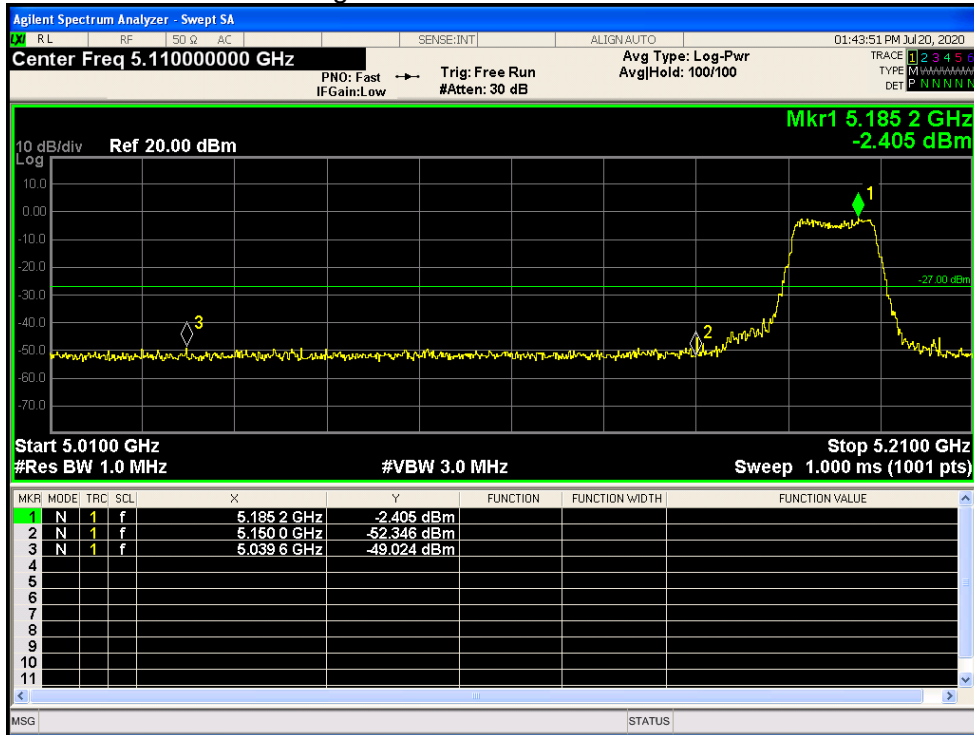


Band Edge NVNT n20 5240MHz High Ant1

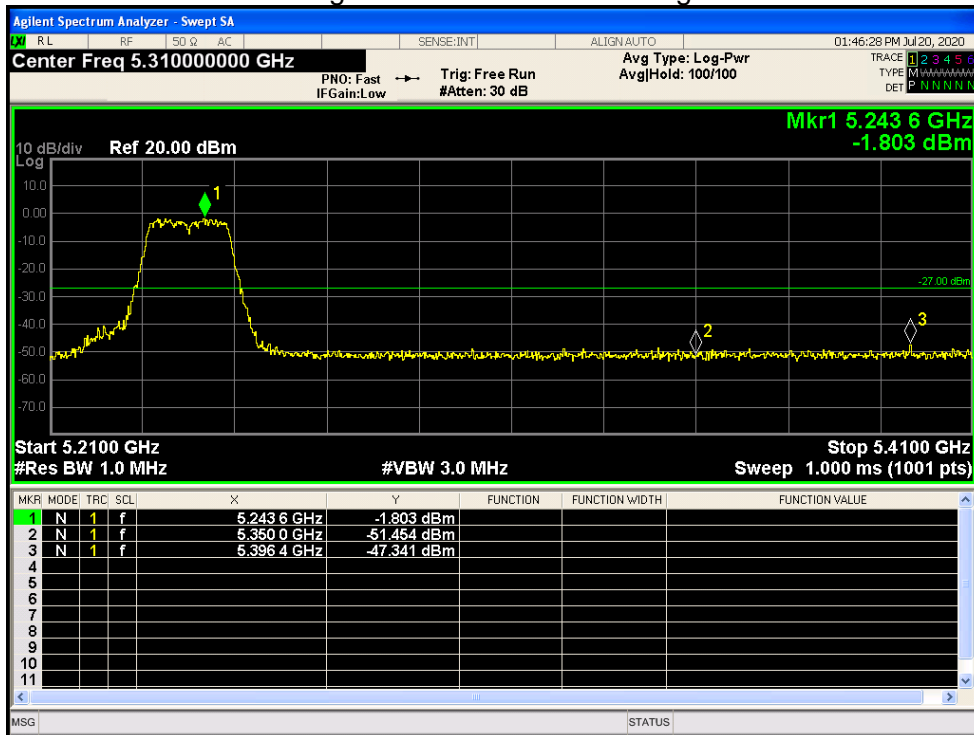

Band Edge NVNT n40 5190MHz Low Ant1

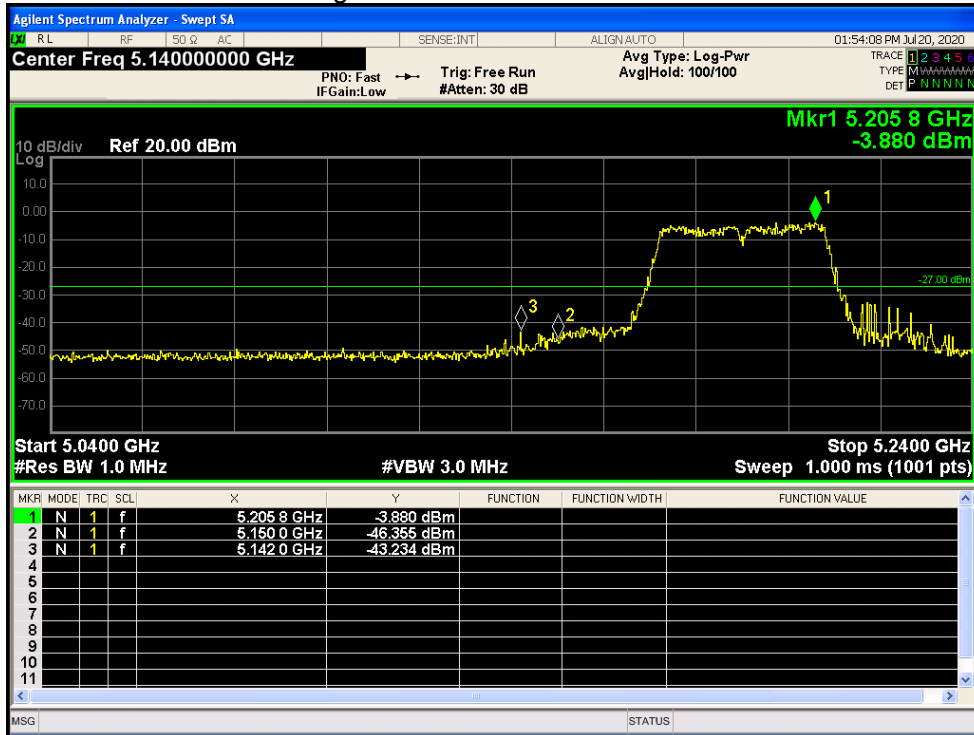


Band Edge NVNT n40 5230MHz High Ant1

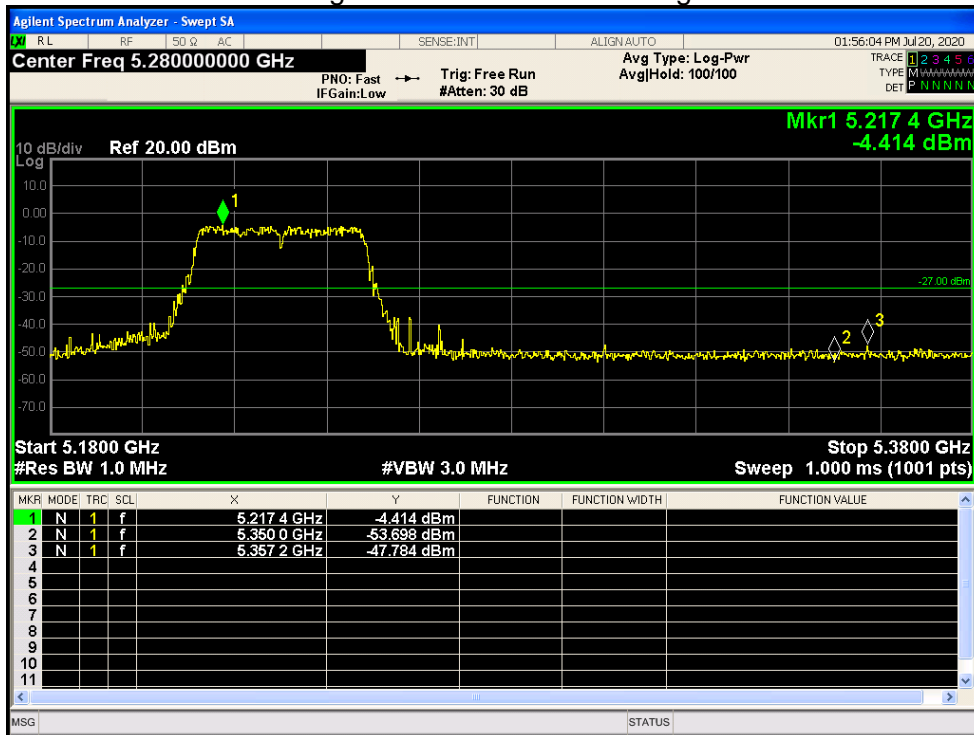


**CONDUCTED RF SPURIOUS EMISSION**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (EIRP dBc)	Limit (EIRP dBc)	Verdict
NVNT	a	5180	Ant1	-38.24	-27	Pass
NVNT	a	5200	Ant1	-38.6	-27	Pass
NVNT	a	5240	Ant1	-37.35	-27	Pass
NVNT	ac20	5180	Ant1	-37.99	-27	Pass
NVNT	ac20	5200	Ant1	-37.93	-27	Pass
NVNT	ac20	5240	Ant1	-37.91	-27	Pass
NVNT	ac40	5190	Ant1	-38.49	-27	Pass
NVNT	ac40	5230	Ant1	-38.5	-27	Pass
NVNT	ac80	5210	Ant1	-38.43	-27	Pass
NVNT	n20	5180	Ant1	-38.04	-27	Pass
NVNT	n20	5200	Ant1	-37.27	-27	Pass
NVNT	n20	5240	Ant1	-38.19	-27	Pass
NVNT	n40	5190	Ant1	-38.48	-27	Pass
NVNT	n40	5230	Ant1	-38.29	-27	Pass


Tx. Spurious NVNT a 5180MHz Ant1 Emission

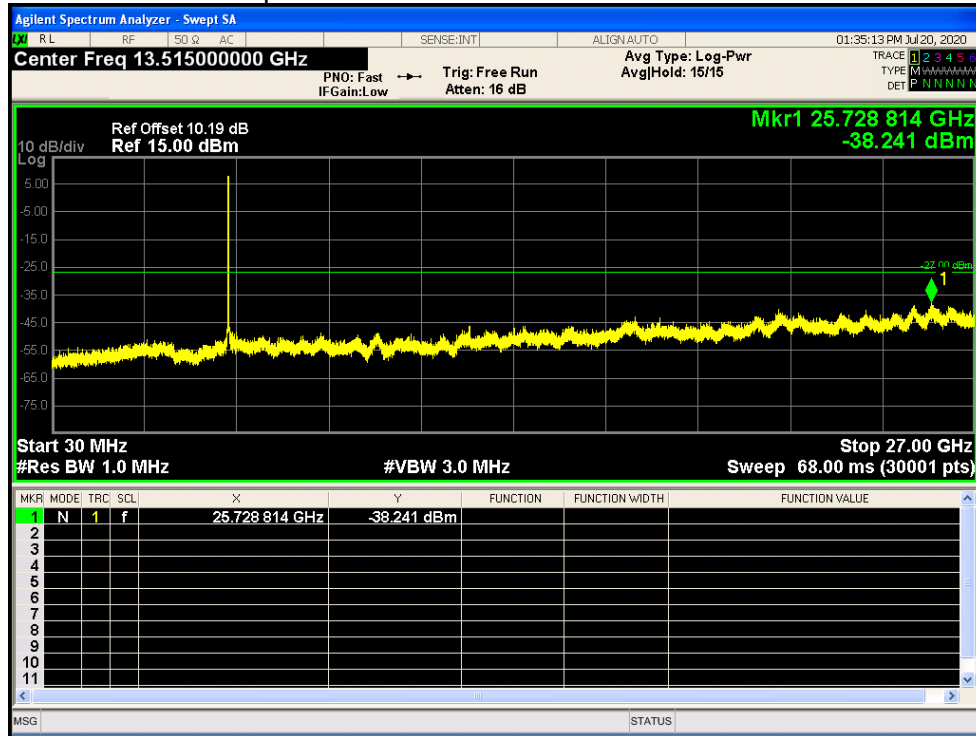


Tx. Spurious NVNT a 5200MHz Ant1 Emission

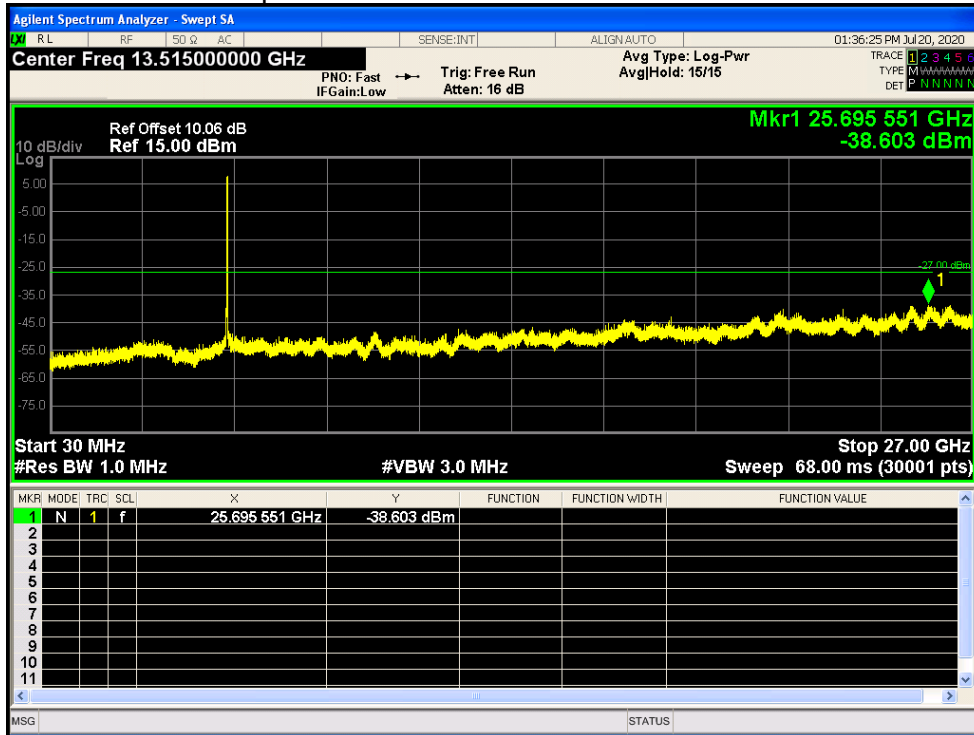


Tx. Spurious NVNT a 5240MHz Ant1 Emission

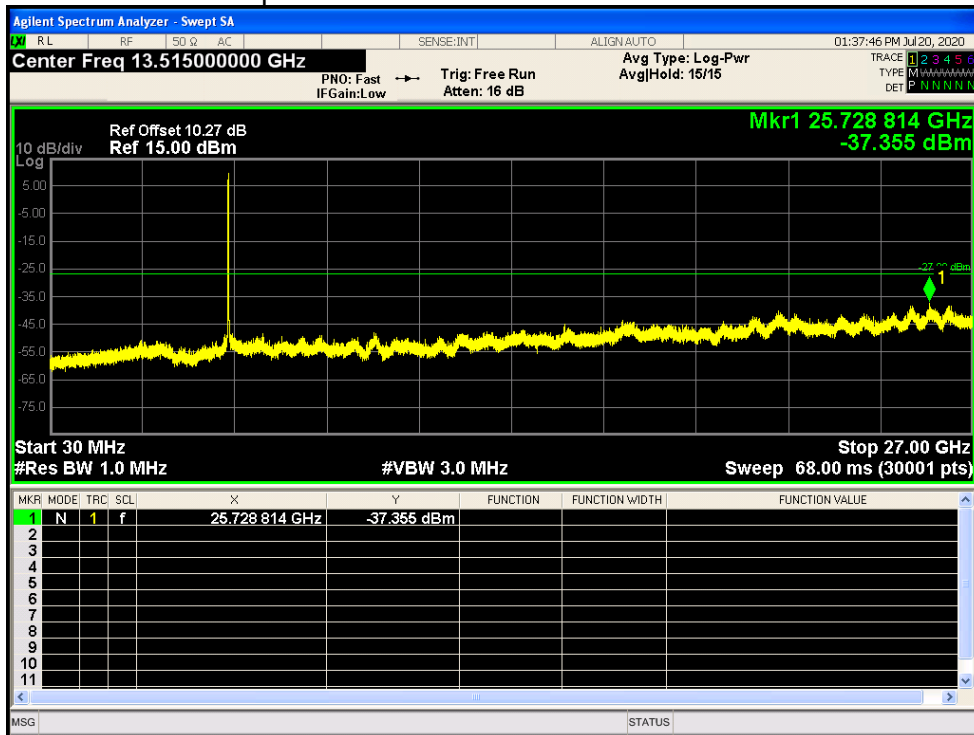


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

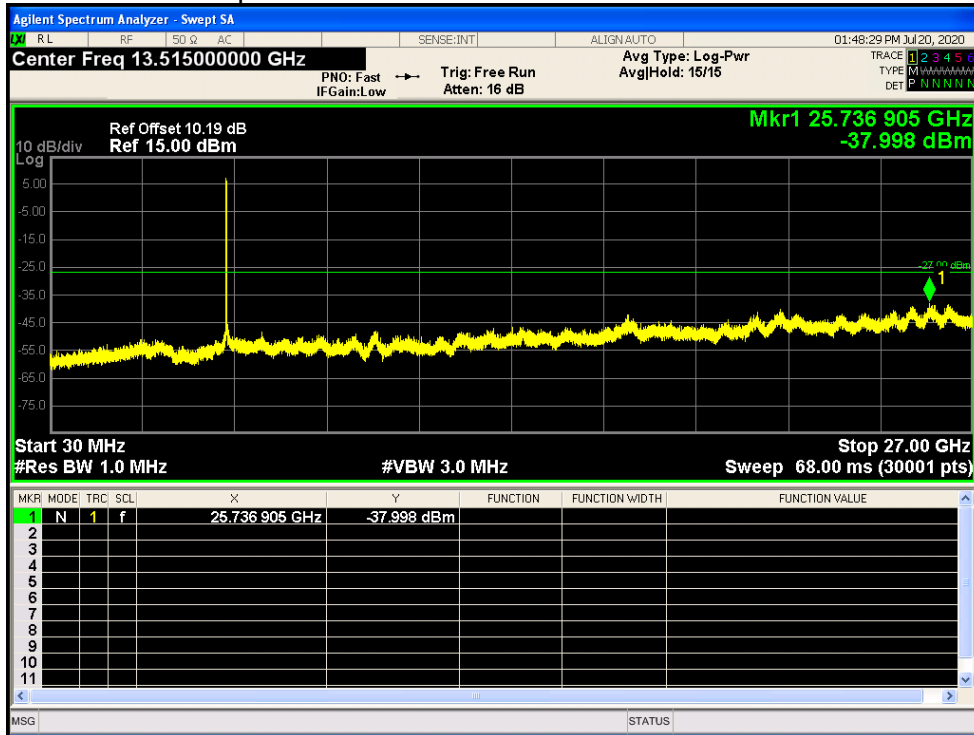


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

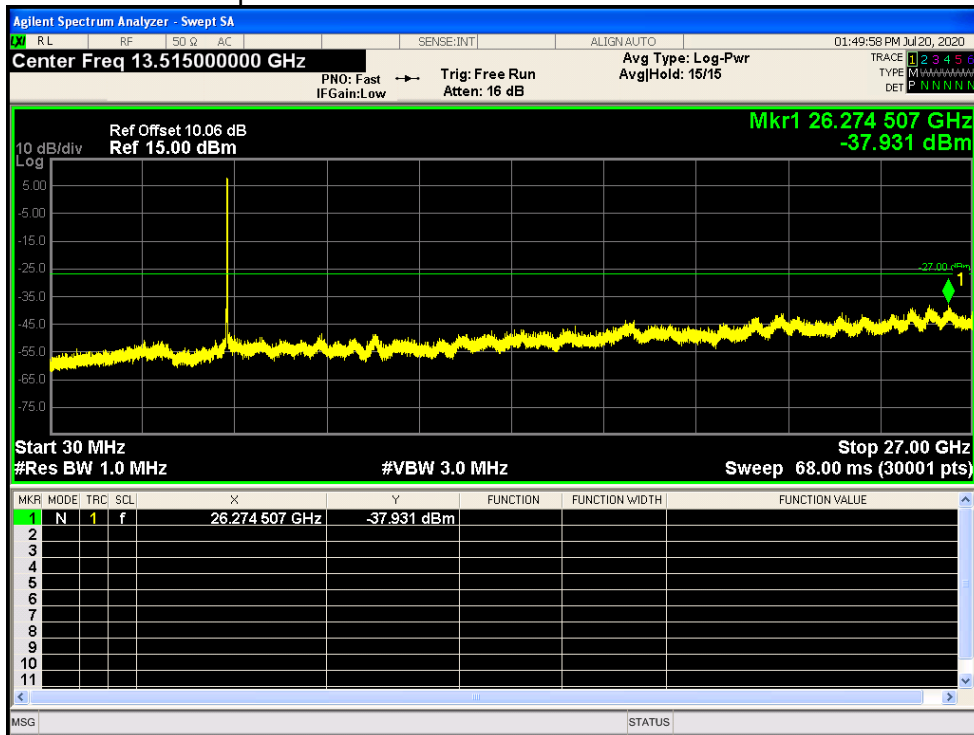


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

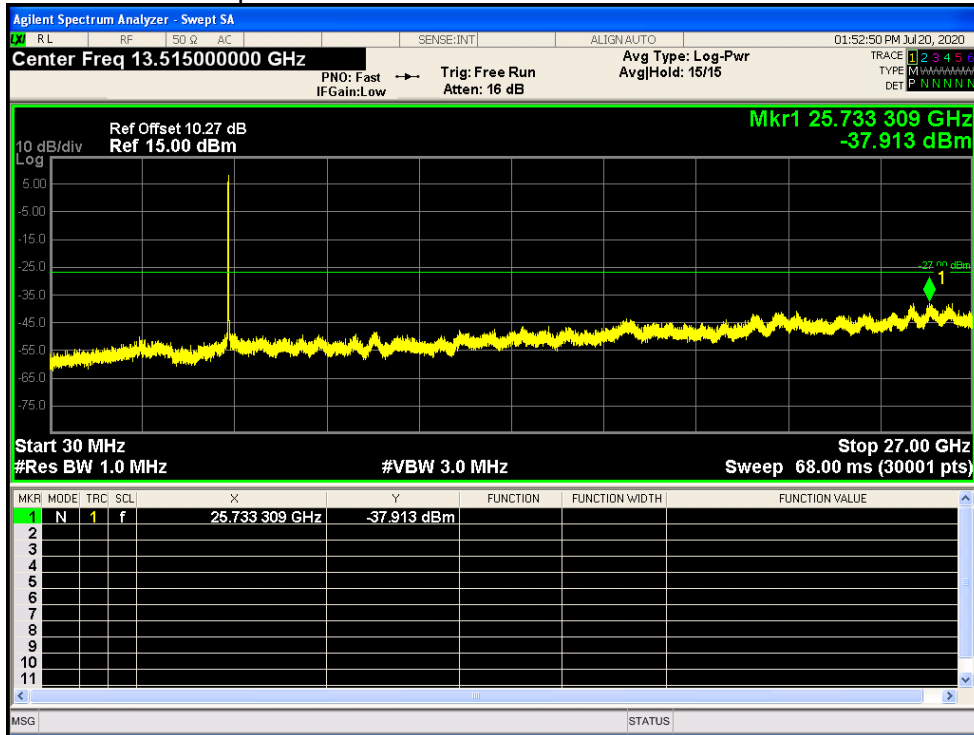


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

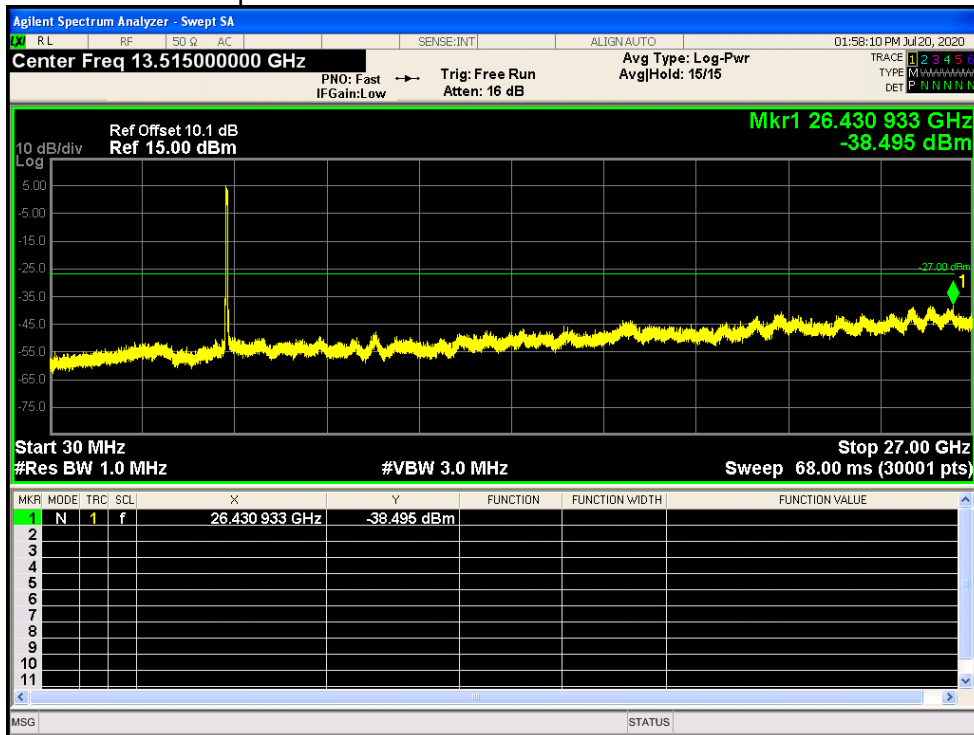


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

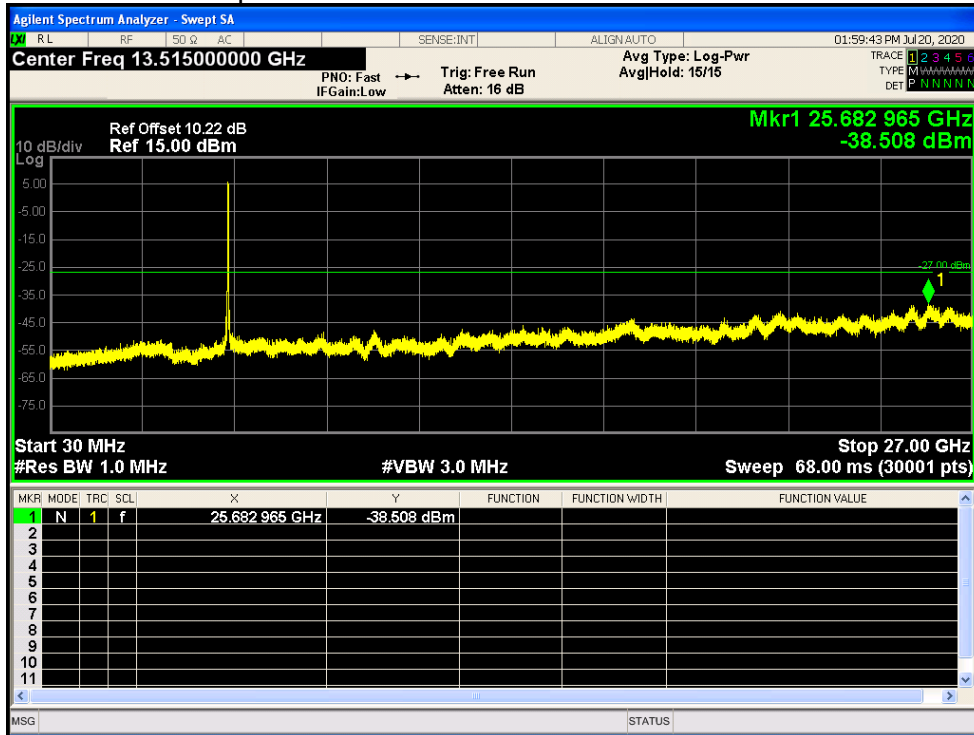


Tx. Spurious NVNT ac80 5210MHz Ant1 Emission

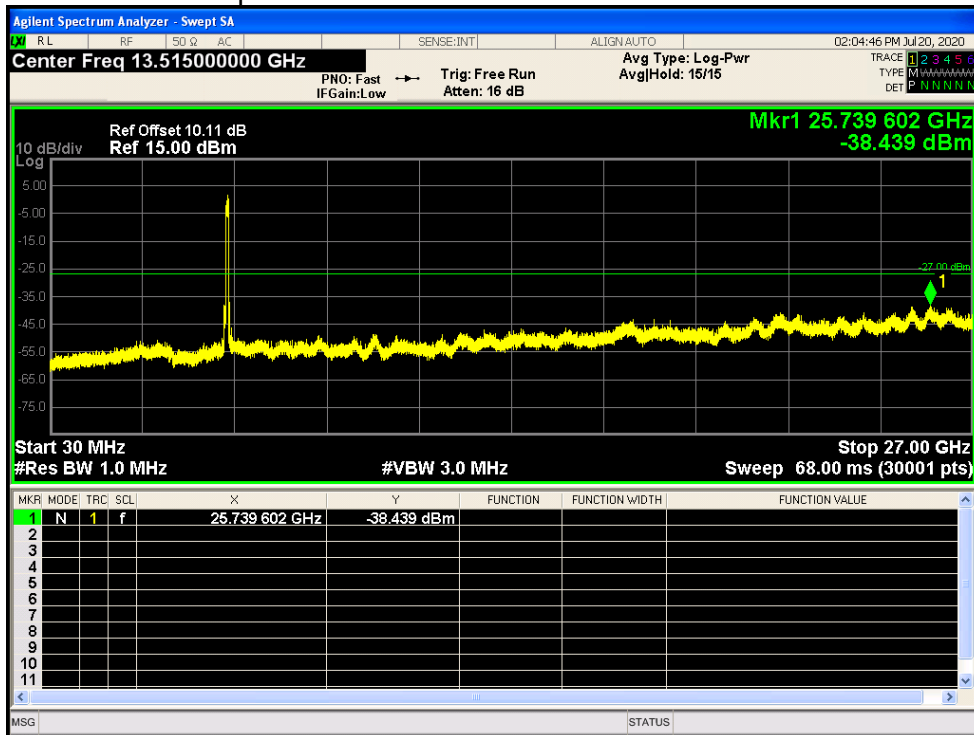

Tx. Spurious NVNT n20 5180MHz Ant1 Emission

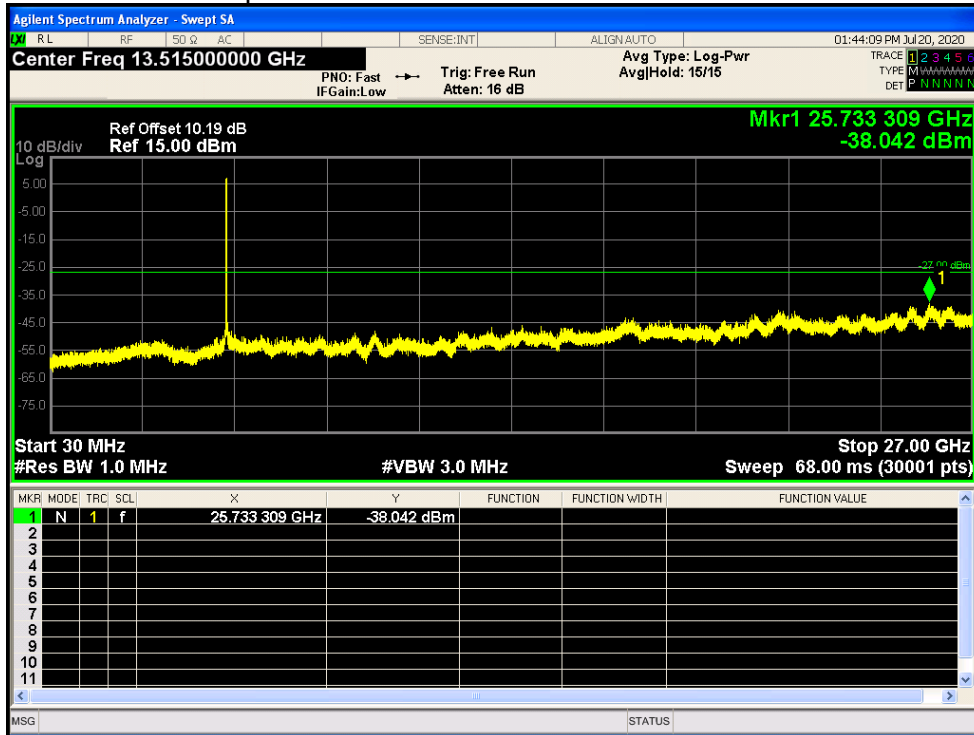


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

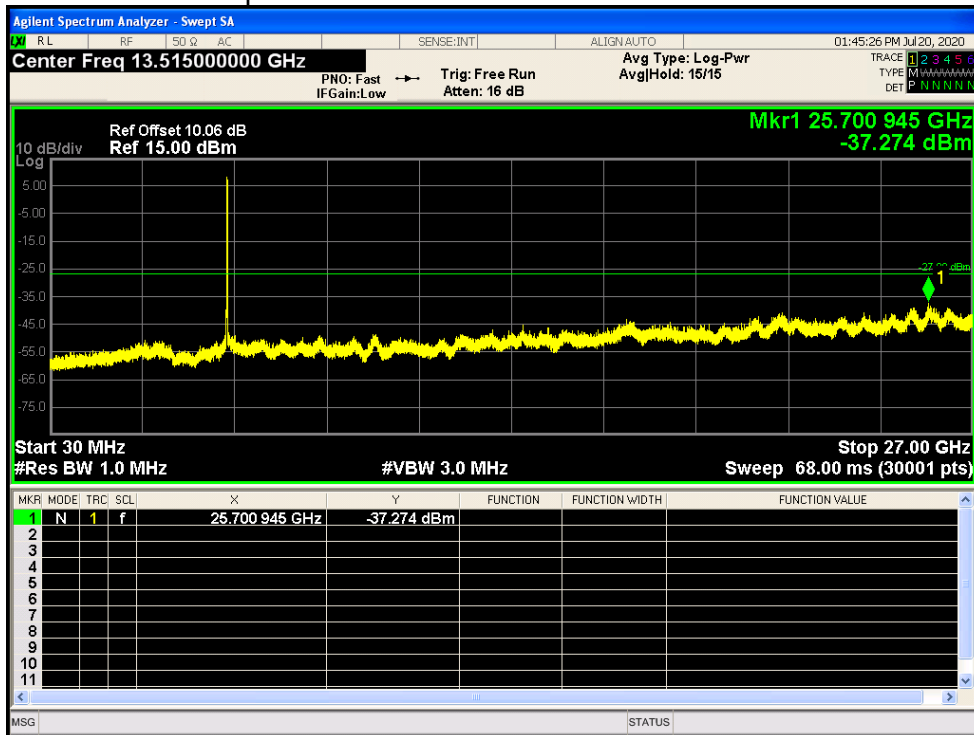





Tx. Spurious NVNT n20 5240MHz Ant1 Emission

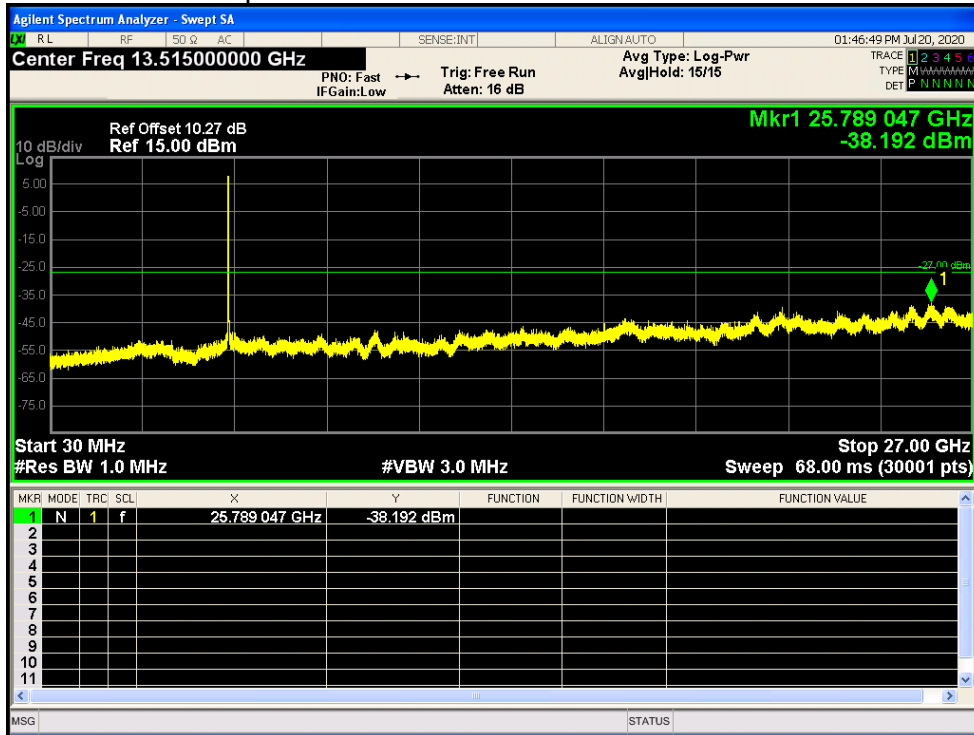

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

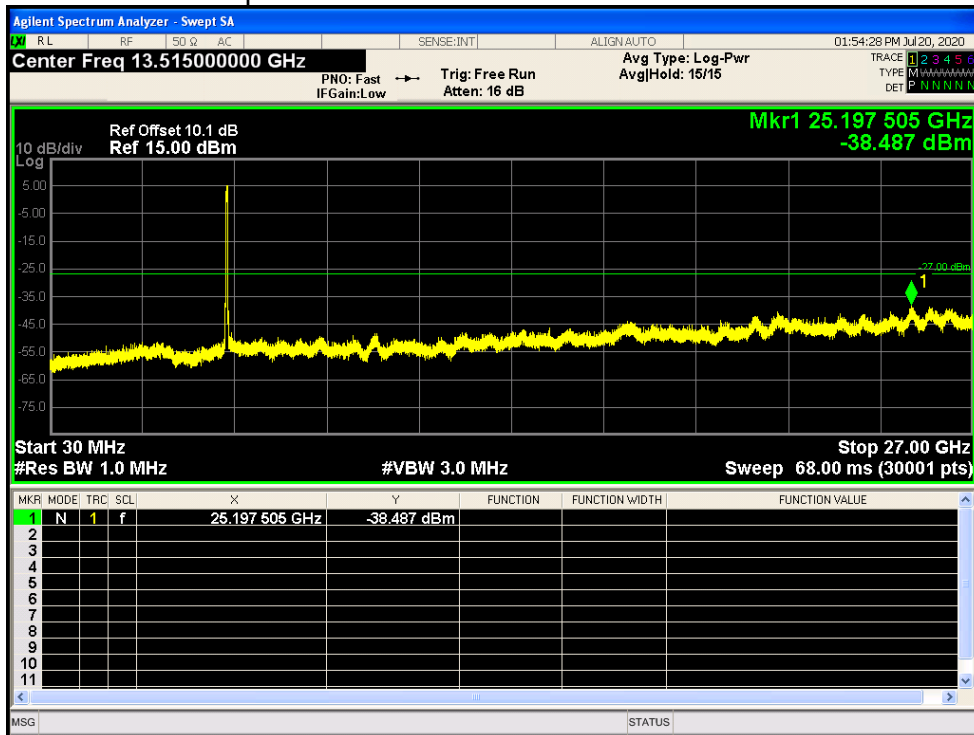

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

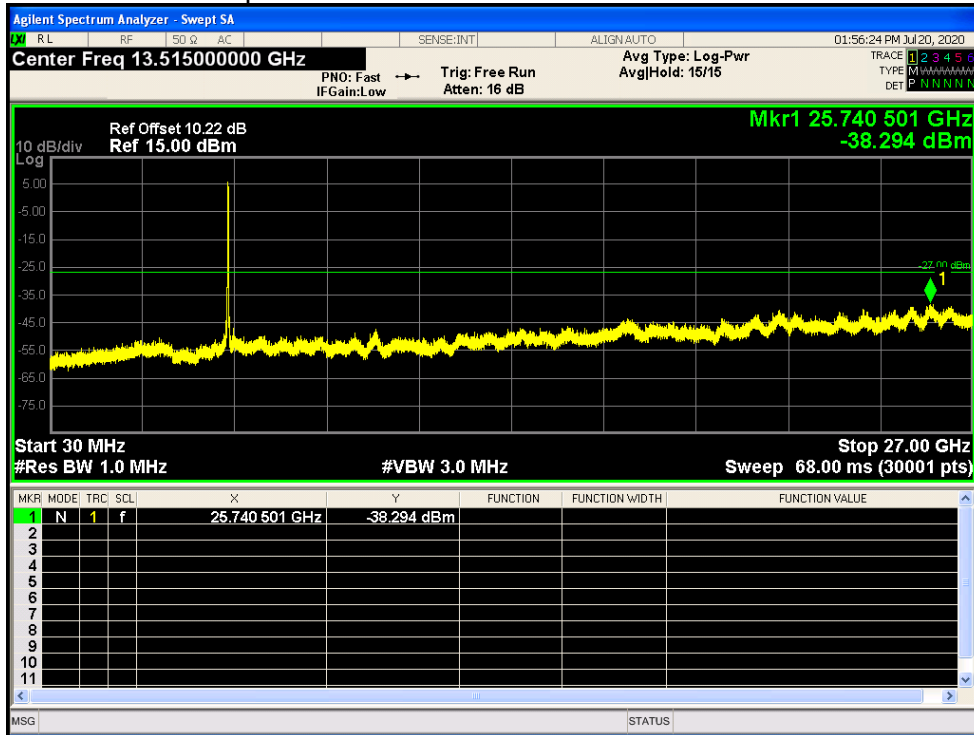


5.8G


DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant1	100	0
NVNT	a	5785	Ant1	100	0
NVNT	a	5825	Ant1	100	0
NVNT	ac20	5745	Ant1	100	0
NVNT	ac20	5785	Ant1	100	0
NVNT	ac20	5825	Ant1	100	0
NVNT	ac40	5755	Ant1	100	0
NVNT	ac40	5795	Ant1	100	0
NVNT	ac80	5775	Ant1	100	0
NVNT	n20	5745	Ant1	100	0
NVNT	n20	5785	Ant1	100	0
NVNT	n20	5825	Ant1	100	0
NVNT	n40	5755	Ant1	100	0
NVNT	n40	5795	Ant1	100	0


Duty Cycle NVNT a 5745MHz Ant1

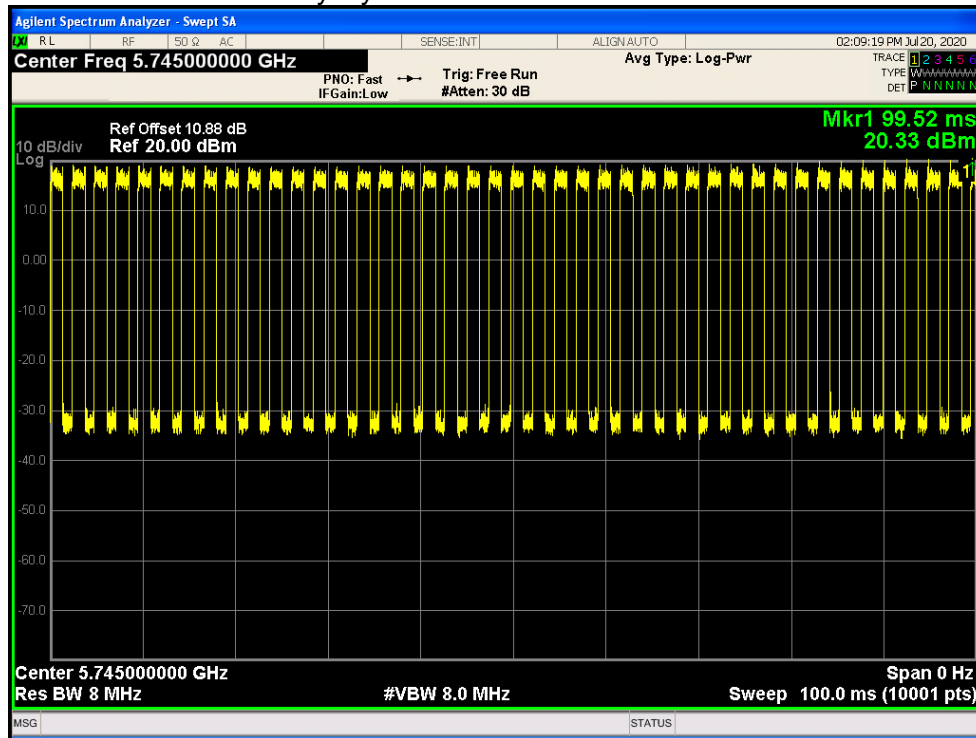


Duty Cycle NVNT a 5785MHz Ant1

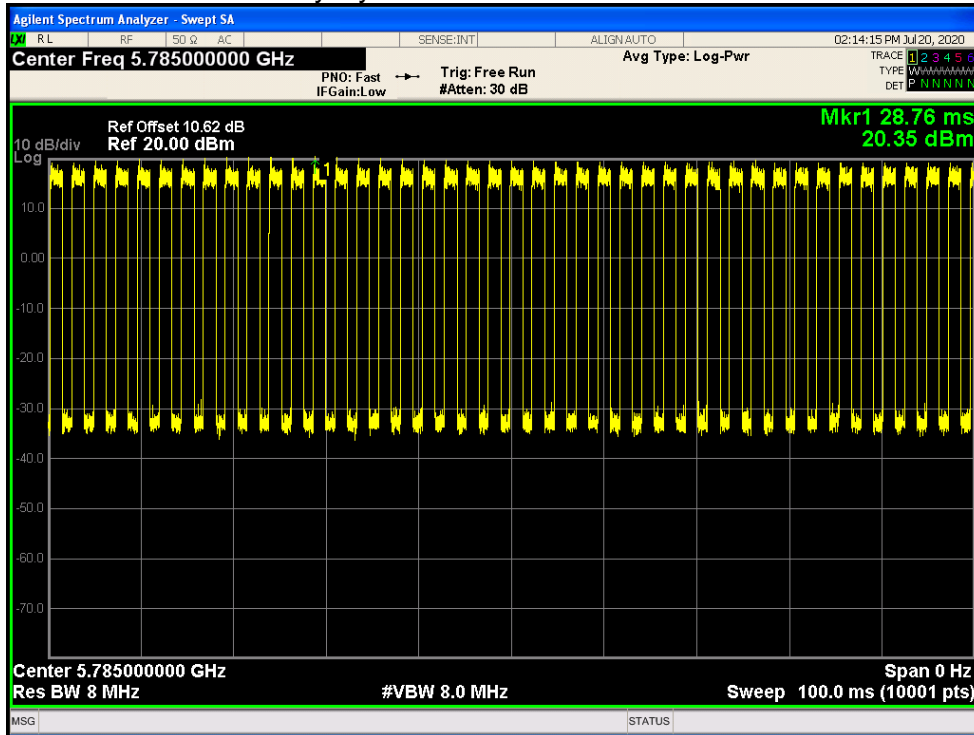


Duty Cycle NVNT a 5825MHz Ant1

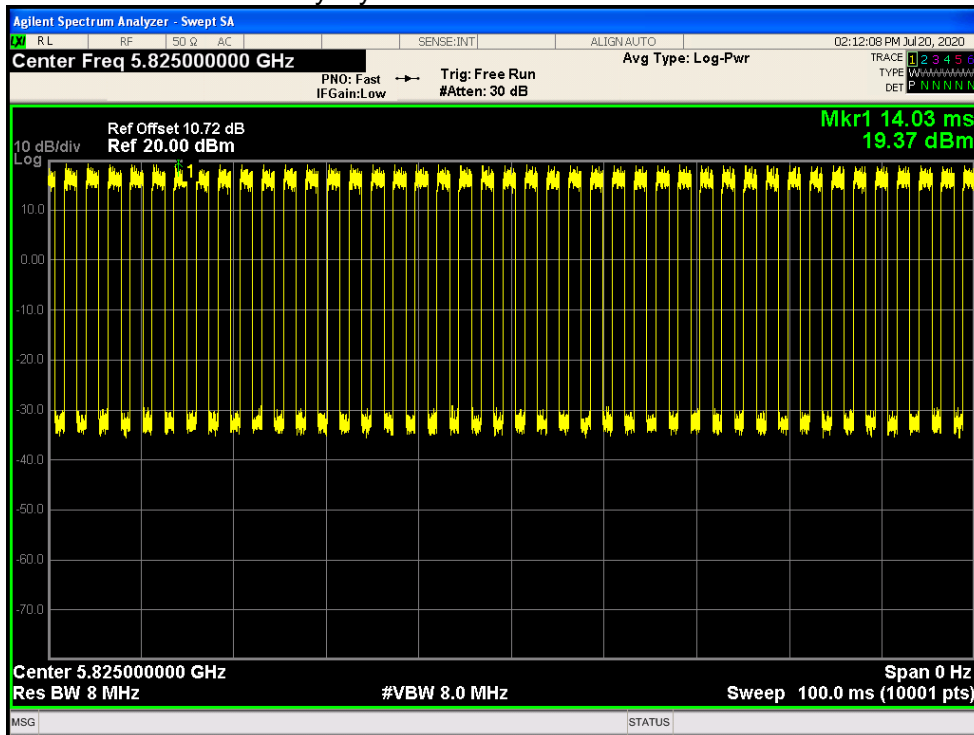


### Duty Cycle NVNT ac20 5745MHz Ant1

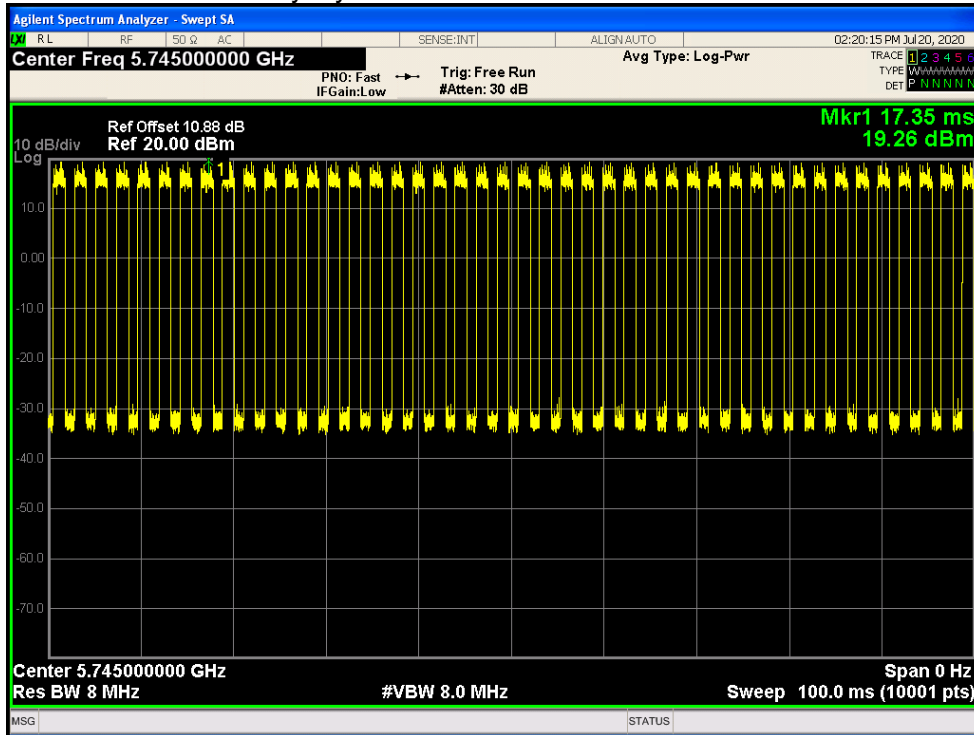


### Duty Cycle NVNT ac20 5785MHz Ant1

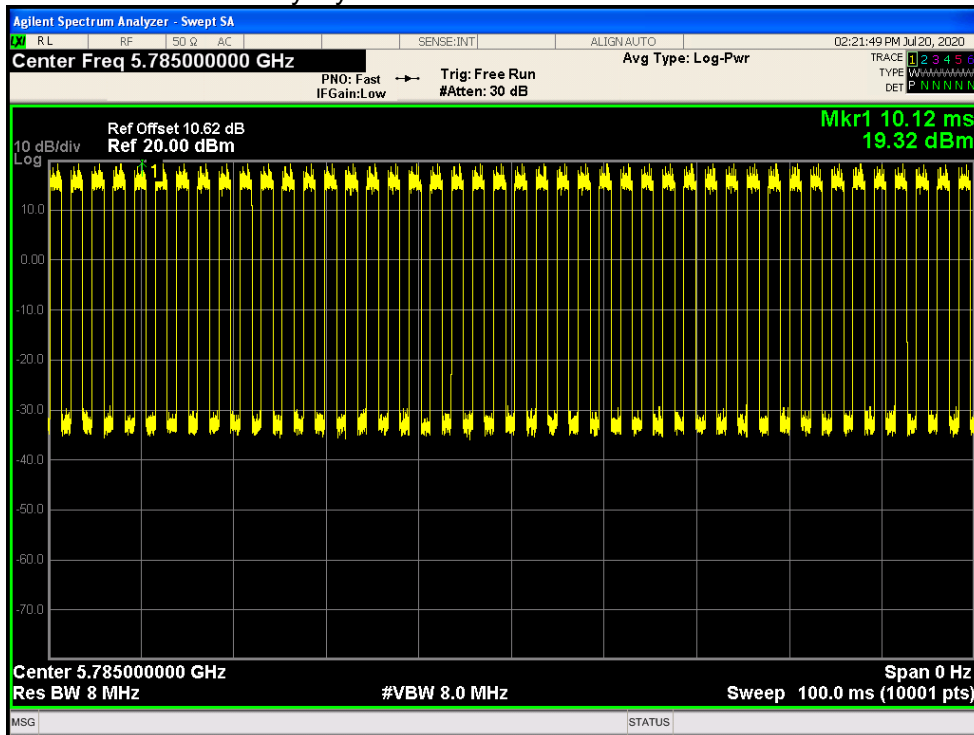


### Duty Cycle NVNT ac20 5825MHz Ant1

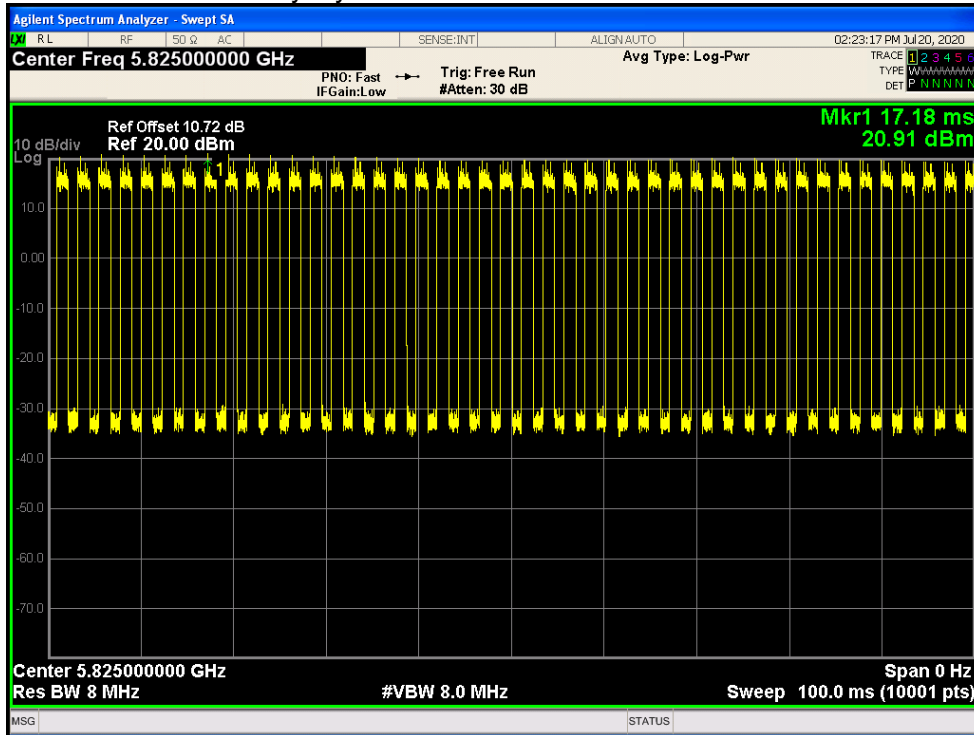


### Duty Cycle NVNT ac40 5755MHz Ant1

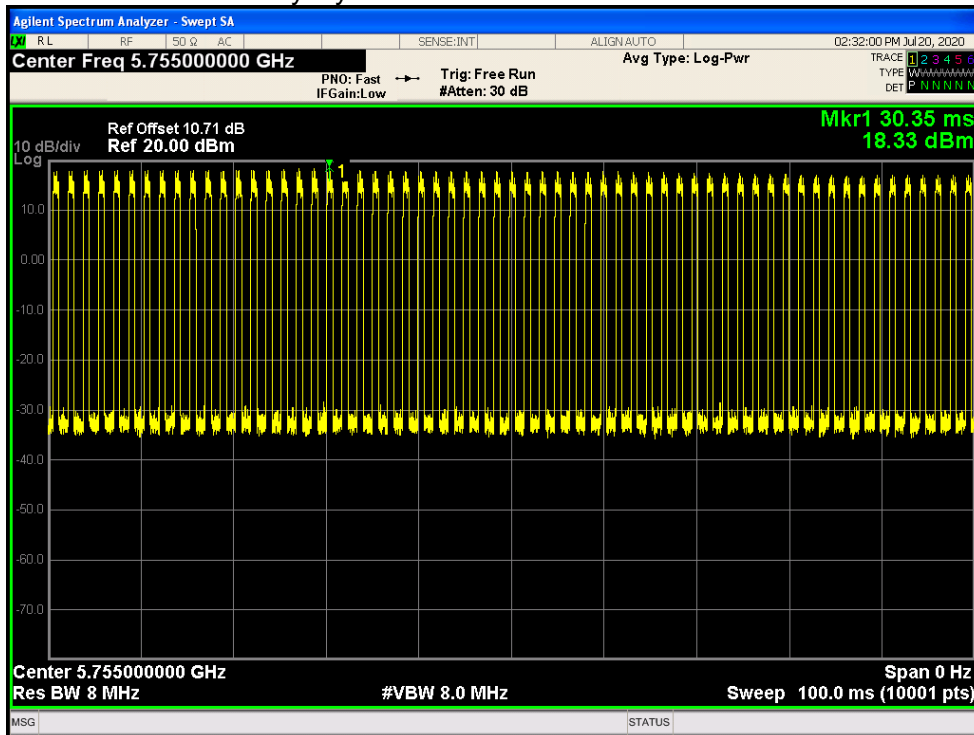


### Duty Cycle NVNT ac40 5795MHz Ant1

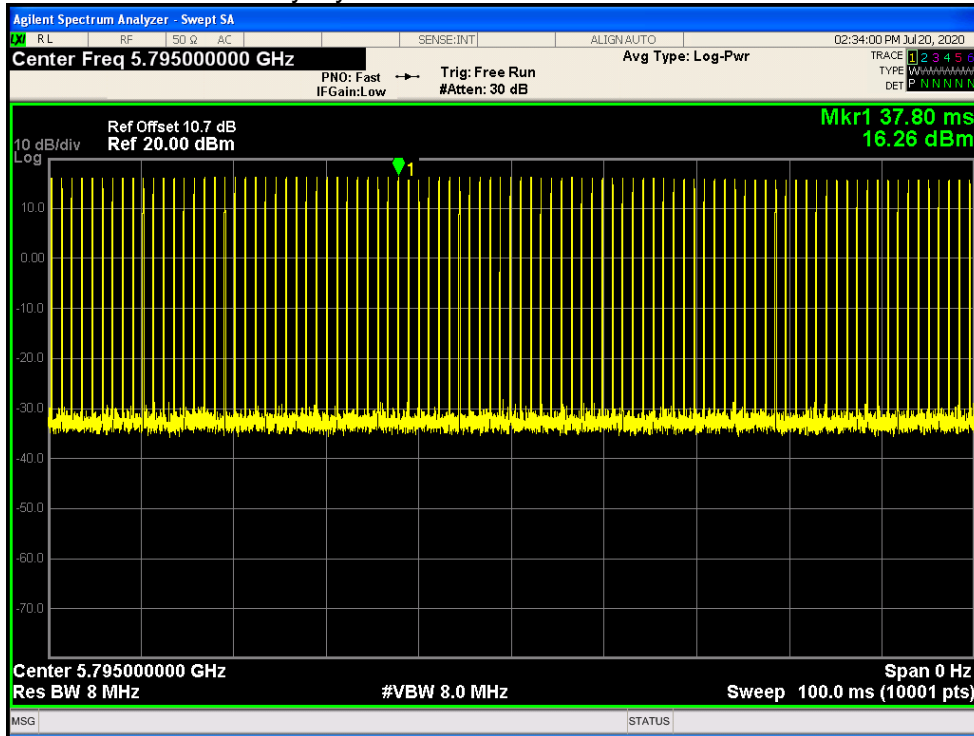


### Duty Cycle NVNT ac80 5775MHz Ant1

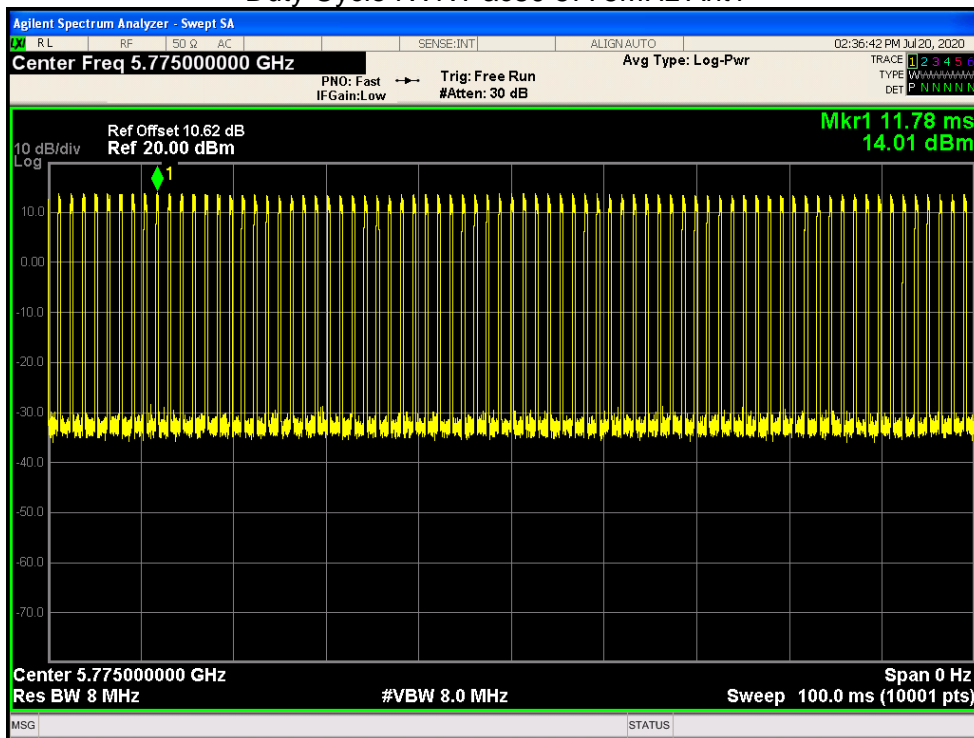

### Duty Cycle NVNT n20 5745MHz Ant1

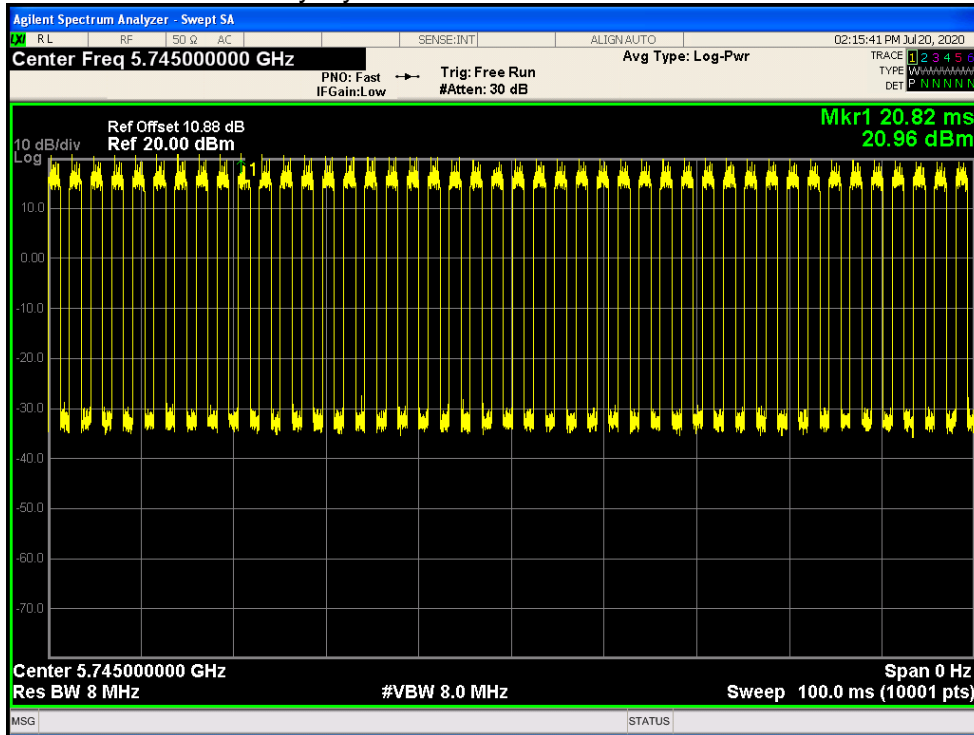


### Duty Cycle NVNT n20 5785MHz Ant1

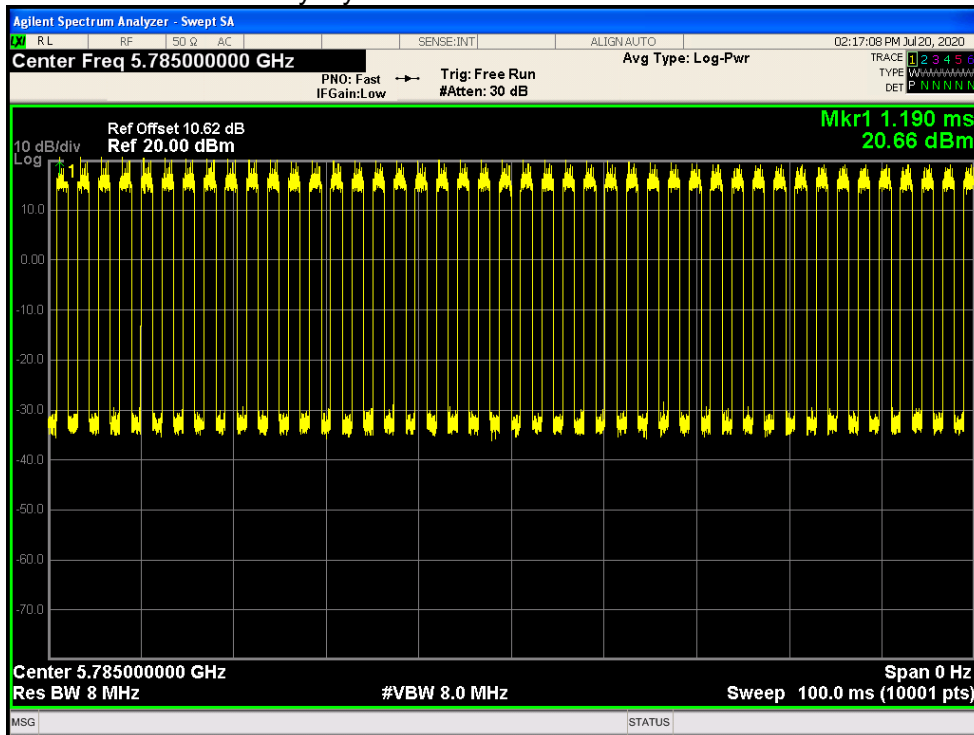




Duty Cycle NVNT n20 5825MHz Ant1

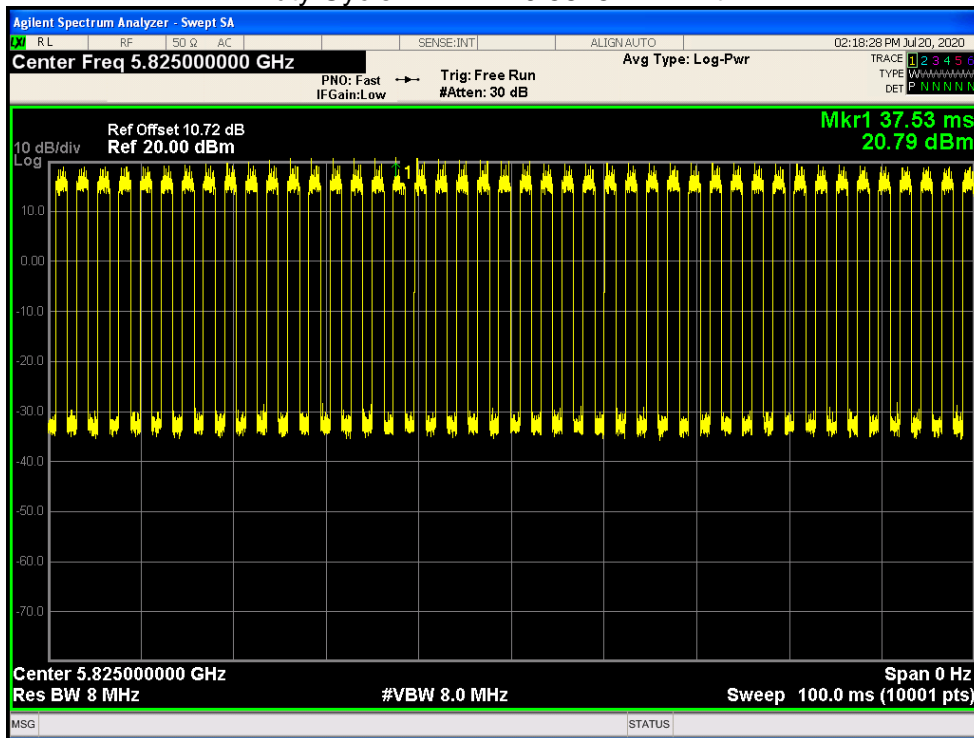

Duty Cycle NVNT n40 5755MHz Ant1

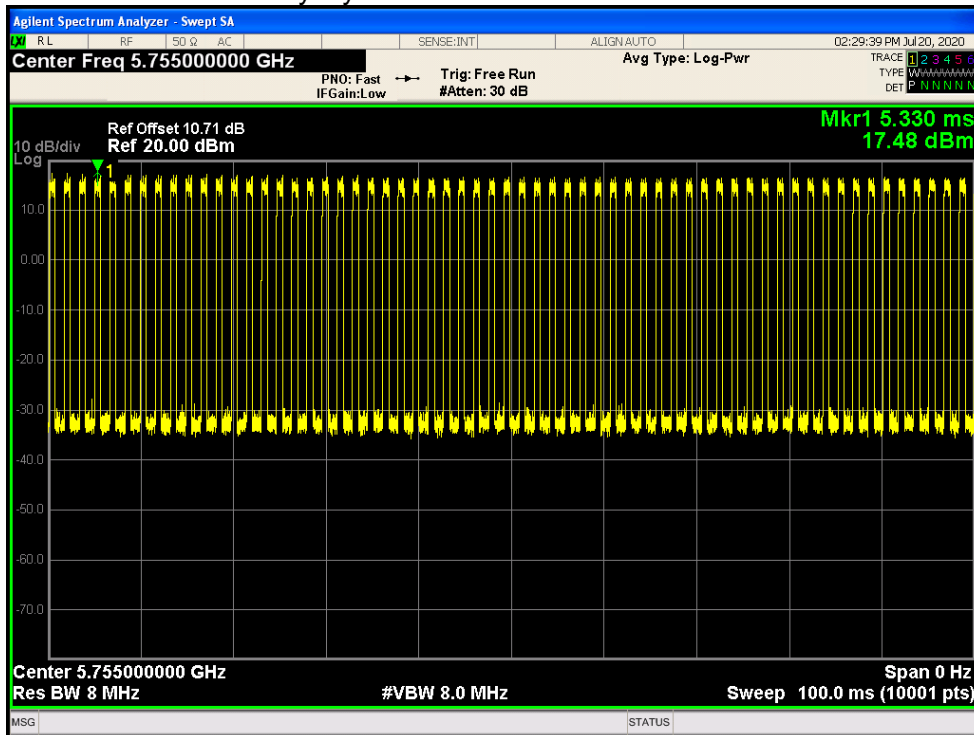




**MAXIMUM CONDUCTED OUTPUT POWER**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	9.36	30	Pass
NVNT	a	5785	Ant1	9.71	30	Pass
NVNT	a	5825	Ant1	9.61	30	Pass
NVNT	ac20	5745	Ant1	9.34	30	Pass
NVNT	ac20	5785	Ant1	9.69	30	Pass
NVNT	ac20	5825	Ant1	9.6	30	Pass
NVNT	ac40	5755	Ant1	8.57	30	Pass
NVNT	ac40	5795	Ant1	9.08	30	Pass
NVNT	ac80	5775	Ant1	11.69	30	Pass
NVNT	n20	5745	Ant1	9.34	30	Pass
NVNT	n20	5785	Ant1	9.68	30	Pass
NVNT	n20	5825	Ant1	9.55	30	Pass
NVNT	n40	5755	Ant1	8.6	30	Pass
NVNT	n40	5795	Ant1	8.47	30	Pass


**-6DB BANDWIDTH**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.218	0.5	Pass
NVNT	a	5785	Ant1	16.37	0.5	Pass
NVNT	a	5825	Ant1	16.373	0.5	Pass
NVNT	ac20	5745	Ant1	17.305	0.5	Pass
NVNT	ac20	5785	Ant1	17.307	0.5	Pass
NVNT	ac20	5825	Ant1	17.023	0.5	Pass
NVNT	ac40	5755	Ant1	35.51	0.5	Pass
NVNT	ac40	5795	Ant1	34.833	0.5	Pass
NVNT	ac80	5775	Ant1	75.264	0.5	Pass
NVNT	n20	5745	Ant1	17.298	0.5	Pass
NVNT	n20	5785	Ant1	17.574	0.5	Pass
NVNT	n20	5825	Ant1	17.257	0.5	Pass
NVNT	n40	5755	Ant1	35.64	0.5	Pass
NVNT	n40	5795	Ant1	35.204	0.5	Pass


-6dB Bandwidth NVNT a 5745MHz Ant1

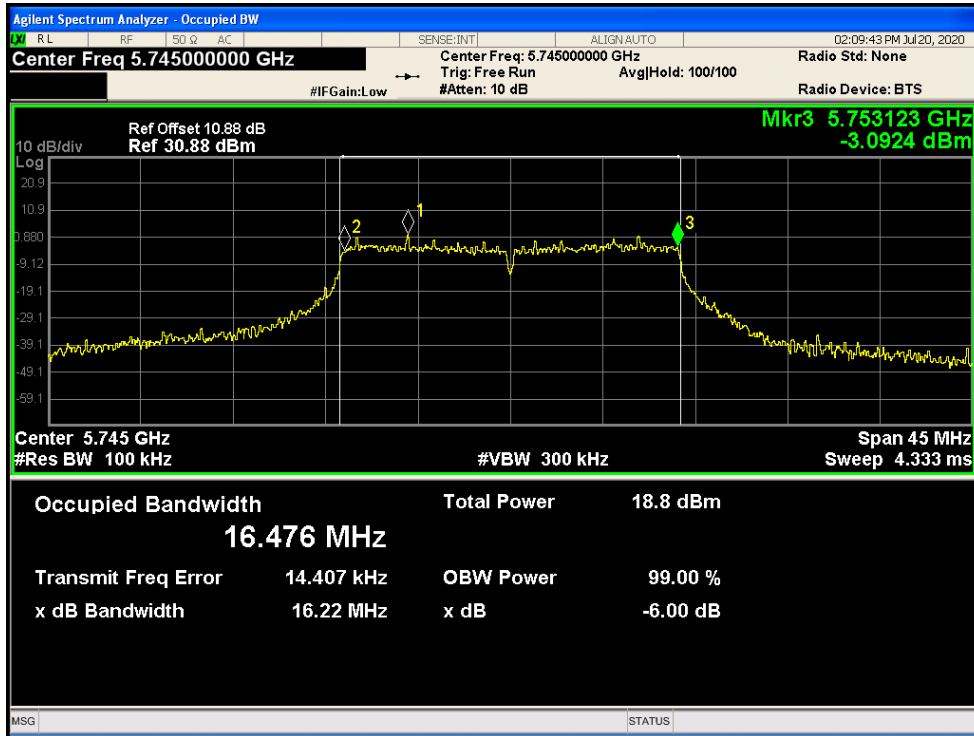


-6dB Bandwidth NVNT a 5785MHz Ant1

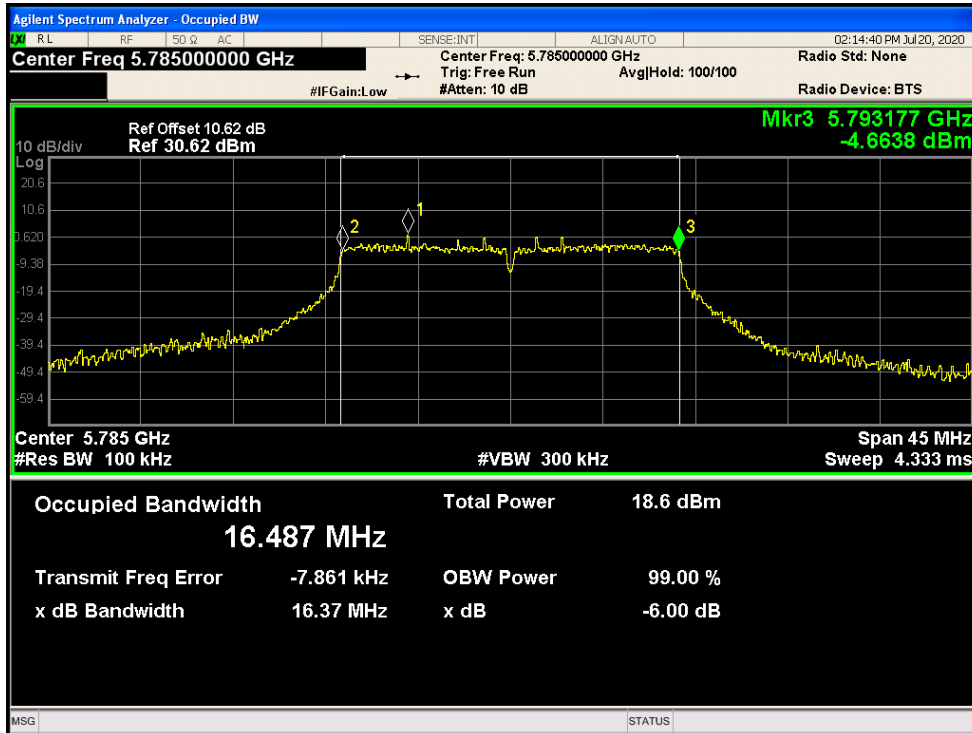


-6dB Bandwidth NVNT a 5825MHz Ant1

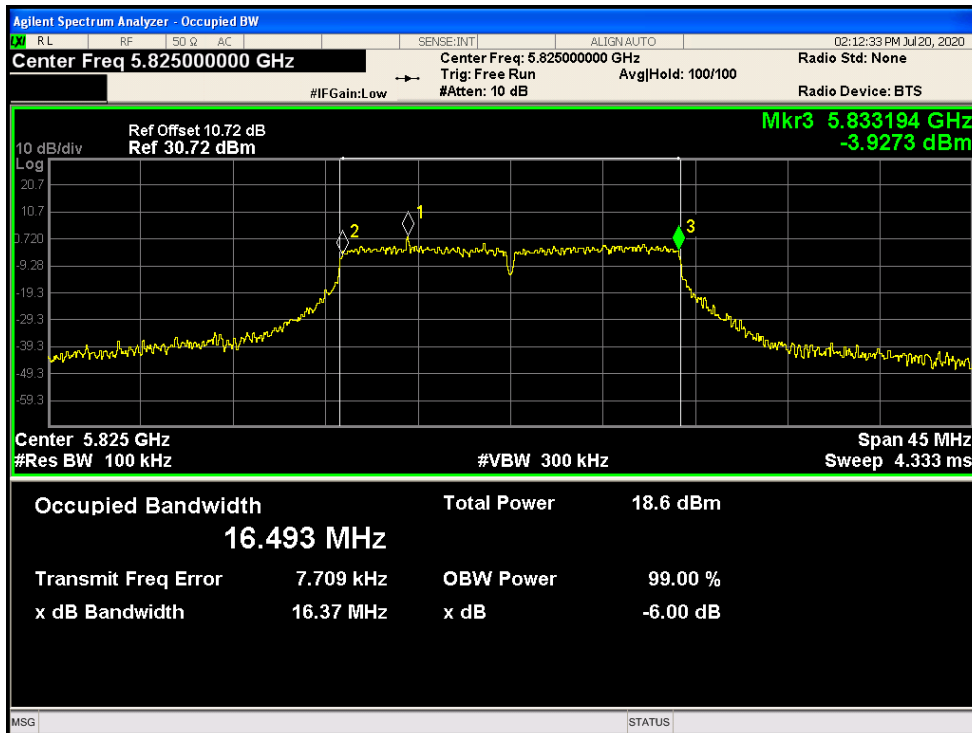


-6dB Bandwidth NVNT ac20 5745MHz Ant1

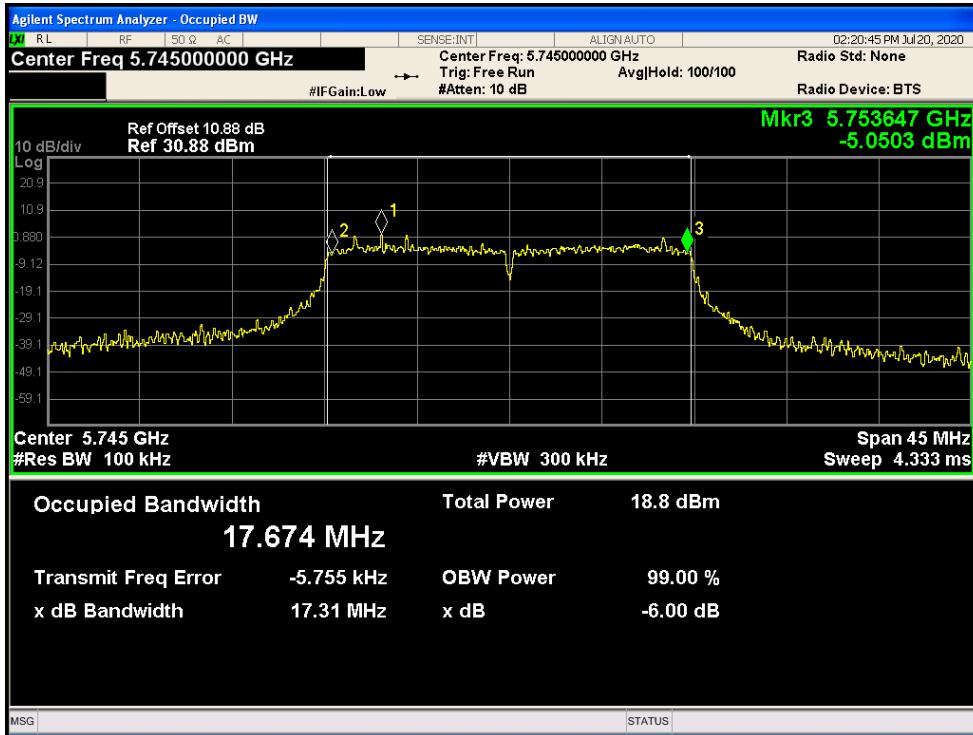


-6dB Bandwidth NVNT ac20 5785MHz Ant1

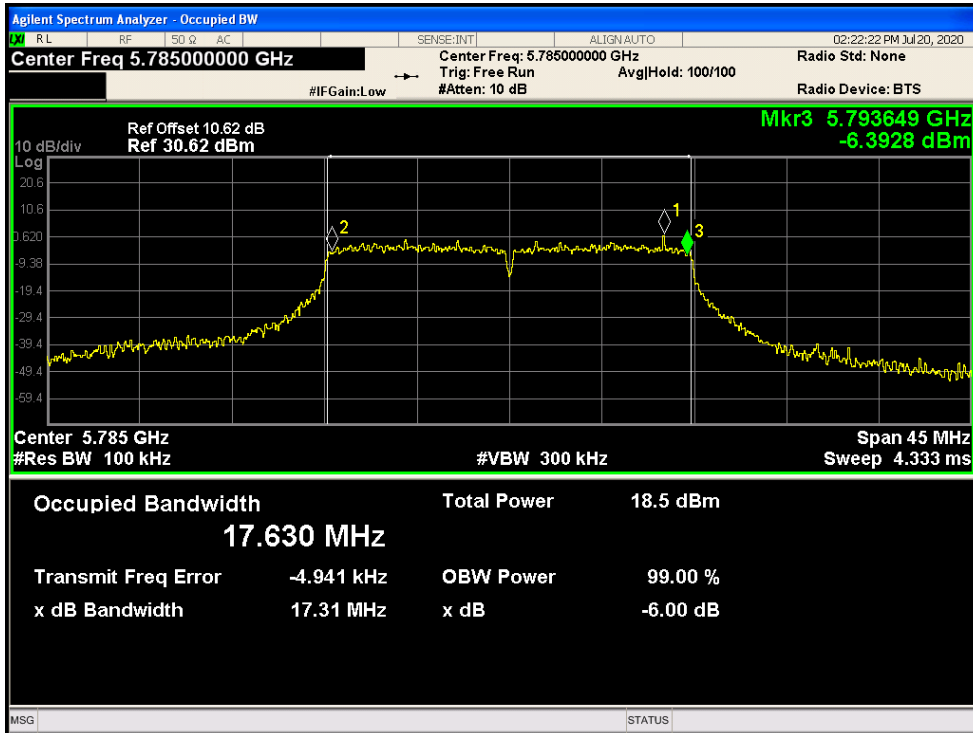


-6dB Bandwidth NVNT ac20 5825MHz Ant1

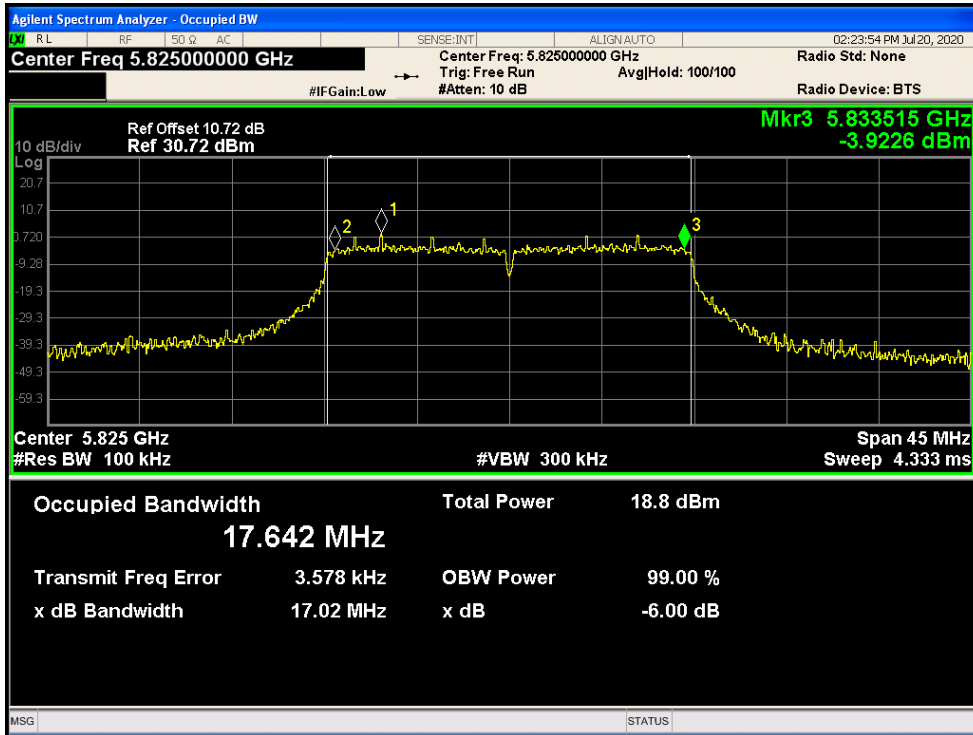


-6dB Bandwidth NVNT ac40 5755MHz Ant1

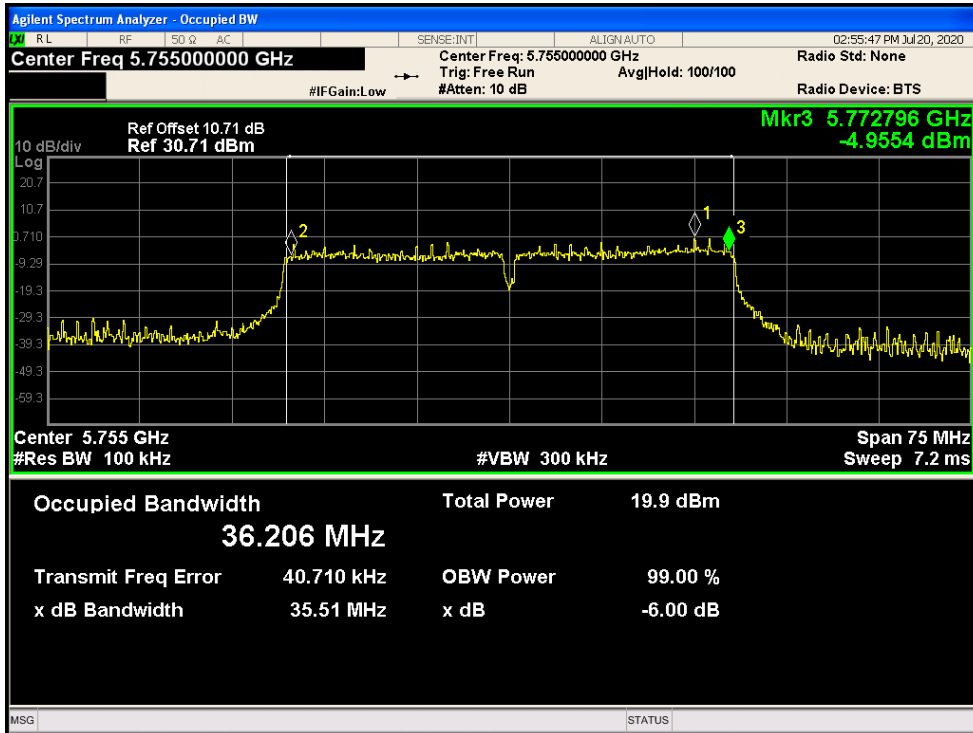

-6dB Bandwidth NVNT ac40 5795MHz Ant1

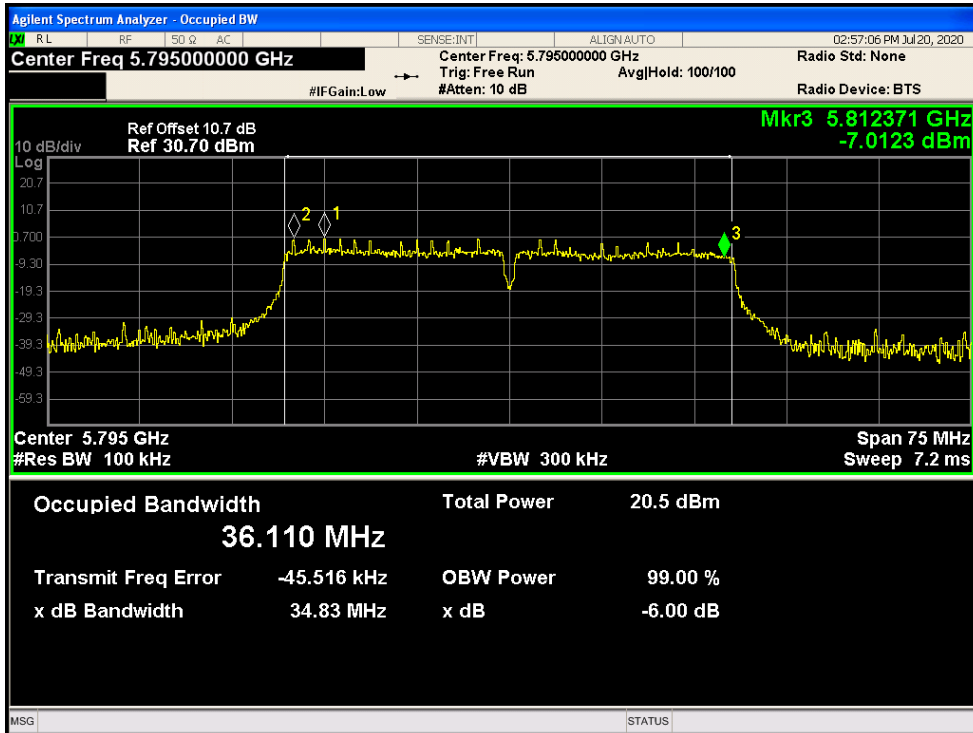


-6dB Bandwidth NVNT ac80 5775MHz Ant1

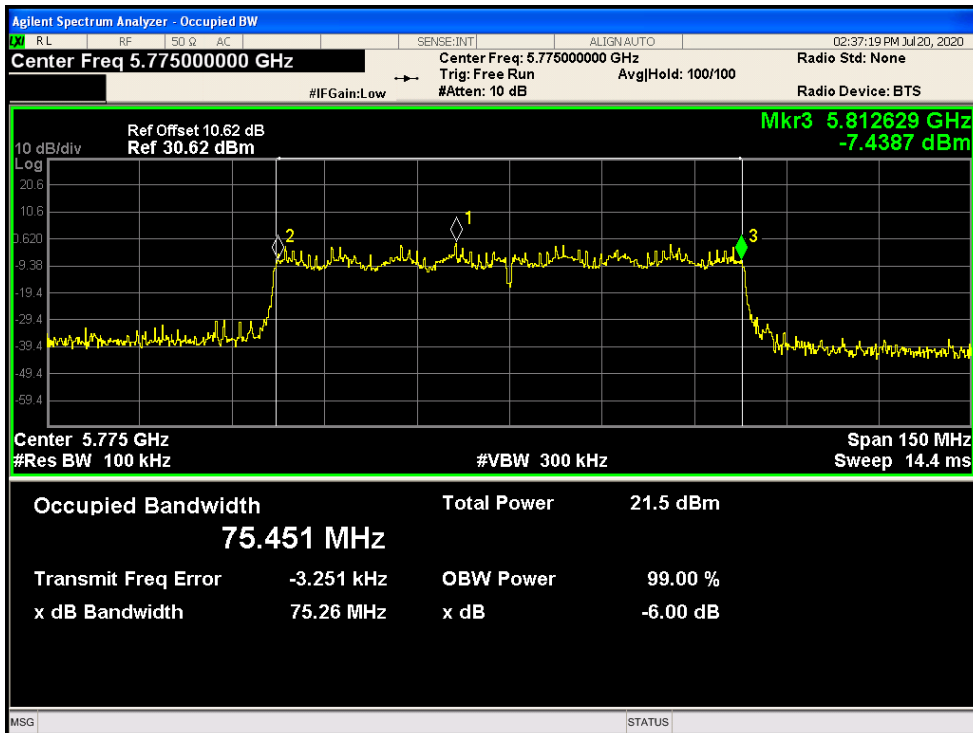





-6dB Bandwidth NVNT n20 5745MHz Ant1

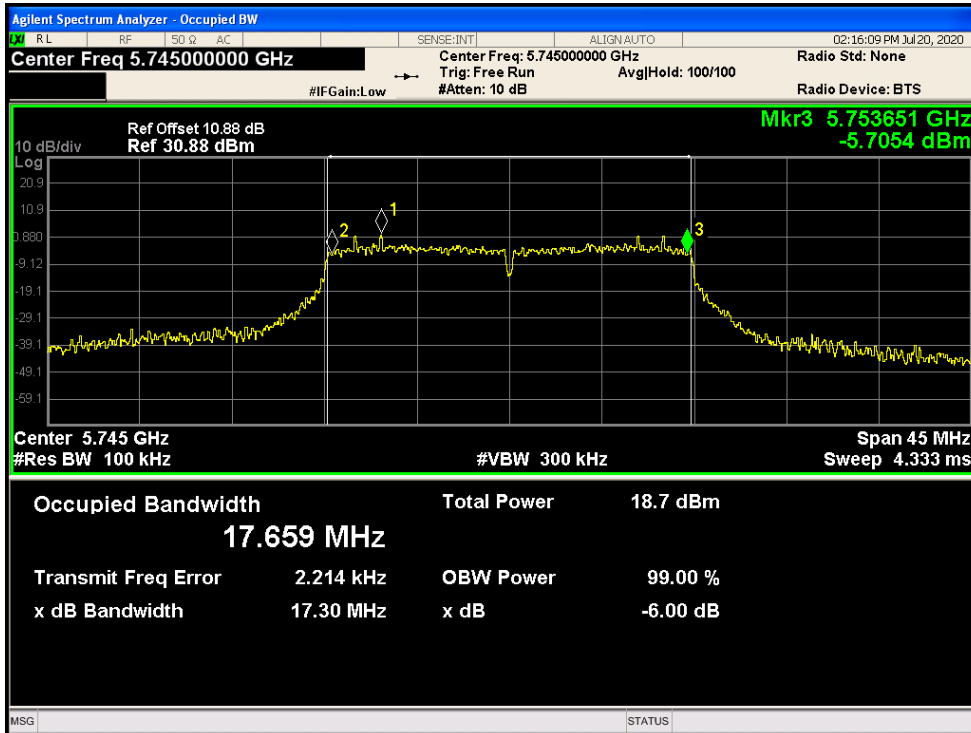


-6dB Bandwidth NVNT n20 5785MHz Ant1

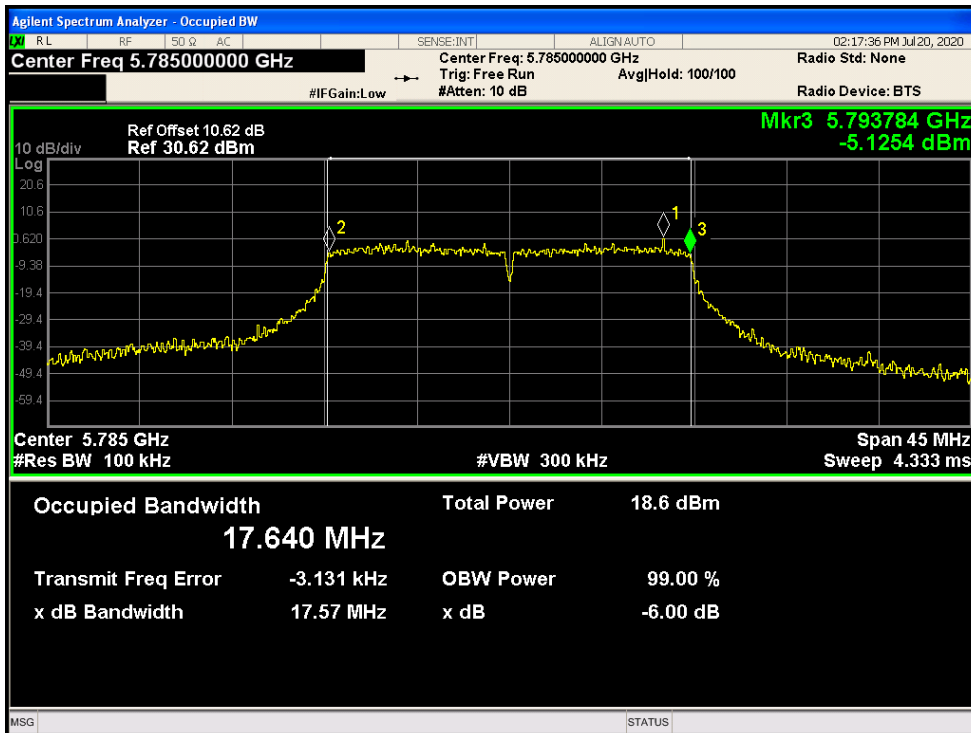


-6dB Bandwidth NVNT n20 5825MHz Ant1

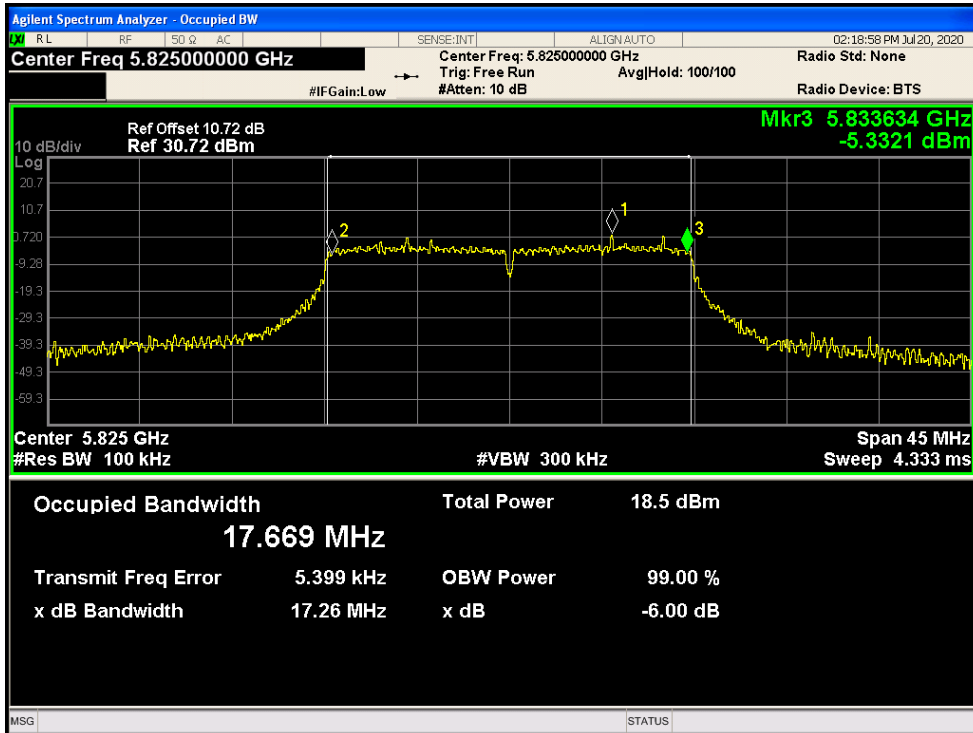

-6dB Bandwidth NVNT n40 5755MHz Ant1

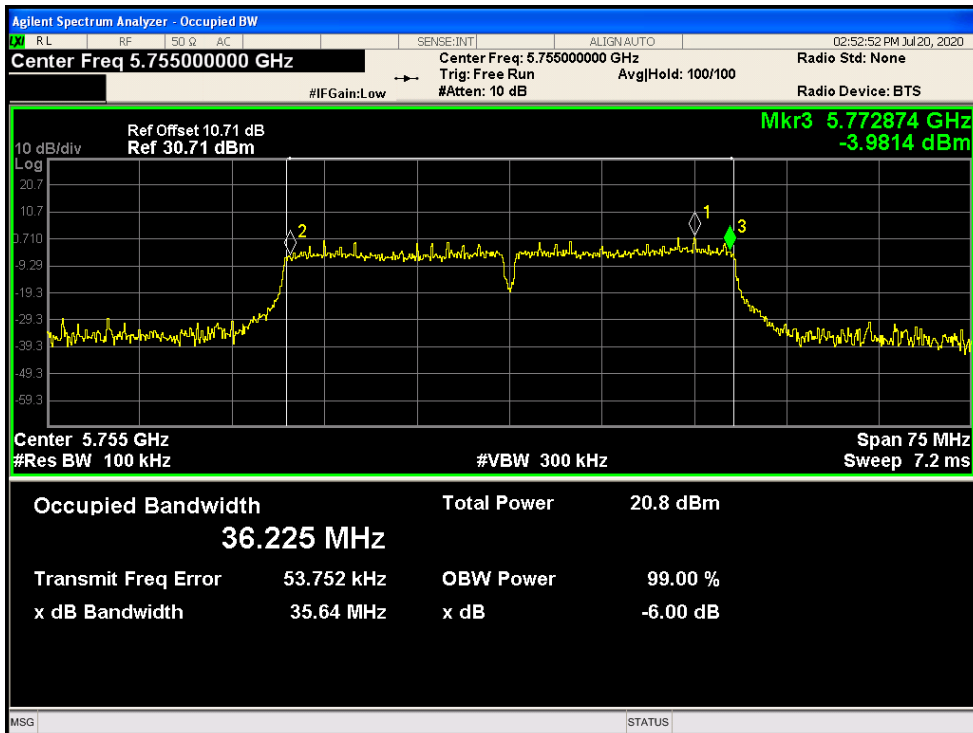


-6dB Bandwidth NVNT n40 5795MHz Ant1

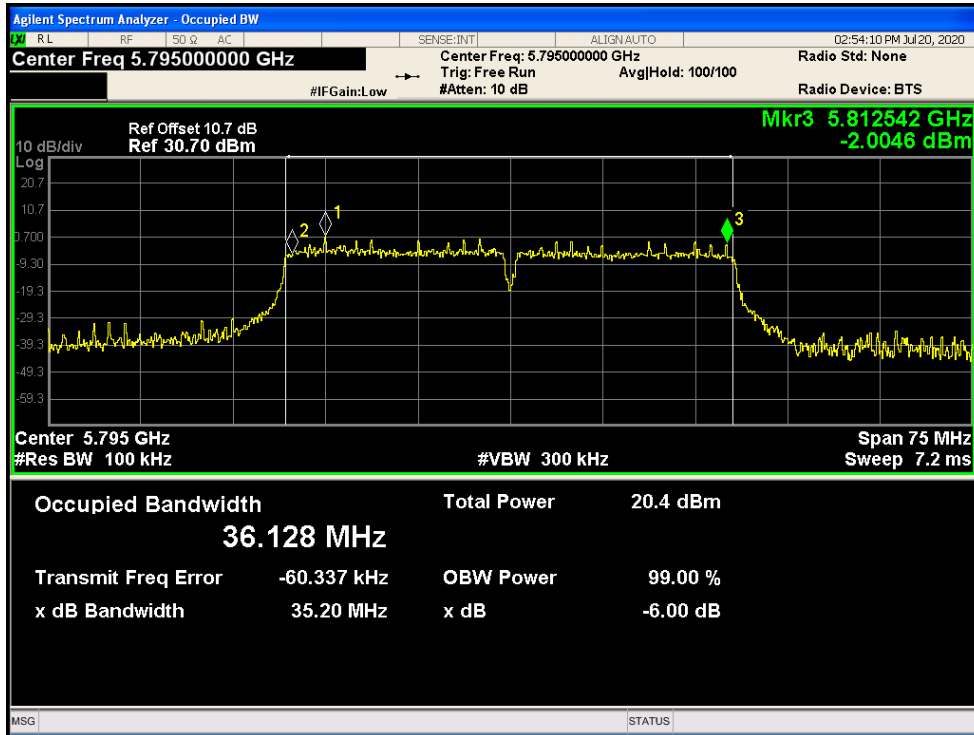


**OCCUPIED CHANNEL BANDWIDTH**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.823
NVNT	a	5785	Ant1	16.749
NVNT	a	5825	Ant1	16.826
NVNT	ac20	5745	Ant1	17.925
NVNT	ac20	5785	Ant1	17.846
NVNT	ac20	5825	Ant1	17.940
NVNT	ac40	5755	Ant1	36.427
NVNT	ac40	5795	Ant1	36.343
NVNT	ac80	5775	Ant1	75.604
NVNT	n20	5745	Ant1	17.914
NVNT	n20	5785	Ant1	17.814
NVNT	n20	5825	Ant1	17.814
NVNT	n40	5755	Ant1	36.555
NVNT	n40	5795	Ant1	36.403


OBW NVNT a 5745MHz Ant1

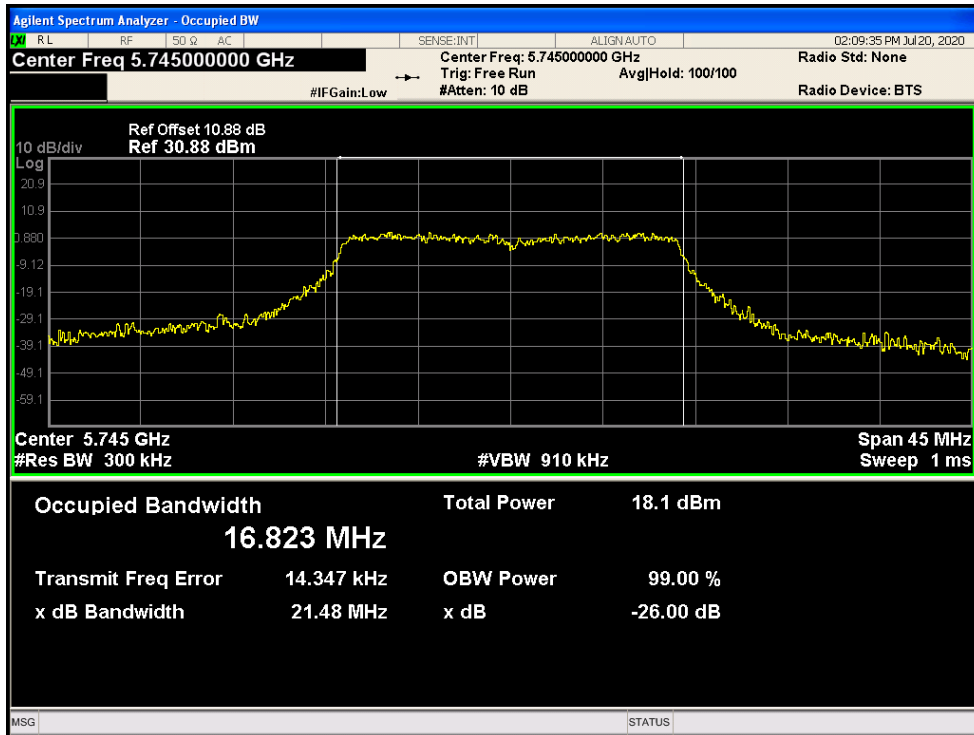


OBW NVNT a 5785MHz Ant1

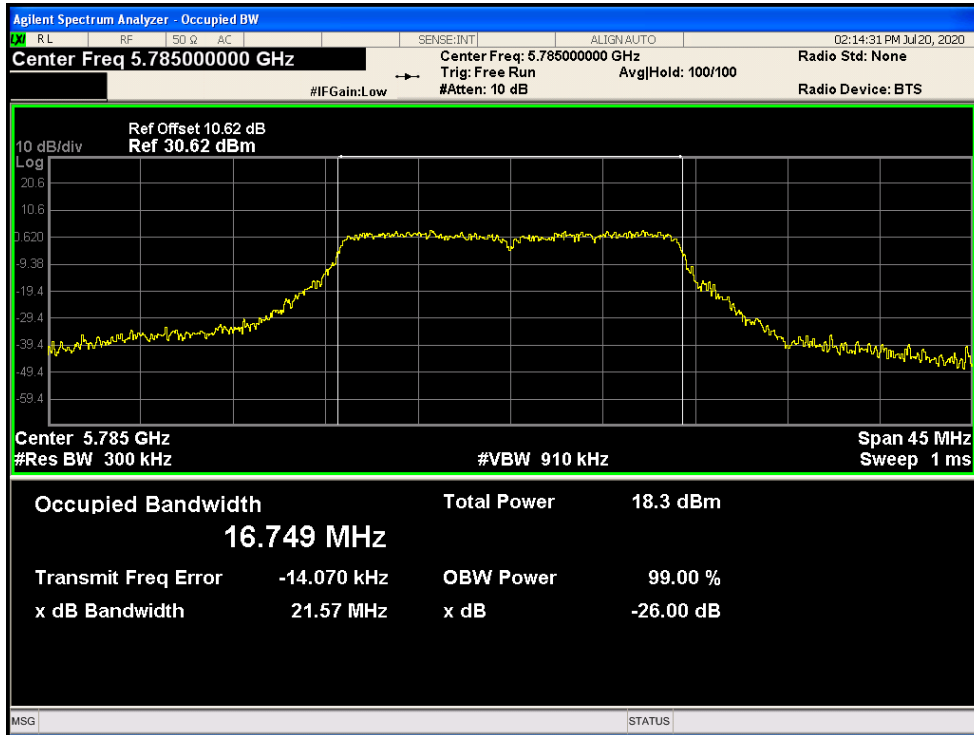


OBW NVNT a 5825MHz Ant1

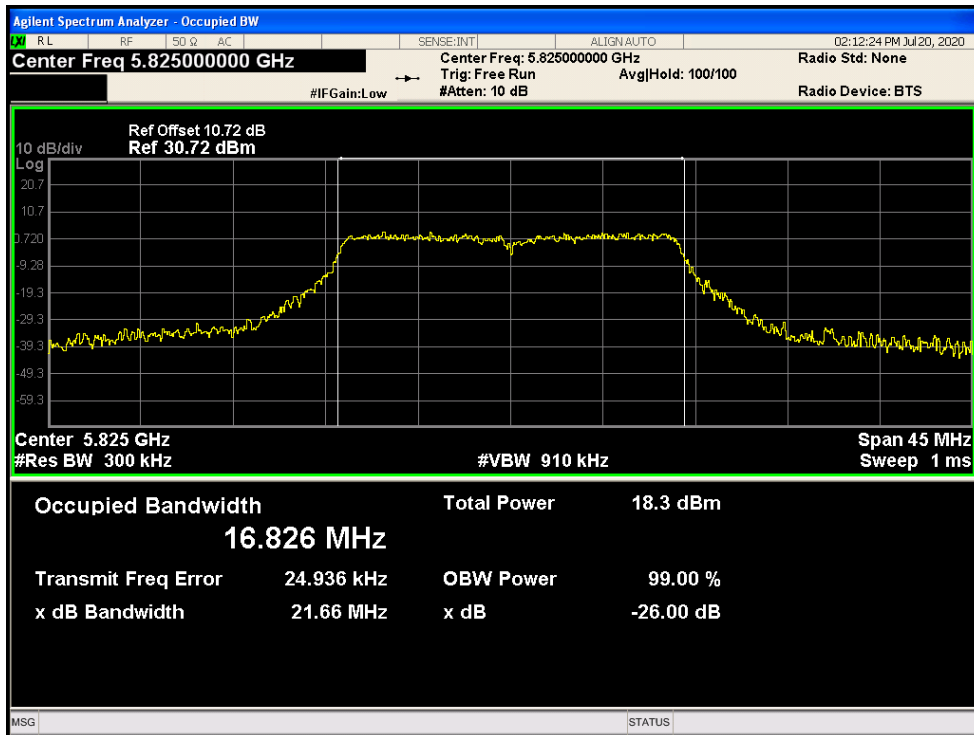


OBW NVNT ac20 5745MHz Ant1

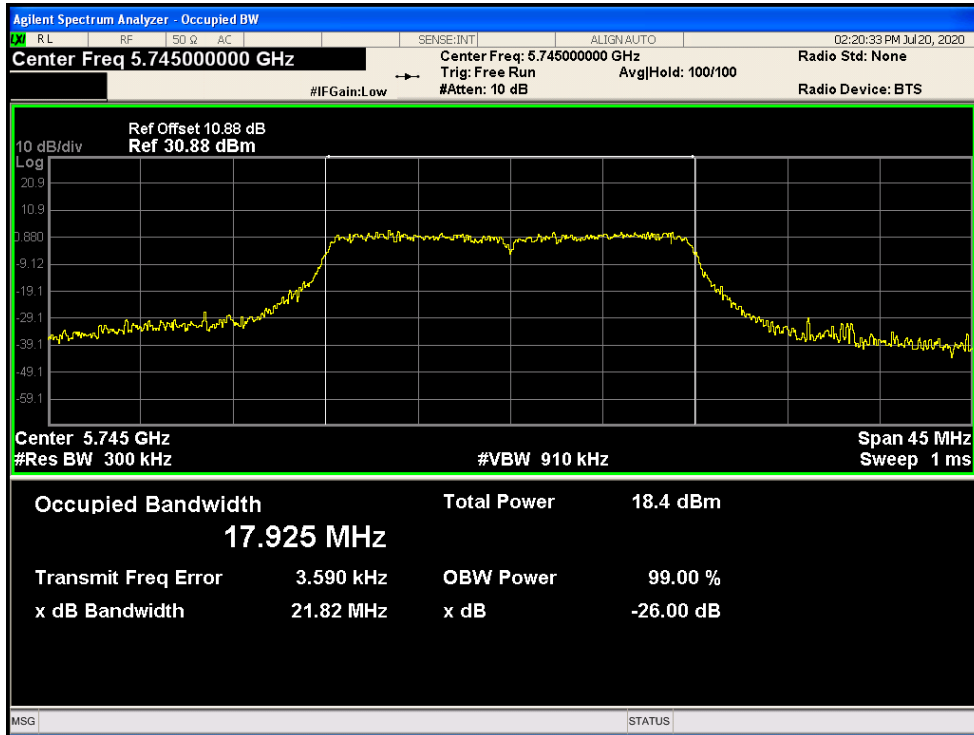


OBW NVNT ac20 5785MHz Ant1

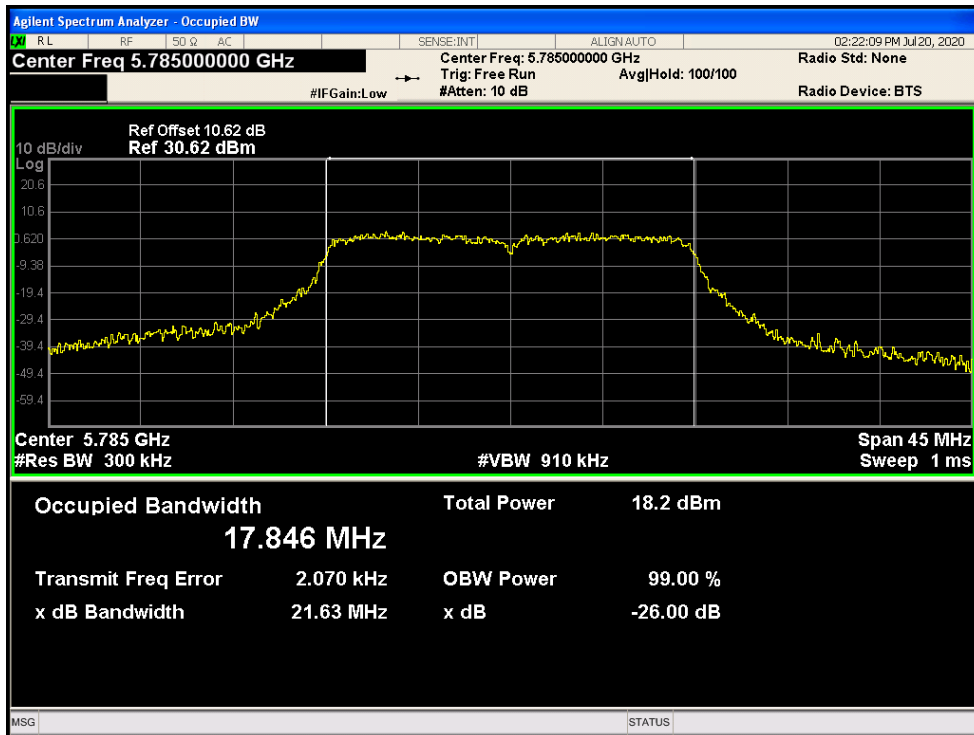


OBW NVNT ac20 5825MHz Ant1

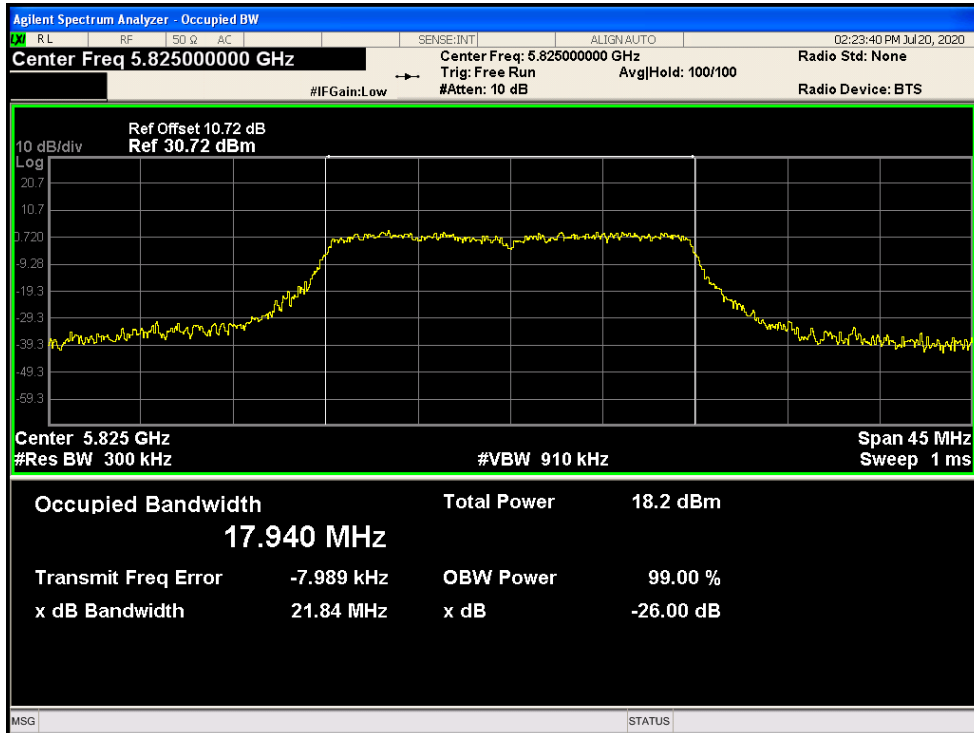


OBW NVNT ac40 5755MHz Ant1

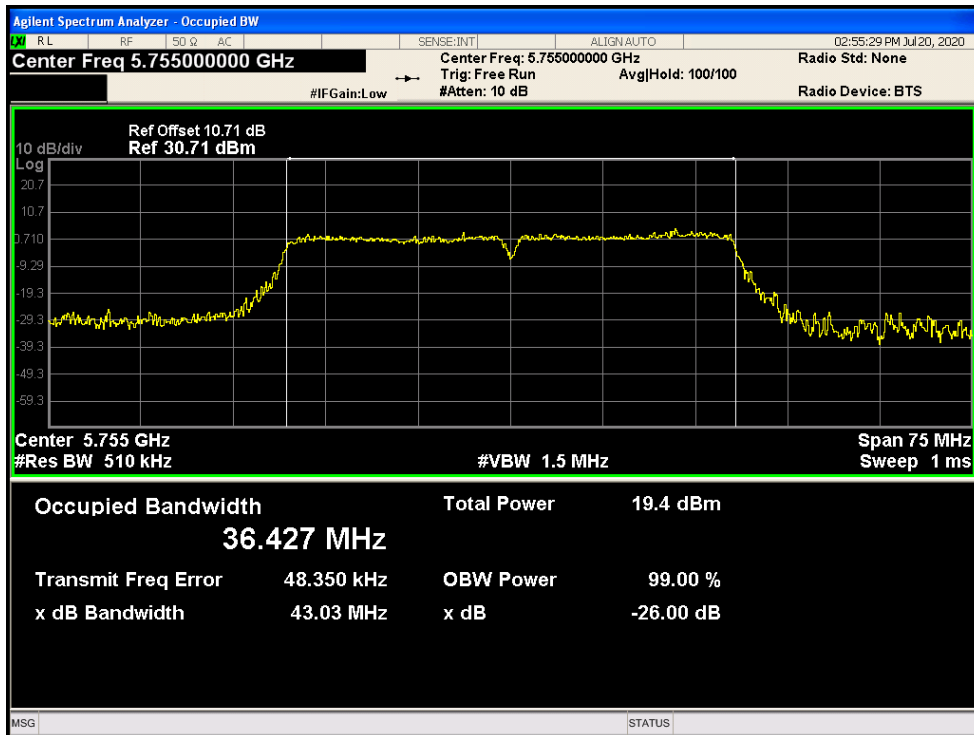

OBW NVNT ac40 5795MHz Ant1

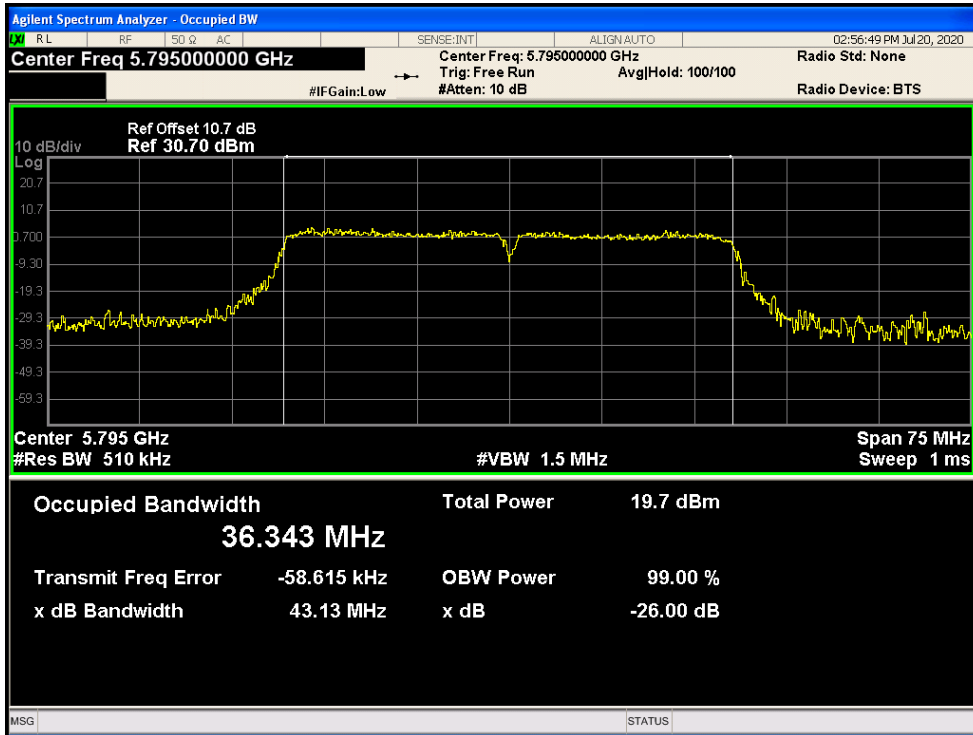


OBW NVNT ac80 5775MHz Ant1

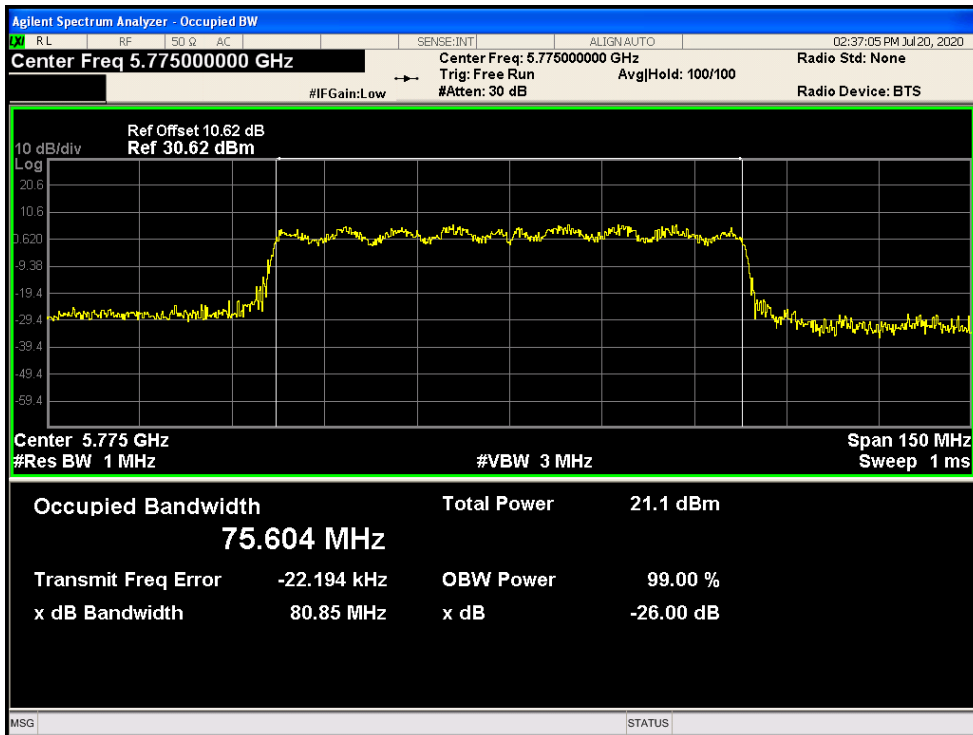





OBW NVNT n20 5745MHz Ant1

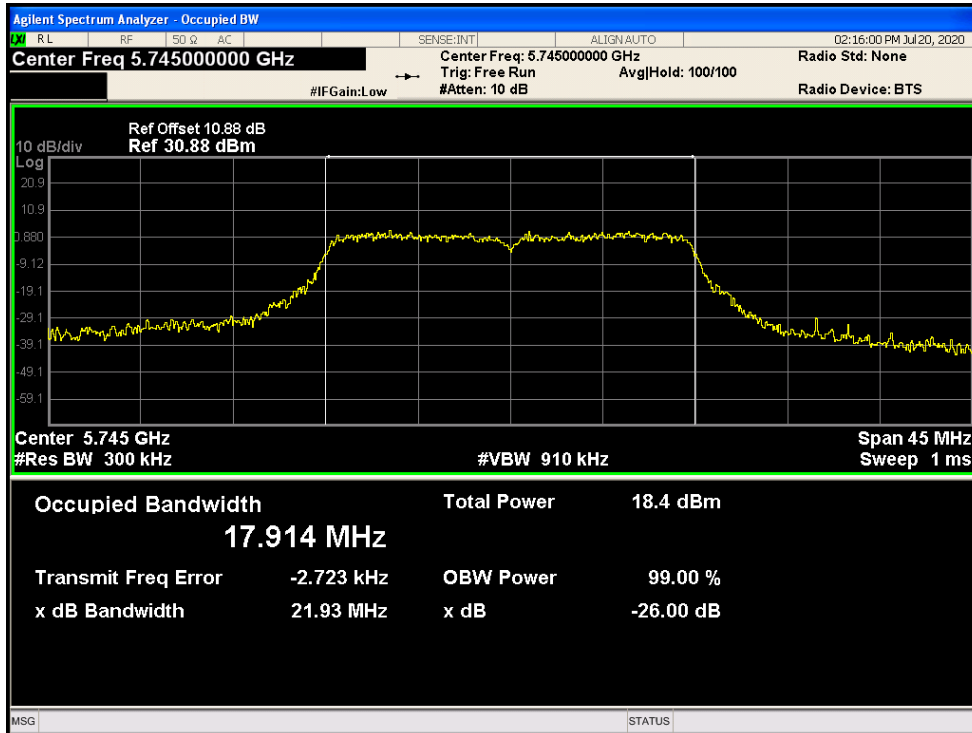


OBW NVNT n20 5785MHz Ant1

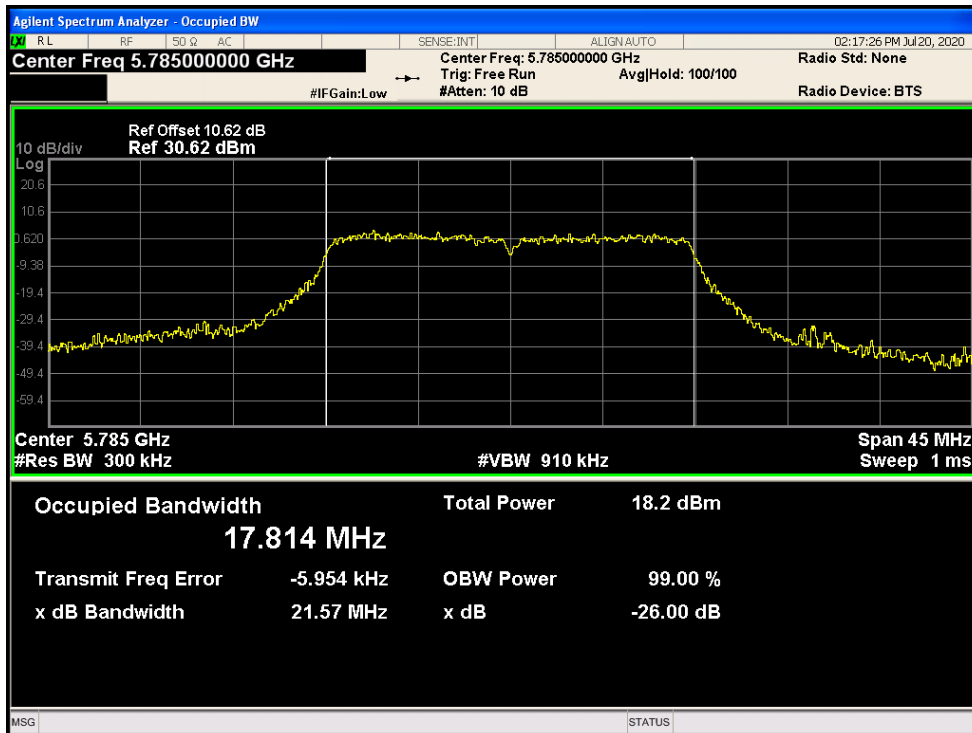


OBW NVNT n20 5825MHz Ant1

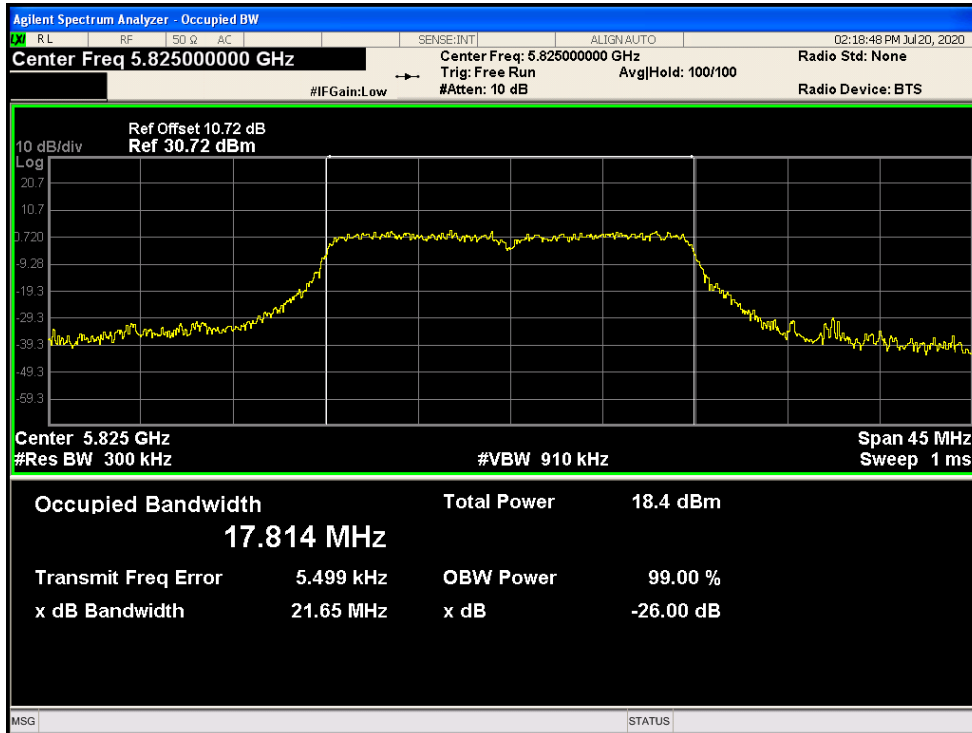

OBW NVNT n40 5755MHz Ant1

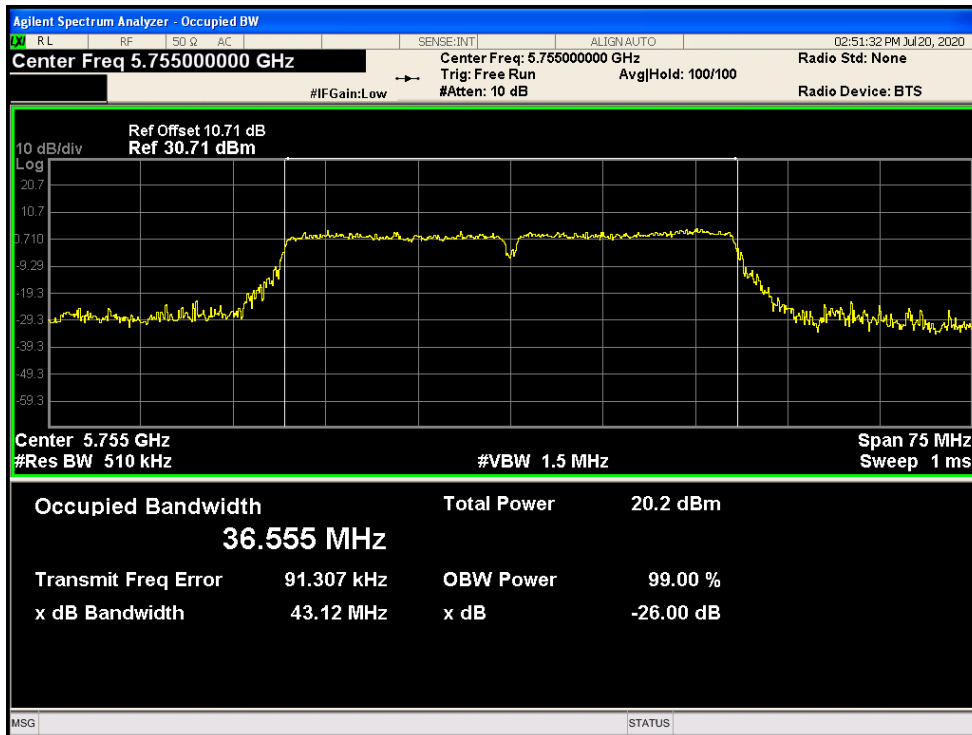


OBW NVNT n40 5795MHz Ant1

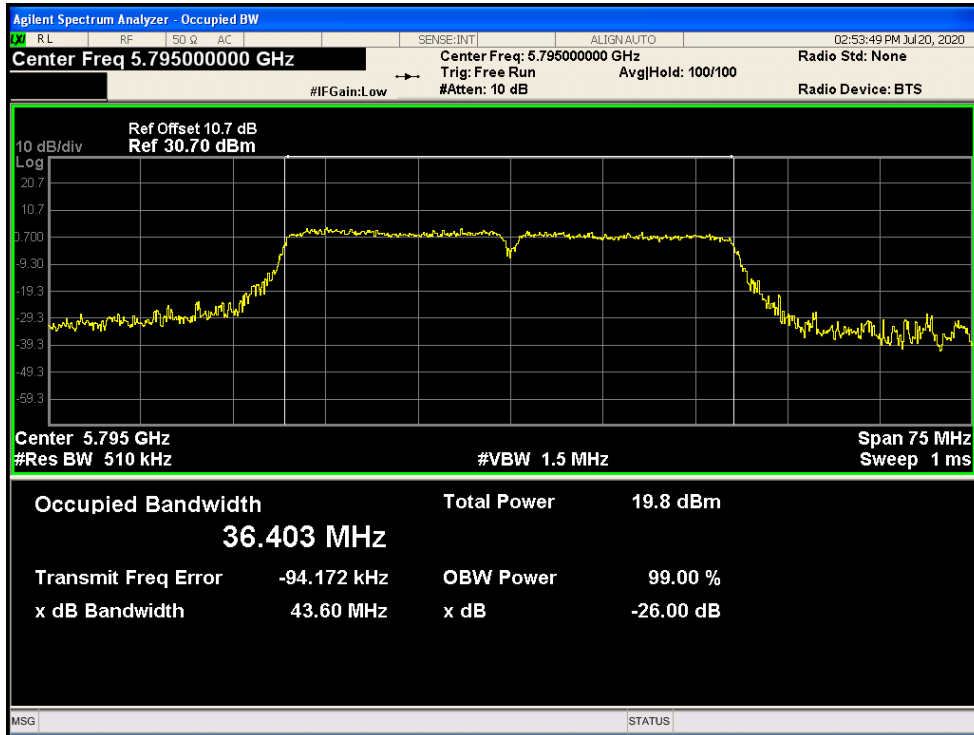


**MAXIMUM POWER SPECTRAL DENSITY LEVEL**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	4.844	30	Pass
NVNT	a	5785	Ant1	4.672	30	Pass
NVNT	a	5825	Ant1	4.354	30	Pass
NVNT	ac20	5745	Ant1	4.659	30	Pass
NVNT	ac20	5785	Ant1	4.697	30	Pass
NVNT	ac20	5825	Ant1	4.626	30	Pass
NVNT	ac40	5755	Ant1	3.125	30	Pass
NVNT	ac40	5795	Ant1	2.675	30	Pass
NVNT	ac80	5775	Ant1	1.314	30	Pass
NVNT	n20	5745	Ant1	4.394	30	Pass
NVNT	n20	5785	Ant1	4.299	30	Pass
NVNT	n20	5825	Ant1	4.36	30	Pass
NVNT	n40	5755	Ant1	4.139	30	Pass
NVNT	n40	5795	Ant1	2.977	30	Pass


PSD NVNT a 5745MHz Ant1

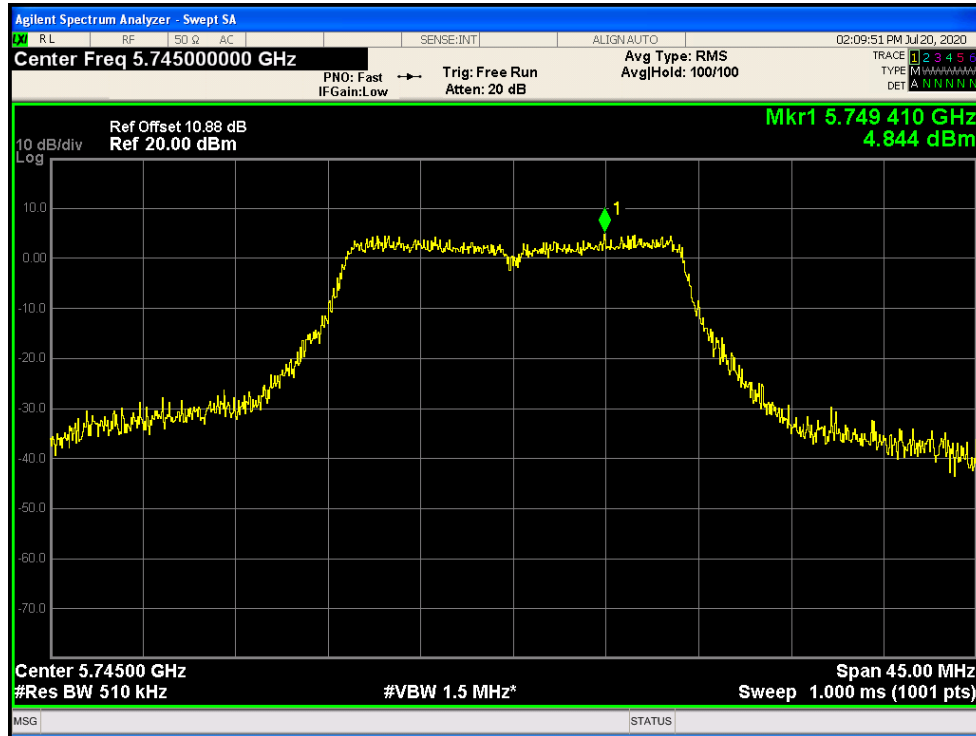


PSD NVNT a 5785MHz Ant1

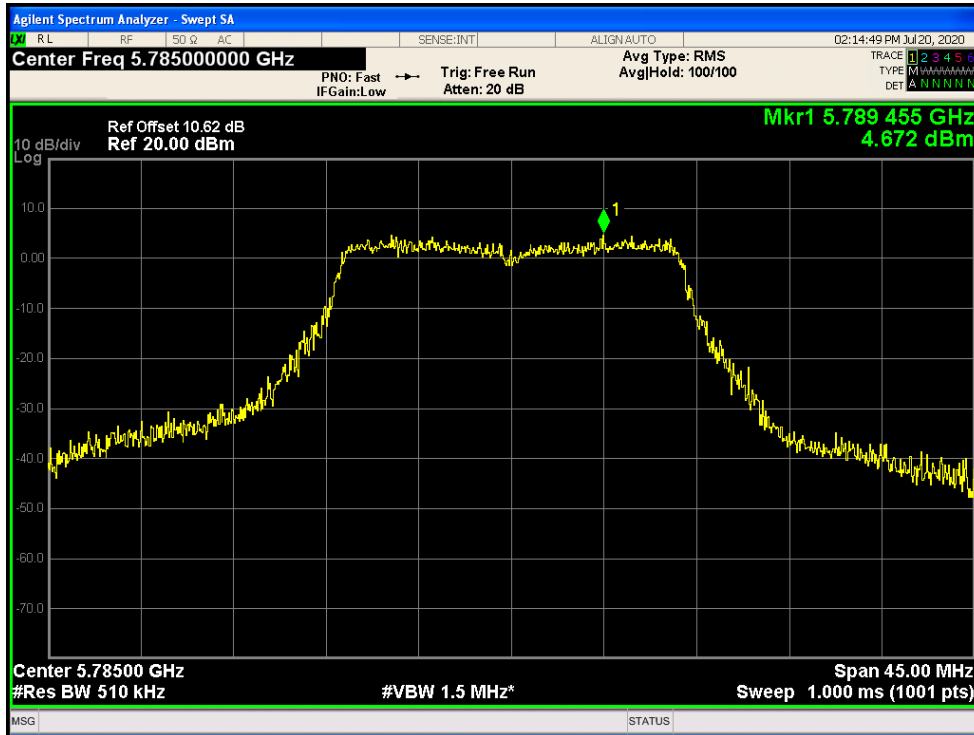


PSD NVNT a 5825MHz Ant1

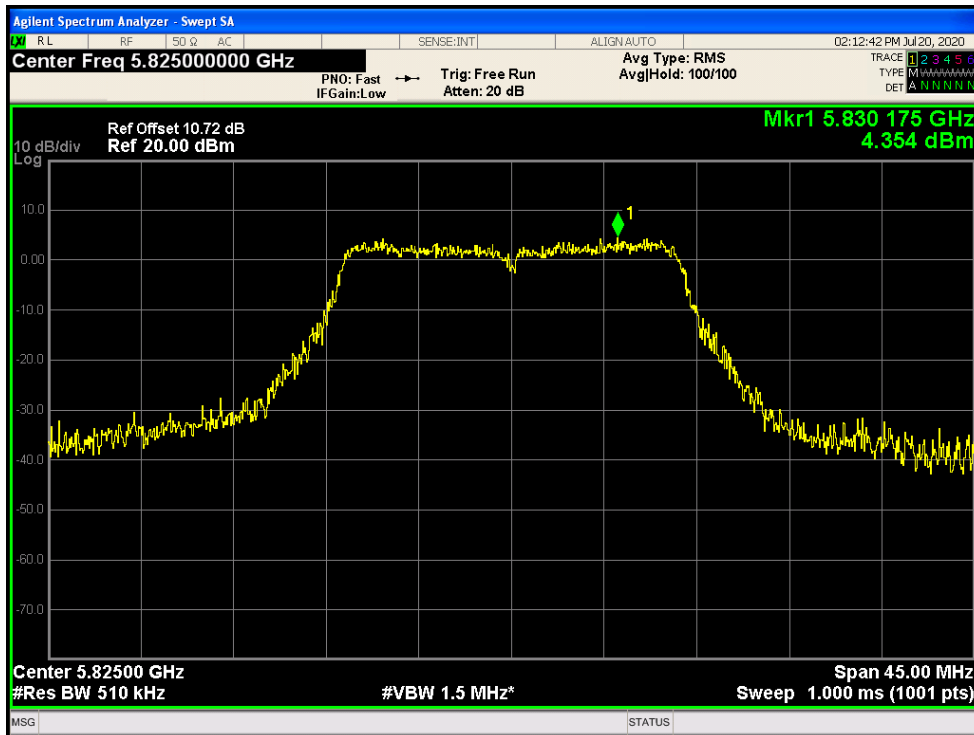


PSD NVNT ac20 5745MHz Ant1

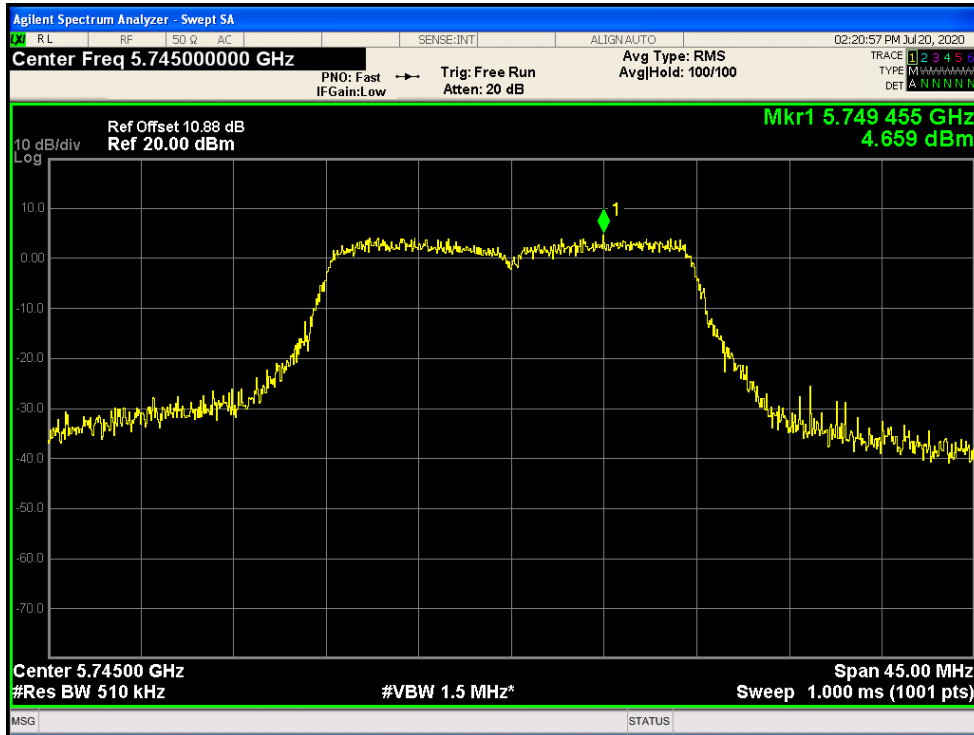


PSD NVNT ac20 5785MHz Ant1

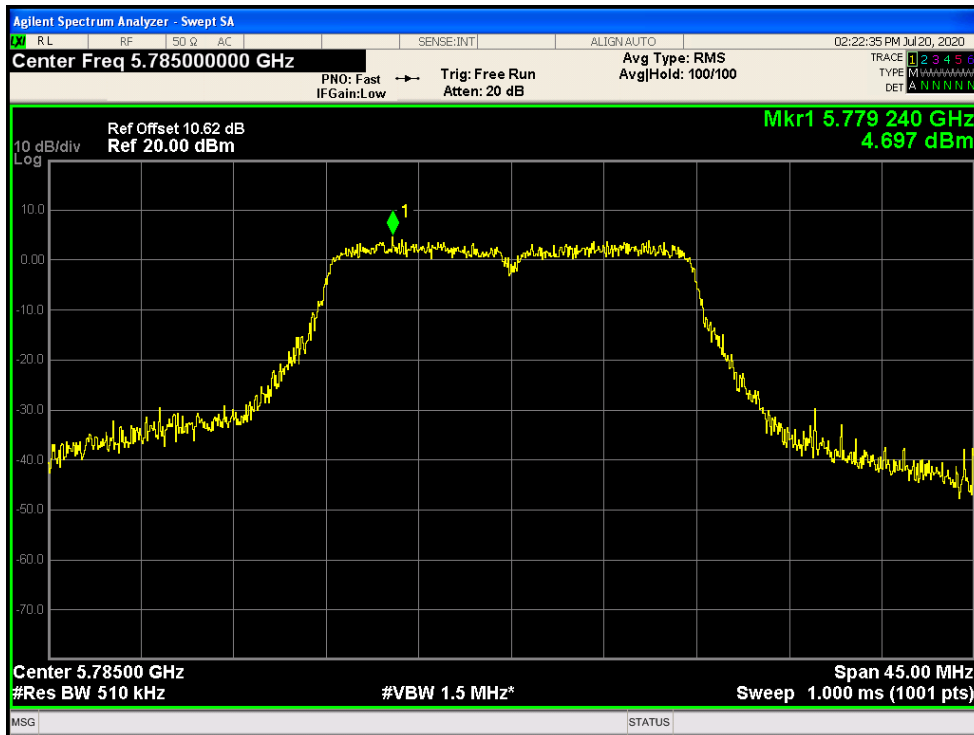


PSD NVNT ac20 5825MHz Ant1

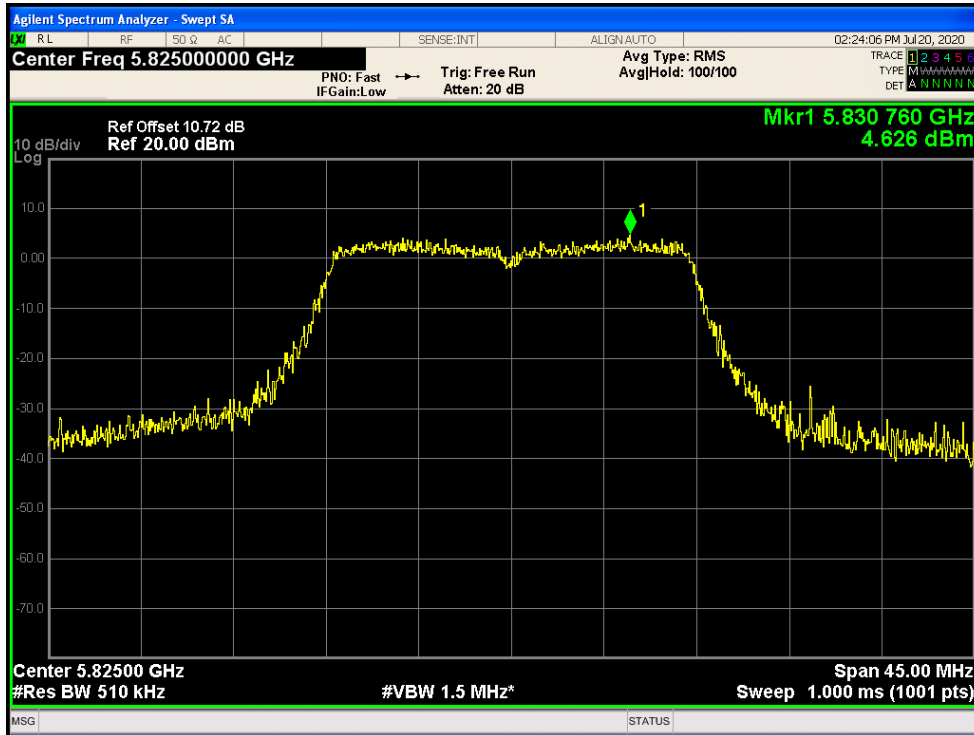


PSD NVNT ac40 5755MHz Ant1

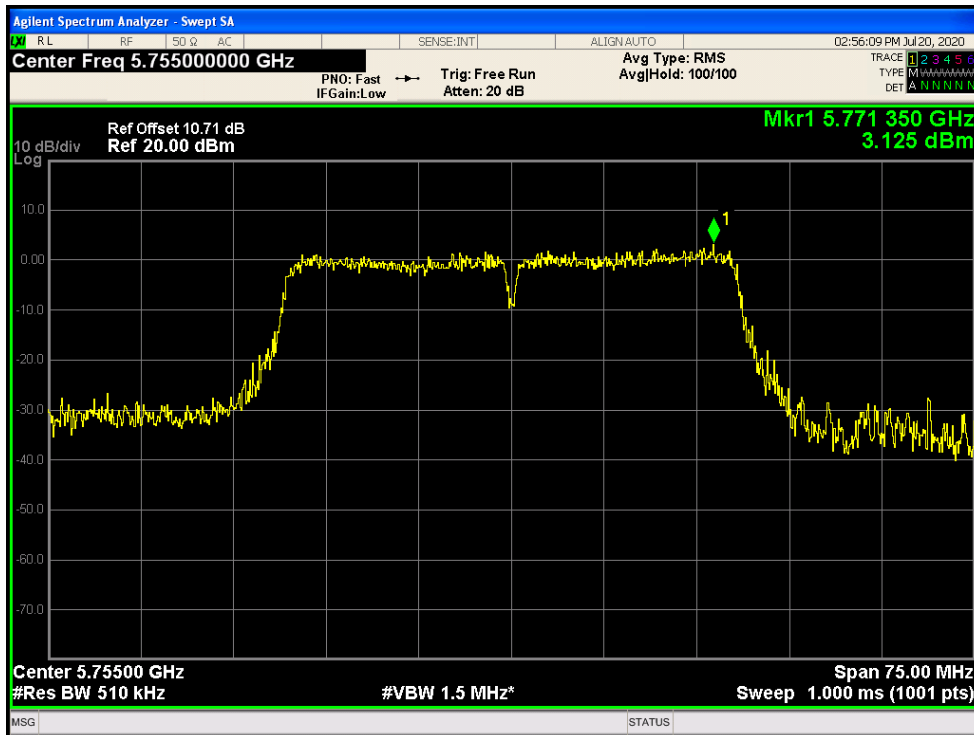

PSD NVNT ac40 5795MHz Ant1

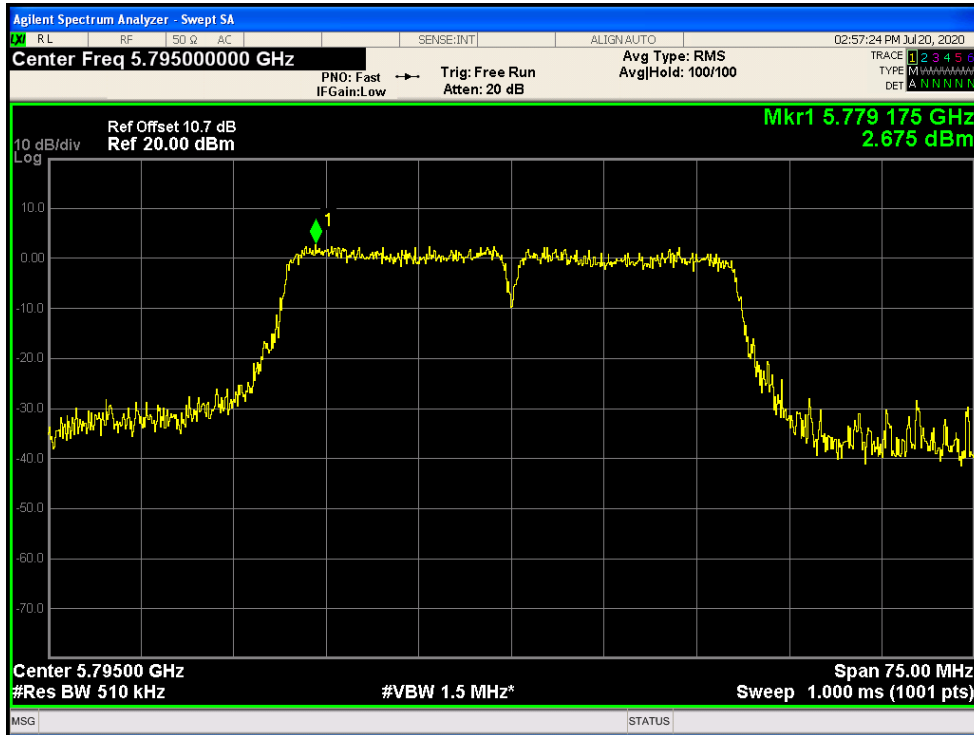


PSD NVNT ac80 5775MHz Ant1

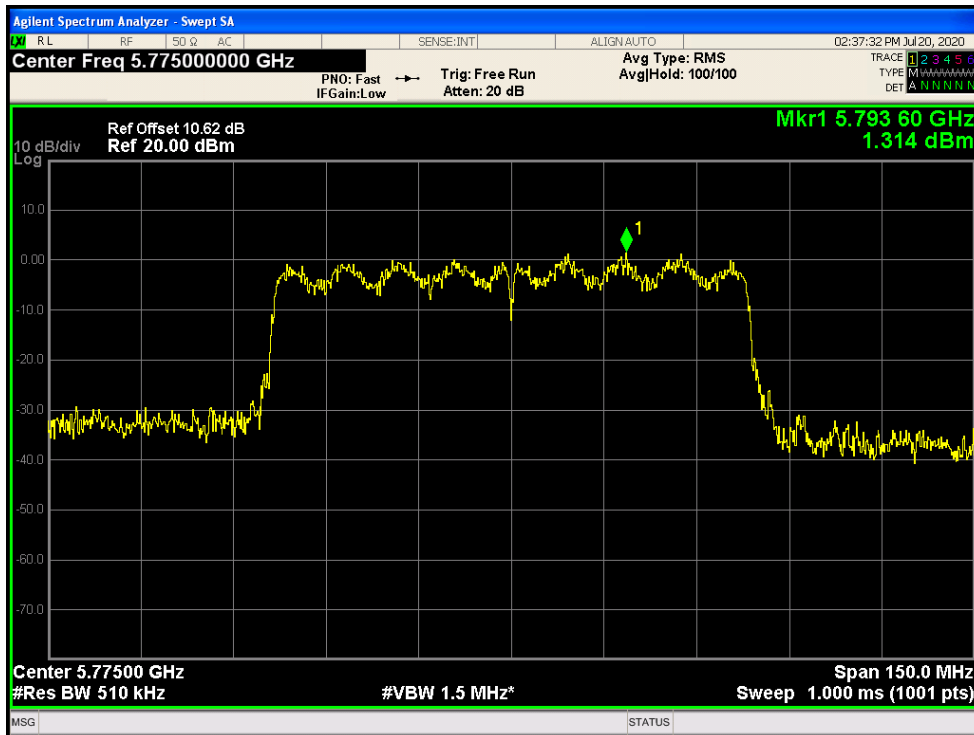





PSD NVNT n20 5745MHz Ant1

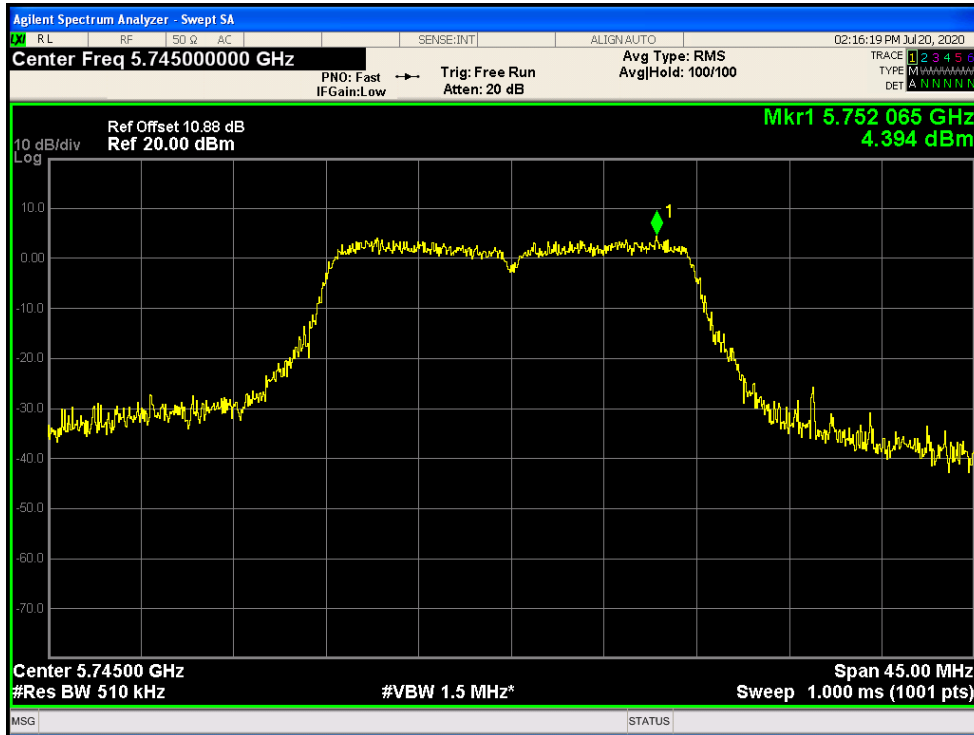


PSD NVNT n20 5785MHz Ant1

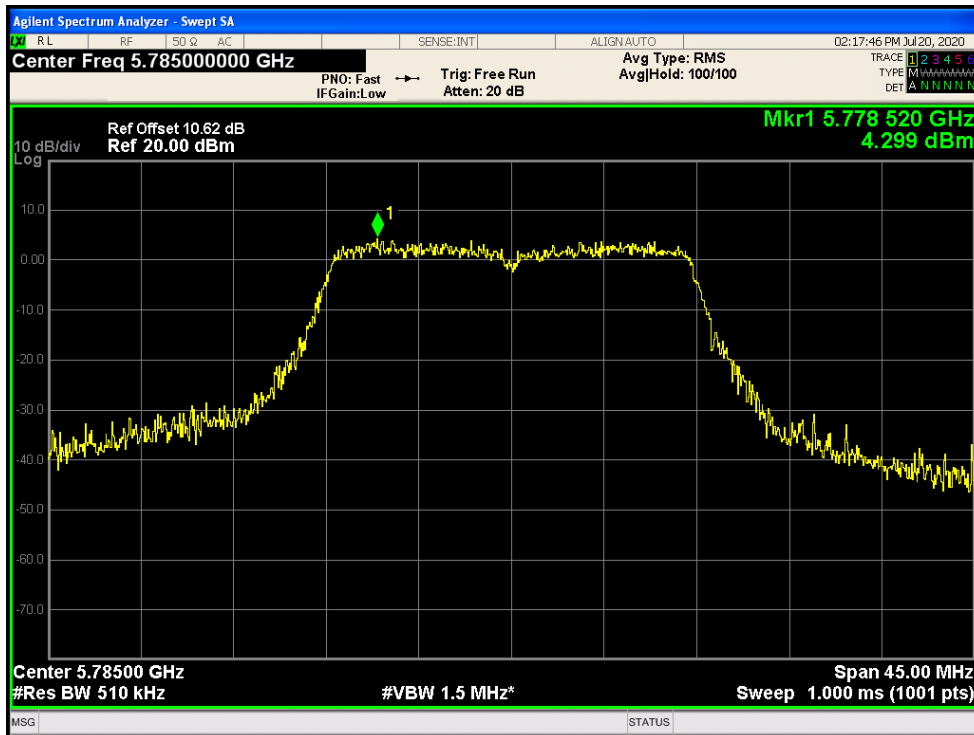


PSD NVNT n20 5825MHz Ant1

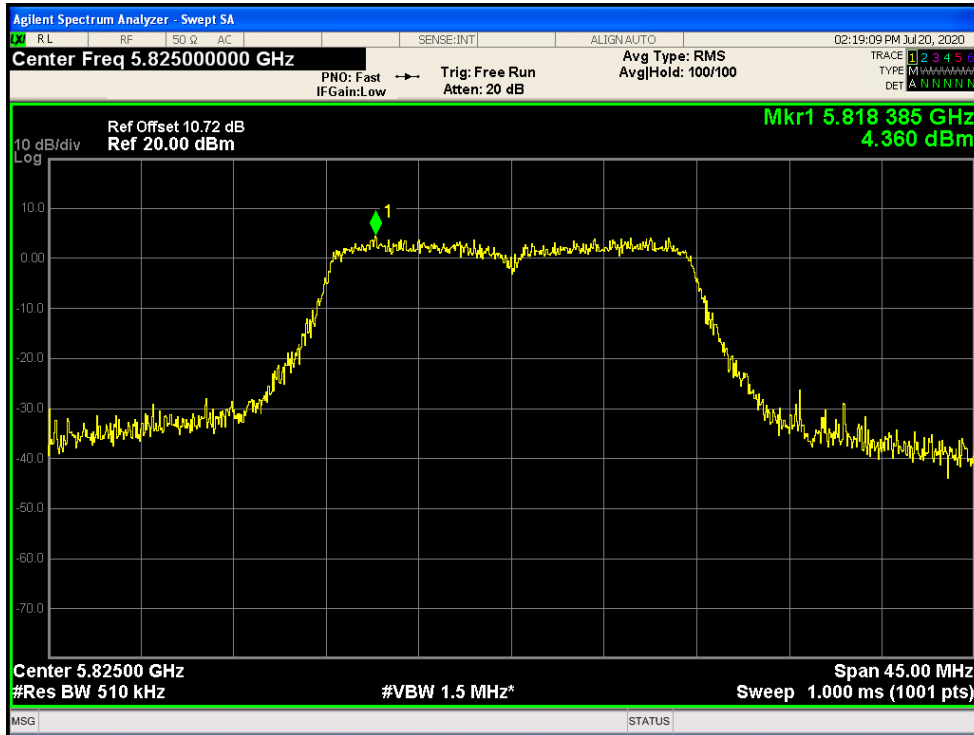

PSD NVNT n40 5755MHz Ant1

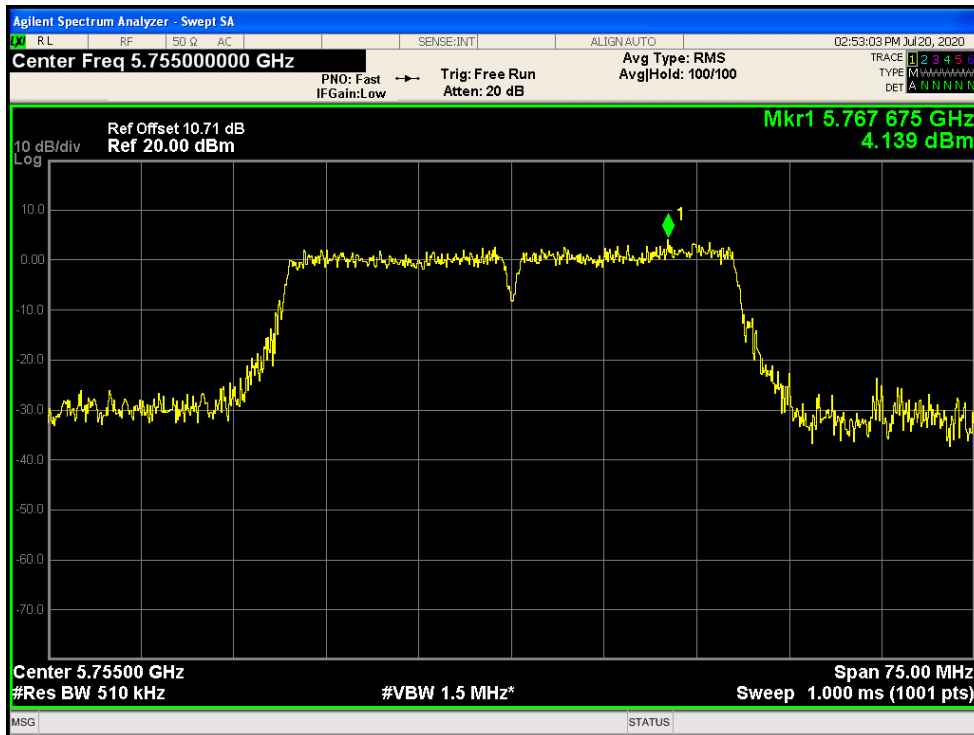


PSD NVNT n40 5795MHz Ant1

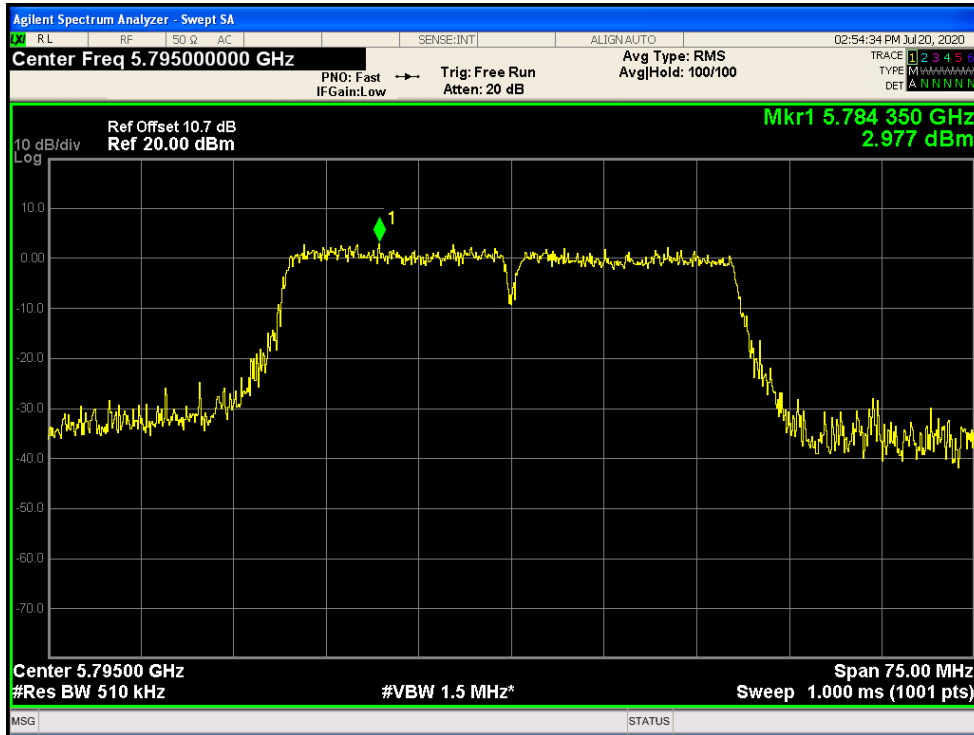


**BAND EDGE**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-35.35		Pass
NVNT	a	5825	Ant1	-38.05		Pass
NVNT	ac20	5745	Ant1	-34.7		Pass
NVNT	ac20	5825	Ant1	-37.9		Pass
NVNT	ac40	5755	Ant1	-33.69		Pass
NVNT	ac40	5795	Ant1	-38.27		Pass
NVNT	ac80	5775	Ant1	-34.35		Pass
NVNT	n20	5745	Ant1	-34.63		Pass
NVNT	n20	5825	Ant1	-37.84		Pass
NVNT	n40	5755	Ant1	-30.99		Pass
NVNT	n40	5795	Ant1	-38.44		Pass


Band Edge NVNT a 5745MHz Low Ant1

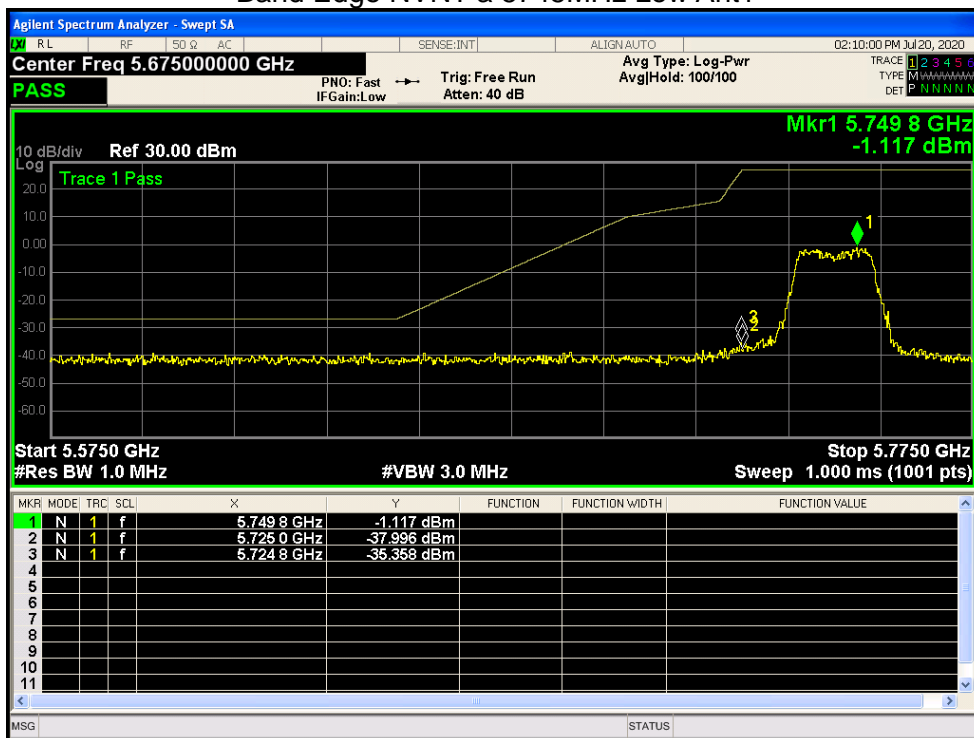


Band Edge NVNT a 5825MHz High Ant1

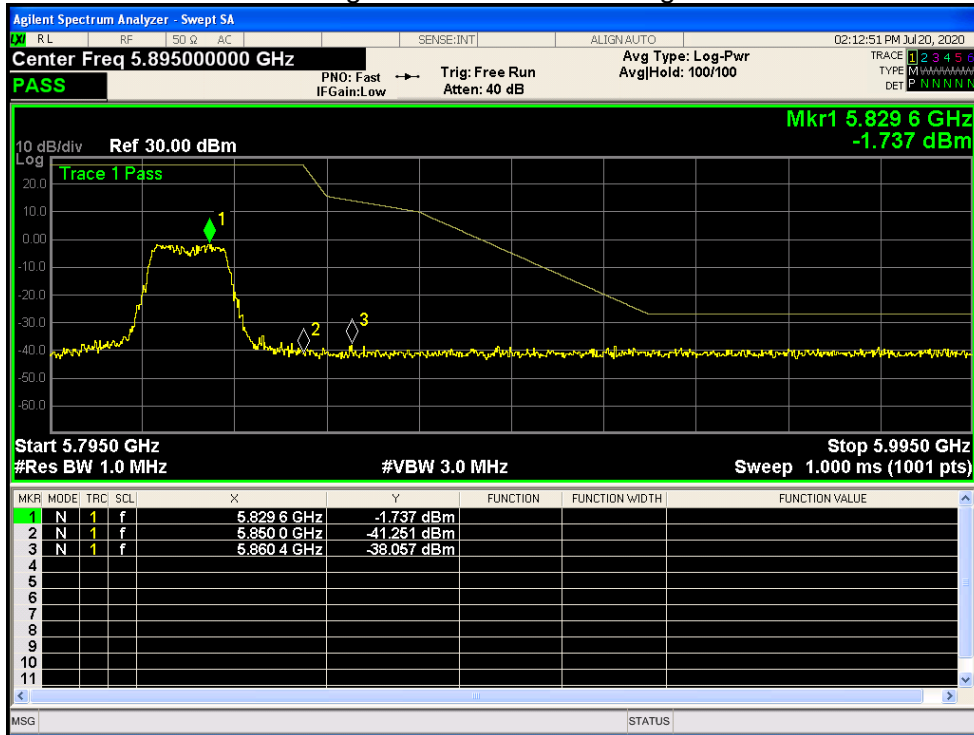


Band Edge NVNT ac20 5745MHz Low Ant1

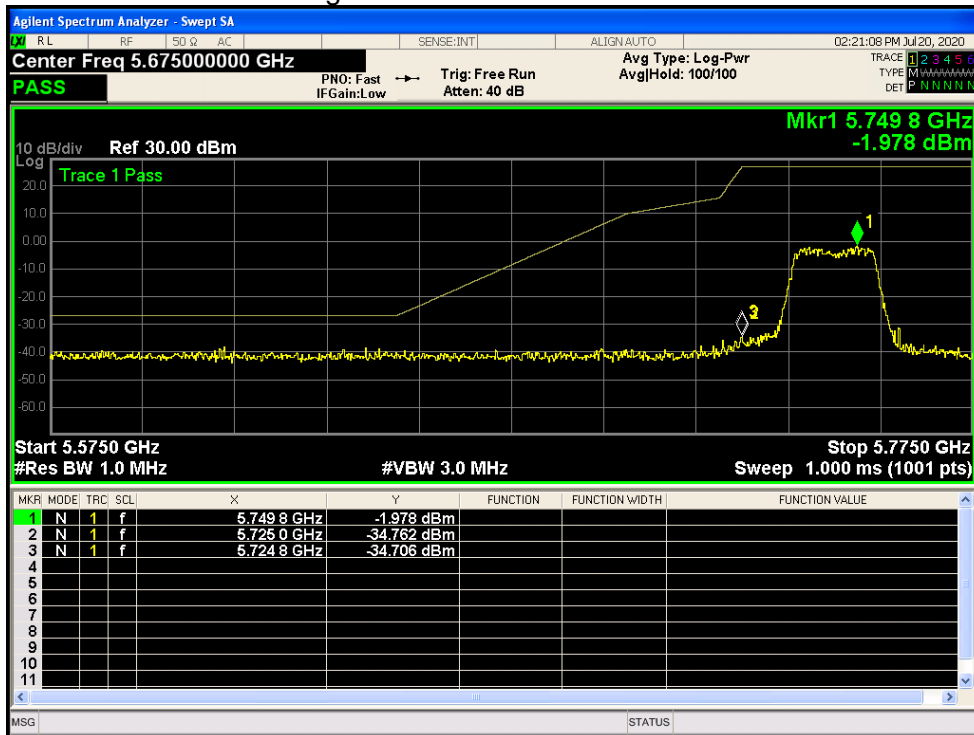


Band Edge NVNT ac20 5825MHz High Ant1

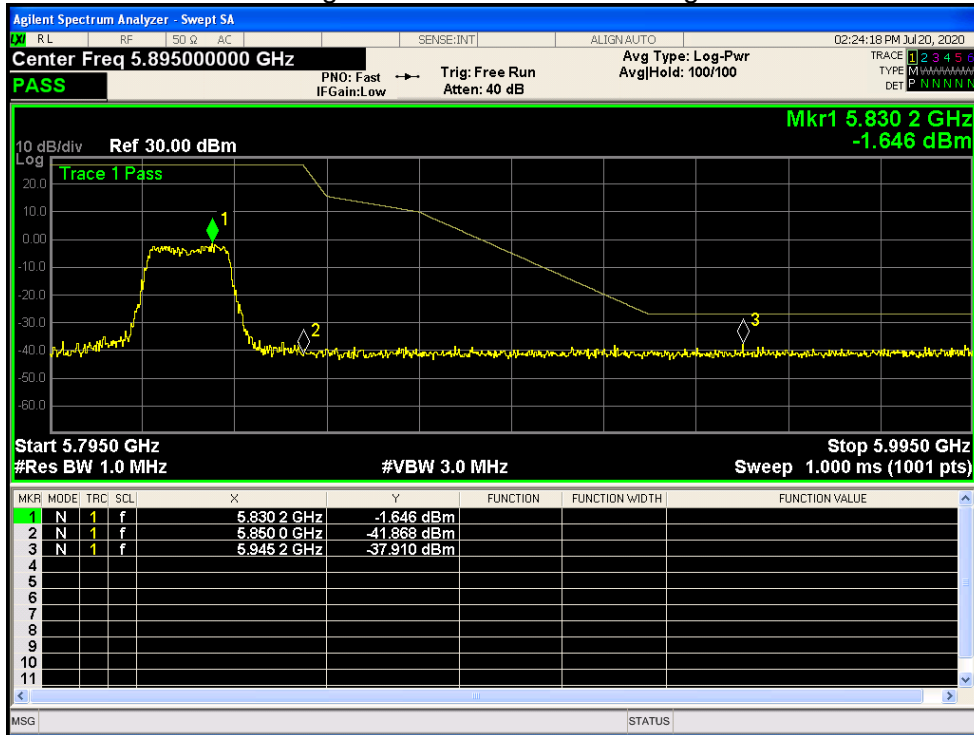


Band Edge NVNT ac40 5755MHz Low Ant1

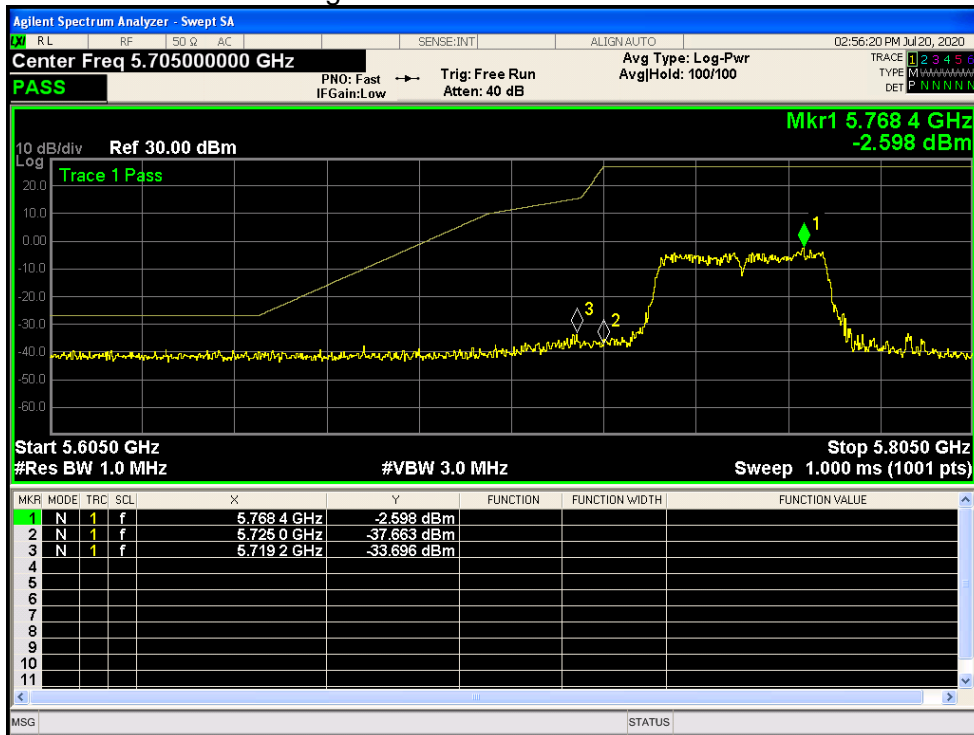


Band Edge NVNT ac40 5795MHz High Ant1

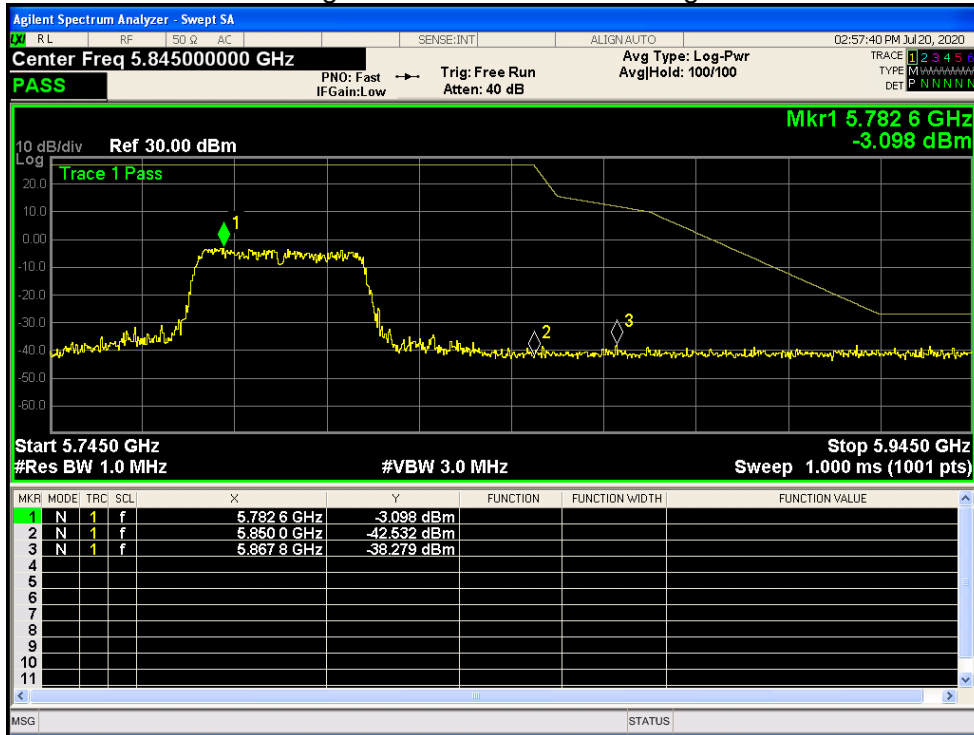


Band Edge NVNT ac80 5775MHz High Ant1

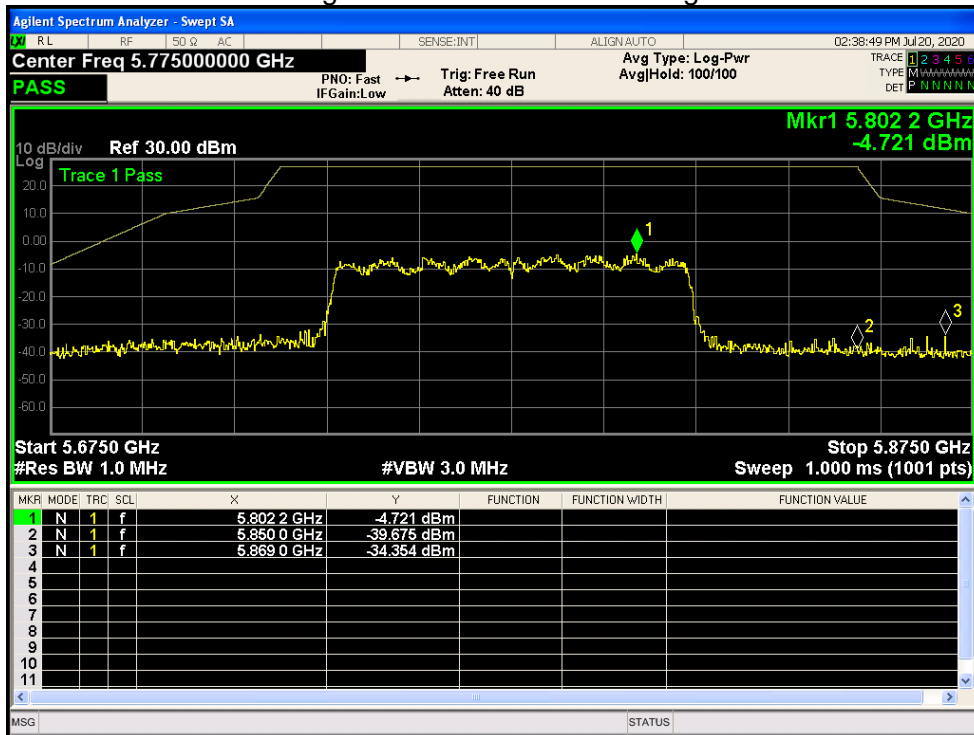

Band Edge NVNT n20 5745MHz Low Ant1

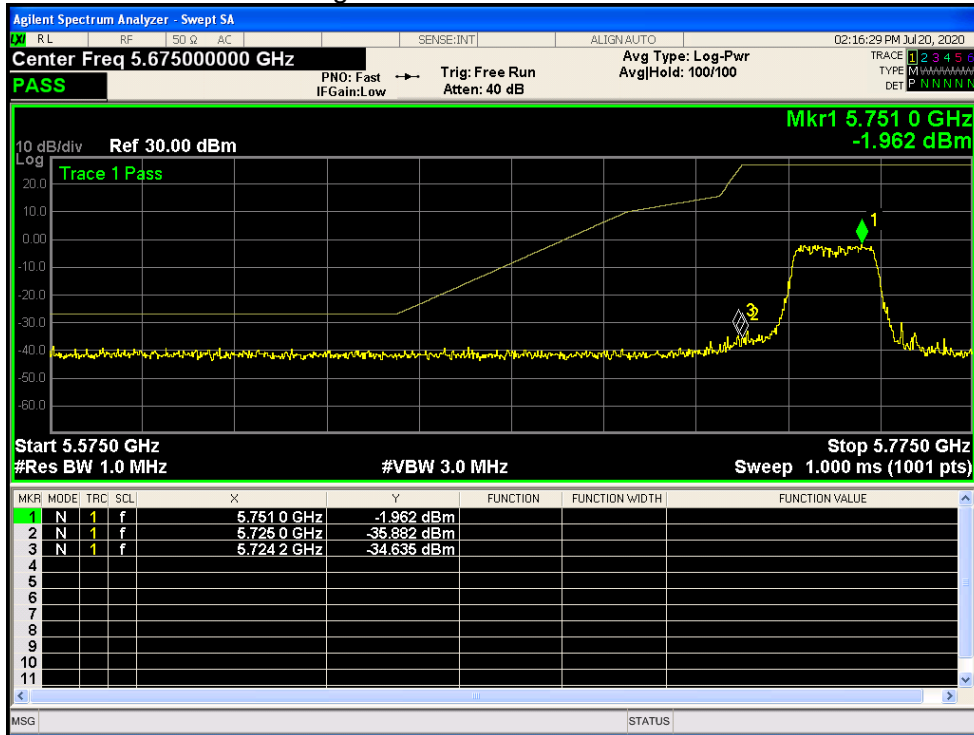

Band Edge NVNT n20 5825MHz High Ant1

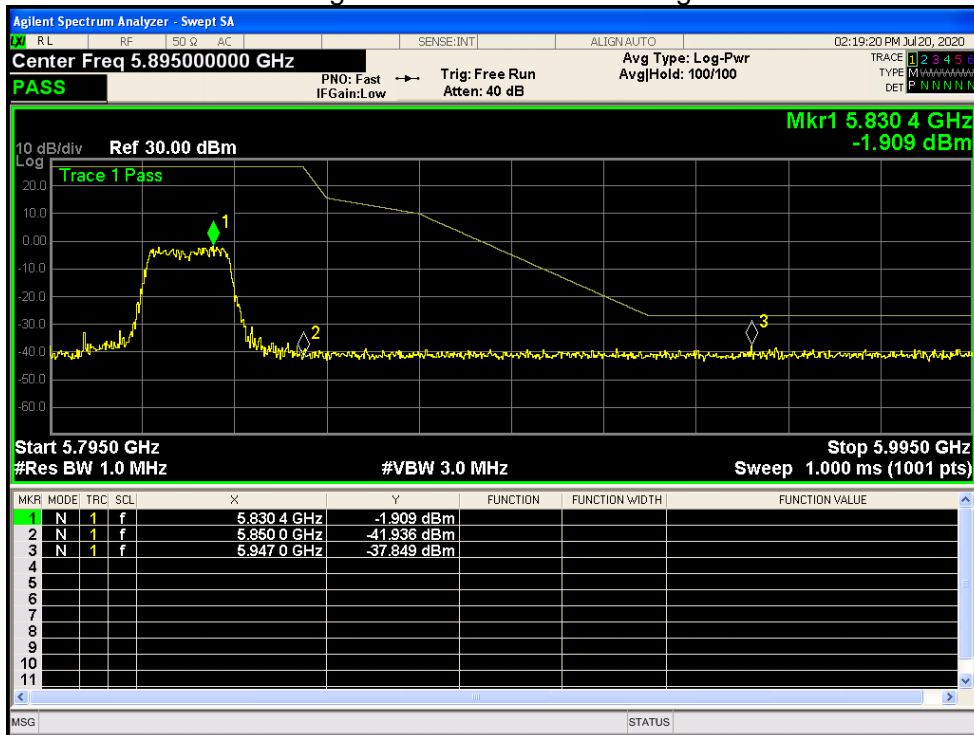




Band Edge NVNT n40 5755MHz Low Ant1




Band Edge NVNT n40 5795MHz High Ant1

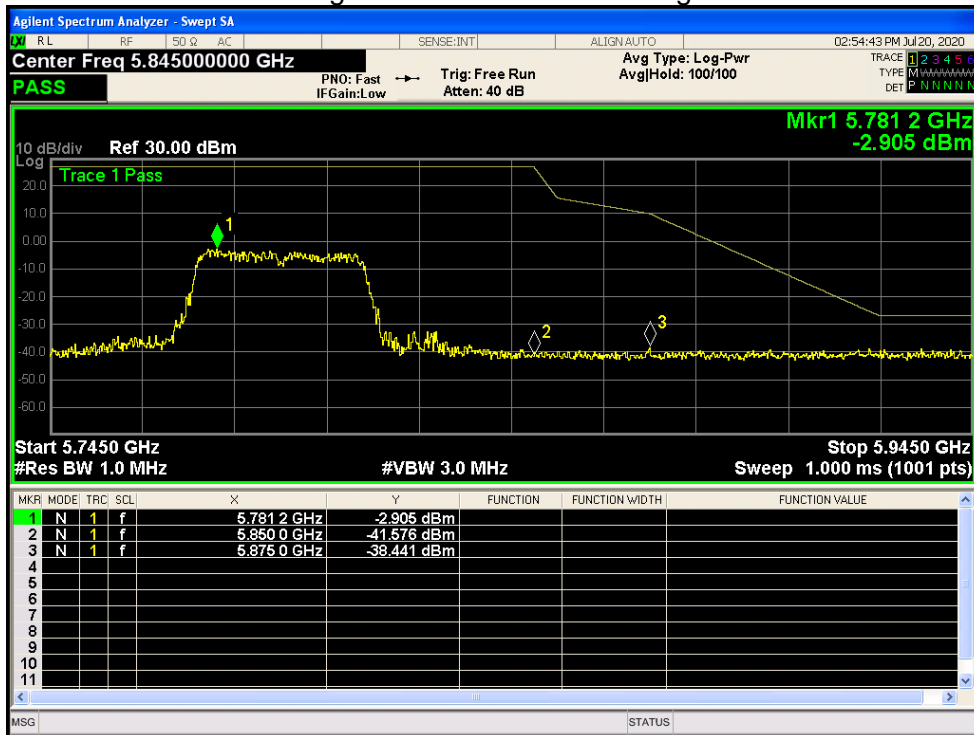


**CONDUCTED RF SPURIOUS EMISSION**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (EIRP dBc)	Limit (EIRP dBc)	Verdict
NVNT	a	5745	Ant1	-37.74	-27	Pass
NVNT	a	5785	Ant1	-36.98	-27	Pass
NVNT	a	5825	Ant1	-37.15	-27	Pass
NVNT	ac20	5745	Ant1	-37.75	-27	Pass
NVNT	ac20	5785	Ant1	-37.84	-27	Pass
NVNT	ac20	5825	Ant1	-37.18	-27	Pass
NVNT	ac40	5755	Ant1	-37.38	-27	Pass
NVNT	ac40	5795	Ant1	-37.87	-27	Pass
NVNT	ac80	5775	Ant1	-37.19	-27	Pass
NVNT	n20	5745	Ant1	-37.75	-27	Pass
NVNT	n20	5785	Ant1	-37.67	-27	Pass
NVNT	n20	5825	Ant1	-37.73	-27	Pass
NVNT	n40	5755	Ant1	-37.42	-27	Pass
NVNT	n40	5795	Ant1	-37.92	-27	Pass


Tx. Spurious NVNT a 5745MHz Ant1 Emission

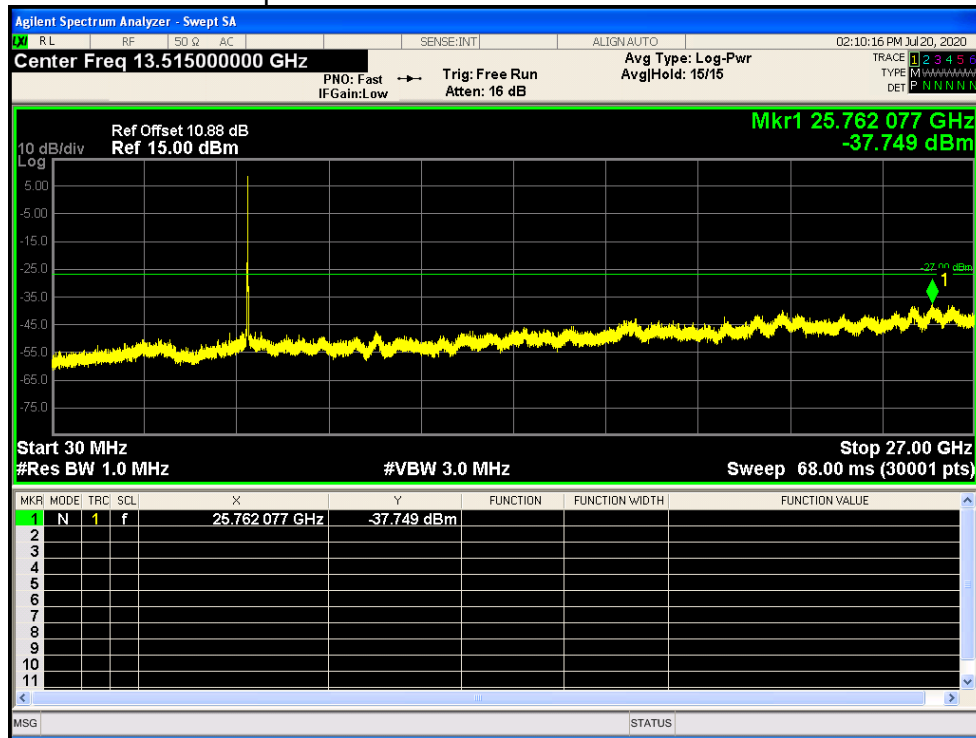


Tx. Spurious NVNT a 5785MHz Ant1 Emission

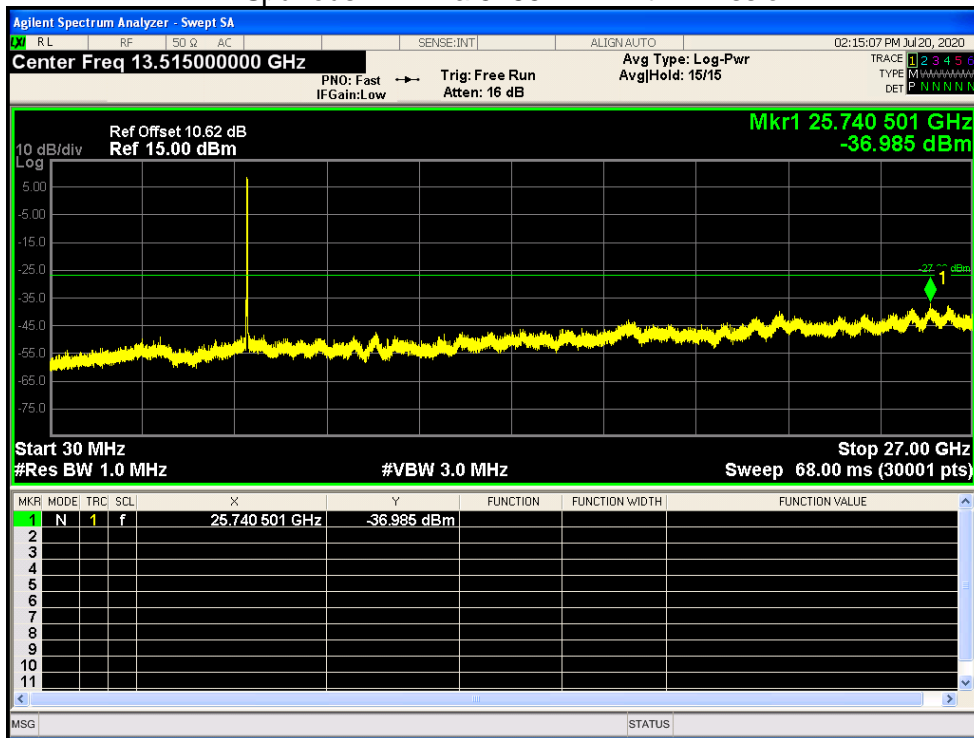


Tx. Spurious NVNT a 5825MHz Ant1 Emission

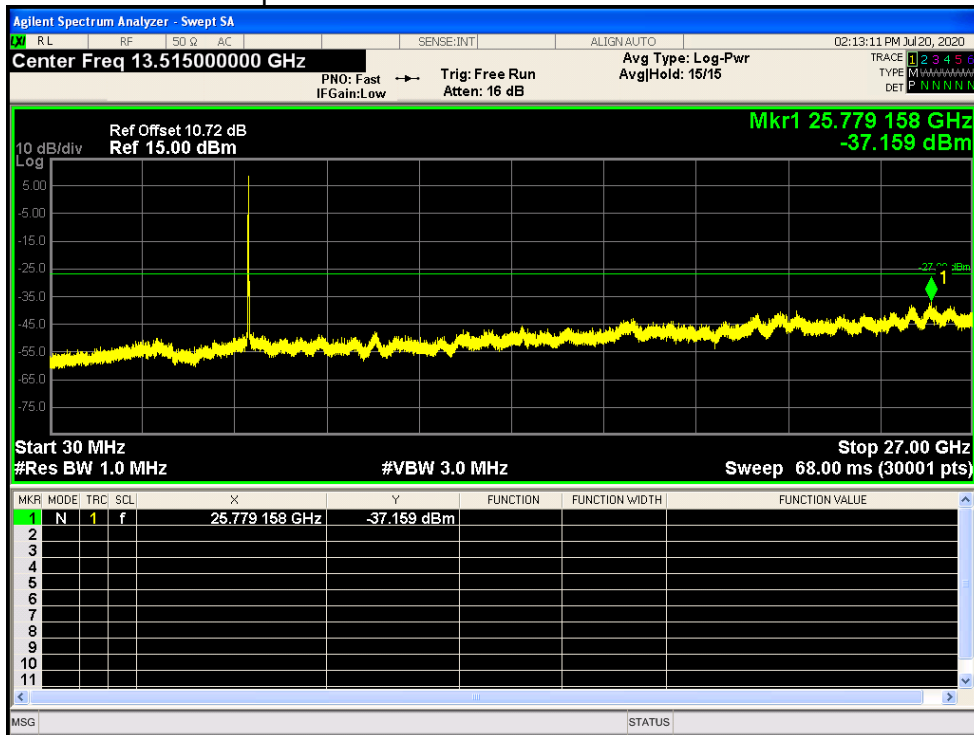


Tx. Spurious NVNT ac20 5745MHz Ant1 Emission

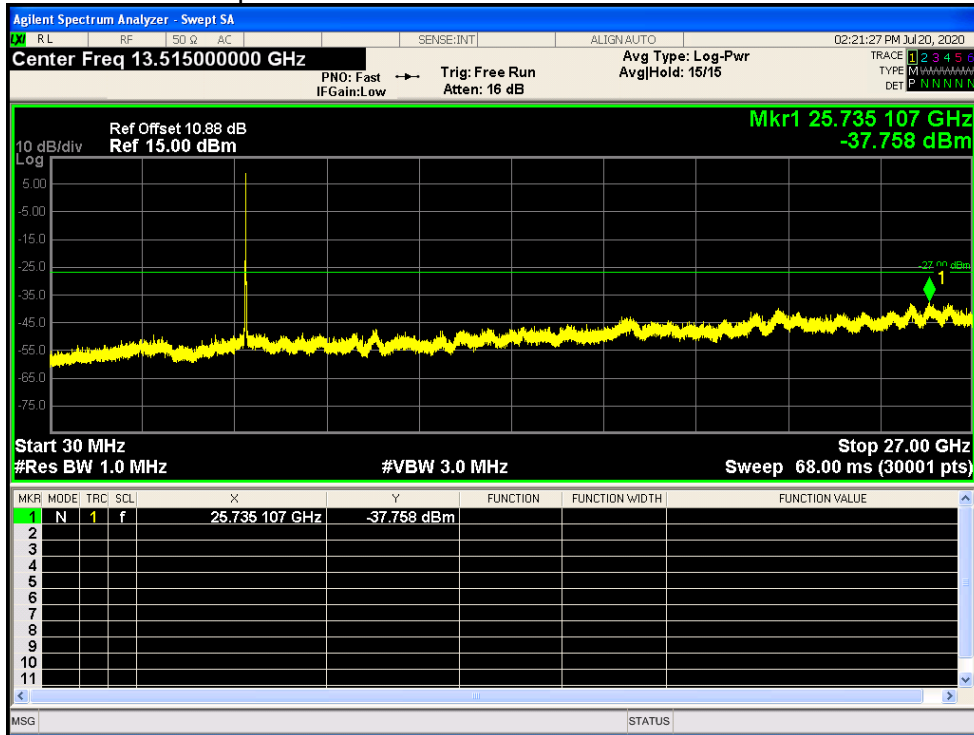


Tx. Spurious NVNT ac20 5785MHz Ant1 Emission

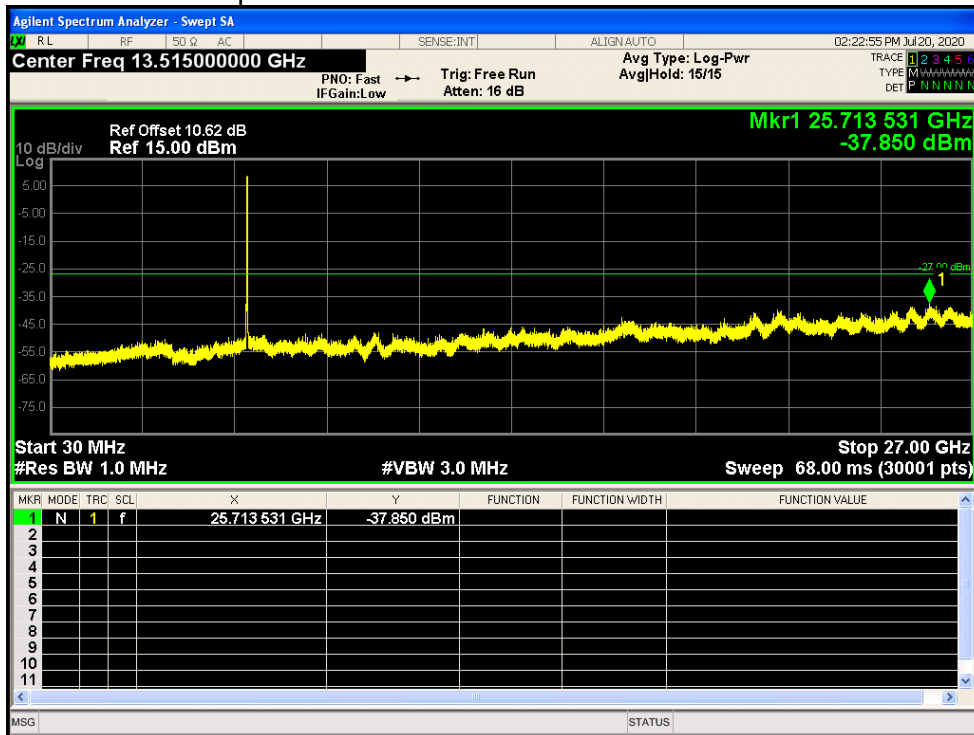


Tx. Spurious NVNT ac20 5825MHz Ant1 Emission

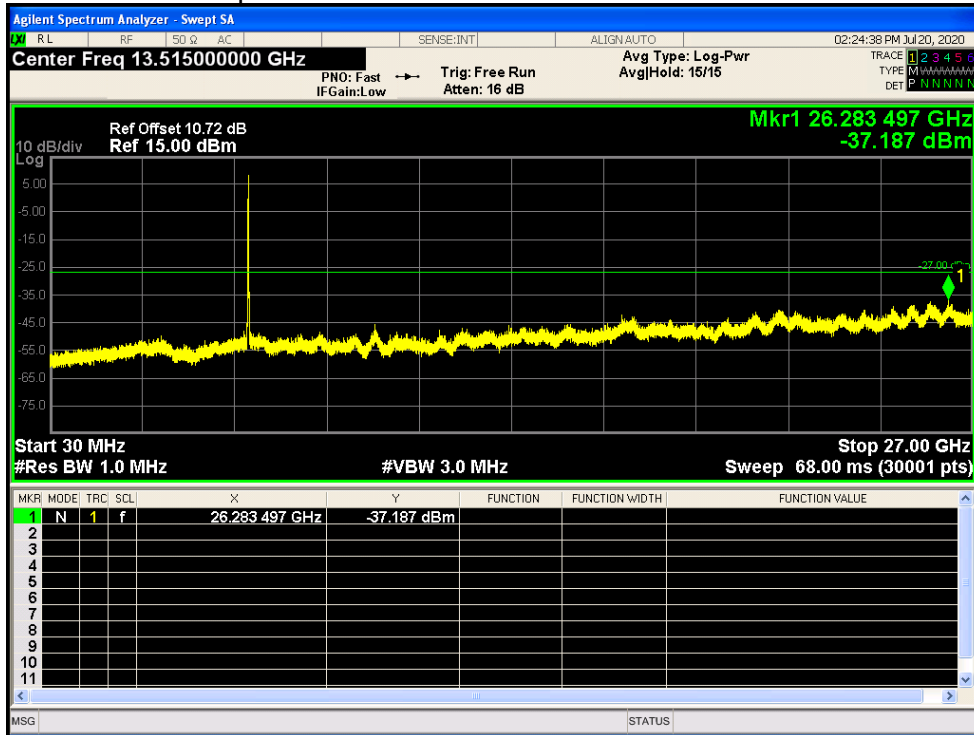


Tx. Spurious NVNT ac40 5755MHz Ant1 Emission

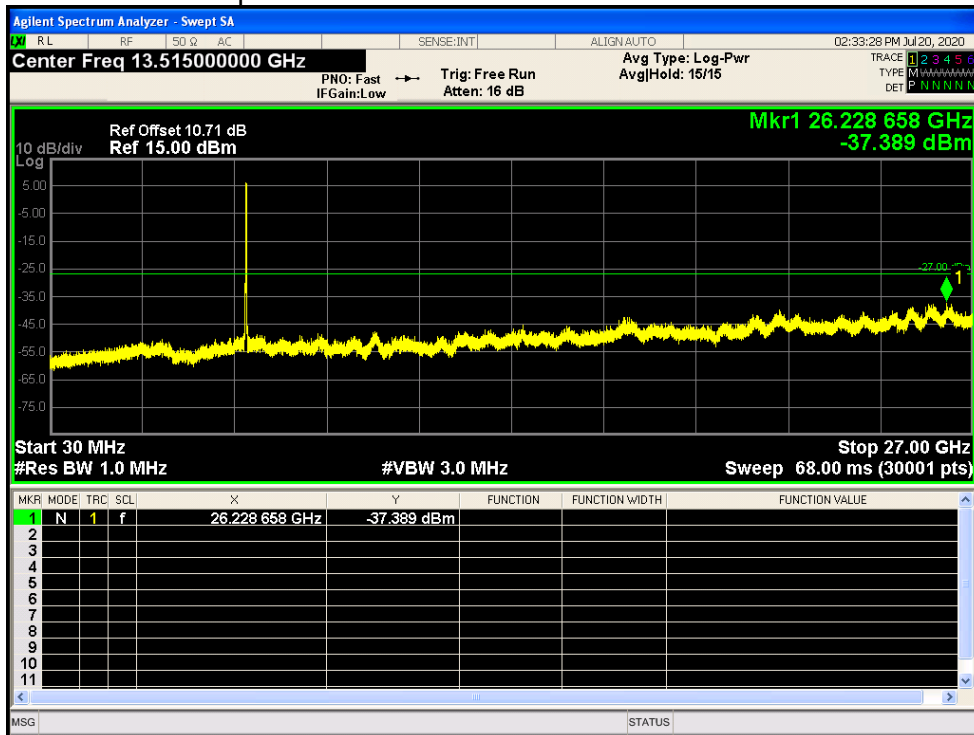


Tx. Spurious NVNT ac40 5795MHz Ant1 Emission

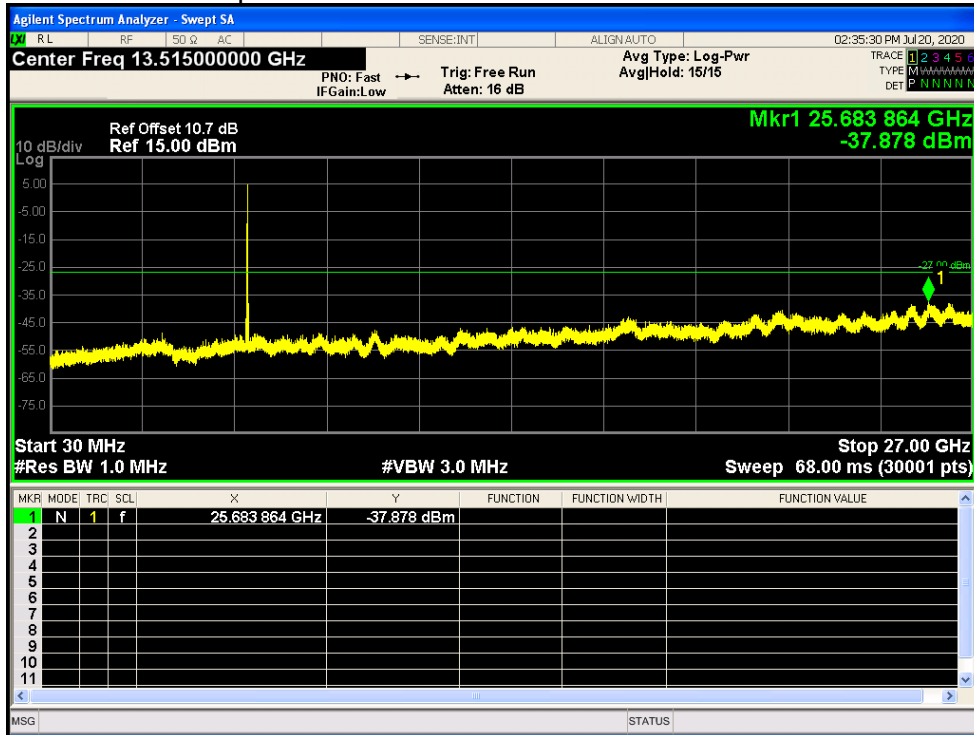


Tx. Spurious NVNT ac80 5775MHz Ant1 Emission

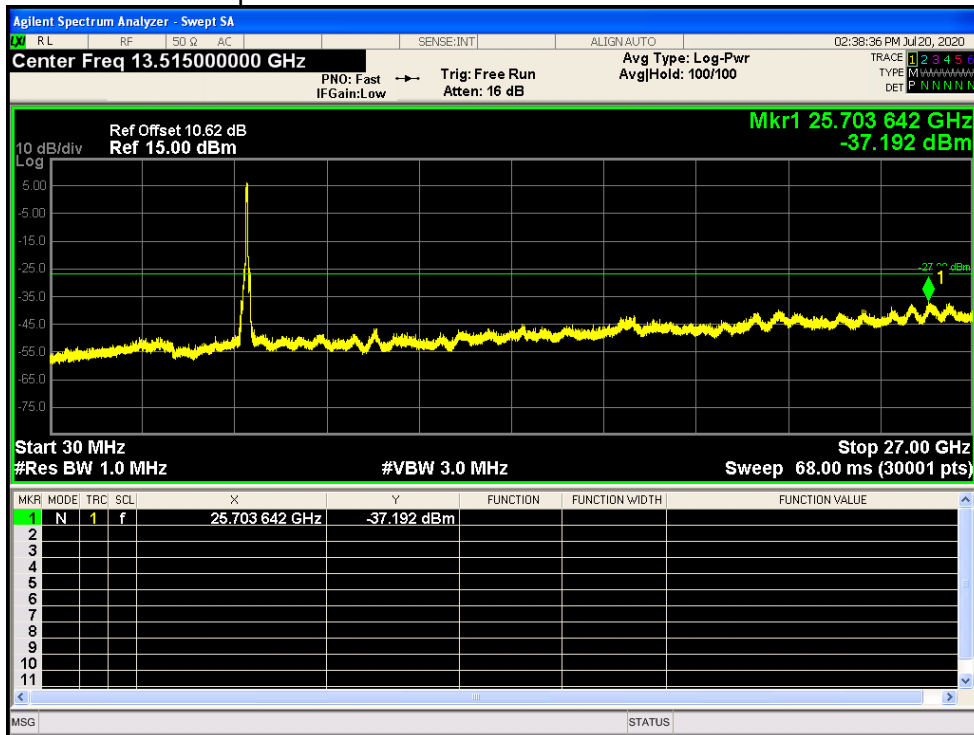


Tx. Spurious NVNT n20 5745MHz Ant1 Emission

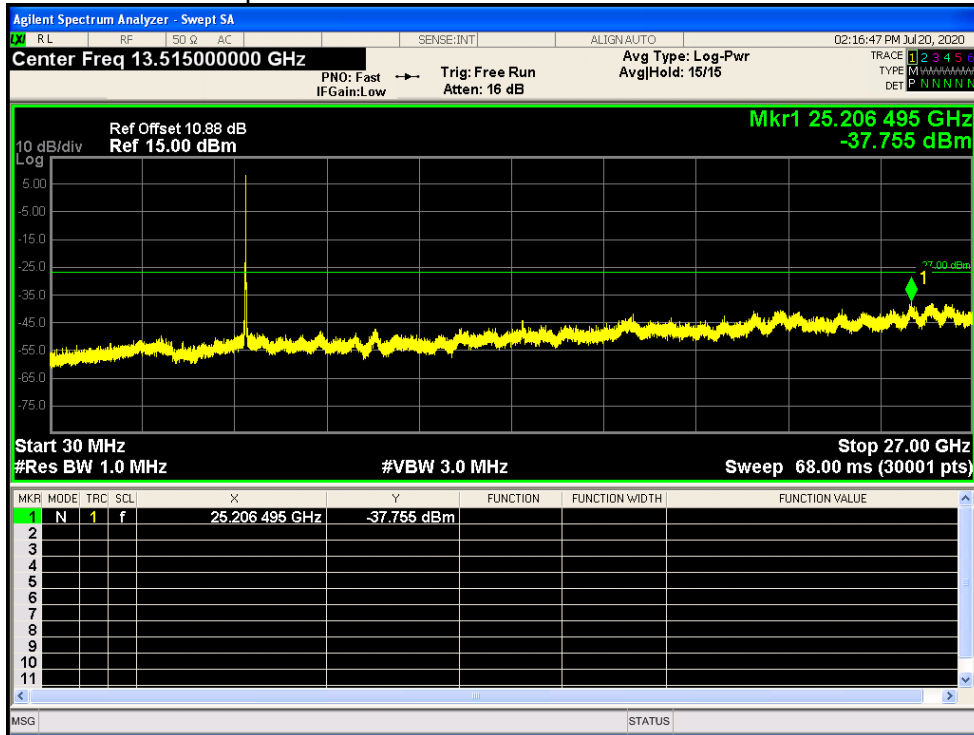


Tx. Spurious NVNT n20 5785MHz Ant1 Emission

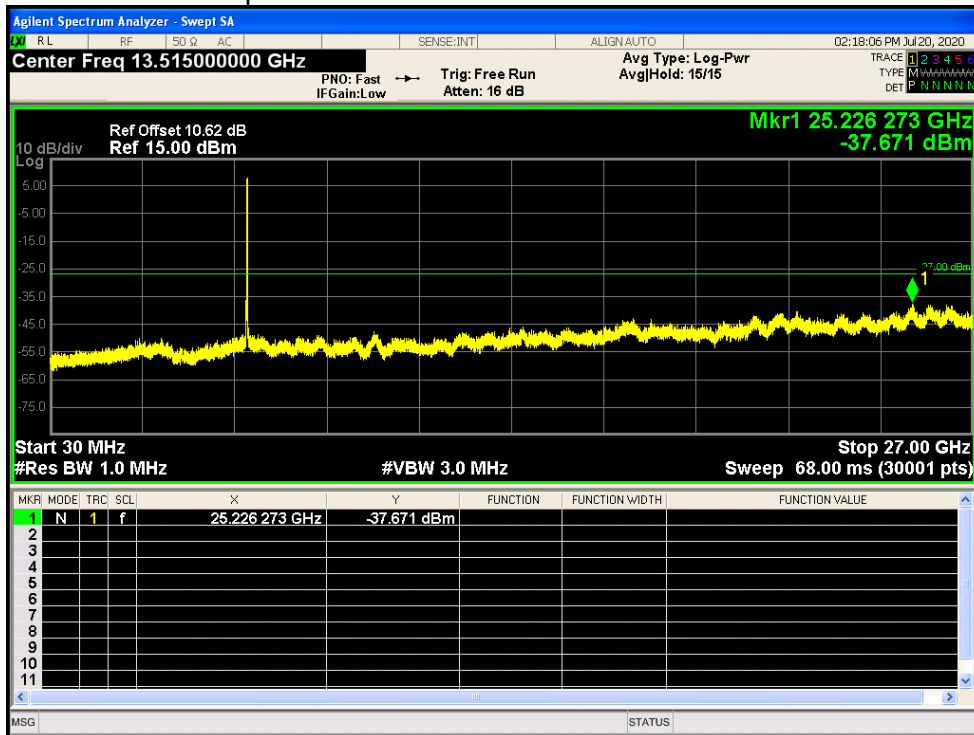

Tx. Spurious NVNT n20 5825MHz Ant1 Emission

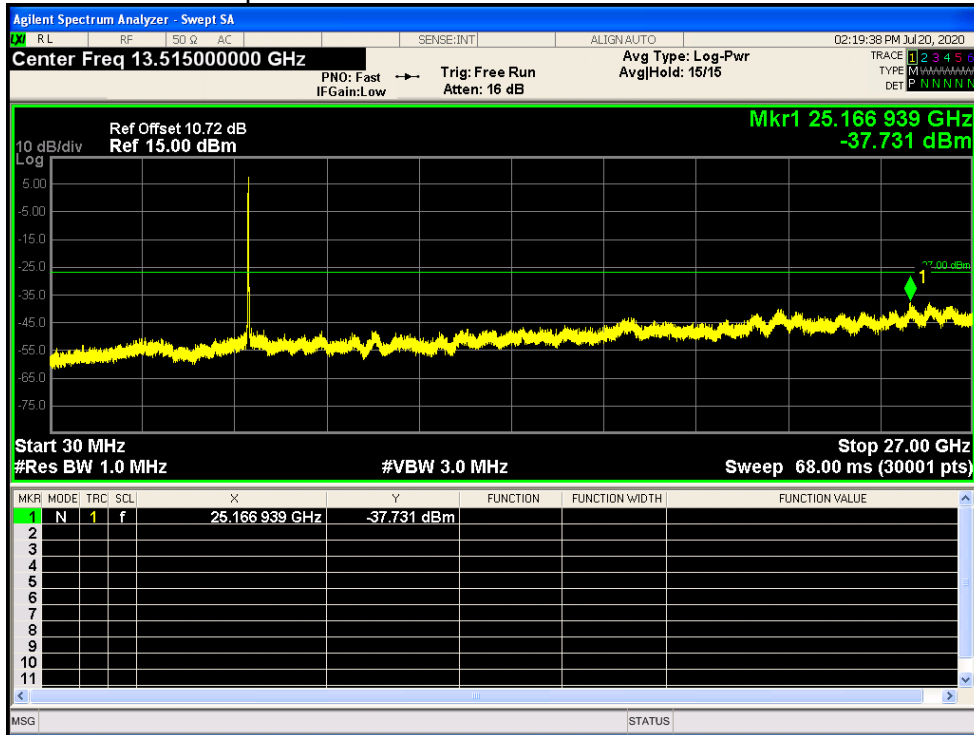


Tx. Spurious NVNT n40 5755MHz Ant1 Emission

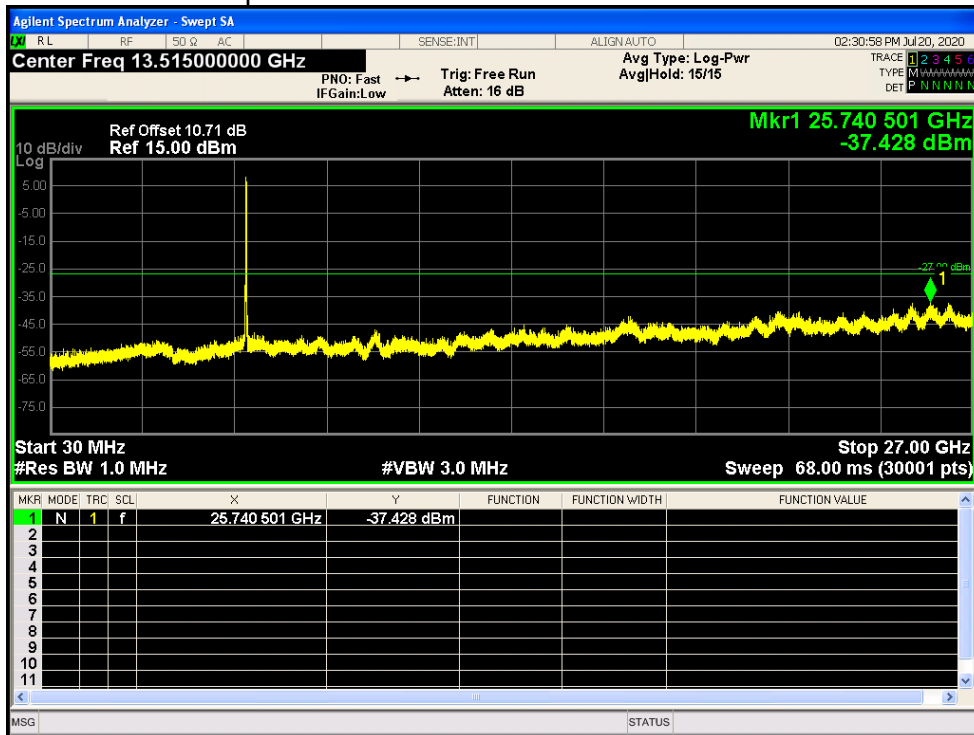



Tx. Spurious NVNT n40 5795MHz Ant1 Emission

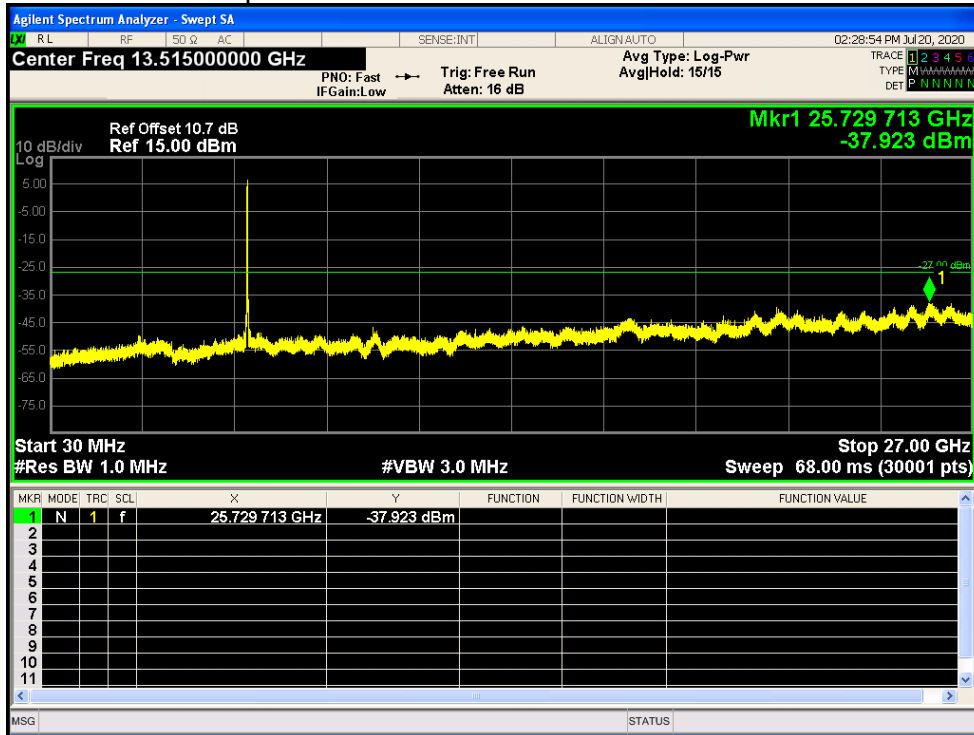

END OF REPORT