

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Rechargeable Li-polymer Battery

Model Name: NV-3978115-2S
NOM 7.6V 5500mAh 41.8Wh
Max Voltage : 8.7V
Carried Standard:GB31241-2014
Store between 0°C-60°C 32°F-140°F
Please refer user manual or follow local ordinance and/or regulations for disposal

CAUTION:
1.Do not disassemble or repair this battery.
2.Do not squeeze, thrust, short-circuit the battery, nor put into water or fire.
3.Do not expose the battery in an ambient temperature of greater than 60 degree.
4.Use the specifically configured charger of NV-3978115-2S charging.

♻️ ♻️ ♻️

Photo 2



Rechargeable Li-polymer Battery

Model Name: NV-3978115-2S
NOM 7.6V 5500mAh 41.8Wh
Max Voltage : 8.7V
Carried Standard:GB31241-2014
Store between 0°C-60°C 32°F-140°F
Please refer user manual or follow local ordinance and/or regulations for disposal

CAUTION:
1.Do not disassemble or repair this battery.
2.Do not squeeze, thrust, short-circuit the battery, nor put into water or fire.
3.Do not expose the battery in an ambient temperature of greater than 60 degree.
4.Use the specifically configured charger of NV-3978115-2S charging.

♻️ ♻️ ♻️

Photo 3

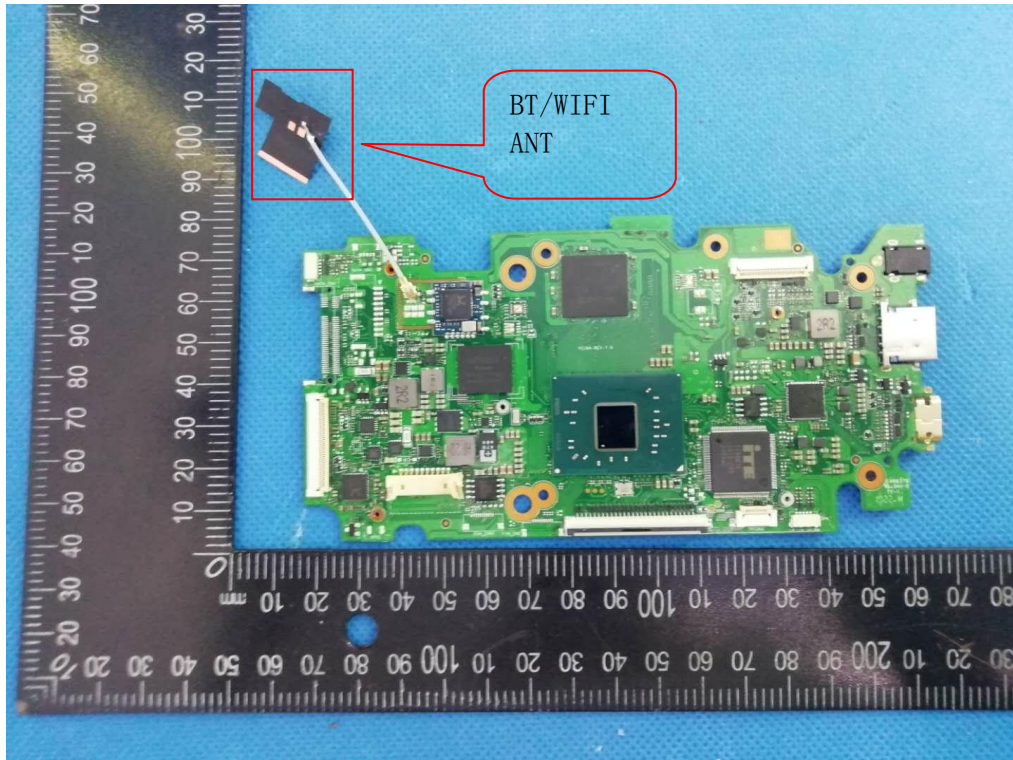


Photo 4



Photo 5



Photo 6

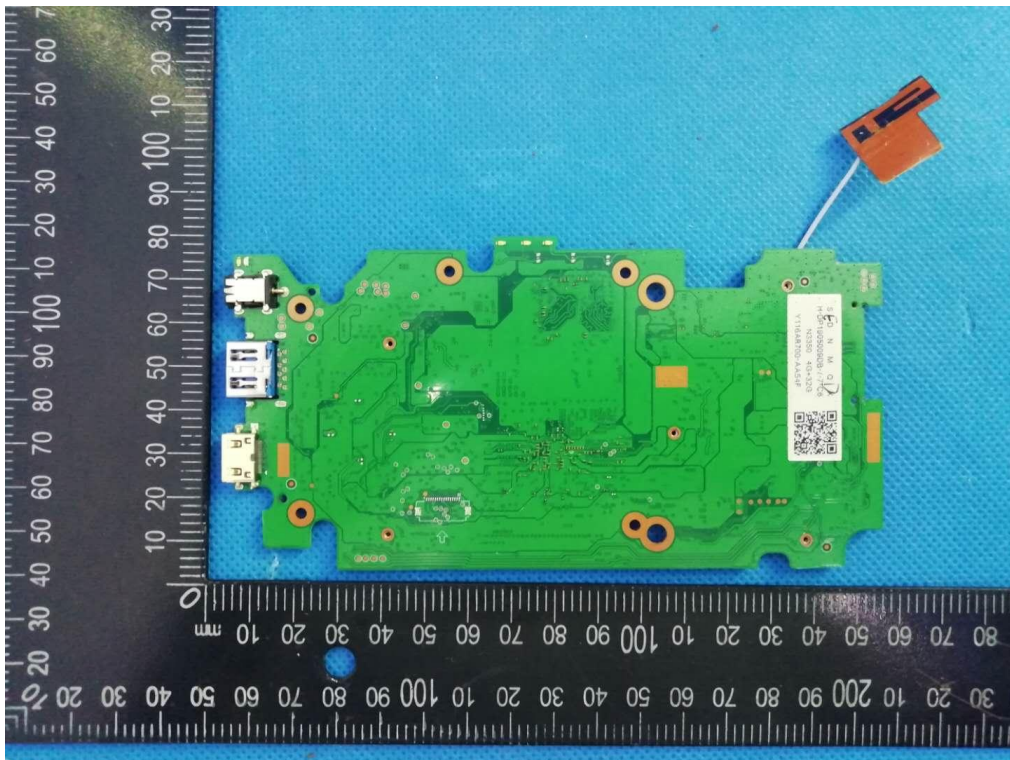


Photo 7

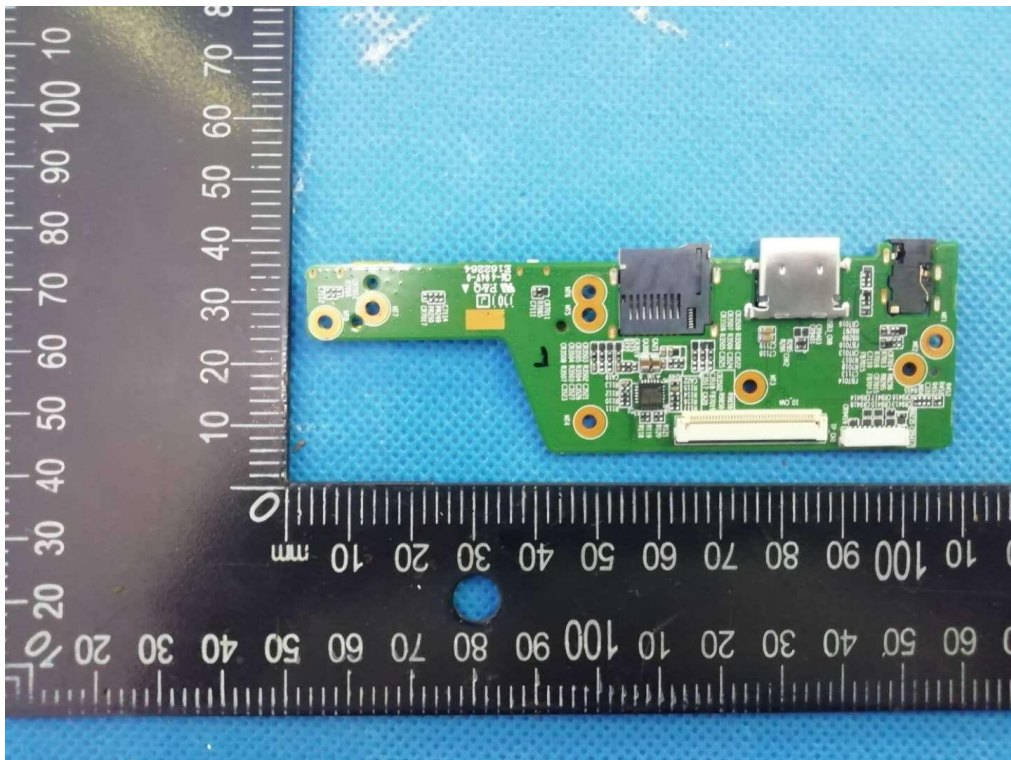


Photo 8

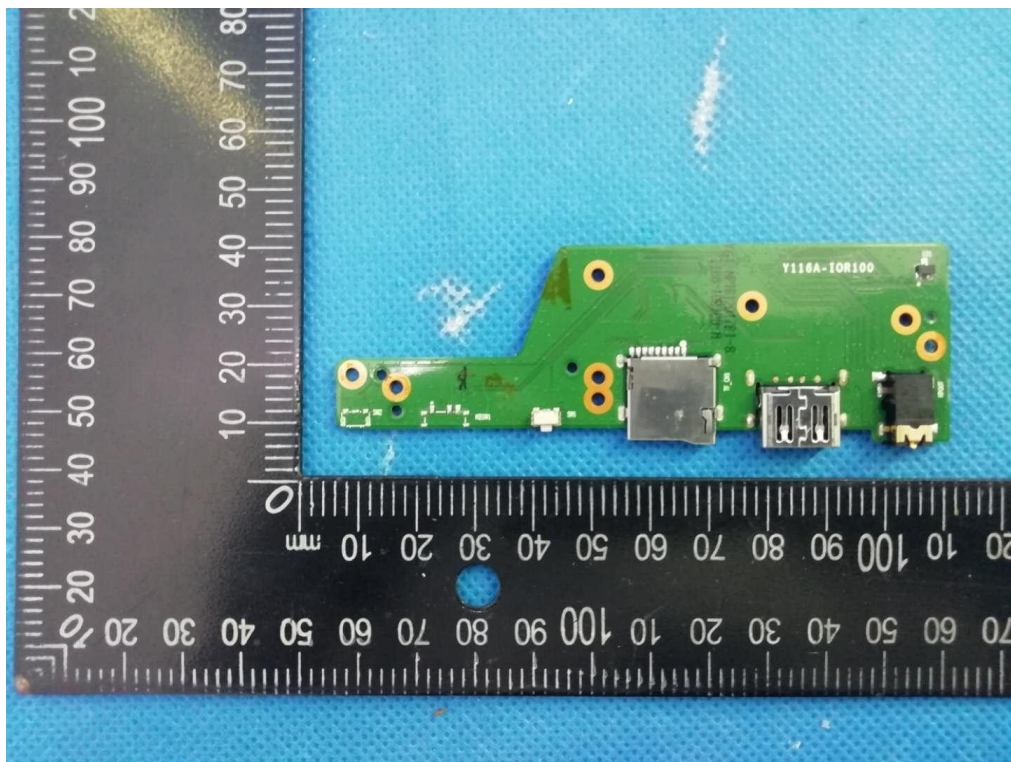


Photo 9

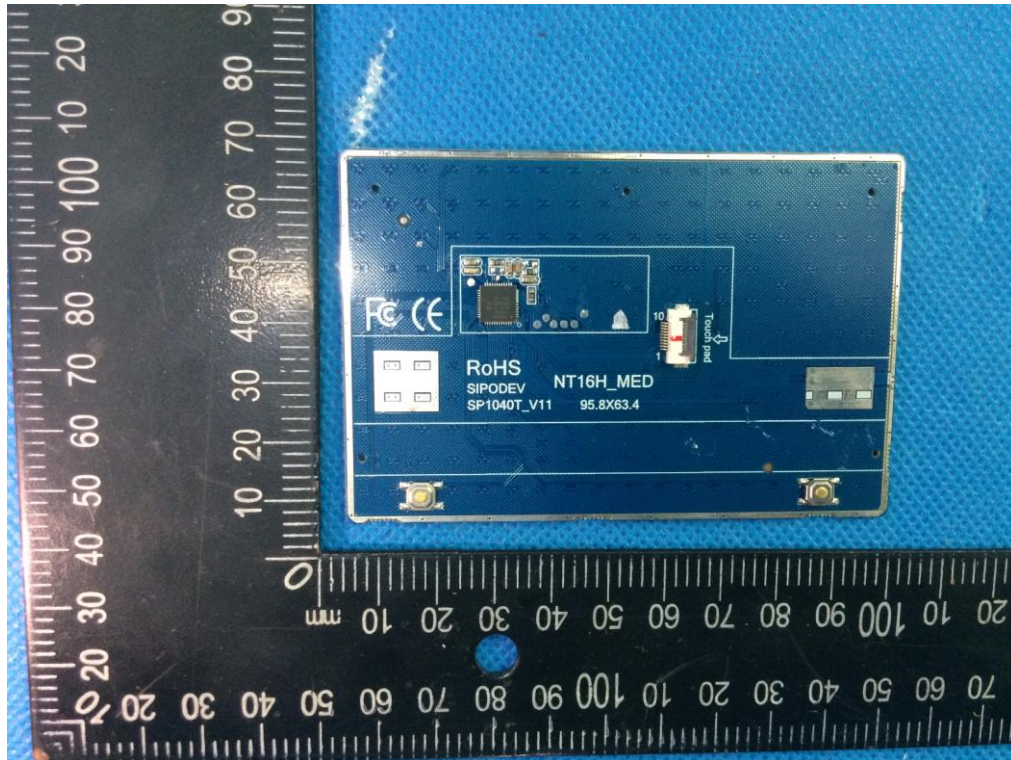


Photo 10

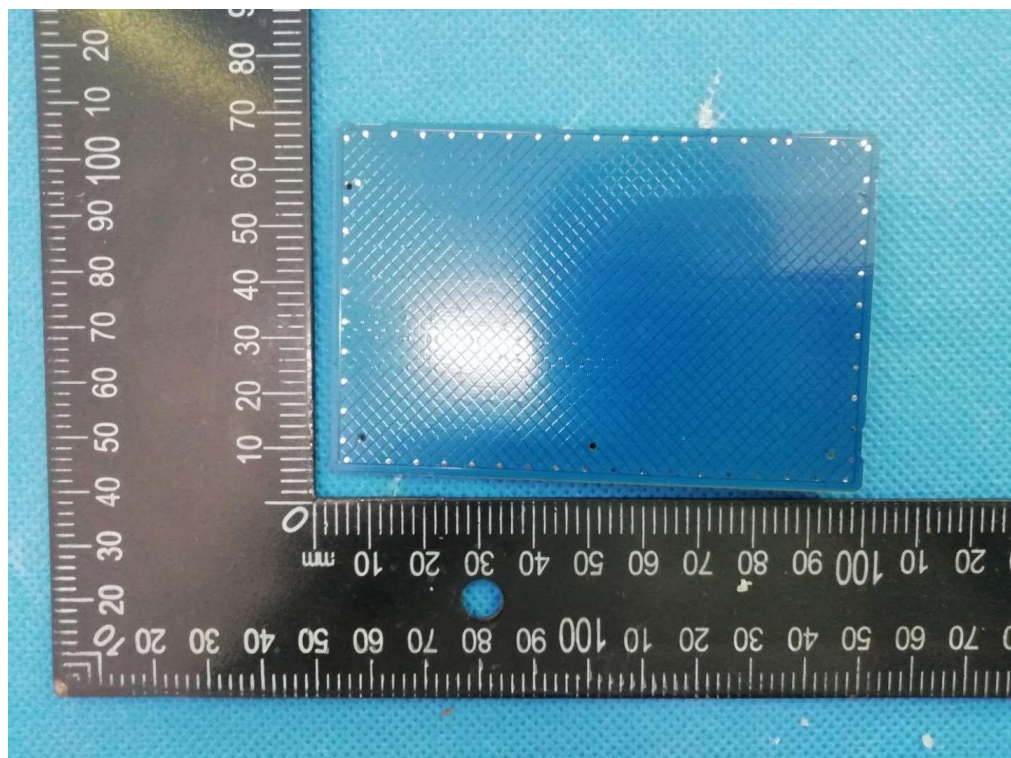


Photo 11



Photo 12

