



# FCC RADIO TEST REPORT

## FCC ID: 2ACPR-W7002

**Product :** MID

**Trade Name :** N/A

**Model Name :** W7002

**Serial Model :** W700,W701,W7001,W7002,W7003,W7004,  
W7005,W7006,W7007,W7008,W7009,W7010,  
W7011,W7012,W7013,W7014,W7015,W7016,  
W7017,W7018,W7019,W7020

**Report No. :** NTEK-2014NT0616902F1

### Prepared for

SHENZHEN BMORN TECHNOLOGY CO.,LTD.

5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an,  
Shenzhen, Guangdong, China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website:www.ntek.org.cn

## TEST RESULT CERTIFICATION

**Applicant's name** ..... SHENZHEN BMORN TECHNOLOGY CO.,LTD.  
**Address** ..... 5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, Guangdong, China  
**Manufacture's Name**... SHENZHEN BMORN TECHNOLOGY CO.,LTD.  
**Address** ..... 5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, Guangdong, China

### Product description

**Product name** ..... MID  
**Model and/or type reference** ..... W7002  
**Serial Model** ..... W700,W701,W7001,W7002,W7003,W7004, W7005,W7006,W7007,W7008,W7009,W7010, W7011,W7012,W7013,W7014,W7015,W7016, W7017,W7018,W7019,W7020

**Standards** ..... FCC Part15.247(2013-10-1)

**Test procedure** ..... ANSI C63.4-2003 and 558074 D01 DTS Meas Guidance v03r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

**Date (s) of performance of tests** ..... 16 Jun. 2014 ~30 Jun. 2014

**Date of Issue**..... 30 Jun. 2014

**Test Result**..... **Pass**

**Testing Engineer** :   
\_\_\_\_\_ **Denny Huang**

**Technical Manager** :   
\_\_\_\_\_ **(Brown Lu)**

**Authorized Signatory** :   
\_\_\_\_\_ **(Bill Yao)**

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	21
3.2.5 EUT OPERATING CONDITIONS	22
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	25
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>38</b>
4.1 APPLIED PROCEDURES / LIMIT	38
4.1.1 TEST PROCEDURE	38
4.1.2 DEVIATION FROM STANDARD	38
4.1.3 TEST SETUP	38
4.1.4 EUT OPERATION CONDITIONS	38
4.1.5 TEST RESULTS	39
<b>5 . BANDWIDTH TEST</b>	<b>47</b>
5.1 APPLIED PROCEDURES / LIMIT	47
5.1.1 TEST PROCEDURE	47

**Table of Contents**

	<b>Page</b>
<b>TEST SETUP</b>	<b>47</b>
<b>5.1.2 EUT OPERATION CONDITIONS</b>	<b>47</b>
<b>5.1.3 TEST RESULTS</b>	<b>48</b>
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>56</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>56</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>56</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>56</b>
<b>6.1.3 TEST SETUP</b>	<b>56</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>56</b>
<b>6.1.5 TEST RESULTS</b>	<b>57</b>
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>58</b>
<b>7.1 DEVIATION FROM STANDARD</b>	<b>58</b>
<b>7.2 TEST SETUP</b>	<b>58</b>
<b>7.3 EUT OPERATION CONDITIONS</b>	<b>58</b>
<b>7.4 TEST RESULTS</b>	<b>59</b>
<b>8 . ANTENNA REQUIREMENT</b>	<b>65</b>
<b>8.1 STANDARD REQUIREMENT</b>	<b>65</b>
<b>8.2 EUT ANTENNA</b>	<b>65</b>
<b>9 . EUT TEST PHOTO</b>	<b>66</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

**1.1 TEST FACILITY**

NTEK Testing Technology Co., Ltd  
 Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.  
 FCC Registration No.:238937; IC Registration No.:9270A-1  
 CNAS Registration No.:L5516

**1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	MID	
Trade Name	N/A	
Model Name	W7002	
Serial Model	W700,W701,W7001,W7002,W7003,W7004, W7005,W7006,W7007,W7008,W7009,W7010, W7011,W7012,W7013,W7014,W7015,W7016, W7017,W7018,W7019,W7020	
Model Difference	All the model are the same circuit and RF module, except the model name and colour.	
Product Description	The EUT is a MID	
	Operation Frequency:	BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
	Modulation Type:	WIFI:CCK/OFDM/DBPSK/DAPSK BT: BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz/40MHz):150/144.44/130/1 17/115.56/104/86.67/78/52/6.5Mbps
	Number Of Channel	BT:79 CH WIFI: 802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 12.63 dBm (Max.) 802.11g: 11.56 dBm (Max.) 802.11n(20M): 10.85 dBm (Max.) 802.11n(40M): 10.85 dBm (Max.)
	Antenna Gain (dBi)	1.5 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 3.7V	

Adapter	Adapter 1: Model: SA/12PA/05FUS050200 Input: 100-240V~, 50/60Hz, 0.5A Output: 5V $\overline{\text{---}}$ , 2.0A  Adapter 2: Model: PS10C050K2000UU Input: 100-240V~, 50/60Hz, 0.35A Output: 5V $\overline{\text{---}}$ , 2.0A
Battery	DC3.7V, 2800mAh
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	N/A	1.5	Wifi Antenna



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n/20MHz CH1/ CH6/ CH11
Mode 4	802.11n/40MHz CH3/ CH6/ CH9
Mode 5	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n/20MHz CH1/ CH6/ CH11
Mode 4	802.11n/40MHz CH3/ CH6/ CH9

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

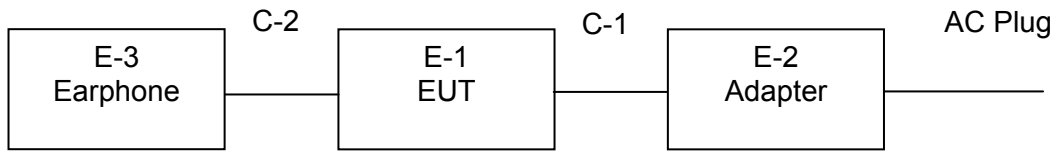

Radiated Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	MID	N/A	W7002	N/A	EUT
E-2	Adapter	N/A	SA/12PA/05FUS050200	N/A	
E-2	Adapter	N/A	PS10C050K2000UU	N/A	
E-3	Earphone	N/A	2688	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	0.8m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2014.06.08	2015.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


**3.1.2 TEST PROCEDURE**

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**3.1.3 DEVIATION FROM TEST STANDARD**

No deviation

**3.1.4 TEST SETUP**

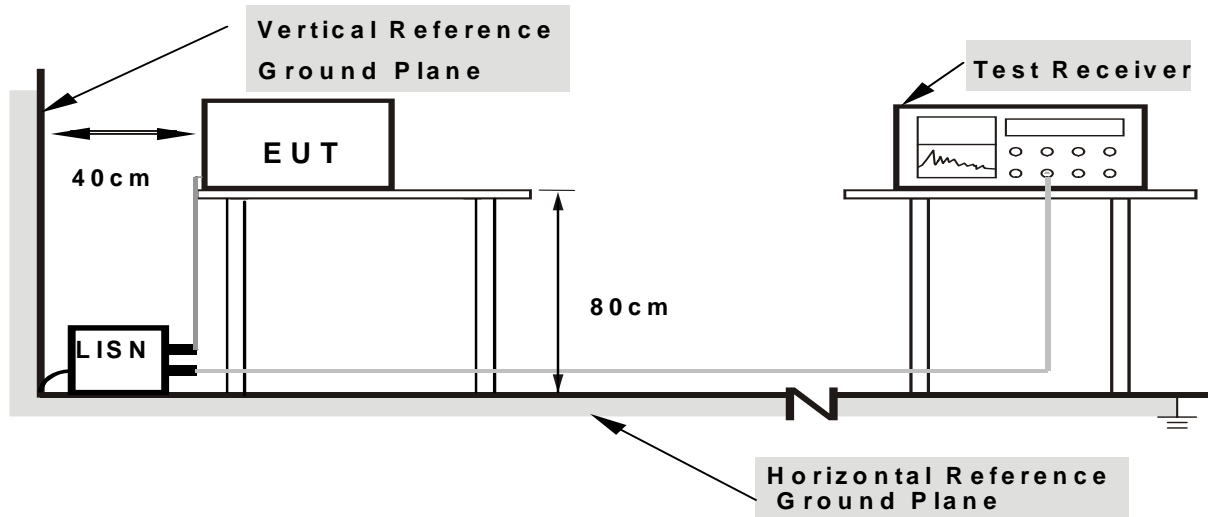

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

**3.1.5 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	MID	Model Name. :	W7002
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5-Adapter 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1685	33.62	9.58	43.20	65.03	-21.83	peak
0.1685	25.02	9.58	34.60	55.03	-20.43	AVG
0.2938	31.20	9.50	40.70	60.41	-19.71	peak
0.2938	26.19	9.50	35.69	50.41	-14.72	AVG
0.4540	37.19	9.51	46.70	56.80	-10.10	peak
0.4540	31.24	9.51	40.75	46.80	-6.05	AVG
0.8100	34.07	9.53	43.60	56.00	-12.40	peak
0.8100	25.21	9.53	34.74	46.00	-11.26	AVG
19.7698	24.62	10.28	34.90	60.00	-25.10	peak
19.7698	13.51	10.28	23.79	50.00	-26.21	AVG
22.2578	25.16	10.24	35.40	60.00	-24.60	peak
22.2578	12.26	10.24	22.50	50.00	-27.50	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

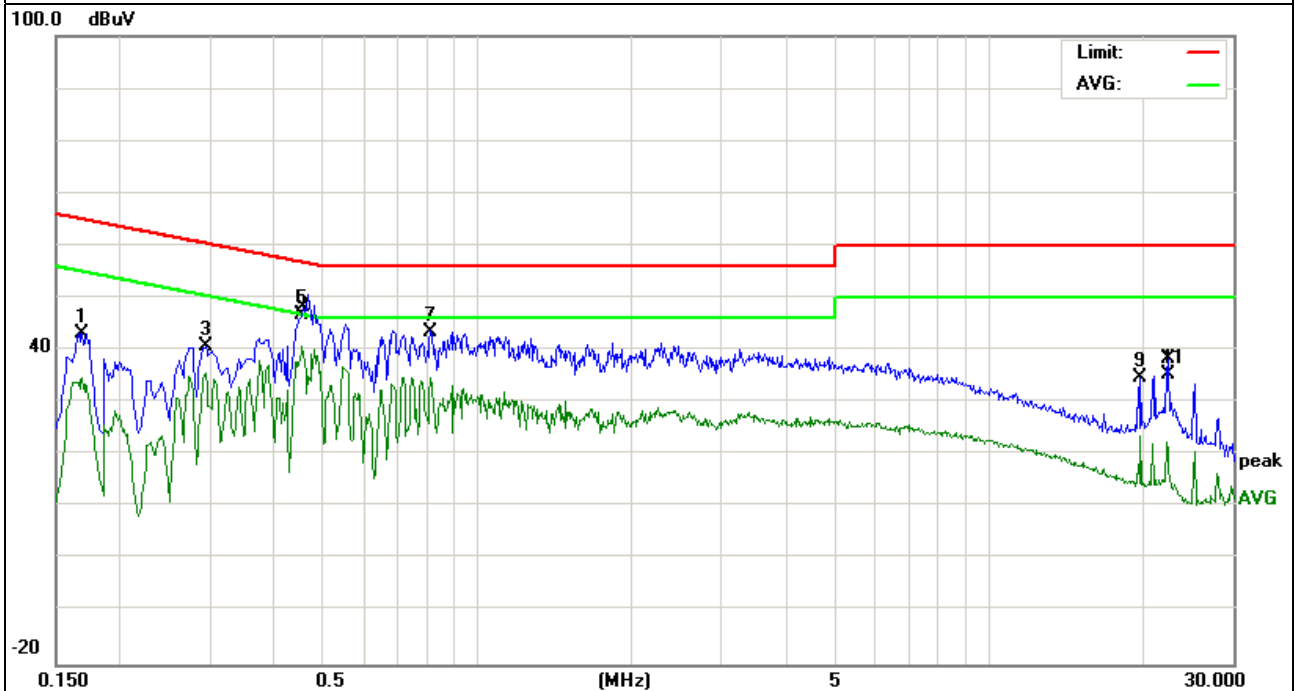


EUT :	MID	Model Name. :	W7002
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5-Adapter 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1499	46.38	9.66	56.04	66.00	-9.96	peak
0.1499	28.22	9.66	37.88	56.00	-18.12	AVG
0.1901	42.27	9.53	51.80	64.03	-12.23	peak
0.1901	27.28	9.53	36.81	54.03	-17.22	AVG
0.2620	34.09	9.51	43.60	61.36	-17.76	peak
0.2620	24.90	9.51	34.41	51.36	-16.95	AVG
0.4540	34.17	9.53	43.70	56.80	-13.10	peak
0.4540	28.26	9.53	37.79	46.80	-9.01	AVG
0.5260	29.67	9.53	39.20	56.00	-16.80	peak
0.5260	23.44	9.53	32.97	46.00	-13.03	AVG
0.9180	35.75	9.55	45.30	56.00	-10.70	peak
0.9180	25.03	9.55	34.58	46.00	-11.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

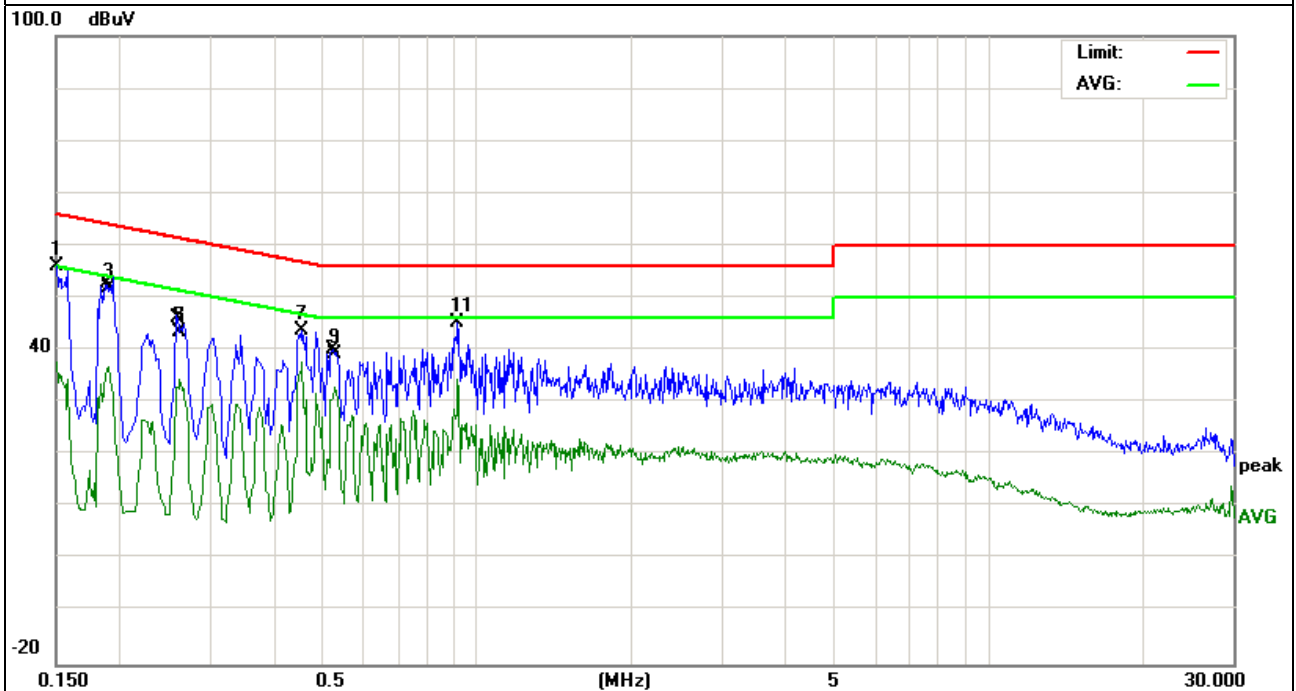




EUT :	MID	Model Name. :	W7002
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5-Adapter 2

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1547	38.59	9.61	48.20	65.74	-17.54	peak
0.1547	31.92	9.61	41.53	55.74	-14.21	AVG
0.1943	37.59	9.51	47.10	63.85	-16.75	peak
0.1943	31.51	9.51	41.02	53.85	-12.83	AVG
0.2714	40.81	9.49	50.30	61.07	-10.77	peak
0.2714	33.05	9.49	42.54	51.07	-8.53	AVG
0.3497	38.32	9.50	47.82	58.97	-11.15	peak
0.3497	29.92	9.50	39.42	48.97	-9.55	AVG
0.4661	39.79	9.51	49.30	56.58	-7.28	peak
0.4661	30.93	9.51	40.44	46.58	-6.14	AVG
1.1336	40.07	9.53	49.60	56.00	-6.40	peak
1.1336	28.21	9.53	37.74	46.00	-8.26	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

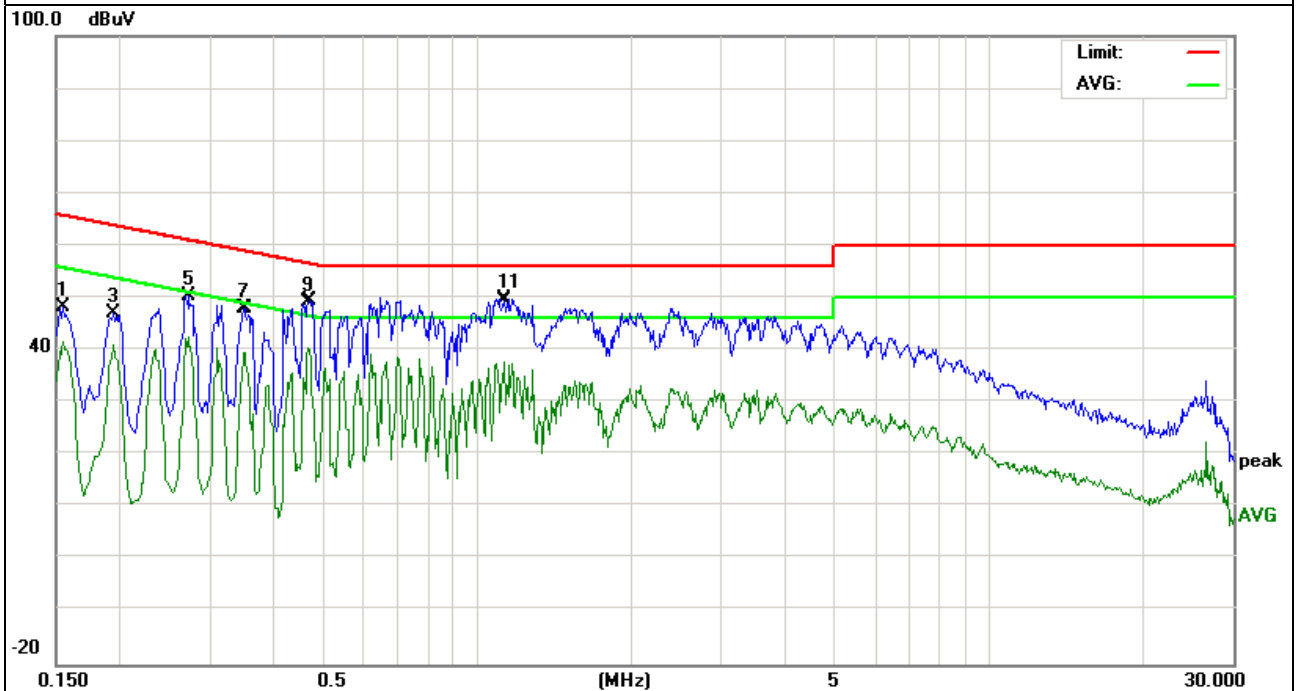


EUT :	MID	Model Name. :	W7002
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5-Adapter 2

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1539	33.45	9.65	43.10	65.78	-22.68	peak
0.1539	30.06	9.65	39.71	55.78	-16.07	AVG
0.2303	33.90	9.50	43.40	62.44	-19.04	peak
0.2303	28.22	9.50	37.72	52.44	-14.72	AVG
0.2741	35.55	9.51	45.06	60.99	-15.93	peak
0.2741	30.73	9.51	40.24	50.99	-10.75	AVG
0.4660	39.37	9.53	48.90	56.58	-7.68	peak
0.4660	33.73	9.53	43.26	46.58	-3.32	AVG
0.6220	36.20	9.53	45.73	56.00	-10.27	peak
0.6620	29.42	9.54	38.96	46.00	-7.04	AVG
1.1297	36.01	9.55	45.56	56.00	-10.44	peak
1.1297	28.21	9.55	37.76	46.00	-8.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

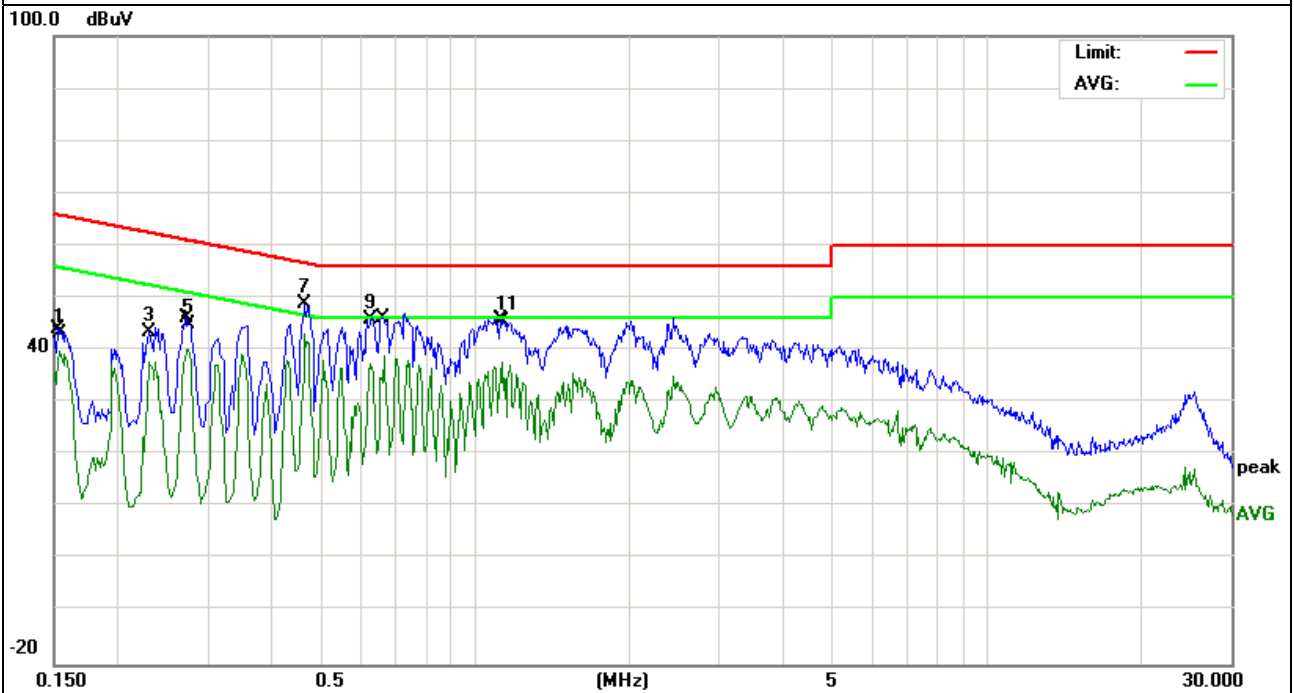

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

**3.2.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

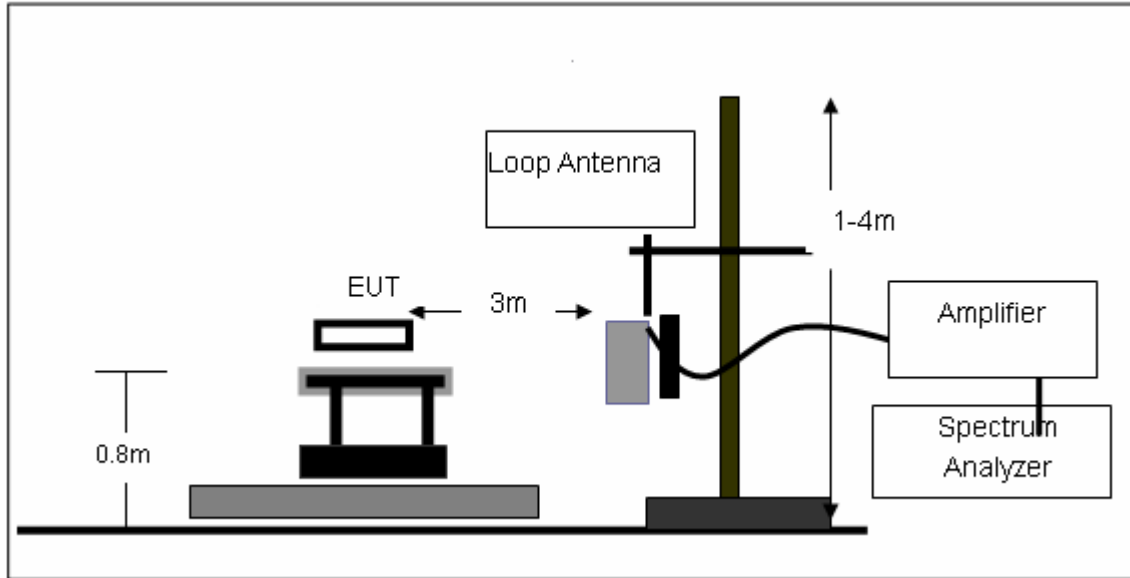

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

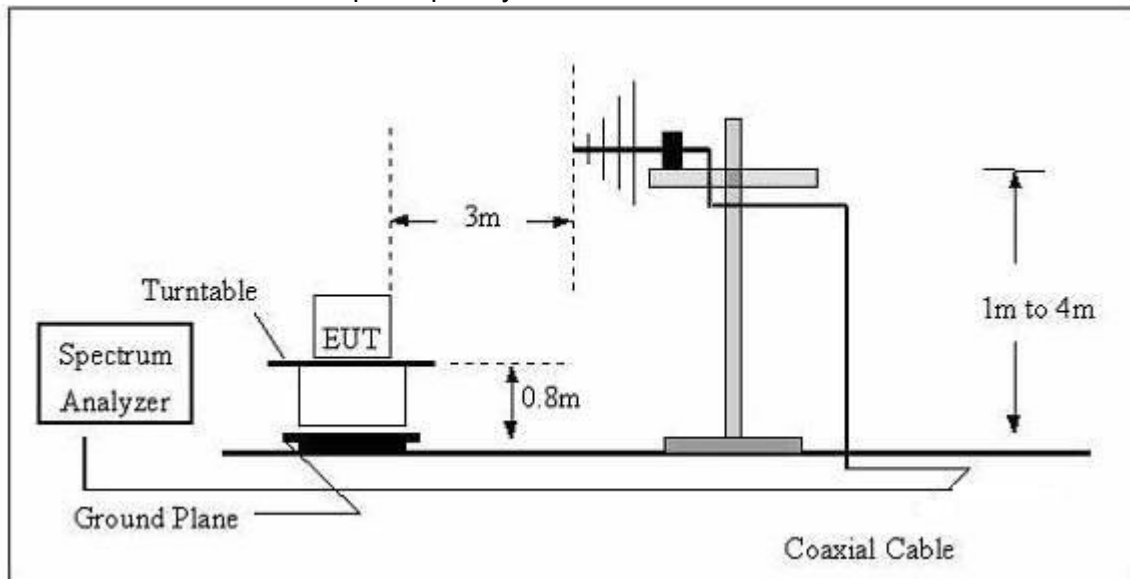

(C) Radiated Emission Test-Setup Frequency Above 1GHz

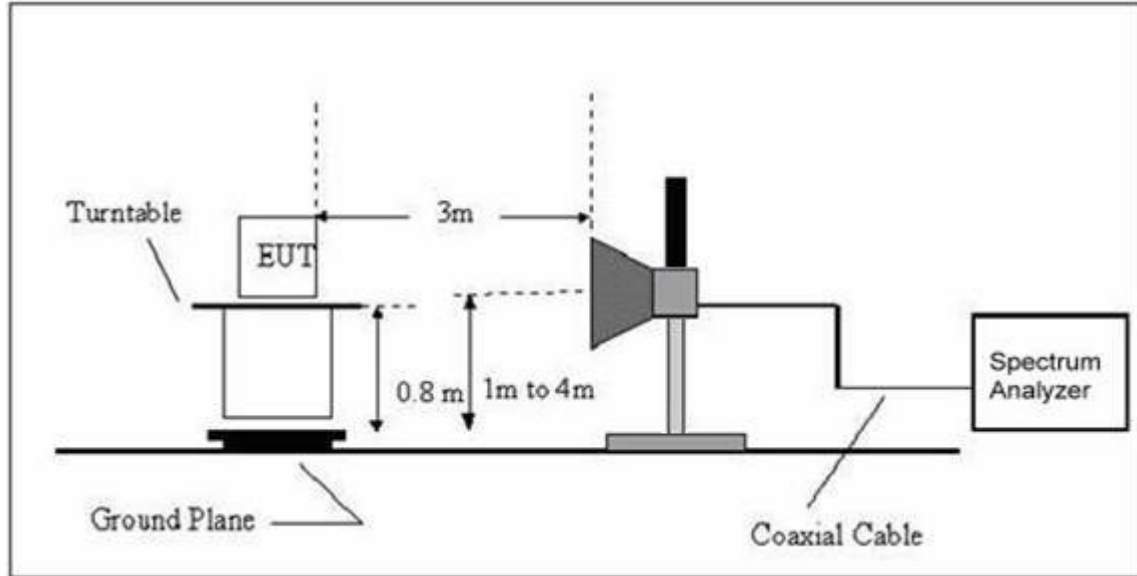

**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	MID	Model Name. :	W7002
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

EUT :	MID	Model Name :	W7002
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detect or Type	Comment
Below 1G							
66.9668	23.64	6.26	29.90	40.00	-10.10	QP	Vertical
84.4054	20.95	6.75	27.70	40.00	-12.30	QP	Vertical
158.1123	22.83	10.47	33.30	43.50	-10.20	QP	Vertical
195.8220	28.05	10.75	38.80	43.50	-4.70	QP	Vertical
311.0867	25.32	14.62	39.94	46.00	-6.06	QP	Vertical
372.0045	24.84	17.16	42.00	46.00	-4.00	QP	Vertical
38.8878	20.95	14.25	35.20	40.00	-4.80	QP	Horizontal
86.8067	22.45	7.25	29.70	40.00	-10.30	QP	Horizontal
138.8735	19.53	11.47	31.00	43.50	-12.50	QP	Horizontal
196.5098	27.54	10.75	38.29	43.50	-5.21	QP	Horizontal
293.0842	24.22	14.08	38.30	46.00	-7.70	QP	Horizontal
520.8881	18.27	20.73	39.00	46.00	-7.00	QP	Horizontal





### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	MID	Model Name :	W7002
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		



Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detect or Type	Comment
Low Channel (2412 MHz)-Above 1G							
4824	48.76	10.44	59.20	74	-14.8	Pk	Vertical
4824	30.71	10.44	41.15	54	-12.85	AV	Vertical
7236	43.63	12.39	56.02	74	-17.98	Pk	Vertical
7236	26.80	12.39	39.19	54	-14.81	AV	Vertical
4824	48.62	10.44	59.06	74	-14.94	Pk	Horizontal
4824	31.60	10.44	42.04	54	-11.96	AV	Horizontal
7236	43.52	12.39	55.91	74	-18.09	Pk	Horizontal
7236	28.85	12.39	41.24	54	-12.76	AV	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874	48.81	10.40	59.21	74	-14.79	Pk	Vertical
4874	31.19	10.40	41.59	54	-12.41	AV	Vertical
7311	43.32	12.75	56.07	74	-17.93	Pk	Vertical
7311	26.47	12.75	39.22	54	-14.78	AV	Vertical
4874	48.95	10.40	59.35	74	-14.65	Pk	Horizontal
4874	31.83	10.40	42.23	54	-11.77	AV	Horizontal
7311	43.71	12.75	56.46	74	-17.54	Pk	Horizontal
7311	27.43	12.75	40.18	54	-13.82	AV	Horizontal
High Channel (2462 MHz)- Above 1G							
4924	48.77	10.39	59.16	74	-14.84	Pk	Vertical
4924	31.62	10.39	42.01	54	-11.99	AV	Vertical
7386	43.67	12.68	56.35	74	-17.65	Pk	Vertical
7386	27.25	12.68	39.93	54	-14.07	AV	Vertical
4924	48.52	10.39	58.91	74	-15.09	Pk	Horizontal
4924	31.68	10.39	42.07	54	-11.93	AV	Horizontal
7386	42.50	12.68	55.18	74	-18.82	Pk	Horizontal
7386	27.75	12.68	40.43	54	-13.57	AV	Horizontal

Note: "802.11b" mode is the worst mode.



### Conducted Spurious Emissions at Antenna Port: 802.11b Low Channel

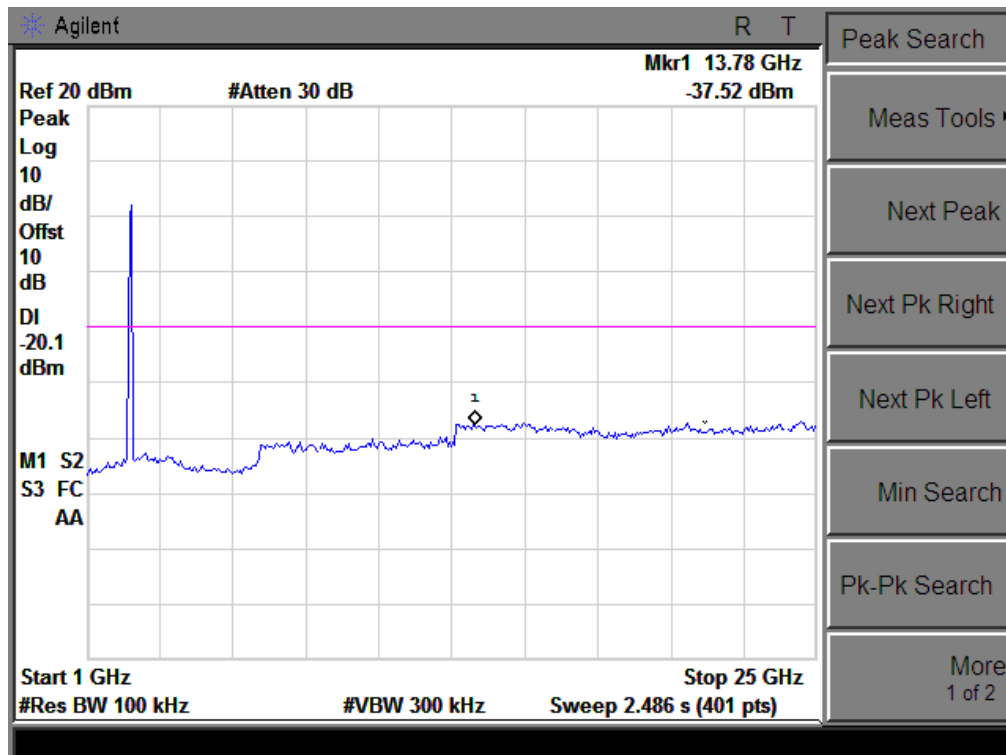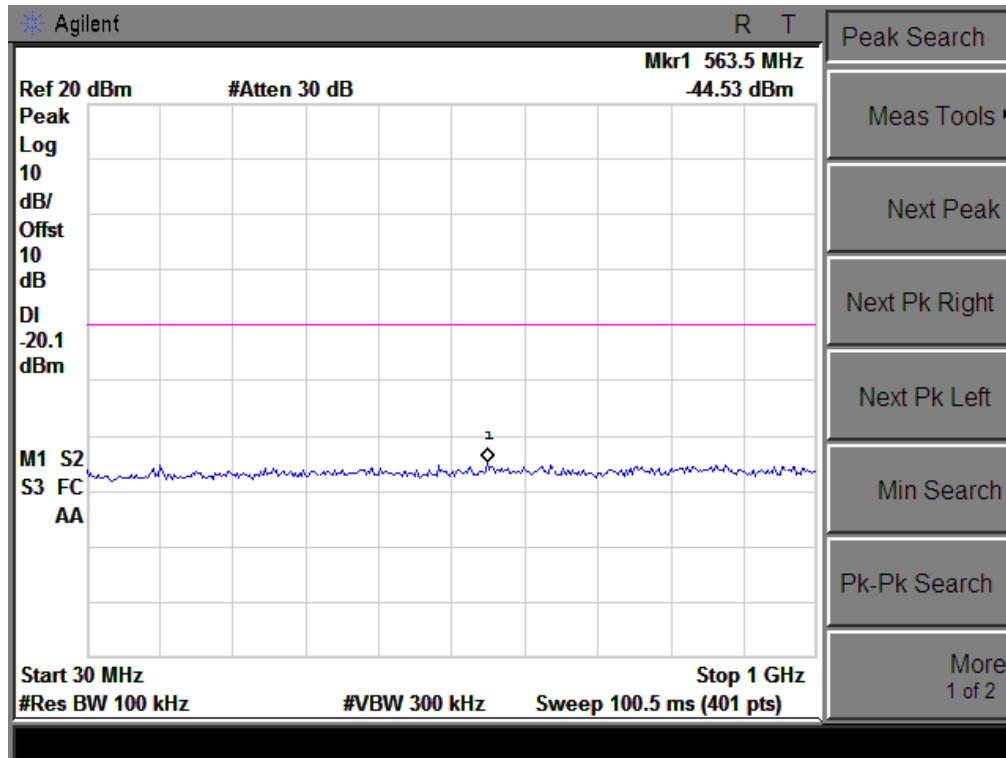



### 802.11b Middle Channel

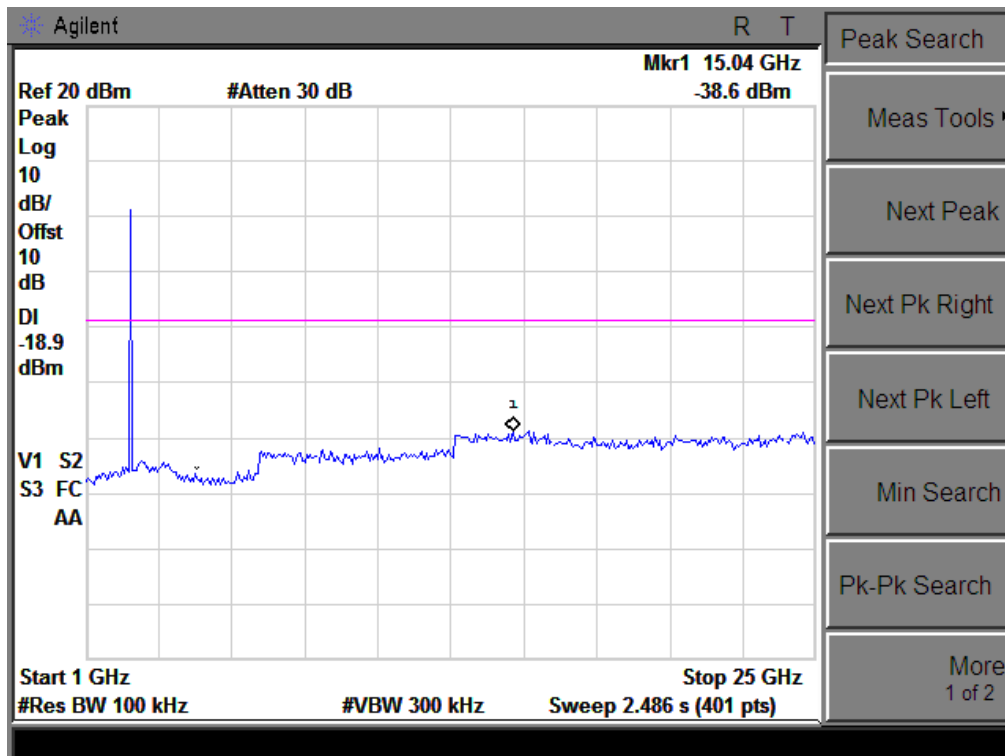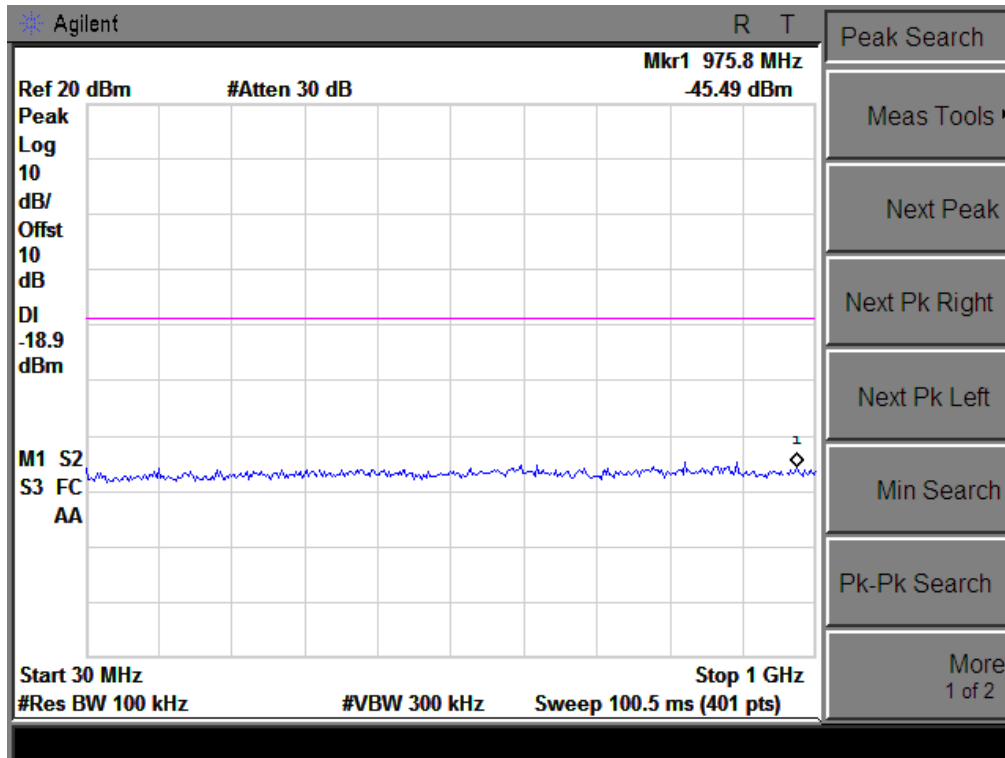



### 802.11b High Channel

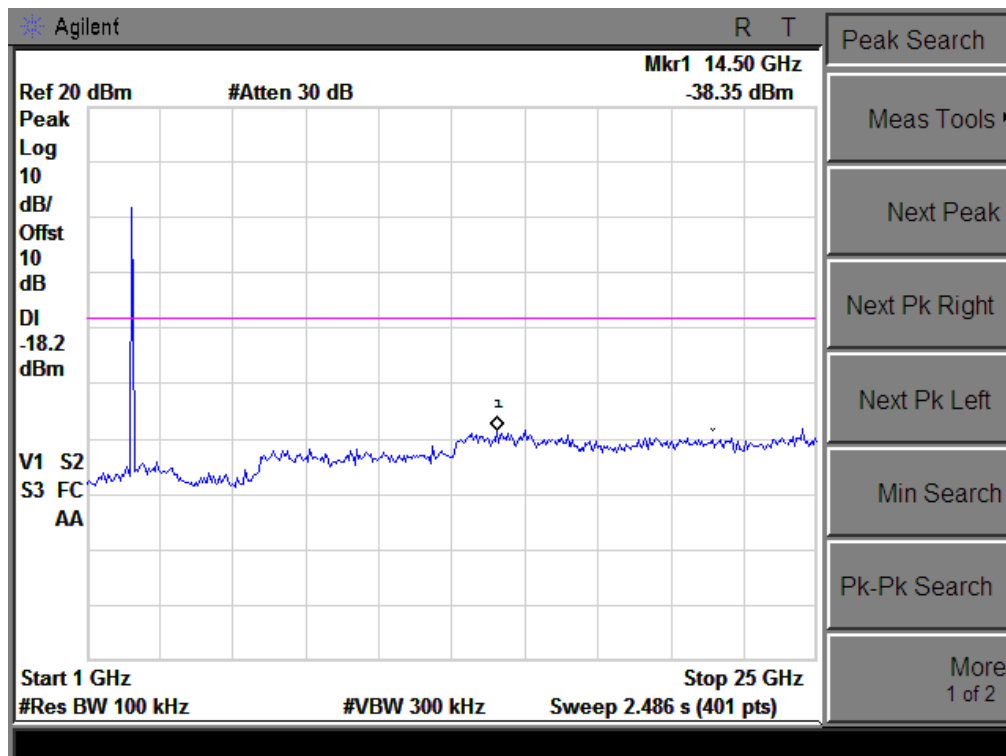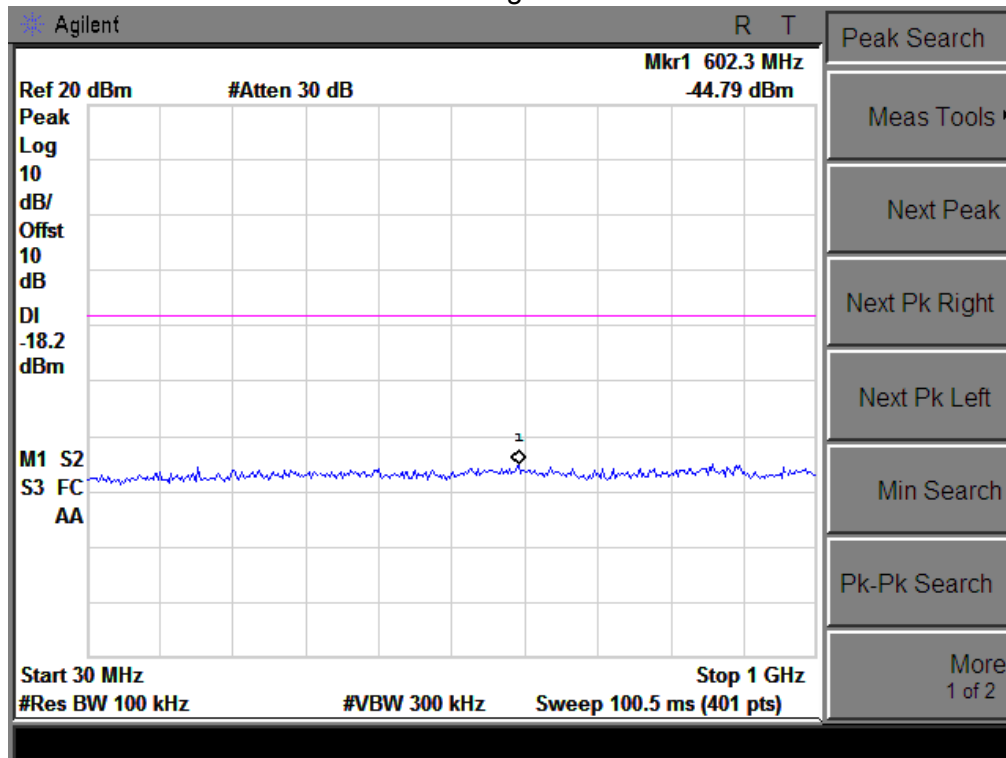



### 802.11g Low Channel

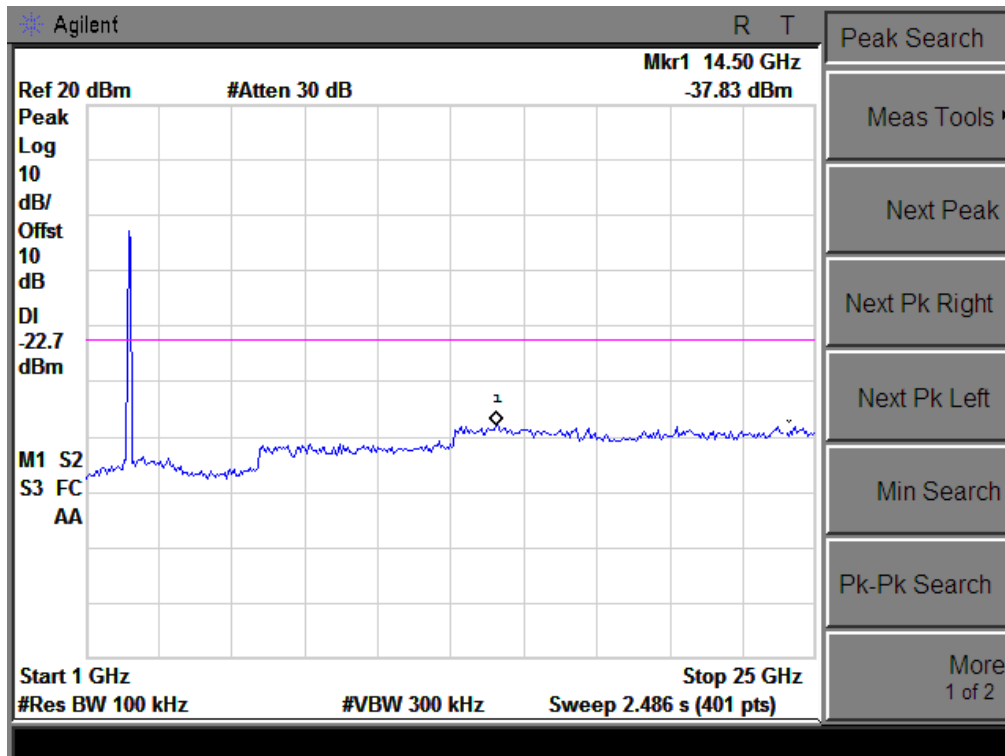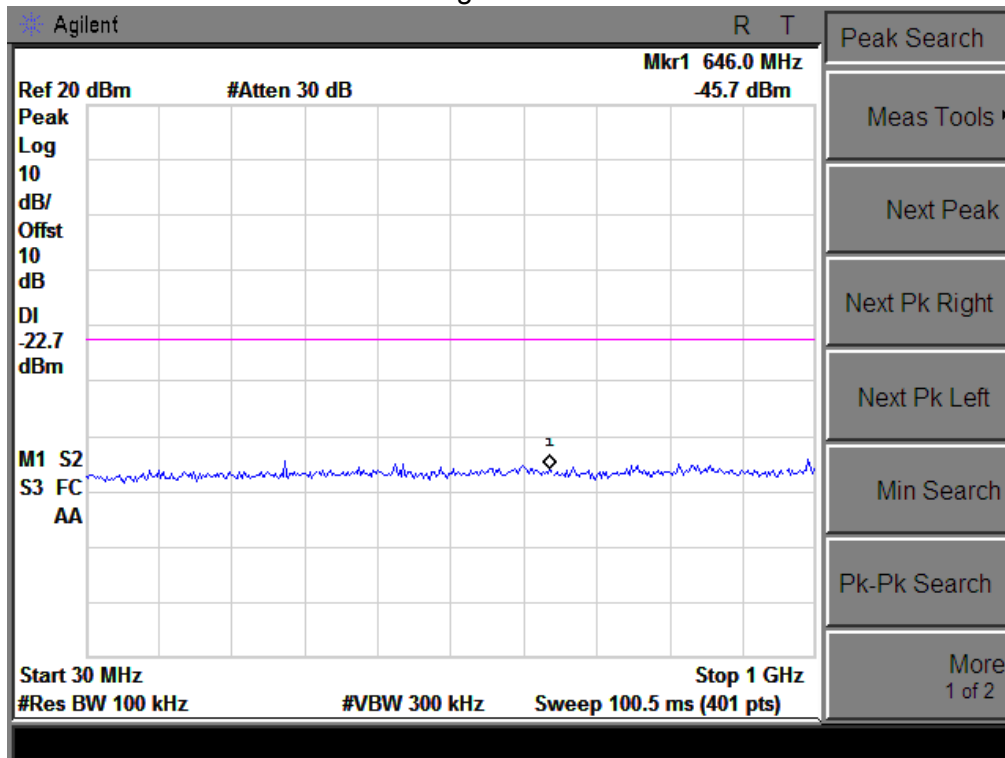



### 802.11g Middle Channel

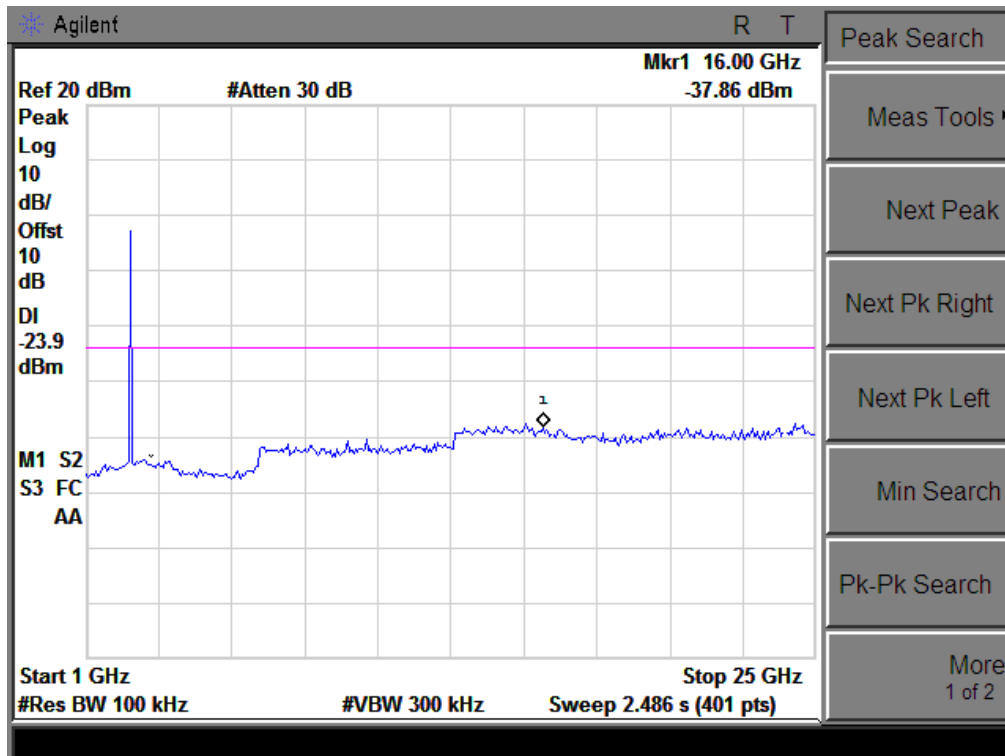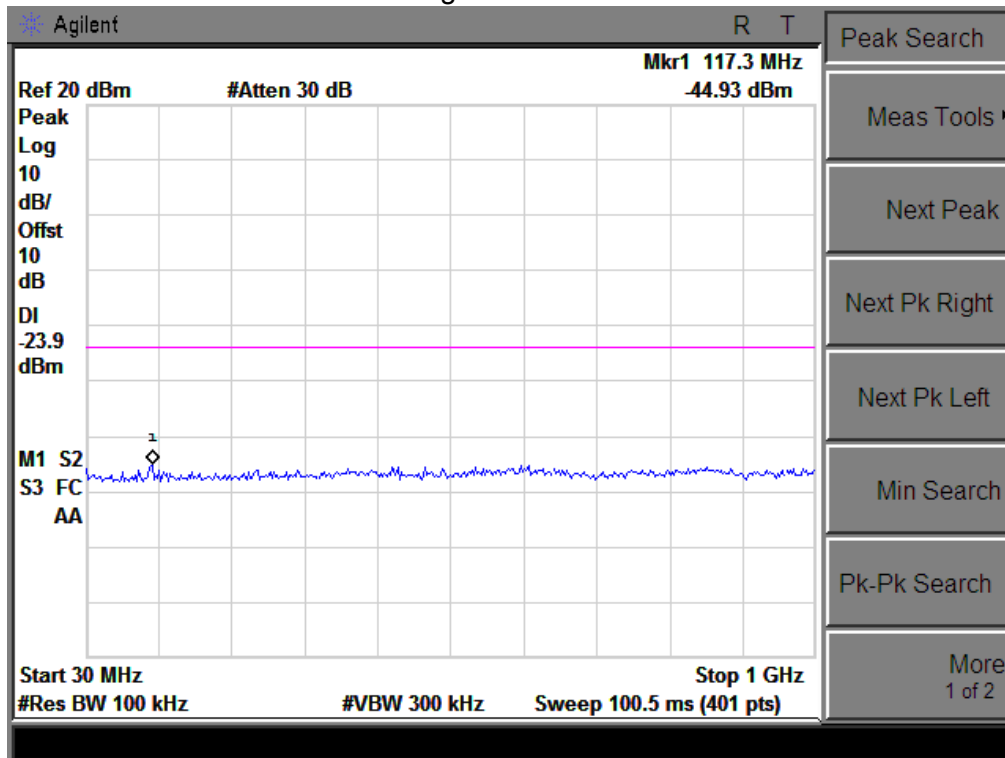

### 802.11g High Channel

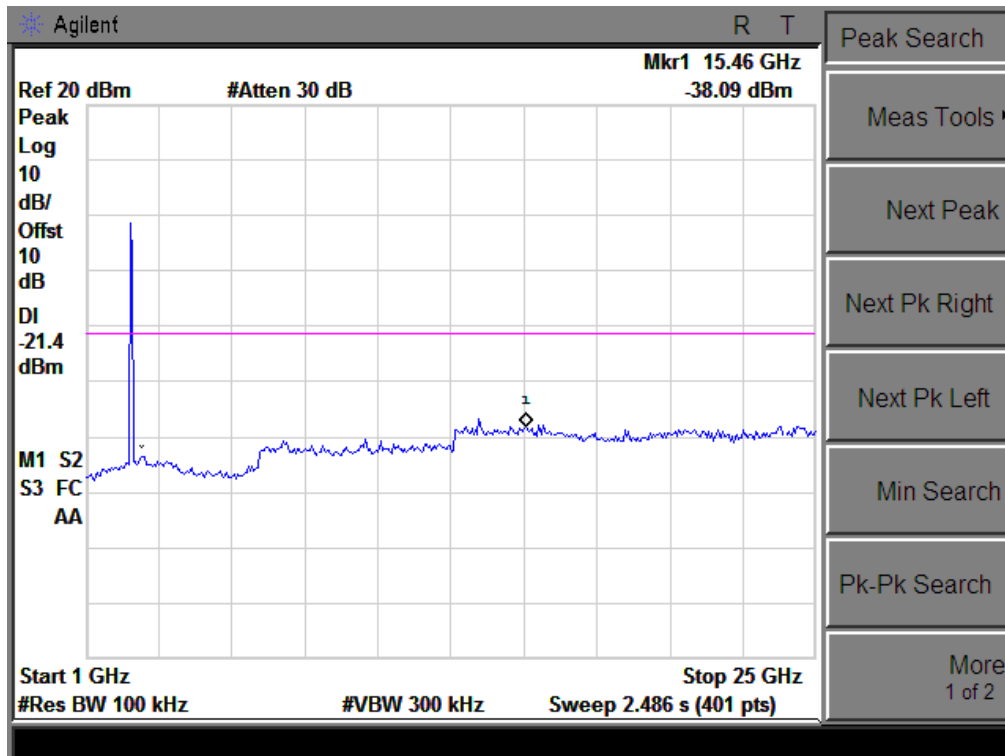
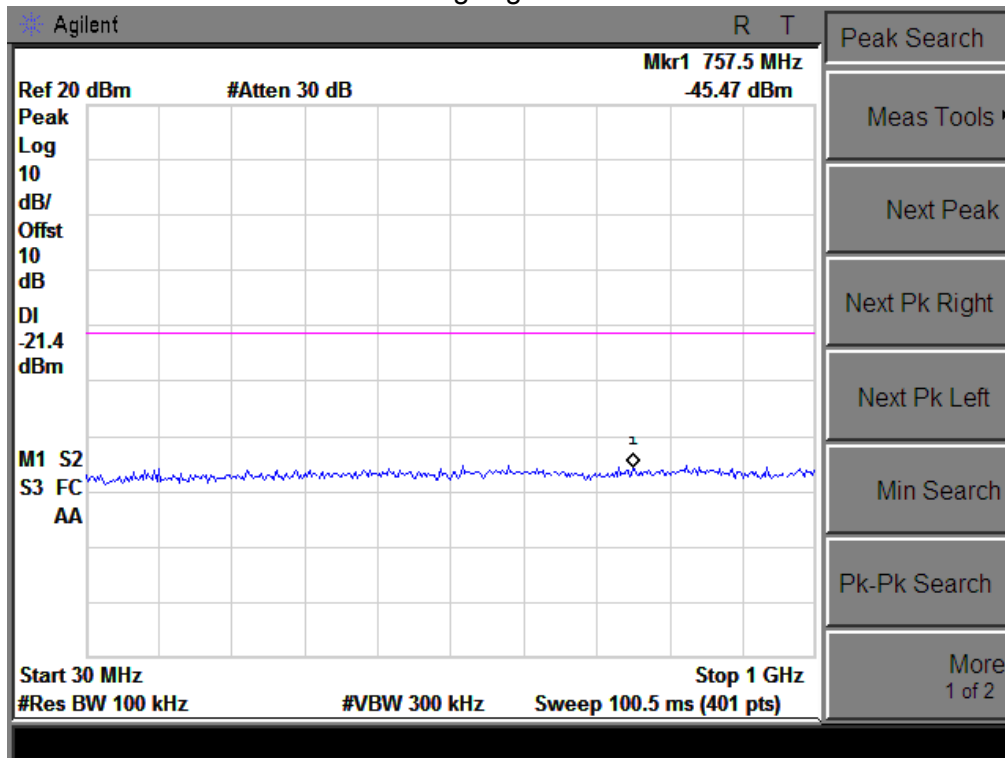


802.11n-HT20 Low Channel

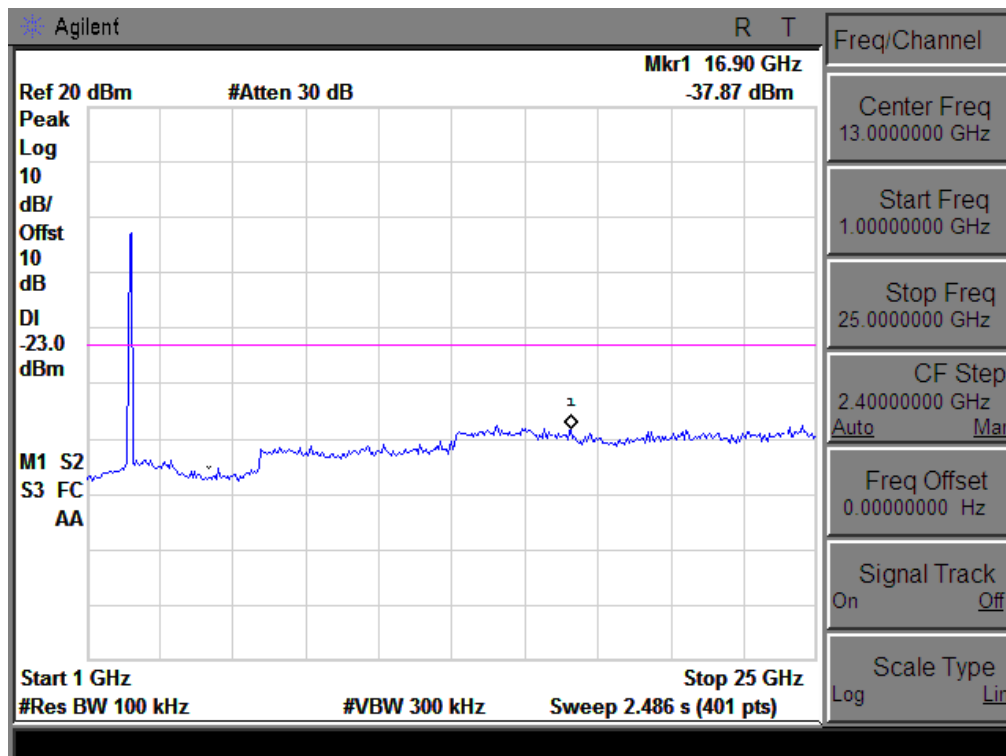
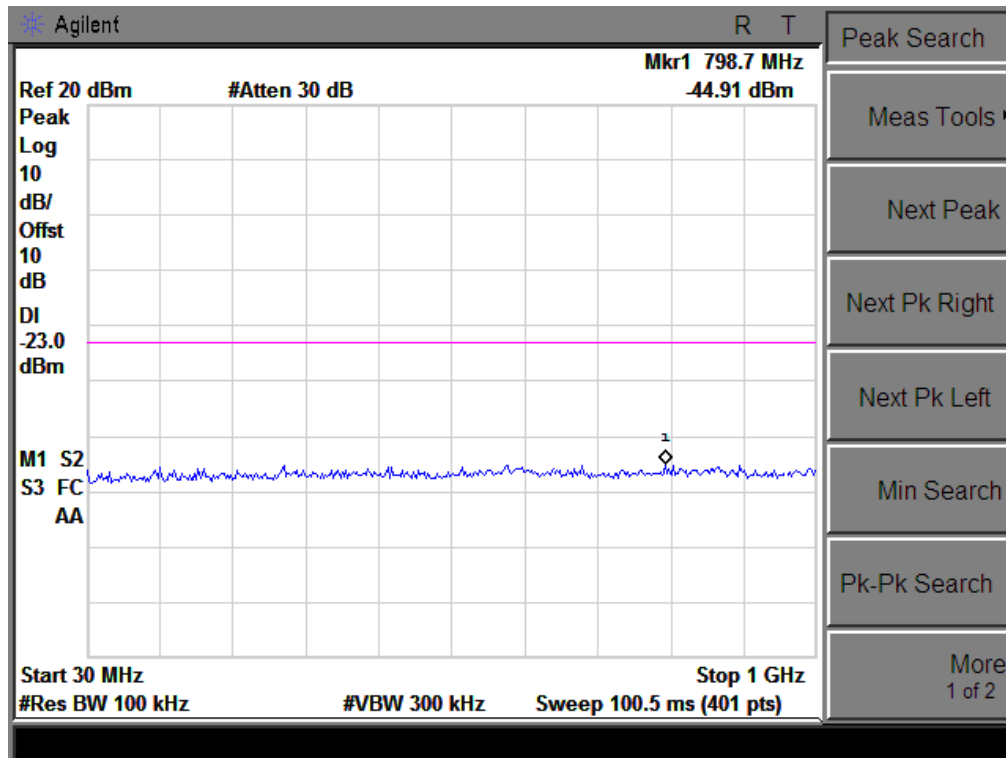






802.11n-HT20 Middle Channel

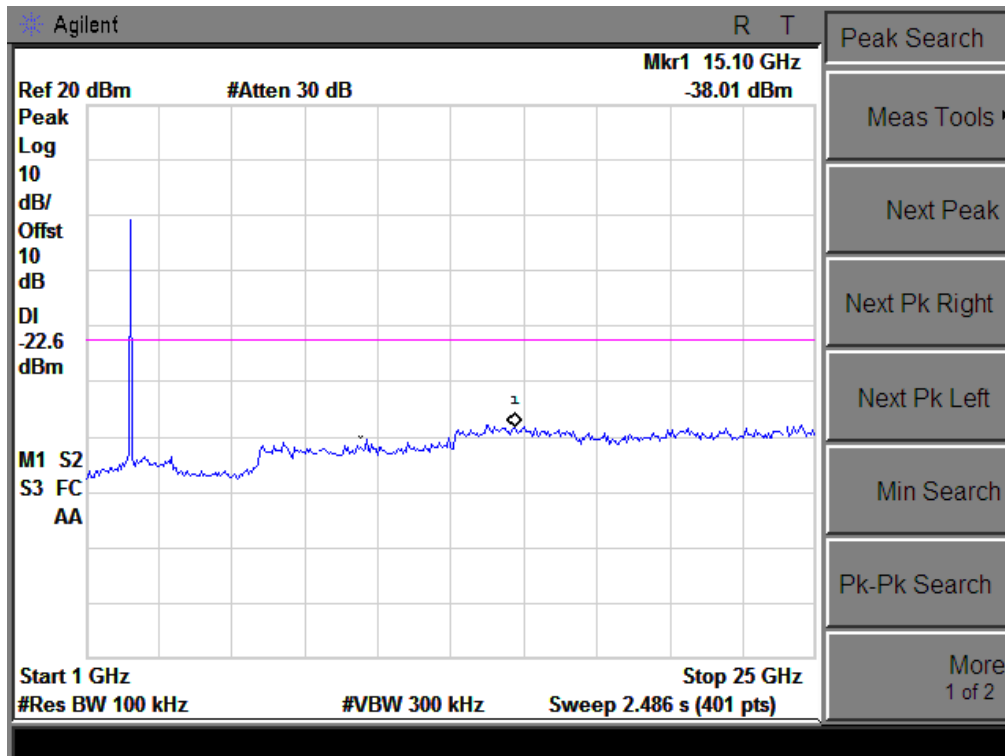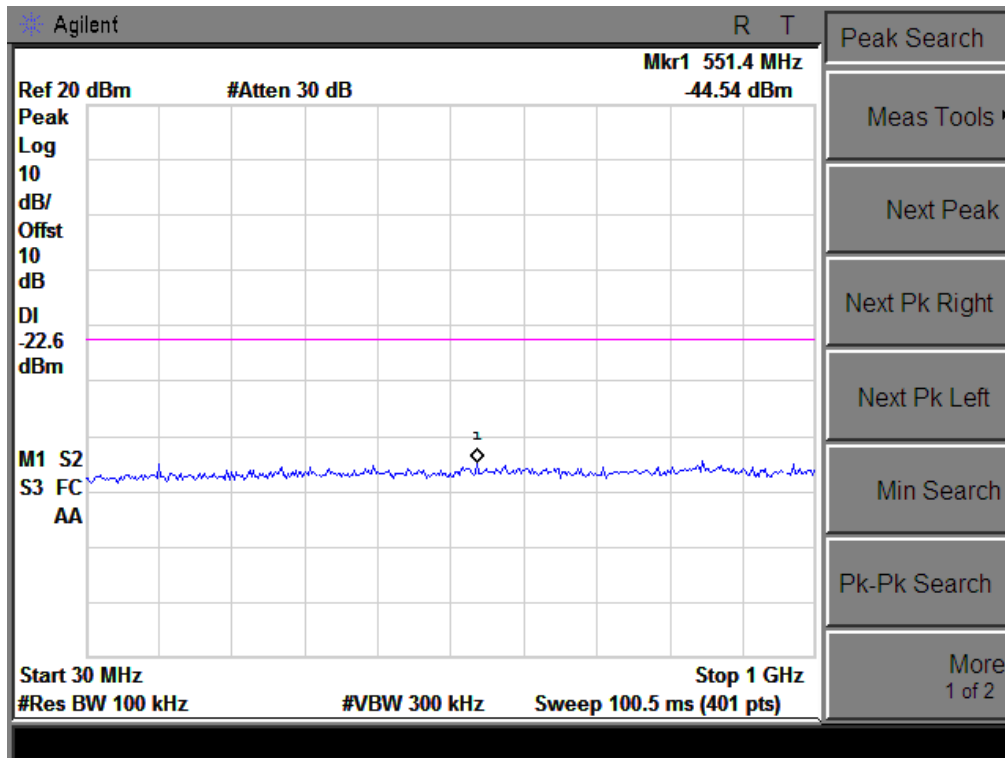



802.11n-HT20 High Channel

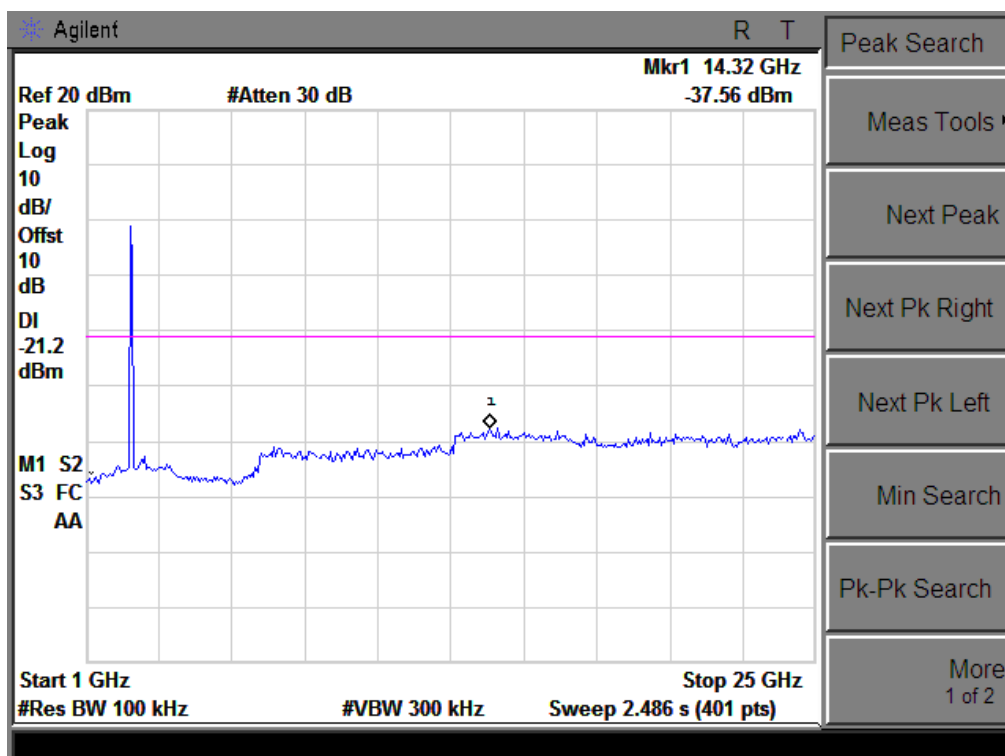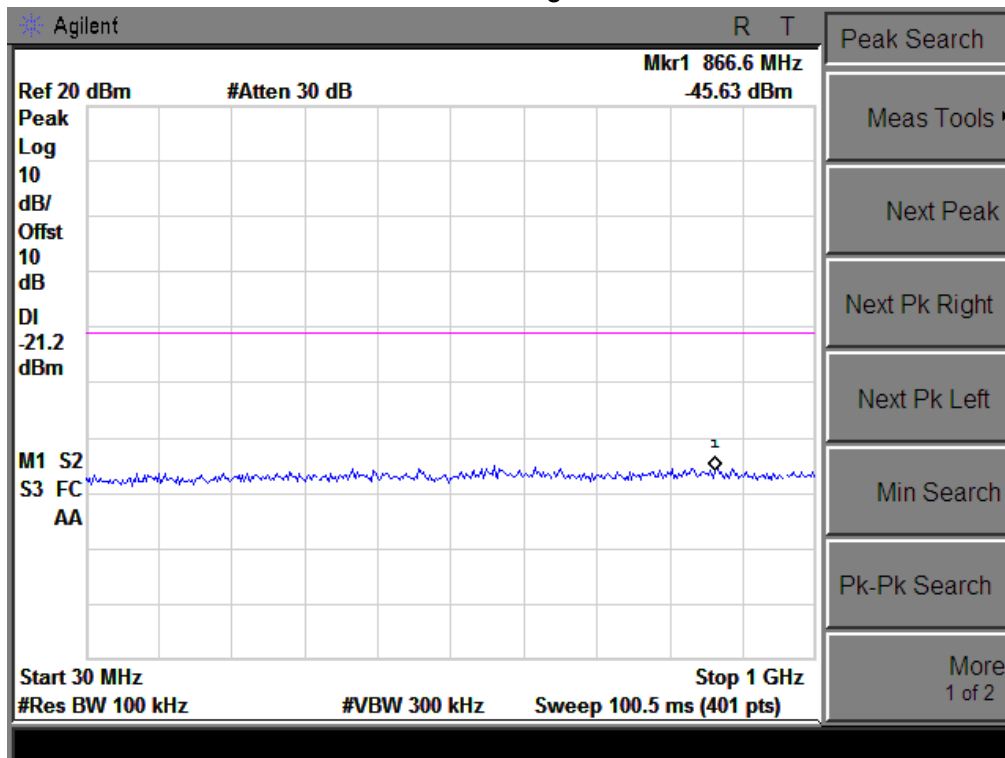



802.11n-HT40 Low Channel

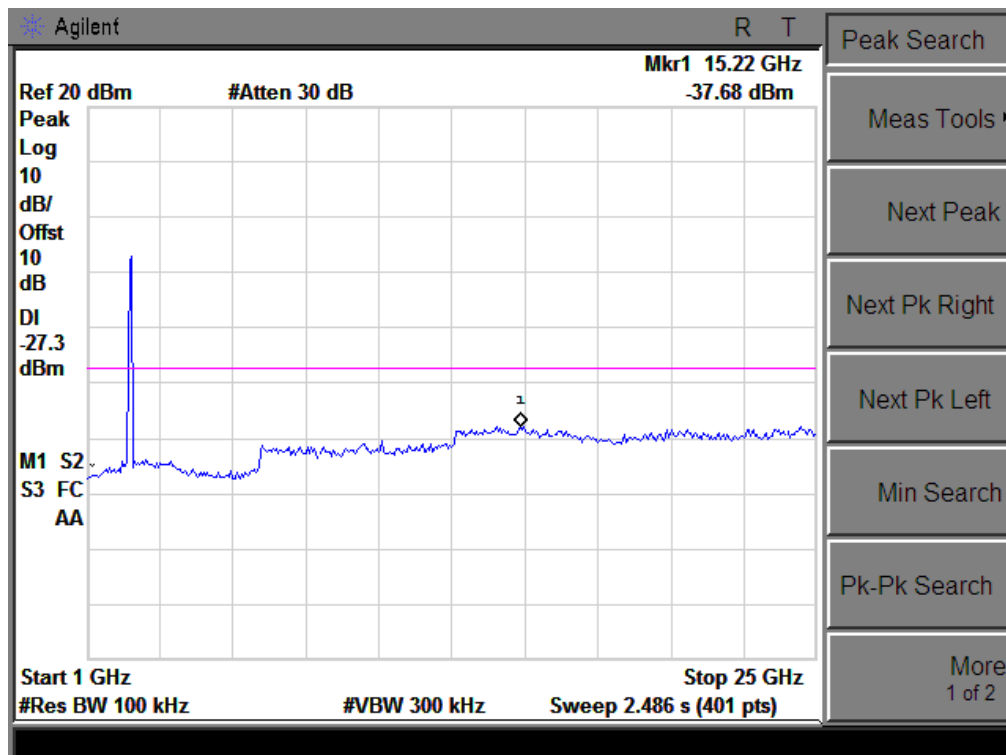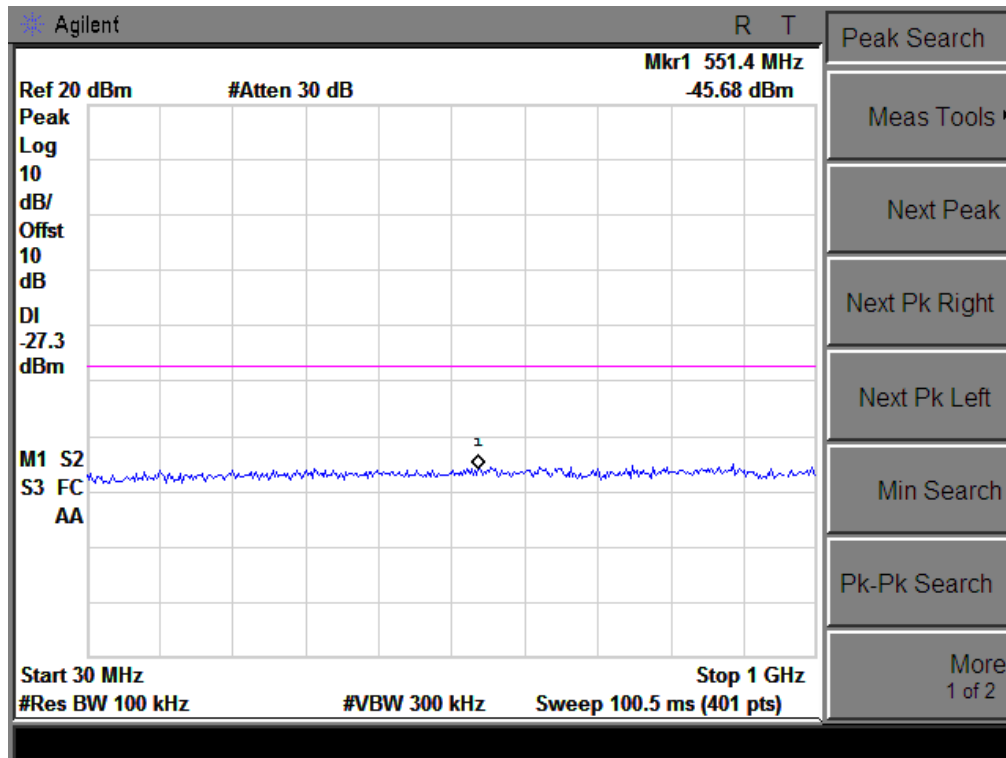

802.11n-HT40 Middle Channel

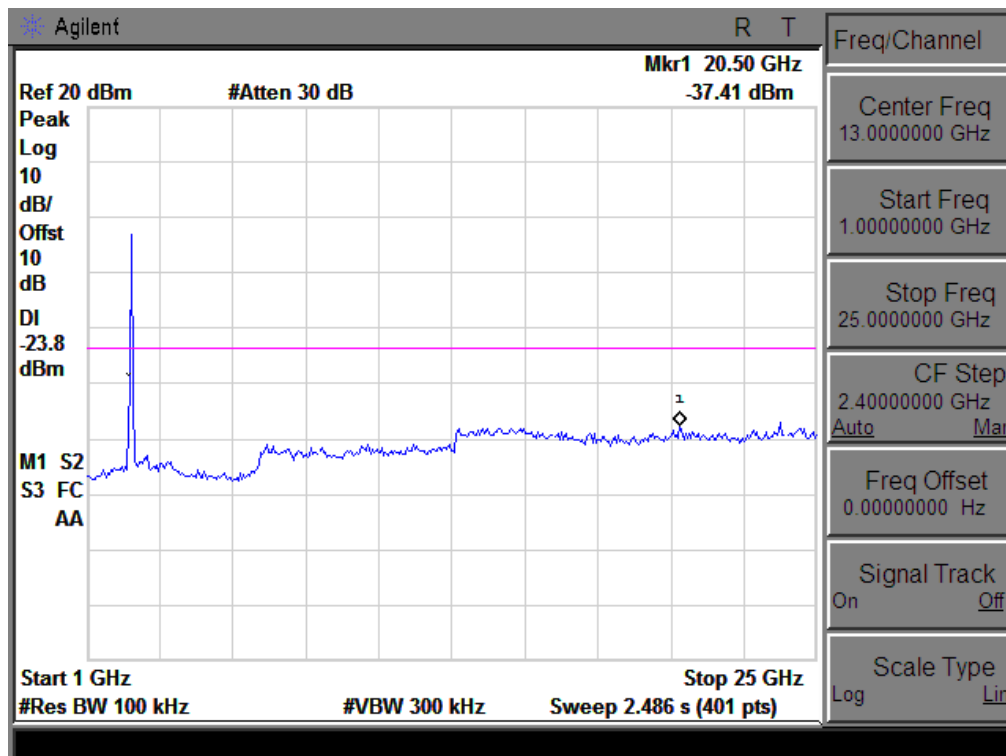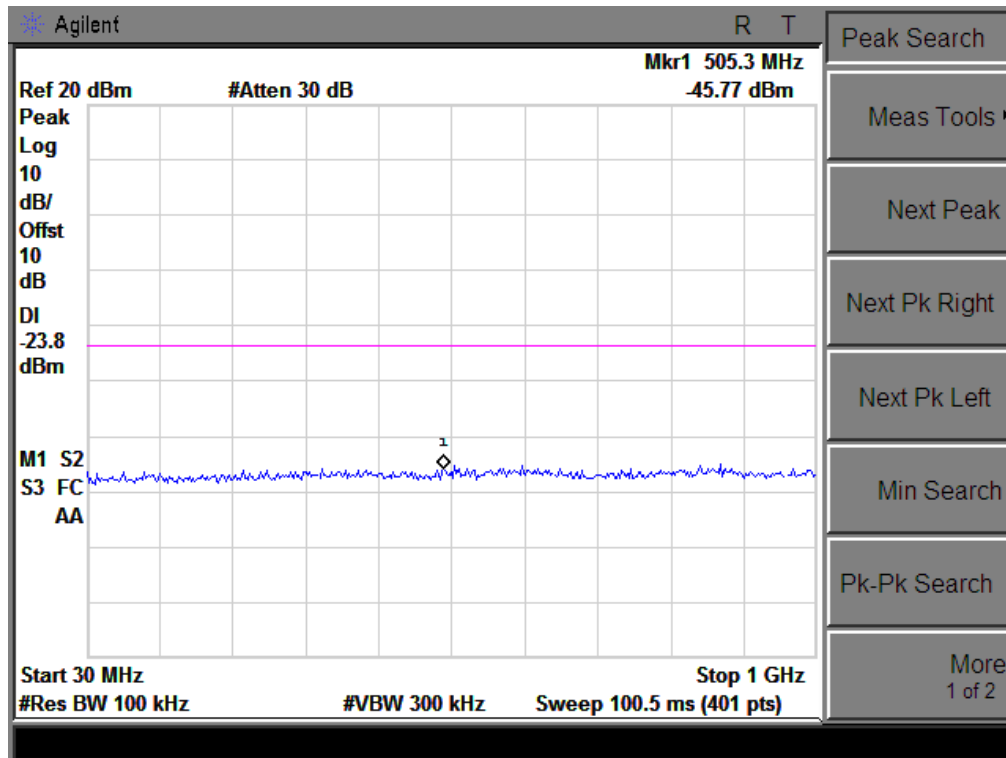

802.11n-HT40 High Channel

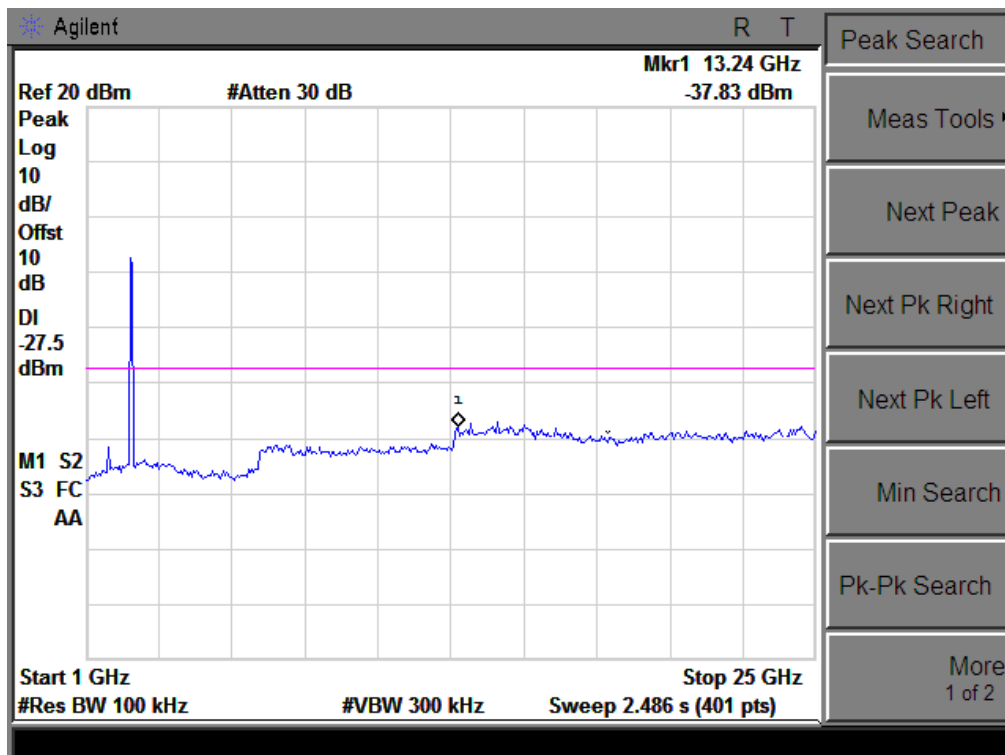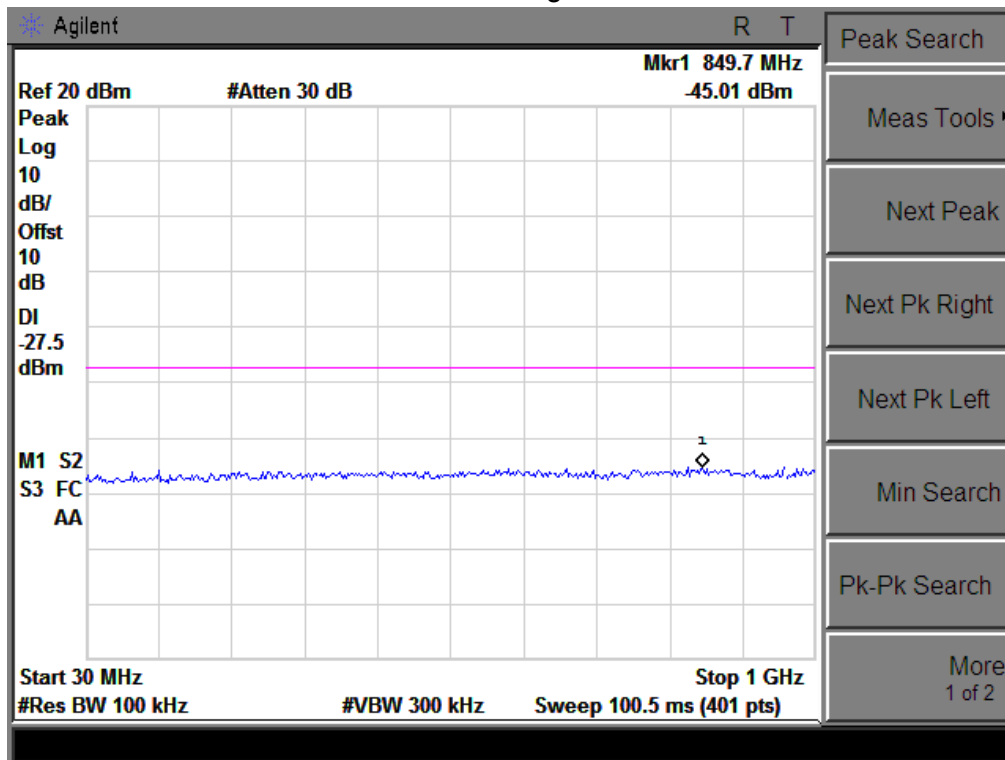

#### 4. POWER SPECTRAL DENSITY TEST

##### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


##### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz ≤ Set the RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP

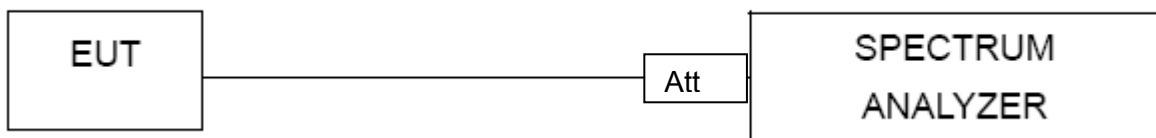


##### 4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

### 4.1.5 TEST RESULTS

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-12.40	8	PASS
2437 MHz	-11.92	8	PASS
2462 MHz	-9.988	8	PASS

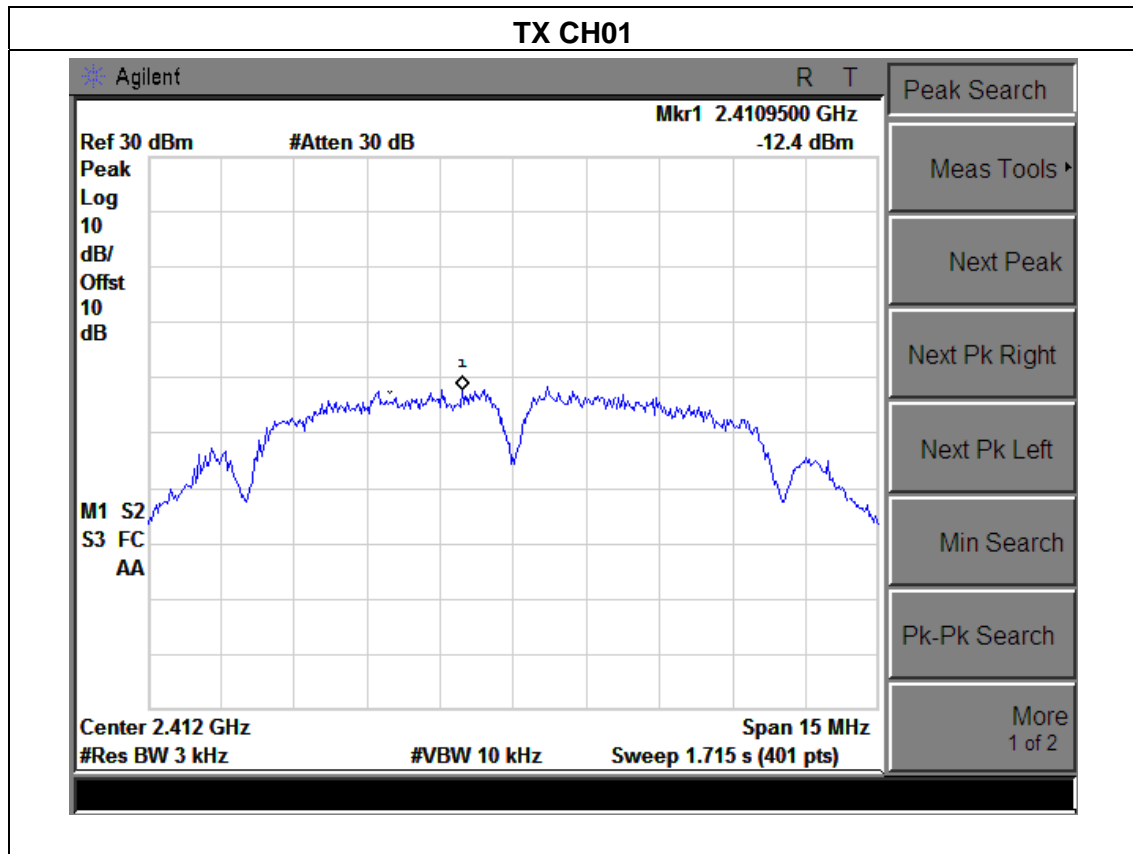


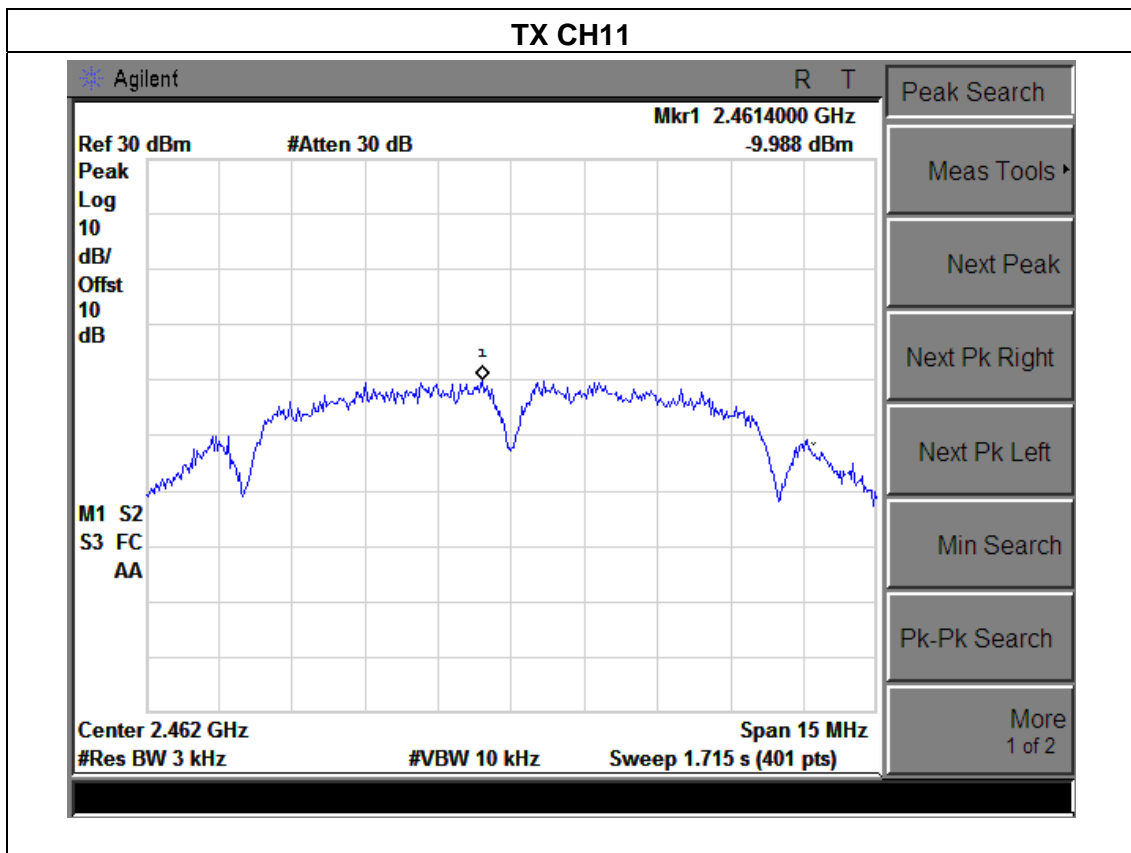
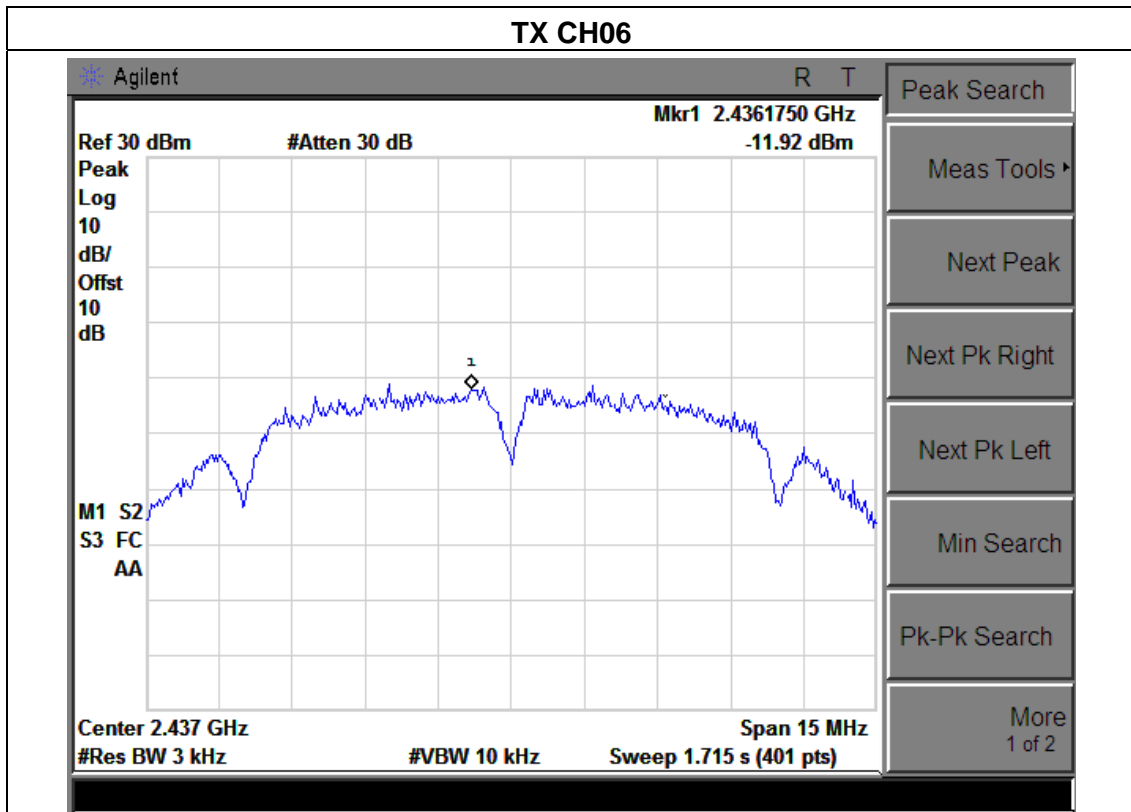




EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.36	8	PASS
2437 MHz	-13.96	8	PASS
2462 MHz	-14.26	8	PASS


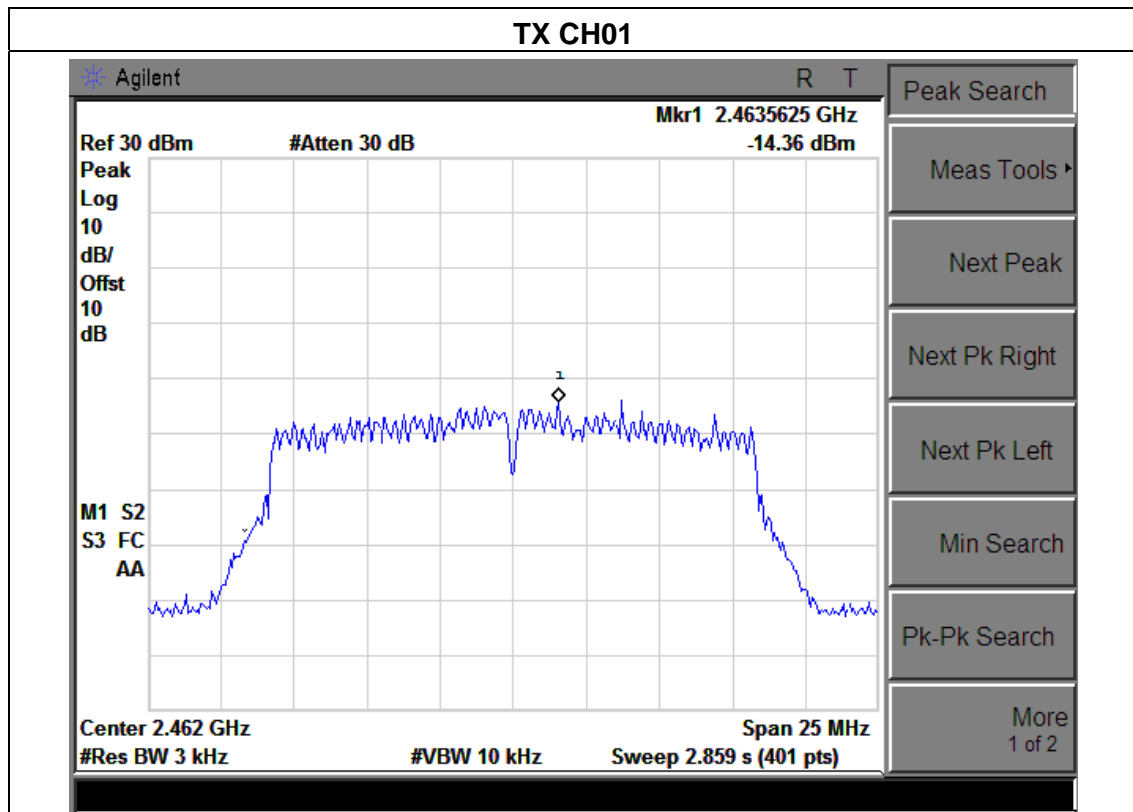


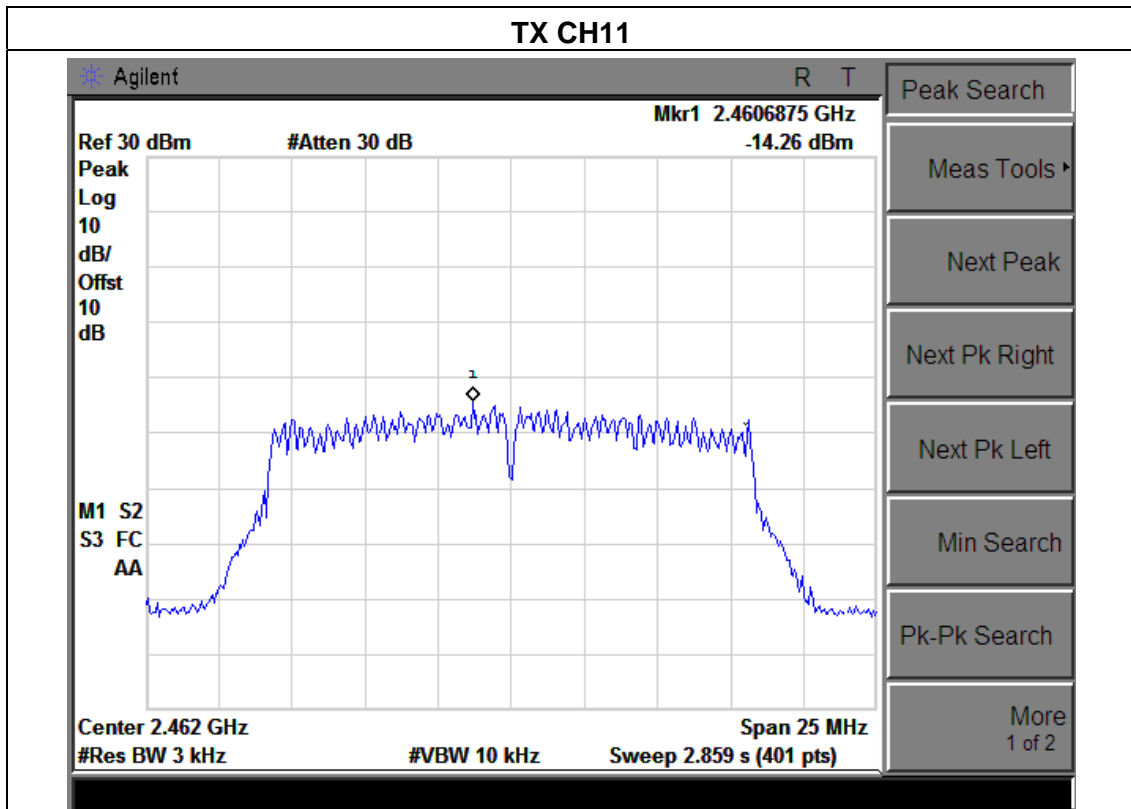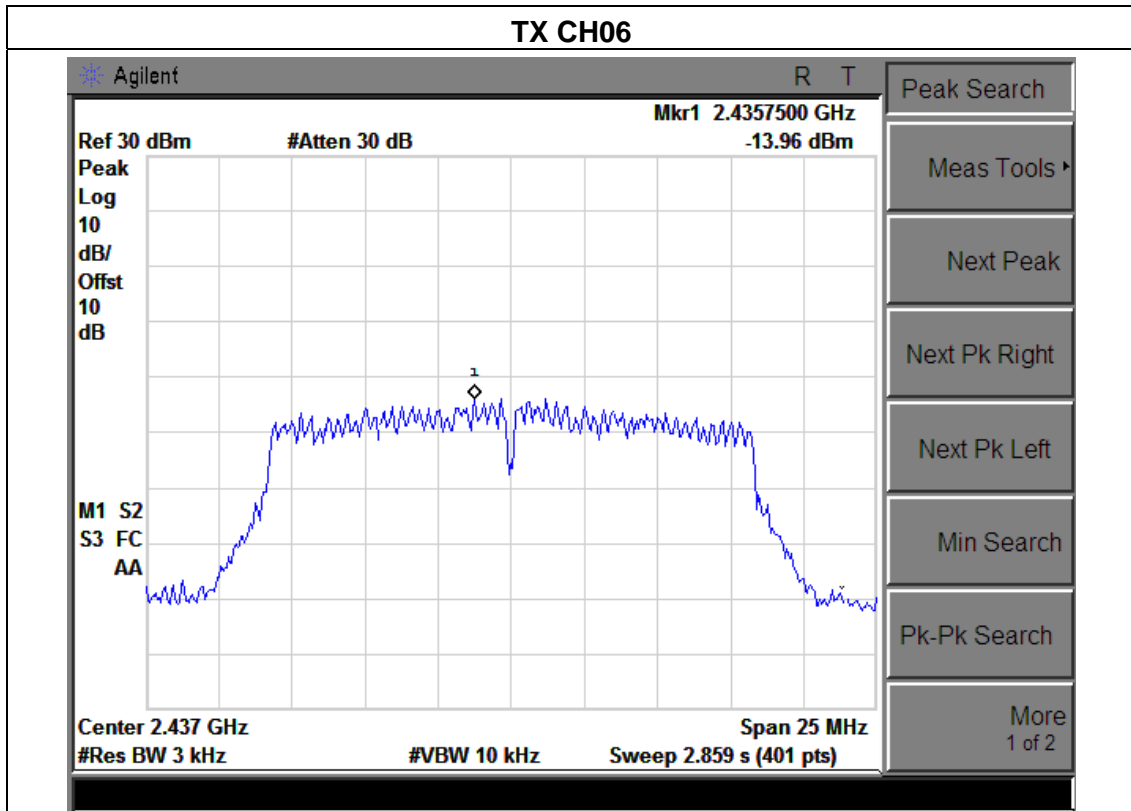

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-15.72	8	PASS
2437 MHz	-13.53	8	PASS
2462 MHz	-15.25	8	PASS


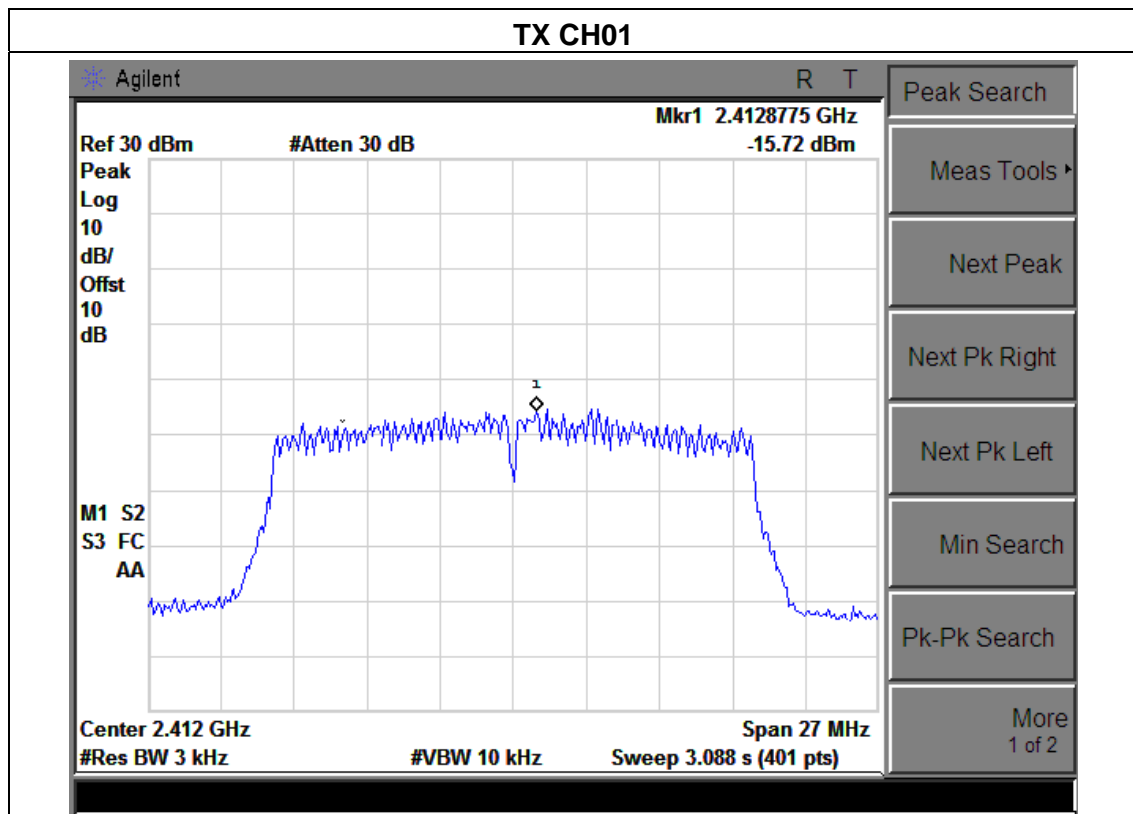


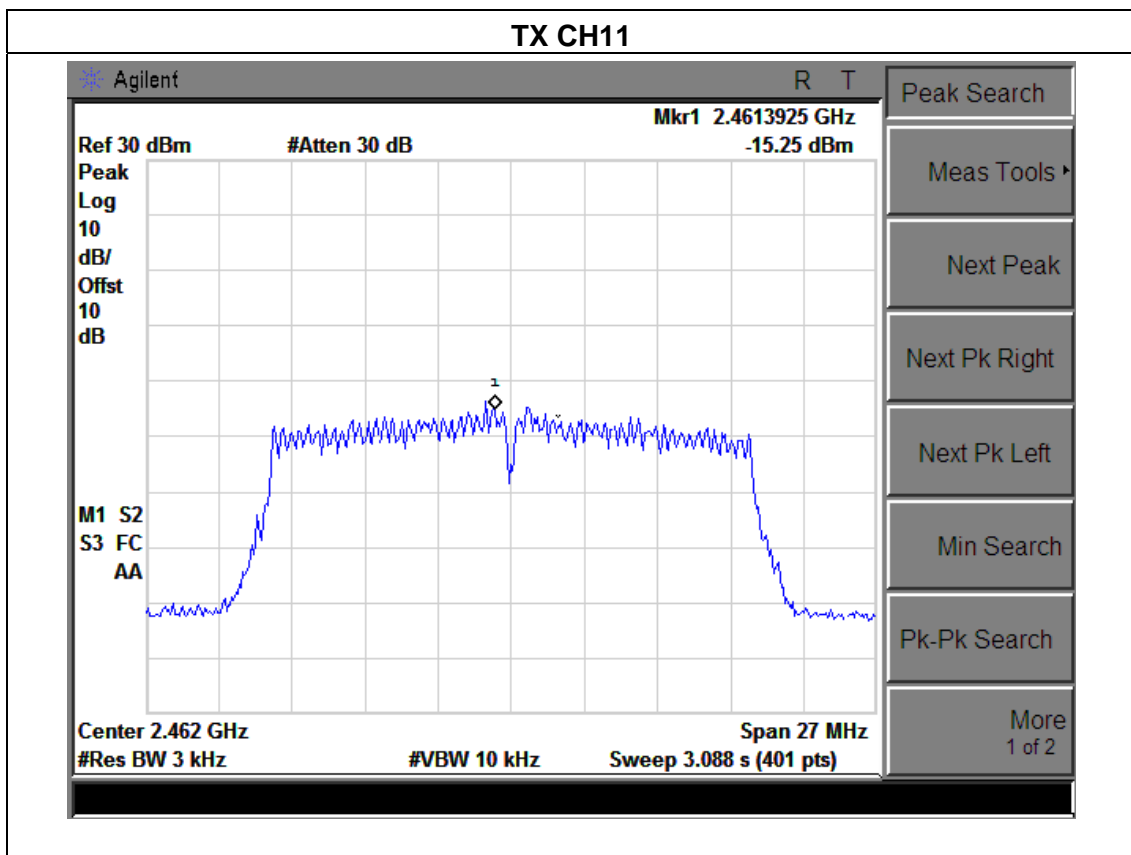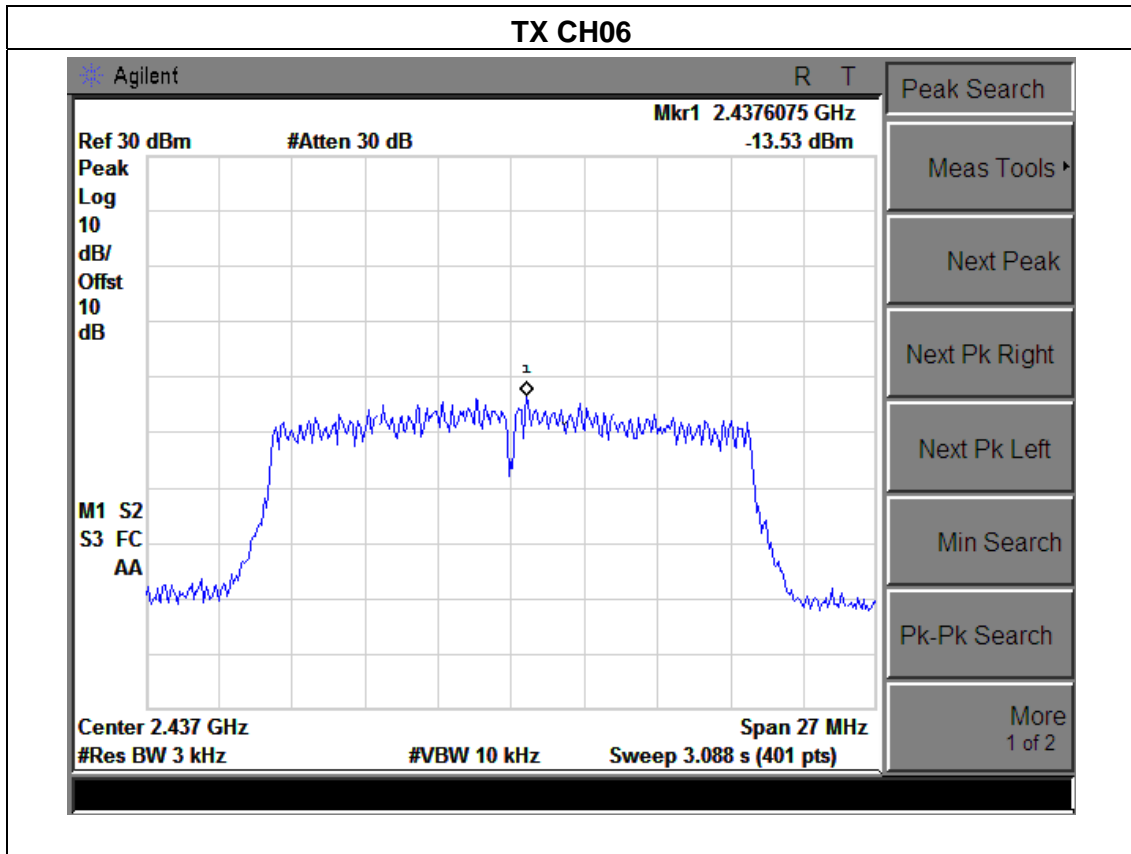

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-21.31	8	PASS
2437 MHz	-18.25	8	PASS
2452 MHz	-21.55	8	PASS

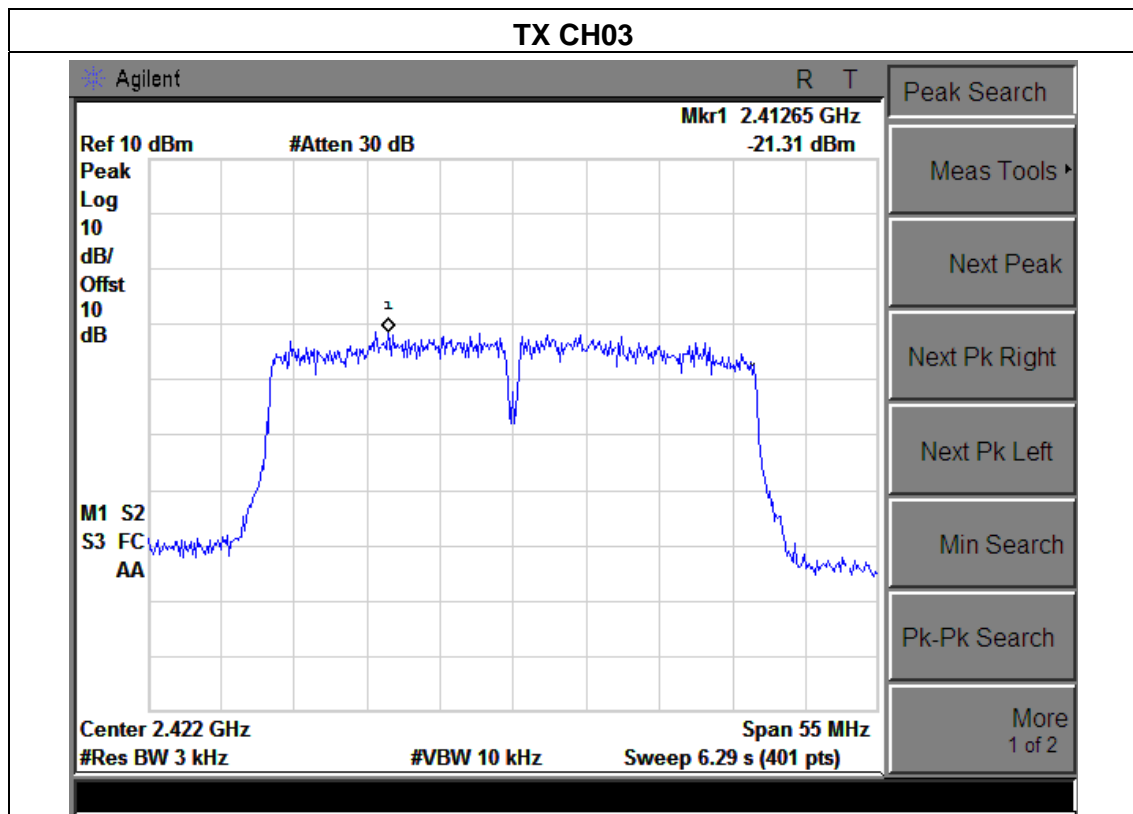

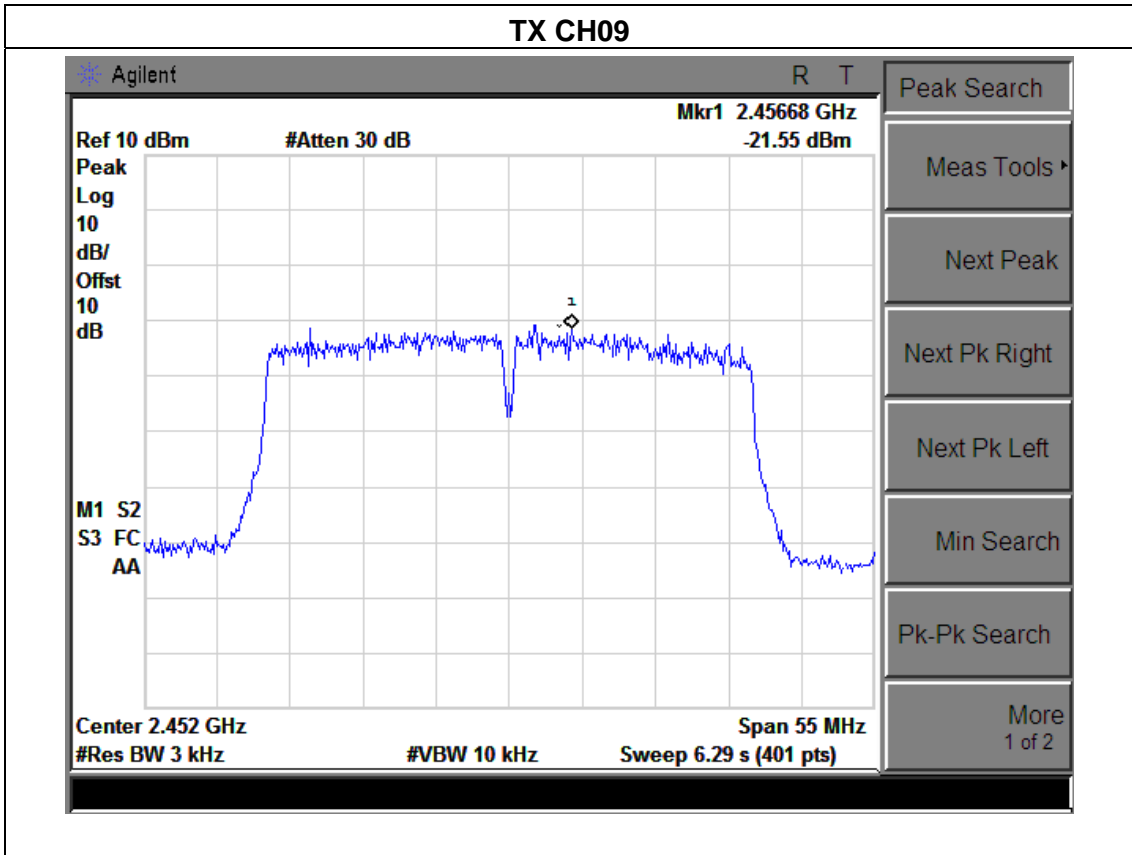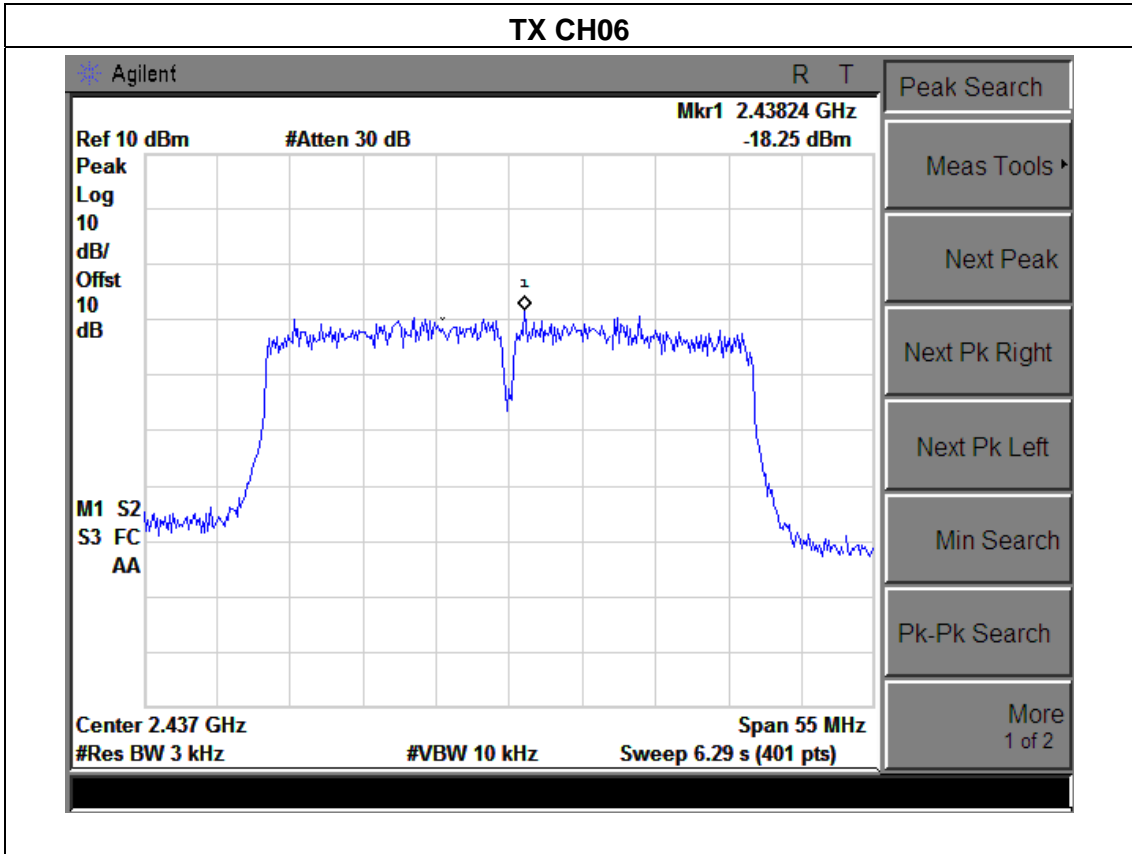

## 5. BANDWIDTH TEST


### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### TEST SETUP

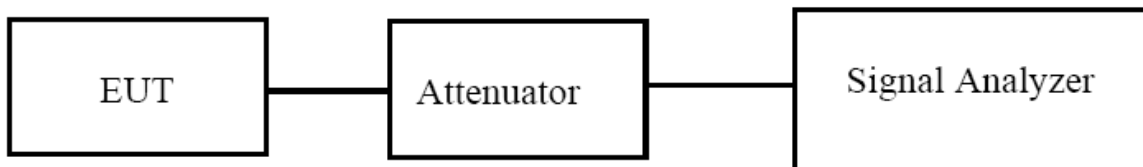


#### 5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.3 TEST RESULTS

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.119	500	Pass
Middle	2437	10.103	500	Pass
High	2462	10.133	500	Pass

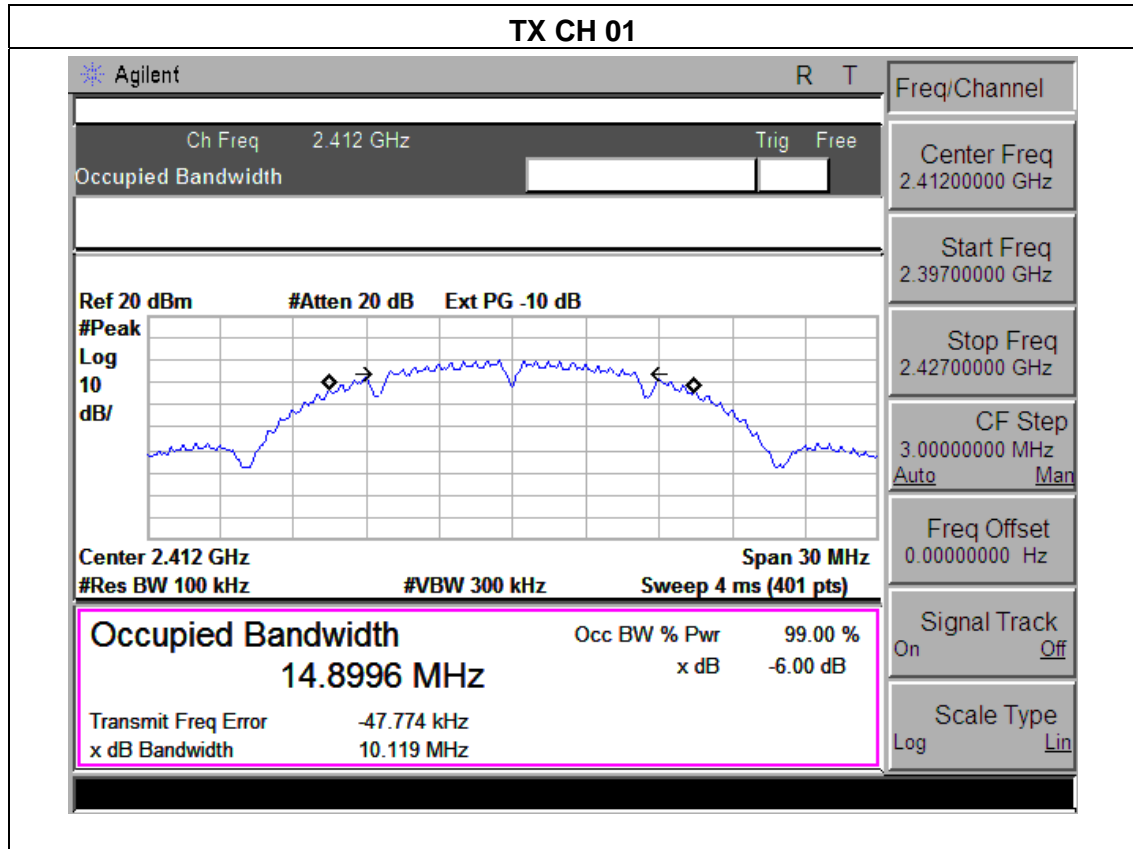



### TX CH 06


Agilent		R	T	Freq/Channel	
Ch Freq 2.437 GHz		Trig Free		Center Freq 2.43700000 GHz	
Occupied Bandwidth				Start Freq 2.42200000 GHz	
Ref 20 dBm #Atten 20 dB Ext PG -10 dB				Stop Freq 2.45200000 GHz	
				CF Step 3.00000000 MHz Auto Man	
Center 2.437 GHz		Span 30 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Sweep 4 ms (401 pts)	
<b>Occupied Bandwidth</b> <b>14.8735 MHz</b>		Occ BW % Pwr 99.00 %		Signal Track On Off	
		x dB -6.00 dB		Scale Type Log Lin	
Transmit Freq Error -59.397 kHz					
x dB Bandwidth 10.103 MHz					

### TX CH 11

Agilent		R	T	Freq/Channel	
Ch Freq 2.462 GHz		Trig Free		Center Freq 2.46200000 GHz	
Occupied Bandwidth				Start Freq 2.44700000 GHz	
Ref 20 dBm #Atten 20 dB Ext PG -10 dB				Stop Freq 2.47700000 GHz	
				CF Step 3.00000000 MHz Auto Man	
Center 2.462 GHz		Span 30 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Sweep 4 ms (401 pts)	
<b>Occupied Bandwidth</b> <b>14.8495 MHz</b>		Occ BW % Pwr 99.00 %		Signal Track On Off	
		x dB -6.00 dB		Scale Type Log Lin	
Transmit Freq Error -78.843 kHz					
x dB Bandwidth 10.133 MHz					

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.495	500	Pass
Middle	2437	16.517	500	Pass
High	2462	16.495	500	Pass

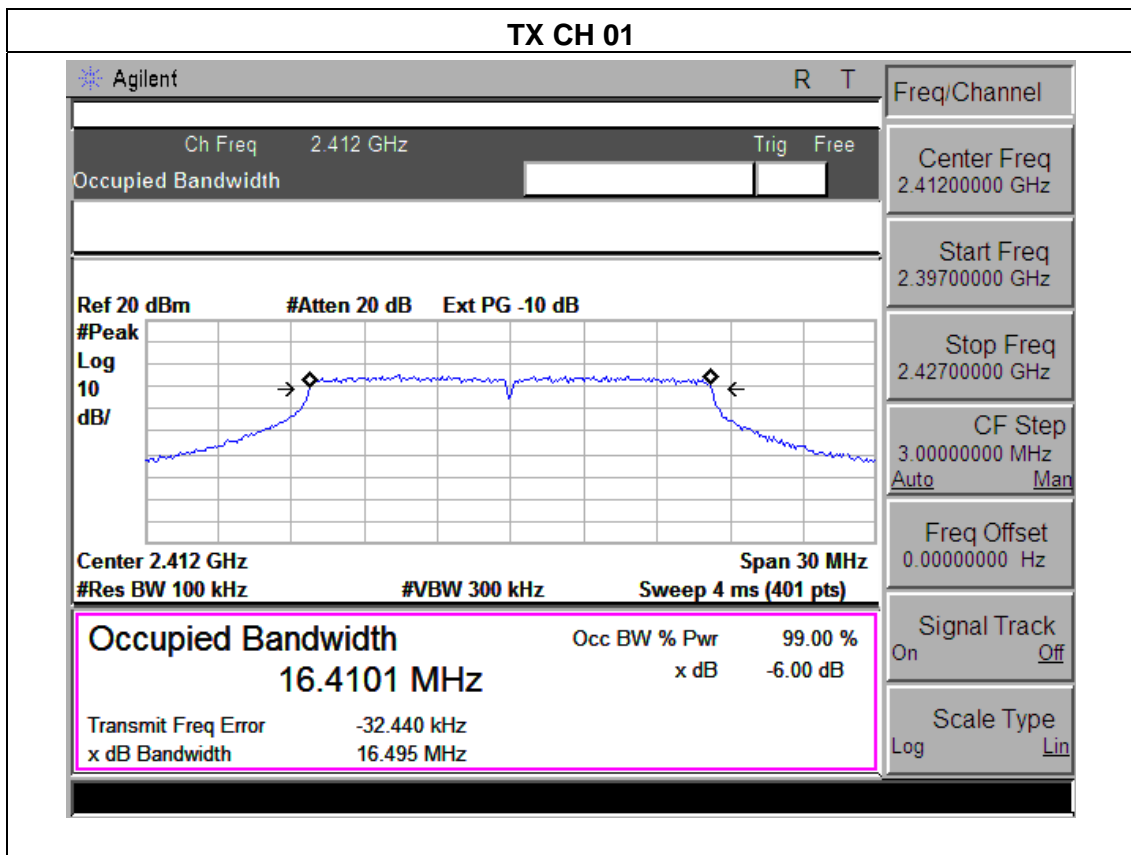

### TX CH 06

Agilent
R T

---

Ch Freq 2.437 GHz
Trig Free

---

Ref 20 dBm
#Atten 20 dB
Ext PG -10 dB

#Peak  
Log  
10  
dB/

Freq/Channel

Center Freq  
2.43700000 GHz

Start Freq  
2.42200000 GHz

Stop Freq  
2.45200000 GHz

CF Step  
3.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Scale Type  
Log Lin

---

Center 2.437 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>16.4266 MHz</b>	x dB	-6.00 dB
Transmit Freq Error	-43.927 kHz	
x dB Bandwidth	16.517 MHz	

### TX CH 11

Agilent
R T

---

Ch Freq 2.462 GHz
Trig Free

---

Ref 20 dBm
#Atten 20 dB
Ext PG -10 dB

#Peak  
Log  
10  
dB/

Freq/Channel

Center Freq  
2.46200000 GHz

Start Freq  
2.44700000 GHz

Stop Freq  
2.47700000 GHz

CF Step  
3.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Scale Type  
Log Lin

---


Center 2.462 GHz
Span 30 MHz



#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>16.4196 MHz</b>	x dB	-6.00 dB
Transmit Freq Error	-40.520 kHz	
x dB Bandwidth	16.495 MHz	

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.715	500	Pass
Middle	2437	17.717	500	Pass
High	2462	17.701	500	Pass


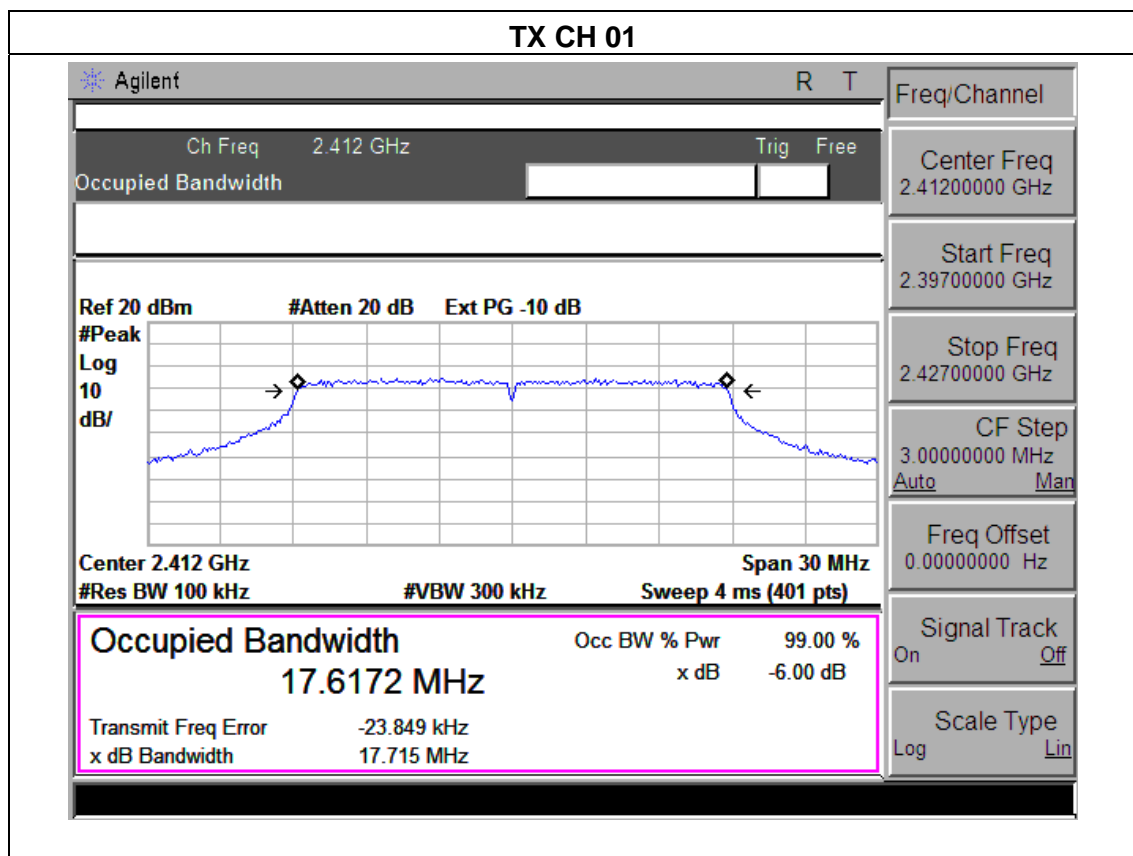


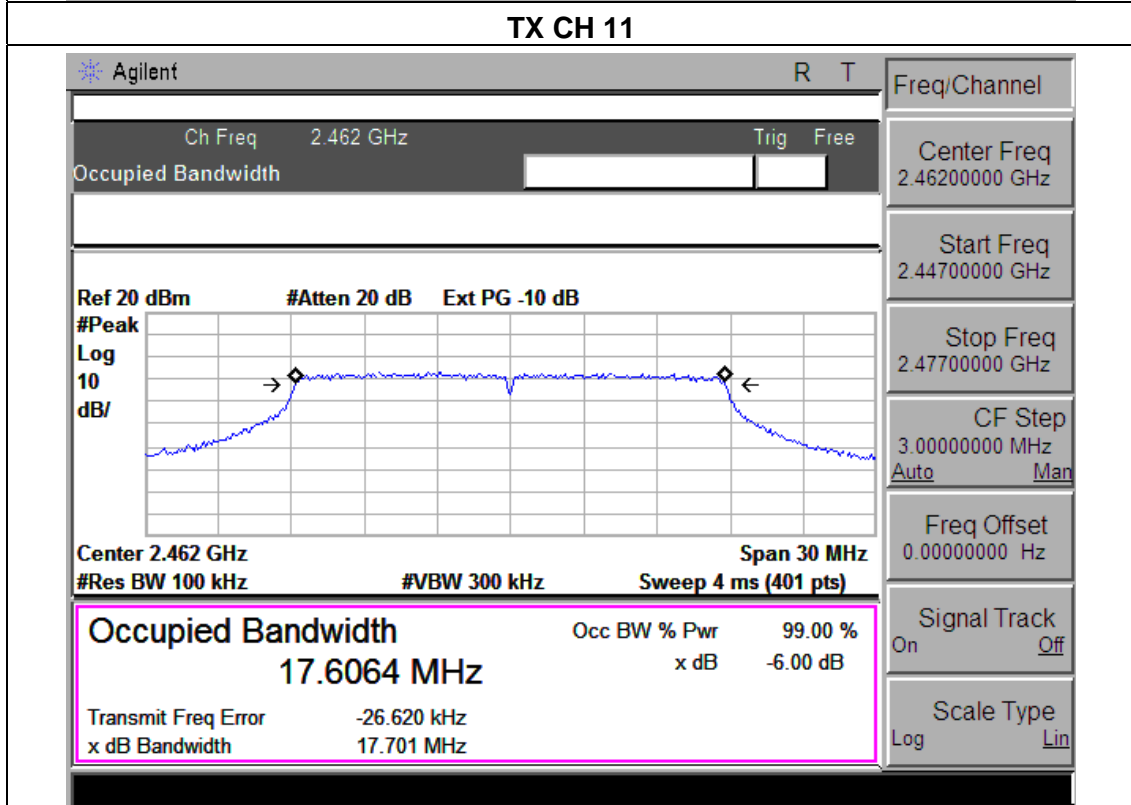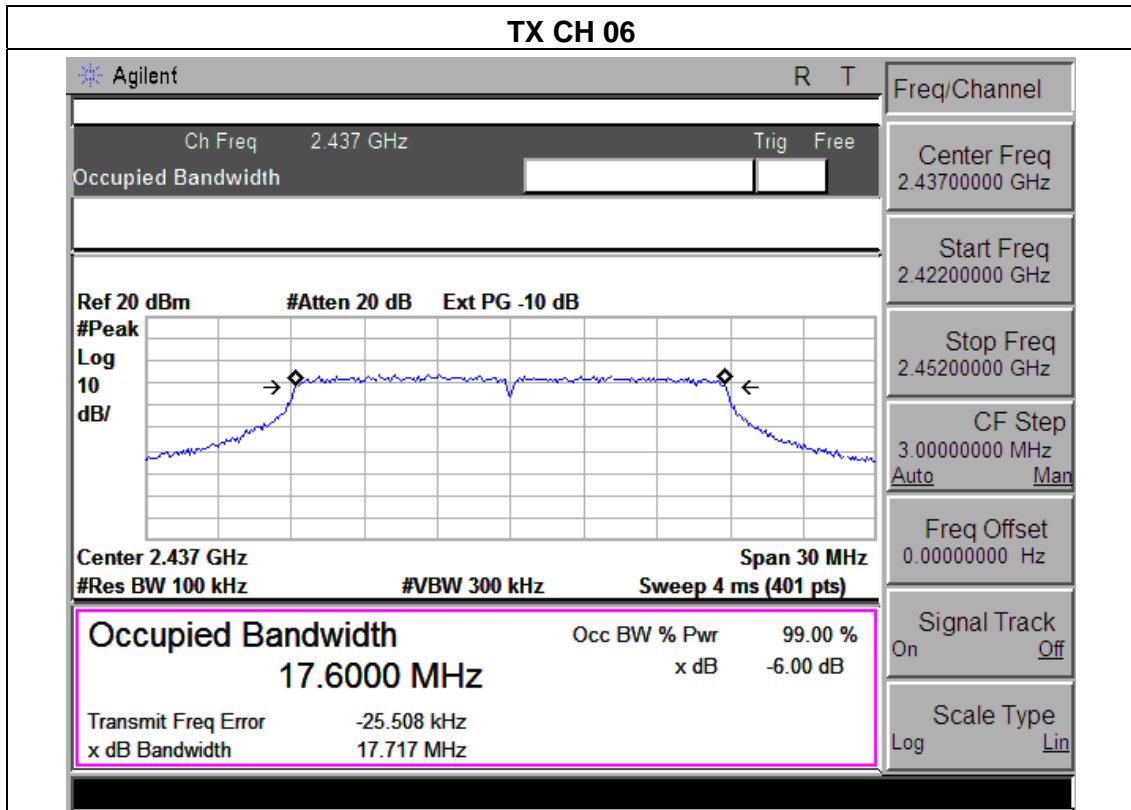

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2452	37.623	500	Pass
Middle	2437	37.619	500	Pass
High	2452	37.643	500	Pass

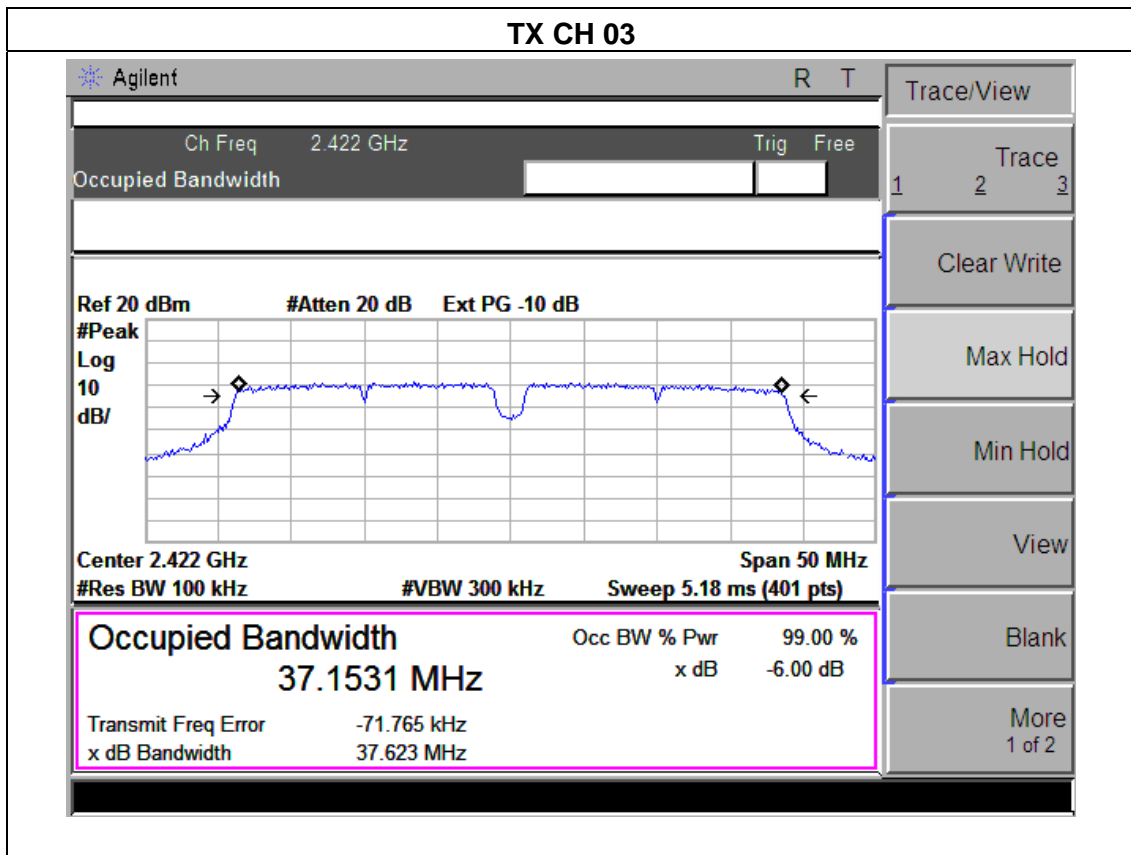

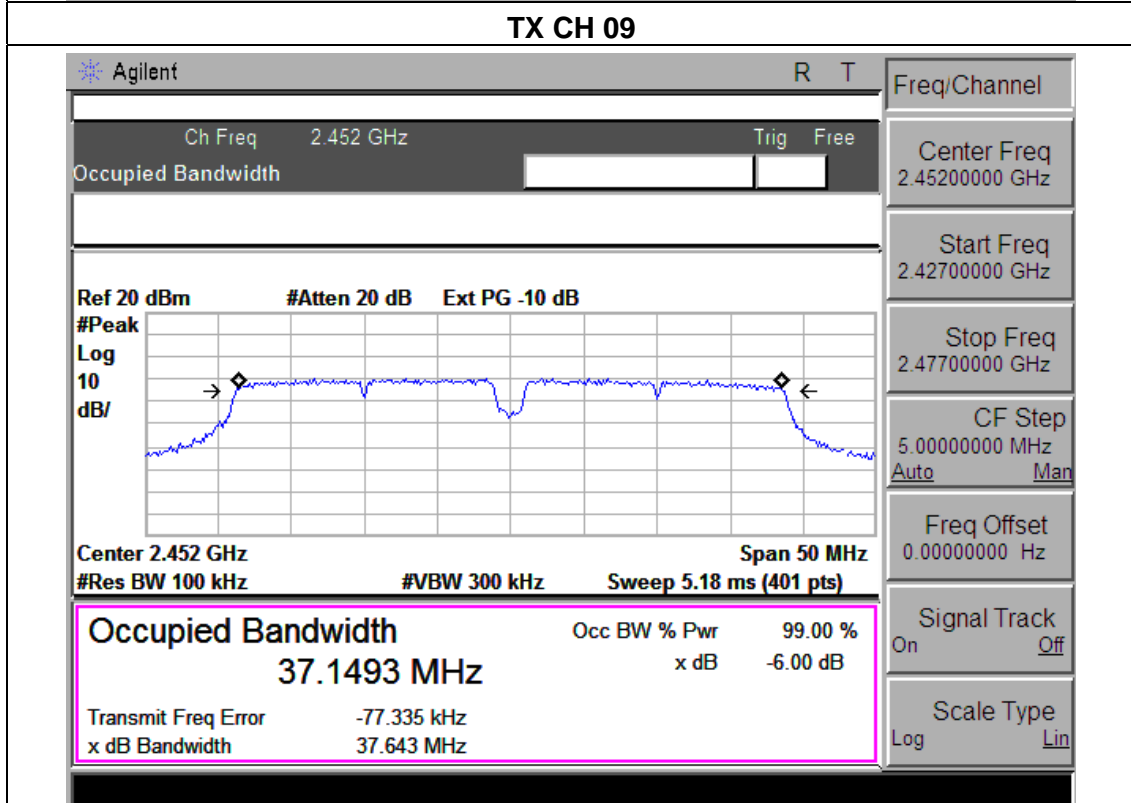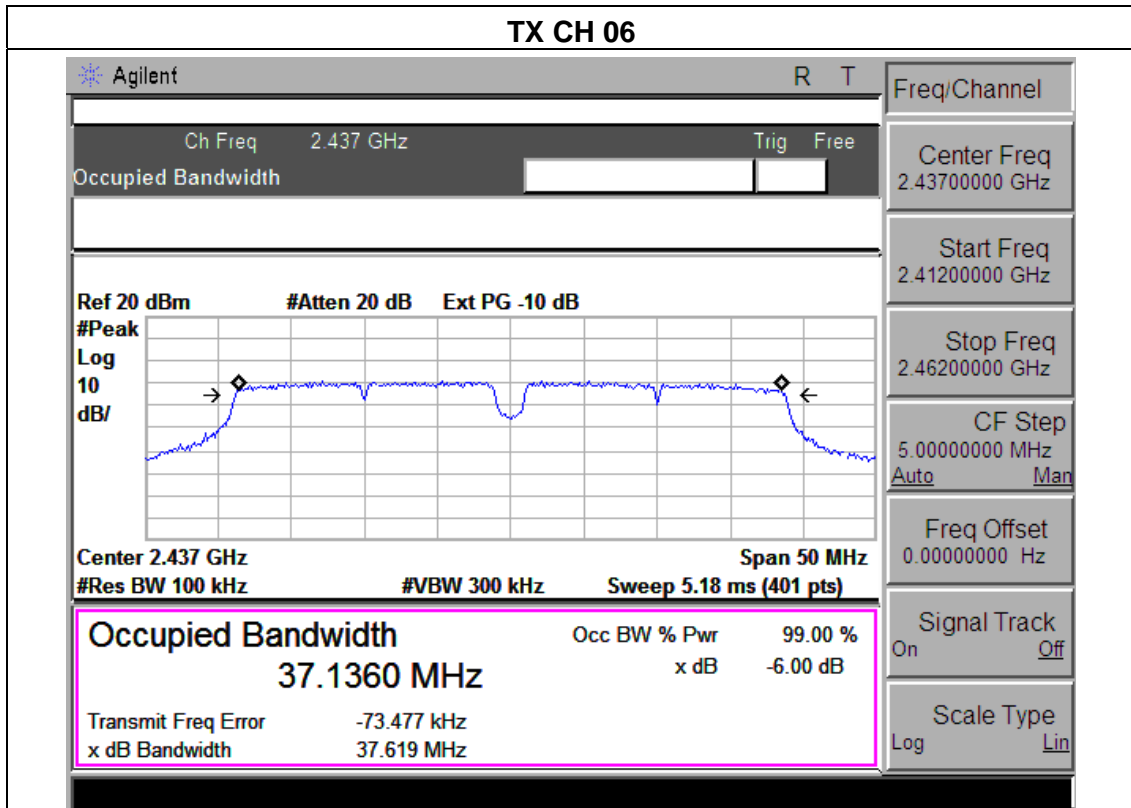

**6. PEAK OUTPUT POWER TEST**

**6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


**6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the Power meter

**6.1.2 DEVIATION FROM STANDARD**

No deviation.

**6.1.3 TEST SETUP**

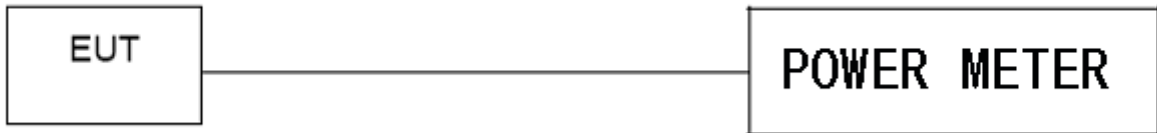

**6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



**6.1.5 TEST RESULTS**

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g/n20/n40 Mode		

<b>TX 802.11b Mode</b>				
Test Channel	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(MHz)	(dBm)	(dBm)	(dBm)
CH01	2412	12.56	9.52	30
CH06	2437	12.63	9.62	30
CH11	2462	12.49	9.44	30
<b>TX 802.11g Mode</b>				
CH01	2412	11.53	8.92	30
CH06	2437	11.56	8.96	30
CH11	2462	11.51	8.89	30
<b>TX 802.11n-HT20 Mode</b>				
CH01	2412	10.77	8.86	30
CH06	2437	10.85	8.88	30
CH11	2462	10.72	8.77	30
<b>TX 802.11n-HT40 Mode</b>				
CH03	2422	10.81	7.75	30
CH06	2437	10.85	7.82	30
CH09	2452	10.76	7.69	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

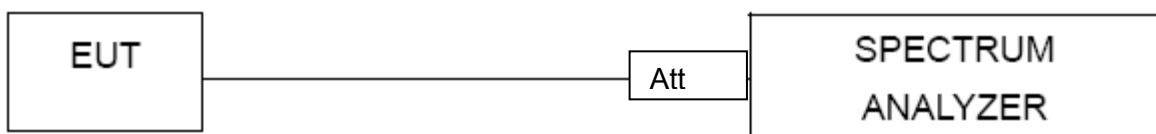

### 7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.4 TEST RESULTS

EUT :	MID	Model Name :	W7002
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b			
Left-band	37.68	20	Pass
Right-band	37.72	20	Pass
802.11g			
Left-band	34.30	20	Pass
Right-band	43.43	20	Pass
802.11n20			
Left-band	44.47	20	Pass
Right-band	37.94	20	Pass
802.11n40			
Left-band	38.08	20	Pass
Right-band	37.54	20	Pass

Radiated band edge:


Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
<b>802.11b</b>							
2390	56.03	-13.06	42.97	74	-31.03	peak	Vertical
2390	56.87	-13.06	43.81	74	-30.19	peak	Horizontal
2483.5	56.87	-12.78	44.09	74	-29.91	peak	Vertical
2483.5	50.41	-12.78	37.63	74	-36.37	peak	Horizontal
<b>802.11g</b>							
2390	56.08	-13.06	43.02	74	-30.98	peak	Vertical
2390	52.96	-13.06	39.9	74	-34.1	peak	Horizontal
2483.5	58.18	-12.78	45.4	74	-28.6	peak	Vertical
2483.5	58.86	-12.78	46.08	74	-27.92	peak	Horizontal
<b>802.11n</b>							
2390	59.61	-13.06	46.55	74	-27.45	peak	Vertical
2390	59.64	-13.06	46.58	74	-27.42	peak	Horizontal
2483.5	55.88	-12.78	43.1	74	-30.9	peak	Vertical
2483.5	53.18	-12.78	40.4	74	-33.6	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


802.11b: Band Edge, Left Side

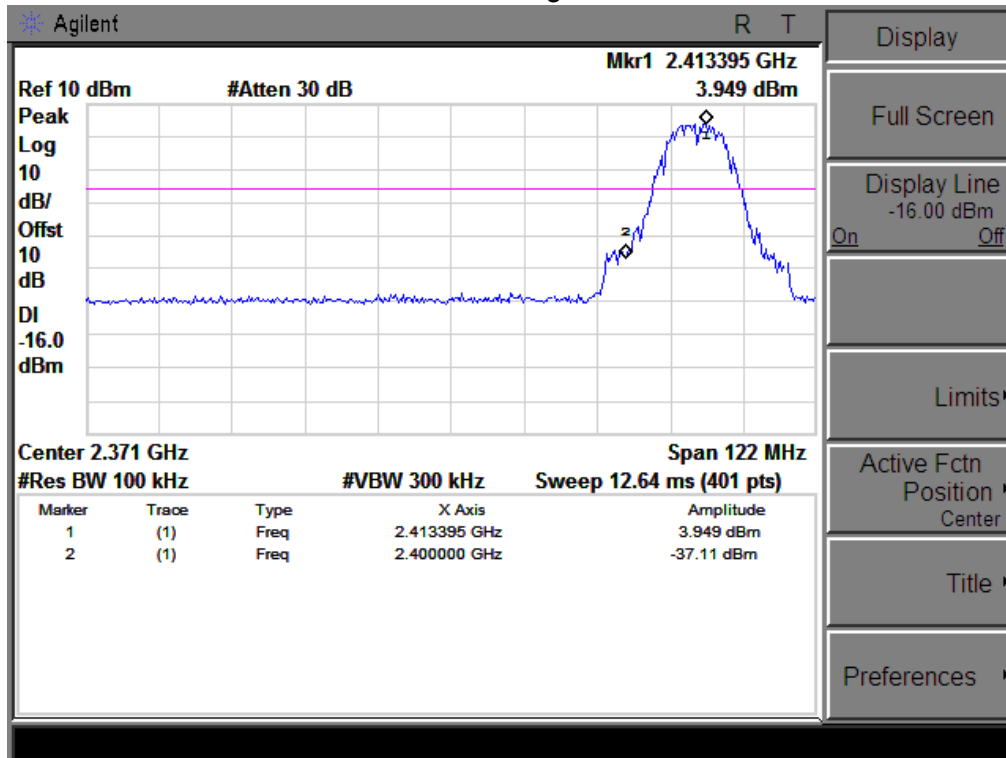


802.11b: Band Edge, Right Side

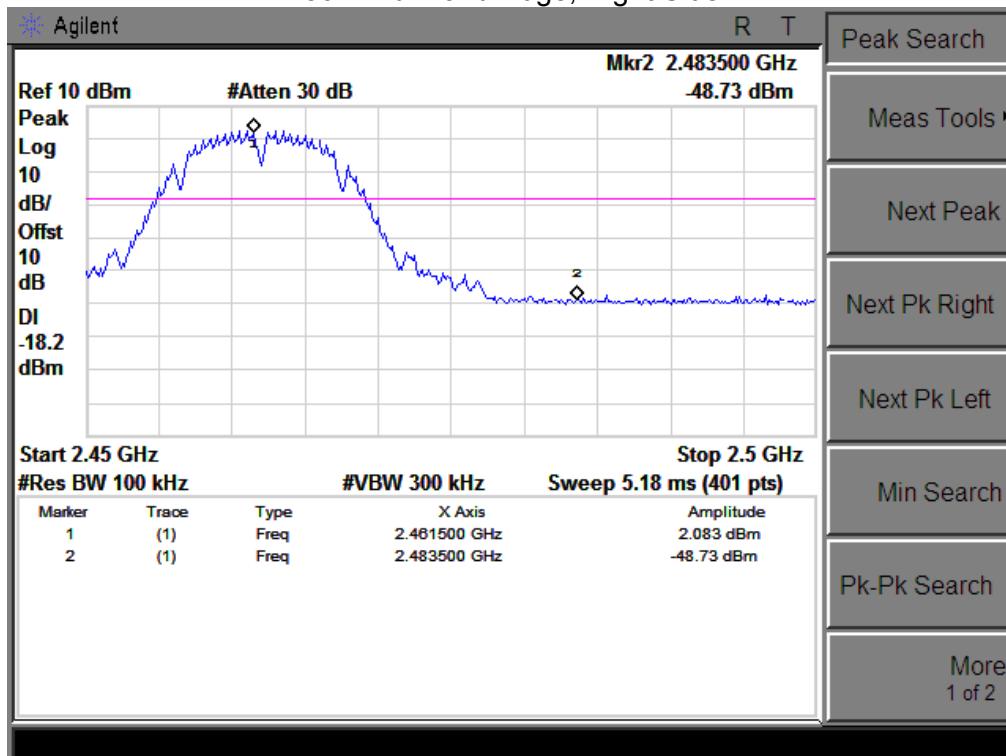


### 802.11g: Band Edge, Left Side

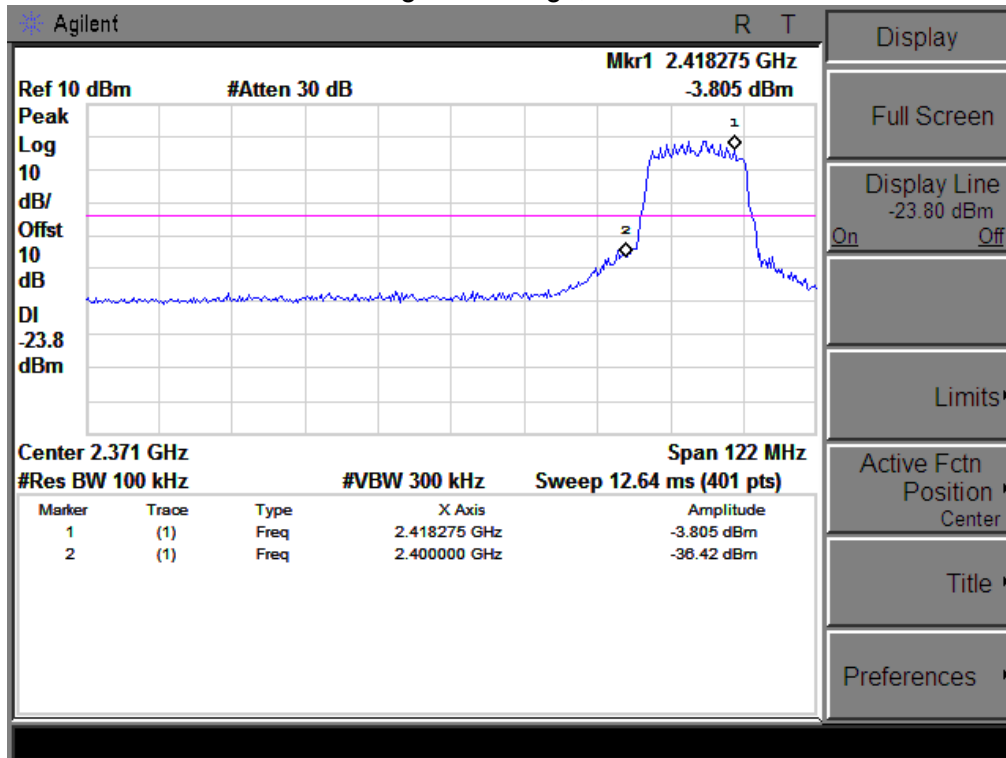


### 802.11g: Band Edge, Right Side

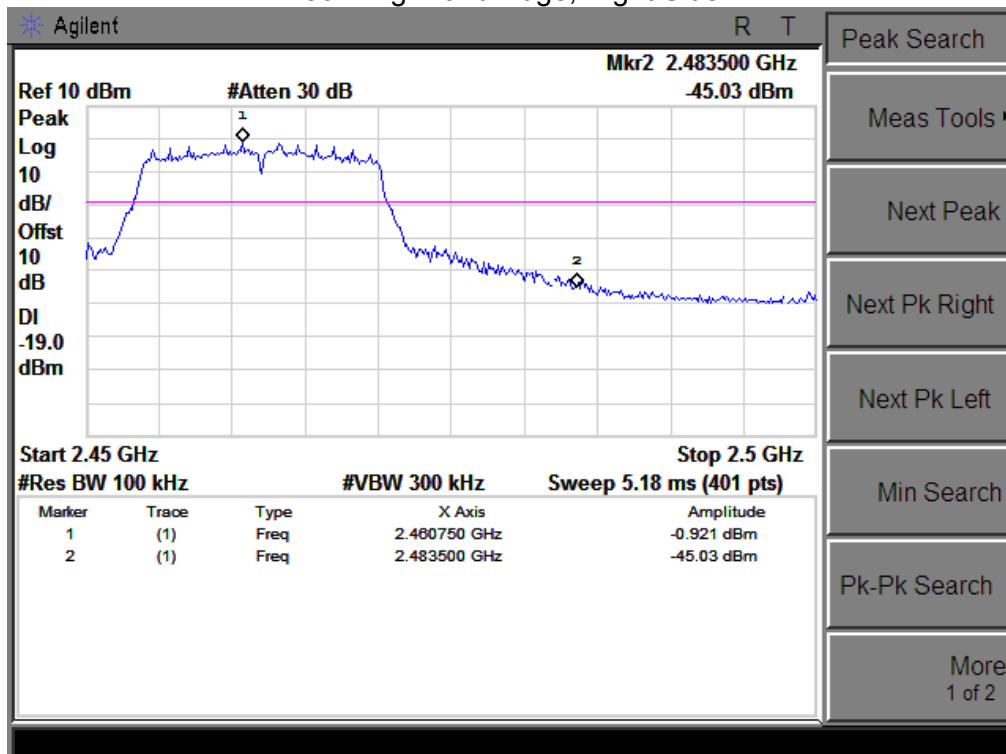


802.11n-HT20: Band Edge, Left Side

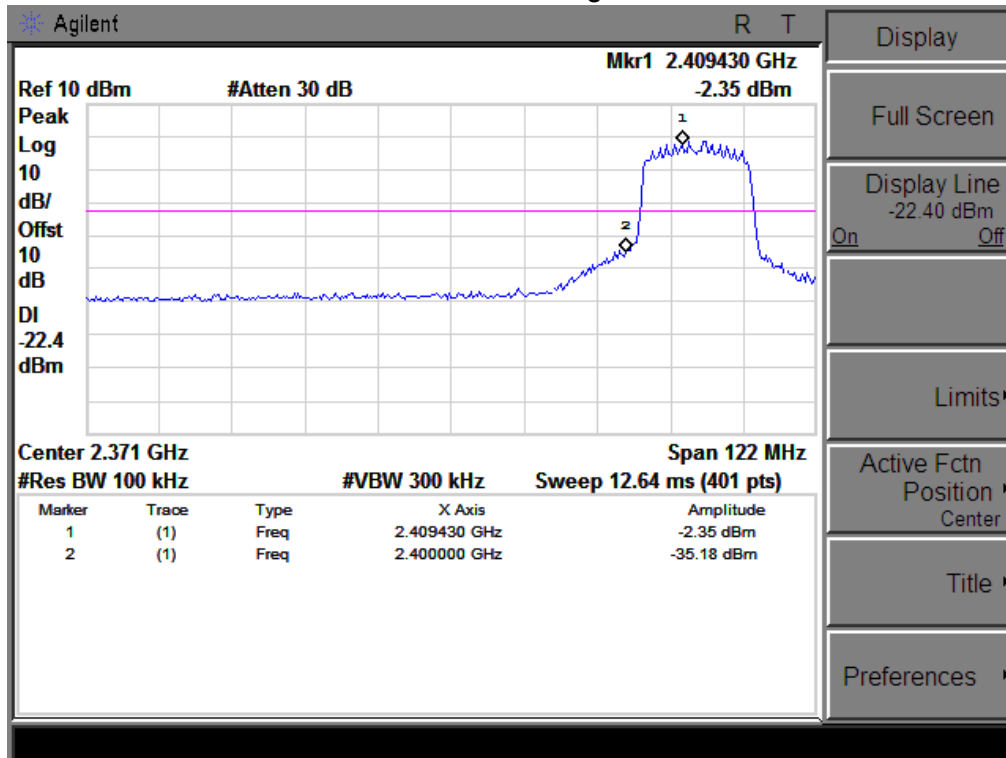


802.11n-HT20: Band Edge, Right Side

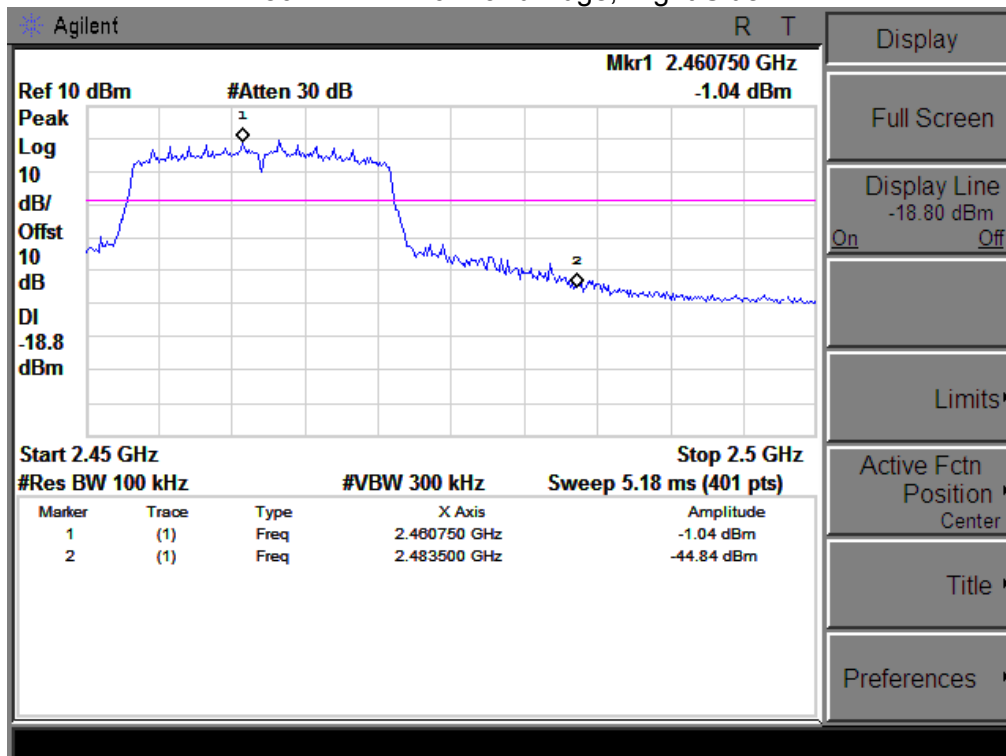

### 802.11n-HT40: Band Edge, Left Side

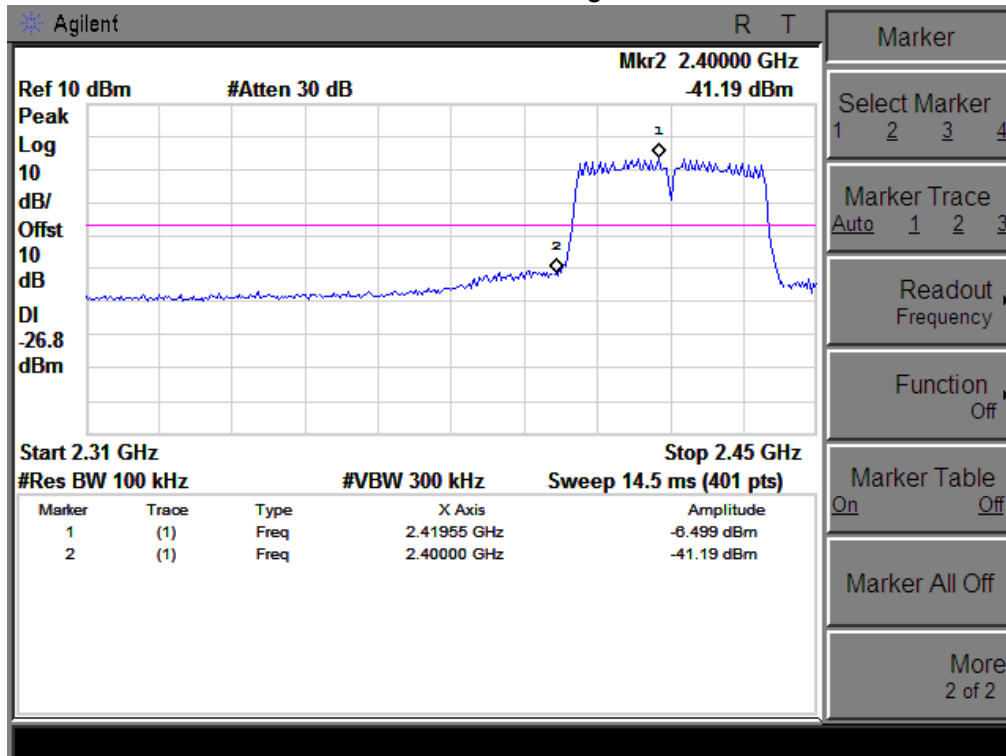

### 802.11n-HT40: Band Edge, Right Side

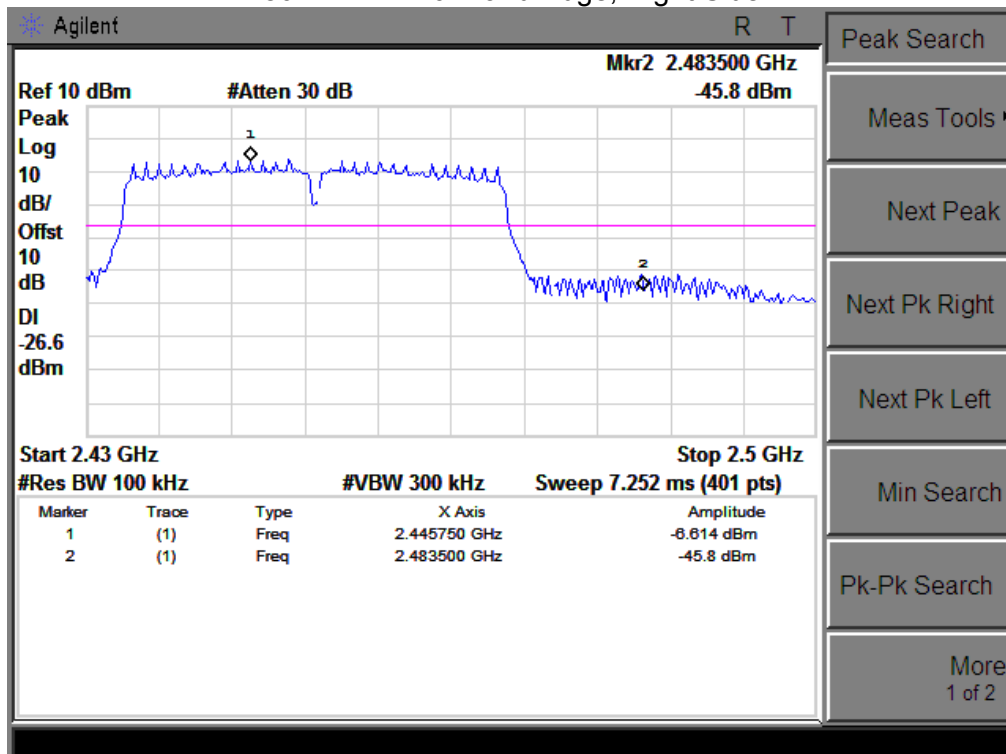



## **8. ANTENNA REQUIREMENT**

### **8.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 EUT ANTENNA**

The EUT antenna is FPCB Antenna. It comply with the standard requirement.

### 9. EUT TEST PHOTO

#### Radiated Measurement Photos



**Conducted Measurement Photos**

