



REPORT No. : SZ16050106E04

FCC TEST REPORT

APPLICANT : HARXON CORPORATION

PRODUCT NAME : Wireless Data Transceiver

MODEL NAME : HX-DU8608D
HX-DU86XXD series: From HX-DU8670D to HX-DU8679D
HX-DU86XXT series: From HX-DU8670T to HX-DU8679T

TRADE NAME : HARXON

BRAND NAME : HARXON

FCC ID : 2ACRAHX-DU8608D

STANDARD(S) : 47 CFR Part 15 Subpart B

TEST DATE : 2016-05-16 to 2016-07-08

ISSUE DATE : 2016-07-11

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.



NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



DIRECTORY

1. TECHNICAL INFORMATION	4
1.1. APPLICANT INFORMATION	4
1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION	4
2. TEST RESULTS	5
2.1. APPLIED REFERENCE DOCUMENTS	5
3. TEST CONDITIONS SETTING	6
3.1. TEST MODE	6
3.2. TEST SETUP AND EQUIPMENTS LIST	7
3.2.1 RADIATED EMISSION	7
4. 47 CFR PART 15B REQUIREMENTS	9
4.1. RADIATED EMISSION	9
4.1.1. REQUIREMENT	9
4.1.2. TEST DESCRIPTION	9
4.1.3. FREQUENCY RANGE OF MEASUREMENT	10
4.1.4. TEST RESULT	10
ANNEX A PHOTOGRAPHS OF TEST SETUP	13
ANNEX B TEST UNCERTAINTY	15
ANNEX C TESTING LABORATORY INFORMATION	16
1. IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY	16
2. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	16
3. ACCREDITATION CERTIFICATE	16
4. TEST ENVIRONMENT CONDITIONS	16



Test Report Declaration

Applicant	HARXON CORPORATION
Applicant Address	6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC
Manufacturer	HARXON CORPORATION
Manufacturer Address	6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC
Product Name	Wireless Data Transceiver
Model Name	HX-DU8608D HX-DU86XXD series: From HX-DU8670D to HX-DU8679D HX-DU86XXT series: From HX-DU8670T to HX-DU8679T
Brand Name	HARXON
HW Version	V1R0
SW Version	E006.00.03
Test Standards	47 CFR Part 15 Subpart B
Test Result	PASS

Tested by : Wang Dalong
Wang Dalong (Test Engineer)

Reviewed by : Xiao Xiong
Xiao Xiong (EMC Manager)

Approved by : Zeng Dexin
Zeng Dexin (Chief Engineer)



1. Technical Information

Note: Provided by applicant

1.1. Applicant Information

Company: HARXON CORPORATION

Address: 6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC

1.2. Equipment under Test (EUT) Description

EUT Type:	Wireless Data Transceiver
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1R0
Software Version:	E006.00.03

NOTE:

1. The EUT is a Wireless Data Transceiver which supports 410-470MHz.
2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15(July 07, 2016 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.107	Conducted Emission	2016.07.08	PASS
2	15.109	Radiated Emission	2016.07.08	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



3. Test Conditions Setting

3.1. Test Mode

1	The first test mode The EUT configuration of the emission tests was EUT + DC power+ PC. During the measurement, the EUT was powered by the DC power and connected to the PC, data was transmitted between the EUT and PC, the EUT was working normally as an intentional device.
2	The second test mode The EUT configuration of the emission tests was EUT + DC power. During the measurement, the EUT was powered by the DC power, the EUT was working normally as an intentional device.


Note: All test modes were performed, only the worse(First) mode was recorded in this report.

3.2. Test Setup and Equipments List


3.2.1 Radiated Emission

A. Test Setup:

1. For radiated emissions from 30MHz to 1GHz

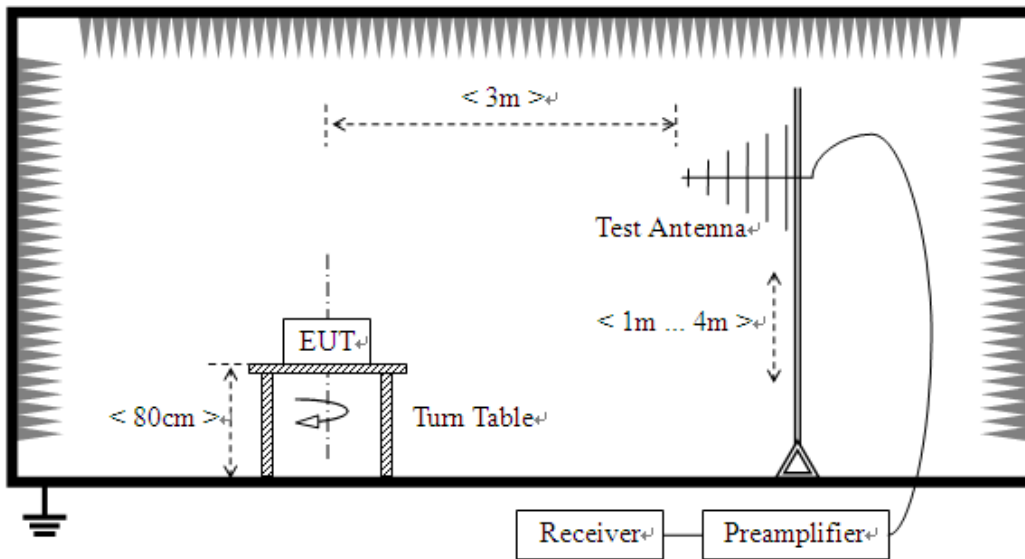

2. For radiated emissions above 1GHz

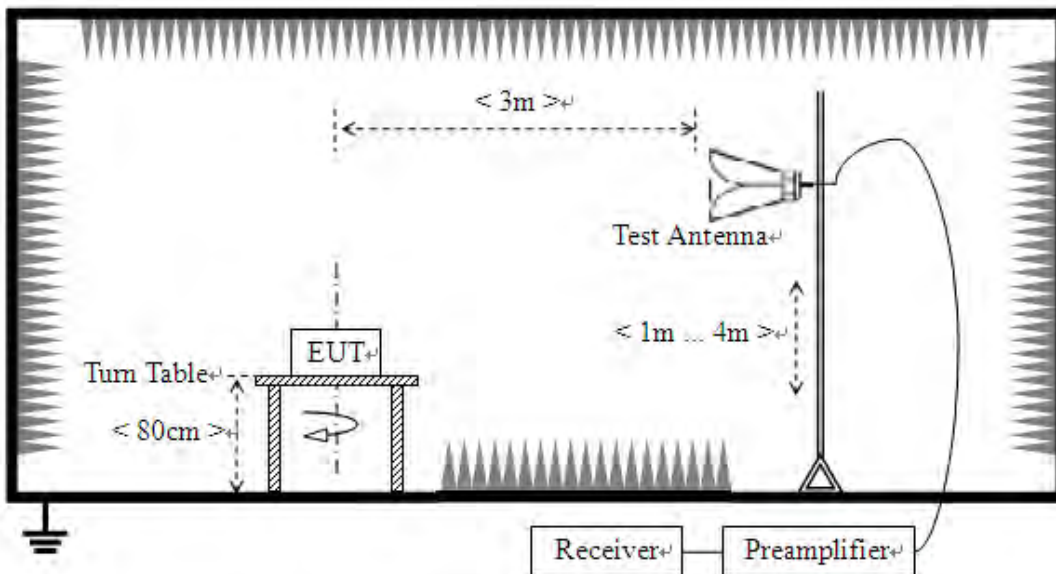



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2016.01.13	2017.01.12
Semi-Anechoic Chamber	Albatross	9m*6m*6m	N/A	2016.01.13	2017.01.12
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2016.01.13	2017.01.12
PC	Apple	A1370	C02FQ2PYDD QW	N/A	N/A



4.47 CFR Part 15B Requirements

4.1. Radiated Emission

4.1.1. Requirement

According to FCC section 15.109(a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in $\text{dB}\mu\text{V/m}$ is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$$

4.1.2. Test Description

See section 3.2.1 of this report.



4.1.3. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

4.1.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

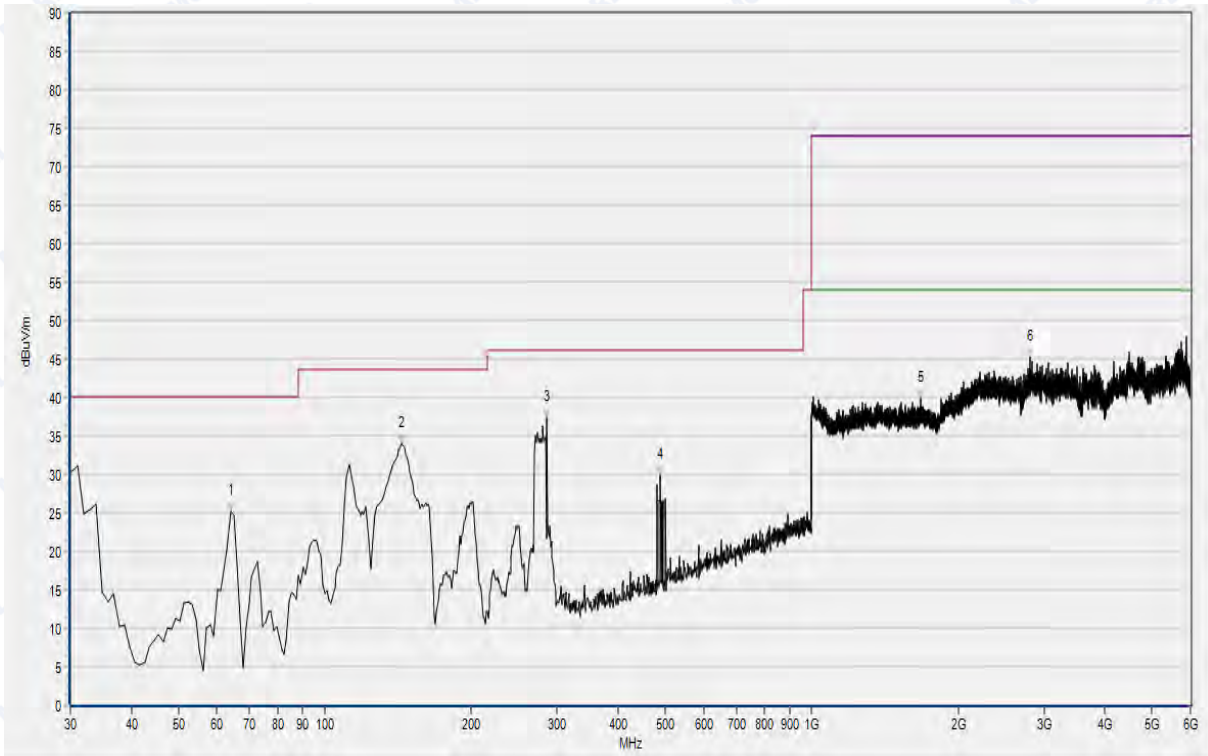

(Plot A: 30MHz – 6GHz, Test Antenna Vertical)

No.	Fre. MHz	Pk dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	63.950	N.A.	25.23	N.A.	N.A.	40.00	N.A.	V	PASS
2	143.490	N.A.	34.01	N.A.	N.A.	43.50	N.A.	V	PASS
3	286.080	N.A.	37.29	N.A.	N.A.	46.00	N.A.	V	PASS
4	488.810	N.A.	30.78	N.A.	N.A.	46.00	N.A.	V	PASS
5	1672.000	39.75	N.A.	32.16	74.00	N.A.	54.00	V	PASS
6	2807.360	45.12	N.A.	38.45	74.00	N.A.	54.00	V	PASS


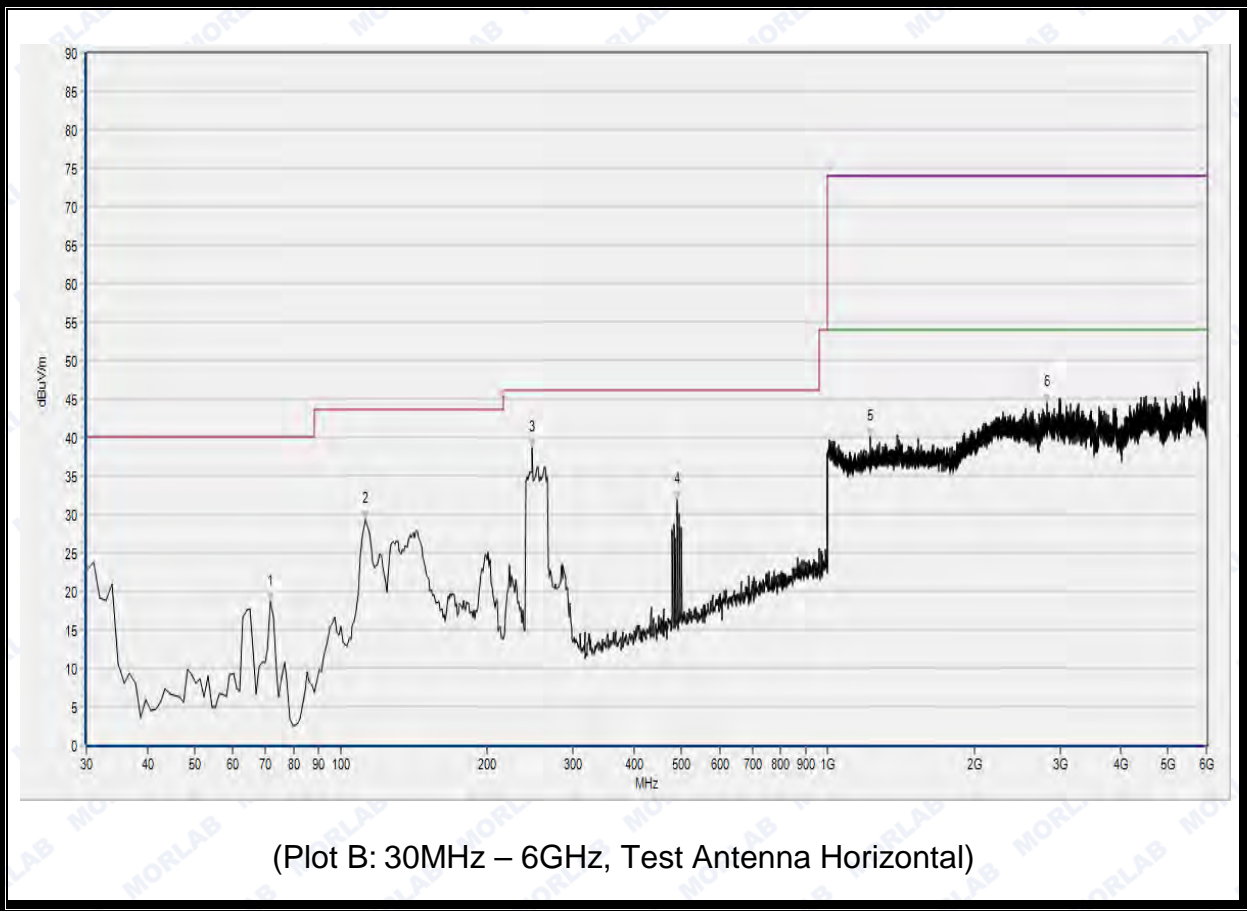


No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	71.710	N.A.	17.99	N.A.	N.A.	40.00	N.A.	H	PASS
2	112.450	N.A.	28.12	N.A.	N.A.	43.50	N.A.	H	PASS
3	247.280	N.A.	38.27	N.A.	N.A.	46.00	N.A.	H	PASS
4	485.320	N.A.	32.73	N.A.	N.A.	46.00	N.A.	H	PASS
5	1180.240	39.79	N.A.	32.48	74.00	N.A.	54.00	H	PASS
6	2712.080	44.30	N.A.	38.77	74.00	N.A.	54.00	H	PASS



Test Result: PASS

Annex A Photographs of Test Setup

1. Radiated Field Strength Measurement(30MHz – 1GHz)

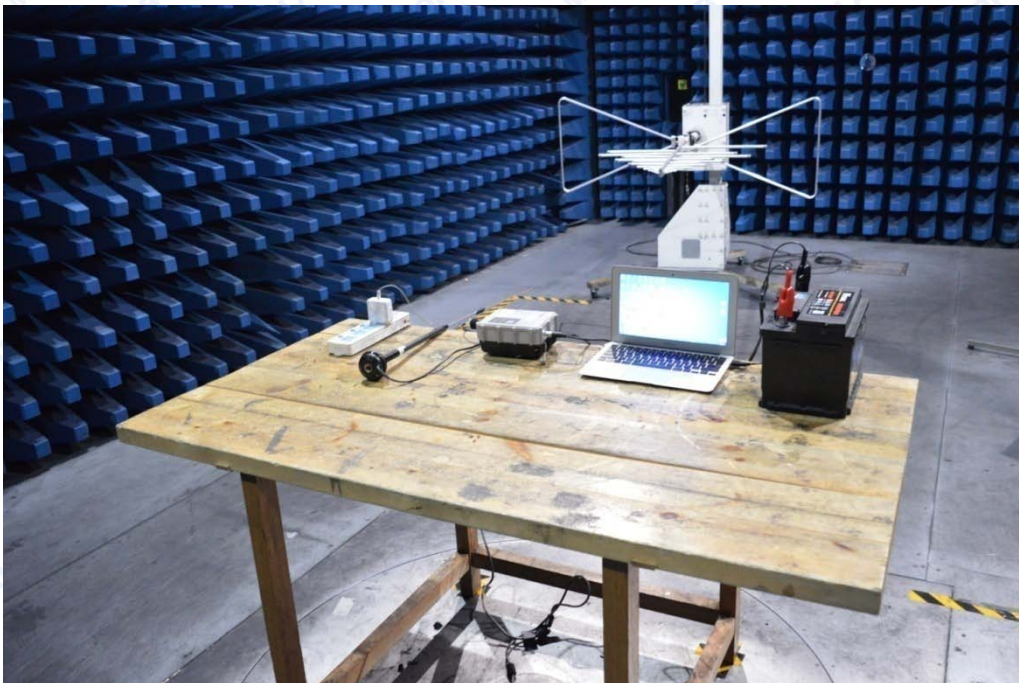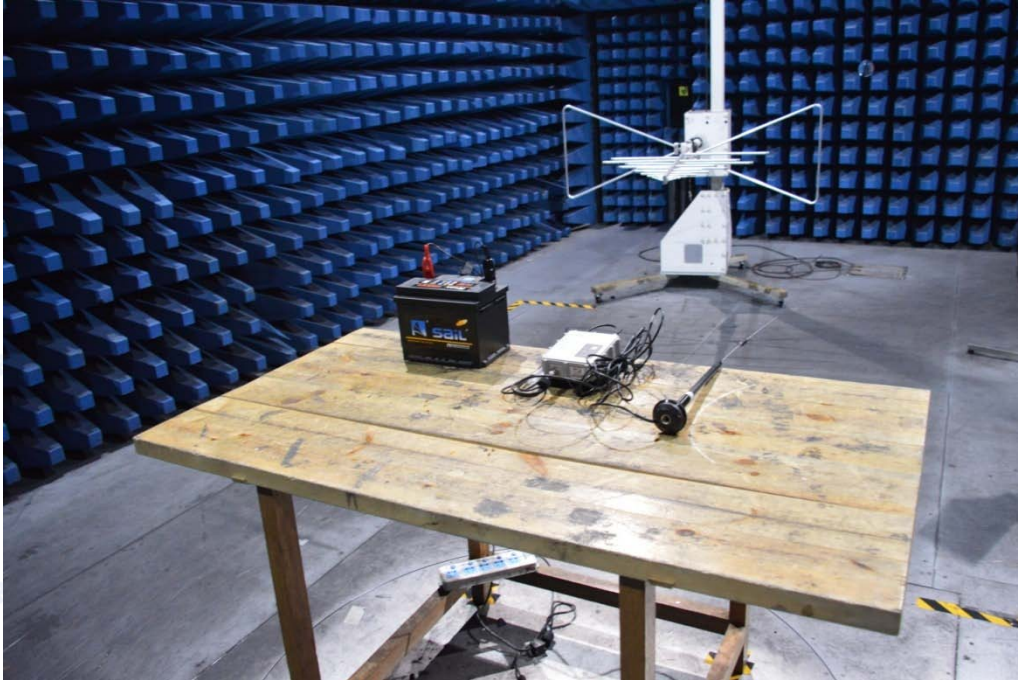

2. Radiated Field Strength Measurement(Above 1GHz)

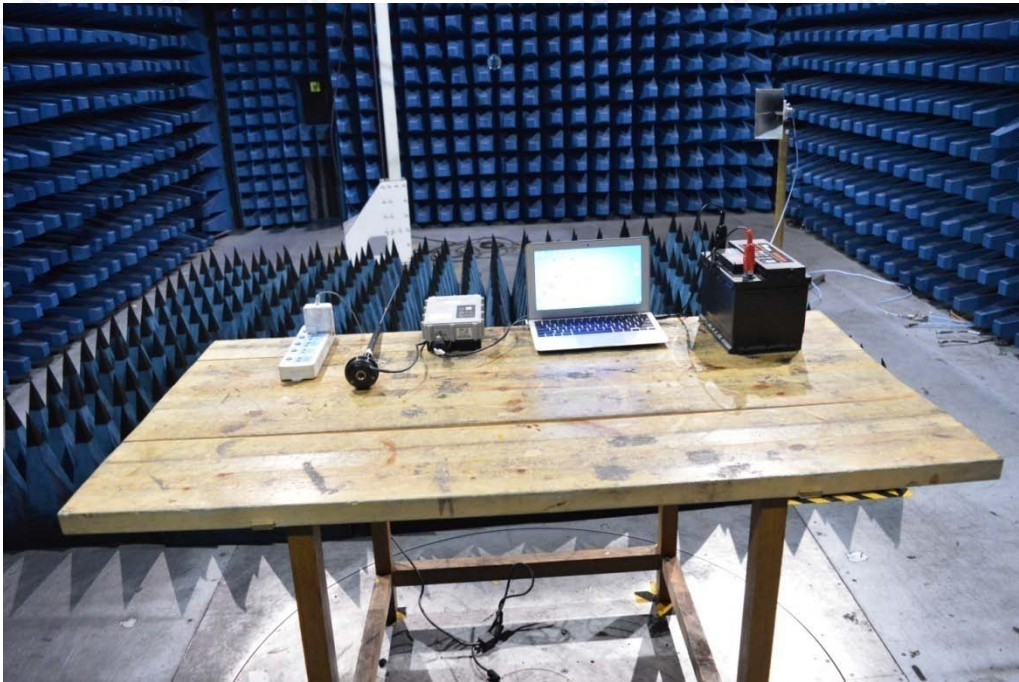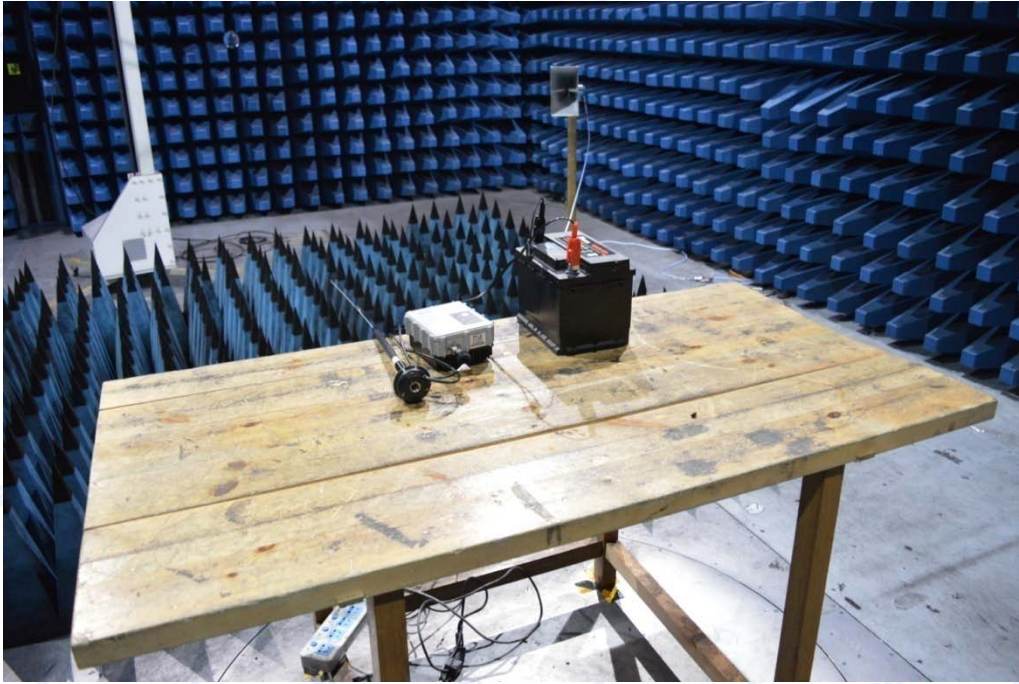



Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$\pm 1.8\text{dB}$
Uncertainty of Radiated Emission:	$\pm 3.1\text{dB}$



Annex C Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory: The FCC registration number is 695796.
(Shenzhen Morlab Communications Technology Co., Ltd.)

4. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

***** END OF REPORT *****