

Test Report

FCC Part15 Subpart E

Product Name : Digital Video Downlink
Model No. : MK58
FCC ID : 2ACS5-MK58
IC ID : 11554B-MK58

Applicant : Yuneec Technology Co., Limited
Address : 2/F Man Shung Industrial Building, 7 Lai Yip
Street, Kwun Tong, Hong Kong

Date of Receipt : Jun. 29, 2015
Test Date : Jul. 17, 2015~ Aug. 05, 2015
Issued Date : Aug. 05, 2015
Report No. : 1570049R-RF-US-P09V01
Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : Aug. 05, 2015
Report No. : 1570049R-RF-US-P09V01



Product Name : Digital Video Downlink
Applicant : Yuneec Technology Co., Limited
Address : 2/F Man Shung Industrial Building, 7 Lai Yip Street, Kwun
Tong, Hong Kong
Manufacturer : Yuneec International (China) Co., Ltd.
Address : No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu
215324, China
Model No. : MK58
FCC ID : 2ACS5-MK58
IC : 11554B-MK58
EUT Voltage : DC 4.5V-5.5V
Brand Name : YUNEEC
Applicable Standard : FCC CFR Title 47 Part 15 Subpart E: 2015
ANSI C63.4:2014; ANSI C63.10:2013;
789033 D02 General UNII Test Procedures New Rules v01
Industry Canada RSS-Gen Issue 4
Industry Canada RSS-247 Issue 1
Test Result : Complied
Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech
Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : Elaine Wong
Reviewed By : Henry Mas
Approved By : Hean m Coo

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC
USA	:	FCC
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	8
1.1. EUT Description	8
1.2. Mode of Operation	11
1.3. Tested System Details.....	12
1.4. Configuration of Tested System	13
1.5. EUT Exercise Software	14
2. Technical Test.....	15
2.1. Summary of Test Result	15
2.2. Test Environment	16
3. Conducted Emission	17
3.1. Test Equipment	17
3.2. Test Setup	17
3.3. Limit.....	18
3.4. Test Procedure	18
3.5. Uncertainty	19
3.6. Test Result	19
4. Radiated Emission	20
4.1. Test Equipment	20
4.2. Test Setup	21
4.3. Limit.....	22
4.4. Test Procedure	22
4.5. Uncertainty	23
4.6. Test Result	24
5. Occupied Bandwidth	27
5.1. Test Equipment	27
5.2. Test Setup	27
5.3. Limit.....	27

5.4.	Test Procedure	28
5.5.	Uncertainty	29
5.6.	Test Result	30
6.	6dB Occupied Bandwidth	32
6.1.	Test Equipment	32
6.2.	Test Setup	32
6.3.	Limit.....	32
6.4.	Test Procedure	33
6.5.	Uncertainty	33
6.6.	Test Result	34
7.	Power Output	36
7.1.	Test Equipment	36
7.2.	Test Setup	36
7.3.	Limit.....	36
7.4.	Test Procedure	38
7.5.	Uncertainty	38
7.6.	Test Result	39
8.	Peak Power Spectral Density.....	41
8.1.	Test Equipment	41
8.2.	Test Setup	41
8.3.	Limit.....	41
8.4.	Test Procedure	43
8.5.	Uncertainty	43
8.6.	Test Result	44
9.	Radiated Emission Band Edge	46
9.1.	Test Equipment	46
9.2.	Test Setup	46
9.3.	Limit.....	46
9.4.	Test Procedure	49

9.5. Uncertainty 49

9.6. Test Result 50

10. Frequency Stability 55

10.1. Test Equipment 55

10.2. Test Setup 55

10.3. Limit..... 55

10.4. Test Procedure 56

10.5. Uncertainty 56

10.6. Test Result 57

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1570049R-RF-US-P09V01	V1.0	Initial Issued Report	Aug. 05, 2015

1. General Information

1.1. EUT Description

Product Name	Digital Video Downlink
Brand Name	YUNEEC
Model No.	MK58
EUT Voltage	DC 4.5V-5.5V
Frequency Range	802.11a: 5745~5825MHz
Channel Number	802.11a: 5
Type of Modulation	802.11a: OFDM
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps
Channel Control	Auto
Antenna Delivery	1*Tx + 1*Rx
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

For 5.0GHz Band

802.11a Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A

Antenna List

Antenna	Manufacturer	Model No.	Peak Gain
External Antenna	N/A	N/A	1dBi

The test mode of the test software can support.

Test Mode	Ant 1
802.11a	✓

Duty Cycle

Test Mode	Duty Cycle
802.11a	0.12%

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by 802.11a

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. The radiation measure measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Asus	N80V	8BN0AS226971468	N/A

1.4. Configuration of Tested System

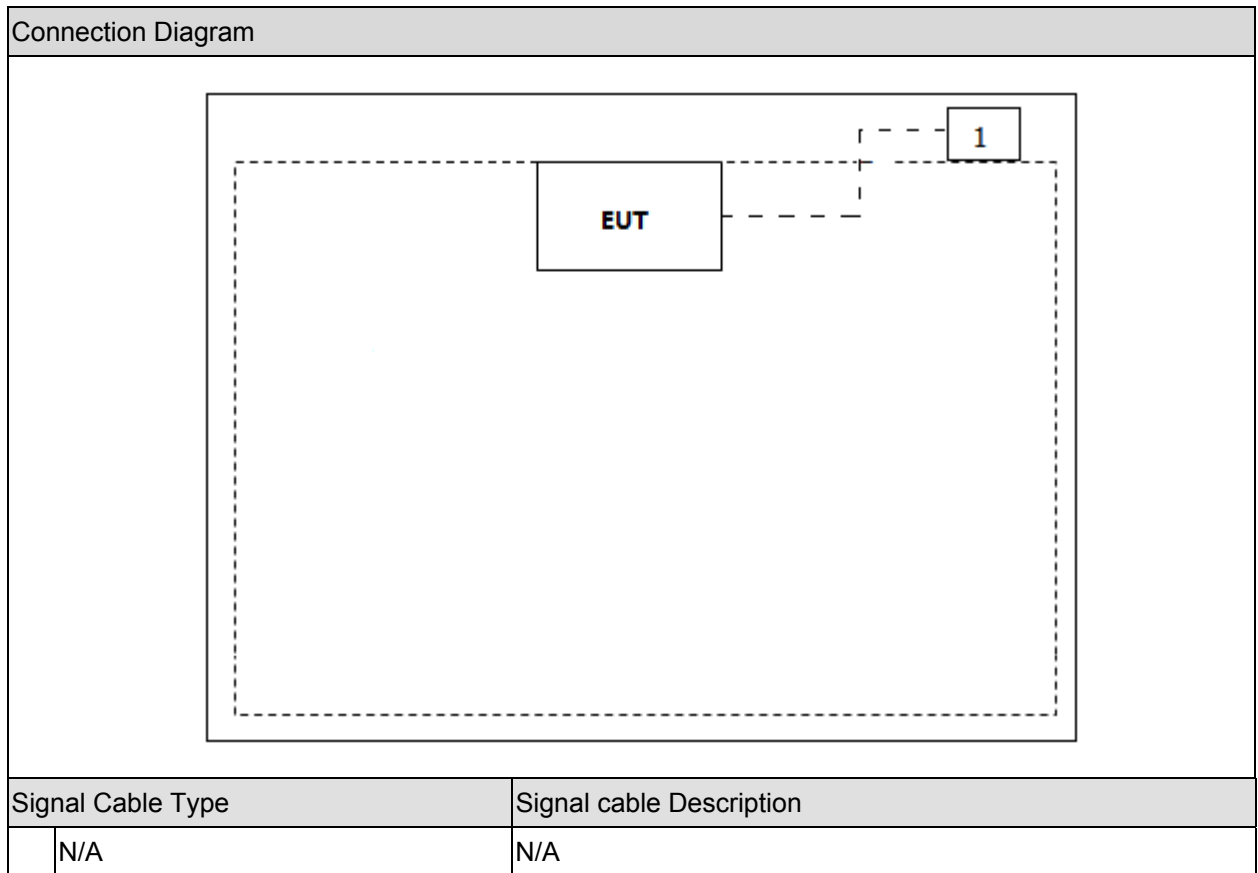

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Input the RF commands, and set the test mode and channel, then press OK to start continue Transmit or receive.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.207	No	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.209	Yes	No
26dB Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.407(a)	Yes	No
6dB Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart E:2014 Section 15.407(e)	Yes	No
Power Output	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.407(a)	Yes	No
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.407(a)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.205, 15.407(b)	Yes	No
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: 2014 Section 15.407(g)	Yes	No

For IC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 4 November 2014 Section 8.8	No	No
Radiated Emission	RSS-247 Issue 1 May 2015 Section 5.5	Yes	No
99% Occupied Bandwidth	RSS-Gen Issue 4 November 2014 Section 6.6	Yes	No
6dB Occupied Bandwidth	RSS-247 Issue 1 May 2015 Section 6.2	Yes	No
Power Output	RSS-247 Issue 1 May 2015 Section 6.2	Yes	No
Peak Power Spectral Density	RSS-247 Issue 1 May 2015 Section 6.2	Yes	No
Radiated Emission Band Edge	RSS-Gen Issue 4 November 2014 Section 8.10	Yes	No
Frequency Stability	RSS-Gen Issue 4 November 2014 Section 8.11	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100726	2016.03.28
Two-Line V-Network	R&S	ENV216	100043	2016.03.28
Two-Line V-Network	R&S	ENV216	100044	2015.09.16
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2016.03.01
50ohm Termination	SHX	TF2	07081401	2015.09.16
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2016.01.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

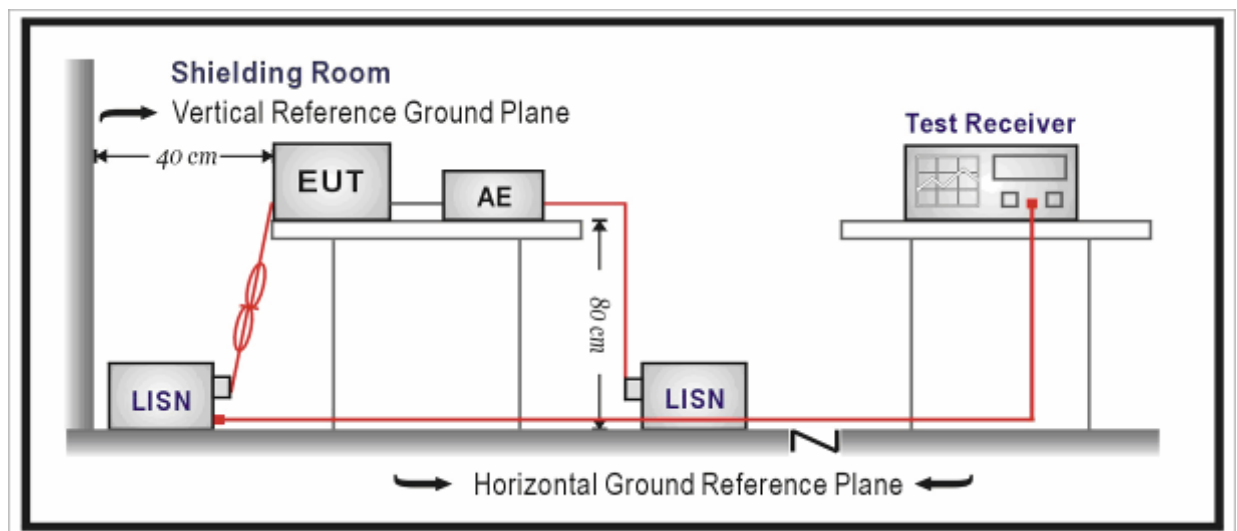

3.3. Limit

For FCC&IC

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

according to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

The device was powered by battery, so the test is not applied.

4. Radiated Emission

4.1. Test Equipment

Radiated Emission / AC-2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2016.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2015.11.17
Bilog Chainenna	Teseq GmbH	CBL6112D	27611	2015.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2016.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2016.01.08

Radiated Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2016.03.28
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.07
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.05
Preamplifier	Quietek	AP-040G	CHM-0906001	2016.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2016.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2015.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2016.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016.01.08

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.


4.2. Test Setup

For FCC&IC


Below 30MHz Test Setup:

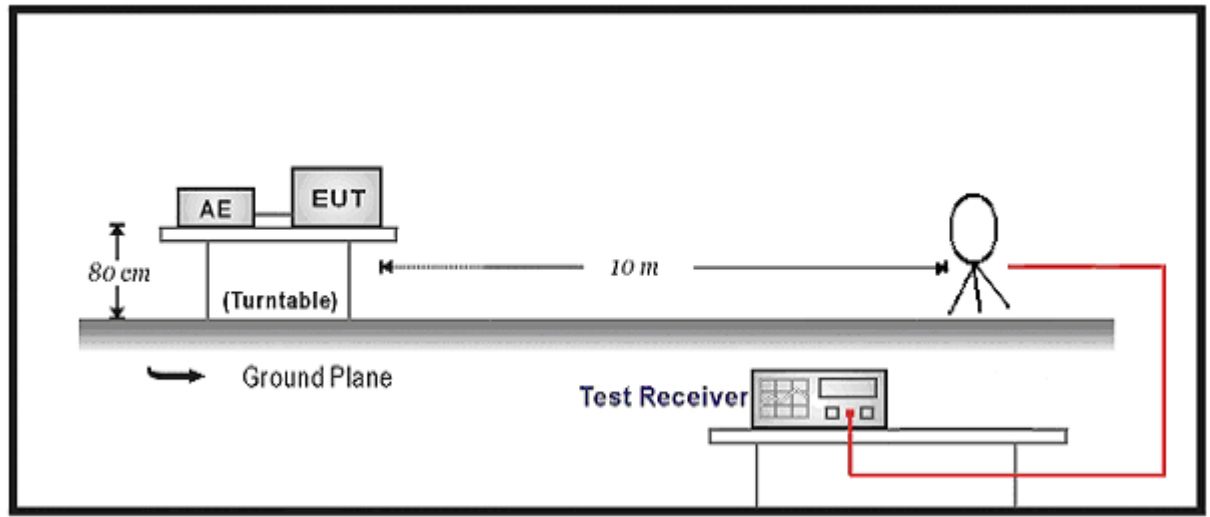

Below 1GHz Test Setup:

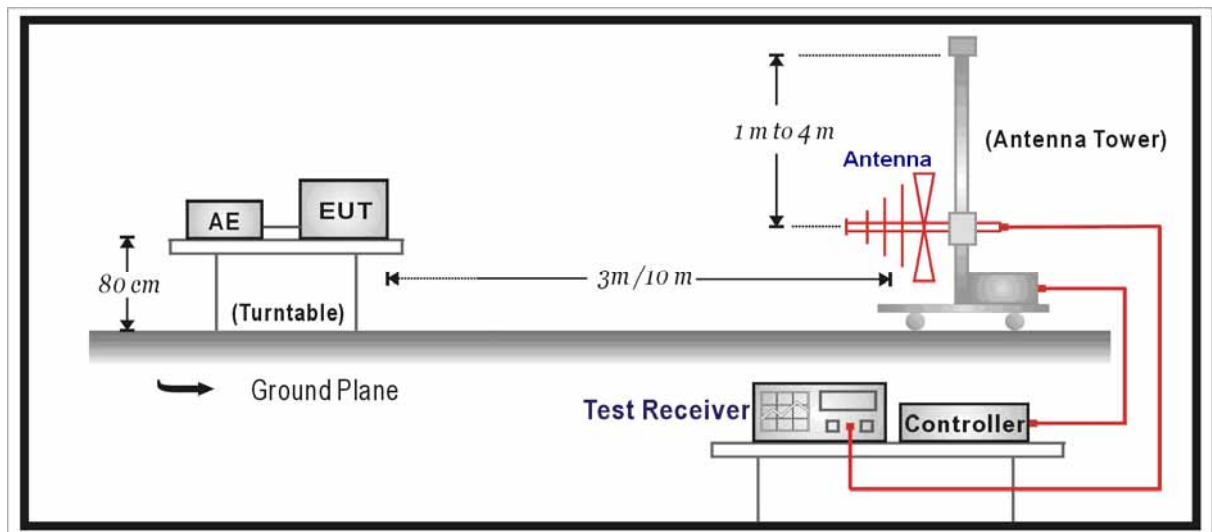

Above 1GHz Test Setup:

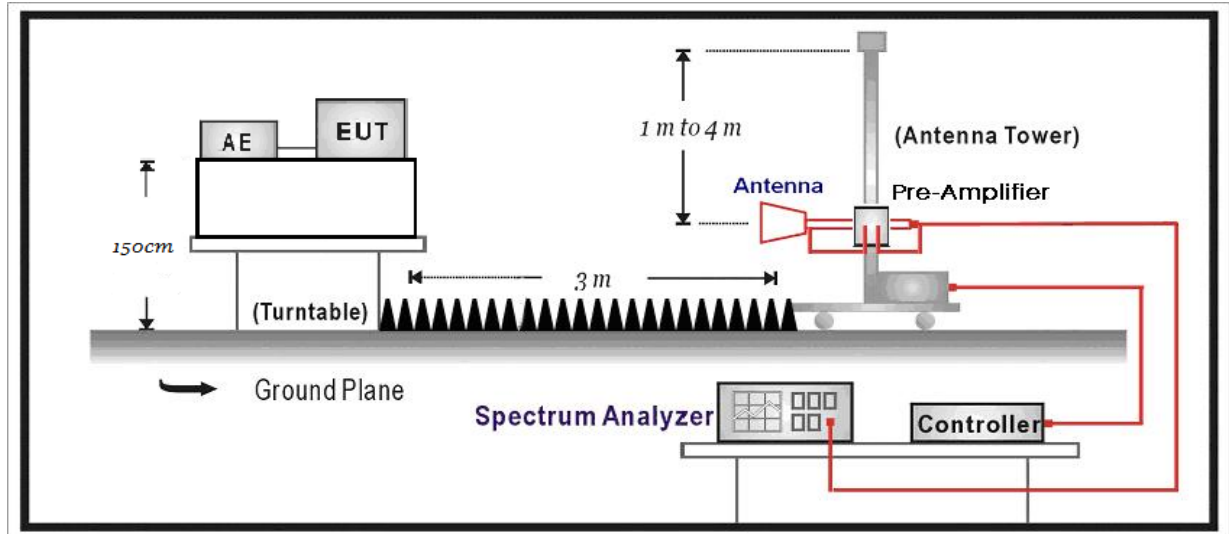

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument Chainenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = $20 \log E$ field strength (uV/m)

4.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was

positioned such that the distance from Chainenna to the EUT was 3 meters.

The Chainenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Chainenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2014 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Chainenna will be bended down a little (as horn Chainenna has the narrow beamwidth) in order to keeping the Chainenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW $\geq 1/T$, sweep time = auto.

Mode1: Transmit by 802.11a

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
149	H	11490.0	21.87	21.7	43.57	54(Note3)	-10.43	PK
	H	17235.0	13.92	26.1	40.02	54(Note3)	-13.98	PK
	V	11490.0	22.35	21.7	44.05	54(Note3)	-9.95	PK
	V	11490.0	11.37	21.7	33.07	54(Note3)	-20.93	PK
157	H	11570.0	21.38	22.4	43.78	54(Note3)	-10.22	PK
	H	17355.0	13.17	25.8	38.97	54(Note3)	-15.03	PK
	V	11570.0	21.95	22.4	44.35	54(Note3)	-9.65	PK
	V	17355.0	12.97	25.8	38.77	54(Note3)	-15.23	PK
165	H	11650.0	19.66	23.2	42.86	54(Note3)	-11.14	PK
	H	17475.0	13.04	25.9	38.94	54(Note3)	-15.06	PK
	V	11650.0	20.31	23.2	43.51	54(Note3)	-10.49	PK
	V	17475.0	12.29	25.9	38.19	54(Note3)	-15.81	PK


Note: 1. Measure Level = Reading Level + Factor.

2. The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 6dB below the limits, therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


The worst case of Radiated Emission below 1GHz:

Engineer: Scott	
Site: AC2	Time: 2015/07/31 - 09:57
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_10M(30-1000M)20150408	Polarity: Horizontal
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode 1	

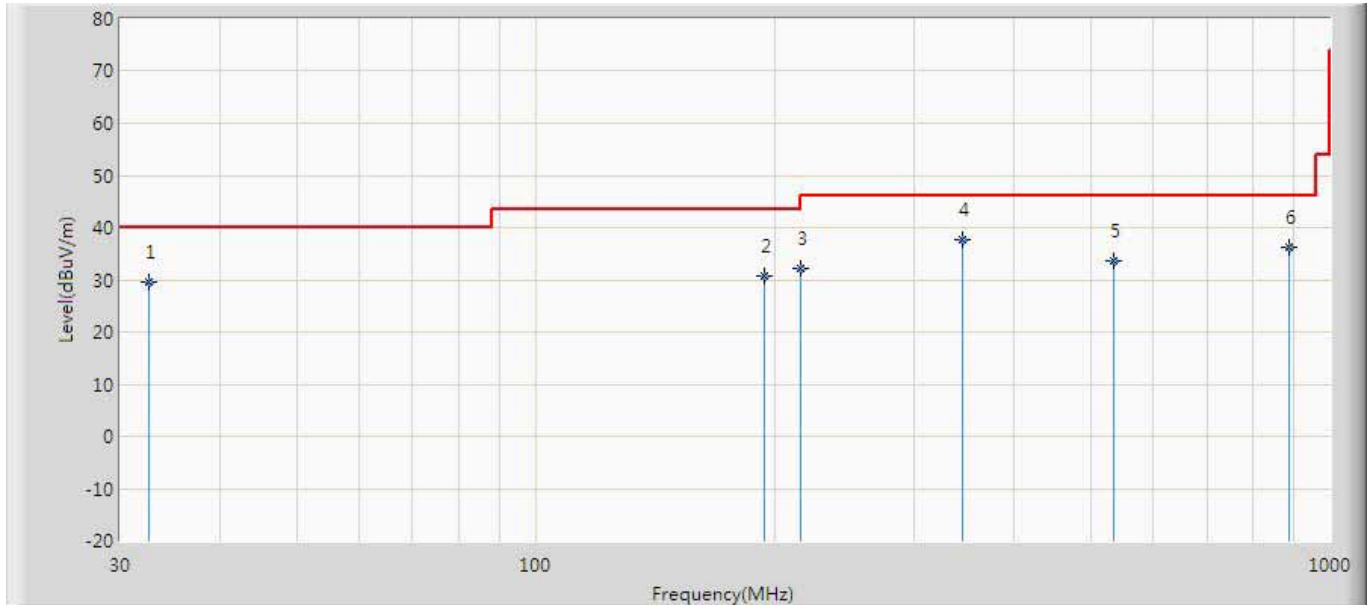

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.361	29.857	2.668	-10.143	40.000	27.189	QP
2		193.295	30.767	13.280	-12.733	43.500	17.487	QP
3		214.417	32.408	15.339	-11.092	43.500	17.069	QP
4	*	342.107	37.613	15.624	-8.387	46.000	21.989	QP
5		527.932	34.110	6.036	-11.890	46.000	28.074	QP
6		879.352	36.065	3.903	-9.935	46.000	32.162	QP

Engineer: Scott	
Site: AC2	Time: 2015/07/31 - 09:57
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_10M(30-1000M)20150408	Polarity: Vertical
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode 1	

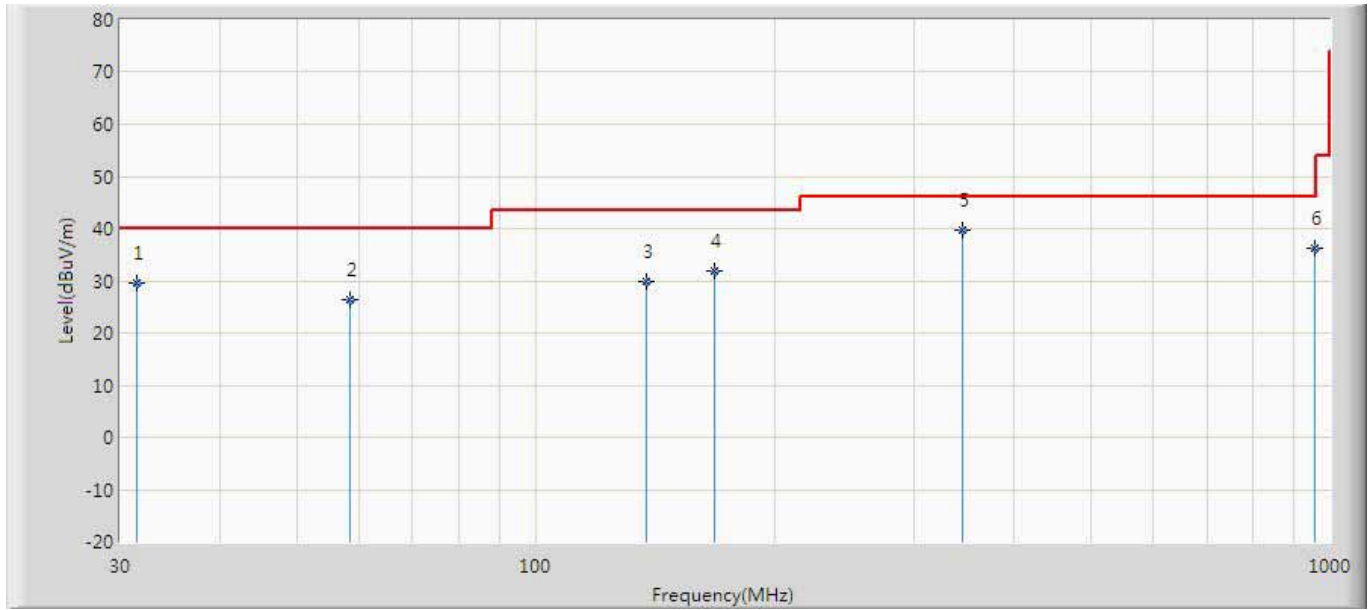

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		31.584	29.390	5.726	-10.610	40.000	23.664	QP
2		58.408	26.623	9.960	-13.377	40.000	16.663	QP
3		137.138	30.063	11.306	-13.437	43.500	18.757	QP
4		167.284	31.656	12.461	-11.844	43.500	19.195	QP
5	*	342.249	40.293	16.278	-5.707	46.000	24.015	QP
6		948.028	36.505	3.591	-9.495	46.000	32.914	QP

5. Occupied Bandwidth


5.1. Test Equipment

Occupied Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

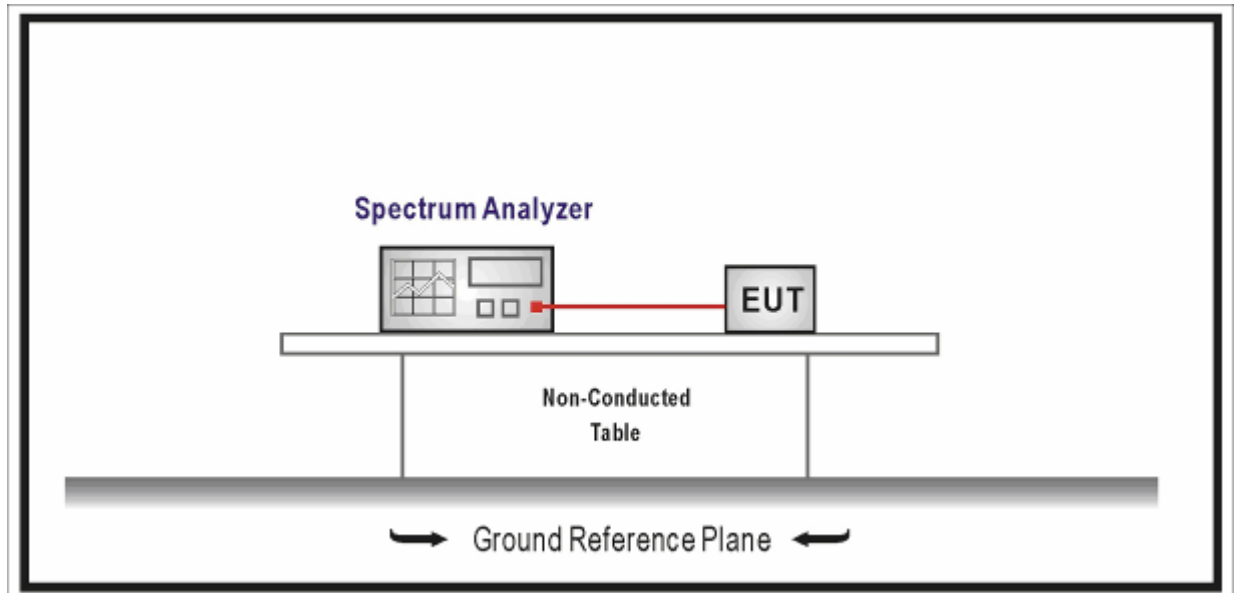

5.3. Limit

N/A

5.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1

Emission Bandwidth

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

5.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

5.6. Test Result


Product	:	DIGITAL VIDEO DOWNLINK
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11a

Channel No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Occupied Bandwidth (MHz)
149	5745	16.465	18.64
157	5785	16.391	19.52
165	5825	16.346	19.26

Channel 149 (5745MHz)

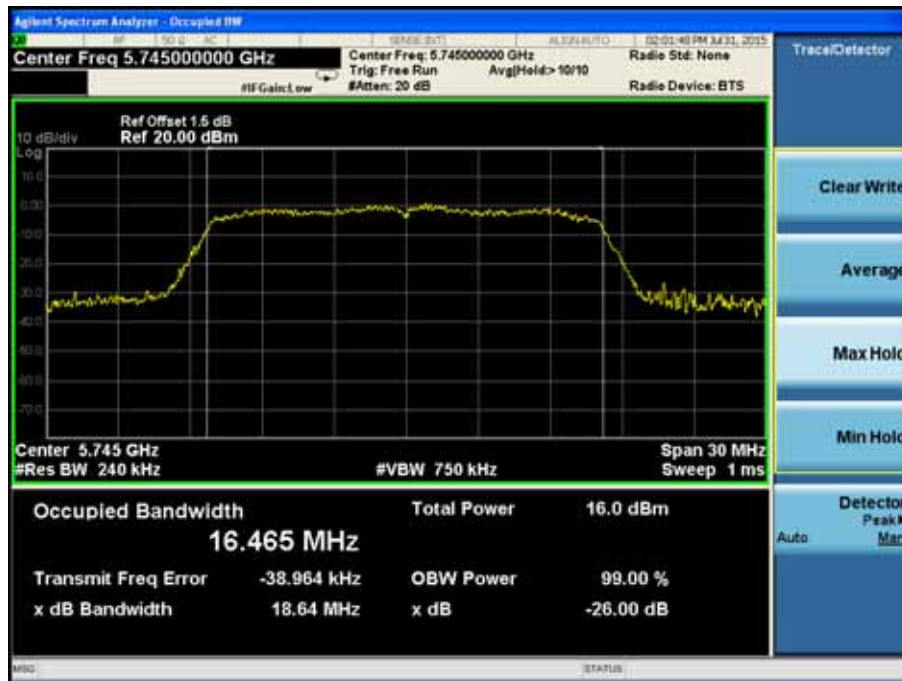

Channel 157(5785MHz)

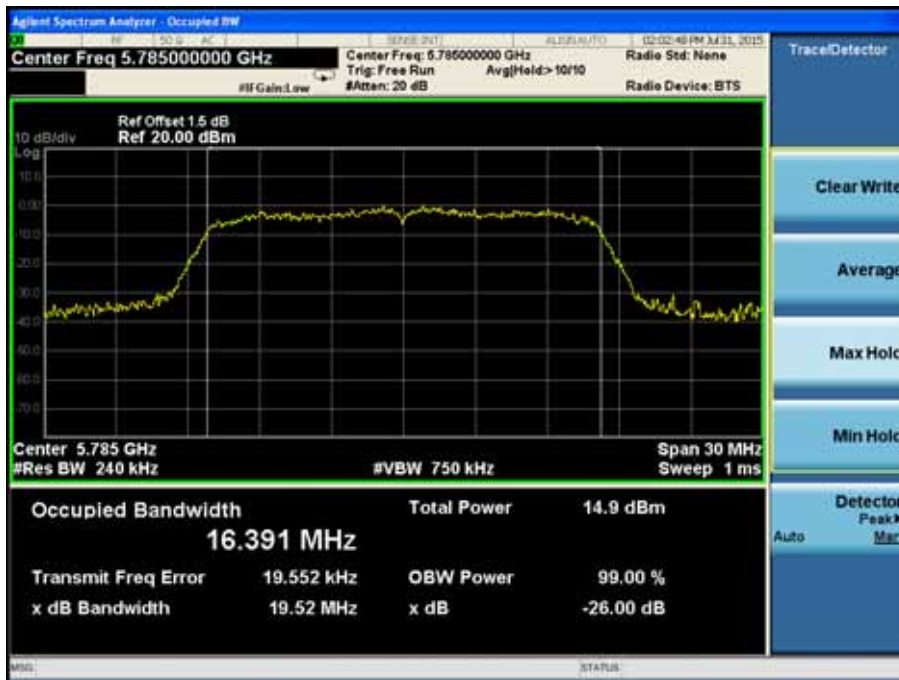

Channel 165 (5825MHz)



6. 6dB Occupied Bandwidth


6.1. Test Equipment

Occupied Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

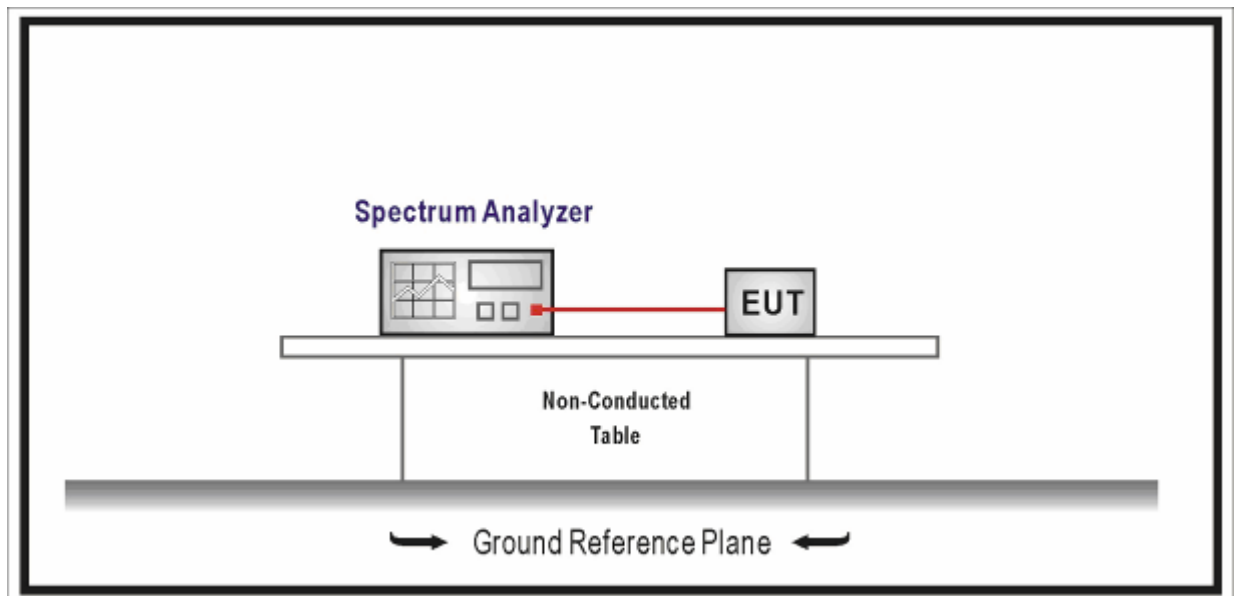

6.3. Limit

For FCC&IC

The minimum 6 dB bandwidth shall be 500 kHz.

6.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1

- a) Set RBW = in the range of 1% to 5% of the OBW.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Use the -6dBm function of the instrument (if available) and report the measured bandwidth.

6.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result


Product	:	DIGITAL VIDEO DOWNLINK
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11a

Channel No.	Frequency (MHz)	6dB Occupied Bandwidth (MHz)
149	5745	15.17
157	5785	14.47
165	5825	15.35


Channel 149 (5745MHz)

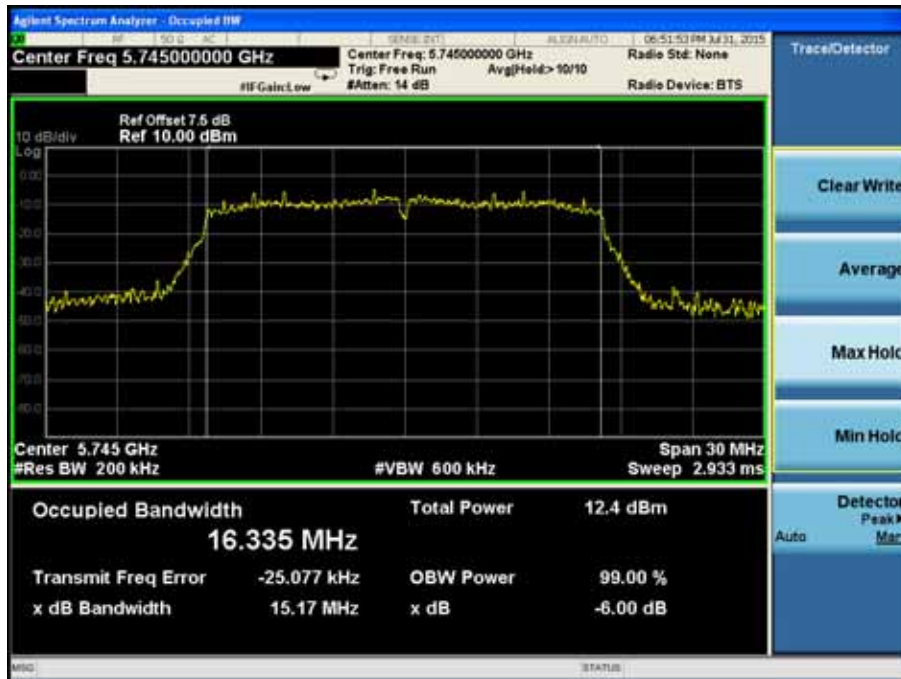

Channel 157(5785MHz)

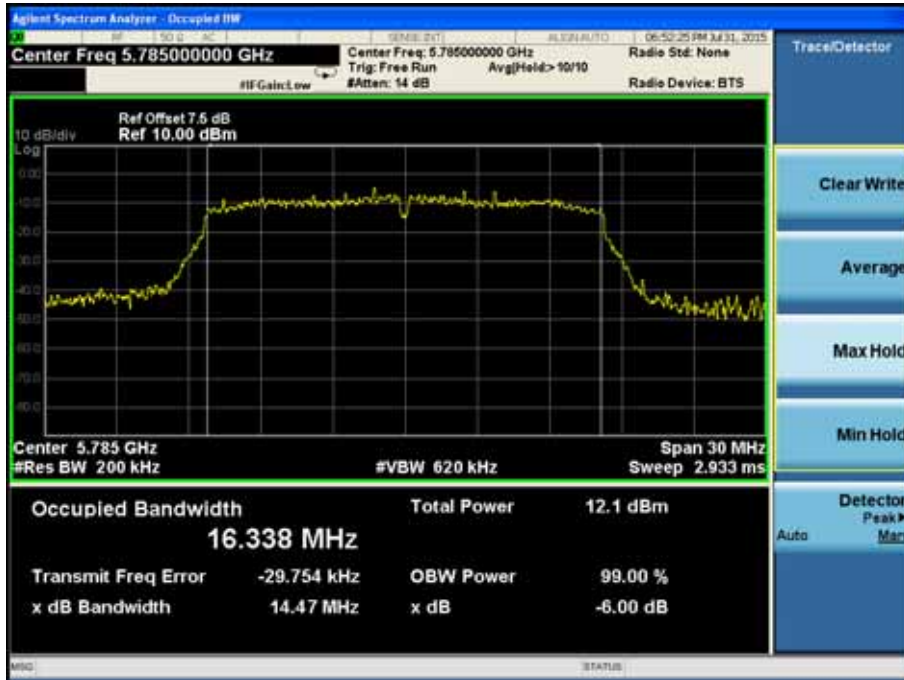

Channel 165 (5825MHz)

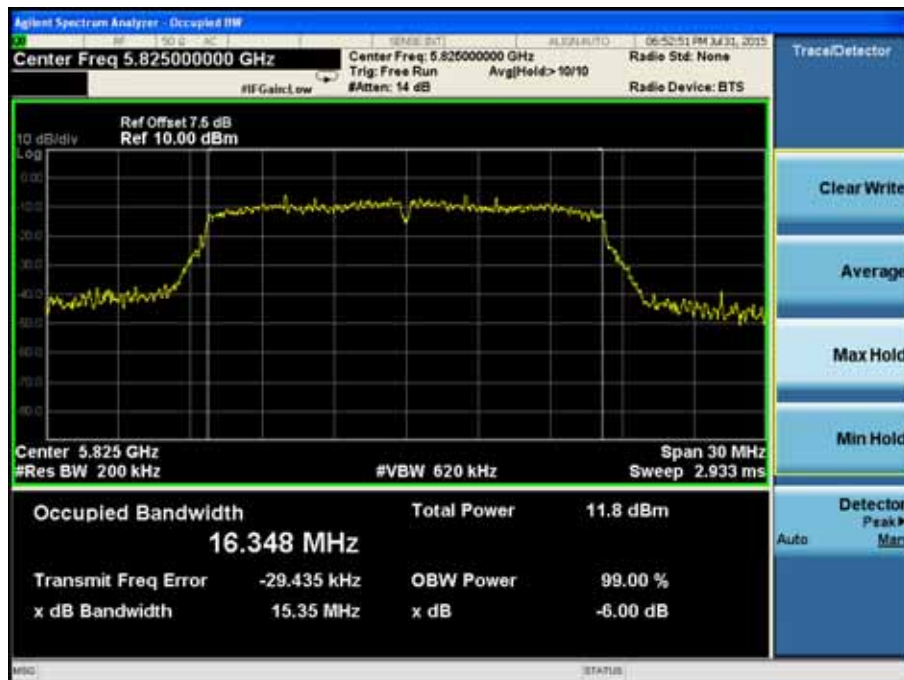

7. Power Output


7.1. Test Equipment

Power Output / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

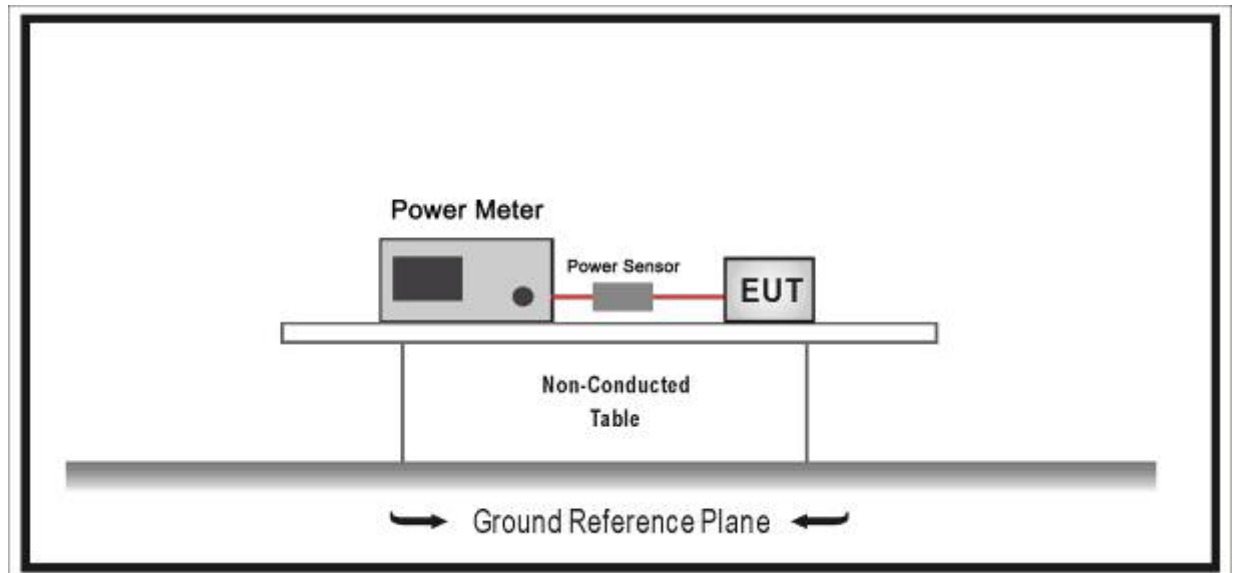

7.3. Limit

For FCC

- For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For IC

- For the Frequency Band 5150-5250MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band..
- For the Frequency Band 5250-5350MHz, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
- For the Frequency Band 5470-5600, 5650-5725MHz, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p.

greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

- For the Frequency Band 5725-5850MHz, The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipointFootnote3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

7.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1

Use the wideband power meter to test RMS power and record the result.

7.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

7.6. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

Power output at various data rates:

Test Mode	Bandwidth	Frequency (MHz)	Channel	Data Rate	Average Power (dBm)
802.11a	20	5745	149	6	15.43
				24	15.14
				54	15.22

Product	:	DIGITAL VIDEO DOWNLINK
Test Item	:	Power Output
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11a

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)
		Ant 1	Ant 2		
149	5745	15.43	N/A	15.43	30
157	5785	15.36	N/A	15.36	30
165	5825	15.57	N/A	15.57	30

8. Peak Power Spectral Density


8.1. Test Equipment

Peak Power Spectral Density / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

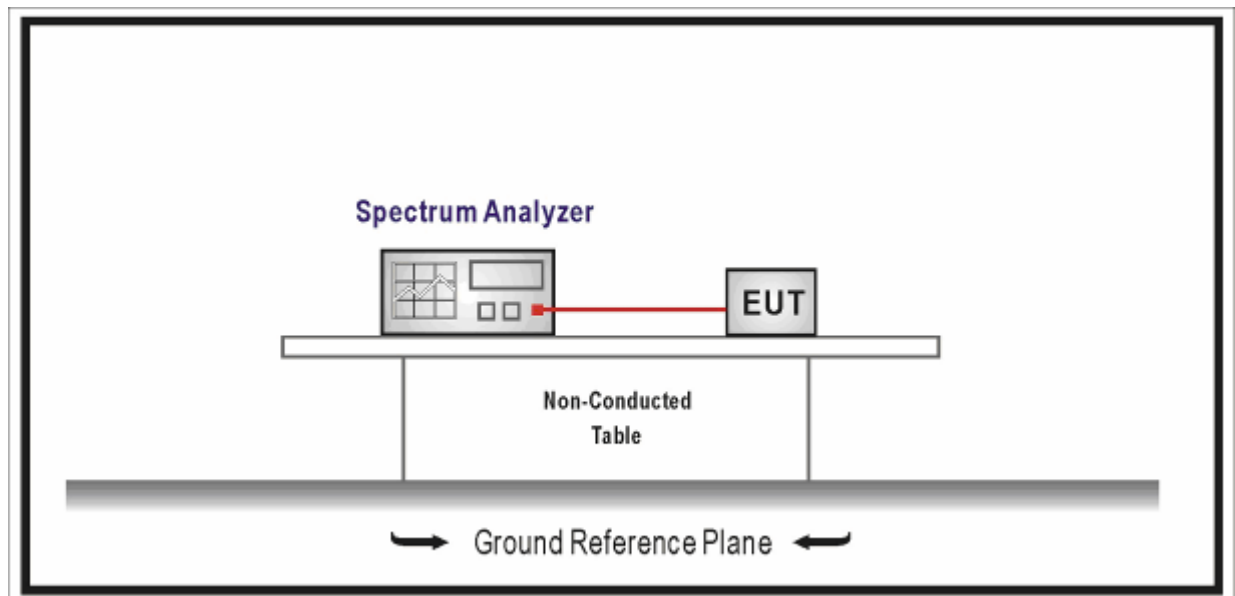

8.3. Limit

For FCC

- For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW

(21 dBm).

- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For IC

- For the Frequency Band 5150-5250MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band..
- For the Frequency Band 5250-5350MHz, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
- For the Frequency Band 5470-5600, 5650-5725MHz, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B

is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

- For the Frequency Band 5725-5850MHz, The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint^{Footnote3} systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

8.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2014& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1.

Set span to encompass the entire emission bandwidth (EBW) of the signal.

For 5150-5725MHz

- a) Set RBW = 1 MHz.
- b) Set VBW \geq 3 MHz.
- c) Sweep time = auto.
- d) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

For 5725-5875MHz

- e) Set RBW=510KHz
- f) VBW \geq 3RBW
- g) Sweep time=auto
- h) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- i) Scale the observed power level to an equivalent value in 500 kHz by adjusting (increase) the measured power by a bandwidth correction factor (BWCF) where BWCF = $10\log(500\text{ kHz}/100\text{ kHz}) = 6.98\text{ dB}$.

8.5. Uncertainty


The measurement uncertainty is defined as $\pm 1.27\text{ dB}$

8.6. Test Result

Product	:	DIGITAL VIDEO DOWNLINK
Test Item	:	Peak Power Spectral Density
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11a

Channel No.	Frequency (MHz)	Reading Value (dBm/MHz)	Duty Cycle (%)	Total PPSD (dBm/MHz)	Limit (dBm/MHz)
149	5745	-6.578	0.12	22.63	30
157	5785	-6.567	0.12	22.64	30
165	5825	-6.832	0.12	22.38	30

Channel 149 (5745MHz)

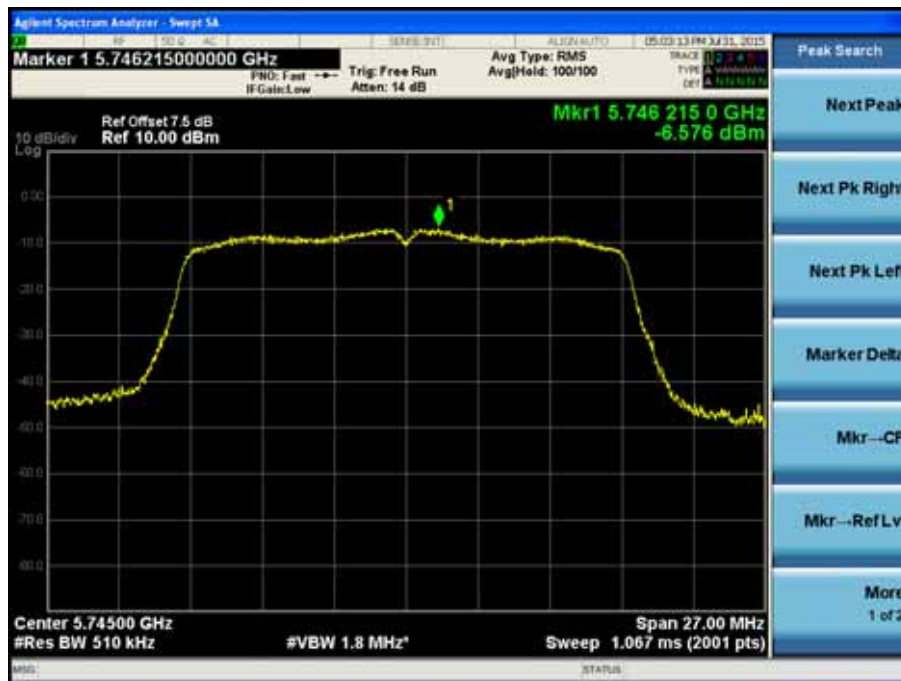

Channel 157(5785MHz)



Channel 165 (5825MHz)




9. Radiated Emission Band Edge

9.1. Test Equipment

☒ Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.10
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2016.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2015.10.15
DRG Horn	ETS-Lindgren	3117	00123988	2016.01.07
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2016.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016.01.08

9.2. Test Setup

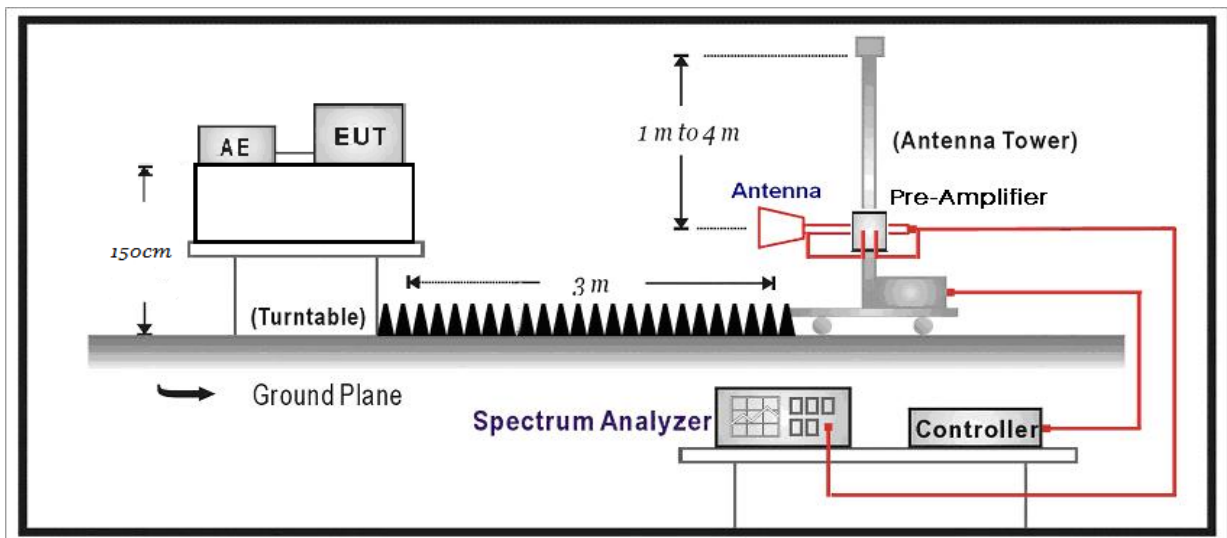

9.3. Limit

For FCC&IC

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

For RSS-GEN requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-GEN, must also comply with the radiated emission limits specified in Section 8.10.

MHz	MHz	GHz
0.090-0.110	74.8-75.2	9.0-9.2
2.1735-2.1905	108-138	9.3-9.5
3.020-3.026	156.52475-156.52525	10.6-12.7
4.125-4.128	156.7-156.9	13.25-13.4
4.17725-4.17775	240-285	14.47-14.5
4.20725-4.20775	322-335.4	15.35-16.2
5.677-5.683	399.9-410	17.7-21.4
6.215-6.218	608-614	22.01-23.12
6.26775-6.26825	960-1427	23.6-24.0
6.31175-6.31225	1435-1626.5	31.2-31.8
8.291-8.294	1645.5-1646.5	36.43-36.5
8.362-8.366	1660-1710	Above 38.6
8.37625-8.38675	1718.8-1722.2	
8.41425-8.41475	2200-2300	
12.29-12.293	2310-2390	
12.51975-12.52025	2655-2900	
12.57675-12.57725	3260-3267	
13.36-13.41	3332-3339	
16.42-16.423	3345.8-3358	
16.69475-16.69525	3500-4400	
16.80425-16.80475	4500-5150	
25.5-25.67	5350-5460	
37.5-38.25	7250-7750	
73-74.6	8025-8500	

For 15.407(b) requirement:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBuV/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5825	-27 [Note(1)]	68.3
	-17 [Note(2)]	78.3

Note(1): Outside the frequency range 5715 - 5835MHz.

Note(2): Within the frequency range from the band edge to 10MHz below or above the band edge, 5715 – 5725MHz and 5825 - 5835MHz.

9.4. Test Procedure

According to ANSI C63.4:2014& ANSI C63.10:2013&789033 D02 General UNII Test Procedures New Rules v01& FCC CFR Title 47 Part 15 Subpart E: 2015& Industry Canada RSS-Gen Issue 4 Industry Canada RSS-247 Issue 1.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 on radiated measurement.

Note: When doing emission measurement above 1GHz, the horn Chainenna will be bended down a little (as horn Chainenna has the narrow beamwidth) in order to keeping the Chainenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

9.5. Uncertainty

The measurement uncertainty above 1GHz is defined as ± 3.9 dB


9.6. Test Result

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.


Note: when the duty cycle is less than 98%, a duty cycle factor is calculated in the correction factor

Engineer: Scott	
Site: AC5	Time: 2015/07/31 - 10:10
Limit: FCC-15.407 new	Margin: 0
Probe: Horn_3117_00165315(1-18GHz)	Polarity: Horizontal
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode1: Transmit at CH5745 by 802.11a	

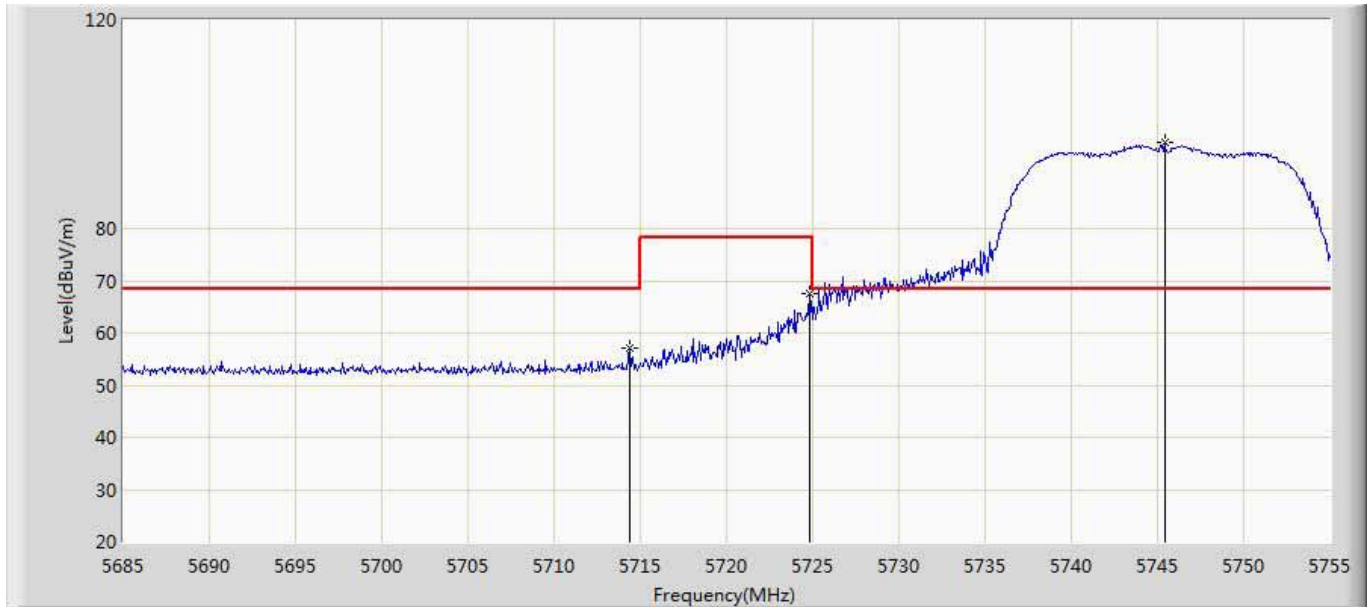


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5714.400	57.090	15.861	-11.210	68.300	41.229	PK
2		5724.830	67.566	26.323	-10.734	78.300	41.243	PK
3	*	5745.410	96.596	55.330	N/A	N/A	41.266	PK

Engineer: Scott	
Site: AC5	Time: 2015/07/31- 10:15
Limit: FCC-15.407 new	Margin: 0
Probe: Horn_3117_00165315(1-18GHz)	Polarity: Vertical
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode1: Transmit at CH5745 by 802.11a	

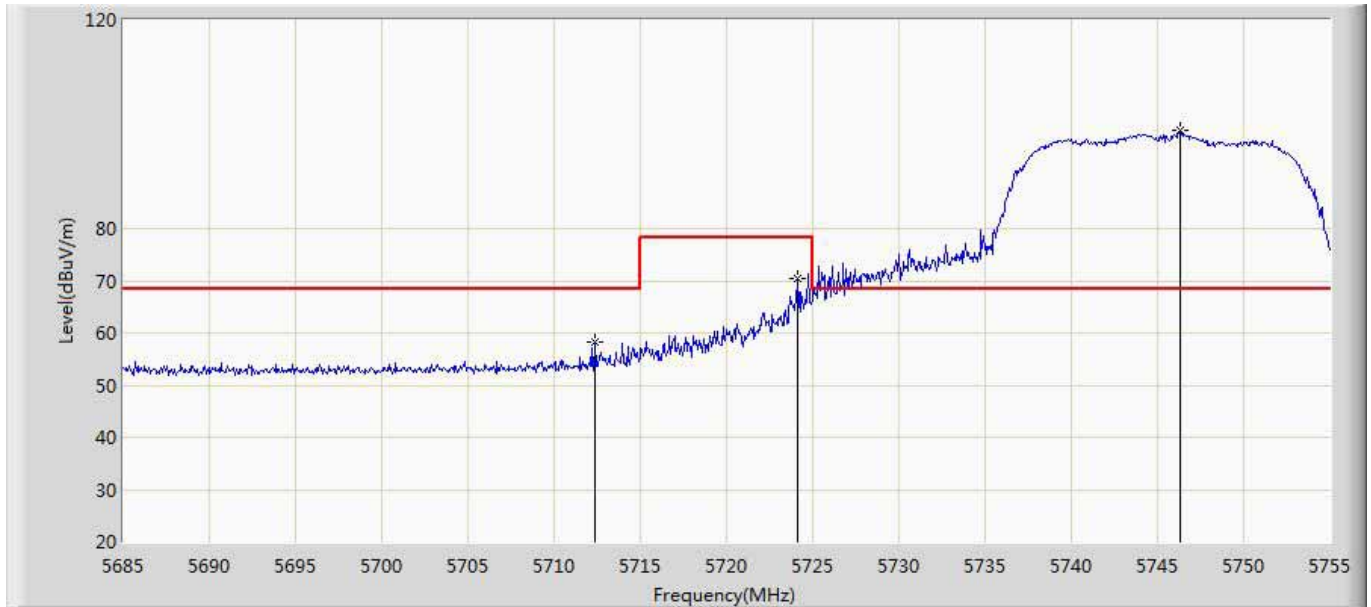


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5712.370	58.339	17.127	-9.961	68.300	41.212	PK
2		5724.130	70.363	29.132	-7.937	78.300	41.231	PK
3	*	5746.320	98.909	57.643	N/A	N/A	41.266	PK

Engineer: Scott	
Site: AC5	Time: 2015/07/31 - 10:20
Limit: FCC-15.407 new	Margin: 0
Probe: Horn_3117_00165315(1-18GHz)	Polarity: Horizontal
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode1: Transmit at CH5825 by 802.11a	

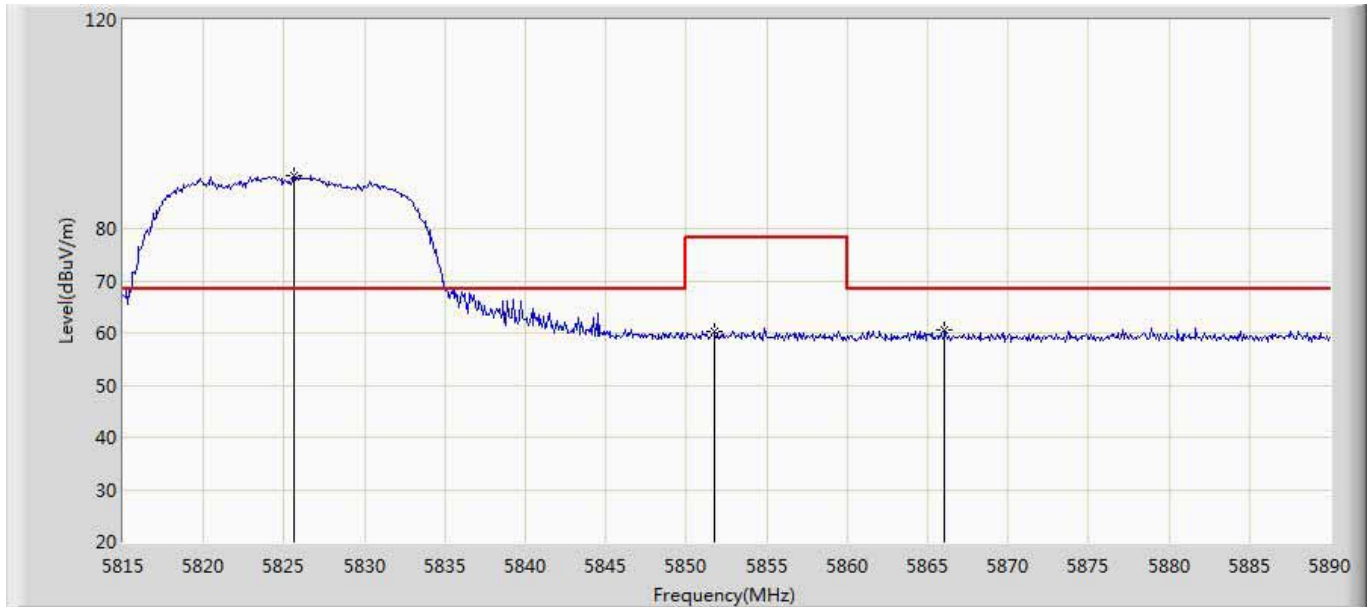

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5825.575	90.200	48.745	N/A	N/A	41.455	PK
2		5851.750	60.313	18.783	-17.987	78.300	41.530	PK
3		5866.075	60.545	18.977	-7.755	68.300	41.568	PK

Engineer: Scott	
Site: AC5	Time: 2015/07/31 - 10:23
Limit: FCC-15.407 new	Margin: 0
Probe: Horn_3117_00165315(1-18GHz)	Polarity: Vertical
EUT: DIGITAL VIDEO DOWNLINK	Power: DC 5V
Note: Mode1: Transmit at CH5825 by 802.11a	

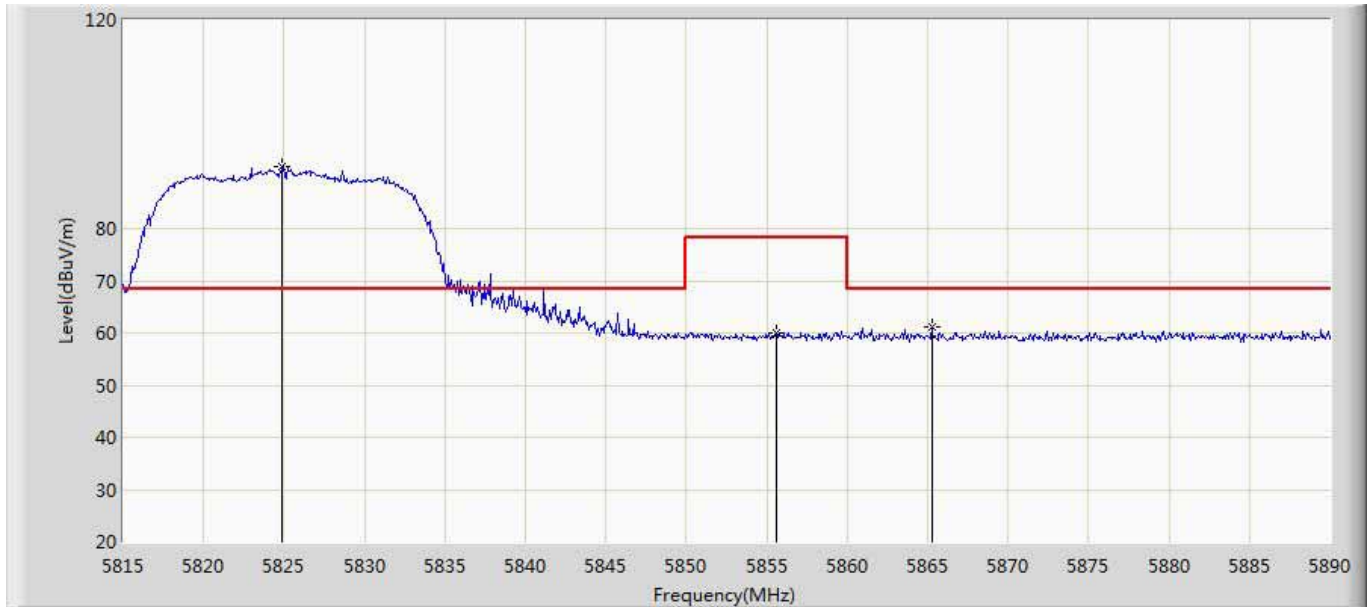

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5824.900	91.952	50.499	N/A	N/A	41.454	PK
2		5855.575	59.928	18.388	-18.372	78.300	41.540	PK
3		5865.250	61.153	19.587	-7.147	68.300	41.566	PK

10. Frequency Stability


10.1. Test Equipment

Frequency Stability / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.07
AC Power Supply	IDRC	CF-500TP	979422	2015.09.16
DC Power Supply	IDRC	CD-035-020PR	977272	2015.09.16 </td
Programmable Temperature & Humidity Chamber	Gaoyu	TH-1P-B	WIT-05121302	2016.01.07
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

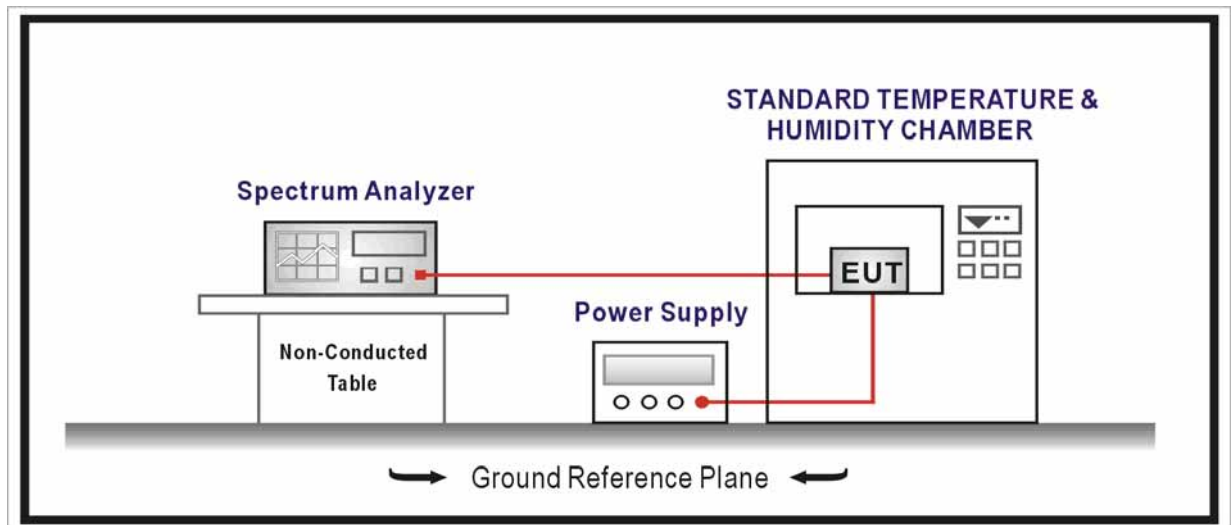

10.3. Limit

For FCC&IC

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.4. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

10.5. Uncertainty

The measurement uncertainty is defined as ± 100 Hz

10.6. Test Result

Product	:	DIGITAL VIDEO DOWNLINK
Test Item	:	Frequency Stability
Test Site	:	TR-8
Test Mode	:	Carrier Transmit

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)
-30	5805.000	-130
-20	5805.000	136
-10	5805.000	-102
0	5805.000	-123
10	5805.000	119
20	5805.000	118
30	5805.000	131
40	5805.000	141
50	5805.000	-101

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)
4.5	5805.000	104
5.0	5805.000	-108
5.5	5805.000	120

_____ The End _____