

FCC Radio Test Report

For

Product Name: Radio Controller

Brand Name: YUNEEC

Model No.: ST10*****

(The “*” can be 0 to 9, a to z, A to Z, blank or any symbol, for marketing purpose.)

Series Model: N/A

FCC ID: 2ACS5-ST10P

Test Report Number:

C150227R01-RPW

Issued for

Yuneecc Technology Co., Limited

2/F Man Shung Industrial Building, 7 Lai Yip Street, Kwun Tong

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	April 8, 2015	C150227R01-RPW	ALL	N/A
01	April 15, 2015	C150227R01-RPW	P20	Add the average power and duty cycle data on page20

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION.....	4
2.	EUT DESCRIPTION.....	5
3.	TEST METHODOLOGY	6
3.1.	EUT CONFIGURATION	6
3.2.	EUT EXERCISE	6
3.3.	GENERAL TEST PROCEDURES.....	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5.	DESCRIPTION OF TEST MODES.....	8
3.6.	ANTENNA DESCRIPTION	8
4.	INSTRUMENT CALIBRATION.....	9
4.1.	MEASURING INSTRUMENT CALIBRATION	9
5.	FACILITIES AND ACCREDITATIONS	11
5.1.	FACILITIES	11
5.2.	EQUIPMENT.....	11
5.3.	LABORATORY ACCREDITATIONS AND LISTING	11
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS	12
6.	SETUP OF EQUIPMENT UNDER TEST	13
6.1.	SETUP CONFIGURATION OF EUT	13
6.2.	SUPPORT EQUIPMENT.....	13
7.	FCC PART 15.247 REQUIREMENTS.....	14
7.1.	6DB BANDWIDTH MEASUREMENT.....	14
7.2.	99% BANDWIDTH MEASUREMENT.....	17
7.3.	PEAK POWER	19
7.4.	PEAK POWER SPECTRAL DENSITY	21
7.5.	SPURIOUS EMISSIONS	24
7.6.	RADIATED EMISSIONS	31
7.7.	POWERLINE CONDUCTED EMISSIONS	39

1. TEST RESULT CERTIFICATION

Product Name:	Radio Controller
Trade Name:	YUNEEC
Model Name.:	ST10***** (The “*” can be 0 to 9, a to z, A to Z, blank or any symbol, for marketing purpose.)
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Mobile unit
Date of Test:	March 21,2015 –April 15, 2015
Applicant:	Yuneecc Technology Co., Limited 2/F Man Shung Industrial Building, 7 Lai Yip Street, Kwun Tong
Manufacturer:	Good Power Technology Co., Ltd. No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Jeff.Fang
RF Manager
Compliance Certification Service Inc.

Tested by:



James.Yan
Test Engineer
Compliance Certification Service Inc.

2. EUT DESCRIPTION

Product Name:	Radio Controller
Brand Name:	YUNEEC
Model Name:	ST10***** (The "*" can be 0 to 9, a to z, A to Z, blank or any symbol, for marketing purpose.)
Series Model:	N/A
Model Discrepancy:	N/A
Hardware Version	N/A
Software Version	N/A
Power Adapter Power Rating :	Power supply and ADP(rating): Model No: CYSK05-050100 Brand Name: N/A Input: AC100-240V, 50/60Hz, 0.15A Output: DC5V 1000mA Battery(rating): Model No.: YP-3 Brand Name: YUNEEC Capacitance: 5200mAh Rated Voltage: 3.6v
Frequency Range:	2405 ~ 2480MHz
Transmit Power:	Channel 2440: 17.78 dBm
Modulation Technique:	DSSS (O-QPSK)
Number of Channels:	16 Channels
Antenna Specification:	Dipole Antenna for 2.4GHz Gain 0 dBi

Remark:

- 1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for **FCC ID: 2ACS5-ST10P** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 2009 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1.EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2.EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3.GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 2009.

3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5.DESCRPTION OF TEST MODES

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Both chain1 and chain2 could be used as transmit/receiving antenna, but only one of them could transmit/receive at the same time. After the preliminary san chains and the worst mode chain1 was recorded.


The worst-case data are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all channel, bandwidths, and modulations.

3.6.ANTENNA DESCRIPTION

According to FCC 47 CFR 15.203

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

- * the antenna of this EUT is a unique(Dipole Antenna for zigbee).
- * the EUT complies with the requirement of 15.203.

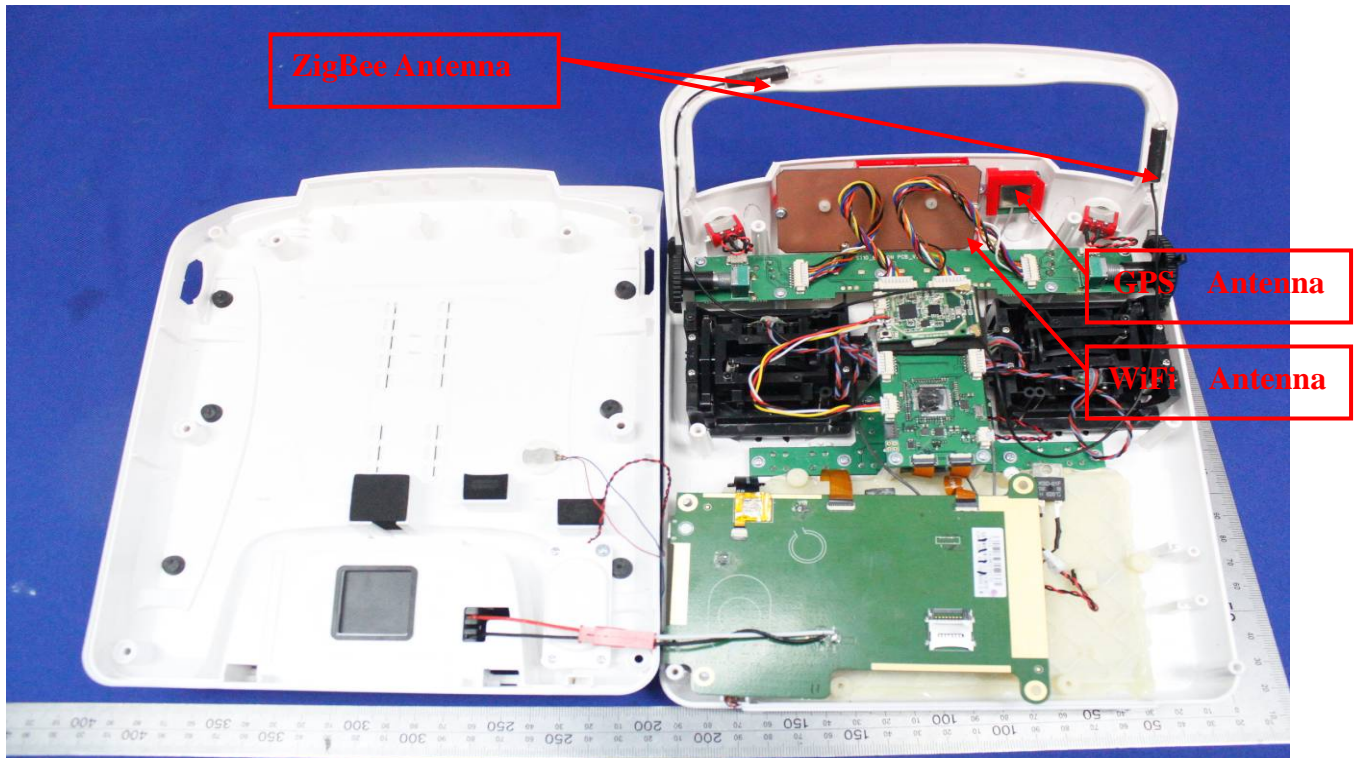

4. INSTRUMENT CALIBRATION

4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2016-4-8
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2016-3-15
MIMO Power Measurement Test Set	Agilent	U2021XA	MY53120005	2015-7-3
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2016-1-21
Test Software	EZ-EMC			

977 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9
EMI Test Receiver	R&S	ESCI	101378	2016-1-21
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2016-1-21
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2016-1-21
Bilog Antenna	Sunol	JB1	A062604	2016-3-5
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2016-3-6
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Test Software	EZ-EMC			

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2016-3-15
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	05012	2016-3-15
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24
Test Software	EZ-EMC			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

5. FACILITIES AND ACCREDITATIONS

5.1.FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 2009 and CISPR Publication 22.

5.2.EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.



Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3.LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.

5.4. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4 :2009); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC DOC
1.	N/A				

Remark:

2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1. 6DB BANDWIDTH MEASUREMENT

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

1. The transmitter output is connected to the spectrum analyzer. Set RBW = 100 kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Sweep = auto couple.

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2405	1.554	0.5
Mid	2440	1.600	0.5
High	2480	1.585	0.5

Test Plot

6dB Bandwidth (CH Low)

Agilent

R T

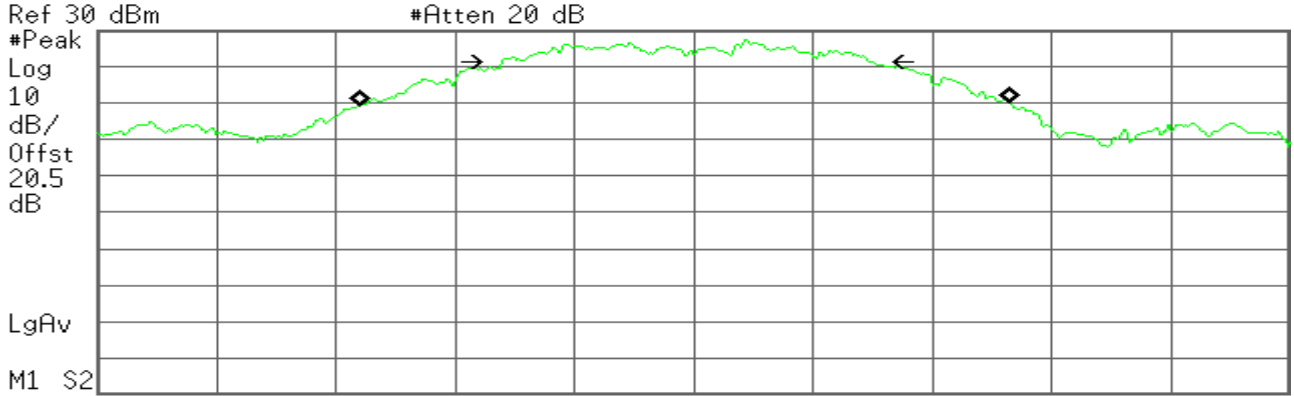

Occupied Bandwidth
2.7236 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -35.576 kHz
x dB Bandwidth 1.554 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

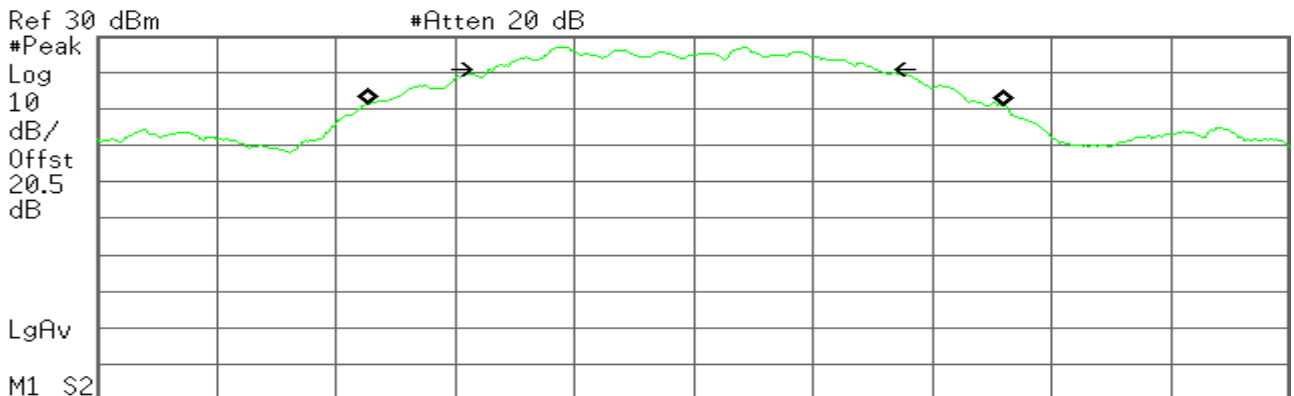

Occupied Bandwidth
2.6619 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -32.410 kHz
x dB Bandwidth 1.600 MHz

6dB Bandwidth (CH High)

Agilent

R T

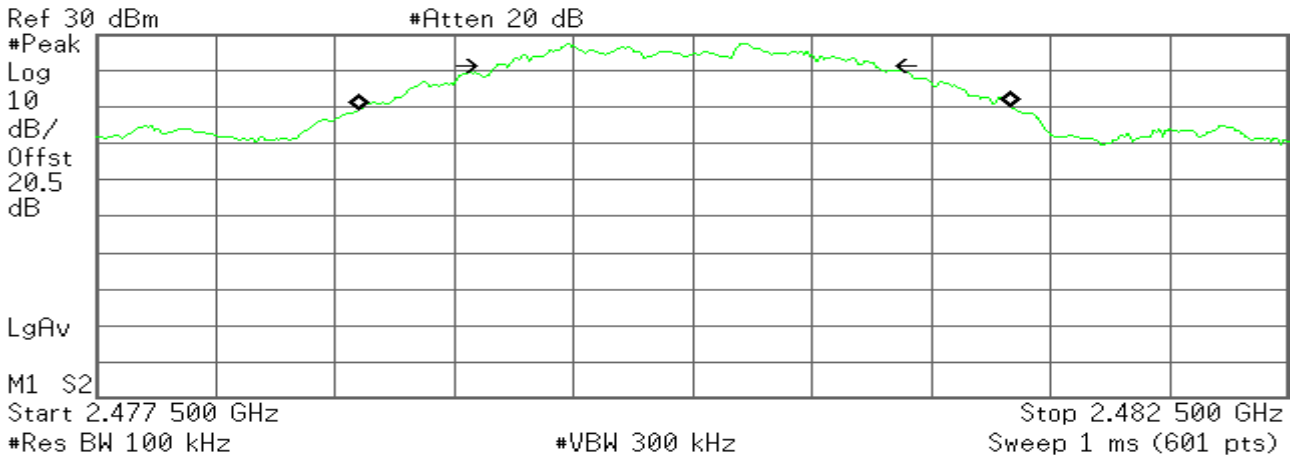

Occupied Bandwidth
2.7351 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -31.047 kHz
x dB Bandwidth 1.585 MHz

7.2.99% BANDWIDTH MEASUREMENT

LIMIT

None; for reporting purposes only
RSS-Gen 4.6.1

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to close to 1% of the selected span as is possible without being below 1%.The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

test results

No non-compliance noted


Test Data

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	99% Bandwidth Min. Limit(MHz)
Low	2405	2.779	0.5
Mid	2440	2.725	0.5
High	2480	2.765	0.5

Test Plot

Agilent

R T

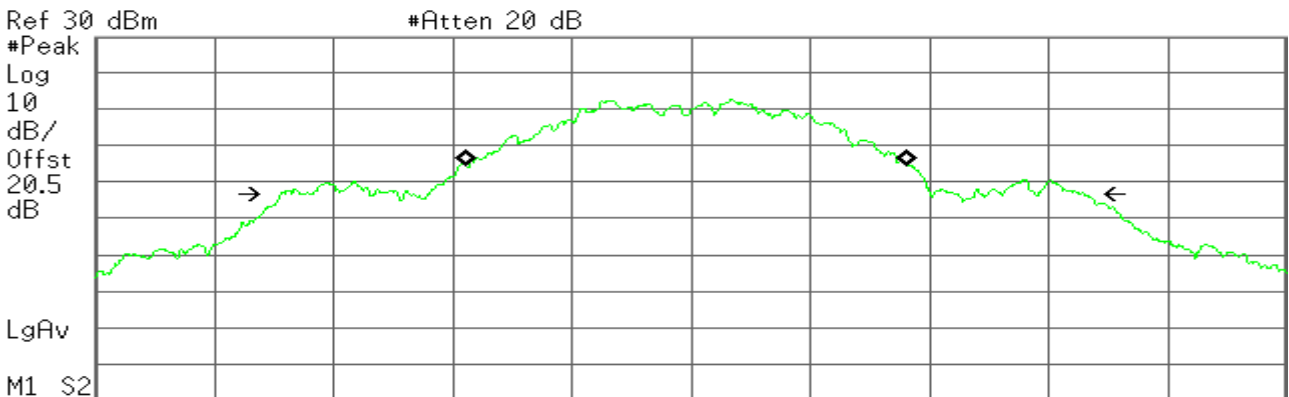

Center 2.405 000 0 GHz

Span 7.5 MHz

#Res BW 75 kHz

#VBW 220 kHz

Sweep 1.333 ms (1001 pts)


Occupied Bandwidth
2.7786 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -29.252 kHz
x dB Bandwidth 5.058 MHz

* Agilent

R T

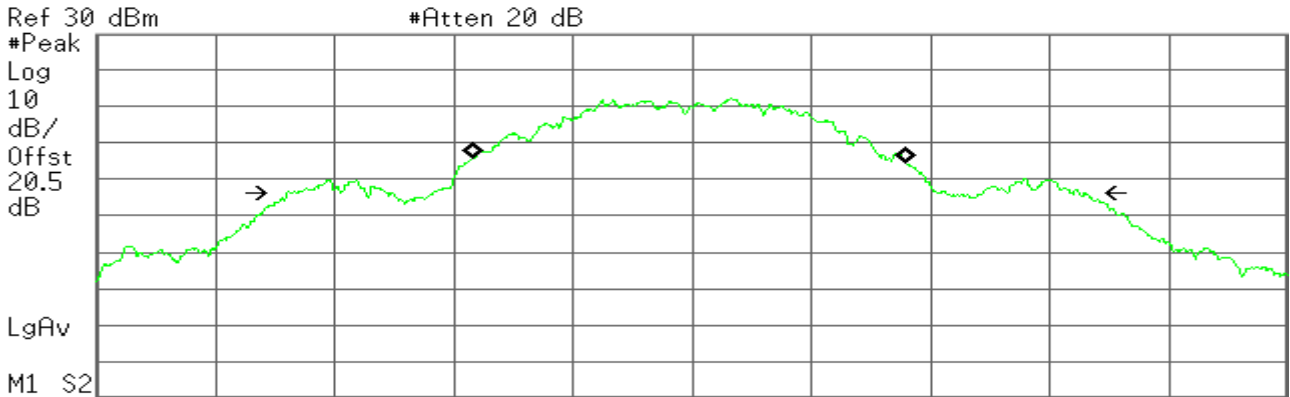

Center 2.440 000 0 GHz

Span 7.5 MHz

#Res BW 75 kHz


#VBW 220 kHz

Sweep 1.333 ms (1001 pts)

Occupied Bandwidth
2.7251 MHz**Occ BW % Pwr** 99.00 %
x dB -26.00 dB**Transmit Freq Error** -20.860 kHz
x dB Bandwidth 5.035 MHz

* Agilent

R T

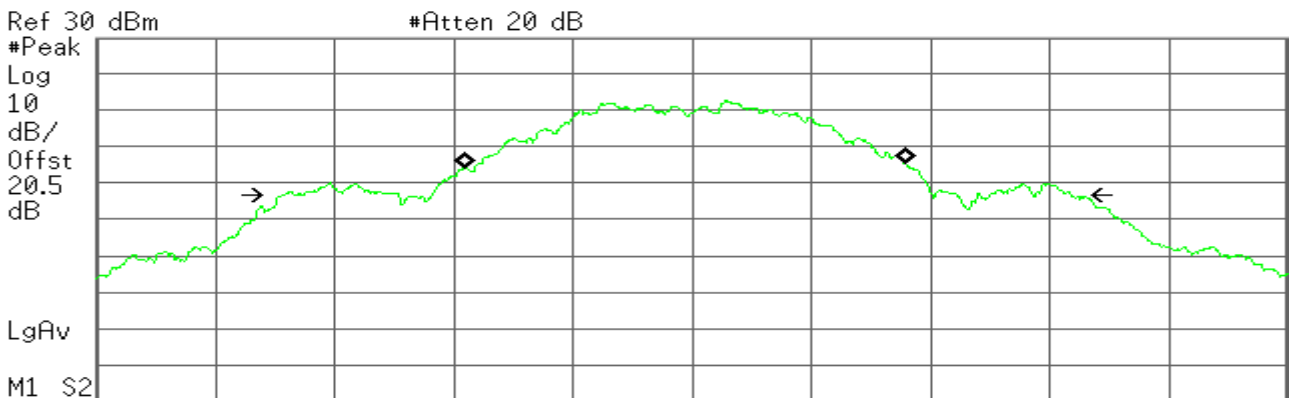

Center 2.480 000 0 GHz

Span 7.5 MHz

#Res BW 75 kHz

#VBW 220 kHz

Sweep 1.333 ms (1001 pts)

Occupied Bandwidth
2.7649 MHz**Occ BW % Pwr** 99.00 %
x dB -26.00 dB**Transmit Freq Error** -38.989 kHz
x dB Bandwidth 4.961 MHz

7.3. PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.

2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

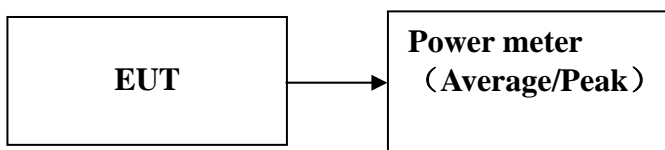

TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v03r02. 9.1.2 PKPM1 Peak power meter method.

TEST RESULTS*No non-compliance noted***Test Data**

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2405	17.67	30
Mid	2440	17.78	30
High	2480	17.41	30

Average Power Test Data

Channel	Frequency (MHz)	Conducted Average Power (dBm)	Limit (dBm)
Low	2405	15.94	N/A
Mid	2440	16.03	N/A
High	2480	15.86	N/A

Note: The duty cycle of the EUT is 5.28%

7.4. PEAK POWER SPECTRAL DENSITY


LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (18

d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto

3. Record the max reading.

4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Test mode:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2405	6.21	8.00	PASS
Mid	2440	6.05	8.00	PASS
High	2480	6.54	8.00	PASS

Test Plot

PPSD (CH Low)

 **Agilent**

R T

Mkr1 2.404 915 6 GHz
6.21 dBm


Ref 30 dBm

#Atten 20 dB

#Peak
Log
10
dB/
Offst
20.5
dB

LgAv

M1 S2
S3 FC
A AA
£(f):
f>50k
Swp

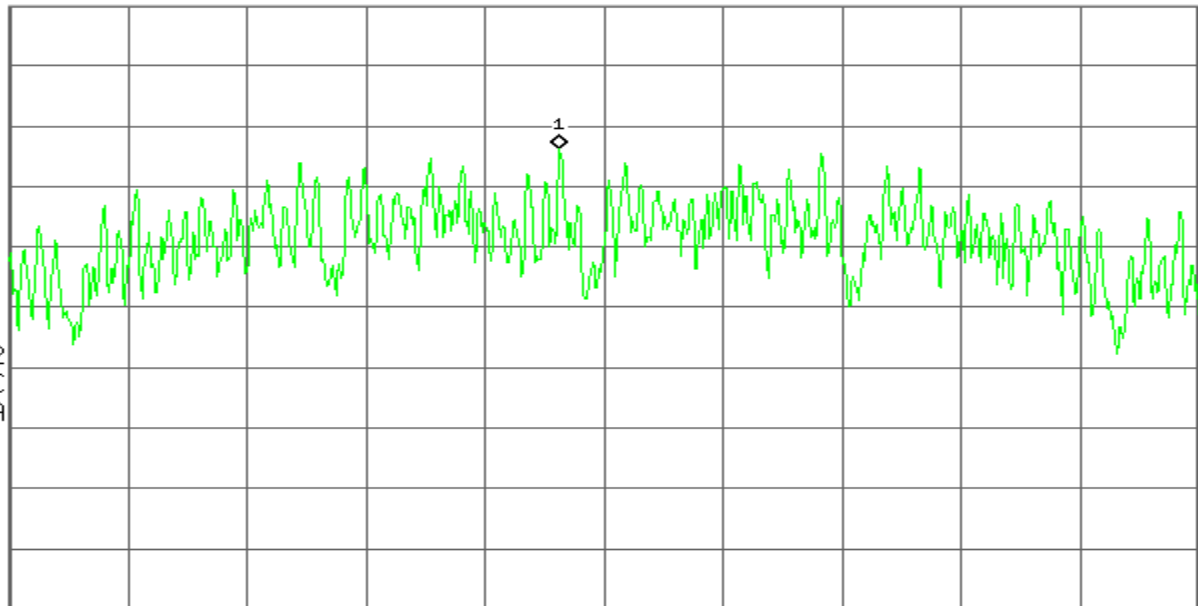

Center 2.405 000 0 GHz

Span 2.40 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 240.5 ms (1001 pts)

PPSD (CH Mid)

 **Agilent**

R T

Mkr1 2.439 902 0 GHz
6.05 dBm


Ref 30 dBm

#Atten 20 dB

#Peak
Log
10
dB/
Offst
20.5
dB

LgAv

M1 S2
S3 FC
A AA
£(f):
f>50k
Swp

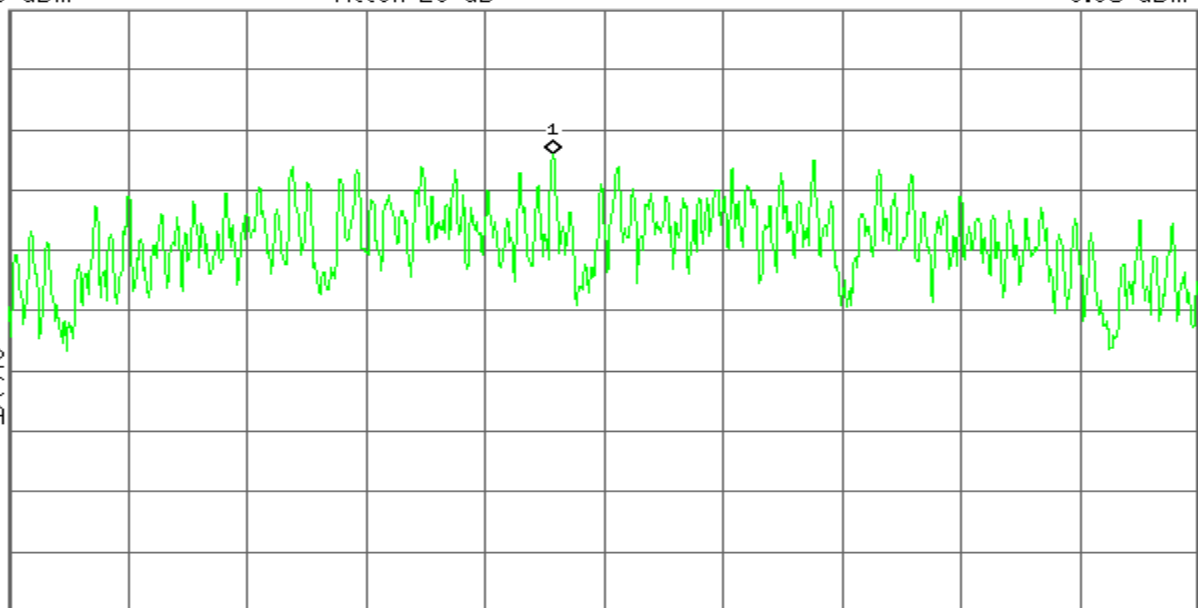

Center 2.440 000 0 GHz

Span 2.40 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 240.5 ms (1001 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.479 913 4 GHz
6.54 dBm

Ref 30 dBm


#Atten 20 dB

#Peak
Log
10
dB/
Offst
20.5
dB

LgAv

M1 S2
S3 FC
A AA

f(f):
f>50k
Swp

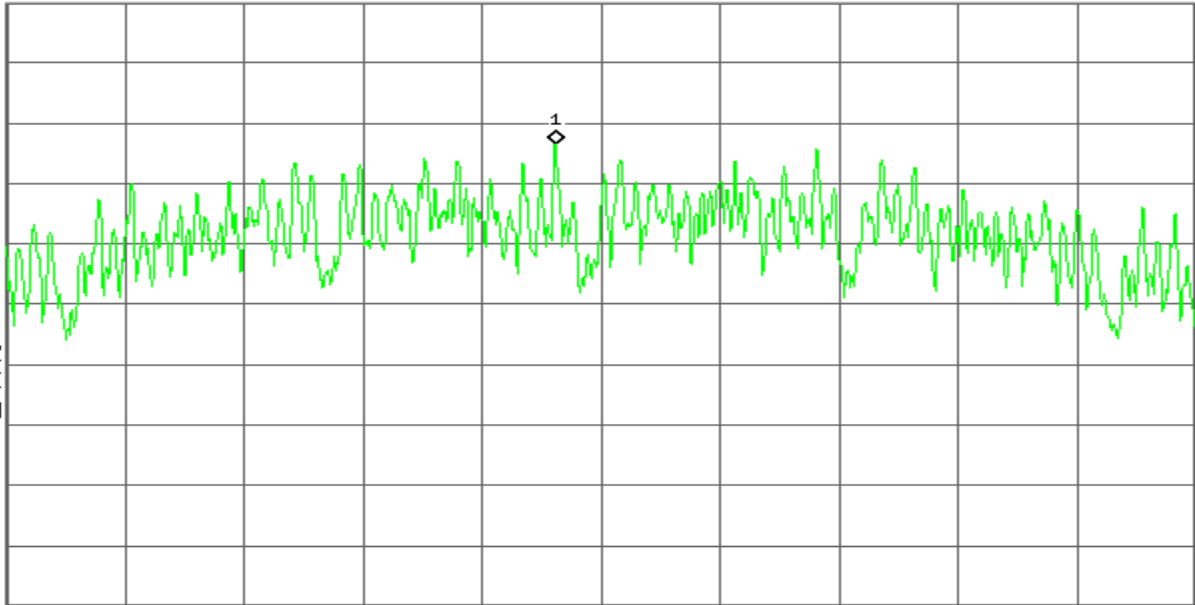

Center 2.480 000 0 GHz

Span 2.40 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 240.5 ms (1001 pts)


7.5.SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

Test Plot


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

CH Low

Agilent

R T

Mkr1 2.405 296 4 GHz
14.10 dBm

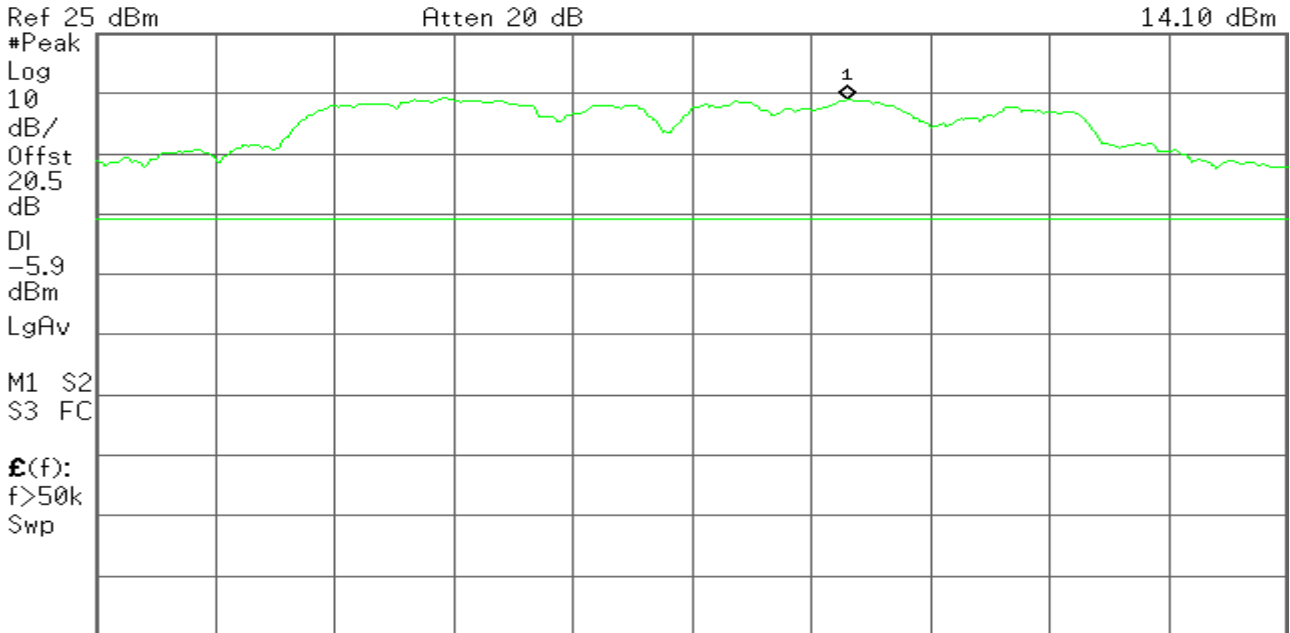


Center 2.405 000 00 GHz Span 2.40 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 1 ms (601 pts)

Agilent

R T

Mkr1 2.400 0 GHz
-39.75 dBm

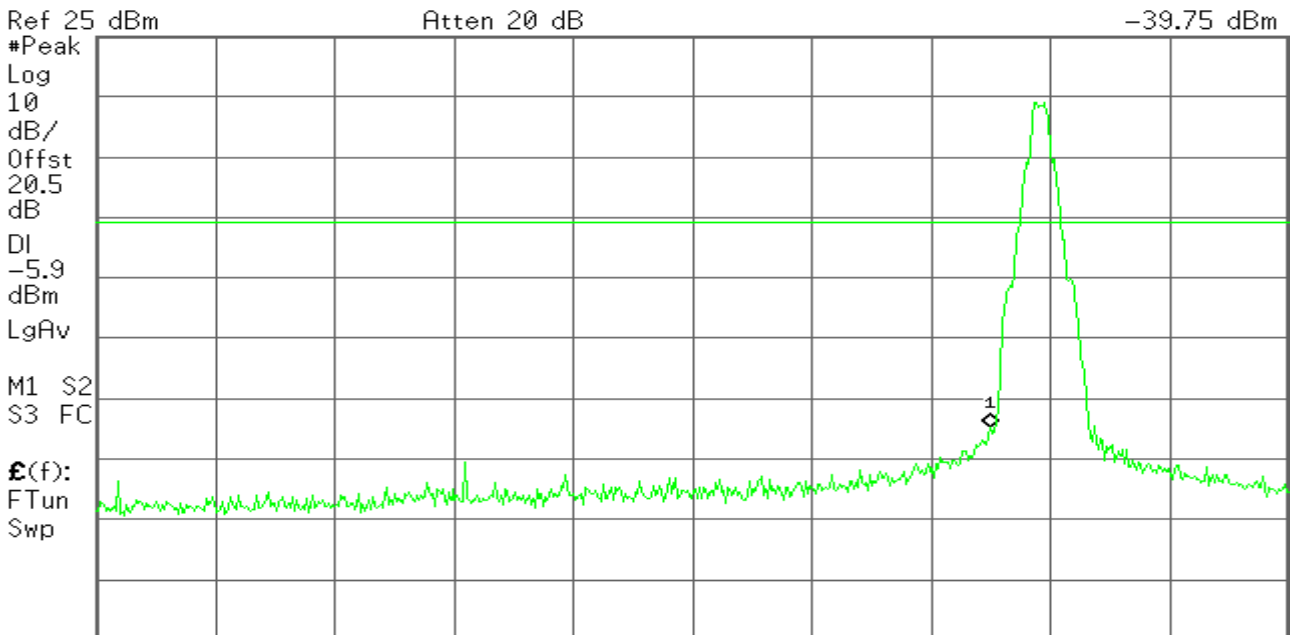

Start 2.310 0 GHz Stop 2.430 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 44.16 ms (601 pts)

* Agilent

R T

Mkr1 695.0 MHz
-51.72 dBm

Ref 25 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-5.9

dBm

LgAv


M1 S2

S3 FC

E(f):

FTun

Swp

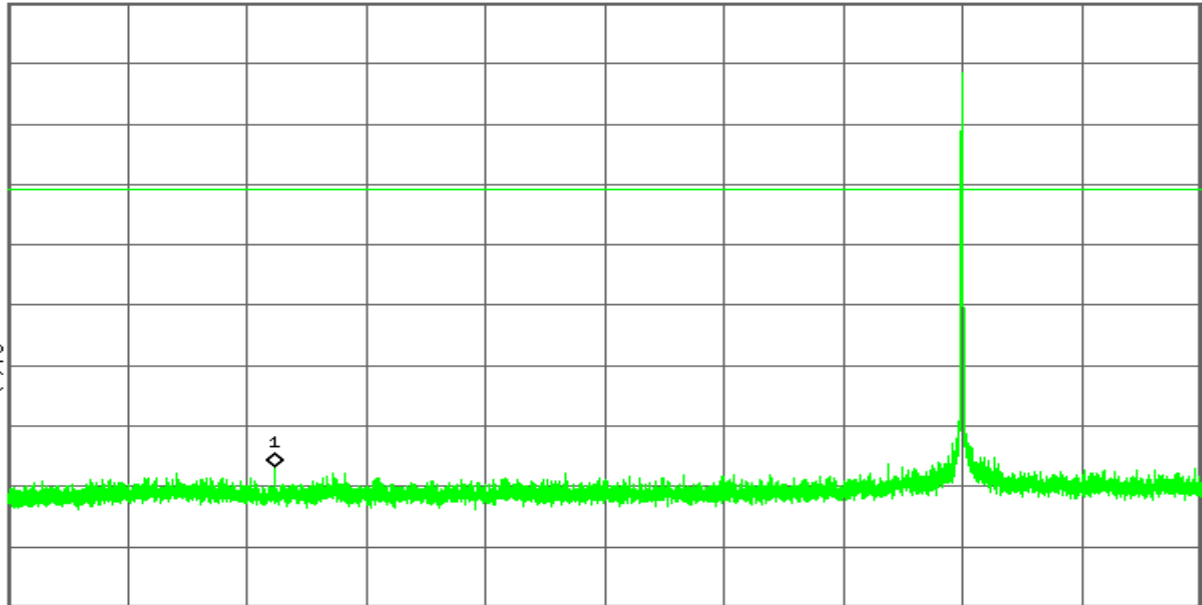

Start 30.00 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 3.000 00 GHz

Sweep 1.093 s (8192 pts)

* Agilent

R T

Mkr1 24.104 3 GHz
-44.95 dBm

Ref 25 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-5.9

dBm

LgAv


M1 S2

S3 FC

E(f):

FTun

Swp

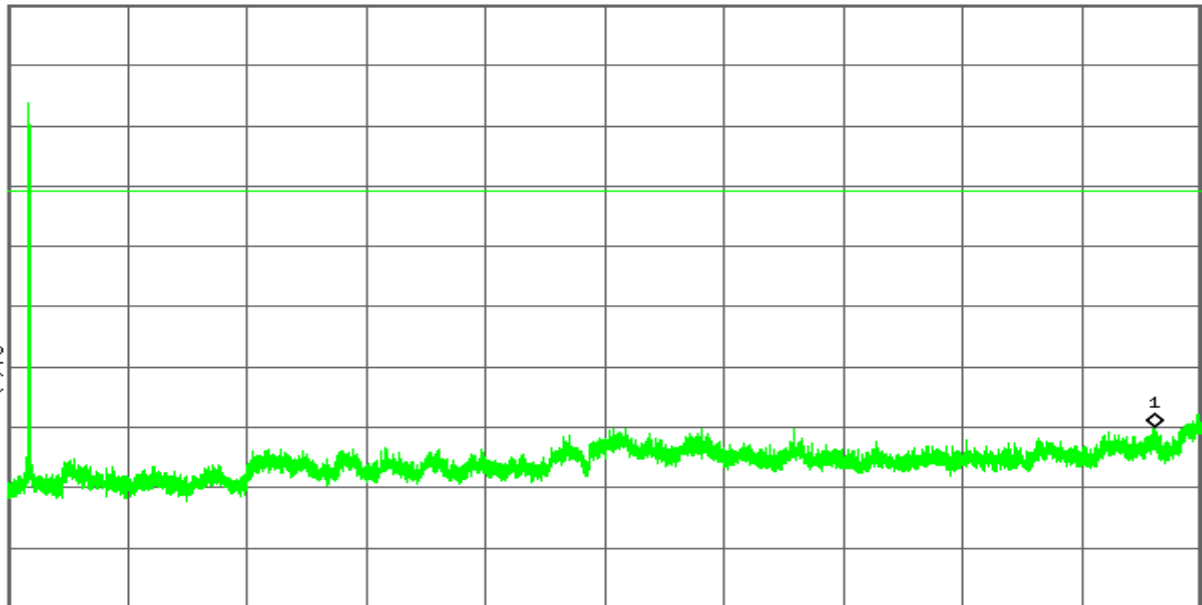

Start 2.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz

Sweep 8.464 s (8192 pts)

CH Mid

Agilent

R T

Mkr1 2.440 273 6 GHz
15.78 dBm


Ref 25 dBm

Atten 20 dB

#Peak
Log
10
dB/
Offst
20.5
dB
DI
-4.2
dBm
LgAv

M1 S2
S3 FC

£(f):
f>50k
Swp

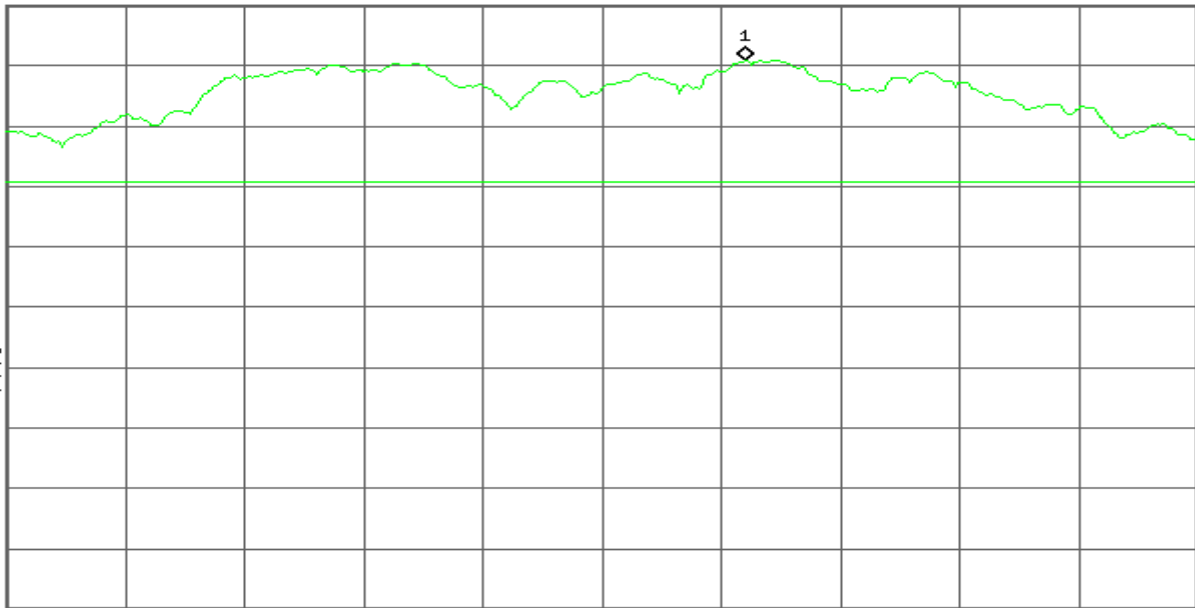

Center 2.440 000 0 GHz

Span 2.40 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1 ms (601 pts)

Agilent

R T

Mkr1 1.033 3 GHz
-51.95 dBm


Ref 25 dBm

Atten 20 dB

#Peak
Log
10
dB/
Offst
20.5
dB
DI
-4.2
dBm
LgAv

M1 S2
S3 FC

£(f):
FTun
Swp

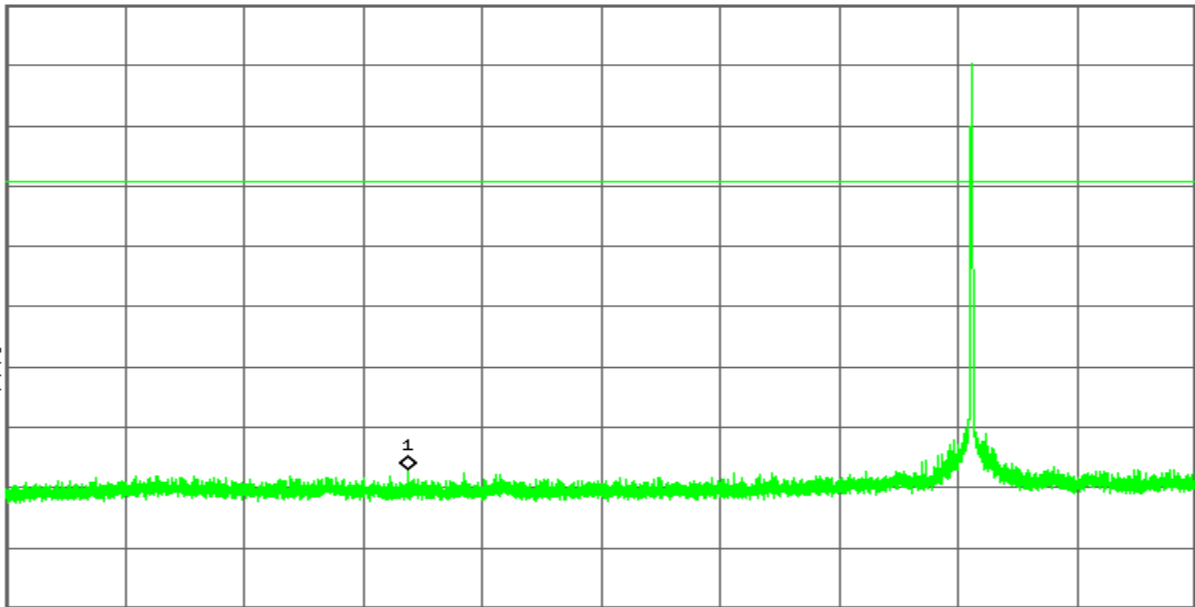

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 1.093 s (8192 pts)

Agilent

R T

Mkr1 13.712 0 GHz
-44.61 dBm

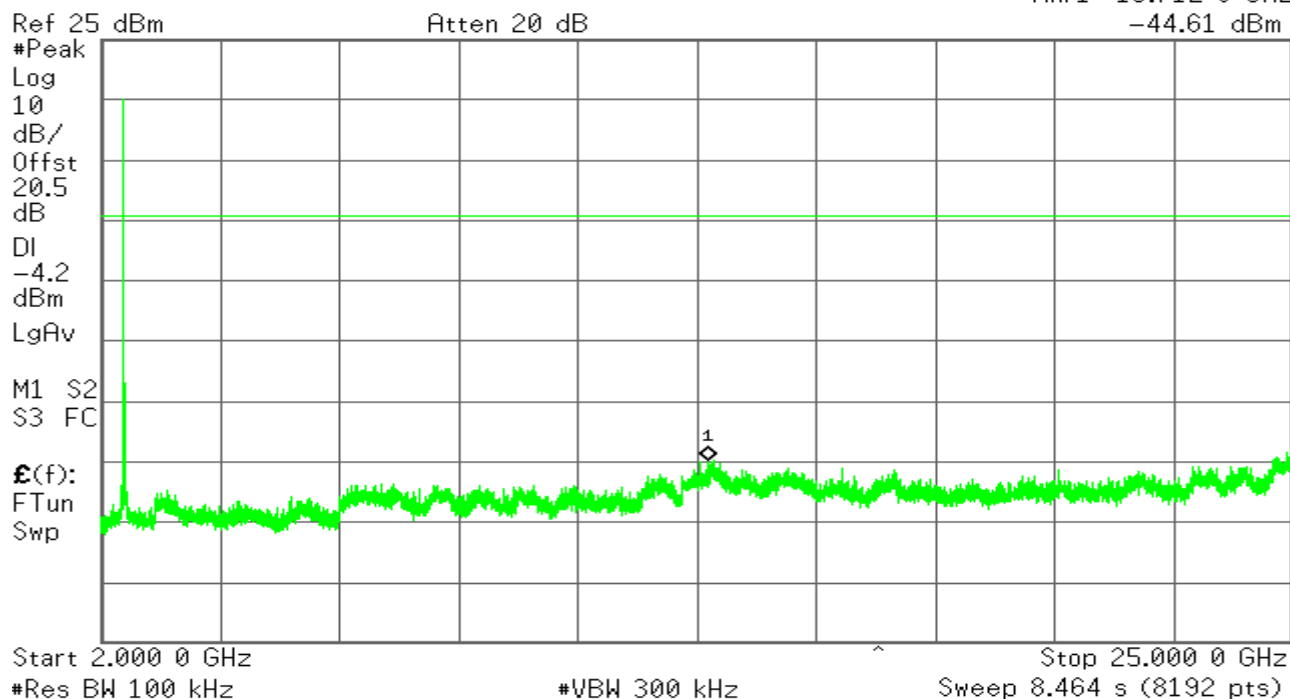




CH High

Agilent

R T

Mkr1 2.475 323 0 GHz
17.16 dBm

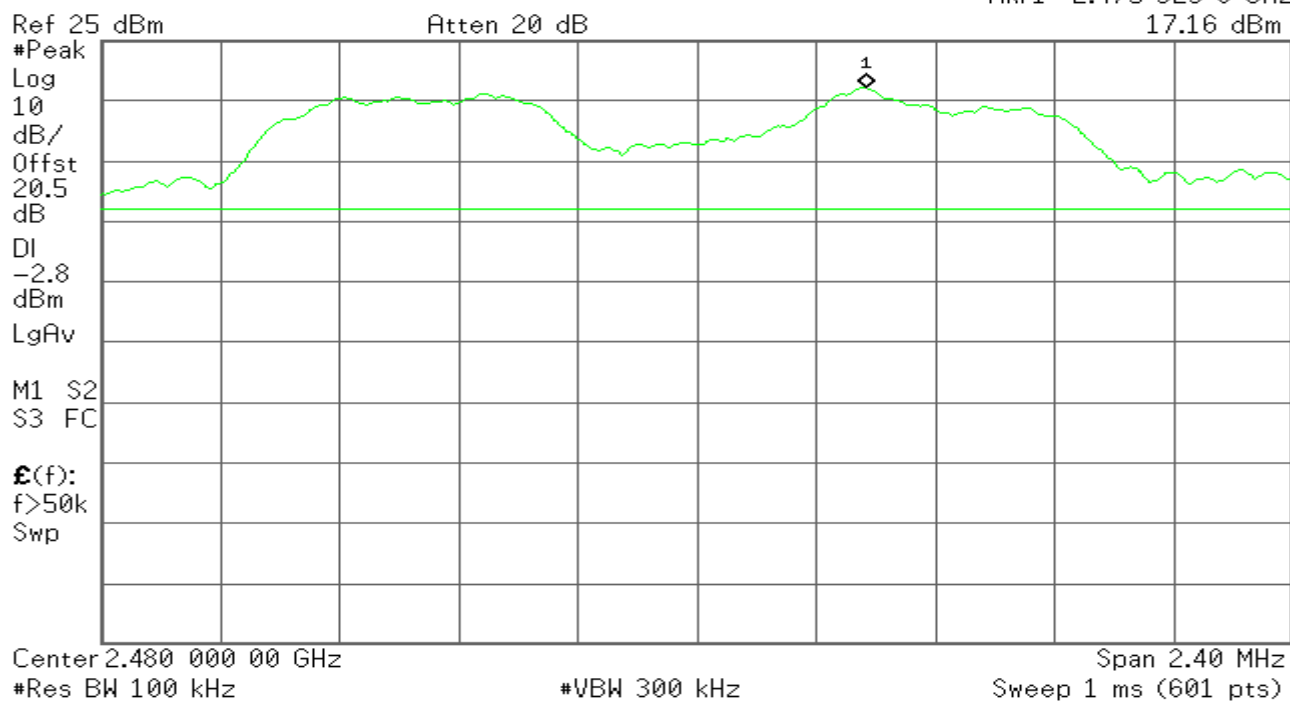

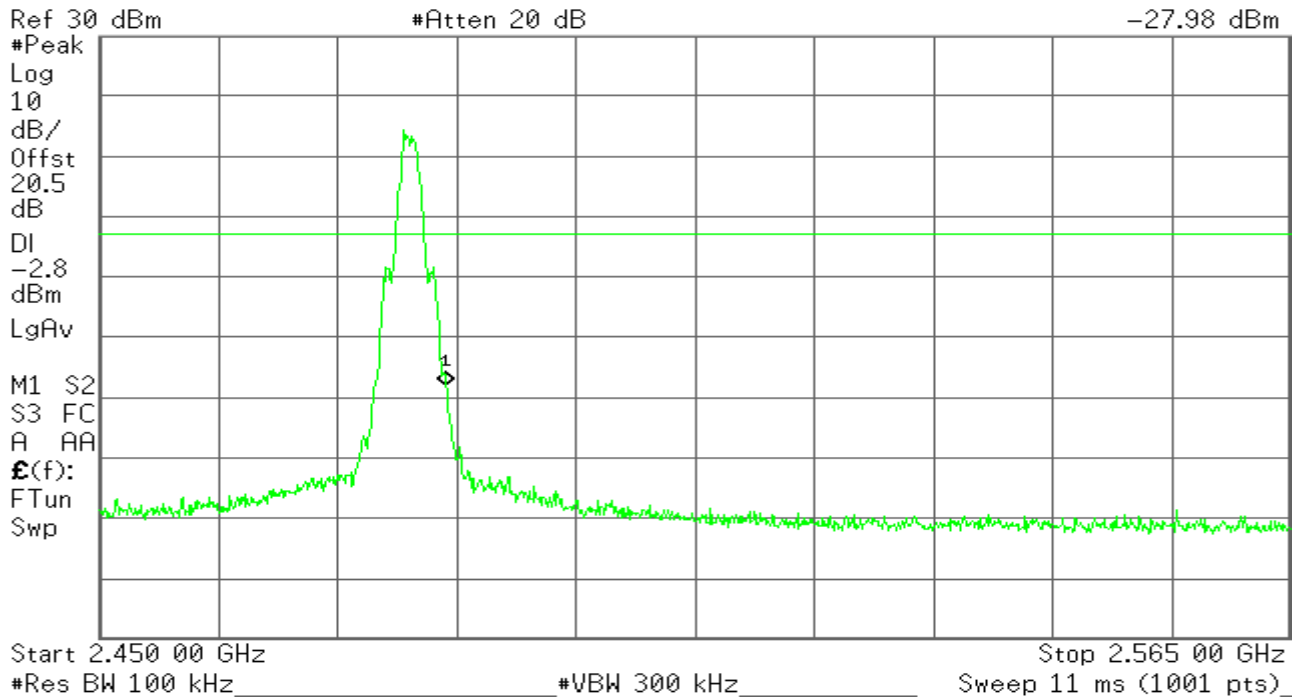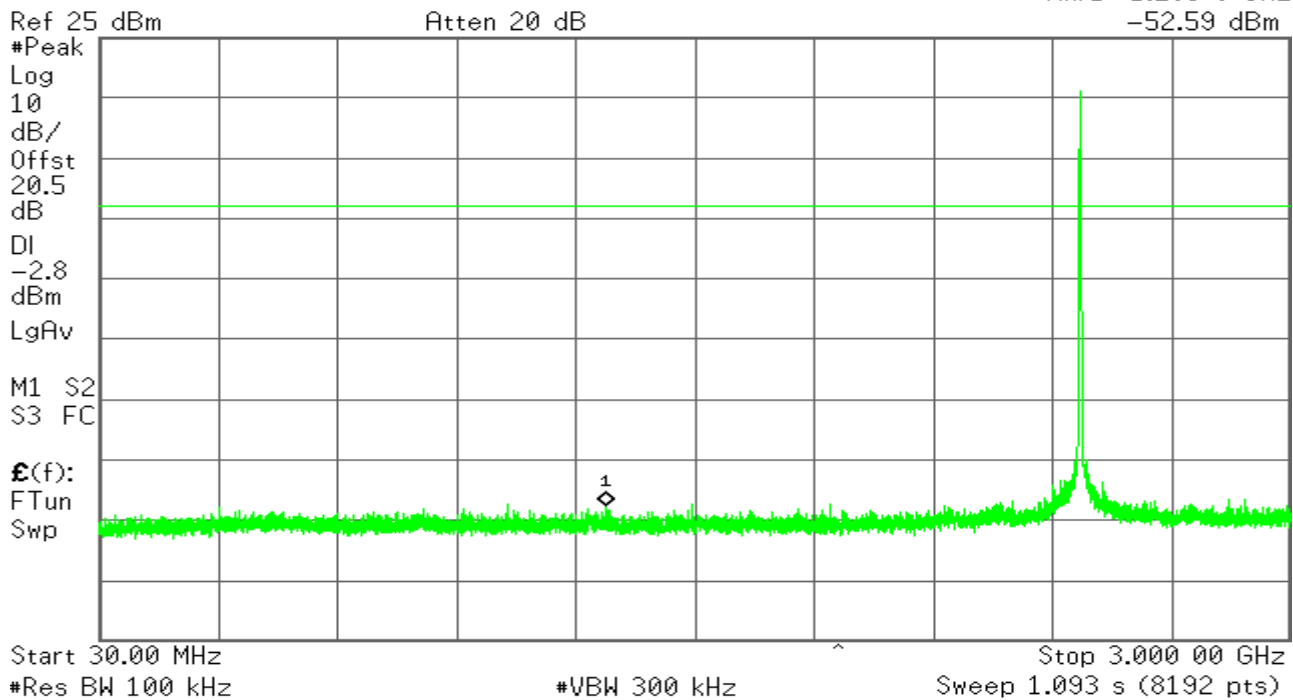Agilent**R T**Mkr1 2.483 50 GHz
-27.98 dBm**Agilent****R T**Mkr1 1.293 6 GHz
-52.59 dBm

* Agilent

R T

Mkr1 23.183 2 GHz
-44.60 dBm

Ref 25 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-2.8

dBm

LgAv


M1 S2

S3 FC

E(f):

FTun

Swp

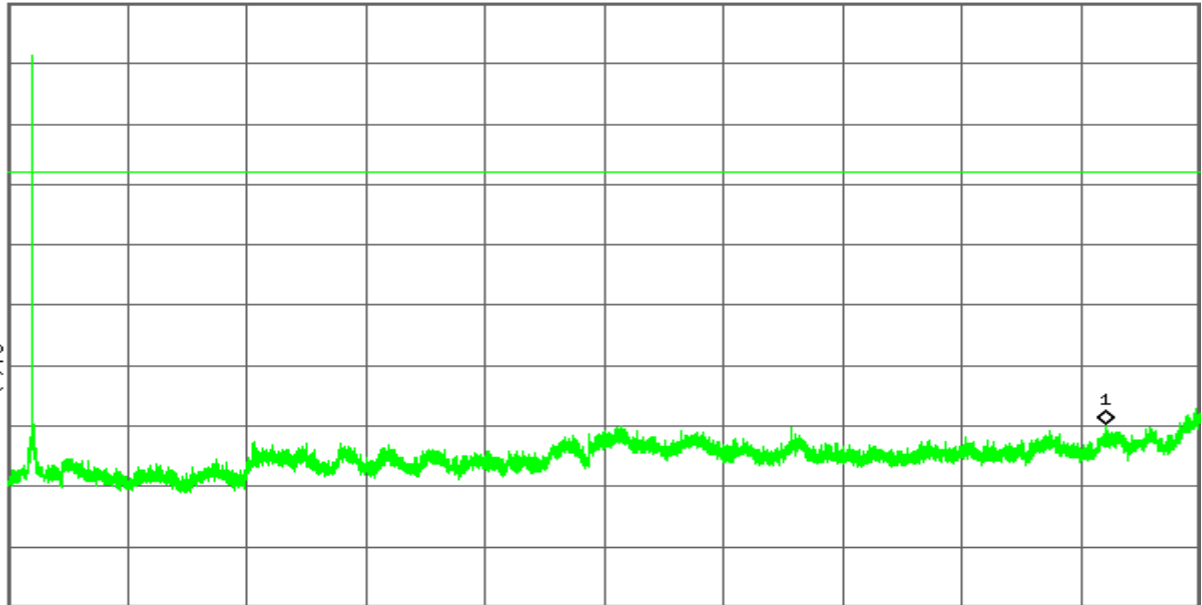

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 8.464 s (8192 pts)

7.6.RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2.In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

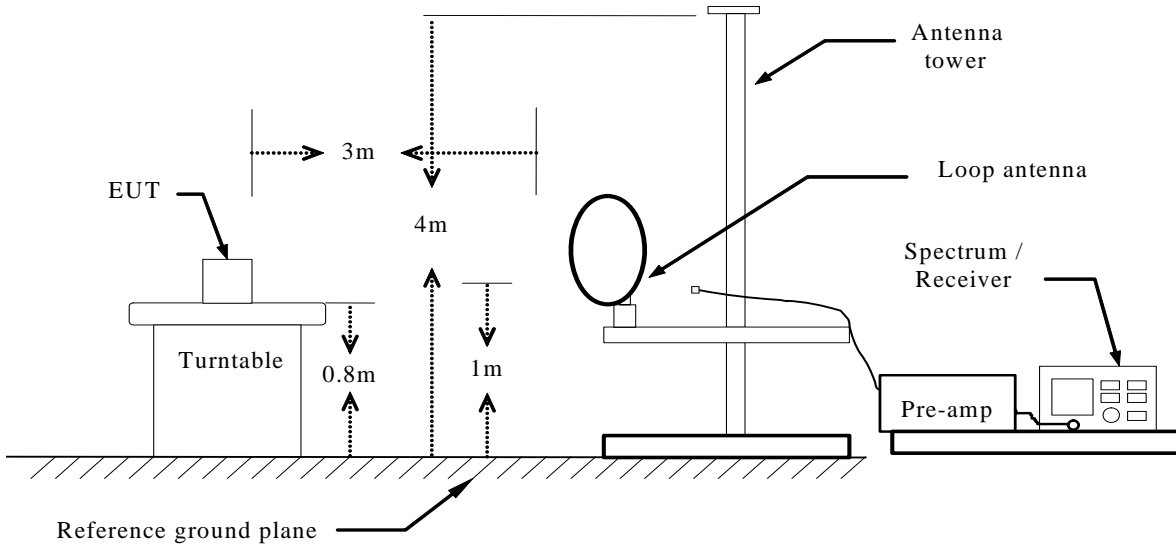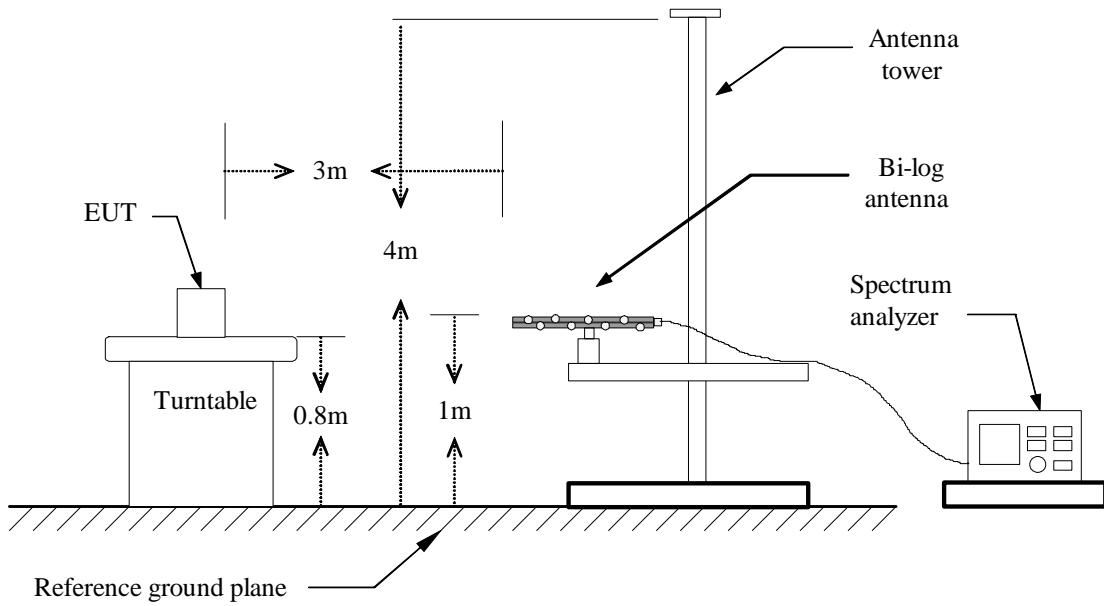Below 30MHz**Below 1 GHz**

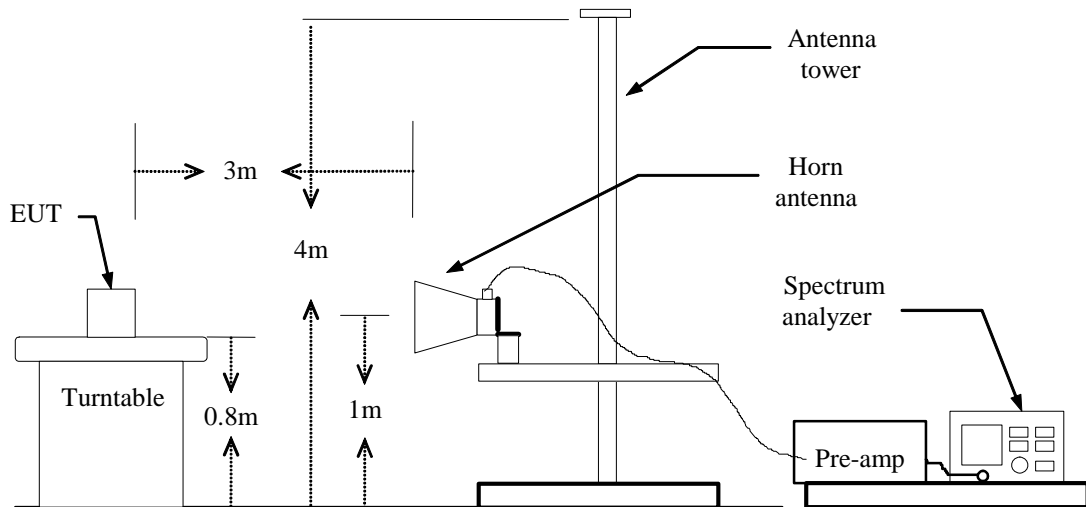Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


PEAK: RBW=VBW=1MHz / Sweep=AUTO, PEAK DETECTOR

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO, PEAK DETECTOR

7. Repeat above procedures until the measurements for all frequencies are complete.


TEST RESULTS

RESTRICTED BANDEDGE (Low Channel, Horizontal)

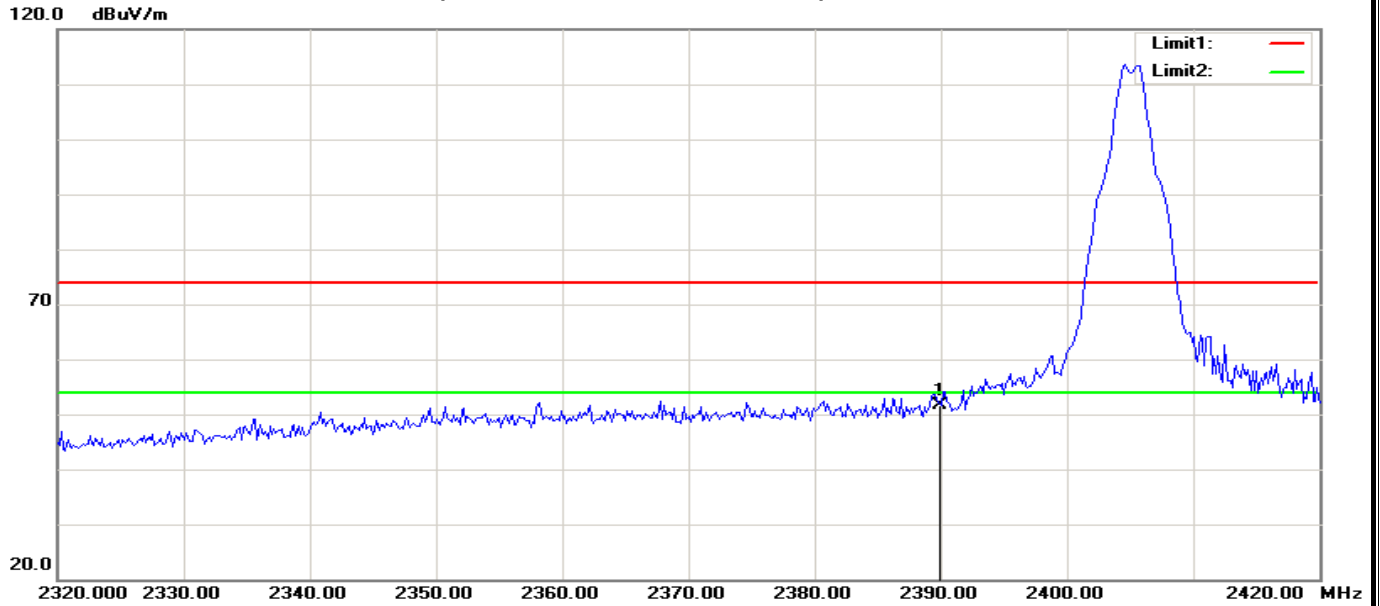


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	56.87	-7.87	49.00	74.00	-25.00	100	239	peak
2	N/A								

RESTRICTED BANDEDGE (Low Channel, Vertical)

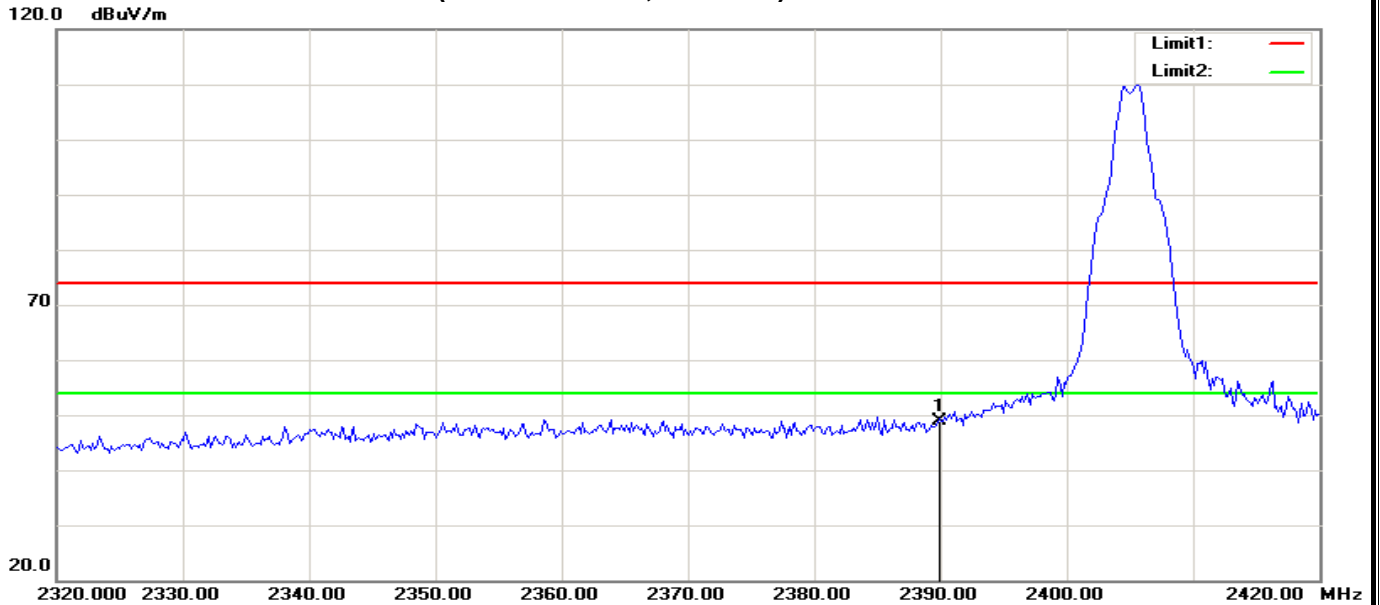


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	59.43	-7.87	51.56	74.00	-22.44	100	358	peak
2	N/A								

RESTRICTED BANDEDGE (High Channel, Horizontal)

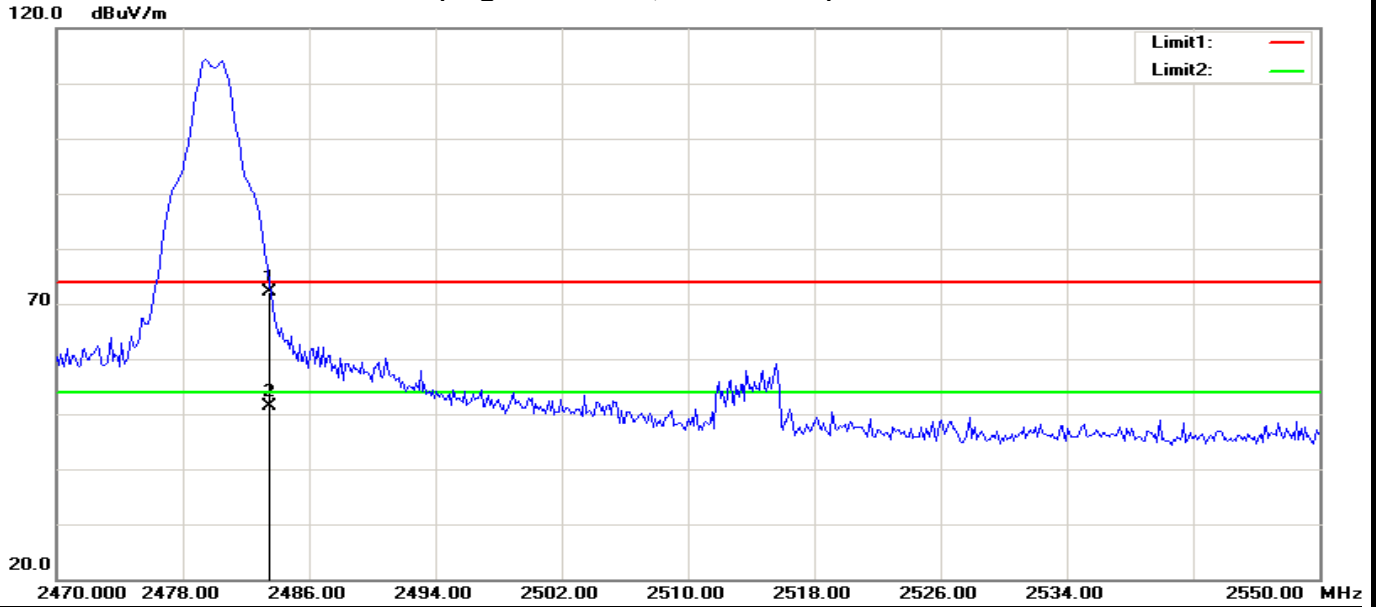

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	79.63	-7.47	72.16	74.00	-1.84	101	0	peak
2	2483.500	58.87	-7.47	51.40	54.00	-2.60	101	0	AVG

RESTRICTED BANDEDGE (High Channel, Vertical)

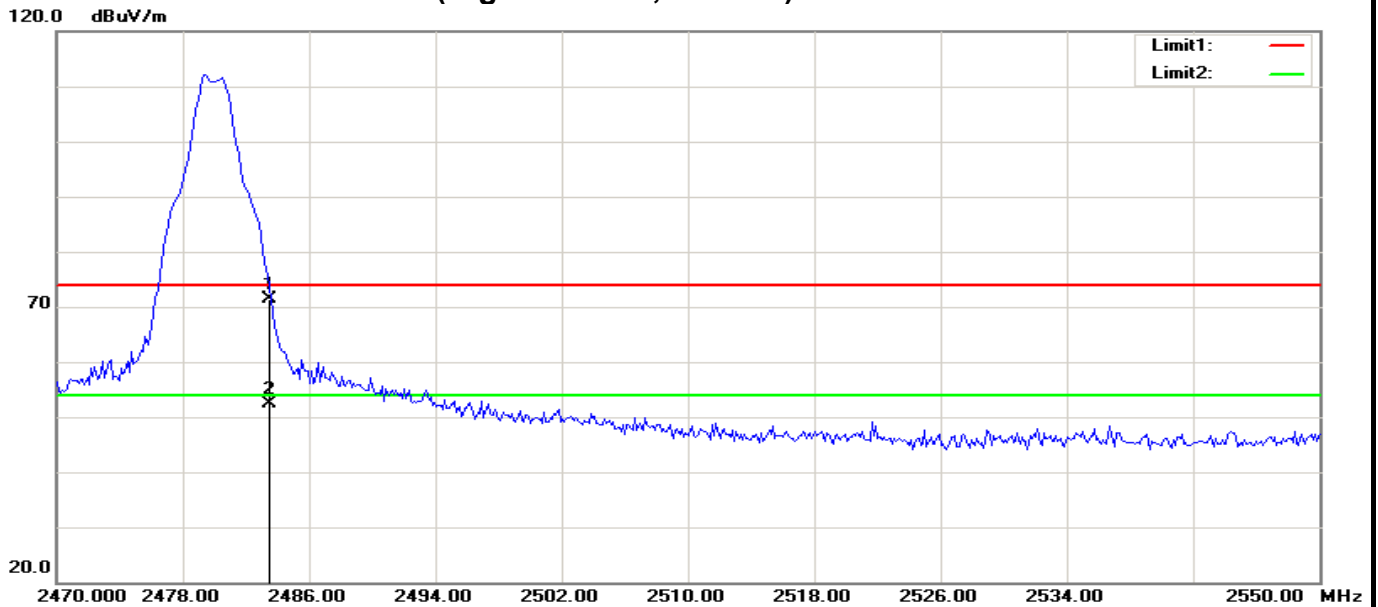

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	78.88	-7.47	71.41	74.00	-2.59	100	191	peak
2	2483.500	59.88	-7.47	52.41	54.00	-1.59	100	192	AVG

Below 1GHz

Operation Mode: Keeping TX

Test Date: 2015-3-23

Temperature: 24°C

Tested by: James.Yan

Humidity: 48% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
43.9904	V	21.91	11.78	33.69	40.00	-6.31	Peak
143.4776	V	21.77	14.76	36.53	43.50	-6.97	Peak
261.6186	V	26.58	12.53	39.11	46.00	-6.89	Peak
642.4679	V	18.92	21.50	40.42	46.00	-5.58	Peak
827.4519	V	19.06	23.00	42.06	46.00	-3.94	Peak
1000.0000	V	17.65	25.43	43.08	54.00	-10.92	Peak
44.5500	H	19.56	14.91	34.47	40.00	-5.53	Peak
67.8300	H	20.86	10.63	31.49	40.00	-8.51	Peak
215.2700	H	15.87	11.99	27.86	43.50	-15.64	Peak
400.5400	H	14.89	19.69	34.58	46.00	-11.42	Peak
600.3600	H	14.29	20.45	34.74	46.00	-11.26	Peak
724.5200	H	13.77	23.33	37.10	46.00	-8.90	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. $Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)$.

Above 1 GHz

Operation Mode: TX / CH Low

Test Date: 2015-3-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4810.944	46.29	-2.82	43.47	54.00	-10.53	100	216	AVG
2	4814.103	59.05	-2.81	56.24	74.00	-17.76	100	211	peak
3	7211.538	58.50	4.85	63.35	74.00	-10.65	100	169	peak
4	7216.251	43.46	4.86	48.32	54.00	-5.68	100	134	AVG
5	9608.974	48.18	7.73	55.91	74.00	-18.09	100	175	peak
6	9621.859	38.31	7.75	46.06	54.00	-7.94	100	162	AVG

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4810.924	48.22	-2.82	45.40	54.00	-8.60	100	99	AVG
2	4814.103	62.16	-2.81	59.35	74.00	-14.65	100	102	peak
3	7211.538	55.64	4.85	60.49	74.00	-13.51	100	279	peak
4	7216.271	41.96	4.86	46.82	54.00	-7.18	100	275	AVG
5	9621.859	37.94	7.75	45.69	54.00	-8.31	100	176	AVG
6	9636.218	48.88	7.77	56.65	74.00	-17.35	100	167	peak

Operation Mode: TX /CH Mid

Test Date: 2015-3-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	50.58	-7.00	43.58	74.00	-30.42	100	214	peak
2	10698.718	43.78	7.81	51.59	74.00	-22.41	100	152	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	53.19	-7.00	46.19	74.00	-27.81	100	26	peak
2	9745.192	46.90	3.88	50.78	74.00	-23.22	100	256	peak
N/A									

Operation Mode: TX /CH High

Test Date: 2015-3-30

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	54.86	-2.35	52.51	74.00	-21.49	100	183	peak
2	4960.921	43.51	-2.31	41.20	54.00	-12.80	100	179	AVG
3	5168.269	60.81	-1.51	59.30	74.00	-14.70	100	5	peak
4	5222.756	62.84	-1.29	61.55	74.00	-12.45	100	3	peak
5	7429.487	53.85	5.06	58.91	74.00	-15.09	100	147	peak
6	7441.253	41.48	5.07	46.55	54.00	-7.45	100	140	AVG

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	59.18	-2.35	56.83	74.00	-17.17	100	100	peak
2	4960.908	46.36	-2.31	44.05	54.00	-9.95	100	104	AVG
3	7429.487	57.42	5.06	62.48	74.00	-11.52	100	162	peak
4	7441.234	42.73	5.07	47.80	54.00	-6.20	100	169	AVG
5	9908.654	46.09	8.12	54.21	74.00	-19.79	100	162	peak
6	9921.843	35.10	8.14	43.24	54.00	-10.76	100	157	AVG

7.7.POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data


Job No.:	C150227R01-RPW	Date:	2015-3-21
Model:	ST10*****	Time:	9:32:29
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

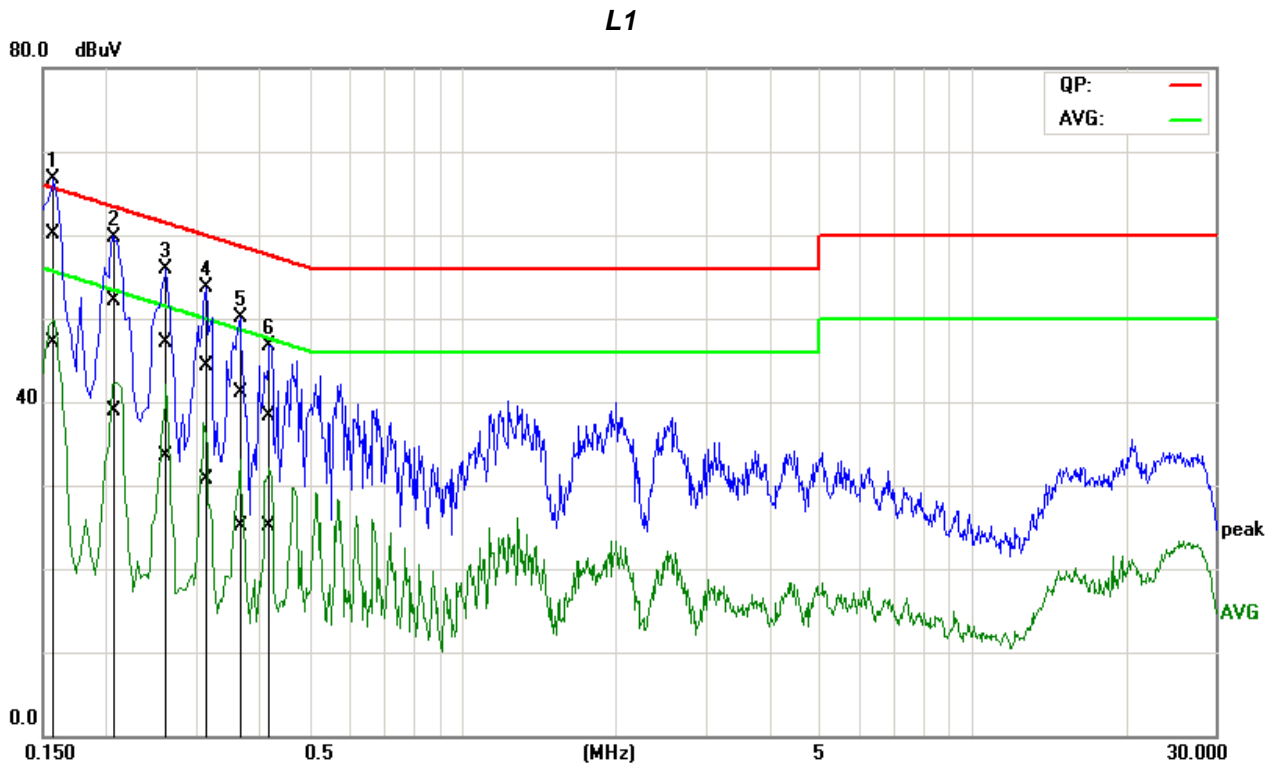

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1554	49.85	36.88	10.20	60.05	47.08	65.71	55.71	-5.66	-8.63	Pass
2	0.2080	42.04	28.77	10.09	52.13	38.86	63.28	53.28	-11.15	-14.42	Pass
3*	0.2601	37.04	23.39	10.10	47.14	33.49	61.43	51.43	-14.29	-17.94	Pass
4	0.3111	34.27	20.69	10.11	44.38	30.80	59.94	49.94	-15.56	-19.14	Pass
5	0.3646	30.95	15.03	10.12	41.07	25.15	58.62	48.62	-17.55	-23.47	Pass
6	0.4148	28.21	14.91	10.13	38.34	25.04	57.55	47.55	-19.21	-22.51	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C150227R01-RPW	Date:	2015-3-21
Model:	ST10*****	Time:	9:36:59
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

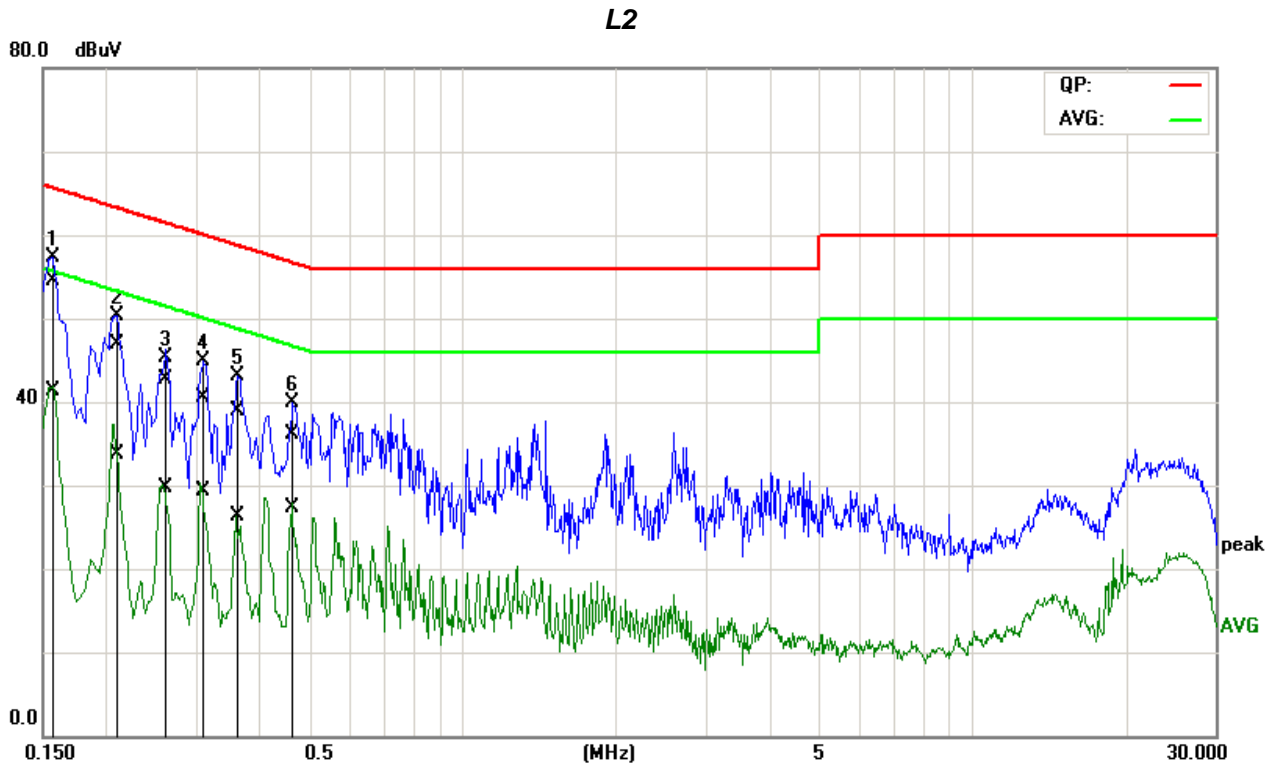

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1542	44.16	30.98	10.30	54.46	41.28	65.77	55.77	-11.31	-14.49	Pass
2	0.2063	36.66	23.38	10.23	46.89	33.61	63.35	53.35	-16.46	-19.74	Pass
3	0.2573	32.54	19.45	10.25	42.79	29.70	61.52	51.52	-18.73	-21.82	Pass
4	0.3070	30.32	19.05	10.27	40.59	29.32	60.05	50.05	-19.46	-20.73	Pass
5*	0.3594	28.54	16.05	10.28	38.82	26.33	58.74	48.74	-19.92	-22.41	Pass
6	0.4616	25.78	16.95	10.32	36.10	27.27	56.66	46.66	-20.56	-19.39	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).