


**The worst case of Radiated Emission below 1GHz:**

Site: AC2	Time: 2016/01/27 - 14:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11b at Channel 2412MHz	

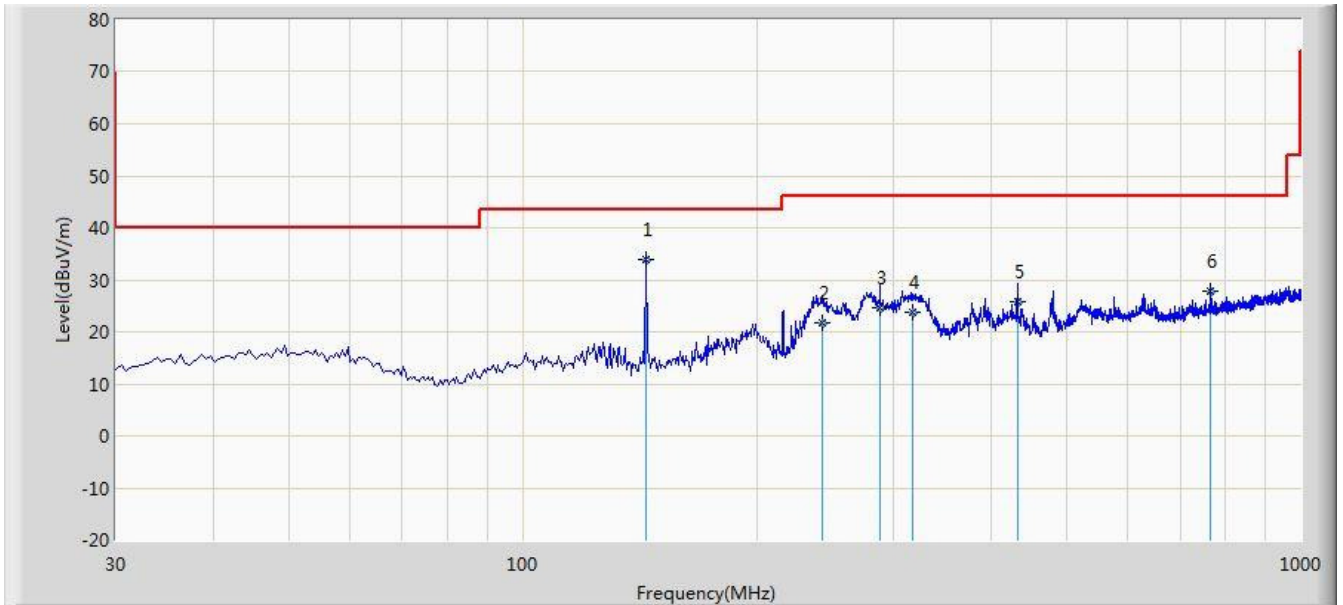


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	143.975	33.832	24.385	-9.668	43.500	9.446	QP
2			242.915	21.828	8.320	-24.172	46.000	13.508	QP
3			288.020	24.744	10.410	-21.256	46.000	14.334	QP
4			317.120	23.645	8.640	-22.355	46.000	15.004	QP
5			432.065	25.856	8.670	-20.144	46.000	17.187	QP
6			766.715	27.803	5.340	-18.197	46.000	22.463	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/01/27 - 14:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
<b>Worse Case Mode:</b> Transmit by 802.11b at Channel 2412MHz	

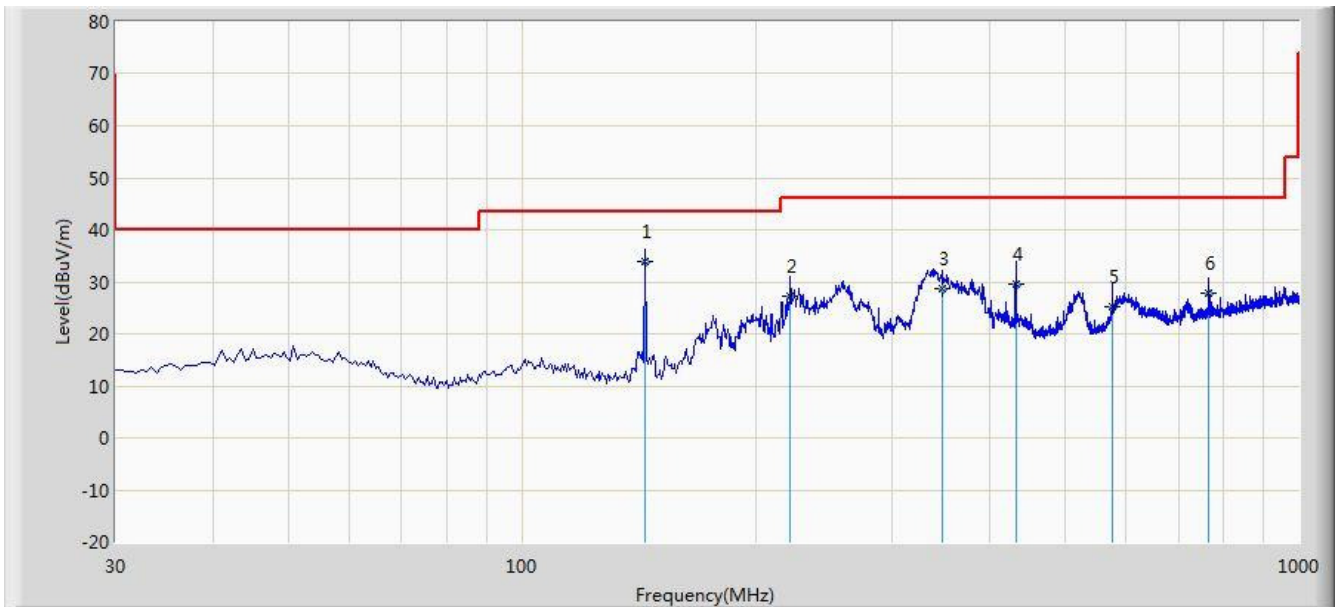


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	143.975	33.817	24.370	-9.683	43.500	9.446	QP
2			221.575	27.123	14.410	-18.877	46.000	12.713	QP
3			347.190	28.664	12.850	-17.336	46.000	15.814	QP
4			432.065	29.596	12.410	-16.404	46.000	17.187	QP
5			576.110	25.090	5.390	-20.910	46.000	19.700	QP
6			766.715	27.823	5.360	-18.177	46.000	22.463	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2016/1/27 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Personal Ground Station	Power: By Battery
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

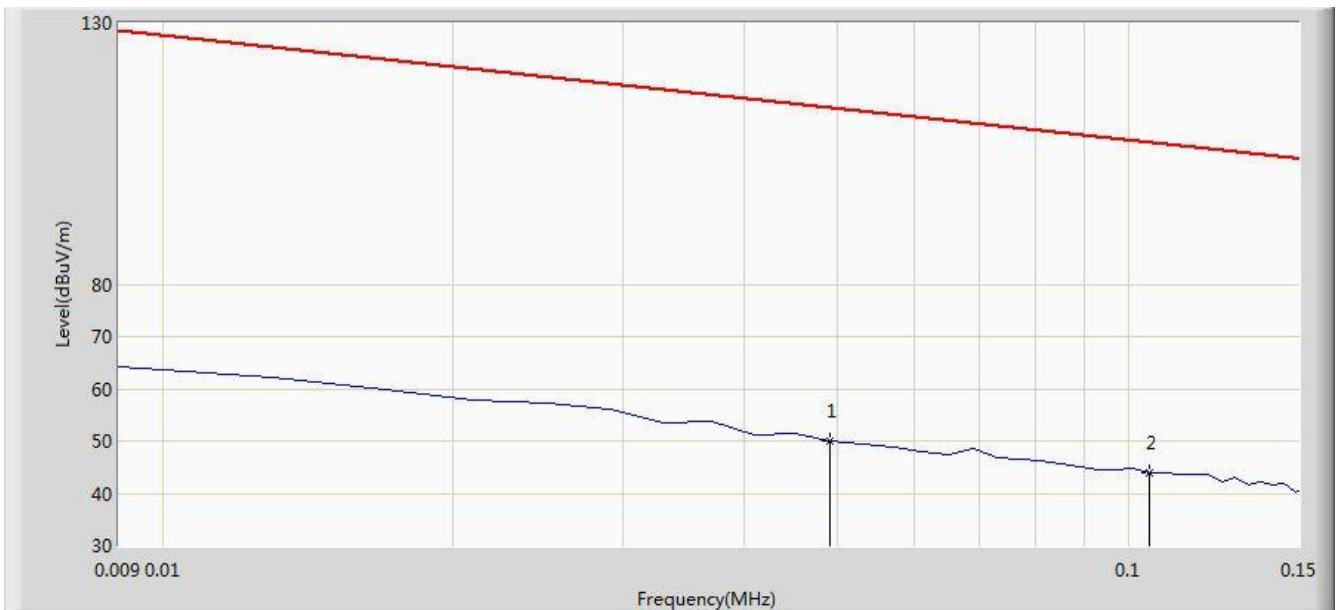


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.112	29.552	-63.688	113.800	20.560	AV
2		*	0.105	44.043	23.845	-63.137	107.180	20.198	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Limit@3m =  $20 \cdot \log((2400/49)\mu\text{V/m}) + 40 \cdot \log(300\text{m}/3\text{m}) = 113.800\text{dB}\mu\text{V/m}$  (Average detector)

Site: AC2	Time: 2016/1/27 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Personal Ground Station	Power: By Battery
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

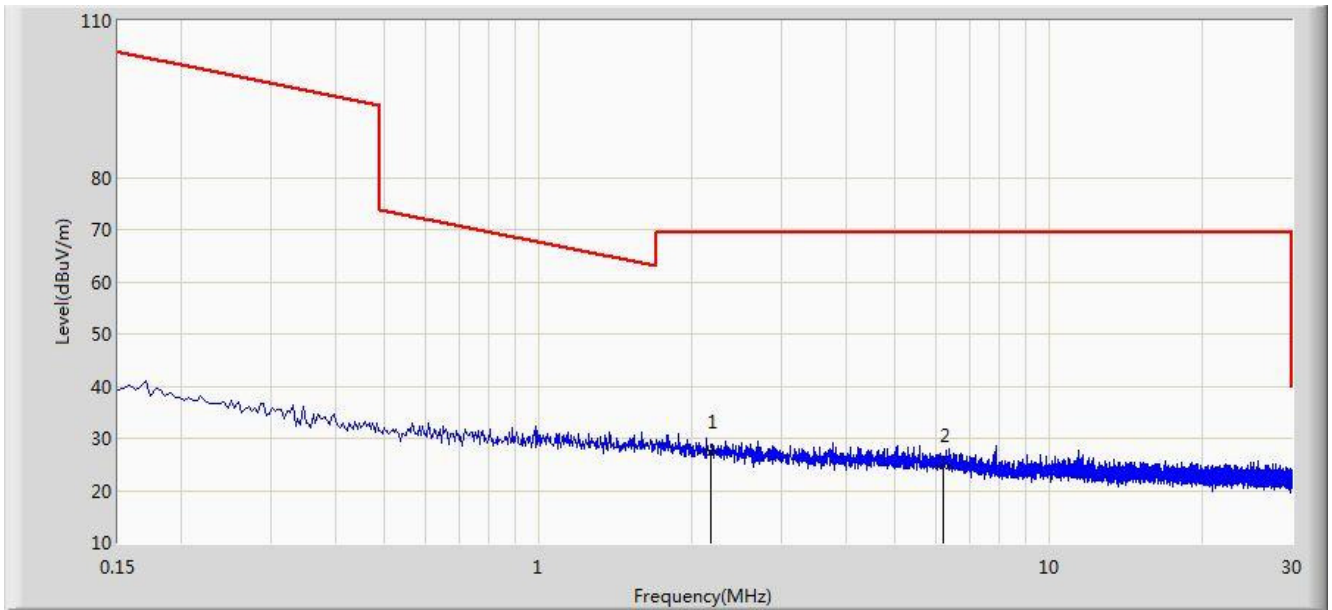


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2.175	27.371	6.960	-42.129	69.500	20.412	QP
2			6.216	24.786	4.701	-44.714	69.500	20.085	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Limit@3m =  $20 \cdot \log(30 \mu\text{V/m}) + 20 \cdot \log(30\text{m}/3\text{m}) = 49.5 \text{ dB}\mu\text{V/m}$  (Average detector), and  $69.5 \text{ dB}\mu\text{V/m}$  (Quasi-Peak detector).

Site: AC2	Time: 2016/1/27 - 16:25
Limit: FCC_Part15.209_RE(1m)	Engineer: Lewis Huang
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
<b>Note: There is the ambient noise within frequency range 18GHz~25GHz.</b>	

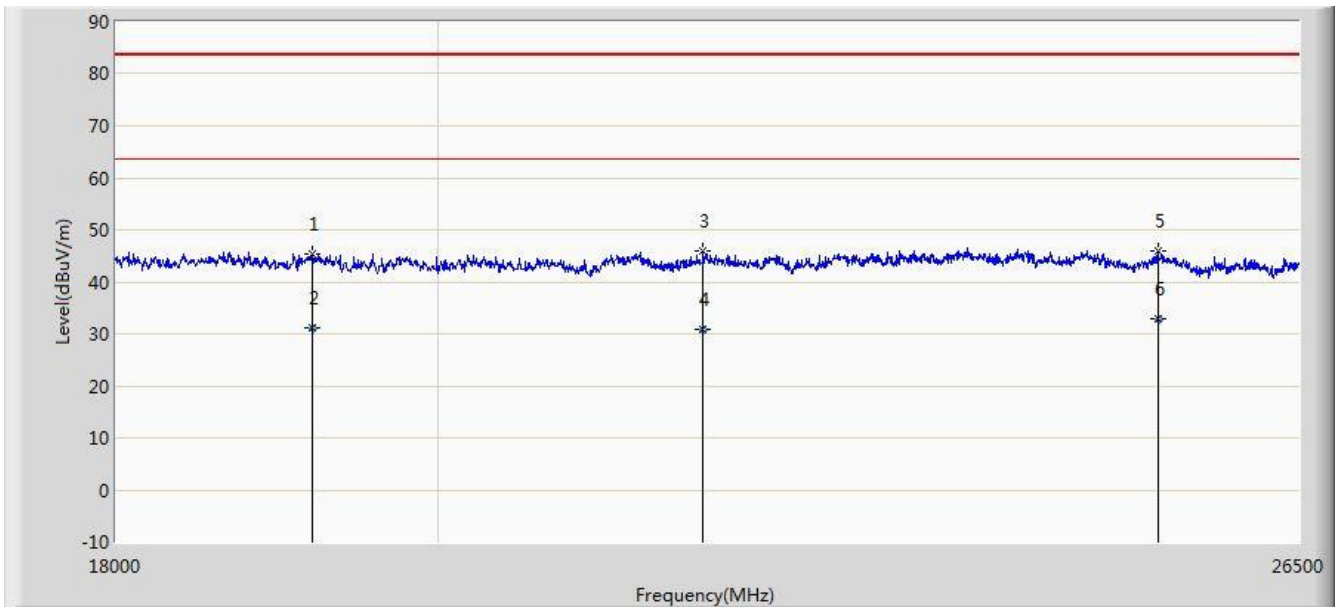


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			19194.250	45.350	44.174	-38.150	83.500	1.176	PK
2			19194.250	31.296	30.120	-32.204	63.500	1.176	AV
3			21812.250	45.806	45.995	-37.694	83.500	-0.189	PK
4			21812.250	31.001	31.190	-32.499	63.500	-0.189	AV
5			25310.000	45.892	43.365	-37.608	83.500	2.527	PK
6		*	25310.000	32.957	30.430	-30.543	63.500	2.527	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Limit@1m = 20\*Log(500uV/m) + 20\*Log(3m/1m) = 63.5dB $\mu$ V/m (Average detector), and 83.5dB $\mu$ V/m (Peak detector).

Site: AC2	Time: 2016/1/27 - 16:31
Limit: FCC_Part15.209_RE(1m)	Engineer: Lewis Huang
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
<b>Note: There is the ambient noise within frequency range 18GHz~25GHz.</b>	

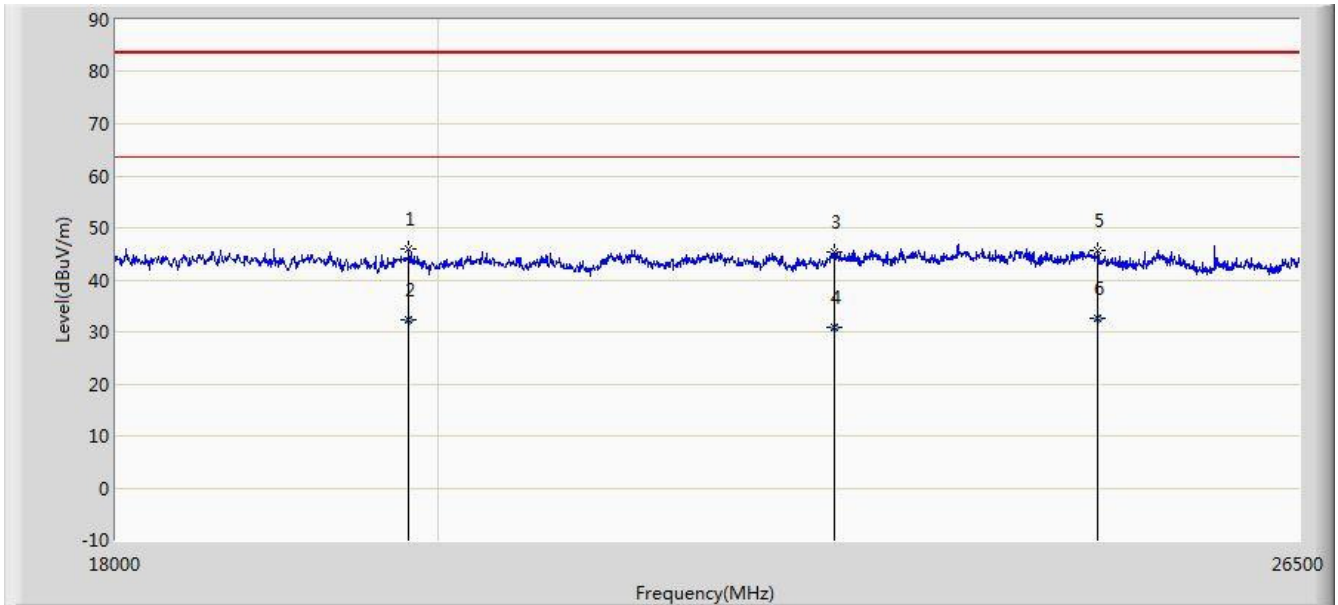

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			19810.500	46.028	45.623	-37.472	83.500	0.405	PK
2			19810.500	32.225	31.820	-31.275	63.500	0.405	AV
3			22764.250	45.366	44.798	-38.134	83.500	0.568	PK
4			22764.250	30.798	30.230	-32.702	63.500	0.568	AV
5			24812.750	45.794	43.064	-37.706	83.500	2.730	PK
6		*	24812.750	32.620	29.890	-30.880	63.500	2.730	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Limit@1m = 20\*Log(500uV/m) + 20\*Log(3m/1m) = 63.5dB $\mu$ V/m (Average detector), and 83.5dB $\mu$ V/m (Peak detector).

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Site: AC2	Time: 2016/01/27 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

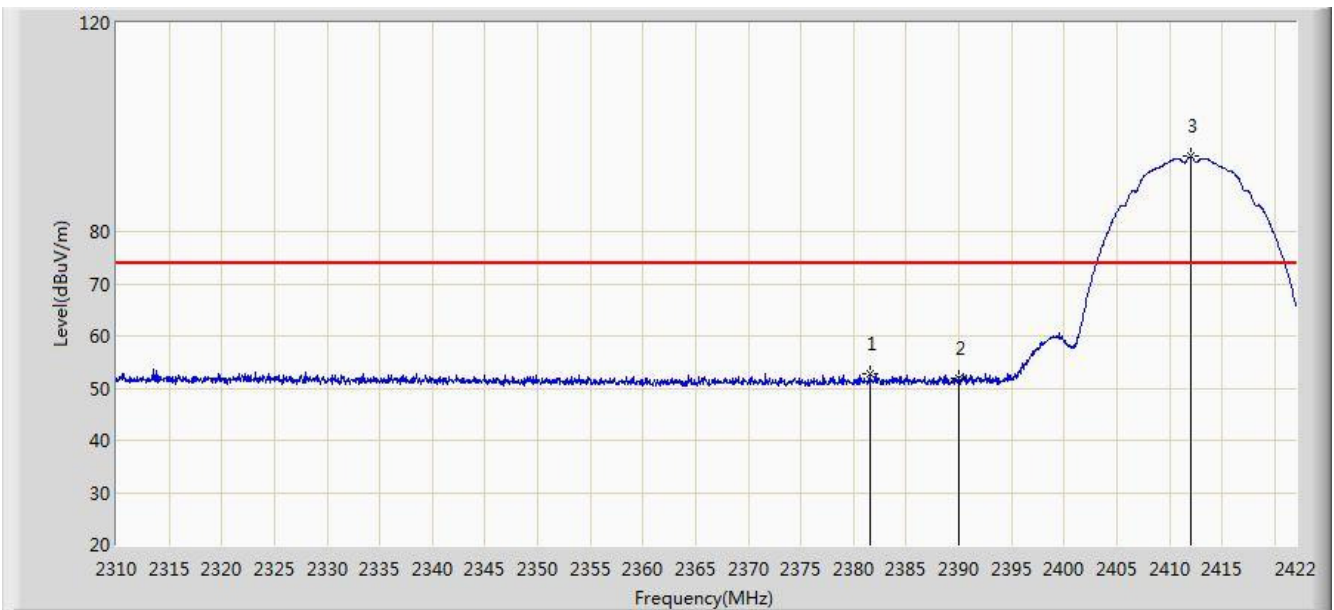


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.568	52.774	55.316	-21.226	74.000	-2.542	PK
2			2390.000	51.778	54.378	-22.222	74.000	-2.600	PK
3		*	2411.976	94.383	97.043	N/A	N/A	-2.660	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

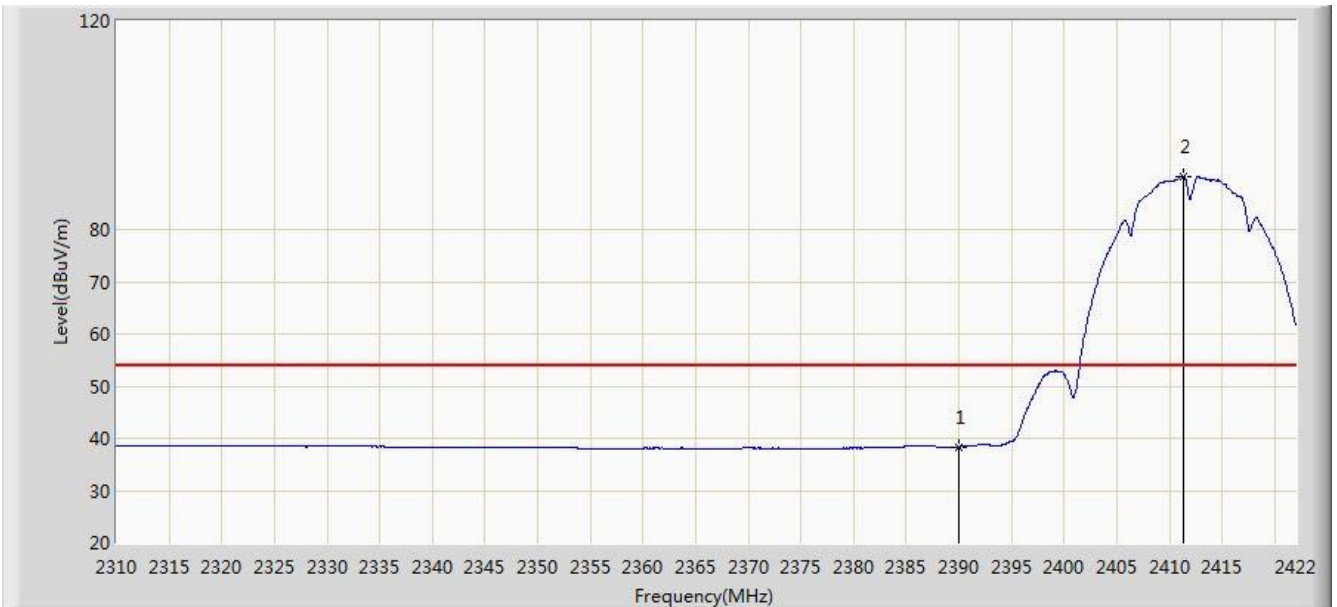


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.308	40.908	-15.692	54.000	-2.600	AV
2		*	2411.304	90.269	92.924	N/A	N/A	-2.655	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)



Site: AC2	Time: 2016/01/27 - 15:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

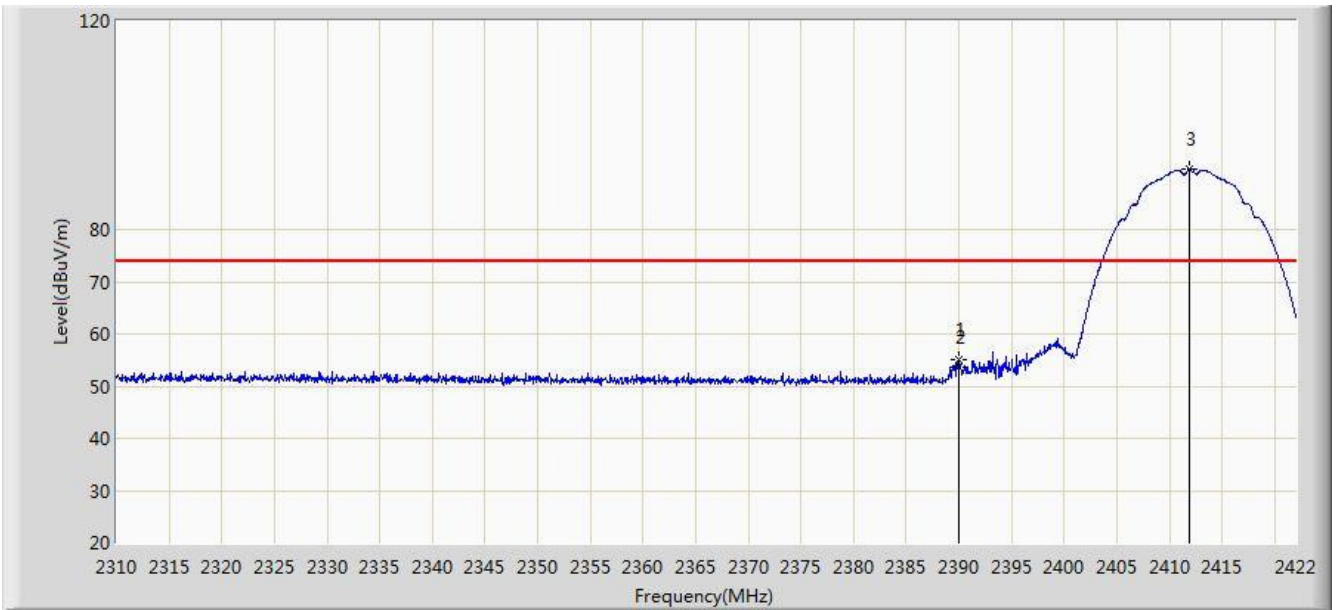


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	55.200	57.800	-18.800	74.000	-2.600	PK
2			2390.000	53.734	56.334	-20.266	74.000	-2.600	PK
3		*	2411.864	91.596	94.255	N/A	N/A	-2.659	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 15:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

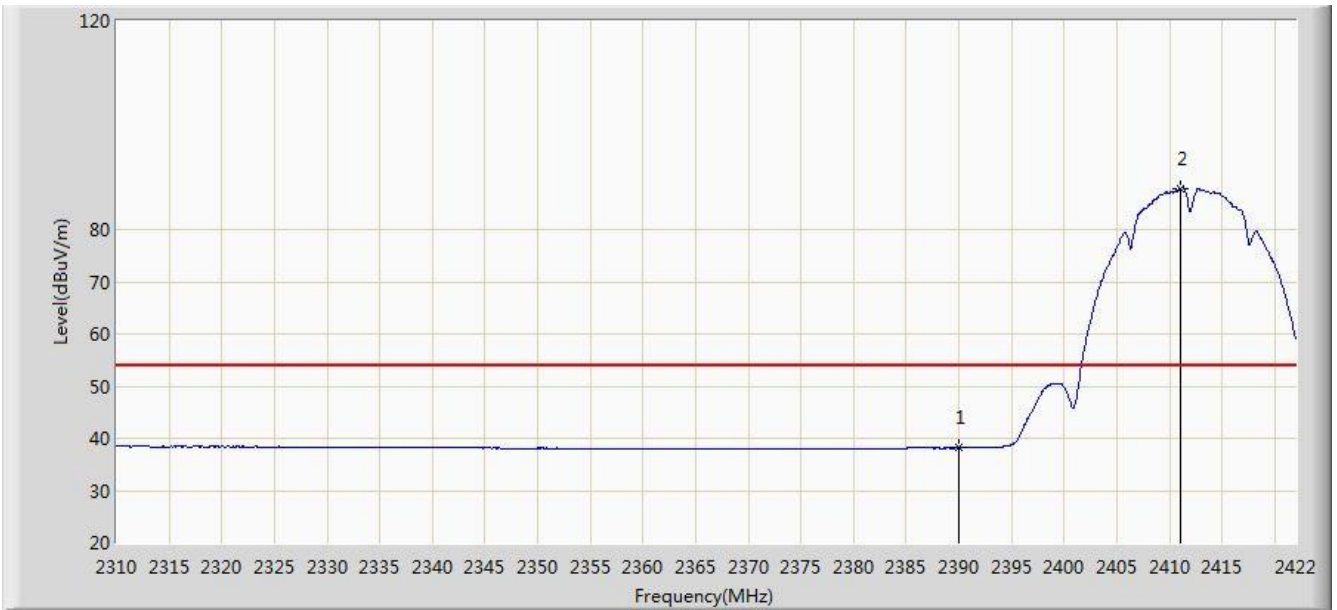


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.178	40.778	-15.822	54.000	-2.600	AV
2		*	2411.080	87.924	90.578	N/A	N/A	-2.654	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 15:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz	

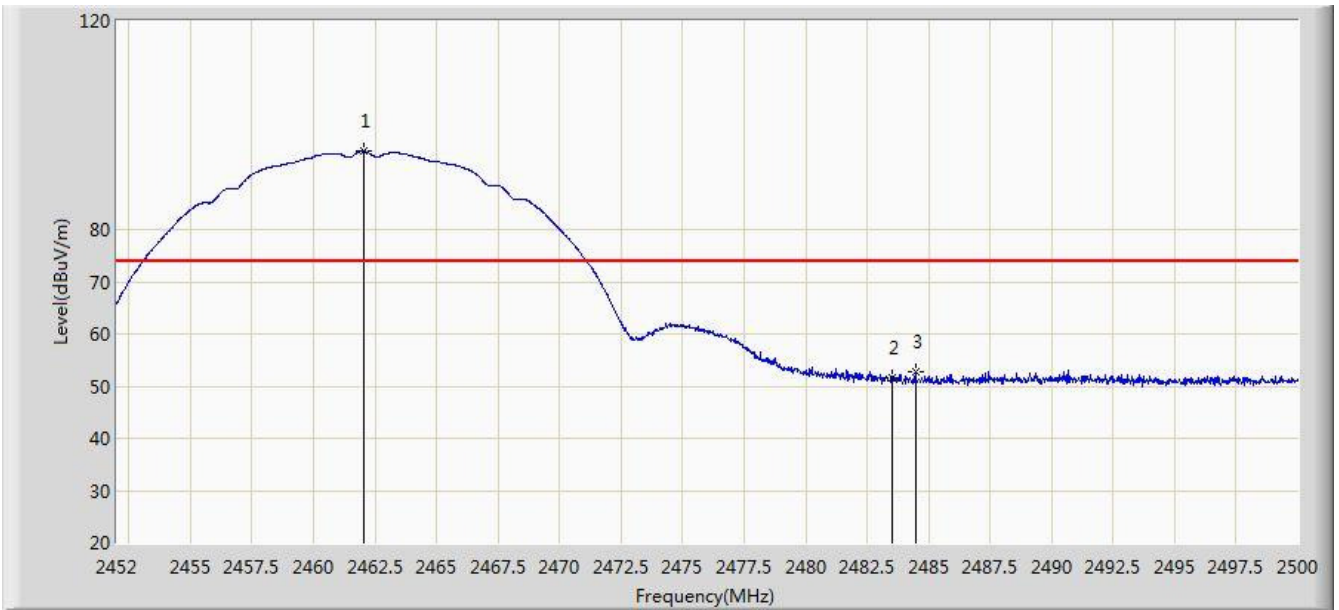

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	95.048	98.013	N/A	N/A	-2.965	PK
2			2483.500	51.716	54.687	-22.284	74.000	-2.971	PK
3			2484.472	52.724	55.697	-21.276	74.000	-2.974	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	91.299	94.262	N/A	N/A	-2.962	AV
2			2483.500	38.761	41.732	-15.239	54.000	-2.971	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz	

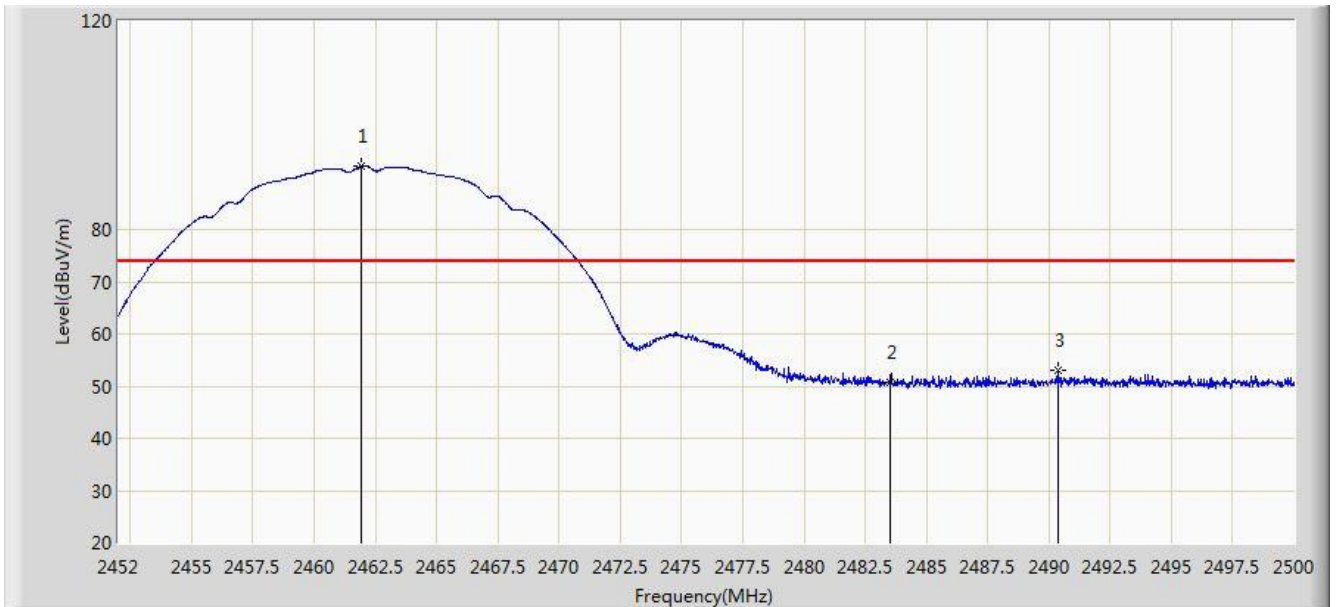


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.936	92.217	95.182	N/A	N/A	-2.965	PK
2			2483.500	50.798	53.769	-23.202	74.000	-2.971	PK
3			2490.352	53.015	55.998	-20.985	74.000	-2.983	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz	

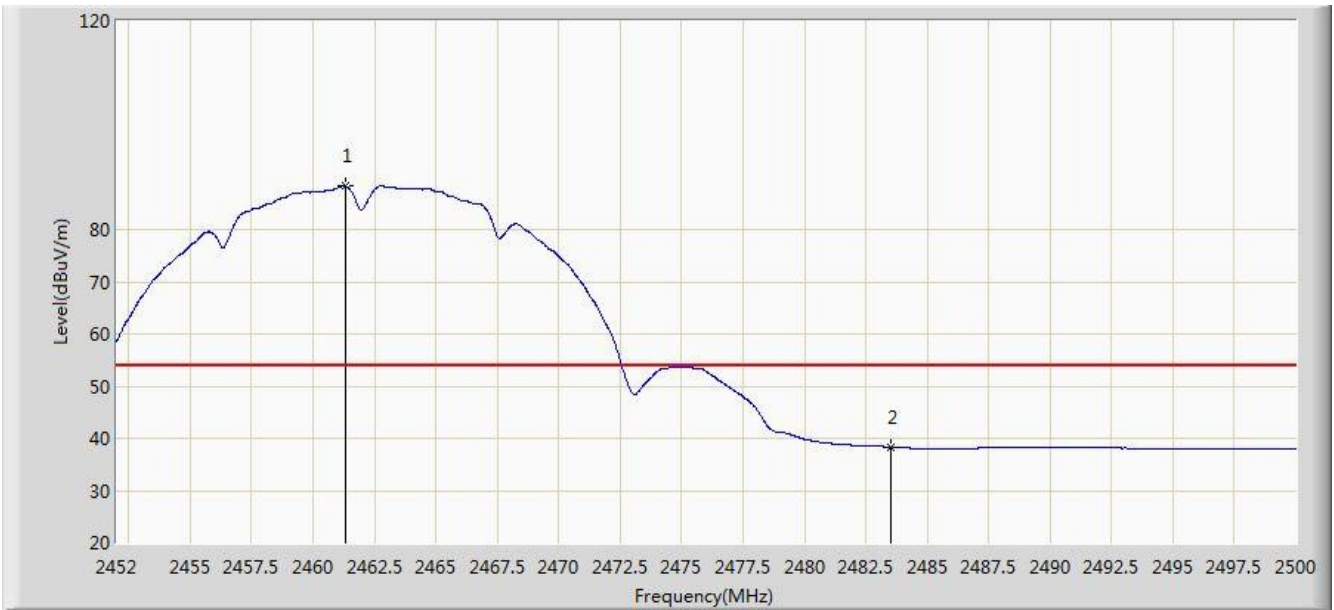

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	88.278	91.241	N/A	N/A	-2.962	AV
2			2483.500	38.339	41.310	-15.661	54.000	-2.971	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.629	64.229	-12.371	74.000	-2.600	PK
2		*	2414.776	95.936	98.615	N/A	N/A	-2.679	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz	

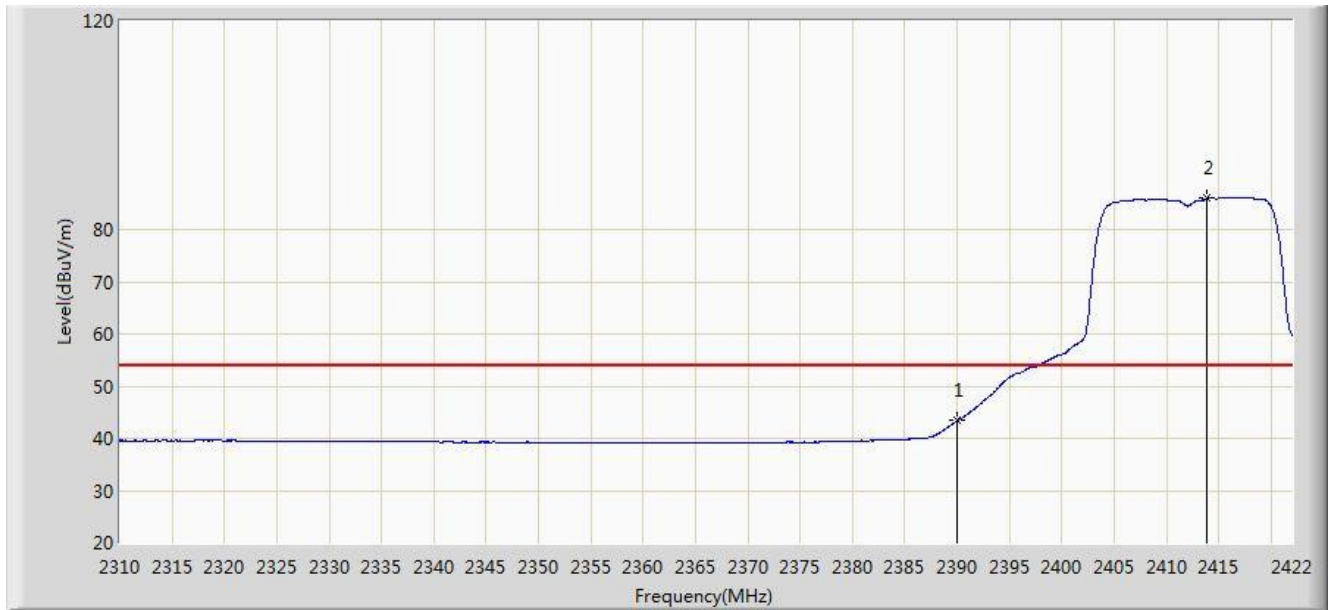


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.349	45.949	-10.651	54.000	-2.600	AV
2		*	2413.880	85.996	88.669	N/A	N/A	-2.673	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)



Site: AC2	Time: 2016/01/27 - 16:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz	

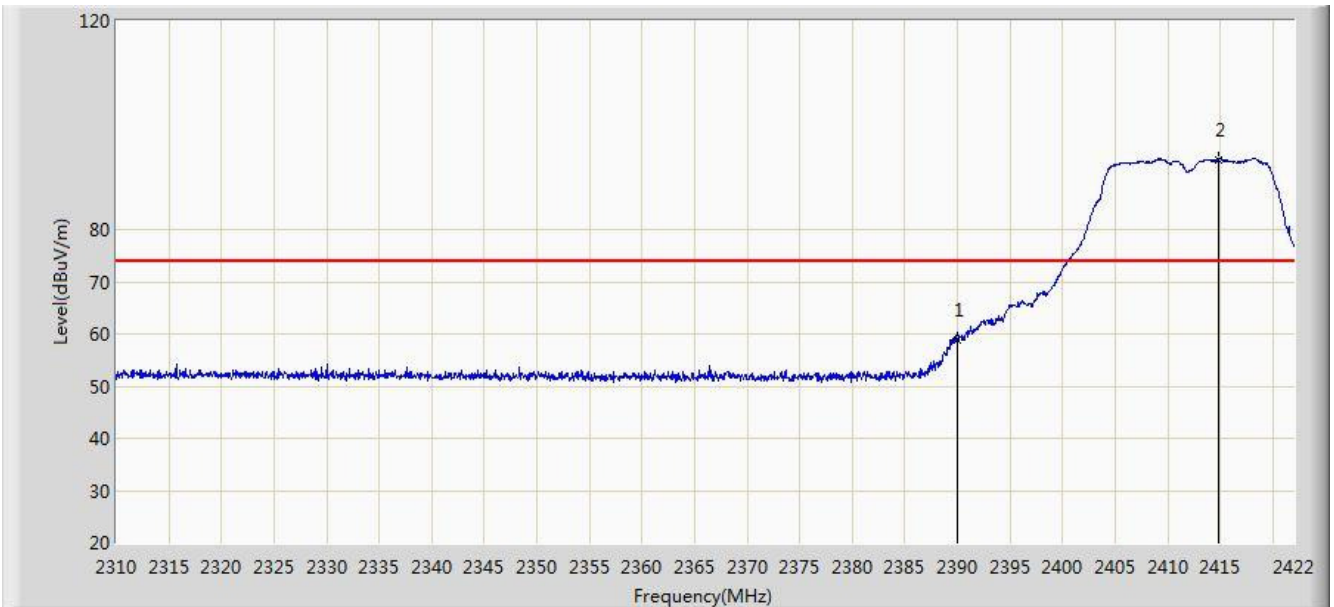


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.845	61.445	-15.155	74.000	-2.600	PK
2		*	2414.832	93.460	96.139	N/A	N/A	-2.679	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz	

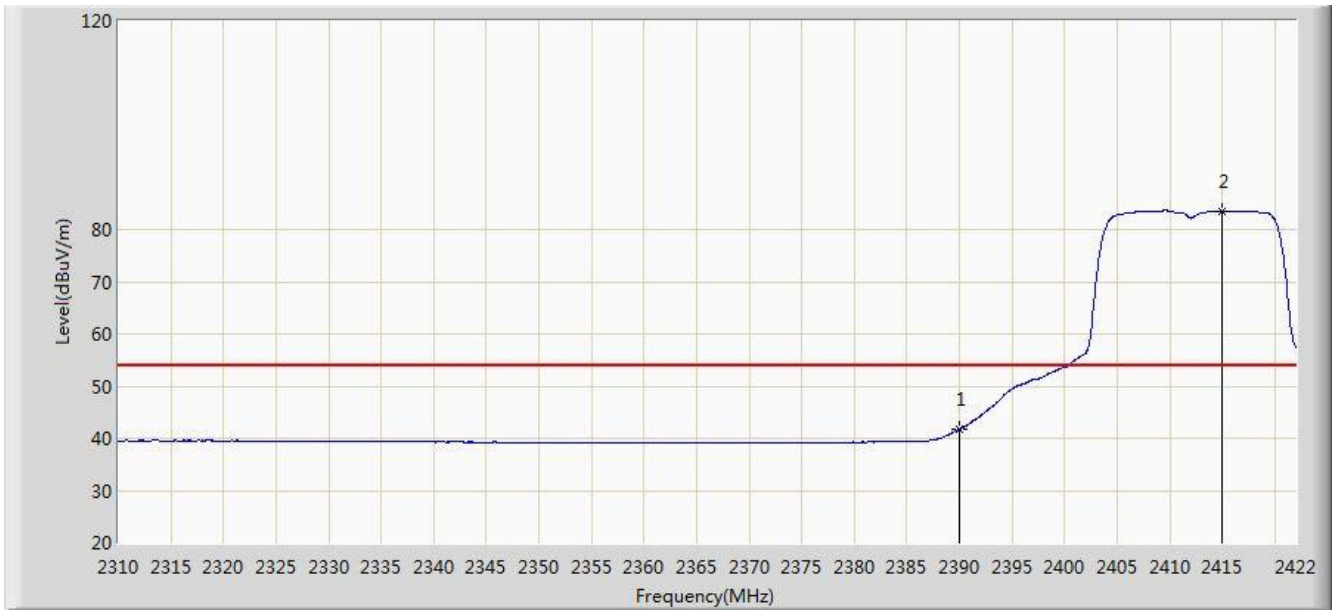

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.799	44.399	-12.201	54.000	-2.600	AV
2		*	2415.000	83.512	86.192	N/A	N/A	-2.680	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.176	97.290	100.256	N/A	N/A	-2.965	PK
2			2483.500	61.717	64.688	-12.283	74.000	-2.971	PK
3			2484.112	62.813	65.785	-11.187	74.000	-2.972	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz	

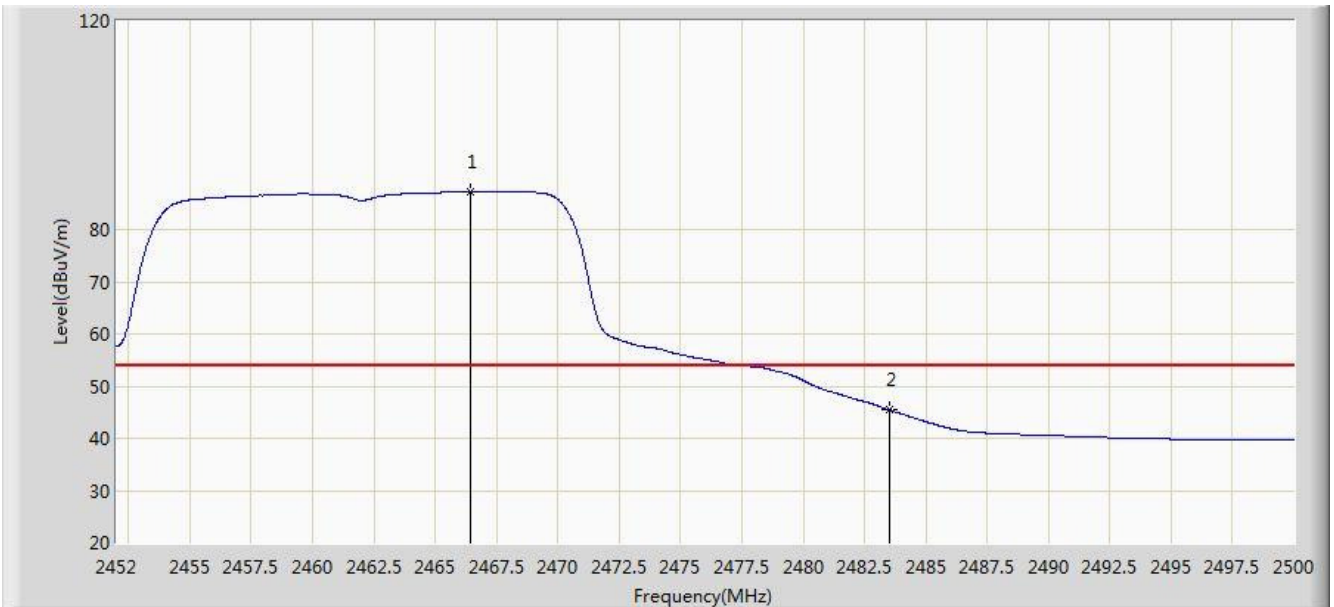


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.448	87.254	90.220	N/A	N/A	-2.966	AV
2			2483.500	45.435	48.406	-8.565	54.000	-2.971	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz	

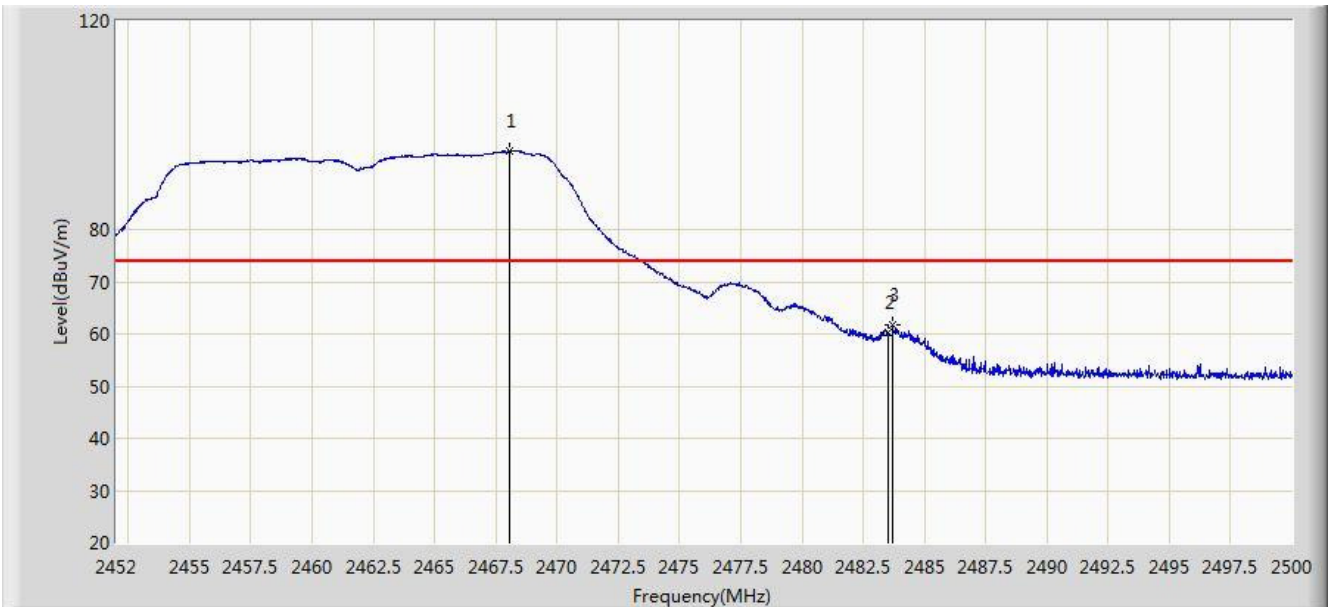


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.032	95.019	97.985	N/A	N/A	-2.966	PK
2			2483.500	60.191	63.162	-13.809	74.000	-2.971	PK
3			2483.704	61.796	64.768	-12.204	74.000	-2.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz	

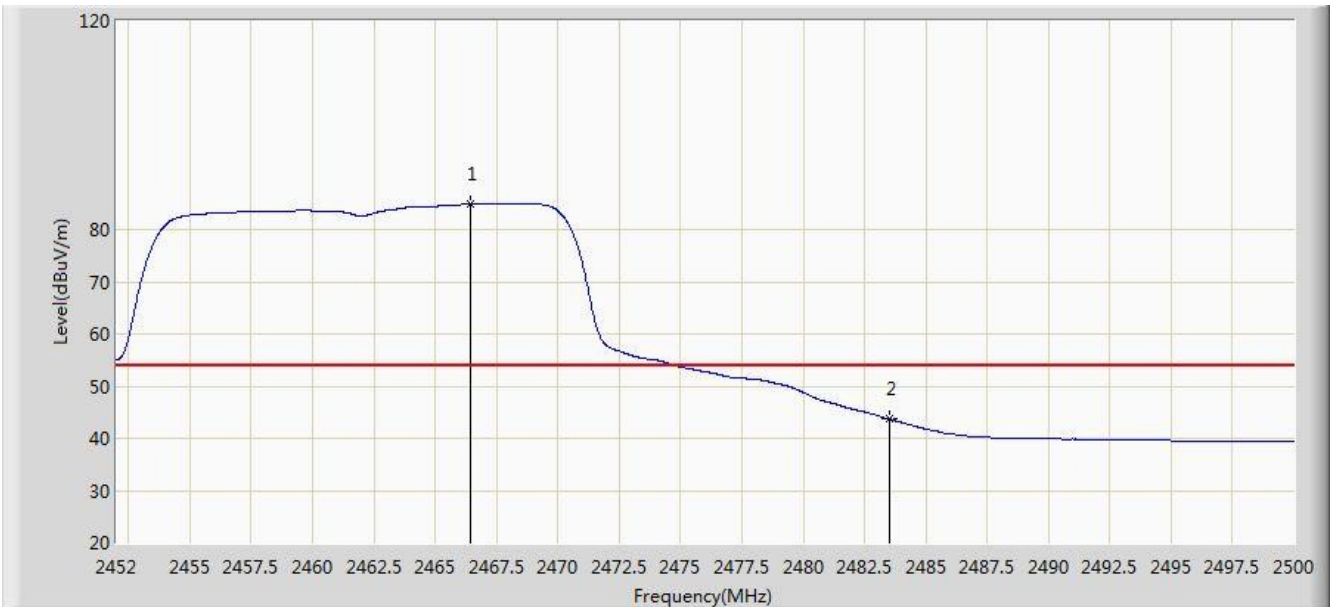


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.448	84.854	87.820	N/A	N/A	-2.966	AV
2			2483.500	43.690	46.661	-10.310	54.000	-2.971	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

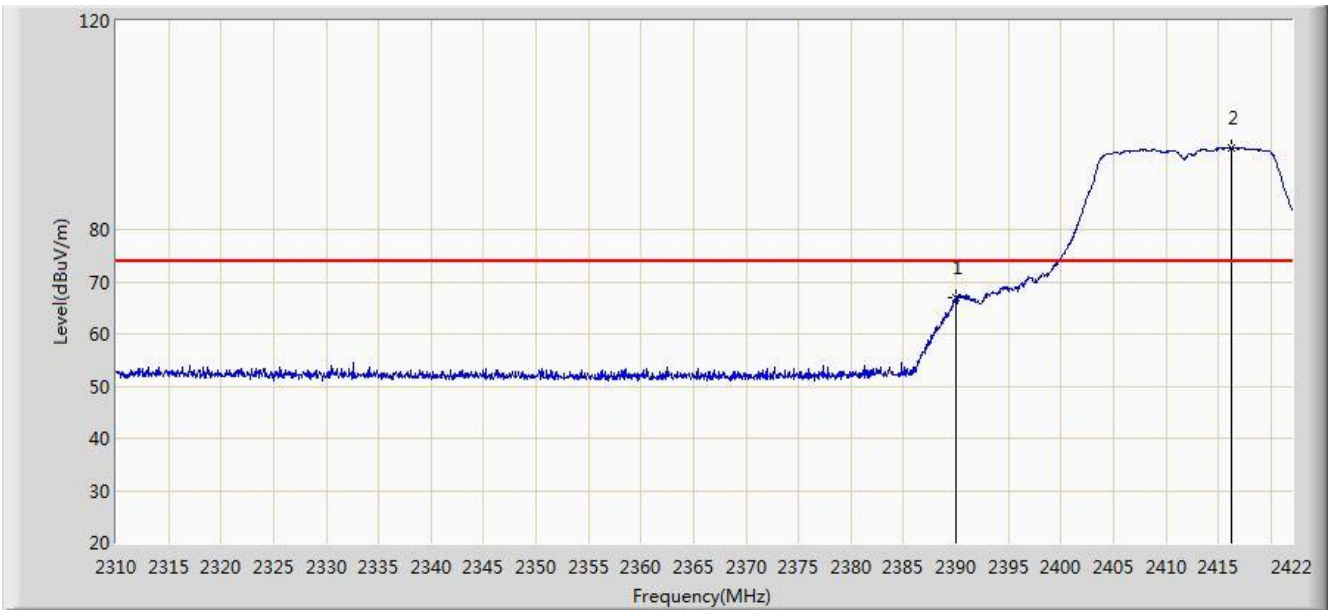


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.859	69.459	-7.141	74.000	-2.600	PK
2		*	2416.176	95.689	98.377	N/A	N/A	-2.688	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

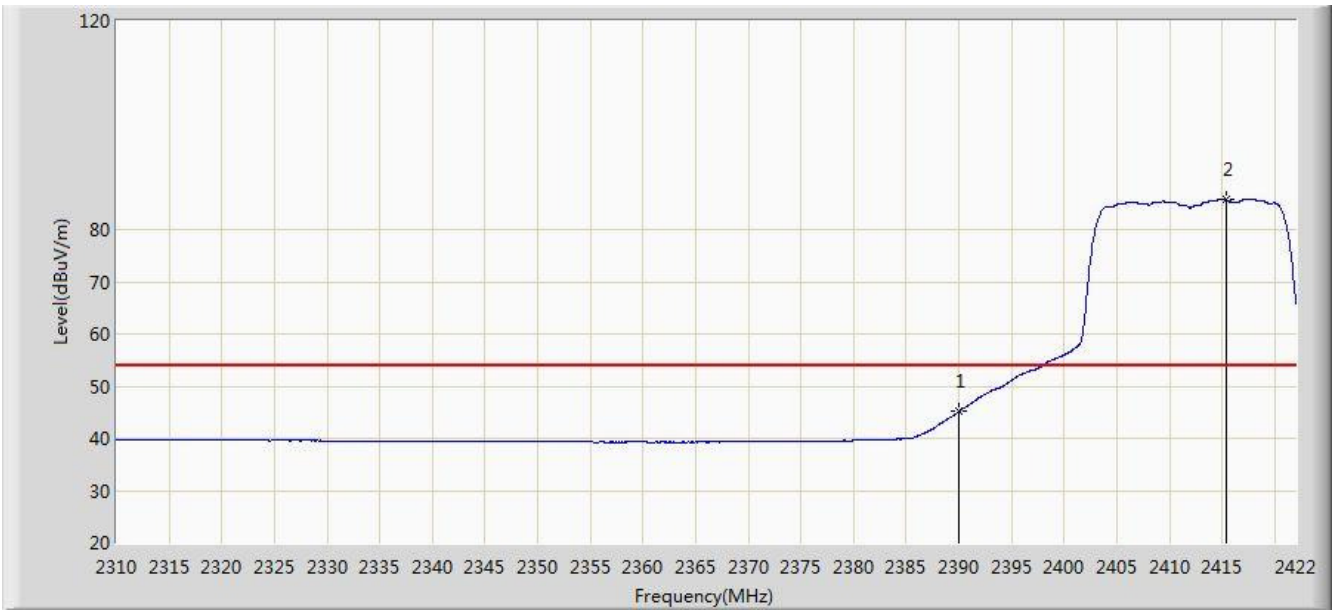


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.115	47.715	-8.885	54.000	-2.600	AV
2		*	2415.336	85.841	88.523	N/A	N/A	-2.682	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)



Site: AC2	Time: 2016/01/27 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

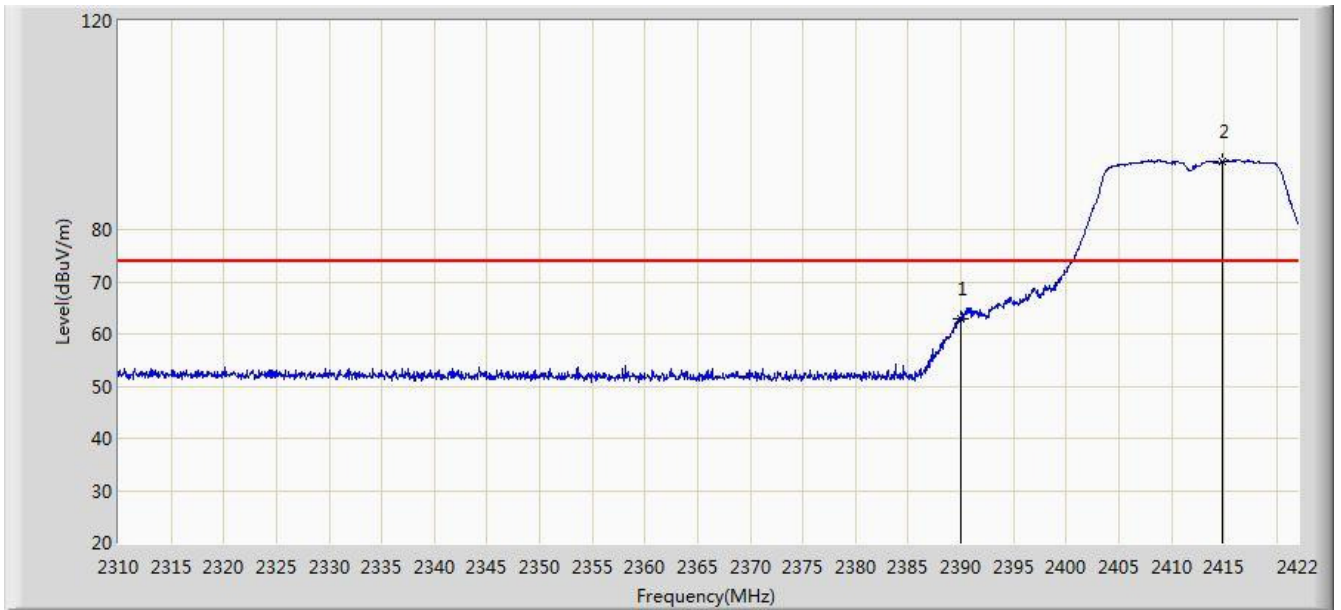


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.020	65.620	-10.980	74.000	-2.600	PK
2		*	2414.832	93.145	95.824	N/A	N/A	-2.679	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

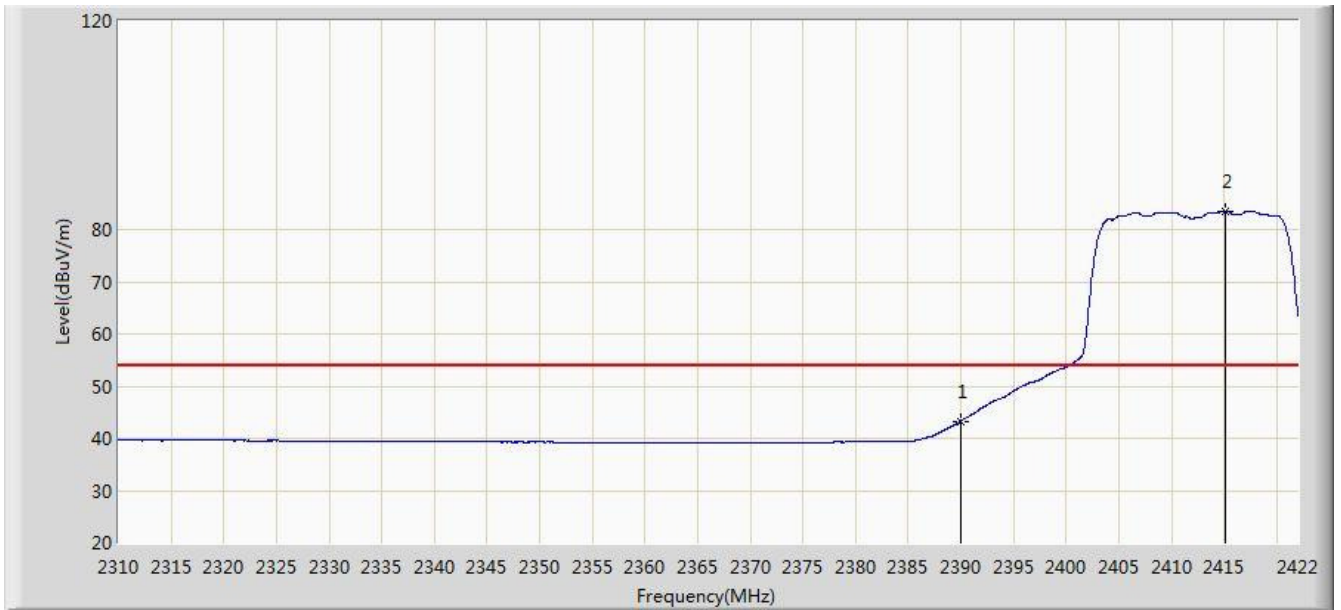


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.304	45.904	-10.696	54.000	-2.600	AV
2		*	2415.168	83.564	86.245	N/A	N/A	-2.682	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

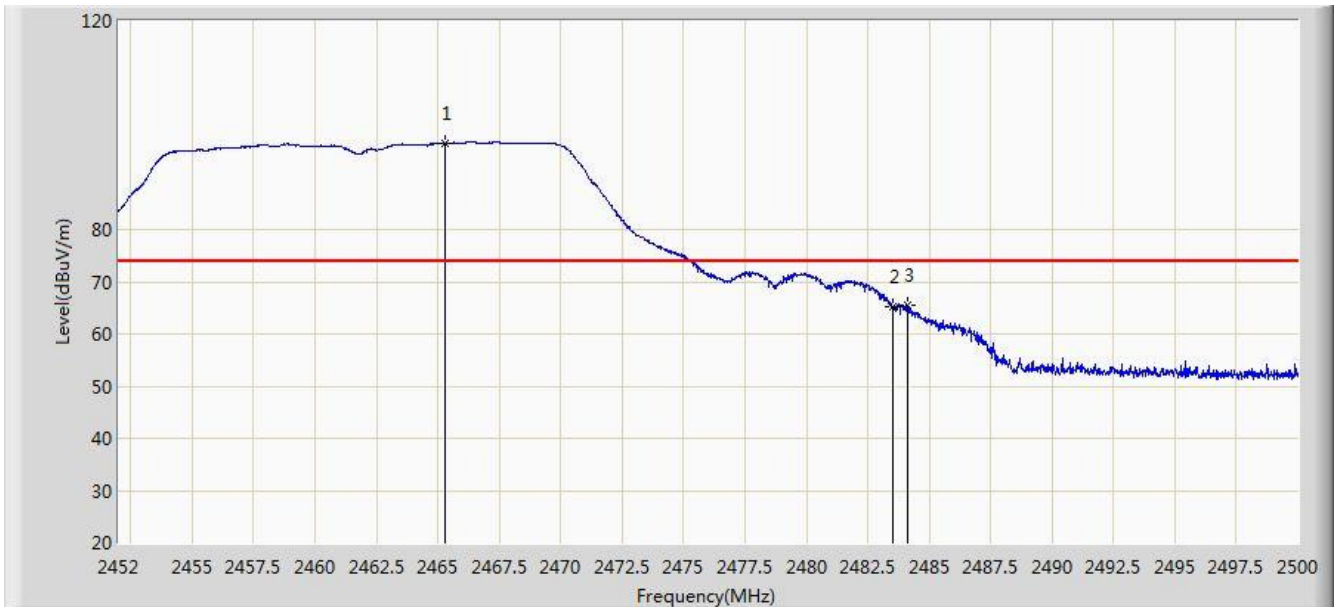


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.296	96.564	99.530	N/A	N/A	-2.965	PK
2			2483.500	65.285	68.256	-8.715	74.000	-2.971	PK
3			2484.112	65.557	68.529	-8.443	74.000	-2.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

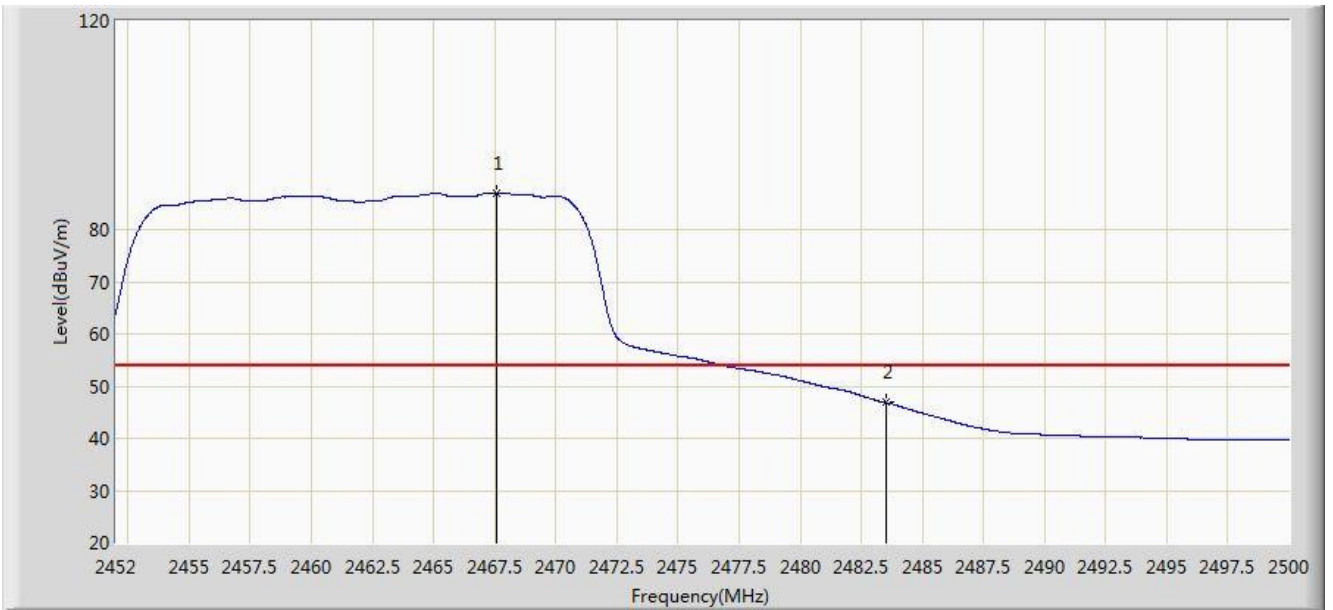


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.576	86.970	89.936	N/A	N/A	-2.966	AV
2			2483.500	46.814	49.785	-7.186	54.000	-2.971	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

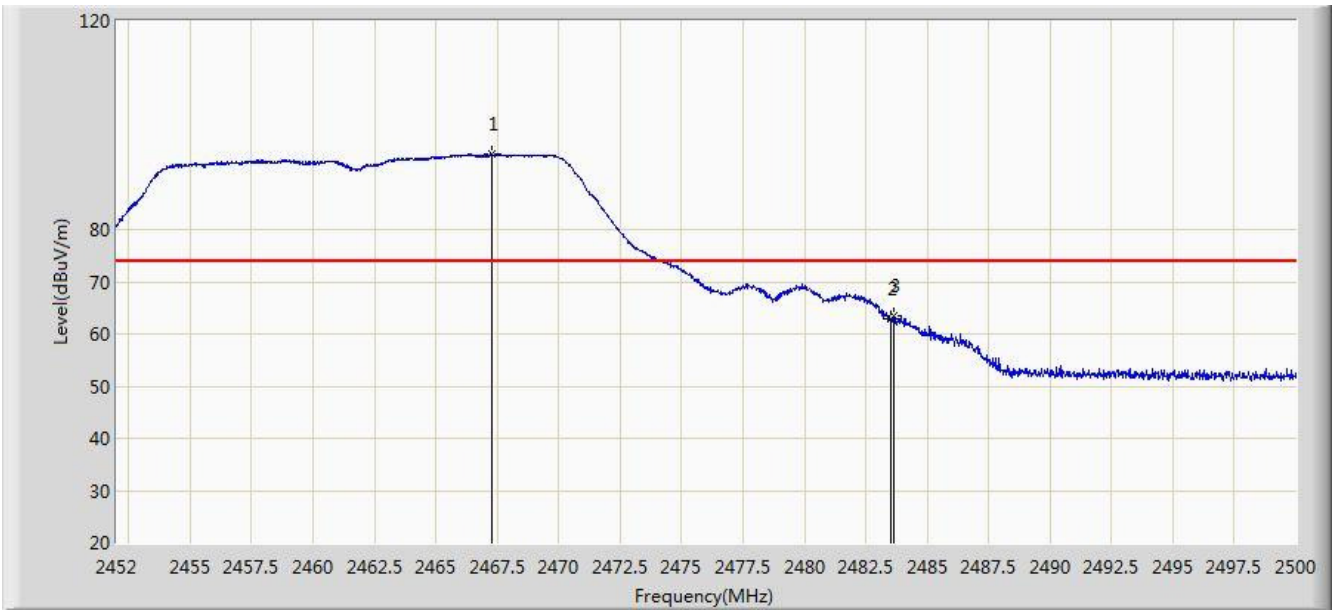


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.288	94.400	97.366	N/A	N/A	-2.967	PK
2			2483.500	62.767	65.738	-11.233	74.000	-2.971	PK
3			2483.656	63.555	66.527	-10.445	74.000	-2.972	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

Site: AC2	Time: 2016/01/27 - 16:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Personal Ground Station	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

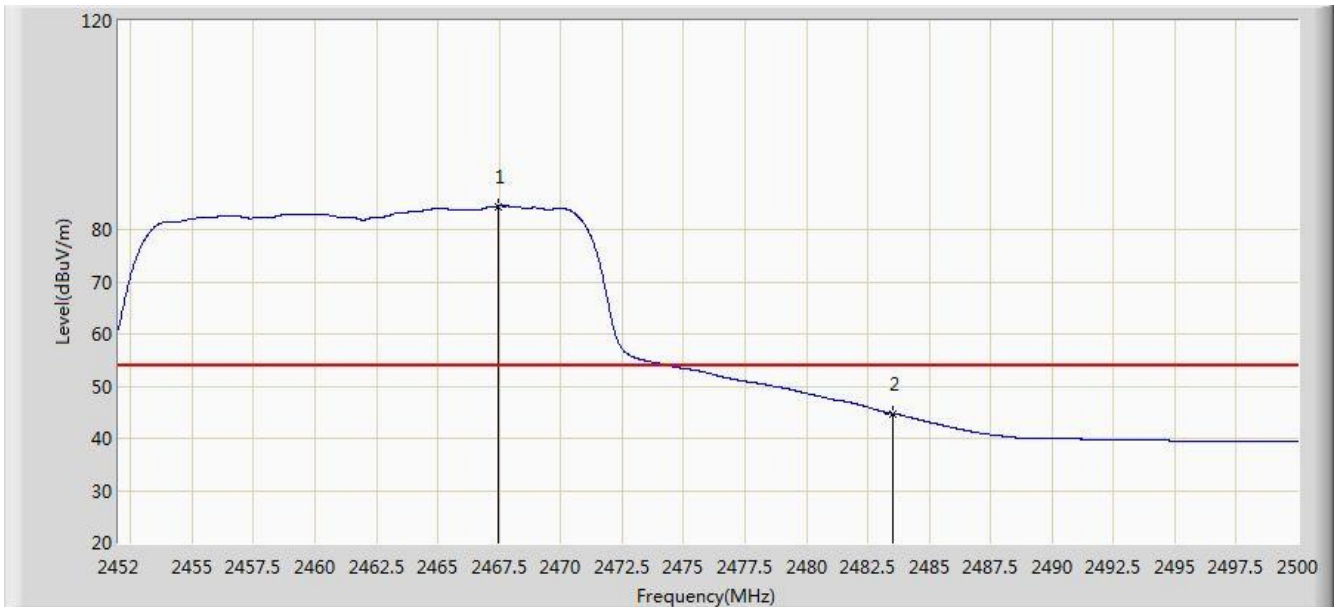

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.432	84.486	87.452	N/A	N/A	-2.965	AV
2			2483.500	44.763	47.734	-9.237	54.000	-2.971	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre\_Amplifier Gain (dB)

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

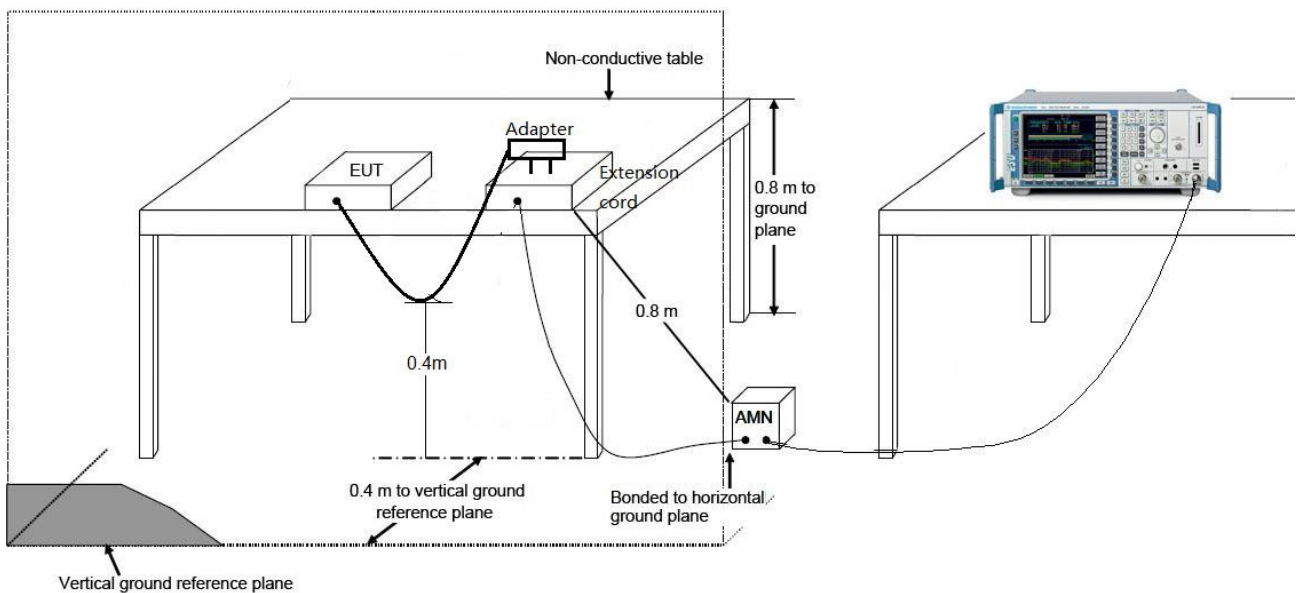

### 7.8.3. Test Result

Site: SR2	Time: 2016/07/19 - 14:22
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Personal Ground Station	Power: AC 120V/60Hz
Note: Mode 1	

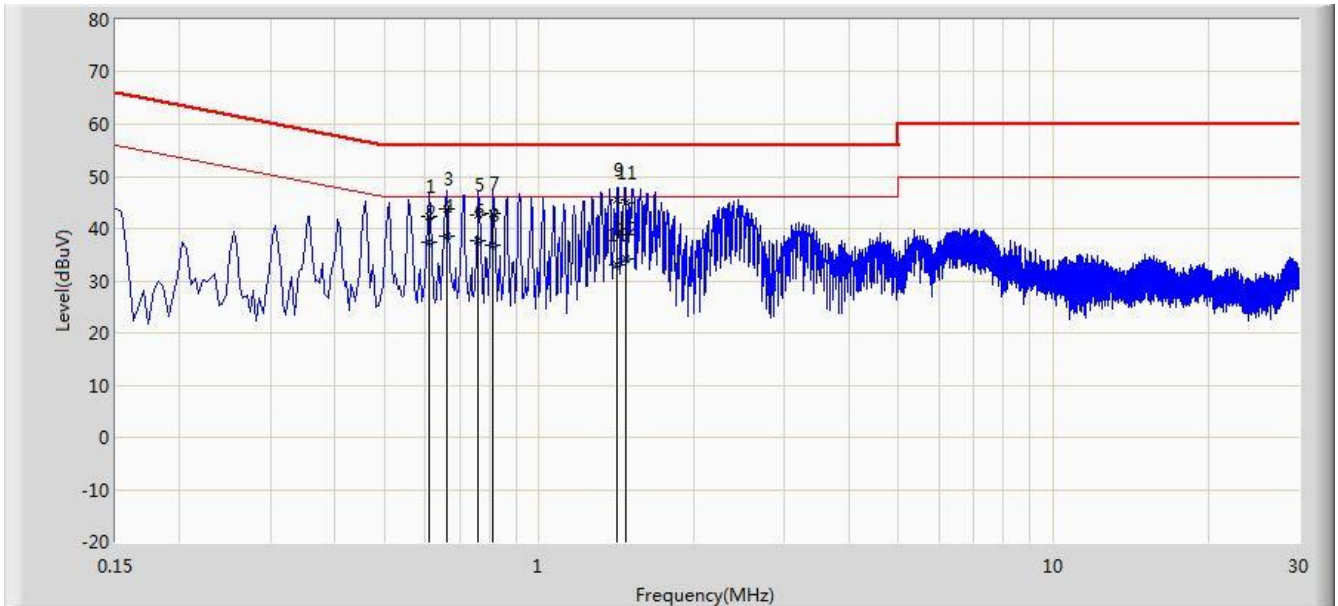


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.610	42.339	32.229	-13.661	56.000	10.110	QP
2			0.610	37.383	27.273	-8.617	46.000	10.110	AV
3			0.662	43.876	33.793	-12.124	56.000	10.083	QP
4		*	0.662	38.497	28.414	-7.503	46.000	10.083	AV
5			0.762	42.640	32.609	-13.360	56.000	10.031	QP
6			0.762	37.691	27.660	-8.309	46.000	10.031	AV
7			0.814	43.002	32.998	-12.998	56.000	10.004	QP
8			0.814	36.951	26.947	-9.049	46.000	10.004	AV
9			1.418	45.565	35.673	-10.435	56.000	9.892	QP
10			1.418	33.187	23.295	-12.813	46.000	9.892	AV
11			1.478	44.921	35.031	-11.079	56.000	9.890	QP
12			1.478	34.182	24.292	-11.818	46.000	9.890	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)



Site: SR2	Time: 2016/07/19 - 14:42
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Personal Ground Station	Power: AC 120V/60Hz
Note: Mode 1	

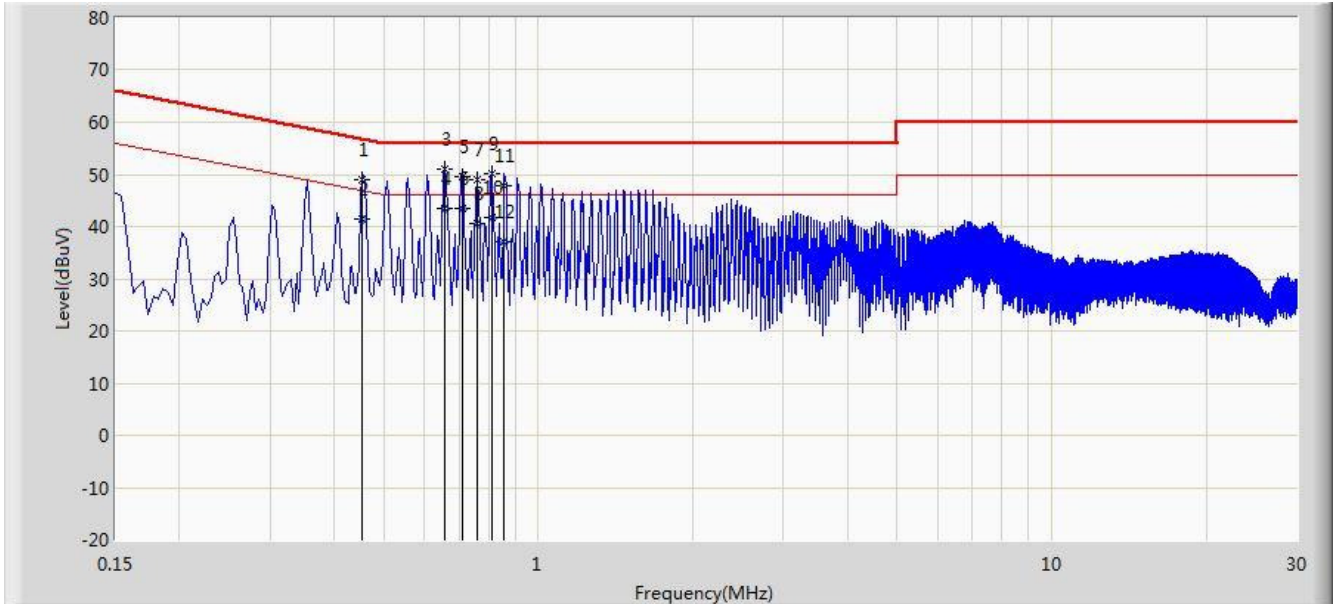

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.454	49.101	38.948	-7.701	56.802	10.153	QP
2			0.454	41.388	31.235	-5.414	46.802	10.153	AV
3			0.658	50.873	40.775	-5.127	56.000	10.099	QP
4		*	0.658	43.433	33.334	-2.567	46.000	10.099	AV
5			0.710	49.548	39.478	-6.452	56.000	10.069	QP
6			0.710	43.358	33.289	-2.642	46.000	10.069	AV
7			0.758	49.057	39.014	-6.943	56.000	10.043	QP
8			0.758	40.472	30.429	-5.528	46.000	10.043	AV
9			0.810	50.022	40.009	-5.978	56.000	10.014	QP
10			0.810	41.860	31.846	-4.140	46.000	10.014	AV
11			0.858	47.877	37.889	-8.123	56.000	9.987	QP
12			0.858	37.077	27.090	-8.923	46.000	9.987	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Personal Ground Station FCC ID: 2ACS5-ST16P** is in compliance with Part 15C of the FCC Rules.

————— The End —————